

(19) **DANMARK**

(10) **DK/EP 2381700 T3**



(12)

Oversættelse af
europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **H 04 R 25/00 (2006.01)** **G 01 H 7/00 (2006.01)** **G 10 L 21/02 (2013.01)**
H 04 S 7/00 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2015-06-01**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2015-03-11**
- (86) Europæisk ansøgning nr.: **10160435.3**
- (86) Europæisk indleveringsdag: **2010-04-20**
- (87) Den europæiske ansøgnings publiceringsdag: **2011-10-26**
- (84) Designerede stater: **AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**
- (73) Patenthaver: **Oticon A/S, Kongebakken 9, 2765 Smørum, Danmark**
- (72) Opfinder: **Jensen, Jesper, Oticon A/S, c/o Kongebakken 9, 2765 Smørum, Danmark**
- (54) Benævnelse: **Fjernelse af efterklang fra et signal med anvendelse af omgivelsesinformation**
- (56) Fremdragne publikationer:
WO-A1-2008/128563
AT-B- 410 597
US-A1- 2004 213 415

DESCRIPTION

TECHNICAL FIELD

[0001] The present application relates to improvements in processing algorithms in audio processing devices, in particular to an improved compensation for room reverberation. The disclosure relates specifically to an audio processing system comprising an audio processing device and an external device, where the external device is adapted to transmit an information signal to the audio processing device. The application furthermore relates to a method of operating an audio processing system.

[0002] The disclosure may e.g. be useful in applications such as hearing aids, ear phones or active ear protection devices, public address systems, teleconferencing systems, etc.

BACKGROUND ART

[0003] The following account of the prior art relates to one of the areas of application of the present application, hearing aids.

[0004] The primary purpose of a hearing aid (HA) is to amplify sound regions which would otherwise be inaudible to a hearing impaired user. In quiet, non-reverberant surroundings a state-of-the-art HA succeeds, and the user is usually able to hear and understand everything.

[0005] However, in reverberant environments, e.g. rooms with hard surfaces, churches, etc., the ability to understand speech declines. This is so because the signal from the target speaker is reflected on the surfaces of the environment; consequently, not only the direct (un-reflected) sound from the target speaker reaches the ears of the HA user, but also delayed and dampened versions are received due to the reflections. The larger and "harder" a room is, the more reflections. In the extreme case, the reflections are perceived as an echo.

[0006] The amount of reverberation in a room can be broadly characterized through a single quantity called T60 and defining a characteristic reverberation time. T60 is defined as the time required for reflections of a direct sound to decay by 60 dB below the level of the direct sound. The larger the value of T60, the more reverberation in the room. T60 and its measurement are defined in ISO 3382-1:2009.

[0007] Recently, a class of signal processing algorithms have been introduced which, in principle, are capable of processing the reverberant signal picked up at the microphone and produce a processed signal where the reverberation has been reduced, see e.g. [Habets, 2007] or [Löllmann, 2009] and the references therein. Ideally these algorithms would use the T60 to adjust the processing, but since this quantity is not known in general, it is estimated from the reverberant signal. Unfortunately this is difficult to do in a reliable manner, and the algorithms are rather sensitive to a decent estimate of T60. Had the T60 been known to the signal processing algorithms somehow, performance would be significantly better.

[0008] US 2009/208043 A1 describes an external device capable of wirelessly transmitting information about the local acoustic environment to a hearing aid. US 2004/213415 A1 describes a method of determining reverberation, e.g. for use in a hearing aid. WO 2008/128563 A1 deals with a hearing system comprising a storage unit, which comprises location-related data, which are data related to the hearing system's current location. This way, it is possible to provide that the function of the hearing system changes in dependence of the location the hearing system is in. AT410597 B deals with a method of recording or modeling acoustic properties of a room.

DISCLOSURE OF INVENTION

[0009] In an aspect, a system is provided that combines an audio processing device comprising a de-reverberation algorithm with an external transmitter, specific to a room or environment, which transmits to the audio processing device, information about the characteristics of the room. Specifically, for the algorithm class mentioned above, this information could be the average T60 of the room in question. Thus, instead of *estimating* the T60, the algorithms get the "truth" e.g. via a wirelessly transmitted information signal.

[0010] An object of the present application is to provide an audio processing system that is able to take account of the particular reverberation of the room or location where a user is presently located.

[0011] Objects of the application are achieved by the invention described in the accompanying claims and as described in the following.

[0012] An object of the application is achieved by an audio processing system comprising an audio processing device and an external device as defined in claim 1.

[0013] This has the advantage that the specific reverberation of a room can be taken into account in the processing of an electric signal representing an acoustic signal picked up in the room in question.

[0014] In an embodiment, the audio processing device and the external device located (or are adapted to be located) in or at the same room.

[0015] In a particular embodiment, *the external device* comprises a readable memory wherein said measure of reverberation is stored. The measure can e.g. be measured in advance and read into the memory before or after the external device is located in the room in question. In a particular embodiment, the external device comprises an interface (e.g. a wired or wireless interface) to a programming unit, e.g. a PC, to allow an easy transfer of information, including the measure of reverberation, to (a memory) of the external unit. In an embodiment, the external device is energized from a mains supply (e.g. when wall mounted). Alternatively, the external device comprises a battery (e.g. a rechargeable battery) for energizing the electronic components of the device). In an embodiment, the external unit is implemented as an RFID transponder component, e.g. a passive transponder, comprising the measure of reverberation of the room where it is located, and wherein the audio processing device is adapted to transmit an interrogation signal to the RFID transponder and to receive as a reply the measure of reverberation from the RFID transponder. In an embodiment, the external device is portable and energized by a local energy source, e.g. a battery. In a particular embodiment, the external device is a portable device adapted for being worn by a user and/or placed in an appropriate location of a room.

[0016] In a particular embodiment, the *external device* is adapted to measure and/or estimate said measure of reverberation itself. In a particular embodiment, the external device comprises a microphone and a signal processing unit and a sound transducer. In an embodiment, the external device issues an acoustic probe signal and receives the reflected signal by the microphone and analyses the signal by comparing the issued probe signal with the received reflected signal by the signal processing unit (e.g. in a time-frequency environment) to provide a measure of the reverberation of the room in question. During installation, the external transmitter can thus e.g. self-calibrate, i.e., simply transmit a sound ping (audible or not) and measure the reverberation time itself.

[0017] In a particular embodiment, the measure of reverberation is the T60 measure or an estimate thereof. This reverberation time can be measured as indicated in ISO 3382-1:2009.

[0018] In a particular embodiment, the *external device* is adapted to make a reverberation measurement at certain predefined points in time, e.g. according to a predefined measurement frequency. In an embodiment, the external device comprises an activation element (e.g. a button on the device or via a wired or wireless interface and a programming unit, e.g. a PC or remote control) for initiating a reverberation measurement.

[0019] In a particular embodiment, the *external device* is adapted to store a number of measured values of said measure of reverberation at corresponding points in time and to determine a time averaged value, e.g. a running average.

[0020] The *external device* can be a device located on the wall of the room/enclosure or in a door frame, where a user wearing the audio processing device, e.g. a listening device enters the room.

[0021] Transmission of the information signal comprising a measure of reverberation of the room or location in question from the external device to the audio processing device can be via any of the existing wireless techniques (e.g. an analogue modulation scheme, such as FM (frequency modulation) or AM (amplitude modulation), or a digital modulation scheme, such as ASK (amplitude shift keying), e.g. On-Off keying, FSK (frequency shift keying), PSK (phase shift keying) or QAM (quadrature amplitude modulation), etc.). The external device (transmitter) can e.g. be installed by the user himself, e.g. inside a car or in other often used environments or in a room used for teleconferences (e.g. including video-conferences). It can also be installed by the authorities in charge of the room in question, e.g. churches, theatres, concert halls, cafés, museums, auditoria, class rooms, etc.

[0022] In an embodiment, the *audio processing device* comprises a forward path between an input transducer (microphone system and/or direct electric input (e.g. a wireless receiver)) and an output transducer. In an embodiment, the signal processing unit is located in the forward path.

[0023] In a particular embodiment, the *audio processing device* comprises a microphone. Alternatively or additionally, the audio processing device may comprise a direct (wired) electric input or a wireless input providing a direct electric input signal representative of a sound generated in the room where the audio processing device is located. In an embodiment, the direct electric input is received from a microphone of another device (e.g. an audio gateway or a mobile telephone or a wireless telephone) worn by the user or located in proximity of the user (e.g. within 2 m of the user). In an embodiment, the audio processing device comprises a signal processing unit adapted to execute an algorithm for reducing the effect of reverberation in the signal picked up by the microphone or microphones of the audio processing device or located in proximity of the user wearing the audio processing device, the algorithm being adapted for taking into account the measure of reverberation received from the external device.

[0024] In a particular embodiment, the *audio processing device* comprises an automatic speech recognition algorithm that uses said measure of reverberation to improve the quality of speech recognition.

[0025] In an embodiment, the *audio processing device* comprises a directional microphone system adapted to separate two or more acoustic sources in the local environment of the user wearing the audio processing device. In an embodiment, the directional system is adapted to detect (such as adaptively detect) from which direction a particular part of the microphone signal originates. This can be achieved in various different ways as e.g. described in US 5,473,701 or in WO 99/09786 A1 or in EP 2 088 802 A1.

[0026] In an embodiment, the microphone and the rest of the *audio processing device* constitute two physically separate bodies, each having their own dedicated housing and either being not physically connected or physically connected by a releasable or fixed connecting mechanism, e.g. an electrical (and/or mechanical, e.g. acoustical) connector. In a particular embodiment, the audio processing device is a listening device, e.g. a hearing instrument. In an embodiment, the audio processing device is embodied in a hearing instrument of the BTE-type, e.g. comprising a BTE-part adapted for being located at or behind the ear of a user and an ITE-part (e.g. comprising an output transducer) adapted to be located in the ear canal or in the ear of the user. Alternatively, the microphone and the audio processing device may form part of the same physical body (e.g. a hearing instrument of the ITE-type adapted to be located completely in the ear canal of a user).

[0027] In an embodiment, the *audio processing device* comprises a portable device, e.g. an ear piece, e.g. a headset, and ear phone, an active ear protection device, a hearing instrument or combinations thereof.

[0028] In an embodiment, the audio processing device comprises a transmission unit for transmitting the processed signal to another device or system, e.g. via a (wired or wireless) network.

[0029] In an embodiment, the *audio processing system* comprises a teleconferencing system, e.g. for transmitting sound signals picked up at one location (e.g. a specific room for that purpose) to a receiver at another location (e.g. another teleconferencing system), e.g. via a network, e.g. an intranet or a public telephone net or the like. The teleconferencing system comprises a base unit and at least one microphone unit for picking up a sound signal and being in communication with the base unit, the base unit being adapted to receive a signal from an external device located in the room of the teleconferencing system, the base unit further comprising a signal processing unit, e.g. running a dereverberation algorithm adapted to use the measure of the reverberation of the room in question (received from the external unit) to improve the signal picked up by the at least one microphone unit before transmitting it to a receiver (e.g. located in another room or building or site).

[0030] In an embodiment, the *audio processing system* comprises a public address system, e.g. a classroom amplification system (as e.g. described in US 2008/0107277 A1). In such applications the dereverberation algorithm may run on a listening device worn by a person located in the room (e.g. an auditorium or a classroom) or the like (prone to reverberation) where the public address system is used.

[0031] In an embodiment, the *algorithm* adapted for processing an input signal representing an acoustic signal from the environment of the user and providing a processed output is a dereverberation algorithm. A dereverberation algorithm is e.g. described in [Habets, 2007] or [Löllmann, 2009]. In an embodiment, the algorithm adapted for processing an input signal representing an acoustic signal from the environment of the user and providing a processed output is integrated with a microphone system and/or with a directional algorithm. In an embodiment, the reverberation measure is used in an algorithm for

identifying a voice in the acoustic environment, e.g. a particular voice or a user's own voice (in case the audio processing device, e.g. a listening device, is worn by a user).

[0032] In an embodiment, the *signal processing unit* is adapted for enhancing the input signals and providing a processed output signal. In an embodiment, the signal processing unit is adapted to provide a frequency dependent gain to compensate for a hearing loss of a user.

[0033] In an embodiment, the *audio processing device* comprises an output transducer for converting an electric signal to a stimulus perceived by the user as an acoustic signal. In an embodiment, the output transducer comprises a number of electrodes of a cochlear implant or a vibrator of a bone conducting hearing device. In an embodiment, the output transducer comprises a receiver (speaker) for providing the stimulus as an acoustic signal to the user.

[0034] In an embodiment, the *audio processing device* comprises a voice detector for detecting whether a given input sound originates from a human voice or not. Examples of voice detector circuits based on analogue and digitized input signals are described in US 5,457,769 and US 2002/0147580, respectively. In an embodiment, the audio processing device comprises an own voice detector for detecting whether a given input sound (e.g. a voice) originates from the voice of the user of the system. Own voice detection is e.g. dealt with in US 2007/009122 and in WO 2004/077090. In an embodiment, the microphone system of the audio processing device is adapted to be able to differentiate between a user's own voice and another person's voice and possibly from NON-voice sounds. This has the advantage of enabling the processing algorithm to differentiate the use of the measure of reverberation depending on the type of input signal. In an embodiment, the measure of reverberation is only used when a voice is detected that is NOT the user's own voice.

[0035] In an embodiment, the *audio processing device* further comprises other relevant functionality for the application in question, e.g. acoustic feedback suppression, etc.

[0036] A *method* of operating an audio processing system comprising an audio processing device adapted for processing an input signal and providing a processed output signal, and an external device, the audio processing device and the external device comprising a wireless interfaces adapted to allow the external device to transmit an information signal and the audio processing device to receive said information signal, respectively is furthermore provided by the present application as defined in claim 11.

[0037] It is intended that the structural features of the system described above, in the detailed description of 'mode(s) for carrying out the invention' and in the claims can be combined with the method, when appropriately substituted by a corresponding process. Embodiments of the method have the same advantages as the corresponding systems.

[0038] In a particular embodiment, the measure characteristic of reverberation is used as an input parameter in the processing algorithm.

[0039] In a particular embodiment, the input signal comprises an electric signal picked up by an input transducer and representing an acoustic signal and wherein the processing algorithm is a dereverberation algorithm applied to the input signal.

[0040] Further objects of the application are achieved by the embodiments defined in the dependent claims and in the detailed description of the invention.

[0041] As used herein, the singular forms "a," "an," and "the" are intended to include the plural forms as well (i.e. to have the meaning "at least one"), unless expressly stated otherwise. It will be further understood that the terms "includes," "comprises," "including," and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. It will be understood that when an element is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements maybe present, unless expressly stated otherwise. Furthermore, "connected" or "coupled" as used herein may include wirelessly connected or coupled. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. The steps of any method disclosed herein do not have to be performed in the exact order disclosed, unless expressly stated otherwise.

BRIEF DESCRIPTION OF DRAWINGS

[0042] The disclosure will be explained more fully below in connection with a preferred embodiment and with reference to the drawings in which:

FIG. 1 shows an application scenario for an audio processing system according to a first embodiment of the present invention,

FIG. 2 shows a block diagram comprising parts of an audio processing system according to a second embodiment of the present invention,

FIG. 3 shows a block diagram comprising parts of a listening device according to an embodiment of the present invention, and

FIG. 4 shows exemplary block diagrams comprising parts of an external device according to different embodiments of the present invention.

[0043] The figures are schematic and simplified for clarity, and they just show details which are essential to the understanding of the disclosure, while other details are left out. Throughout, the same reference names are used for identical or corresponding parts.

[0044] Further scope of applicability of the present disclosure will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the disclosure, are given by way of illustration only, since various changes and modifications within the scope of the disclosure will become apparent to those skilled in the art from this detailed description, without departing from the scope of the claims.

MODE(S) FOR CARRYING OUT THE INVENTION

[0045] FIG. 1 shows an application scenario for an audio processing system according to an embodiment of the present invention. The audio processing system, e.g. as shown here, a listening system comprises one or more audio processing devices, here listening devices *LD* (here one is shown), worn by user *U* and one or more external devices *ED_n* (here three are shown; typically more than one is present). The external devices *ED_n* are located on the walls (*ED1*, *ED2*) of a room (*ROOM*) and in a frame (*ED3*) of a door (*DF*) for entering or leaving the room. The external devices *ED_n* transmit a measure *IREV* characteristic of the reverberation time of the room (*ROOM*). The measure is e.g. the T60 reverberation time characteristic of the room where the external devices is located. The listening device *LD* is adapted to wirelessly receive the measure of reverberation of the room from at least one of the external devices and to use it in an algorithm for minimizing the effect of reverberation on a signal picked up by a microphone of the listening device when the user is located in the room (*ROOM*). The external devices are e.g. located at different positions in the room to ensure that a user has a large probability of receiving the measure *IREV* characteristic of the reverberation time of the room irrespective of where in the room he or she is located. The location and number of the external devices appropriate for covering a room of a given form and size (area) is preferably adapted to the transmission technology used by the wireless interfaces of the external device(s) and the listening device(s) (be it based on radiated fields or near-field electromagnetic coupling or acoustic or light communication technologies). Alternatively, the external device or devices (*ED_n*) may be placed in a room relative to one or more specific users (e.g. to cover specific seats or locations for such specific users wearing a listening device *LD*).

[0046] FIG. 2 shows a block diagram comprising parts of an audio processing system according to an embodiment of the present invention. The audio processing system, here a listening system, comprises an audio processing device, here a listening device *LD* and an external device *ED* each comprising a wireless interface (at least) allowing a transmission of an information signal from the external device to the listening device. The wireless interface of the external device *ED* comprises an antenna and transmitter circuitry (Tx) for transmitting an information signal *IREV* to other devices. The wireless interface of the listening device *LD* comprises an antenna and receiver circuitry (Rx) for receiving the information signal *IREV* from the external device. The embodiment of a listening device shown in FIG. 2 comprises a microphone system comprising two microphones *MIC1* and *MIC2* for picking up sounds from the environment and converting the sounds to analogue electric input signals *IN1*, *IN2*, respectively, each microphone being connected to an analogue to digital unit *AD* for providing a digitized version of the input signal. The digitized version of the input signals are fed to time to time-frequency conversion units (*T->TF*) for converting the input signal from a time domain representation to a time-frequency domain representation and providing as an output time-frequency signals *ITF1(m,p)* and *ITF2(m,p)*, each unit (m,p) comprising a generally complex value of the input sound signal in question at a particular unit (m,p) in time and frequency. Other microphone systems may be used, e.g. a single microphone. Instead of *AD* and *TF* units a filter bank may be used to provide an input signal in the time-frequency domain. Otherwise, the input signal may be

processed fully in the time domain. The signals *ITF1*, *ITF2* from the microphones are processed in dereverberation units *DRV*, where they are subject to a dereverberation algorithm controlled by the reverberation time input *REV* received from the external device *ED* (and optionally from one or more other detectors, cf. FIG. 3). The reverberation time input *REV* is extracted in demodulation unit *DMD* from the information signal *IREV* received via a wireless interface (*Rx*) of the listening device. The output signals *ODRV1* and *ODRV2* of the respective dereverberation units *DRV*, are fed to a directional unit *DIR* for extracting directional information from the microphone signals and for providing a resulting output signal *ODIR* for further processing in a signal processing unit *SP* of the signal path. Other processing algorithms (e.g. noise reduction, compression, anti-feedback, etc.) are possibly applied to the signal on its way through the signal path from input transducer to output transducer, e.g. in the signal processing unit *SP*. The reverberation time input *REV* is optionally fed to the signal processing unit *SP*. The processed output signal *OPF* from the signal processing unit *SP*, here a processed signal in a time frequency representation is fed to a time-frequency to time conversion unit (*TF-T*) providing a resulting processed signal *OTF* in the time domain. This signal is fed to a digital to analogue converter *DA* (or directly to an output transducer), whose output *OUT* is fed to an output transducer, e.g. as shown a receiver (speaker). In the embodiment of the listening device shown in FIG. 2, the directional unit *DIR* is shown to be located after the dereverberation units *DRV*. Alternatively the units may appear in opposite order (the directional unit receiving inputs *ITF1*, *ITF2* directly from the time to time-frequency conversion units (*T->TF*) and feeding a resulting directional signal *ODIR* to a dereverberation unit whose output is then fed to the signal processing unit *SP*. Further alternatively, the directional and dereverberation units (or algorithms) may be integrated receiving inputs from a number of microphones and delivering a directional output signal cleaned for reverberation effects.

[0047] The embodiment of the external device *ED* shown in FIG. 2 comprises a readable memory *MEM* storing a measure of reverberation of a specific room where the external device is mounted or intended to be used. The memory is connected to a signal processing unit *SP*, which can read the contents of memory *MEM* and modulate the measure of reverberation *REV* stored in the memory and forward the result to a modulator *MD*, which feeds the modulated signal to transmitter an antenna circuitry *Tx* for transmission of the modulated signal *IREV* (at least) to the listening device *LD*. The embodiment of an external device *ED* shown in FIG. 2 further comprises a speaker for issuing a (possibly inaudible) test signal (ping) and a microphone for picking up the response of the room. Timing and frequency properties of the signal picked up by the microphone is analysed in the signal processing unit *SP* and a measure of the reverberation of the room is provided and stored in the memory *MEM*. The determination of the actual reverberation of the room in question may be performed according to a predefined scheme, e.g. regularly and/or initiated by a person via an activating element (*PB*, e.g. a push button). In an embodiment, the external device has an interface (*PC-I*, e.g. a wireless interface) to a computer, so that the measurement of reverberation can be initiated and monitored remotely. In an embodiment, the external device *ED* is portable and can be used to measure the reverberation of *different* rooms and possibly to feed the measurement result to a memory of another external device (e.g. of the type shown in FIG. 4) located in or intended to be located in the room in question. The external device *ED* typically comprises a local energy source (e.g. a battery) for energising the electronic components of the device. Alternatively, the external device *ED* is connected to a mains supply.

[0048] FIG. 3 shows a block diagram comprising parts of a listening device according to an embodiment of the present invention. The embodiment of a listening device shown in FIG. 3 has the same basic functionality as that of FIG. 2, but includes additionally a number of detectors *VD-OVD* for classifying the type of signal picked up by the microphone system. In the embodiment shown in FIG. 3, the detectors include a voice detector (*VD*) for identifying a human voice in the input signal and an own voice detector (*OVD*) for identifying the voice of a wearer of the listening device. In the embodiment shown in FIG. 3, the detectors *VD-OVD* receive microphone signals *IN1* and *IN2* as inputs and supply as output an input *VOV* to the dereverberation units *DRV* thereby providing an enhanced effect of the dereverberation algorithm. In an embodiment, the detectors *VD-OVD*, further receive the reverberation measure *REV* as an input to aid in the identification of a voice (e.g. an own voice, cf. e.g. EP 1 956 589 A1) in the input signal. In an embodiment, the presence of a human voice in the input microphone signal(s), as detected by a voice detector *VD*, activates the dereverberation algorithm, whereas the algorithm is deactivated when no voice is detected. In an embodiment, the presence of a user's own voice in the input microphone signal(s), as detected by an own voice detector *OVD*, deactivates the dereverberation algorithm, whereas the algorithm is activated when no own voice is detected. In an embodiment, the two detectors are combined. Other control inputs *VOV'* and *VOV''* from detector unit *VD-OVD* are optionally supplied to directional control unit *DIR* and/or to signal processing unit *SP*, respectively. Based on the input signals from the detectors, a more qualified use of the measure of reverberation of the room in a processing algorithm (e.g. a dereverberation algorithm (*DRV*) or other processing algorithm executed by the directional system (*DIR*) and/or the signal processing unit (*SP*) of the listening device) can be provided. In an integrated *DIR* and dereverberation unit e.g., the directional unit can identify the acoustic sources around a user and the voice detector/own voice detector can identify which one of the sources is a target voice, and the directional system can be adapted accordingly to optimize its focus on the target voice.

[0049] FIG. 4 shows exemplary block diagrams comprising parts of an external device according to different embodiments of the present invention. FIG. 4a shows an embodiment of an external device *ED* comprising a battery *B* for energizing the components

of the device. The external device comprises a readable memory *MEM* storing a measure of reverberation of a specific room where the external device is mounted or intended to be used. The memory is connected to a control and modulation unit *MDX* which can read the contents of memory *MEM* and modulate the measure of reverberation *REV* stored in the memory and forward the modulated signal to transmitter an antenna circuitry *Tx* for transmission of the modulated signal *IREV* to one or more listening devices within its transmission range. The embodiment of an external device *ED* shown in FIG. 4b is of the transponder type and comprises antenna and transceiver circuitry *Rx*, *Tx* for receiving an interrogation signal *IREQ* from a listening device and as a response transmitting a modulated signal *IREV* comprising a reverberation measure *REV* of a room as read from memory *MEM*. The external device comprises a demodulation and control unit *DMDX* connected to the receiver circuitry *Rx* and to the memory *MEM* and adapted to demodulate the received interrogation signal *IREQ* and initiate that the reverberation measure *REV* is read from the memory and fed to control and modulation unit *MDX*, where it is modulated and forwarded to the transmitter *Tx*. In an embodiment, the external device is capable of extracting the necessary energy to the reception of the request signal and the transmittal of the reverberation measure from the interrogation signal. In another embodiment, the external device comprises a local source of energy (or is connected to a mains supply).

[0050] In an embodiment, the wireless link between the external device and the listening device is based on a near-field coupling between two adjacent antennas. In an embodiment, the wireless link is based on far-field (radiated) electromagnetic signals.

[0051] The memory *MEM* may in general be a volatile memory (in which case the optional (dashed) connection in FIG. 4a to the battery *B* is present) or it may be a non-volatile memory. The memory may be a read only or read/write memory.

[0052] In an embodiment, the external device *ED* comprises a user interface, e.g. in the form of one or more user operable activation elements (cf. *PB* in FIG. 2, e.g. in the form of push buttons or toggle- or potentiometer-switches, or touch sensitive displays). In an embodiment, the external device comprises a user operable on-off switch, to switch power to the external device on or off.

[0053] The invention is defined by the features of the independent claim(s). Preferred embodiments are defined in the dependent claims. Any reference numerals in the claims are intended to be non-limiting for their scope.

[0054] Some preferred embodiments have been shown in the foregoing, but it should be stressed that the invention is not limited to these, but may be embodied in other ways within the subject-matter defined in the following claims.

REFERENCES

[0055]

- [ISO 3382-1:2009] ISO 3382-1:2009, Acoustics -- Measurement of room acoustic parameters -- Part 1: Performance spaces.
- [Habets, 2007] E.A.P. Habets, "Single- and Multi-Microphone Speech Dereverberation using Spectral Enhancement," Ph.D. Thesis, Technische Universiteit Eindhoven, The Netherlands, Jun. 25, 2007.
- [Löllmann, 2009] H.W. Löllmann and P. Vary, "Low delay noise reduction and dereverberation for hearing aids, "EURASIP Journal on Advances in Signal Processing, Special issue on digital signal processing for hearing instruments, p.1-9, Volume 2009 , January 2009.
- US 2009/208043 A1 (STARKEY LABORATORIES) 20-08-2009
- US 2004/213415 A1 (Rama et al.) 28-10-2004
- US 5,457,769 (EARMARK) 10-10-1995
- US 2002/0147580 A1 (LM ERICSSON) 10-10-2002
- US 2007/009122 A1 (SIEMENS AUDIOLOGISCHE TECHNIK) 11-01-2007
- WO 2004/077090 A1 (OTICON) 10-09-2004
- US 2008/0107277 A1 (PHONIC EAR) 08-05-2008
- EP 1 956 589 A1 (OTICON) 13-08-2008

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [US2009208043A1 \[0006\] \[0055\]](#)
- [US2004213415A1 \[0008\] \[0055\]](#)
- [WO2008128563A1 \[0008\]](#)
- [AT410597B \[0008\]](#)
- [US5473701A \[0025\]](#)
- [WO9909786A1 \[0025\]](#)
- [EP2088802A1 \[0025\]](#)
- [US20080107277A1 \[0030\] \[0055\]](#)
- [US5457769A \[0034\] \[0055\]](#)
- [US20020147580A \[0034\]](#)
- [US2007009122A \[0034\]](#)
- [WO2004077090A \[0034\]](#)
- [EP1956589A1 \[0048\] \[0055\]](#)
- [US20020147580A1 \[0055\]](#)
- [US2007009122A1 \[0055\]](#)
- [WO2004077090A1 \[0055\]](#)

Non-patent literature cited in the description

- Acoustics -- Measurement of room acoustic parameters -- Part 1: Performance spaces ISO 3382-1:2009, 2009, [\[0055\]](#)
- **E.A.P. HABETS** Single- and Multi-Microphone Speech Dereverberation using Spectral Enhancement Ph.D. Thesis, 2007, [\[0055\]](#)
- **H.W. LÖLLMANN** **VARY** Low delay noise reduction and dereverberation for hearing aids EURASIP Journal on Advances in Signal Processing, Special issue on digital signal processing for hearing instruments, 2009, vol. 2009, 1-9 [\[0055\]](#)

Patentkrav

1. Audiobehandlingssystem, der omfatter en audiobehandlingsanordning (LD) og en eksterne anordning (ED), der overfører information til audiobehandlingsanordningen om karakteristikk ved rummet, til hvilket den eksterne anordning er specifik, og hvor den eksterne anordning (ED) og audiobehandlingsanordningen (LD) er placeret, hvor audiobehandlingsanordningen omfatter

- en indgangstransducer, der tilvejebringer et elektrisk indgangssignal (IN1, IN2), som repræsenterer et akustisk signal fra en brugers omgivelser (U) af audiobehandlingsanordningen,
- en signalbehandlingsenhed, der er indrettet til at køre en algoritme til at behandle indgangssignalet eller et signal afledt deraf og tilvejebringer et behandlet udgangssignal (ODRV1, ODRV2), og
- en trådløs grænseflade (Rx), der er indrettet til at tillade audiobehandlingsanordningen at modtage et informationssignal,

hvor audiobehandlingsanordningen er indrettet til at uddrage et mål for efterklang fra informationssignalet, og hvor audiobehandlingsanordningen (LD) yderligere er indrettet til at anvende målingen for efterklang som et input til algoritmen, hvor algoritmen er en algoritme til fjernelse af efterklang (DRV) for at reducere en efterklangseffekt i det elektriske indgangssignal, og algoritmen er indrettet til tage højde for målingen af efterklang; og den eksterne anordning (ED) omfatter

- en mikrofon,
- en signalbehandlingsenhed (SP), og
- en lydtransducer, og
- en trådløs grænseflade (Tx), der er indrettet til at tillade den eksterne anordning til at overføre et informationssignal (IREV)

hvor den eksterne anordning er indrettet til at udføre - på bestemte foruddefinerede tidspunkter - en efterklangsmåling ved

- at udsende et akustisk sondesignal,
- at modtage et reflekteret signal med mikrofonen; og
- at analysere det modtagne reflekterede signal ved at sammenligne det udsendte akustiske sondesignal med det modtagne reflekterede signal med signalbehandlingsenheden for at tilvejebringe en måling (REV), der er karakteristisk for efterklangen for rummet, og

hvor den eksterne anordning (ED) yderligere er indrettet til at indbefatte målingen i informationssignalet (REV), der er karakteristisk for efterklangen i rummet.

2. Audiobehandlingssystem ifølge krav 1, hvor den eksterne anordning (ED) omfatter en hukommelse (MEM), hvor målingen (REV) af efterklang lagres.

3. Audiobehandlingssystem ifølge krav 1 eller 2, hvor den eksterne anordning (ED) er indrettet til at estimere målingen (REV) af selve efterklangen.

4. Audiobehandlingssystem ifølge et hvilket som helst af kravene 1-3, hvor målingen (REV) af efterklangen er den T60'te måling eller et estimat deraf.

- 5 5. Audiobehandlingssystem ifølge et hvilket som helst af kravene 2-4, hvor den eksterne anordning (ED) er indrettet til at lagre et antal af målte værdier af målingen af efterklang på tilsvarende tidspunkter og til at bestemme en tidsgennemsnitlig værdi, for eksempel et løbende gennemsnit.
- 10 6. Audiobehandlingssystem ifølge et hvilket som helst af kravene 1-5, hvor den eksterne anordning (ED) er indrettet til at være monteret på en væg (W) eller et loft i rummet eller i en dørkarm (DF), gennem hvilken man kan gå ind i eller ud af rummet.
- 15 7. Audiobehandlingssystem ifølge et hvilket som helst af kravene 1-5, hvor den eksterne anordning (ED) er en bærbar anordning, der er indrettet til at være anbragt på et passende sted i rummet.
- 20 8. Audiobehandlingssystem ifølge et hvilket som helst af kravene 1-7, hvor audiobehandlingsanordningen (LD) omfatter en automatisk talegenkendelsesalgoritme, der anvender målingen (REV) af efterklangen til at forbedre kvaliteten af talegenkendelse.
- 25 9. Audiobehandlingssystem ifølge et hvilket som helst af kravene 1-8, hvor audiobehandlingsanordningen (LD) omfatter et telekonferencesystem eller et højttaleranlæg, for eksempel et klasseværelseforstærkningssystem.
- 30 10. Audiobehandlingssystem ifølge et hvilket som helst af kravene 1-9, hvor audiobehandlingsanordningen (LD) omfatter en bærbar anordning, for eksempel et ørestykke, for eksempel et headset og en hovedtelefon, en aktiv høreværnsanordning, et høreapparat eller kombinationer deraf.
- 35 11. Fremgangsmåde til at betjene et audiobehandlingssystem, der omfatter en audiobehandlingsanordning (LD), som er indrettet til at behandle et indgangssignal (IN1, IN2) og tilvejebringe et behandlet udgangssignal (ODRV1, ODRV2), og en ekstern anordning (ED), der er specifik til et rum, hvor den eksterne anordning (ED) og audiobehandlingsanordningen (LD) er placeret, hvor audiobehandlingsanordningen og den eksterne anordning omfatter trådløse grænseflader (Rx, Tx), der er indrettet til henholdsvis at tillade den eksterne anordning (ED) til at overføre et informationssignal (IREV) og audiobehandlingsanordningen (LD) til at modtage informationssignalet (IREV), hvor fremgangsmåden omfatter
- 40 • at tilvejebringe en måling (REV) i den eksterne anordning (ED), der er karakteristisk for efterklangen i rummet;
- 45 • at tilvejebringe og overføre et informationssignal (IREV), der omfatter målingen (REV), der er karakteristisk for efterklangen fra den eksterne anordning (ED);
- at modtage informationssignalet (IREV) fra den eksterne anordning (ED) i audiobehandlingsanordningen (LD) og uddrage målingen (REV), der er karakteristisk for efterklangen derfra;
- KENDETEGNET VED, AT fremgangsmåden yderligere omfatter

- at tilvejebringe, at den eksterne anordning (ED) er indrettet til at udføre en efterklangsmåling på bestemte foruddefinerede tidspunkter ved
 - at udsende et akustisk sondesignal,
 - at modtage et reflekteret signal med en mikrofon, og
 - at analysere det reflekterede signal ved at sammenligne det udsendte sondesignal med det modtagne reflekterede signal med en signalbehandlingsenhed (SP) for at tilvejebringe måling (REV), der er karakteristisk for efterklngen i rummet, hvor den eksterne anordning (ED) og audiobehandlingsanordningen (LD) er placeret; og
- anvendelse af målingen (REV), der er karakteristisk for efterklngen i en algoritme for audiobehandlingsanordningen (LD) til at behandle indgangssignalet, hvor målingen (REV), der er karakteristisk for efterklngen, anvendes som en indgangsparameter i algoritmen, og hvor indgangssignalet omfatter et elektrisk signal (IN1, IN2), der opsamles af en indgangstransducer i audiobehandlingsanordningen, og som repræsenterer et akustisk signal, og hvor algoritmen er en algoritme til fjernelse af efterklang (DRV), der er anvendt til indgangssignalet (IN1, IN2; ITF1, ITF2).

DRAWINGS

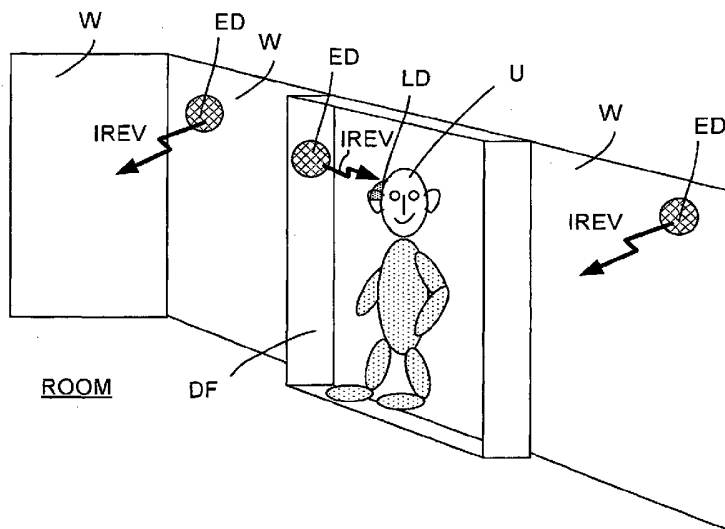


FIG. 1

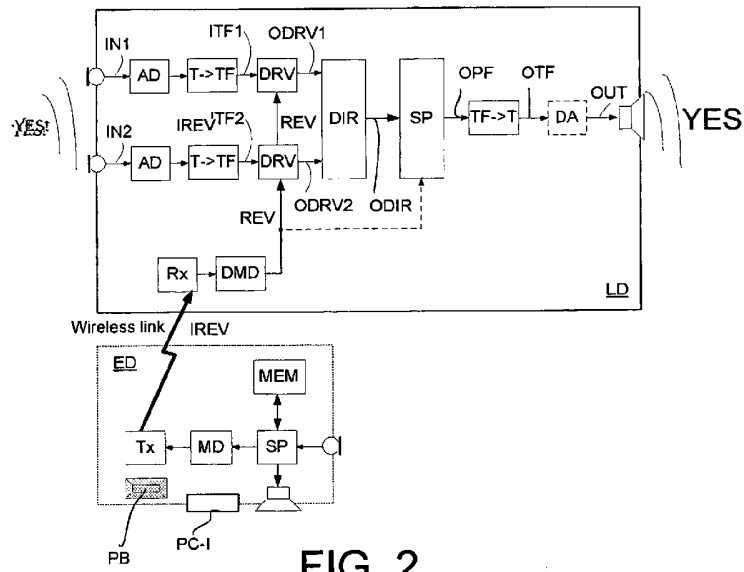


FIG. 2

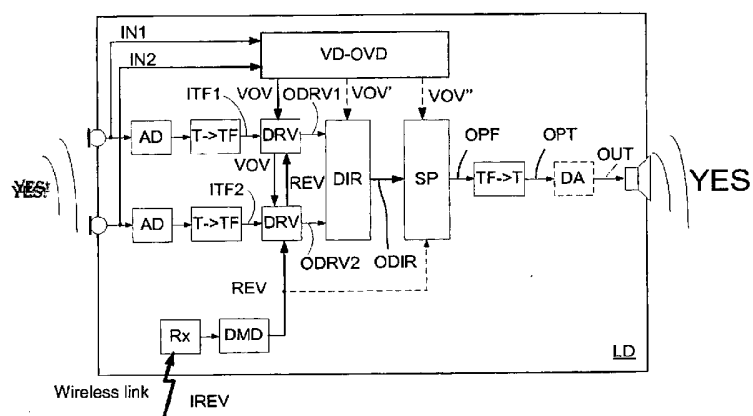


FIG. 3




FIG. 4a




FIG. 4b