

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 April 2009 (02.04.2009)

PCT

(10) International Publication Number
WO 2009/040232 A1

(51) International Patent Classification:

F23R 3/06 (2006.01) *F23R 3/00* (2006.01)
F23R 3/60 (2006.01) *F23R 3/26* (2006.01)

(21) International Application Number:

PCT/EP2008/061801

(22) International Filing Date:

5 September 2008 (05.09.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

07018754.7 24 September 2007 (24.09.2007) EP

(71) Applicant (for all designated States except US):
SIEMENS AKTIENGESELLSCHAFT [DE/DE];
Wittelsbacherplatz 2, 80333 München (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MILNER, Glynn**
[GB/GB]; Nelson Rd., Charity Cottage, Fiskerton, Lincoln
LN3 4ER (GB).

(74) Common Representative: **SIEMENS AKTIENGESELLSCHAFT**; Postfach 22 16 34, 80506 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(54) Title: COMBUSTION CHAMBER

FIG 3

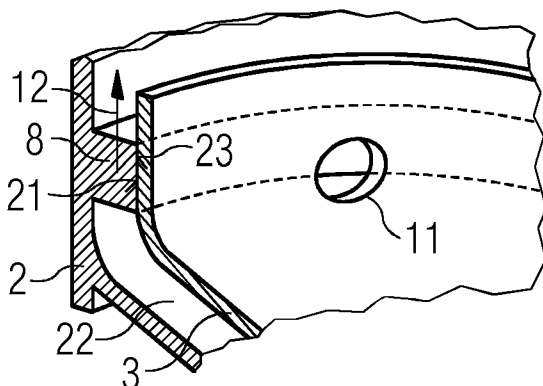

(57) Abstract: A combustion chamber (1) is provided, comprising an inner casing (2) with a sliding surface (23) and an outer casing (3) with a sliding wall portion (21). The sliding surface (23) and the sliding wall portion (21) are slidably attached to each other. At least one cooling hole (11) is located in the sliding wall portion (21). The cooling hole (11) is at least partially located such in the sliding wall portion (21) that it opens due to a sliding movement of the sliding surface (23) relative to the sliding wall portion (21) when the inner casing (2) thermally expands and/or closes due to a sliding movement of the sliding surface (23) relative to the sliding wall portion (21) when the inner casing (2) thermally contracts. Moreover, a gas turbine comprising an inventive combustion chamber (1) is disclosed.

Description

Combustion chamber

5 The present invention relates to a combustion chamber, in particular to a pre-chamber of a gas turbine combustor, with cooling arrangement.

10 A gas turbine usually comprises a compressor, a combustor and a turbine. The compressor compresses air which is fed to the combustor where it is mixed with fuel. Inside a combustion chamber the resulting fuel-air mixture is combusted. During the combustion of fuel and air hot combustion gas is generated. This combustion gas is used to drive the turbine. A
15 typical combustor comprises a burner, a pre-chamber which is located close to the burner, and a main combustion chamber. Especially the pre-chamber is exposed to very high temperatures due to its location near the burner. If the pre-chamber reaches a certain temperature it is prone to carbon
20 build-up and then the metal of the pre-chamber casing may be negatively affected.

To protect the pre-chamber components cooling holes are added to the pre-chamber casing. Cooling with, for instance, compressed air limits the maximum temperature of the pre-
25 chamber. However, the air which is used for cooling could also otherwise be doing work in the turbine and thus has an impact on the efficiency of the turbine, even though it is only a minor impact.

30 It is therefore an objective of the present invention to provide a combustion chamber with improved cooling. It is a further objective of the present invention to provide an advantageous gas turbine.

35 The first objective is solved by a combustion chamber, as claimed in claim 1. The second objective is solved by a gas

turbine, as claimed in claim 7. The depending claims define further developments of the invention.

5 The inventive combustion chamber comprises an inner casing with a sliding surface and an outer casing with a sliding wall portion. The sliding surface and the sliding wall portion are slidably attached to each other in at least one attachment zone. The inventive combustion chamber further comprises at least one cooling hole which is situated in the
10 sliding wall portion. This cooling hole is at least partially located in such the sliding wall portion that it opens due to a sliding movement of the sliding surface relative to the sliding wall portion when the inner casing thermally expands and/or closes due to a sliding movement of the sliding
15 surface relative to the sliding wall portion when the inner casing thermally contracts. This means that the cooling hole opens and closes due to thermal expansion and contraction of the inner casing while the outer casing, which is cooled by compressor air, has nearly a constant temperature and therefore
20 does not expand or contract. Preferably, the inventive combustion chamber may comprise a number of such cooling holes.

The invention exploits the temperature difference between the
25 inner casing and the outer casing of the combustion chamber. The temperature of the outer casing is dominated by the temperature of the compressed air coming from the compressor. Typically a flow channel comprising the compressed air surrounds the outer casing of the combustion chamber. Therefore,
30 the temperature of the outer casing is quite constant. In contrast, the temperature of the inner casing is dominated by the flame temperature, which varies depending on the existence and the characteristics of the flame. This means that high temperatures inside the combustion chamber cause an expansion of the inner casing while the outer casing nearly
35 keeps its shape. During the expansion of the inner casing the cooling hole is opening. The open cooling hole provides the hot inner casing with sufficient cooling air. If the in-

ner casing cools down again it contracts and the cooling hole closes automatically due to this contraction. Hence, the invention provides simple means for variable cooling of the inner casing so that the cooling flow is increased when needed at conditions when the flame temperature is high which is at high loads.

The cooling hole may have a round, triangular, rectangular or trapezoid opening cross-section. By the shape of the hole's opening cross-section one can determine the amount of increase in cooling fluid flow associated to a slide movement of the sliding surface relative to the sliding wall portion. The shape of the cooling hole and its cross-section may thus be adapted to the desired cooling flow which is to be achieved for a particular temperature.

The combustion chamber can further comprise a pre-chamber area and the sliding surface and the sliding wall portion may be located in this pre-chamber area. Moreover, the combustion chamber may comprise a downstream end where the inner casing and the outer casing are joined together. In this case, the sliding surface of the inner casing and the sliding wall portion of the outer casing would advantageously be slidably attached to each other at the upstream end of the combustion chamber as the relative movement due to thermal expansion of the inner casing is the greatest in this area.

Preferably, the inner casing may comprise at least one spacer which is located between the outer casing and the inner casing. The sliding surface is then a face of the spacer which shows towards the outer casing. The spacer may especially be a location ring. The spacer or location ring provides a sufficient distance between the inner and the outer casing. The occurring space between the inner and the outer casing can be used as a cooling flow channel.

Generally, the combustion chamber may, for instance, be a Dry Low Emission (DLE) combustion chamber.

The inventive gas turbine comprises a combustion chamber as previously described. The inventive gas turbine also has the advantages of the in inventive combustion chamber.

5 Further features, properties and advantages of the present invention will become clear from the following description of an embodiment in conjunction with the accompanying drawings.

10 Fig. 1 schematically shows a longitudinal section through a combustor.

Fig. 2 schematically shows part of a combustion chamber in a perspective view.

15 Fig. 3 schematically shows the sliding surface of the inner casing and the sliding wall portion of the outer casing with a cooling hole in a perspective view.

20 Fig. 4 schematically shows a partially open cooling hole in the outer casing in a perspective view.

Fig. 5 schematically shows a fully open cooling hole in the outer casing in a perspective view.

25 Fig. 6 schematically shows a partially open triangular cooling hole in a frontal view.

Fig. 7 schematically shows a partially open alternative triangular cooling hole in a frontal view.

30

An embodiment of the present invention will now be described with reference to Figures 1 to 7. Figure 1 schematically shows a longitudinal section through a combustor. The combustor comprises a burner with a swirler portion 14 and a burner-head portion 13 attached to the swirler portion 14, a transition piece being referred to as a combustion pre-chamber 4 and a main combustion chamber 1 arranged in flow series. The main combustion chamber 1 has a larger diameter

35

than the diameter of the pre-chamber 4. The main combustion chamber 1 is connected to the pre-chamber 4 at the upstream end 6. In general, the pre-chamber 4 may be implemented as a one part continuation of the burner-head 13 towards the combustion chamber 1, as a one part continuation of the combustion chamber 4 towards the burner-head 13 or as a separate part between the burner-head 13 and the combustion chamber 1. The burner and the combustion chamber 1 assembly show rotational symmetry about a longitudinal symmetry axis 15.

A fuel duct 20 is provided for leading a gaseous or liquid fuel to the burner which is to be mixed with in-streaming air 16 in the swirler 14. The fuel-air-mixture 17 is then led towards the primary combustion zone 19 where it is burnt to form hot, pressurised exhaust gases flowing in a direction 18 indicated by arrows to a turbine of the gas turbine engine (not shown).

Figure 2 schematically shows part of the main combustion chamber 1 and the pre-chamber 4 in a perspective sectional view. The main combustion chamber 1 comprises an upstream end 6 and a downstream end 5. At the upstream end 6 the combustion chamber 1 comprises a narrow section which forms the pre-chamber 4. Alternatively, the main combustion chamber 1 may be connected to the pre-chamber 4 which is implemented as an individual element. Moreover, the main combustion chamber 1 and, in particular, the pre-chamber 4, comprises an inner casing 2 and an outer casing 3. The inner casing 2 and the outer casing 3 are joined together at the downstream end 5 and slide near the upstream end 6 at an attachment zone 7 to allow for differential expansion. The inner casing 2 comprises a location ring 8 which is situated at the upstream end 6 near the pre-chamber 4. One surface of the location ring 8 is in sliding contact with the outer casing 3. This surface forms a sliding surface 23 of the inner casing 2 which provides together with a sliding wall portion 21 of the outer casing 3 the attachment zone 7.

There is an internal space 22 between the inner casing 2 and the outer casing 3 which may be used as cooling air channel for cooling the inner casing 2. For this purpose the outer casing 3 comprises cooling holes 9, which is in flow connection with the internal space 22 for leading cooling air into the internal space 22 to cool the inner casing 2. Furthermore, the inner casing 2 comprises cooling holes 10, which lead the used cooling air into the main combustion chamber 1. Especially the cooling holes 9 in the outer casing 3 are usually placed at the upstream end 6 of the outer casing 3 to cool the pre-chamber 4.

The inventive combustion chamber 1 further comprises cooling holes 11 in the sliding wall portion 21 of the outer casing 3, i.e. where the attachment zone 7 is located. These holes 11 may be positioned where they would be fully open at maximum differential temperature and partially closed, and thus providing lower cooling flow, when the flame temperature falls. Due to the falling temperature, the inner casing 2 contracts relative to the outer casing 3, and as a consequence, the location ring 8 partially covers the holes.

Figure 3 schematically shows the position of an inventive cooling hole 11 in a perspective view. One can see in Figure 3 part of the upstream end 6 of the main combustion chamber 1. Especially, one can see part of the inner casing 2 comprising a location ring 8 and the sliding wall portion 21 of the outer casing 3 which is in sliding contact with the sliding surface 23 of the location ring 8.

The sliding wall portion 21 of the outer casing 3 comprises a cooling hole 11 which has a round opening cross-section. This cooling hole 11 is situated such that it is partially covered by the sliding surface 23 of the location ring 8. If the inner casing 2 becomes hot, especially while the combustion chamber 1 is in use, then the inner casing 2 expands compared to the outer casing 3. The inner casing 2 expands in the direction which is indicated by an arrow 12 due to the

fact that the downstream ends of the inner casing 2 and the outer casing 3 are joined together. Due to this movement, the cooling hole 11 opens further and more cooling air, or any other cooling fluid, can enter through the cooling hole 11 into the internal space 22 between the inner casing 2 and the outer casing 3.

Figure 4 schematically shows the cooling hole 11 when it is partially open in a perspective view. As in Figure 3 one can see the location ring 8 with the sliding surface 23 of the inner casing 2 and the sliding wall portion 21 of the outer casing 3. The outer casing 3 comprises a cooling hole 11 which has a round opening cross-section. The cooling hole 11 is placed such in the sliding wall portion 21 of the outer casing 3 that the sliding surface 23 of the location ring 8 partially covers the cooling hole 11. The cooling hole 11 may be partially closed or fully covered by the sliding surface 23 if the inner casing 2 has the same temperature as the outer casing 3. This is the case, for example, when the combustion chamber 1 is not in operation.

Figure 5 schematically shows the cooling hole 11 in a perspective view when the inner casing 2 has a higher temperature than the outer casing 3. In this case, the inner casing 2 is expanded compared to the outer casing 3 due to the increased temperature inside the combustion chamber 1. This means that the location ring 8 has been moving vertically relative to the outer casing 3. Because of this movement the sliding surface 23 of the location ring 8 is no longer able to cover the cooling hole 11 either partially or fully. Therefore, the cooling hole 11 is fully open in Figure 5. Now the maximum cooling fluid flow can enter the cooling hole 11 and may impinge at the inner casing 2 and flow through the internal space 22.

The position and shape of the cooling hole 11 can be optimised to satisfy absolute flow requirements and to set a desired dependence of the change in cooling air flow through

the hole with expanding inner casing 2. Examples of an alternative cross-section of the cooling hole 11 are shown in Figures 6 and 7. Figures 6 and 7 schematically show a cooling hole 11 with a triangular cross-section in a frontal

5 view. In both figures the cooling hole 11 is positioned in the sliding wall portion 21 of the outer casing 3 such that the inner casing 2, more precisely the sliding surface 23 of the location ring 8, partially covers the cooling hole 11.

10 In Figure 6 the cooling hole 11 is positioned such in the sliding wall portion 21 of the outer casing 3 that one vertex of its triangular cross-section points in the direction of the pre-chamber 4. In contrast, in Figure 7 one vertex of the triangular cross-section of the cooling hole 11 points in the direction of the downstream end 5 of the combustion chamber 1. Both configurations provide a non-linear change of
15 the cooling fluid flow during the expansion of the inner casing 2.

In summary, the inventive combustion chamber 1, especially
20 the provision and location of the cooling hole 11, increases the efficiency of the combustion chamber because it provides a cooling fluid flow which is adapted to the temperature of the inner casing 2. This means that the cooling flow is low in the case of a low temperature of the inner casing 2 and
25 the cooling flow increases as the temperature of the inner casing 2 increases.

Claims

1. A combustion chamber (1), comprising an inner casing (2) with a sliding surface (23) and an outer casing (3) with a sliding wall portion (21), the sliding surface (23) and the sliding wall portion (21) being slidably attached to each other, and at least one cooling hole (11) in the sliding wall portion (21), wherein the cooling hole (11) is at least partially located such in the sliding wall portion (21) that it opens due to a sliding movement of the sliding surface (23) relative to the sliding wall portion (21) when the inner casing (2) thermally expands and/or closes due to a sliding movement of the sliding surface (23) relative to the sliding wall portion (21) when the inner casing (2) thermally contracts.
2. The combustion chamber (1) as claimed in claim 1, characterised in that the cooling hole (11) has a round, triangular, rectangular or trapezoid opening cross-section.
3. The combustion chamber (1) as claimed in claim 1 or 2, characterised in that the combustion chamber (1) comprises a pre-chamber area (4) and the sliding surface (23) and the sliding wall portion (21) are located in the outer casing (3) of the pre-chamber area (4).
4. The combustion chamber (1) as claimed in any of the claims 1 to 3, characterised in that the combustion chamber (1) comprises a downstream end (5) where the inner casing (2) and the outer casing (3) are joined together.
5. The combustion chamber (1) as claimed in any of the claims 1 to 4, characterised in that

the inner casing (2) comprises at least one spacer between the outer casing (3) and the sliding surface (23) is a face of the spacer which shows towards the outer casing (3).

5 6. The combustion chamber (1) as claimed in claim 5, characterised in that the spacer is a location ring (8).

10 7. A gas turbine, comprising a combustion chamber (1) as claimed in any of the claims 1 to 7.

FIG 1

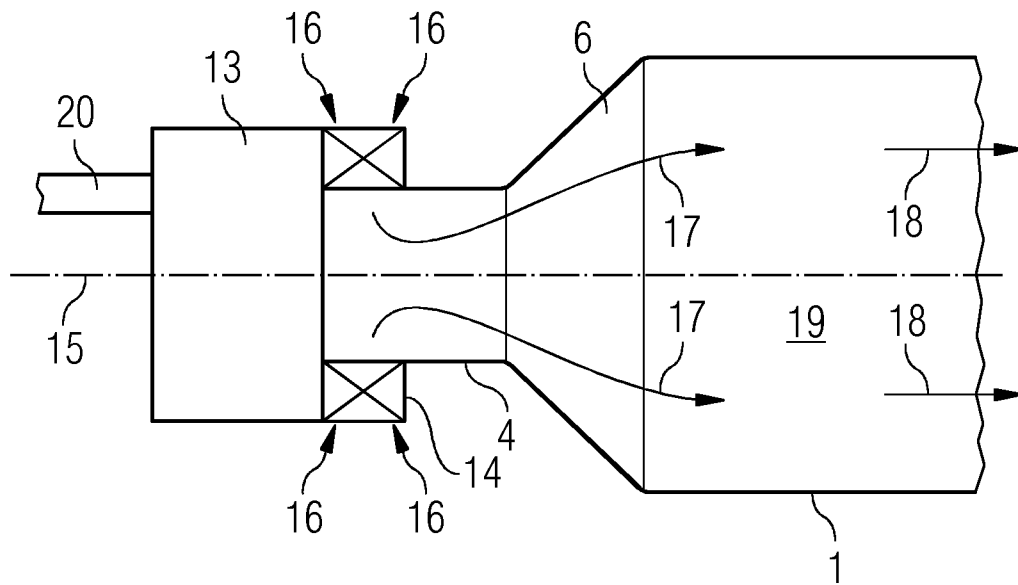


FIG 2

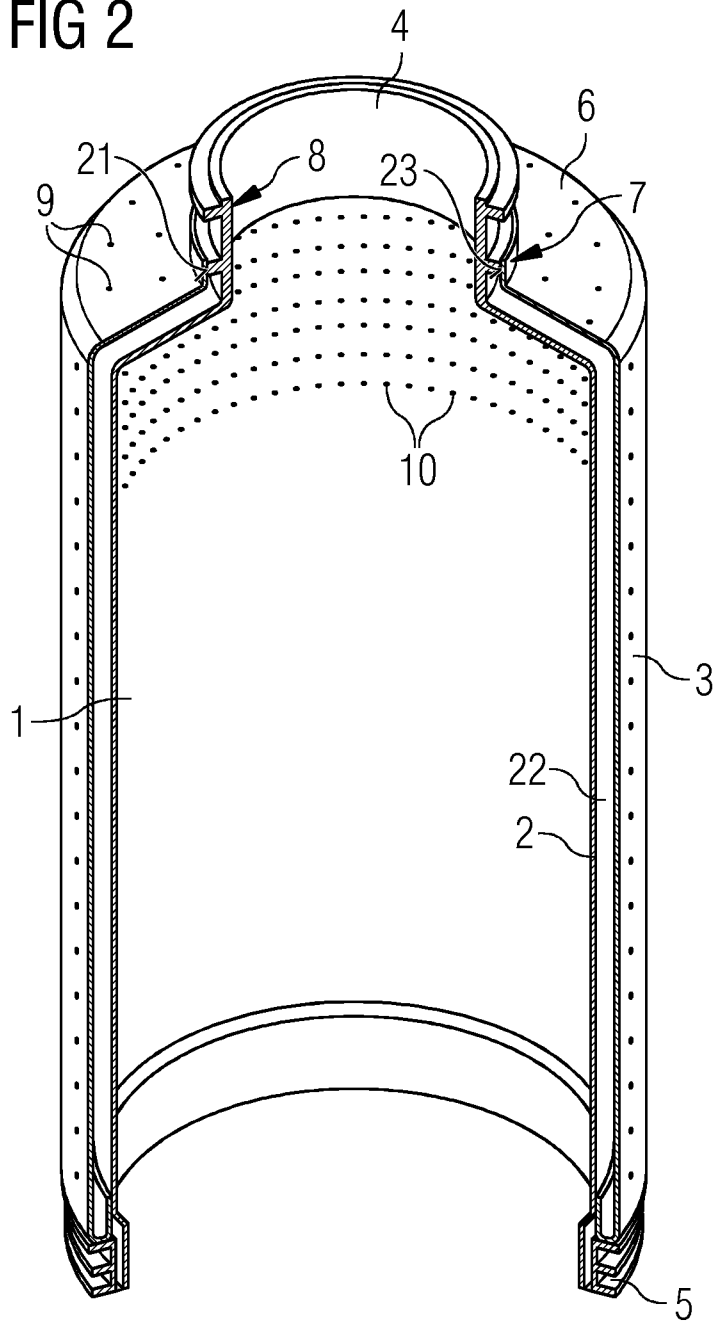


FIG 3

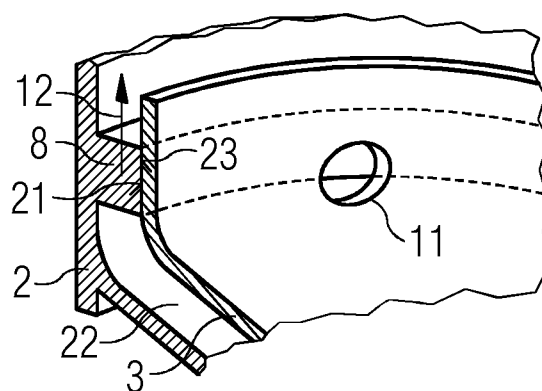


FIG 4

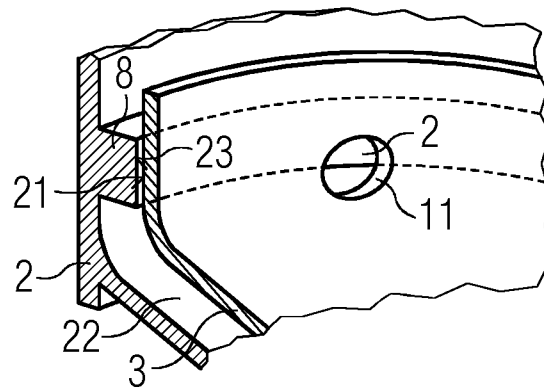


FIG 5

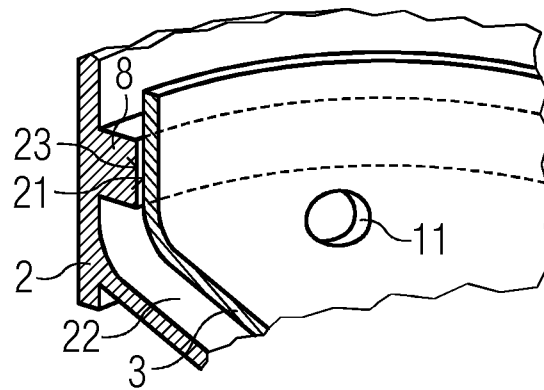


FIG 6


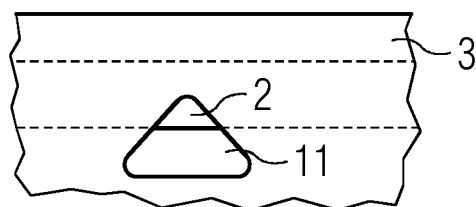


FIG 7

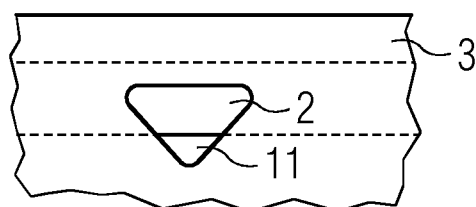

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2008/061801

A. CLASSIFICATION OF SUBJECT MATTER

INV. F23R3/06 F23R3/60 F23R3/00 F23R3/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F23R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 721 209 A (POWER JETS RES & DEV LTD) 5 January 1955 (1955-01-05) page 2, lines 25-57; figures 1,3 -----	1,2,7
A	US 2 837 893 A (SCHIRMER ROBERT M) 10 June 1958 (1958-06-10) column 3, lines 9-64 column 4, lines 12-16; figure 1 -----	1,2,7
A	EP 1 826 492 A (SNECMA [FR]) 29 August 2007 (2007-08-29) paragraph [0036]; claims 8,9; figures 6-10 -----	1,7
A	DE 27 37 773 A1 (HITACHI LTD) 9 March 1978 (1978-03-09) figure 1 -----	1-3,7
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

27 November 2008

Date of mailing of the international search report

04/12/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Coli, Enrico

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2008/061801

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 058 061 A (NUOVO PIGNONE SPA [IT]) 6 December 2000 (2000-12-06) figure 2	1,7
Y,P	EP 1 936 468 A (SIEMENS AG [DE]) 25 June 2008 (2008-06-25) paragraphs [0030], [0031]; figures 3,4	1,2,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/061801

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
GB 721209	A	05-01-1955	DE	1052175 B	05-03-1959
			FR	1071108 A	25-08-1954

US 2837893	A	10-06-1958	NONE		

EP 1826492	A	29-08-2007	CA	2578711 A1	27-08-2007
			CN	101029743 A	05-09-2007
			FR	2897922 A1	31-08-2007
			JP	2007232359 A	13-09-2007
			US	2007199329 A1	30-08-2007

DE 2737773	A1	09-03-1978	JP	1223795 C	15-08-1984
			JP	53027715 A	15-03-1978
			JP	58057655 B	21-12-1983

EP 1058061	A	06-12-2000	BR	0002176 A	02-01-2001
			DE	60028127 T2	14-12-2006
			DZ	3086 A1	20-06-2004
			EG	22526 A	31-03-2003
			ES	2263434 T3	16-12-2006
			IT	MI991207 A1	30-11-2000
			MX	PA00005374 A	24-04-2002
			NO	20002766 A	01-12-2000
			RU	2227874 C2	27-04-2004
			US	6434926 B1	20-08-2002

EP 1936468	A	25-06-2008	WO	2008077887 A2	03-07-2008
