



(72) MARCHETTI, Luigi, IT

(71) GOLDEN LADY S.P.A., IT


(51) Int.Cl.⁶ D05B 1/20, A41D 27/24

(30) 1996/06/28 (FI96A000158) IT

(30) 1996/11/27 (FI96U000141) IT

(54) **ARTICLES DU TYPE BAS OU COLLANTS (PANTY) REALISES
A PARTIR D'UN TISSU MAILLE EXTRA-FIN COMPORTANT
DE MINCES COUTURES PLATES**

(54) **AN ARTICLE SUCH AS A STOCKING OR PAIR OF TIGHTS
(PANTY-HOSE) MADE FROM SHEER KNIT FABRIC, WITH
THIN, FLAT SEAMS**

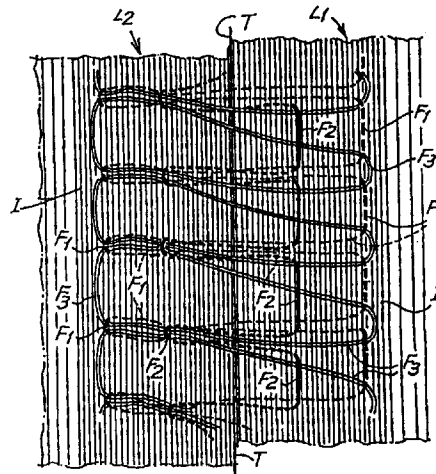

(57) Les coutures servant à assembler, le long de la fourche, les pièces de tissu qui composent l'article, et/ou les coutures fermant les bouts, sont réalisées à l'aide de deux fils d'aiguille (F1, F2) et d'un fil de boucleur (F3) qui forme un point de chaînette, l'ensemble des fils formant des points longs, de sorte que, sous l'effet de l'étirement qui se produit lorsque l'on enfle ces articles, les coutures deviennent sensiblement "plates", c'est-à-dire très minces et certainement beaucoup plus minces que leur largeur.

(57) The seams for joining together, along the crotch, the pieces of fabric making up the article and/or for closing the toes of the legs, are made with two needle threads (F1, F2) and one looper thread (F3) that forms a chain stitch, all of them forming long stitches, in such a way that, under the stretching of the garment as it is put on, the seams become essentially "flat", that is to say very thin and certainly much thinner than they are wide.

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D05B 93/00, 1/20, A41B 11/14, A41D 27/24	A1	(11) International Publication Number: WO 98/00595 (43) International Publication Date: 8 January 1998 (08.01.98)
(21) International Application Number: PCT/IT97/00075 (22) International Filing Date: 9 April 1997 (09.04.97) (30) Priority Data: FI96A000158 28 June 1996 (28.06.96) IT FI96U000141 27 November 1996 (27.11.96) IT (71) Applicant (for all designated States except US): GOLDEN LADY S.P.A. [IT/IT]; Via Cavallotti, 11, I-60035 Jesi (IT). (72) Inventor; and (75) Inventor/Applicant (for US only): MARCHETTI, Luigi [IT/IT]; Via Esenta, 10, I-46043 Castiglione delle Stiviere (IT). (74) Agents: MANNUCCI, Michele et al.; Via della Scala, 4, I-50123 Firenze (IT).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: AN ARTICLE SUCH AS A STOCKING OR PAIR OF TIGHTS (PANTY-HOSE) MADE FROM SHEER KNIT FABRIC, WITH THIN, FLAT SEAMS

(57) Abstract

The seams for joining together, along the crotch, the pieces of fabric making up the article and/or for closing the toes of the legs, are made with two needle threads (F1, F2) and one looper thread (F3) that forms a chain stitch, all of them forming long stitches, in such a way that, under the stretching of the garment as it is put on, the seams become essentially "flat", that is to say very thin and certainly much thinner than they are wide.

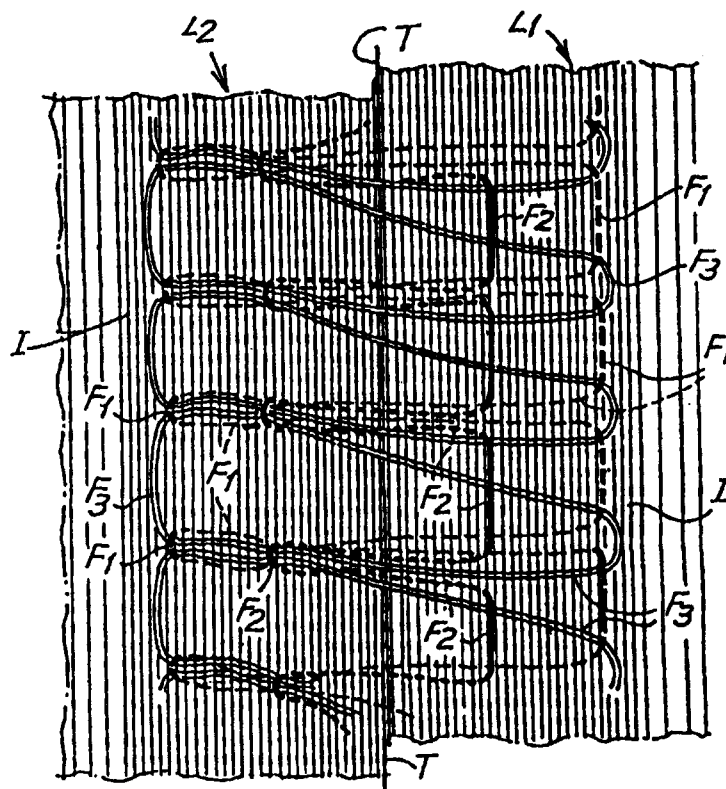

AN ARTICLE SUCH AS A STOCKING OR PAIR OF TIGHTS (PANTY-HOSE) MADE FROM SHEER KNIT FABRIC, WITH THIN, FLAT SEAMS

DESCRIPTION

This invention relates to an article made of
5 sheer knit fabric, typically stockings, tights (panty-hose) and the like, the seams of which article have little thickness, unlike the seams obtainable with current well-known overlock machines such as UNION SPECIAL and so on, in which seams the margins of the
10 pieces of fabric to be assembled are drawn tightly together ("overlock" seaming) which results in very thick, cord-like seams; this is disadvantageous both from the point of view of the comfort and "wearability" of the garment, because of the irritation caused by the shape of
15 the seams, and from the point of view of the aesthetic appearance of the garment.

The present garment avoids these problems and has stable seaming and satisfactory appearance; it can also be produced with a high degree of automation and is
20 therefore clearly suited to industrial application.

Fundamentally, the article, such as a stocking, pair of tights (panty-house) or the like made from sheer knit fabric has seams for joining together, along the crotch, its constituent pieces of fabric and/or for
25 closing the toes of the legs, whose structure is such that, under the stretching of the garment as it is put on, the seams become essentially "flat", that is to say very thin, and certainly much thinner than they are wide.

In one practical embodiment, said seams are made
30 with two needle threads and one looper thread for the chain stitch, these together forming relatively long stitches that do not pull tight.

In the seam produced according to the invention, when the fabric pieces - joined together by said seam -
35 are tensioned and made coplanar, their margins connected by the seam in question are effectively "edge-to-edge", that is to say "adjacent" or "juxtaposed" so that the seam becomes thin, and certainly much thinner than it is

- 2 -

wide.

Basically, the article according to the invention comprises seams consisting of three threads forming three series of stitches, specifically:

5 a) a first series of short stitches, formed with a first needle thread, which extend across the "line of the cut", passing out of one of the two pieces of fabric being joined together and entering the other at positions relatively near to the cut edges;

10 b) a second series of longer stitches, formed with a second needle thread, which stitches also extend across the line of the cut, passing out of one of the two pieces of fabric being assembled and entering the other at a greater distance from the same line of the cut than
15 the stitches forming the aforesaid first series of stitches, so that the shorter stitches of the first series of stitches lie inside the longer stitches of the second series of stitches; and

 c) a third series of stitches, formed with
20 "slack" stitches of a looper thread, much longer and "slacker" than those of the first two series of stitches, which stitches of the third series form the "chain" seam, extending across the line of the cut and forming chain stitches with the first and second needle threads.

25 It follows from the structural characteristics of the seam described above that, under the stretching of the garment as it is put on, the seam becomes wider and quite flat, with virtually no overlapping of the fabric pieces. This has the obvious advantages of greater
30 comfort and a much more pleasing appearance of the garment. There is no disadvantageous impact on either the practical or aesthetic effect from the fact that the width of the flat seam produced in this way cannot be made to equal that obtained with the type of seam pro-
35 duced with only manual sewing machines; because in fact, from the aesthetic point of view it is actually decidedly preferable, in tights and stockings, for the width of the seam to be limited.

 The drawing shows one possible embodiment of a
40 flat seam according to the invention, and one possible

- 3 -

example of equipment for producing it. In particular:

Fig. 1 shows a highly schematic perspective view of a pair of tights or panty-hose;

5 Figs. 2, 3 and 4 show an enlarged detail of the area indicated by the arrow fII, a cross section on III-III as marked in Fig. 2 and an enlarged view of a detail indicated by the arrow fIV marked in Fig. 1, so as to define the structure of the flat seam.

10 As shown in the accompanying drawing, with initial reference to the Figs. 1 to 4, an article according to the invention is shown with so-called "flatlock" seams of loose, flat stitches, which are used to close the toes P and to connect the two components, each of which consists of a leg G and a portion of the
15 body section C, along the crotch, with the possible addition of a gusset T. The toe seam is marked CP, while the seam along the crotch line is given the general reference CC and is shown in greater detail in Figs. 2 to 4. In the seam area the fabric of the two pieces L1 and
20 L2, which are sewn together, can optionally be formed by two portions of non-run fabric marked I, while further away, the fabric of the article can be made with a normal knit and is therefore more elastic and more suited to the function of the article, using techniques known per se;
25 the non-run portions I along the pieces L1 and L2 that are to be sewn give the knitted stitches greater resistance to unravelling.

The so-called flatlock seam described above is particularly effective because under the conditions of
30 tension of the fabric when the article is worn, the two pieces L1 and L2 - which are connected by the seams such as CP and such as CC formed by threads F1, F2 and F3 - are basically brought edge-to-edge along the lines of the cut T with no overlap and especially without that cord-
35 like bunching up of the fabrics which is present in the conventional structure of seams produced by overlock machines. The seam can be produced in such a way that the stitches formed by threads F1 and F2 lie primarily on the outside while the stitches formed by thread F3 of the

chain-stitch seam produced with the thread fed to the looper are on the inside of the article when worn. However, the possibility of choosing the reverse position of that indicated is not excluded.

5 Essential considerations in the seam that is to be produced are what strength is desired and how much stretch capacity is required of the two pieces L1, L2 sewn together, which stretch is produced by increasing the length of the long stitches and short stitches (with
10 threads F1 and F2) and likewise the chain-stitch seam (with thread F3).

 The seam described above can be produced industrially on - for example, but not necessarily -
15 conventional-type overlock machines such as those produced by Union Special, Yamato, Juki, Rimoldi, etc., by fitting these machines with the equipment described in the application for an industrial utility model which the present Applicant is filing simultaneously with the present application; in which case the seam will be made
20 by threading the overlock machine with two needle threads (the two needle threads F1 and F2) and one looper thread F3; thread F1 will make the long stitches, while thread F2 will make short stitches positioned in an intermediate position relative to the position occupied by the long
25 stitches formed by thread F1, while the third thread F3 will be fed to a looper and will form the chain stitches, which are particularly visible on the opposite side to that on which the long stitches of thread F1 and short stitches of thread F2 can be seen. The long stitches and
30 short stitches of threads F1 and F2 respectively are particularly visible in Fig. 2, while the looper stitches, the so-called chain stitches, formed by thread F3 are visible mostly in Fig. 4. Thread F1 intended to form the long stitches is fed to the needle that passes
35 through the pieces L1 and L2 at the furthest position from the line of the cut T, while thread F2 is fed to the needle closest to the line of the cut T.

WO 98/00595

PCT/IT/97/00075

CLAIMS

1. Article such as a stocking, pair of tights (panty-hose) or the like, made from sheer knit fabric, characterized in that the seams for joining together, along the crotch, its constituent pieces (L1, L2) of fabric consists of three series of stitches, namely:

- a) a first series of short stitches, formed with a needle thread (F2), which extend across the "line of the cut" (T), passing out of one of the two pieces (L1, L2) of fabric being joined together and entering the other at positions relatively near to the cut edges (T);
- b) a second series of longer stitches, formed with a needle thread (F1), which stitches extend across the line of the cut (T), passing out of one of the two pieces of fabric being assembled and entering the other at a greater distance from the same line of the cut (T) than the stitches forming the aforesaid first series of stitches, so that the shorter stitches of the first series of stitches lie inside the longer stitches of the second series of stitches; and
- c) a third series of stitches, formed with "slack" stitches of a looper thread (F3), much longer and "slacker" than those of the first two series of stitches, which stitches of the third series form a "chain" seam, extending across the line of the cut (T) and forming chain stitches with the first two threads (F1, F2); therefore when the pieces of fabric joined by said seams are tensioned and made coplanar, their margins connected by these seams are effectively "edge-to-edge", that is to say "adjacent" and "juxtaposed" so that the seams become thin, and certainly much thinner than they are wide.

AMENDED SHEET

1/2

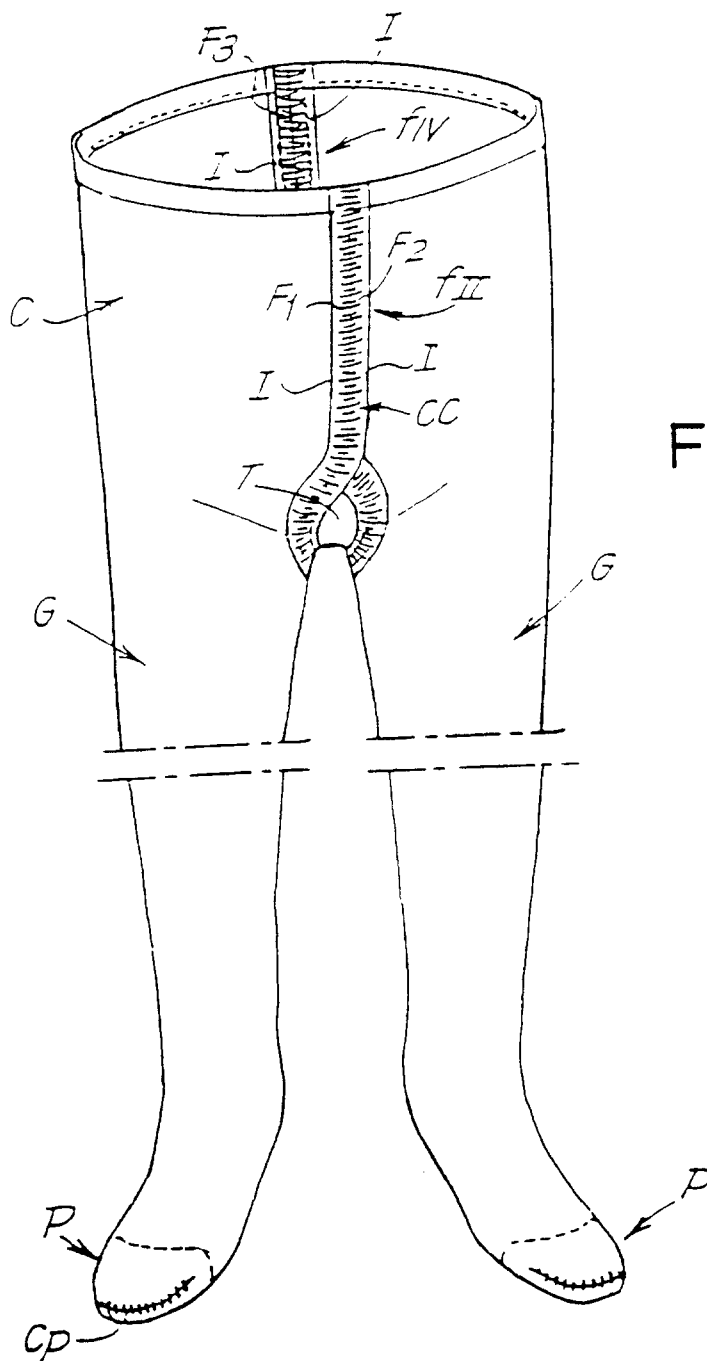


Fig. 3

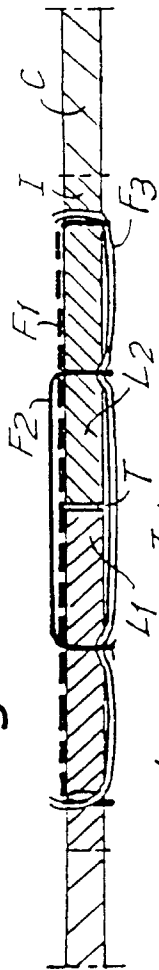


Fig. 2


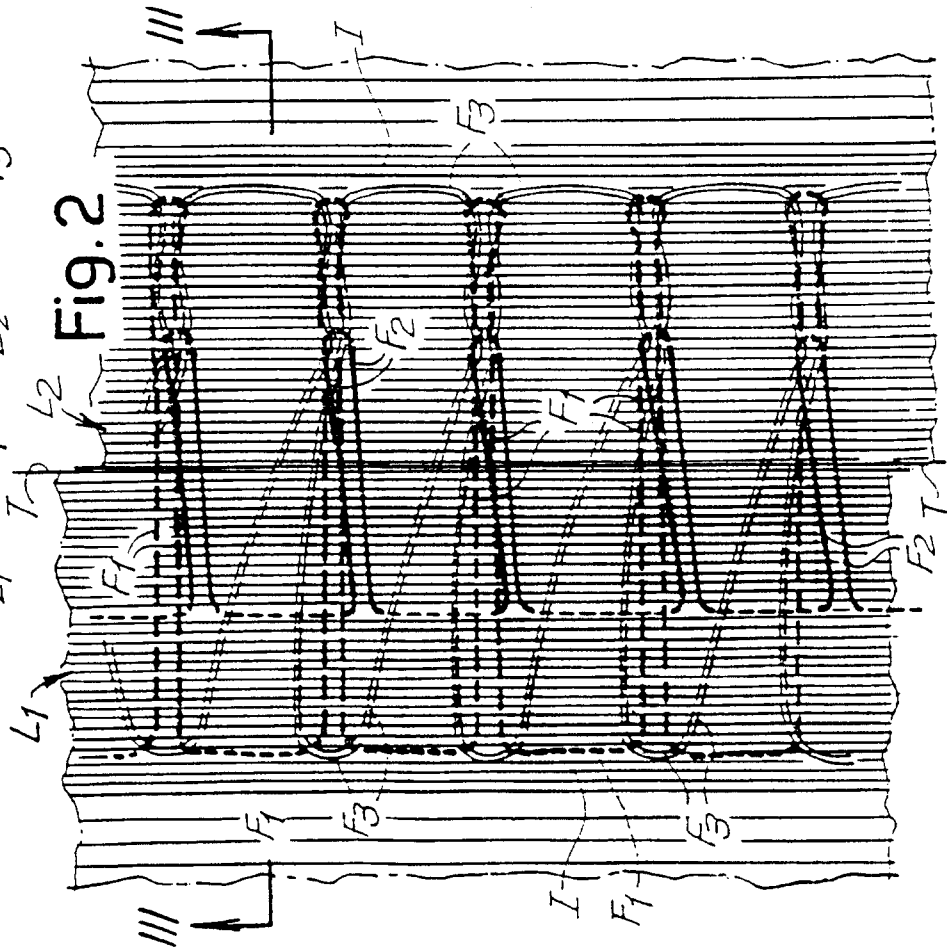


Fig. 4



2/2

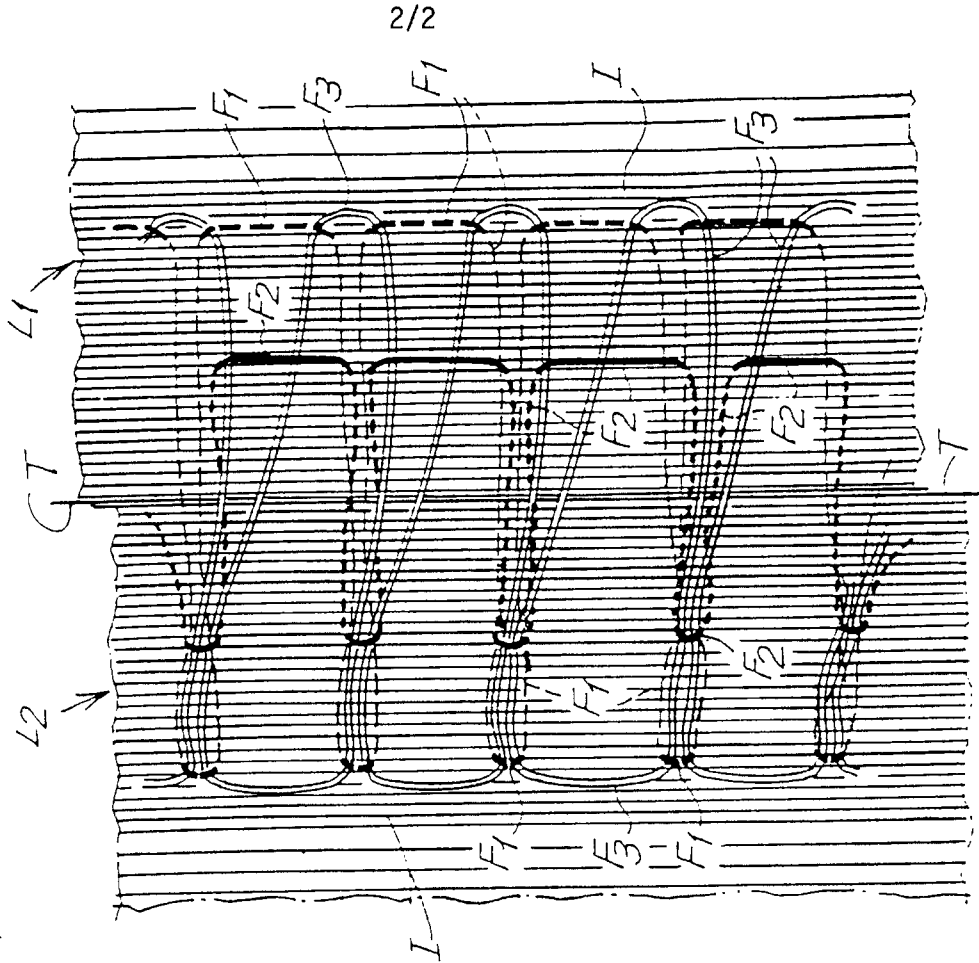