



(86) Date de dépôt PCT/PCT Filing Date: 2007/10/02
(87) Date publication PCT/PCT Publication Date: 2008/04/10
(45) Date de délivrance/Issue Date: 2011/12/13
(85) Entrée phase nationale/National Entry: 2009/03/31
(86) N° demande PCT/PCT Application No.: EP 2007/008543
(87) N° publication PCT/PCT Publication No.: 2008/040524
(30) Priorité/Priority: 2006/10/07 (DE10 2006 047 555.0)

(51) Cl.Int./Int.Cl. *C21C 5/50* (2006.01)


(72) Inventeurs/Inventors:
IMIELA, CHRISTIAN, DE;
SCHULZE, STEPHAN, DE;
SIX, STEPHAN, DE;
SUNDERMANN, CHRISTOPH, DE;
HERTEL, JOERG, DE;
BEST, ROLF, DE

(73) Propriétaire/Owner:
SMS SIEMAG AKTIENGESELLSCHAFT, DE

(74) Agent: RICHES, MCKENZIE & HERBERT LLP


(54) Titre : PROCEDE D'EXPLOITATION D'UN CONVERTISSEUR

(54) Title: METHOD OF OPERATING A CONVERTER

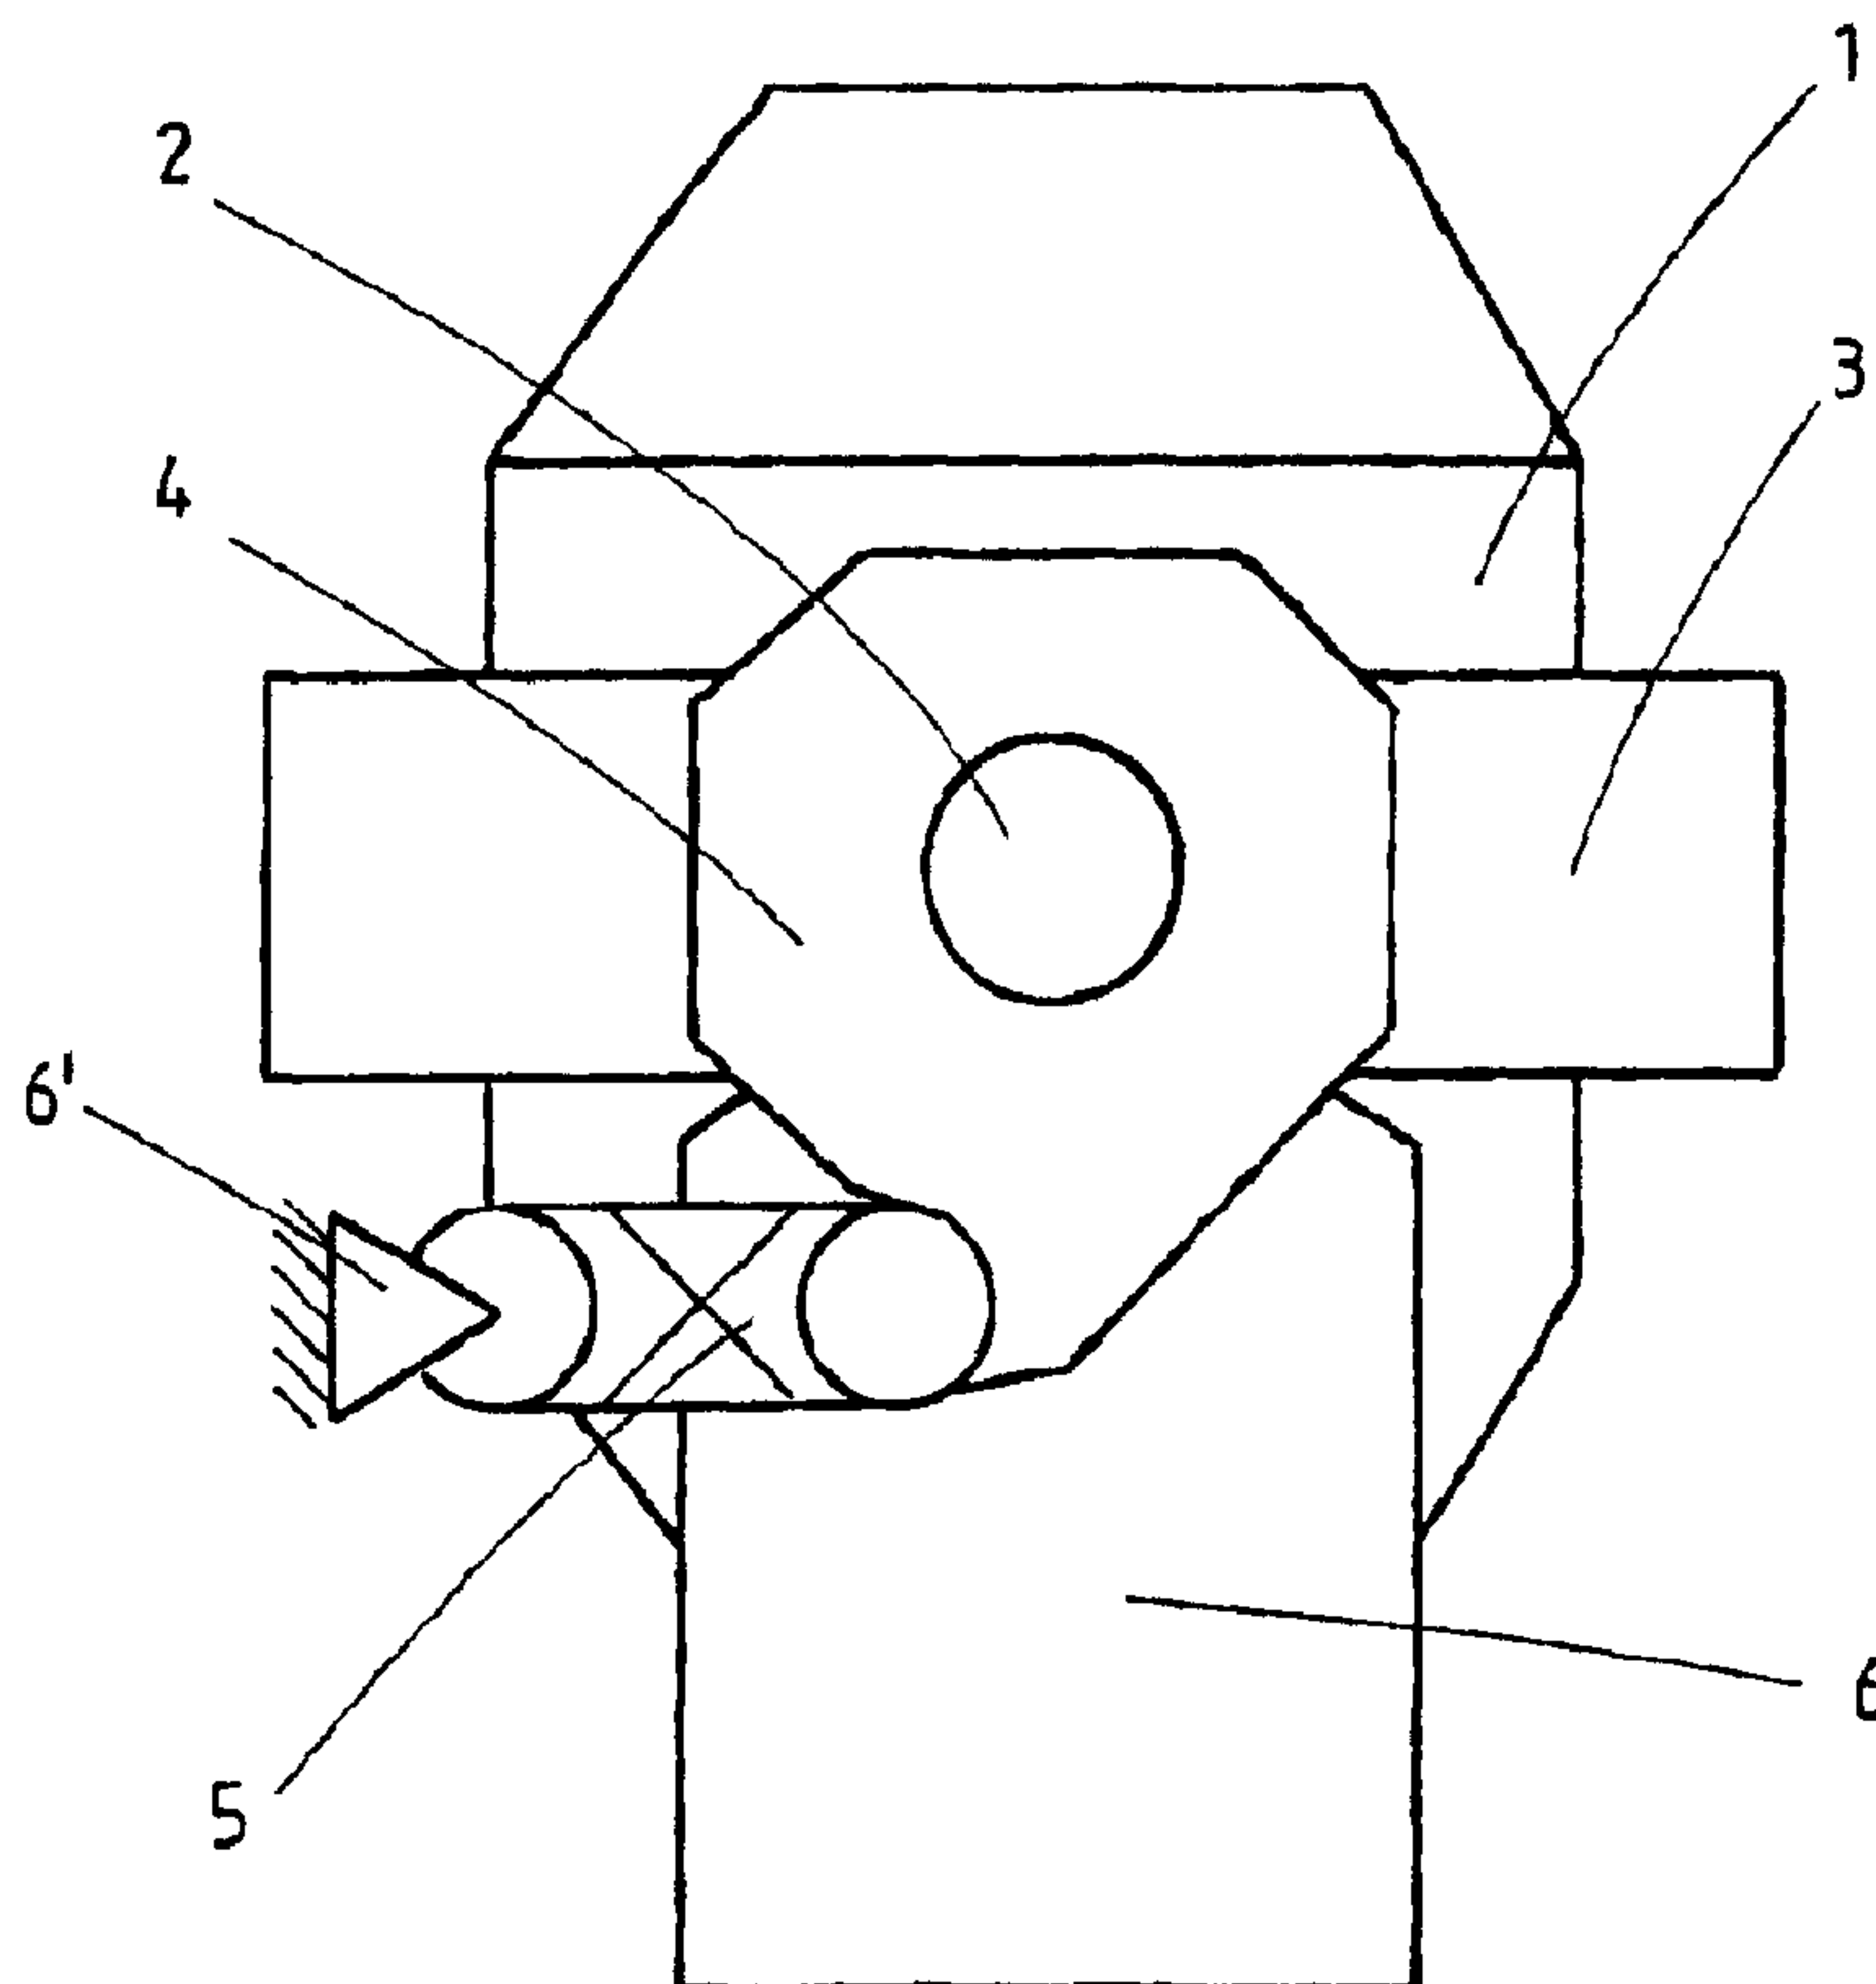

(57) Abrégé/Abstract:

In a method for operating a converter (1), in which the converter (1) is mounted in a carrying ring (3) by means of carrying journals (2), a gear mechanism (4) is mounted in a floating manner on the carrying journals (2), the converter (1) is configured, as a result,

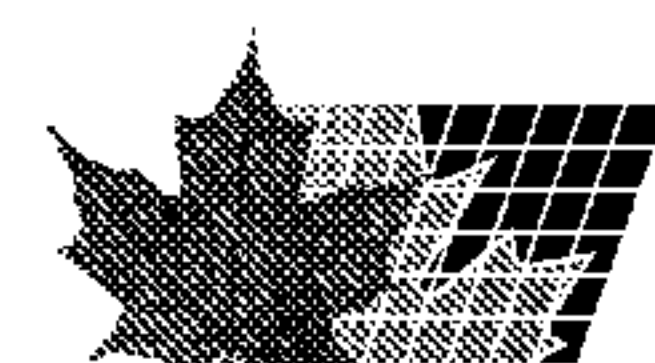

(57) **Abrégé(suite)/Abstract(continued):**

such that it can tilt about its horizontal axis and the gear mechanism (4) is connected rigidly to a pedestal (6) by a torque support (5), the torque support (5) connects the gear mechanism (4) to the pedestal (6) during the tilting operation of the converter (1), and the torque support (5) is released from the pedestal (6) or from the gear mechanism (4) or from both during operation of the converter (1).

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
10. April 2008 (10.04.2008)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2008/040524 A1(51) Internationale Patentklassifikation:
C21C 5/50 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2007/008543

(22) Internationales Anmeldedatum:
2. Oktober 2007 (02.10.2007)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
10 2006 047 555.0 7. Oktober 2006 (07.10.2006) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von
US): **SMS DEMAG AG** [DE/DE]; Eduard-Schloemann-
Strasse 4, 40237 Düsseldorf (DE).


(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **IMIELA, Chris-
tian** [DE/DE]; Josefstrasse 22, 40227 Düsseldorf (DE).
SCHULZE, Stephan [DE/DE]; Zur Heide 10, 40880
Ratingen (DE). **SIX, Stephan** [DE/DE]; Schameder Str.3,
57339 Emdtebrück (DE). **SUNDERMANN, Christoph**
[DE/DE]; Carl-Kraemer-Weg 5, 57271 Hilchenbach
(DE). **HERTEL, Jörg** [DE/DE]; Auf der Hütte 15,
57271 Hilchenbach (DE). **BEST, Rolf** [DE/DE]; Partner-
schaftsweg 23, 45966 Gladbeck (DE).(74) Anwalt: **KLÜPPEL, Walter**; Hemmerich & Kollegen,
Hammerstr. 2, 57072 Siegen (DE).(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,
AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DK, DM, DO, DZ, EC, EE, EG,

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD FOR OPERATING A CONVERTER

(54) Bezeichnung: VERFAHREN ZUM BETREIBEN EINES KONVERTERS

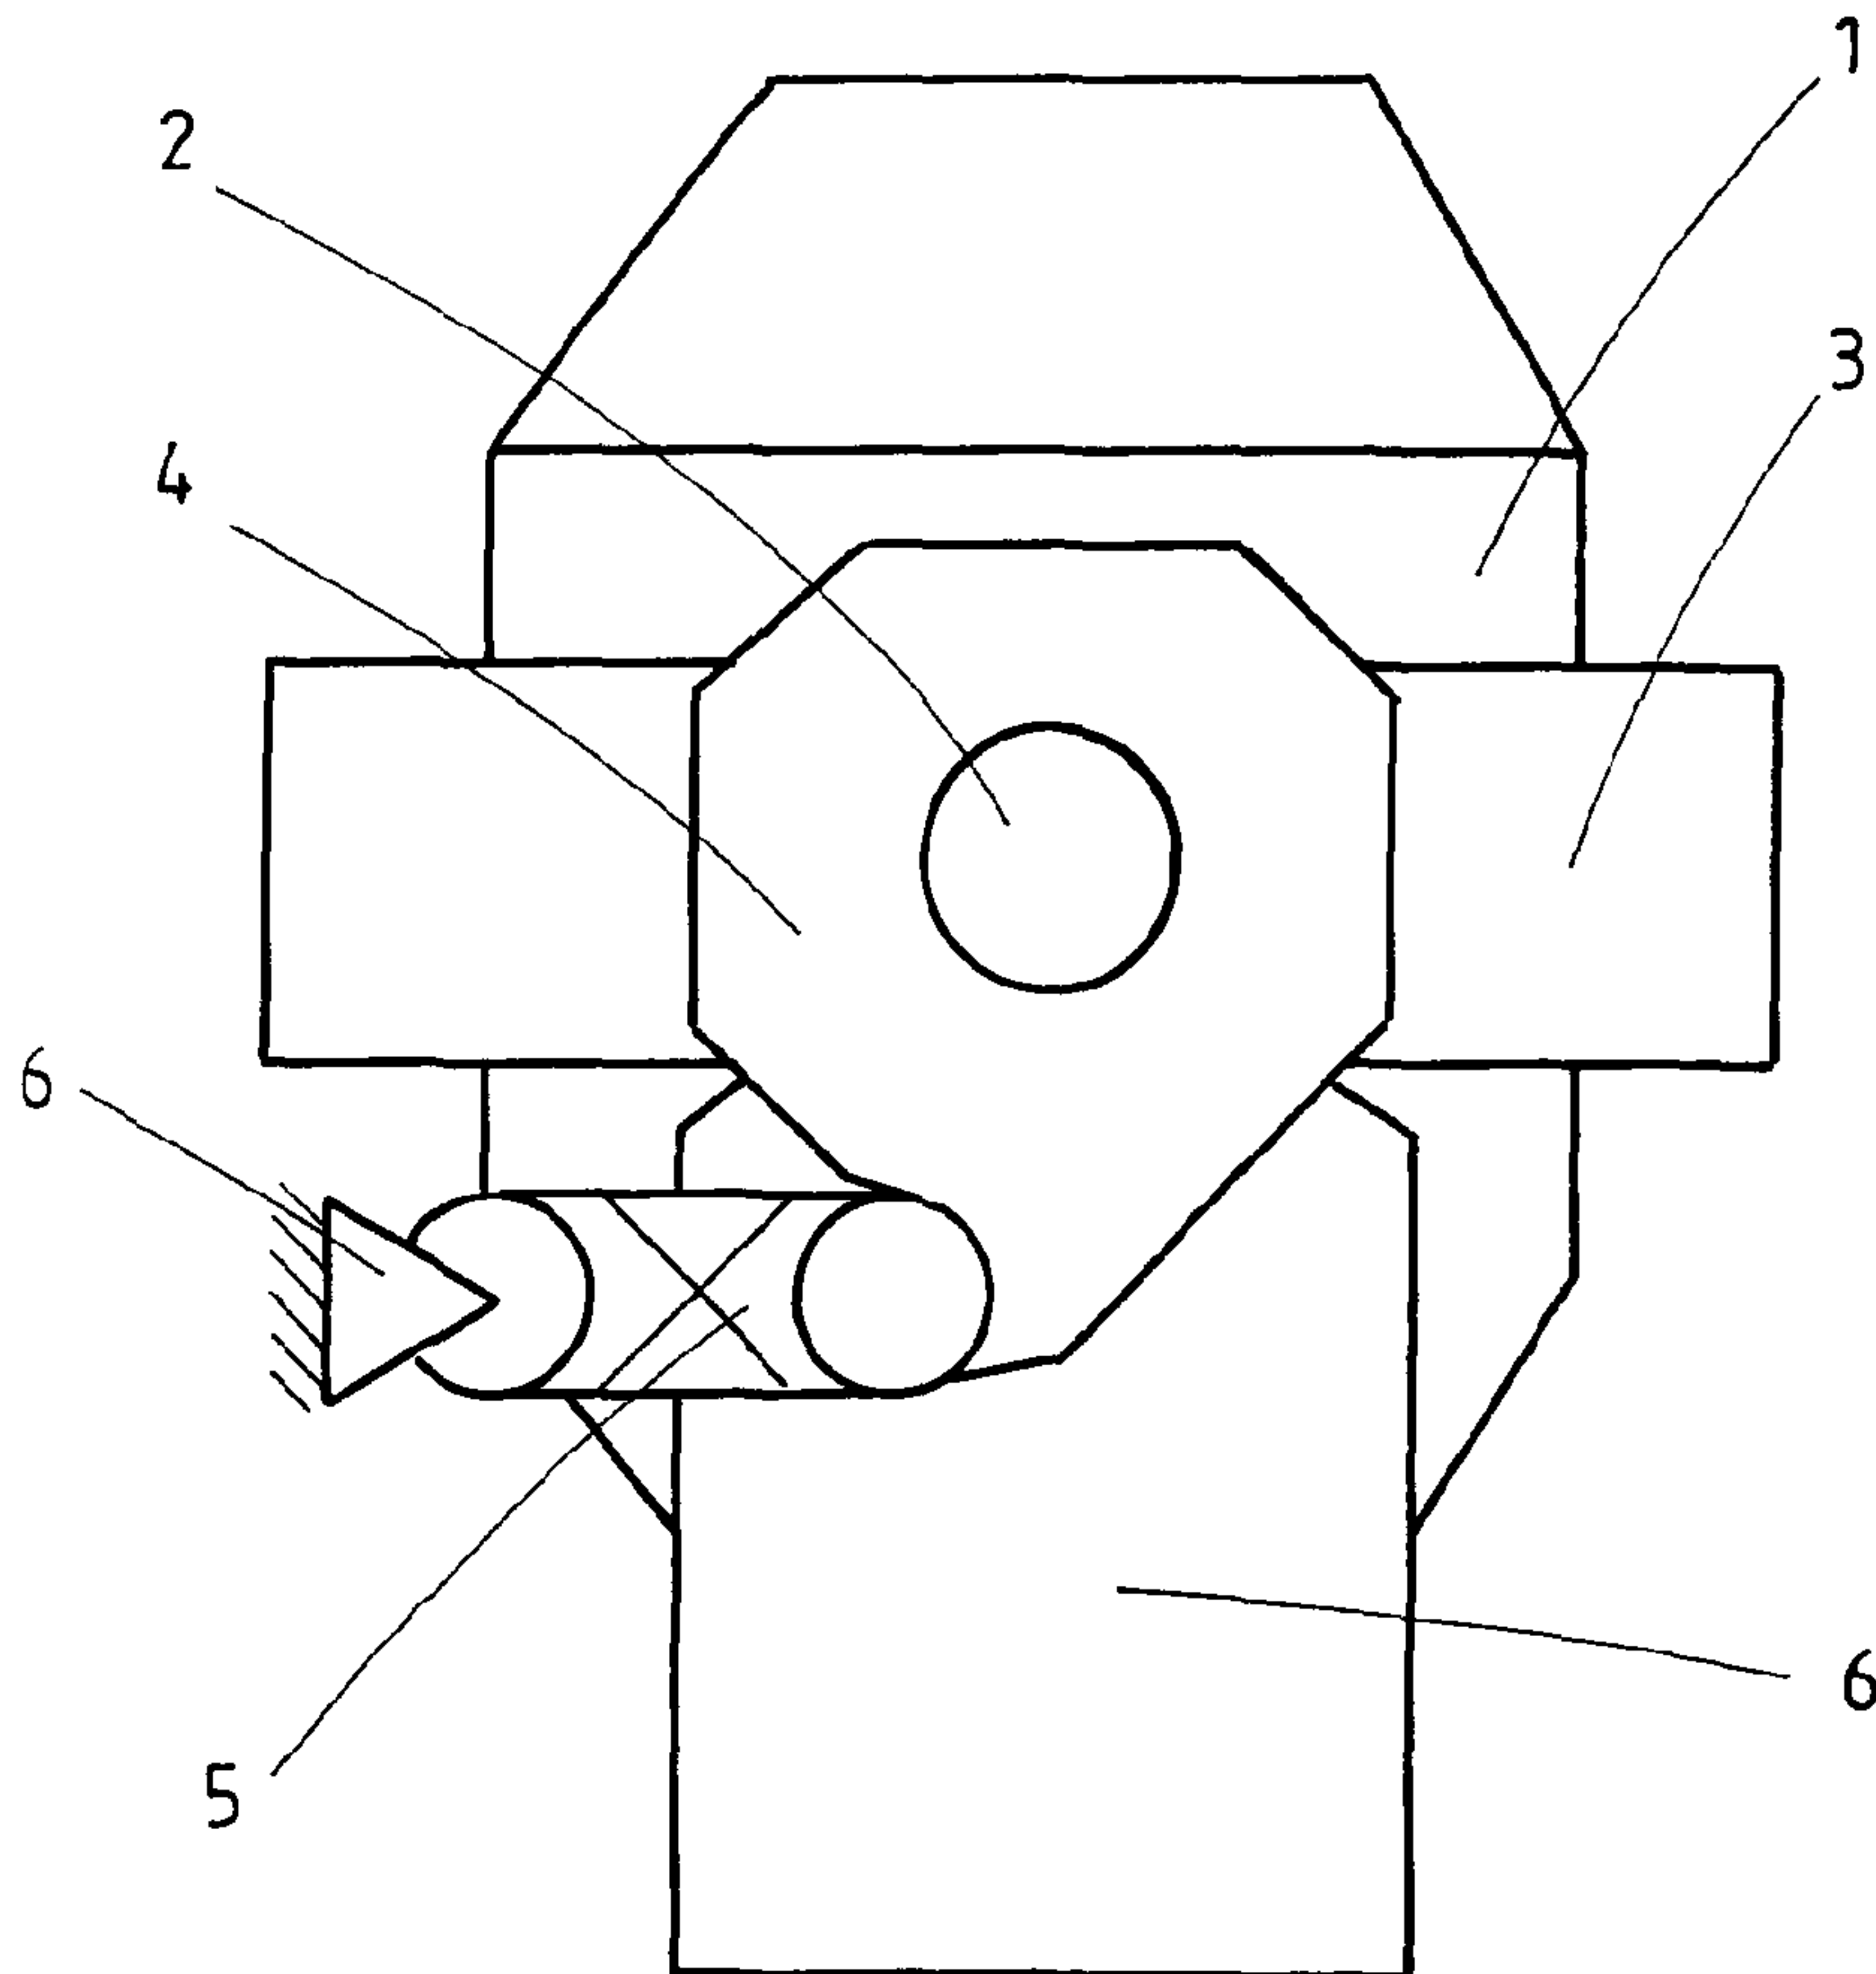

(57) **Abstract:** In a method for operating a converter (1), in which the converter (1) is mounted in a carrying ring (3) by means of carrying journals (2), a gear mechanism (4) is mounted in a floating manner on the carrying journals (2), the converter (1) is configured, as a result, such that it can tilt about its horizontal axis and the gear mechanism (4) is connected rigidly to a pedestal (6) by a torque support (5), the torque support (5) connects the gear mechanism (4) to the pedestal (6) during the tilting operation of the converter (1), and the torque support (5) is released from the pedestal (6) or from the gear mechanism (4) or from both during operation of the converter (1).

(57) **Zusammenfassung:** Bei einem Verfahren zum Betreiben eines Konverters (1), bei dem der Konverter (1) mittels Tragzapfen (2) in einem Tragrings (3) gelagert ist, auf den Tragzapfen (2) ein Getriebe (4) fliegend gelagert ist, der Konverter (1) dadurch um seine Horizontalachse kippbar ausgebildet ist und das Getriebe (4) durch eine Momentenstütze (5) mit einem

Fundament (6) starr verbunden ist, wird die Momentenstütze (5) beim Kippvorgang des Konverters (1) das Getriebe

[Fortsetzung auf der nächsten Seite]

WO 2008/040524 A1

WO 2008/040524 A1



ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) **Bestimmungsstaaten** (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU,

Veröffentlicht:

- mit internationalem Recherchenbericht
- vor Ablauf der für Änderungen der Ansprüche geltenden Frist; Veröffentlichung wird wiederholt, falls Änderungen eintreffen

METHOD OF OPERATING A CONVERTER

The invention relates to a method of operating a converter wherein the converter is mounted in a support ring by means of support trunnions and a drive is cantilevered off the support trunnions, the converter being therefore configured so as to tilt about its horizontal axis and the drive being rigidly connected with a base by means of a brace strut.

In a converter, excess carbon is oxidized by introducing oxygen into the molten crude iron. The crude iron is thereby converted to steel.

DE 38 27 329 [US 5,003,835] shows a torque-resisting strut for drives, particularly converter tilt drives, riding on the shaft trunnions, carrying the drive housing, and each flanged onto or screwed onto a step-down drive that engages with a pinion into a large gear mounted on the shaft trunnion so as to rotate with it, this mechanism consisting of strut rods attached symmetrically to the axis of rotation of the shaft trunnion to be driven to the drive housing by spherical bearings, the lower ends of the strut rods being respectively connected with pivots fixed on the floor and connected with one another by a rod. To this end the strut rods have in two parts; the free ends of the strut rods that are spaced from the pivots being connected with springs that function with tension and pressure, and the springs of the spring elements can be prestressed to a predetermined value by mechanical means.

WO 2003/023,072 [US 2005/0012253] shows a converter drive comprising a gear rim connected with the pivot trunnion of a

converter vessel, in engagement with at least one drive pinion of the converter drive, and at least one locking device that can be pivoted into or out of the gears of the gear rim, in the form of a locking arm mounted on a horizontal shaft and formed with gear teeth. This converter drive is characterized in that the shaft of the locking arm is mounted in at least one bearing in the end position, and that the locking arms can be moved, with force fit, into the gear teeth of the gear rims by actuators, for example hydraulic cylinders, and can be moved out of engagement with the gear teeth and that the shaft of the locking arm is mounted in the housing of the converter drive at its shaft ends each with an eccentric bushing mounted to rotate freely in one another, in such a manner that a mutually ideal engagement position of the two interacting toothed regions of the locking device and of the gear rim can be adjusted by independent rotation of these bushings.

DE 26 54 907 [US 4,121,481] shows a device on a converter having a tilt drive that is suspended on a tilt trunnion of the converter, and a strut that rests resiliently on the base. To this end, the tilt drive can be fixed in place relative to the base during the blowing process by a positioner.

EP 003 108 [US 4,265,136] shows a strut for a drive that is mounted to move about a pivot axis, particularly for a converter drive, where the drive housing is supported, relative to the base, on both sides of the pivot axis with an elastic support device. In this connection, a cylinder to which compressed gas is applied is provided as the elastic support device; its position can be adjusted, relative to the base, by an adjustment device.

DE 30 07 916 [US 4,467,666] shows a strut for a cantilevered drive, particularly for converter drives, the drive housing being mounted on its shaft trunnion that can be driven and carries a large gear, multiple step-down drives that drive the large gear being flanged onto the housing with their drive motors, in each instance, and first parallel levers spaced at equal intervals on opposite sides of the axis of rotation of the shaft trunnion being fixed to it by way of joints, which levers are connected with two identical parallel levers that are pivoted at a fixed location, with at least one coupler that connects the parallel levers, one of which extends at a slant and is provided with a spring, all the joints having ball joints. This strut is characterized in that the second parallel levers run at a slant in the normal position, that the coupler has at least two longitudinal segments each provided with a gap and that the coupler is articulated onto the joints that connect the two parallel levers.

A fixing member of an element of a kinematic chain, such as an element of a gear wheel translation, for example, is known from DE 600 04 714 [US6,299,829]. Such a fixing member is fixed to a base of a steel plant converter, for example.

It is therefore known that the converters are tilted for emptying by a cantilevered drive. In this connection, support of the turning moment is always done by a rigid brace strut, which is attached to a base on one end and on the drive on the other end. Converters having jets below the bath level are exposed to severe vibrations as the result of the moving steel bath during operation, i.e. when oxygen is fed in. This excitation takes place over a

broad range in all directions, in other words also in the tilting direction. In order to relieve the stress of very great surges on the drive, the large gear is engaged by a locking arm that ensures that the surges are no longer applied by the large gear and the pinions, but rather are taken up by the strut, directly by way of the drive housing. In this connection, great forces act on the base of the casting platform and the brace strut, which leads to damage to the casting platform and other system parts.

The object of the invention is to provide a method with which the above-described disadvantages are avoided.

This task is accomplished, according to the invention, in that in a method of operating a converter, wherein the converter is mounted in a support ring by support trunnions and a drive extends from the support trunnions, the converter being thus configured so as to tilt about its horizontal axis, and the drive being rigidly connected with a base by a torque transmitting strut, the strut connects the drive with the base only during the tilting process, and is disconnected from the base or from the drive or from both of them during operation of the converter.

Further embodiments of the component are evident from the following described features.

The decisive advantage of the method according to the invention lies in the fact that the converter vibrate freely during operation when the brace strut is uncoupled. The amplitude of the free vibrations will remain restricted. By permitting free rotational movement, the forces introduced during operation are no longer transmitted to the base, but rather converted to movement energy. Stress on the base and the strut is relieved.

In a further development, in place of the brace strut, a shock absorber is employed in. The converter vibrations are

thus damped. The shock absorber that is coupled in is designed in such a manner that it limits the maximal amplitudes of the converter during operation, but without achieving the effect of a rigid strut.

Accordingly, in one aspect, the present invention resides in a method of operating a converter (1) wherein the converter (1) is mounted in a support ring (3) by support trunnions (2) and a drive (4) extends from the support trunnions (2), the converter (1) being thus configured so as to tilt about its horizontal axis, and the drive (4) being rigidly connected with a base (6) by a torque-transmitting assembly selected from a strut, a shock absorber and a spring assembly wherein, the torque-transmitting assembly connects the drive (4) with the base (6) during the tilting process, and the torque-transmitting assembly is disconnected from the base (6) or from the drive (6) or from both of them during operation of the converter (1).

Brief Description of the Drawings

An illustrated embodiment of the invention will be described in greater detail using a very schematic drawing.

FIG. 1 shows, in a side view, a converter having a support trunnion in a support ring.

The single figure shows on side view a converter 1 having support trunnions 2. The support trunnions 2 fixed on opposite sides of the converter 1 are seated in a support ring 3. In this way, tilting of the converter 1 about its horizontal axis is made possible.

A drive 4 for tilting the converter 1 is carried on an end of the support trunnion 2. The drive 4 is connected by a torque-transmitting brace strut 5 with a fixed base 6 in order to withstand the turning moment. The base 6 is the casting platform, for example. During a tilting, the strut 5

connects the drive 4 with a part 6' of the base 6 in order to support the turning moment.

During operation of the converter 1, i.e. while oxygen is introduced into the converter, the brace strut 5 is uncoupled either from the drive 4 or from the base 6 or from both of them, and the converter 1 can vibrate freely. Alternatively, a shock absorber can be installed parallel to the strut 5 during such operation, and the vibrations of the converter are damped by this shock absorber.

Reference Number List

1. converter
2. support trunnion
3. support ring
4. drive
5. strut
6. base

WE CLAIM:

1. A method of operating a converter (1) wherein the converter (1) is mounted in a support ring (3) by support trunnions (2) and a drive (4) extends from the support trunnions (2), the converter (1) being thus configured so as to tilt about its horizontal axis, and the drive (4) being rigidly connected with a base (6) by a torque-transmitting assembly selected from a strut, a shock absorber and a spring assembly, wherein,

the torque-transmitting assembly connects the drive (4) with the base (6) during the tilting process, and

the torque-transmitting assembly is disconnected from the base (6) or from the drive (6) or from both of them during operation of the converter (1).

2. The method according to claim 1, wherein the torque-transmitting assembly comprises said shock absorber.

3. The method according to claim 1, wherein the torque-transmitting assembly comprises said spring assembly.

4. The method according to claim 1, wherein the torque-transmitting assembly comprises said strut.

1/1

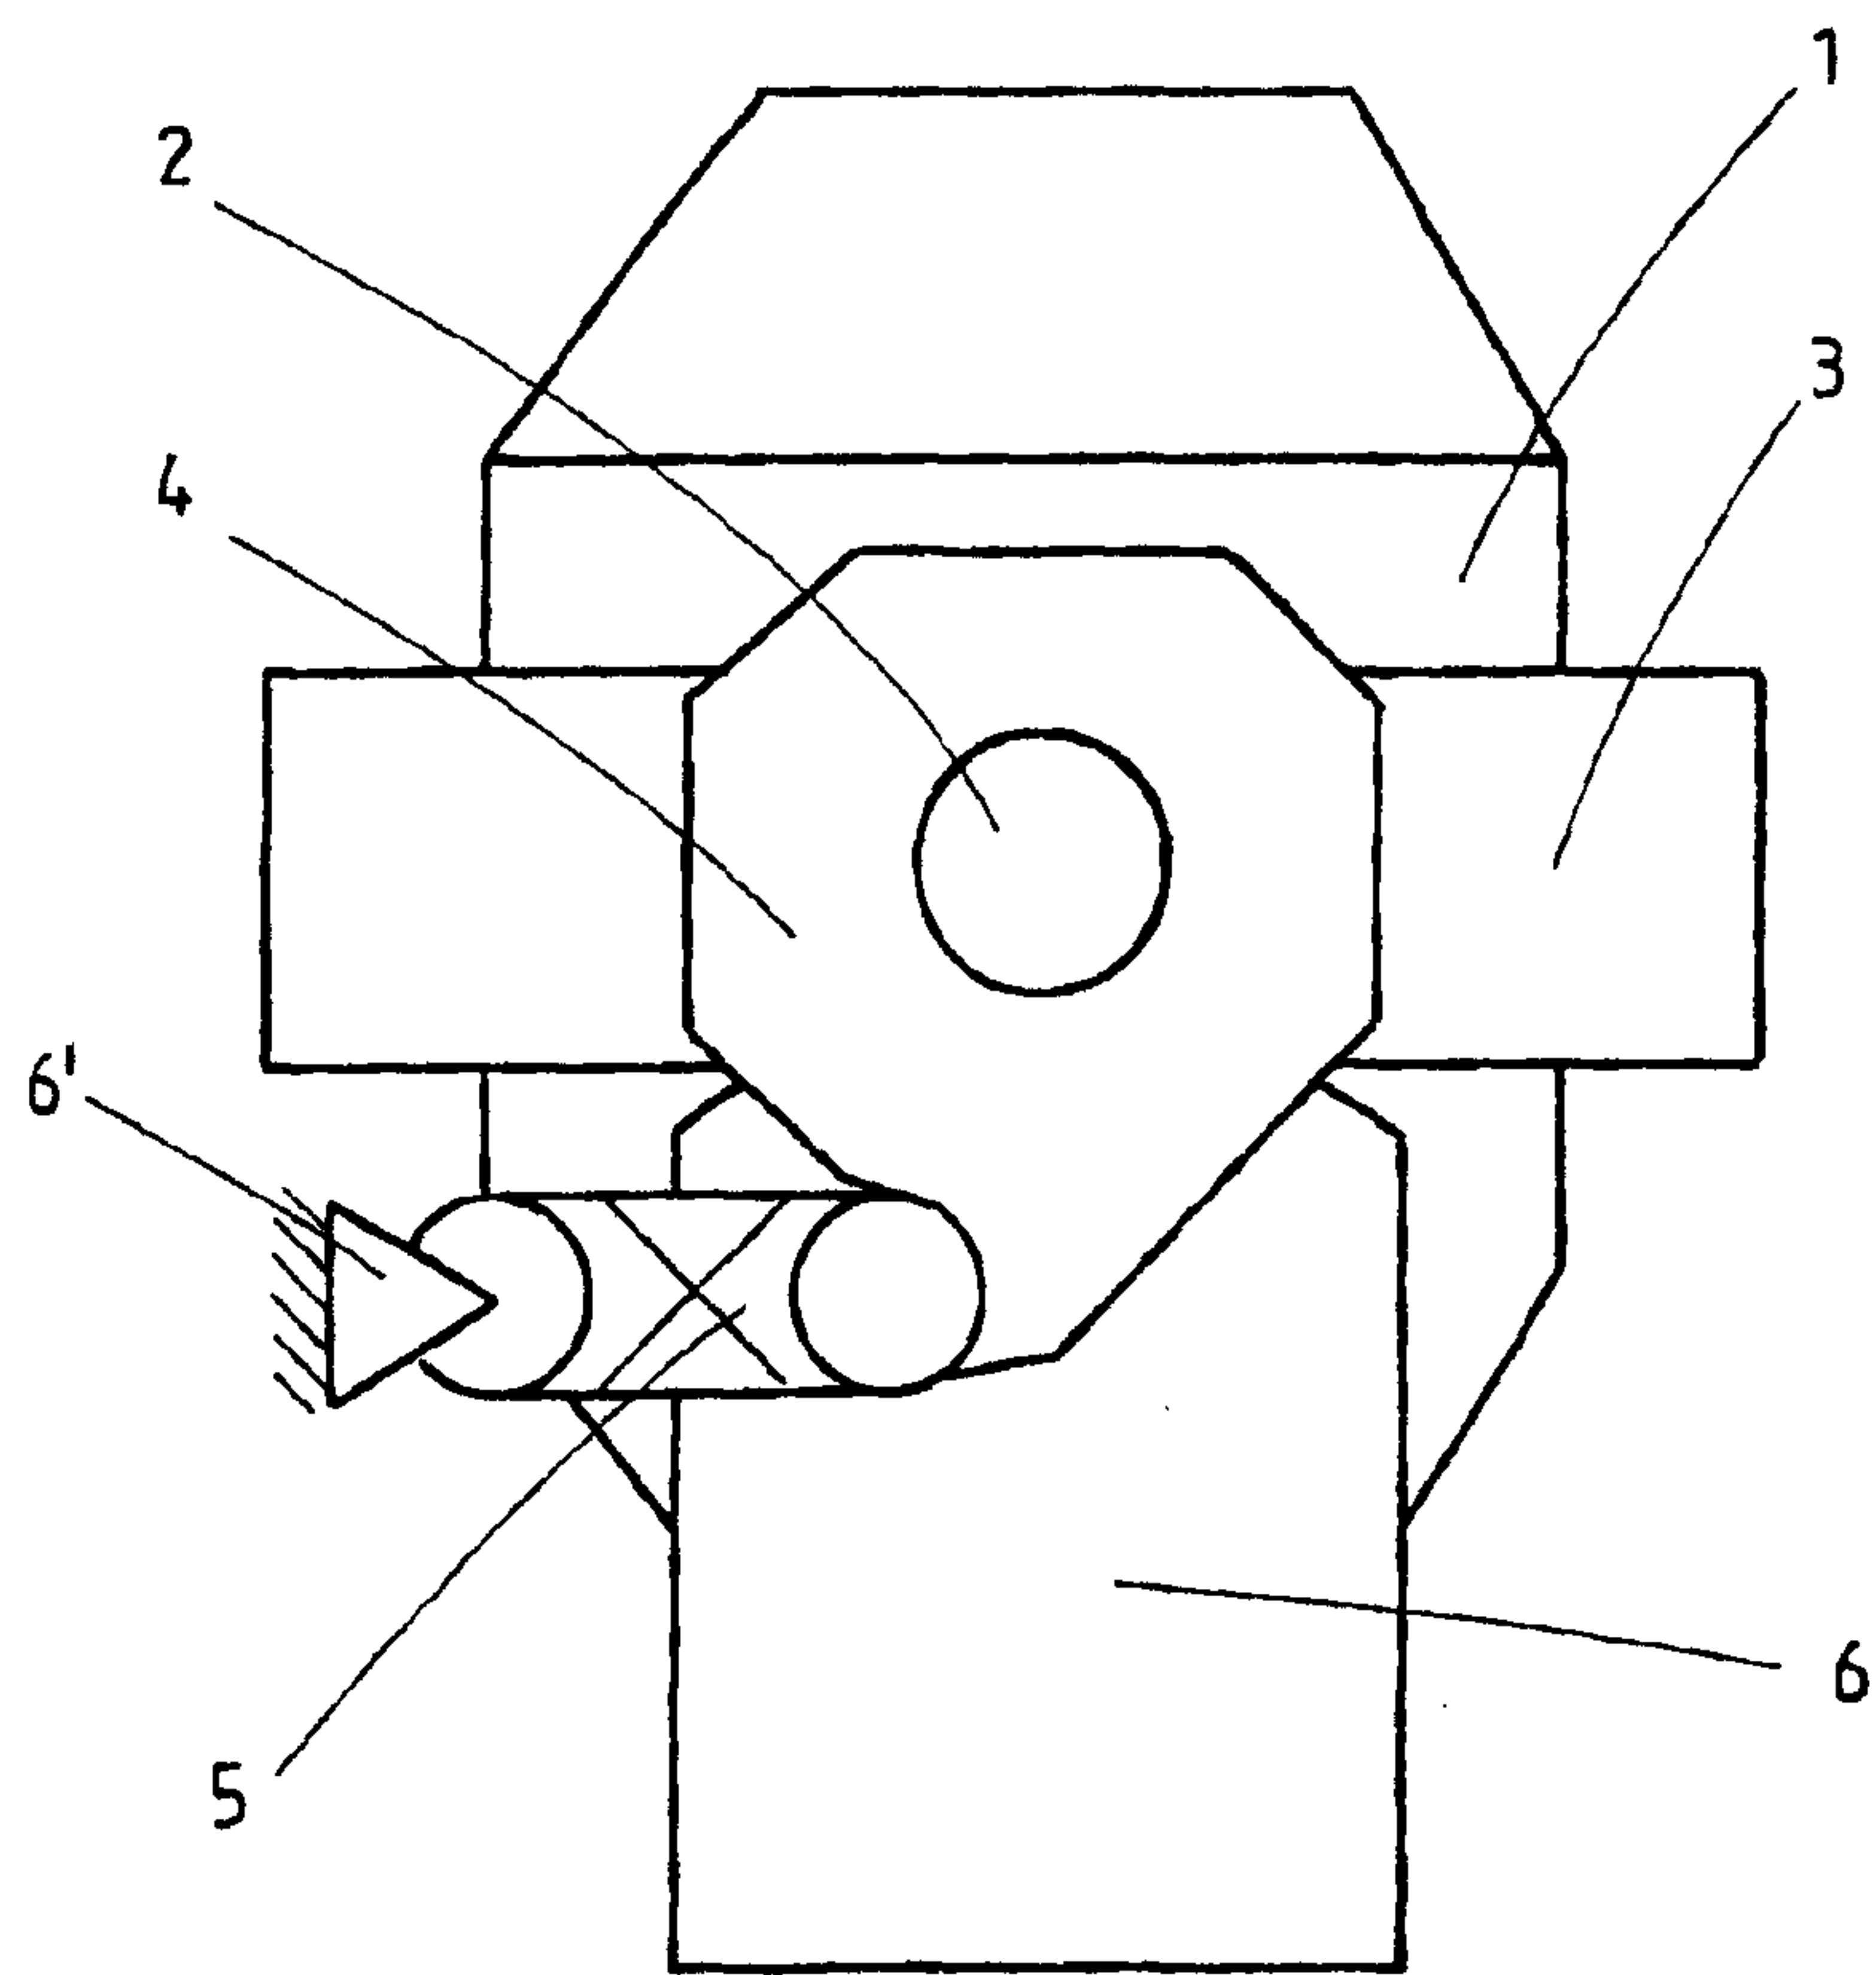


FIG.1

