

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/014615 A1

(51) International Patent Classification⁷: B25D 1/00, 1/12

(21) International Application Number:
PCT/US2002/025067

(22) International Filing Date: 7 August 2002 (07.08.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/214,237 7 August 2002 (07.08.2002) US

(71) Applicant: ESTWING MANUFACTURING COMPANY [US/US]; 2647 Eighth Street, Rockford, Illinois 61109 (US).

(72) Inventors: YOUNGREN, Robert, H.; 11585 Tyson Drive, Rockford, IL 61114 (US). EISMAN, Daniel, M.;

1507 Rural Street, Rockford, IL 61107 (US). LOVE-LAND, Daniel; 11152 Cedarbrook Road, Roscoe, IL 61073 (US). AISTON, Christopher; 29 Taylor Street, Nashua, NH 03060 (US). HARKINS, Jack; 6 N. Pepperell Road, Hollis, NH 03049 (US).


(74) Agents: CARRERA, George, M., Jr. et al.; Gardner Carton & Douglas, 321 North Clark Street, Suite 3300, Chicago, IL 60610-4795 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: STRIKING TOOL WITH WEIGHT FORWARD HEAD

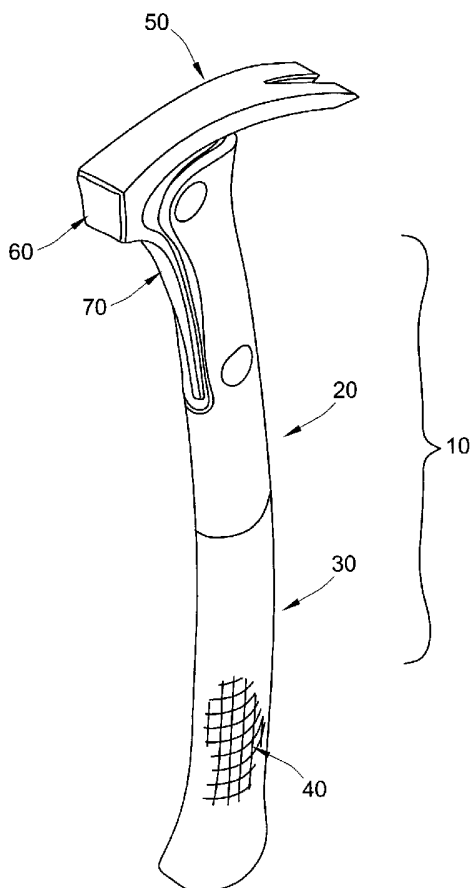

(57) Abstract: The present invention provides a hand-held striking tool (10) that has a head (80) disposed forward of the centerline of a handle (20,30). The hand-held striking tool (10) of the present invention may further include a flange (70) positioned beneath the head (80) of the tool (10), the flange functioning as a second area of contact so that the effect of overstrike may be controlled. The present invention also provides a hand-held striking tool (10) that isolates the striking head (80) of the tool (10) from the handle (20,30) such that the effect of vibrations caused by using the tool are reduced.

WO 2004/014615 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

STRIKING TOOL WITH WEIGHT FORWARD HEAD

Field of the Invention

The present invention relates to hand-held striking tools. The present invention further relates to hammers, axes and hatchets.

Background

Hand-held striking tools are principally designed to deliver a blow to an object. Such tools are designed to drive nails, in the case of hammers, or chop and split wood in the cases of hatchets and axes. There are specialty impact tools, such as roofing striking tools, which have the physical characteristics of both a conventional striking tool and a conventional hatchet. There are also other specialty striking tools that are designed to perform specific functions, typically, when applied to the building trades.

The striking tools of the prior art share several common features. Typically, such prior art devices do not significantly insulate a user from the vibrations that result when the head of the hand-held impact tool strikes a surface. Also, the weight centerline of the head is approximately at the centerline of the shank of the prior art striking tool, such that the striking tool will balance vertically when held in a hand.

One prior art device employed a steel head forged separately of a solid steel handle in an attempt to provide a striking tool having good shock absorbing characteristics and a reduced manufacturing cost. Another prior art device employed a spring shank disposed between a striking tool's handle and head in an attempt to absorb the shock that occurred with use. Yet another prior art device employed beams, which were parallel to a core about

which a handle was formed, the beams residing in over-sized holes to purportedly function as shock absorbers.

Also, the spatial relationship of the head to the handle of hand-held impact tools has remained virtually unchanged for decades. While the prior art has attempted to address
5 vibration reduction, the prior art has generally not addressed the energy required to yield such devices. The prior art has similarly not addressed ways to manage overstrike. Overstrike occurs when, for example, the striking surface of a striking tool misses a nail and the handle strikes the wood or other surface. Thus, the shape of hand-held impact tools has remained, for the most part, unchanged.

10 The shank, or upper portion of the handle, is characteristically straight in most striking tools of the prior art. As discussed above, many striking tools of the prior art are weight-balanced when held vertically in a human hand such that the striking tools do not tip under their own weight. Thus, even in cases where the handle or shank of a prior art striking tool is not completely straight, such as where the handle is bent or disposed at an
15 angle, the tool will be weight-balanced.

It would therefore be an advantage to have a hand-held striking tool that significantly reduces the effect of vibrations arising during use. It would be a further advantage to have a hand-held striking tool that better utilizes a user's energy. It would be yet another advantage to have a hand-held striking tool that manages the effect of overstrike.

Summary of the Invention

20 Embodiments of the present invention provide a hand-held striking tool that significantly reduces the effect of vibrations arising during use. Embodiments of the present

invention further provide a hand-held striking tool that better utilizes a user's energy.

Embodiments of the present invention also provide a hand-held striking tool that manages the effect of overstrike.

One embodiment of the present invention provides a striking tool that includes a
5 handle, a grip molded onto the handle, a generally curved shank connected to the handle,
and a head connected to the shank, the head having a striking surface. The head defines a
weight center. The handle may further include an elastomeric gasket that is positioned
between the shank and the head. A pultruded rod may be positioned within the shank and
the handle to provide additional strength to the striking tool.

10 Another embodiment of the present invention provides a striking tool that includes a
handle, a grip molded onto the handle, a generally curved shank connected to the handle,
and a head connected to the shank, the head having a striking surface. The head defines a
weight center. The head includes an overstrike flange, the overstrike flange providing an
area of contact should the striking surface hit beyond its target. The head may include a
15 nail-pulling end that is distal to the striking surface. The head may further be generally
curved to facilitate the function of the nail-pulling end. The handle may further include an
elastomeric gasket that is positioned between the shank and the head. A pultruded rod may
be positioned within the shank and the handle to provide additional strength to the striking
tool.

20 The present invention also provides a hand-held striking tool having a reduced
vibrational Shock Factor when compared to a hammer of the prior art. The hammer of this
embodiment includes a handle, a grip molded onto the handle, a generally curved shank
connected to the handle, and a head connected to the shank, the head having a striking

surface. The head defines a weight center. The head includes an overstrike flange, the overstrike flange providing an area of contact should the striking surface hit beyond its target. The head may include a nail-pulling end that is distal to the striking surface. The head may further be generally curved to facilitate the function of the nail-pulling end. The handle may further include an elastomeric gasket that is positioned between the shank and the head. A pultruded rod may be positioned within the shank and the handle to provide additional strength to the striking tool.

Still another embodiment of the present invention provides a method for making a hand-held striking tool having a reduced vibrational Shock Factor when compared to a hammer of the prior art. The method includes the steps of making a handle having a generally curved shape, molding a grip onto the handle, making a generally curved shank, connecting the shank to the handle or alternatively making the shank integral to the handle, making a head, the head having a striking surface, and connecting the head to the shank. The head defines a weight center. The shank may be adapted so that a connection region of the head slides into a groove or slot in the shank. The groove of the shank may include a resilient gasket interposed between the head and the shank. The shank and head may be further adapted to be connected using fasteners such as bolts. In an alternative embodiment, the method can include making the shank integral to the handle, and connecting the shank to the head.

One embodiment of the present invention provides a striking tool that includes a handle, a grip molded onto the handle, a generally curved shank connected to the handle, and a head connected to the shank, the head having a striking surface. The head defines a weight center. The head includes an overstrike flange, the overstrike flange providing an

area of contact should the striking surface hit beyond its target. A horizontal plane is defined as the plane on which the striking tool rests when laid flat on its side, such as when laid on a tabletop. A first cutting plane divides the cutting tool along the length of the striking tool. The first cutting plane is perpendicular to the horizontal surface of the striking tool, and a line which is intersected by the first cutting plane is defined by a first point positioned along a center line of the handle and a second point positioned along the center line of the handle, the second point being vertically 2 inches up the handle as measured from the first point, the first point being separated by a vertical distance of 2 inches from a bottommost point, the bottommost point being defined by a bottom edge of the handle, and the bottommost point is intersected by a line that is parallel to the first cutting plane. A second cutting plane which is perpendicular to the first cutting plane and also perpendicular to the horizontal surface is disposed 2 inches down from a second center point, the second center point being defined by a top edge of the head of the striking tool. The second cutting plane defines a head portion, which is further divided by the first cutting plane into a first region and a second region. The first region is proximal to the striking surface and includes the striking surface, and the second region is distal to the striking surface and includes a claw.

In another embodiment, the weight of the first region is at least 70 % of the sum of the weights of the first and second regions. In yet another embodiment, the weight of the first region is at least 78 % of the sum of the weights of the first and second regions. In yet another embodiment, the weight of the first region is between 75 to 90 % of the sum of the weights of the first and second regions.

Description of the Drawings

Figure 1 illustrates a striking tool made according to the principles of the present invention.

Figure 1a illustrates a striking tool of the present invention depicting a weight
5 forward distance D1.

Figure 1b illustrates a striking tool made according to an alternative embodiment of the present invention..

Figure 1c illustrates an alternative embodiment of a striking tool of the present invention depicting a weight forward distance D1.

10 Figure 1d illustrates an alternative embodiment of a striking tool of the present invention depicting a curved centerline and a weight center forward of the centerline.

Figure 2 illustrates a striking tool of the prior art.

Figure 3 is an elevation view of a handle of a striking tool of one embodiment of the present invention.

15 Figure 3a is a sectional view of the handle of Figure 3.

Figure 3b illustrates an alternative embodiment of the handle of Figure 3.

Figure 4 is a side elevation view of the handle of Figure 3.

Figure 4a is a sectional view of the handle of Figure 4.

20 Figure 5 illustrates the head of a striking tool of one embodiment of the present invention.

Figure 6 illustrates a perspective view of a striking tool of one embodiment of the present invention.

Figure 7 illustrates a plan view of a striking tool of one embodiment of the present invention.

Figure 8 illustrates a striking tool of one embodiment of the present invention being held by a human hand superimposed with a striking tool of the prior art.

5 Figure 9 illustrates Shock Factor data for the striking tool of Figure 7.

Figure 10 illustrates Shock Factor data for a striking tool of the prior art.

Figure 11 illustrates a human hand adapted to grip an object, the center of the hand defining a vertical line that is perpendicular to a horizontal plane.

10 Figures 12 illustrates a striking tool of one embodiment of the present invention held in the gripping hand of Figure 11.

Figure 13 illustrates a striking tool of the prior art held in the gripping hand of Figure 11.

15 Figure 14 illustrates an alternative embodiment of the present invention depicting the weight distribution of the striking tool head portion of the striking tool of the present invention.

Figures 15-27 illustrate the weight distribution of the striking tool head portion of striking tools of the prior art.

20 Figure 28 illustrates another alternative embodiment of the present invention depicting the weight distribution of the striking tool head portion of the striking tool of the present invention.

Detailed Description

With reference to Fig. 1, there is provided according to one embodiment of the present invention a striking tool 10. The striking tool 10 includes a head 80 that includes a striking surface 90. The head may be metallic or made of other material useful for a striking tool head. For example, the head may be made of metal such as carbon steel and the like. Alternatively, the head may be made of a composite material. The striking tool 10 includes a curved handle 30 and a curved shank 20. The curved handle 30 and the curved shank 20 are adapted to be connected, one to the other. In an alternative embodiment, the curved handle 30 and the curved shank 20 are integrally formed so as to provide a unitary piece.

The curved shank 20 and the head 80 are adapted to be attached, one to the other. The curved handle 30 and the curved shank 20 are generally curved so that the weight center 210 is positioned between the curved longitudinal centerline projected to bisect the head 80 (not shown) and the striking surface 90, creating an imbalance in the striking tool 10 when it is held by a human hand. Thus, the weight center 210 is forward of the longitudinal centerline (not shown). The imbalance tends to cause the striking tool 10 to pitch forward toward the surface to be struck when held nearly vertically in the hand. Weight center 210 is effectively positioned forward of a human hand (not shown) grasping curved handle 30.

This weight-forward design provides numerous advantages, one being the ability to deliver a more efficient blow. In laboratory tests, nails have been driven into wood with one blow of the striking tool 10 of the present invention. In an alternative embodiment, the handle 30 may be angled or offset. In another alternative embodiment, the shank 20 may be angled or offset.

With reference to Fig. 1a, there is provided according to one embodiment of the present invention a striking tool 10. The striking tool 10 includes a head 80, a curved handle 30 and a curved shank 20. The curved handle 30 and the curved shank 20 are adapted to be connected, one to the other. In an alternative embodiment, the curved handle 30 and the curved shank 20 are integrally formed so as to provide a unitary piece. The curved shank 20 and the head 80 are adapted to be attached, one to the other. The bottom surface of handle 30 defines a bottom edge 230. The bottom edge 230 defines a center point 240. The striking tool 10 defines a weight center 210 and further defines a point 220 that is a projection of the weight center onto the surface of head 80. Center point 240 and weight center projection point 220 define a line 250. A distance D1 is defined as the maximum distance between handle 30 or shank 20 and line 250. Because of the generally curved shape of the striking tool 10, distance D1 defines a gap.

In another embodiment of the present invention, Fig. 1b is an elevation view of a striking tool 10. The striking tool 10 includes a head 50 that includes a striking surface 60. The head 50 defines a weight center 310. The striking tool 10 includes a curved handle 30 and a curved shank 20. The curved handle 30 and the curved shank 20 are adapted to be connected, one to the other. In an alternative embodiment, the curved handle 30 and the curved shank 20 are integrally formed so as to provide a unitary piece. The curved shank 20 and the head 50 are adapted to be attached, one to the other. The curved handle 30 and the curved shank 20 are generally curved so that the weight center 310 is positioned between a curved longitudinal centerline projected to bisect the head 50 (not shown) and the striking surface 60, creating an imbalance in the striking tool 10 when it is held by a human hand. Thus, the weight center 310 is forward of the longitudinal centerline (not shown). The

imbalance tends to cause the striking tool 10 to pitch forward toward the surface to be struck when held nearly vertically in the hand. In other words, the weight center is shifted from approximately the shank or handle centerline, as for a standard prior art striking tool, forward to the new weight center 310 defined by the head 50. When the striking tool 10 is in use, the weight center 310 is effectively positioned forward of a human hand (not shown, see Fig. 8) grasping the curved handle 30. This weight-forward design provides numerous advantages, one being the ability to deliver a more efficient blow. In laboratory tests, nails have been driven into wood with one blow of the striking tool 10 of the present invention. In an alternative embodiment, the handle 30 may be angled or offset. In another alternative embodiment, the shank 20 may be angled or offset.

In another embodiment of the present invention, Fig. 1c depicts a striking tool 10. The striking tool 10 includes a head 50, a curved handle 30 and a curved shank 20. The curved handle 30 and the curved shank 20 are adapted to be connected, one to the other. In an alternative embodiment, the curved handle 30 and the curved shank 20 are integrally formed so as to provide a unitary piece. The curved shank 20 and the head 50 are adapted to be attached, one to the other. The bottom surface of handle 30 defines a bottom edge 330. The bottom edge 330 defines a center point 340. The striking tool 10 defines a weight center 310 and further defines a point 320 that is a projection of the weight center onto the surface of head 50. Center point 340 and weight center projection point 320 define a line 250. A distance D1 is defined as the maximum distance between handle 30 or shank 20 and line 250. Because of the generally curved shape of the striking tool 10, distance D1 defines a gap. Distance D1 illustrates that the position of the weight center 310 is forward of a human gripping hand during use (see also Figs. 8 and 12).

In another embodiment of the present invention, Fig. 1d depicts a striking tool 10. The striking tool 10 includes a head 50 that includes a striking surface 60. The striking tool 10 defines a weight center 310. The striking tool 10 includes a curved handle 30 and a curved shank 20. The curved handle 30 and the curved shank 20 are adapted to be
5 connected, one to the other. In an alternative embodiment, the curved handle 30 and the curved shank 20 are integrally formed so as to provide a unitary piece. The curved shank 20 and the head 50 are adapted to be attached, one to the other. The bottom surface of handle 30 defines a bottom edge 330. The bottom edge 330 defines a center point 340. The curved handle 30 and curved shank 20 together define a curved centerline 350, which intersects
10 center point 340. Alternatively, curved handle 30 can define a centerline, or curved shank 20 can define a centerline. A curved line 360 is parallel to centerline 350 and tangent to the striking surface 60. The weight center 310 is disposed forward of curved centerline 350. In other words, the weight center 310 is disposed between curved centerline 350 and the striking surface 60.

15 Fig. 2 depicts a striking tool 10b of the prior art. The striking tool 10b includes a head 80b and a handle 30b. The head 80b includes a striking surface 90b and a claw 110b. The handle 30b and the head 80b are adapted to be attached, one to the other. The handle 30b also includes an integral shank 20b which is characteristically straight. The projection of the bottom surface of handle 30b defines a bottom edge 230b. The bottom edge 230b
20 defines a center point 240b. The striking tool 10b defines a weight center 210b and further defines a point 220b that is a projection of the weight center onto the surface of head 80b. Center point 240b and weight center projection point 220b define a line 250b which

intersects weight center 210b. Line 250b is superimposed on the longitudinal centerline of the striking tool 10b.

A comparison of the striking tool 10 of the present invention and the striking tool 10b of the prior art, in Figures 1c and 2, respectively, effectively demonstrates the weight forward design of the present invention. Striking tool 10b of the prior art does not define a gap between the handle 30b or the shank 20b and the line 250b. In contrast, striking tool 10 of the present invention defines a distance D1, which is the maximum distance between the handle 30 or the shank 20 and line 250, thus providing a gap between the handle 30 or the shank 20 and line 250. This weight forward design provides numerous advantages, one being the ability to deliver a more efficient blow.

Fig. 3 further illustrates a handle 30 of one embodiment of the present invention. The handle 30 may be curved, angled, or offset. The handle 30 may include a grip 40. The handle 30 is adapted to be connected to a curved shank 20. Curved shank 20 may include fastener openings 130 (a,b), adapted to attach the curved shank 20 to a striking head (not shown). The handle 30 may be manufactured of a single material such that the handle 30 and the grip 40 are one and the same. Alternatively, the handle 30 may be manufactured such that the grip portion 40 is of a different material from that used to manufacture the remainder of the handle 30, where the grip 40 is adapted to encase the handle 30. The grip 40 may be further adapted to attach to the handle 30. As will be recognized by one of ordinary skill in the art, the handle 30 and the curved shank 20 may be manufactured as a unitary piece. However, the handle 30 may be separately manufactured from the curved shank 20 and the handle 30 and the curved shank 20 adapted to be attached, one to the other.

In an alternative embodiment, illustrated in Fig. 3a, a handle 30 may further include a ribbed structure 160. The ribbed structure 160 has a skeletal framework with interstitial spaces adapted to receive a grip 40 so that the grip 40, when attached to the handle 30, is integrally locked into the handle 30. In this embodiment, the handle 30 and a curved shank 20 can be all of one piece, providing an integral shank and handle 170. Alternatively, the handle 30 may be separately manufactured from the curved shank 20 and the handle 30 and the curved shank 20 adapted to be attached, one to the other. Curved shank 20 may include fastener openings 130 (a,b), adapted to attach the curved shank 20 to a striking head (not shown).

10 In an alternative embodiment, illustrated in Fig. 3b, a curved shank 20 may further include a grooved structure 180. The curved shank 20 is adapted to be attached to a handle 30, and may be integral with the handle 30. Alternatively, the handle 30 may be separately manufactured from the curved shank 20 and the handle 30 and the curved shank 20 adapted to be attached, one to the other. Curved shank 20 may include fastener openings 130 (a,b),
15 adapted to attach the curved shank 20 to a striking head (not shown).

Fig. 4 depicts a front elevation view of a handle 30, which is adapted to be attached to an integral curved shank 20. The curved shank 20 includes a groove surface 190 distal to the end of the handle 30. The groove surface 190 can accept a gasket 300 (not shown, see Fig. 7). Groove surface 190 can be fabricated in various structural orientations so that it can
20 seat an appropriate resilient or elastomeric gasket 300 (not shown).

In an alternative embodiment, illustrated in Fig. 4a, a curved shank 20 may be attached to a pultrusion. The pultrusion may be a pultruded rod or shaft 200. The pultruded rod or shaft 200 is encased within an integral curved shank 20 and handle 30. An

alternative embodiment includes a pultruded rod or shaft 200 encased in the integral shank and handle 170 depicted in Fig. 3a. The pultruded rod 200 consists preferably of a fiberglass pultrusion. In an alternative embodiment, the handle 30 may be separately manufactured from the curved shank 20, one or the other attached to the pultruded rod 200, and the handle 30 and the curved shank 20 adapted to be attached, one to the other. The handle 30 may be manufactured of a single material such that the handle 30 and a grip 40 are one and the same. Alternatively, the handle 30 may be manufactured such that the grip 40 is of a different material from that used to manufacture the remainder of the handle 30, where the grip 40 is adapted to encase the handle 30. The grip 40 may be further adapted to attach to the handle 30.

Fig. 5 depicts a plan view of a head 50. The head may be forged, cast, or machined. Head 50 has a generally flat striking surface 60. The striking surface 60 can be fabricated in various face shapes, preferably generally square, rectangular, octagonal, or a combination thereof. The head 50 has an overstrike flange 70, which may be curved and which manages the effect of overstrike. Alternatively, overstrike flange 70 may be of other shapes, such as angulated, offset, or discontinuous. Head 50 is provided with a rocker surface 100 which is substantially curved over a continuous radius, terminating in a claw 110. Claw 100 can have various shapes, including a V-shape. Head 50 may include mounting holes 120 (a,b), adapted to fixedly attach head 50 to a curved shank 20 (not shown).

In another embodiment, as shown in perspective view in Fig. 6, the present invention provides a striking tool 10. Striking tool 10 of the present invention includes a handle 30, a grip 40, an curved shank 20, and a head 50. The head 50 is adapted to be fixedly attached to the curved shank 20. Head 50 includes an overstrike flange 70, such that the effects of

overstrike can be managed. Curved shank 20 is adapted to be attached to the handle 30.

The handle 30 may be manufactured of a single material such that the handle 30 and the grip 40 are one and the same. Alternatively, the handle 30 may be manufactured such that the grip 40 is of a different material from that used to manufacture the remainder of the handle 30, where the grip 40 is adapted to encase the handle 30. The grip 40 may be further adapted to attach to the handle 30. As will be recognized by one of ordinary skill in the art, the handle 30 and the curved shank 20 may be manufactured as a unitary piece. However, the handle 30 may be separately manufactured from the curved shank 20 and the handle 30 and the curved shank 20 adapted to be attached, one to the other.

Another embodiment of a striking tool 10 is shown in Fig. 7. A head 50 is adapted to be fixedly attached to a curved shank 20. Head 50 can be fixedly attached to the curved shank 20 through fasteners 140 (a,b). Fasteners may include bolts, screws, pins, and the like, and may include various fastener head configurations. Each fastener 140 (a,b) may be attached to the curved shank 2 through an elastomer bushing or grommet 150 (a,b). The fasteners 140 (a,b) may be encircled by and can be properly seated in the resilient bushing 150 (a,b). Elastomer bushings 150 (a,b) may allow some forward and backward motion of head 50 during impact. A gasket 300 is molded into a groove surface (not shown) between head 50 and the curved shank 20. The gasket 300 may be manufactured from various elastomeric or other resilient materials. In one embodiment the gasket 300 can be injection molded into the curved shank 20. Head 50 includes an overstrike flange 70, such that the effects of overstrike can be managed. Curved shank portion 20 is adapted to be attached to a handle 30. The handle 30 may be manufactured of a single material such that the handle 30 and a grip 40 are one in the same. Alternatively, the handle 30 may be manufactured

such that the grip 40 is of a different material from that used to manufacture the remainder of the handle 30, where the grip 40 is adapted to encase the handle 30. The grip 40 may be further adapted to attach to the handle 30. As will be recognized by one of ordinary skill in the art, the handle 30 and the curved shank 20 may manufactured as a unitary piece.

- 5 However, the handle 30 may be separately manufactured from the curved shank 20 and the handle 30 and the curved shank 20 adapted to be attached, one to the other.

Fig. 8 depicts the striking tool 10 of the present invention and the striking tool 10b of the prior art superimposed in a human gripping hand 400. The weight forward advantage is clearly shown in the curved structure of striking tool 10. In addition, the weight center 10 310 of the striking tool 10 of the present invention is clearly forward of the weight center 210b of the striking tool 10b of the prior art.

Figures 9 and 10 illustrate Shock Factor data for a hand-held striking tool of one embodiment of the present invention and for a hand-held striking tool of the prior art, respectively. The hammers were subjected to shock and vibration testing. Each hammer 15 tested was clamped into a polyurethane fixture. A sensor was wrapped around the hammer grip. The sensor consists of a length of 24 gage piezo-electric wire, adhered to a piece of vibration dampening material. The vibration dampening material served to isolate the grip from the fixture. The fixture was clamped onto a swing arm. During testing, the swing arm and fixture are raised to a pre-determined stop and then released. The face or head of the 20 hammer being tested then strikes a steel anvil. The piezo-electric wire deforms due to the vibrations caused by the impact and generates an electric current proportional to the deformations and, correspondingly, the vibrations. The resulting current is recorded and provides a comparison of the vibration dampening capability of the various grip materials.

A plot of current output as a function of time produces a vibration curve. From each vibration curve a Shock Factor is determined. The greater the vibration of a hammer during the test the greater the Shock Factor generated for that hammer. The Shock Factor data illustrates shock magnitude, in relative units, on the y-axis and shock duration, in
5 milliseconds (msec), on the x-axis. The longer a striking tool being tested vibrates after being struck, the greater the magnitude of shock magnitude and shock duration. The Shock Factor is calculated from this data and a larger Shock Factor represents a greater magnitude of shock magnitude and shock duration. The data of Fig. 9 was collected from tests performed on a hand-held striking tool configured as depicted in Fig. 7. The data of Fig. 10
10 was collected from tests performed on a prior art hammer. The data of Fig. 9 demonstrates that a hand-held striking tool of one embodiment of the present invention has an average Shock Factor of 753, whereas the data of Fig. 10, for the hammer of the prior art, demonstrates an average Shock Factor of 1191. Surprisingly and unexpectedly a hammer of the present invention has 63 percent of the Shock Factor of a hammer of the prior art, a
15 reduction of 37 percent. A comparison of the data of Figures 9 and 10 illustrates that there is significant dampening of vibrations in the striking tool of the present invention shortly after it is struck as compared to the hammer of the prior art.

Fig. 11 depicts a human hand adapted to grip an object, defines a gripping hand 400. The gripping hand 400 is further defined such that a vertical line 410 disposed in the center
20 405 of the gripping hand 400 is perpendicular to a horizontal plane 420. The position of the gripping hand with respect to the vertical line 410 and the horizontal plane 420 is referred to as the normal gripping position.

Fig. 12 depicts a striking tool 10 which defines a weight center 310. When striking tool 10 is held in the normal gripping position by the gripping hand 400 the vertical line 410 intersects the head 50 of the striking tool 10 at a point 440, which is approximately at the notch of the V of a claw 110. The handle 30 and the head 50 define the vertical line 410 such that the vertical line intersects the head at the point 440, which is approximately at the notch of the V of the claw 110, and which is distal from the striking surface 60 and where the weight center 310 is proximal to the striking surface 60. The relative horizontal separation of point 440 and weight center 310 is clearly demonstrated by a parallel line 430 to vertical line 410 which intersects weight center 310.

Fig. 13 depicts a striking tool 10b of the prior art, which defines a weight center 210b. When striking tool 10b is held in the normal gripping position by the gripping hand 400 the vertical line 410 intersects the head 80b of the striking tool 10b at approximately the weight center 210b, that is approximately through the centerline. In contrast to Fig. 12, no parallel line is shown that is proximal to the striking face 90b in the striking tool 10b of the prior art.

The effect of the weight forward design of the present invention has been measured in comparison to the weight distribution of a striking tool head for several prior art devices. One embodiment of the striking tool 10 of the present invention (hereafter Embodiment A) is shown in Figure 14. A horizontal plane (not shown) is defined as the plane on which the striking tool 10 rests when laid flat on its side, such as when laid on a tabletop. The bottom surface of a handle 30 defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 distal to a striking surface 60. A first point 510 is positioned along the longitudinal center line of the handle 30 proximal to the bottommost point 640 of the

handle 30. A second point 520 is located along the longitudinal center line of the handle 30 and is 2 inches vertically up the handle 30 as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 50. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along a line 615 that is parallel to the line 600, as shown in Figure 14. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10.

The top surface of the metallic head 50 defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20 of the striking tool 10 2 inches below the second center point 740 as shown in Figure 14. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 50. A first region Y is defined proximal to the striking surface 60, the first region Y being that portion of the metallic head 50 that includes the striking surface 60 and is cut from the metallic head 50 along the first and second cutting planes. A second region Z is defined distal to the striking surface 60 and is that portion of the metallic head 50 that includes a claw 110 as depicted in Figure 14 and is cut from the metallic head 50 by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10 extending 2 inches down as measured from the center point 740, whereupon the shank 20 begins.

Figure 15 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as

when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the

5 longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 15. A first cutting plane 605 intersects

10 the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 15. The second cutting plane 610 is also

15 perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to

20 the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 15 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking

tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 16 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 16. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 16. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic

head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 16 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 17 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 17. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 17. The second cutting plane 610 is also

perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 17 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 18 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 18. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 18. The second cutting plane 610 is also
5 perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to
10 the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 18 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

15 Figure 19 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal
20 center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge

point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 19. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

5 The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 19. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605
10 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c
15 as depicted in Figure 19 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 20 depicts a striking tool 10c of the prior art. A horizontal plane (not shown)
20 is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal

center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 20. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 20. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 20 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 21 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 21. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 21. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c

as depicted in Figure 21 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

5 Figure 22 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal
10 center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the
15 bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 22. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first
20 cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 22. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first

region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c
5 as depicted in Figure 22 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 23 depicts a striking tool 10c of the prior art. A horizontal plane (not shown)
10 is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A
15 second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 23. A
20 first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first

cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 23. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first
5 region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 23 and is cut from the metallic head 80c by the first and second cutting
10 planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 24 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as
15 when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2
20 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 24. A

first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 24. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 24 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 25 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2

inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 25. A
5 first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the
10 second center point 740 as shown in Figure 25. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic
15 head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 25 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the
20 shank 20c begins.

Figure 26 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630.

The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 26. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 26. The second cutting plane 610 is also perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 26 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking

tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 27 depicts a striking tool 10c of the prior art. A horizontal plane (not shown) is defined as the plane on which the striking tool 10c rests when laid on its side, such as
5 when laid on a tabletop. The bottom surface of a handle 30c defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 (which is at the center point of the edge) distal to a striking surface 90c. A first point 510 is positioned along the longitudinal center line of the handle 30c proximal to the bottommost point 640 of the handle 30c. A
10 second point 520 is located along the longitudinal center line of the handle 30c and is 2 inches vertically up the handle 30c as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 80c. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along the line 600, as shown in Figure 27. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane
15 (not shown) of the striking tool 10c.

The top surface of the metallic head 80c defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20c of the striking tool 10c 2 inches below the second center point 740 as shown in Figure 27. The second cutting plane 610 is also
20 perpendicular to the horizontal plane of the striking tool 10c. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 80c. A first region Y is defined proximal to the striking surface 90c, the first region Y being that portion of the metallic head 80c that includes the striking surface 90c and is cut from the metallic

head 80c along the first and second cutting planes. A second region Z is defined distal to the striking surface 90c and is that portion of the metallic head 80c that includes a claw 110c as depicted in Figure 27 and is cut from the metallic head 80c by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10c extending 2 inches down as measured from the center point 740, whereupon the shank 20c begins.

Figure 28 depicts an alternative embodiment of the striking tool 10 of the present invention (hereafter Embodiment B). A horizontal plane (not shown) is defined as the plane on which the striking tool 10 rests when laid on its side, such as when laid on a tabletop.

The bottom surface of a handle 30 defines a bottom edge 630. The bottom edge 630 defines a bottommost point 640 distal to a striking surface 60. A first point 510 is positioned along the longitudinal center line of the handle 30 proximal to the bottommost point 640 of the handle 30. A second point 520 is located along the longitudinal center line of the handle 30 and is 2 inches vertically up the handle 30 as measured from the first point 510. A straight line 600 connects the first point 510 and the second point 520 and is extended to intersect a top edge point 530 of a metallic head 50. The vertical distance between the first point 510 and the bottommost point 640 is 2 inches as measured along a line 615 that is parallel to the line 600, as shown in Figure 28. A first cutting plane 605 intersects the line 600 and is perpendicular to the horizontal plane (not shown) of the striking tool 10.

The top surface of the metallic head 50 defines a top edge 730. The top edge 730 defines a center point 740. A second cutting plane 610 is defined perpendicular to the first cutting plane 605 and intersects a shank 20 of the striking tool 10 2 inches below the second center point 740 as shown in Figure 28. The second cutting plane 610 is also perpendicular

to the horizontal plane of the striking tool 10. The first cutting plane 605 and the second cutting plane 610, thus, define 2 regions of the metallic head 50. A first region Y is defined proximal to the striking surface 60, the first region Y being that portion of the metallic head 50 that includes the striking surface 60 and is cut from the metallic head 50 along the first and second cutting planes. A second region Z is defined distal to the striking surface 60 and is that portion of the metallic head 50 that includes a claw 110 as depicted in Figure 28 and is cut from the metallic head 50 by the first and second cutting planes. The first region Y and the second region Z define a head portion Y+Z of the striking tool 10 extending 2 inches down as measured from the center point 740, whereupon the shank 20 begins.

10 Tests were conducted to determine the weights of the first and second regions for embodiments of the present invention as compared to striking tools 10 of the prior art. The striking tools 10c of the prior art tested are depicted in Figures 15 through 27. Also depicted in Figures 15 through 27, are the first and second regions (Y and Z) for the respective prior art striking tools 10c. In Table 1 below, the weights of the respective first and second regions (Y and Z) are listed associated with the striking tool from which the respective cuts were made. Also shown in Table 1 below, is the percent by weight of the first region Y pared to the sum of the weights for the first and second regions Y+Z as shown in Table 1. The weight of the first region Y for Embodiment A of the present invention is 85% of the sum of the weights for the first and second regions. Whereas, the prior art striking tools exhibit no first region Y weights that are greater than 70% of the sum of the first and second region weights for any one striking tool. This data illustrates that substantially the weight of the metallic head of a striking tool 10 of the present invention is forward of the first cutting plane 605. The line 600, which is intersected by the first cutting

plane 605, also defines an approximately vertical line when the striking tool 10 is held in a human hand in a normal use position. Thus, these data illustrate a substantial weight forward nature of the striking tools 10 of the present invention.

5

TABLE 1

<u>Hammer Figure No.</u>	<u>Type</u>	<u>Head Portion Weight (Y+Z), lb.</u>	<u>Front Region Weight (Y), lb.</u>	<u>Y/Y+Z (%)</u>
15	Prior art	1.220	.840	68.8
16	Prior art	1.250	.790	63.2
17	Prior art	1.455	.840	57.7
18	Prior art	.745	.505	67.8
19	Prior art	1.035	.620	59.9
20	Prior art	1.090	.710	65.1
21	Prior art	.910	.540	59.3
22	Prior art	.980	.550	56.1
23	Prior art	1.215	.720	59.3
24	Prior art	1.170	.695	59.4
25	Prior art	1.505	.825	54.8
26	Prior art	1.465	.795	54.3
27	Prior art	1.120	.580	51.8
28	Striking tool 10 Embodiment B	1.160	.915	78.9
14	Striking tool 10 Embodiment A	1.115	.950	85.2

There has been provided in accordance with the principles of the present invention, a hand-held striking tool that reduces the effect of vibration during use when compared to striking tools of the prior art. There has also been provided in accordance with the principles of the present invention, a hand-held striking that has a weight center disposed forward of the

5 gripping hand through the use of a curved shank, thus improving the efficiency of striking blow. There has further been provided in accordance with the principles of the present invention, a hand-held striking tool having a flange positioned beneath the head of the tool so that the effect of overstrike is better controlled when compared to devices of the prior art.

While the invention has been described with specific embodiments and many alternatives,

10 modifications and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, it is intended to include all such alternatives, modifications and variations set forth within the spirit and scope of the appended claims.

What Is Claimed Is:

1. A striking tool comprising:
5 a handle;
a head, the head defining a striking surface, the head further defining a weight center; and
10 a generally curved shank connecting the handle to the head.
2. The striking tool of Claim 1 wherein a grip is disposed on the handle.
3. The striking tool of Claim 1 wherein the handle is an elongate curved handle.
15
4. The striking tool of Claim 1 wherein the handle defines a skeletal ribbed structure, the skeletal ribbed structure having interstitial spaces.
5. The striking tool of Claim 4 wherein a grip is disposed on the handle so that
20 the grip is partially within the interstitial spaces.
6. The striking tool of Claim 1, wherein the curved shank is integral with the handle so as to provide a unitary piece.
- 25 7. The striking tool of Claim 1, wherein the curved shank has a groove at the end opposite the end of the handle.
8. The striking tool of Claim 7, wherein the groove accepts a gasket which is injection molded into the groove.
30
9. The striking tool of Claim 8, wherein the head is fixed within the groove of the shank.
- 35 10. The striking tool of Claim 1, wherein the head is forged.
11. The striking tool of Claim 1, wherein the head is substantially curved over a continuous radius.
- 40 12. The striking tool of Claim 10, wherein the forged head is substantially curved over a continuous radius.
13. The striking tool of Claim 6, wherein the unitary piece encases a pultrusion.
- 45 14. The striking tool of Claim 13, wherein the pultrusion is a pultruded rod.

15. A striking tool comprising:
- a handle;
- 5 a head, the head defining a striking surface, the head further defining a weight center; wherein the head includes an overstrike flange, and
- a generally curved shank connecting the handle to the head.
- 10 16. The striking tool of Claim 15, wherein a grip is disposed on the handle.
17. The striking tool of Claim 15 wherein the handle is an elongate curved handle.
- 15 18. The striking tool of Claim 15 wherein the handle defines a skeletal ribbed structure, the skeletal ribbed structure having interstitial spaces.
19. The striking tool of Claim 18 wherein a grip is disposed on the handle so that the grip is partially within the interstitial spaces.
- 20 20. The striking tool of Claim 15, wherein the curved shank is integral with the handle so as to provide a unitary piece.
21. The striking tool of Claim 15, wherein the curved shank has a groove at the end opposite the end of the handle.
- 25 22. The striking tool of Claim 21, wherein the groove accepts a gasket which is injection molded into the groove.
- 30 23. The striking tool of Claim 22, wherein the head is fixed within the groove of the shank.
24. The striking tool of Claim 15, wherein the head is forged.
- 35 25. The striking tool of Claim 15, wherein the head is substantially curved over a continuous radius.
26. The striking tool of Claim 24, wherein the forged head is substantially curved over a continuous radius.
- 40 27. The striking tool of Claim 20, wherein the unitary piece encases a pultrusion.
28. The striking tool of Claim 27, wherein the pultrusion is a pultruded rod.

29. A method for making a striking tool having a reduced vibrational Shock Factor, comprising the steps of:

providing a generally curved handle;

molding a grip onto the handle;

5 providing a generally curved shank;

connecting the shank to the handle;

providing a head, the head defining a striking surface, the head further defining a weight center; and

connecting the head to the shank.

10

30. The method of Claim 29, wherein the weight center is disposed between a longitudinal centerline and the striking surface.

31. The method of Claim 29, wherein the curved shank includes a groove at the end opposite the end of the handle.

15

32. The method of Claim 31, wherein the groove accepts a gasket which is injection molded into the groove.

33. A striking tool comprising:

20

a handle;

a head, the head defining a striking surface, the head further defining a weight center; wherein the head includes an overstrike flange, and

25

a generally curved shank connecting the handle to the head;

wherein a horizontal plane is defined as the plane on which the striking tool rests when laid flat on its side; and

30

wherein a first cutting plane divides the striking tool along the length of the striking tool, wherein the first cutting plane is perpendicular to the horizontal surface of the striking tool; and wherein a line which is intersected by the first cutting plane is defined by a first point positioned along a center line of the handle and a second point positioned along the center line of the handle, wherein the second point is vertically 2 inches up the handle as measured from the first point, and wherein the

35

first point is separated by a vertical distance of 2 inches from a bottommost point, wherein the bottommost point is defined by a bottom edge of the handle, and wherein the bottommost point is intersected by a line that is parallel to the first cutting plane.

5

34. The striking tool of Claim 33, wherein a top edge of the head defines a center point, wherein a second cutting plane which is perpendicular to the first cutting plane is disposed 2 inches down from the second center point.

10

35. The striking tool of Claim 34, wherein a head portion is defined by the second cutting plane, and wherein the head portion is further divided by the first cutting plane into a first region and a second region, wherein the first region is proximal to the striking surface, and wherein the second region is distal to the striking surface.

15

36. The striking tool of Claim 35, wherein the weight of the first region is at least 70 % of the sum of the weights of the first and second regions.

20

37. The striking tool of Claim 35, wherein the weight of the first region is at least 78 % of the sum of the weights of the first and second regions.

25

38. The striking tool of Claim 35, wherein the weight of the first region is between 75 to 90 % of the sum of the weights of the first and second regions.

FIG. 1

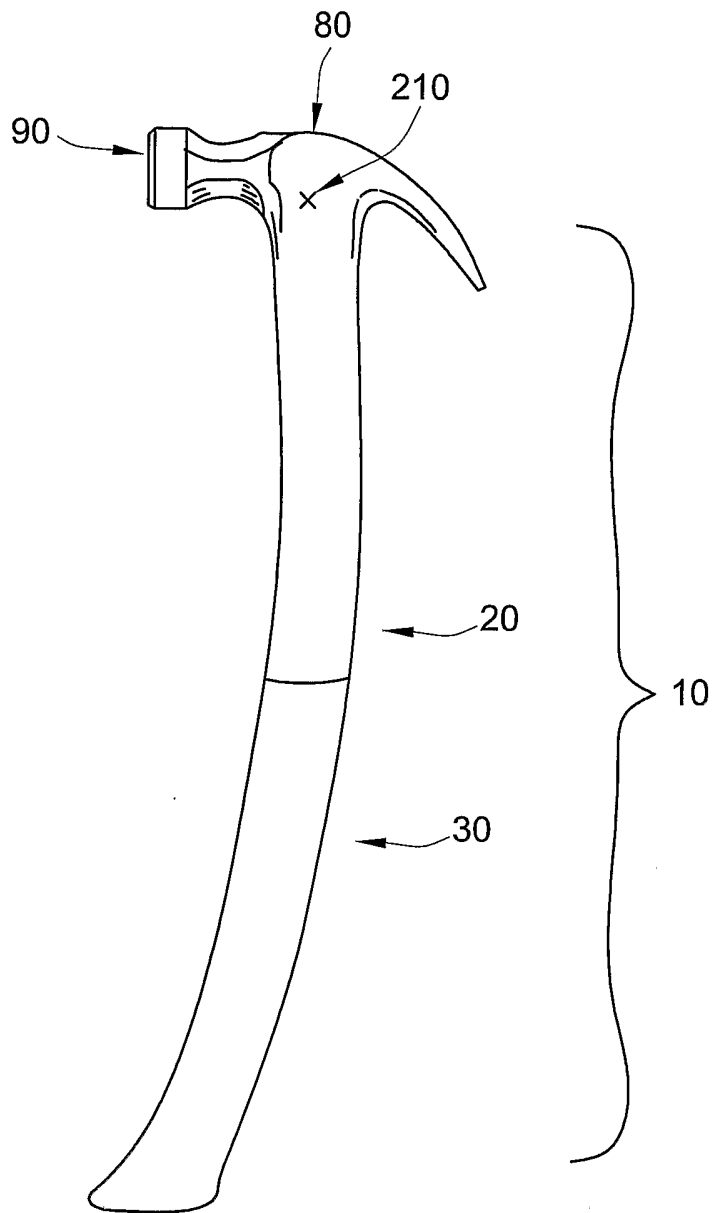


FIG. 1a

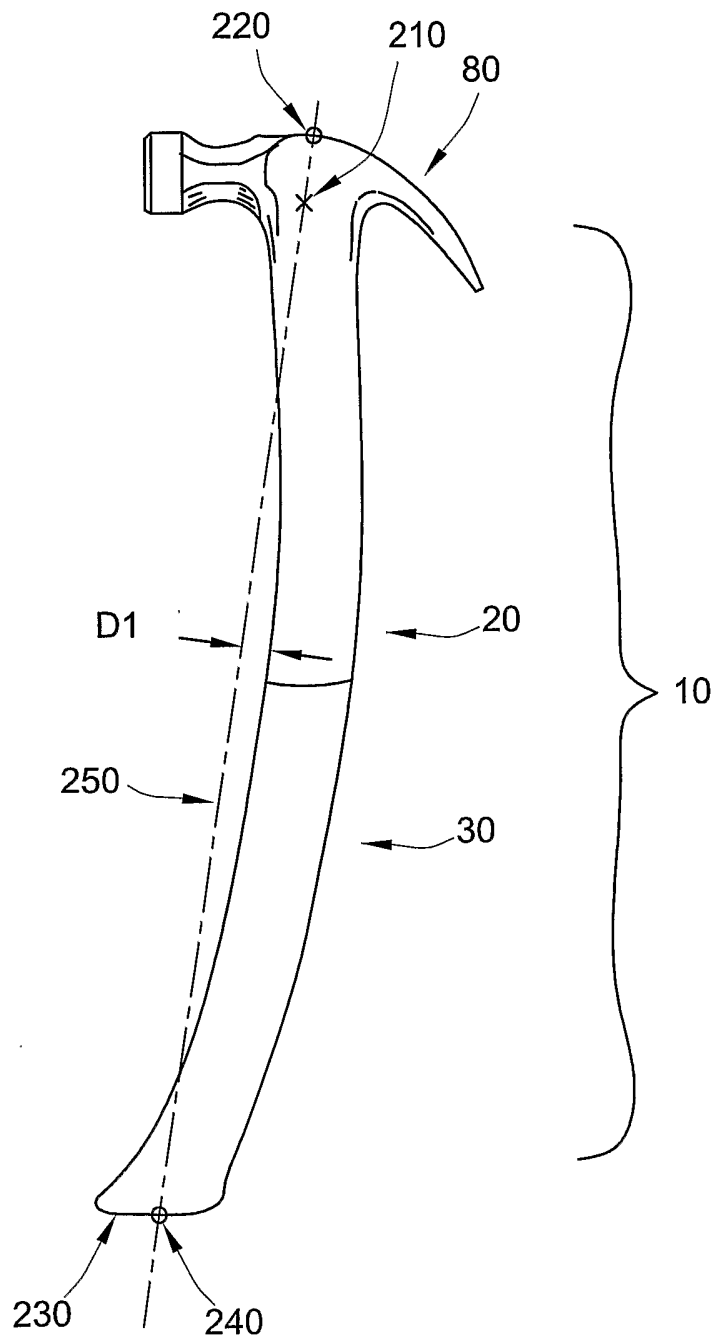


FIG. 1b

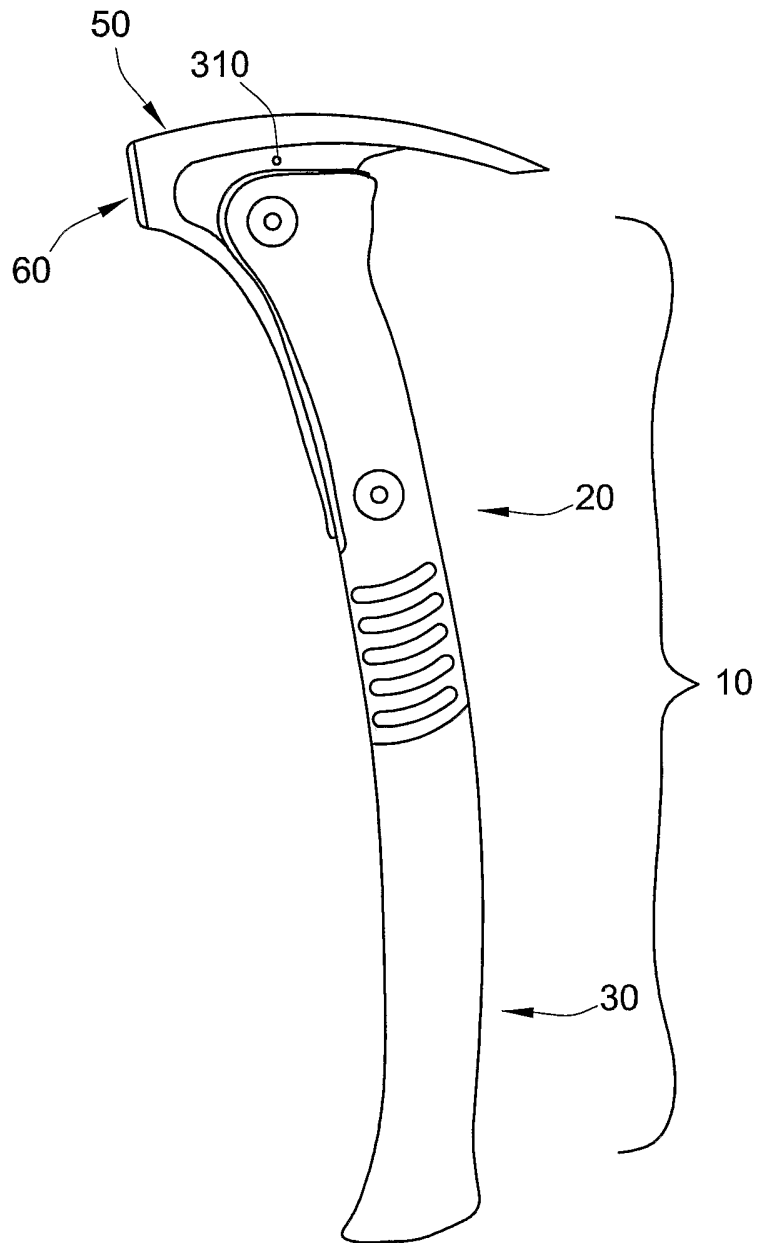


FIG. 1c

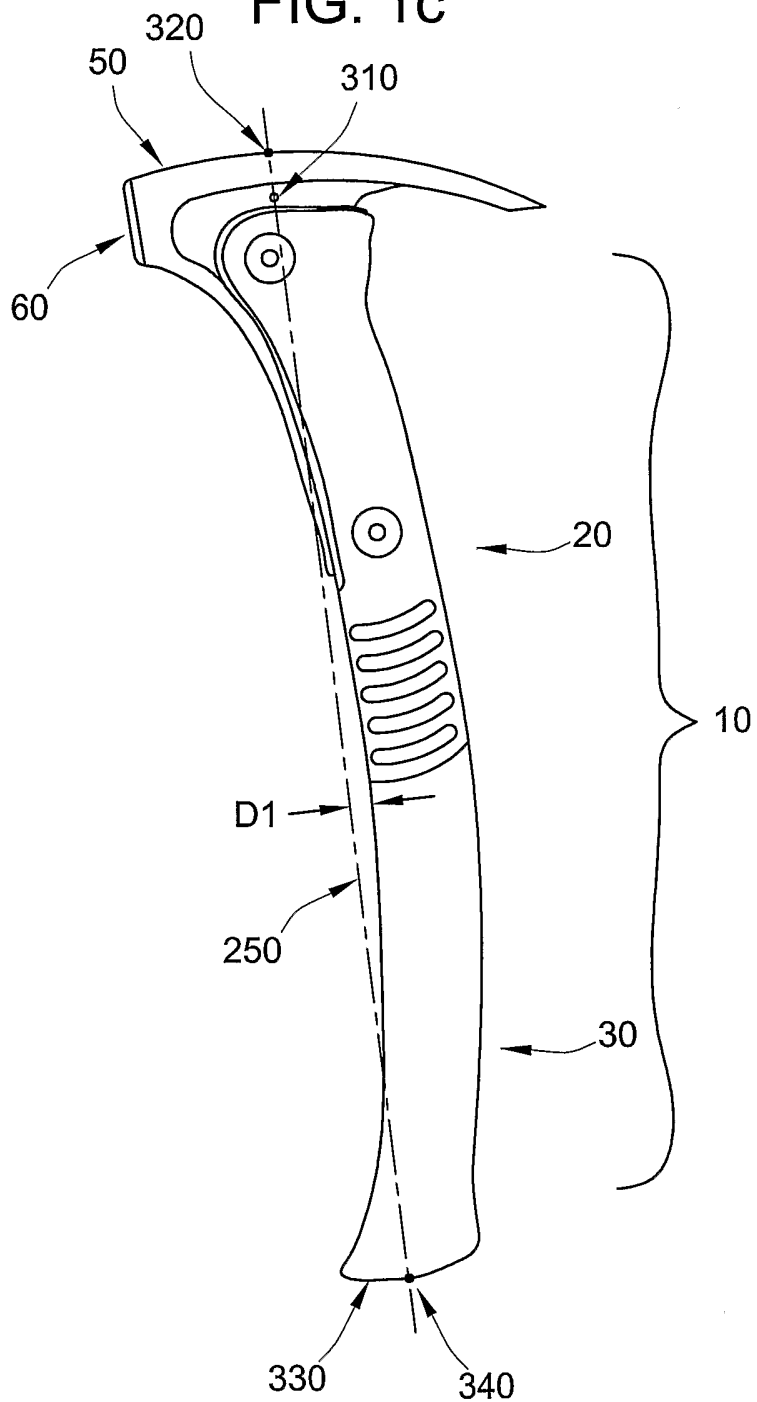


FIG. 1d

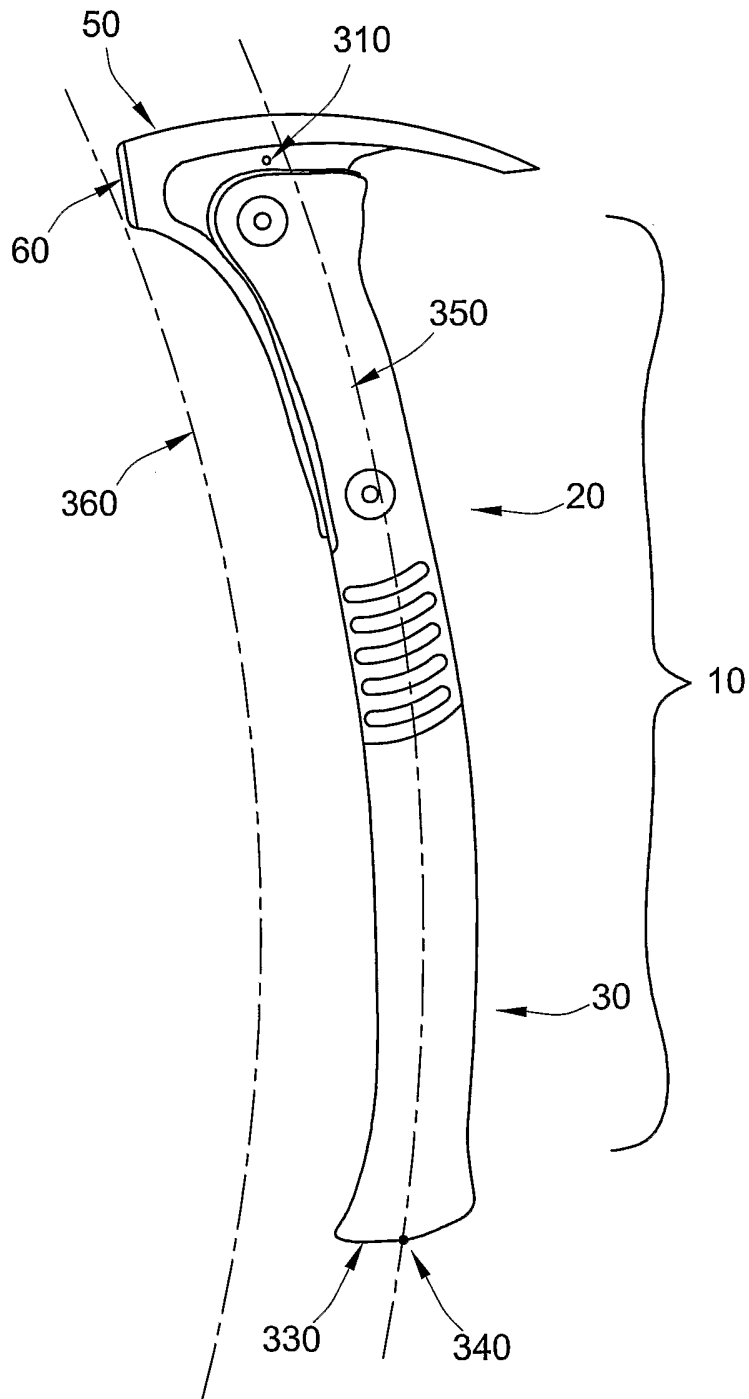


FIG. 2
(PRIOR ART)

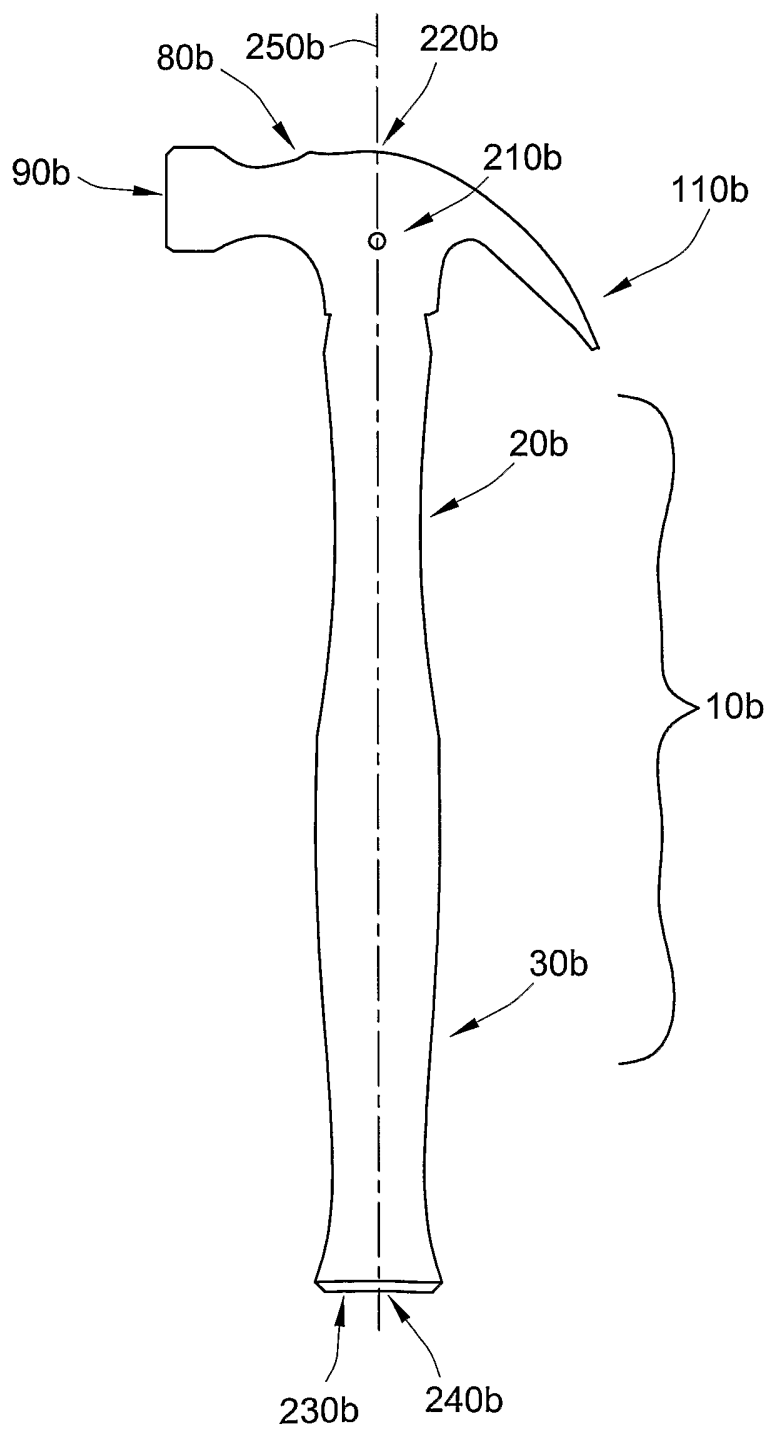


FIG. 3

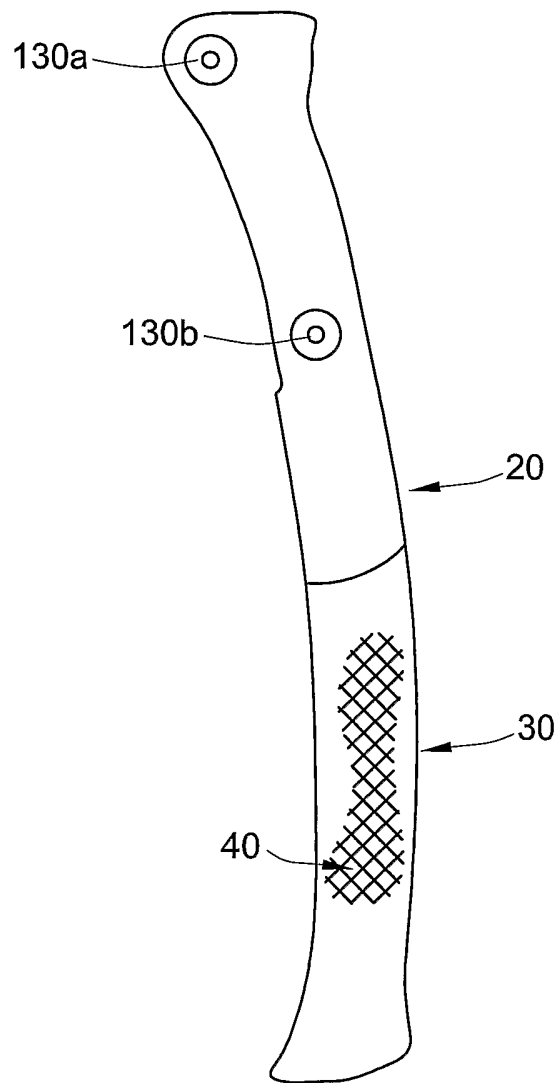


FIG. 3a

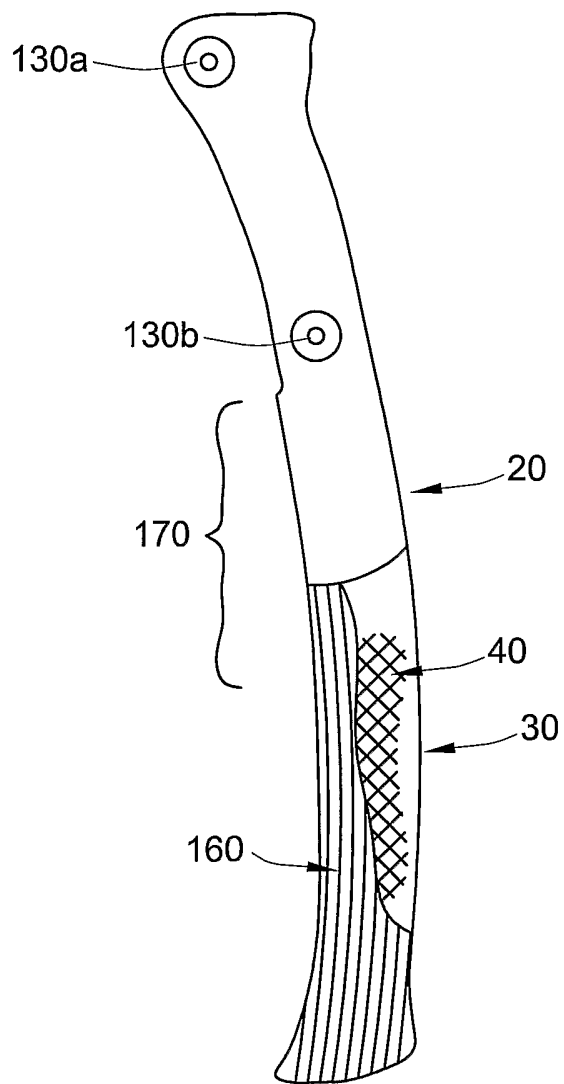


FIG. 3b

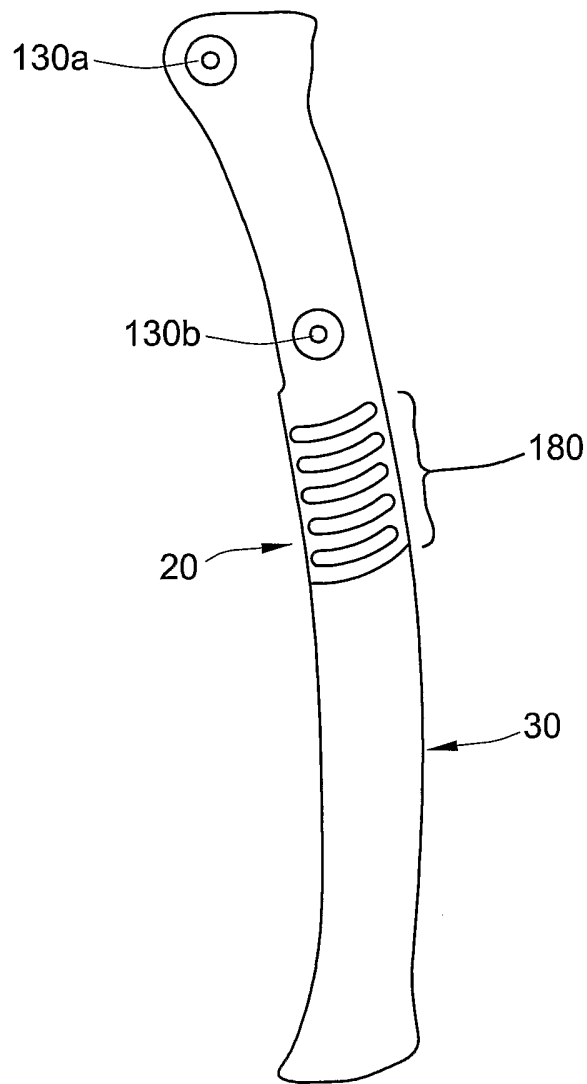


FIG. 4

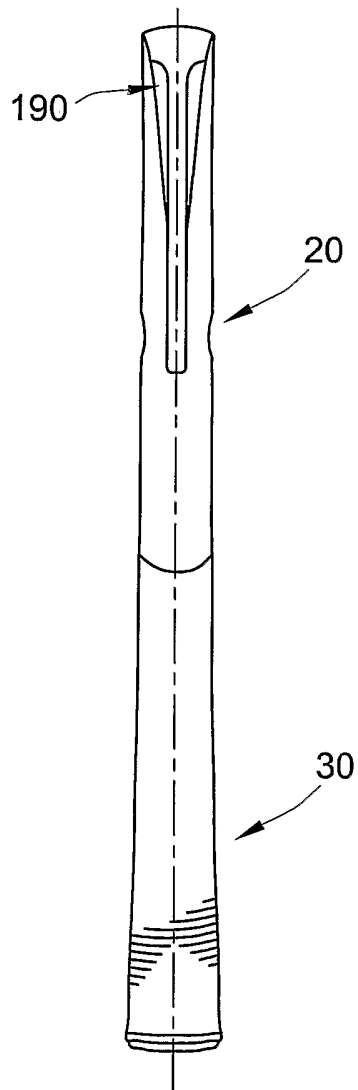


FIG. 4a

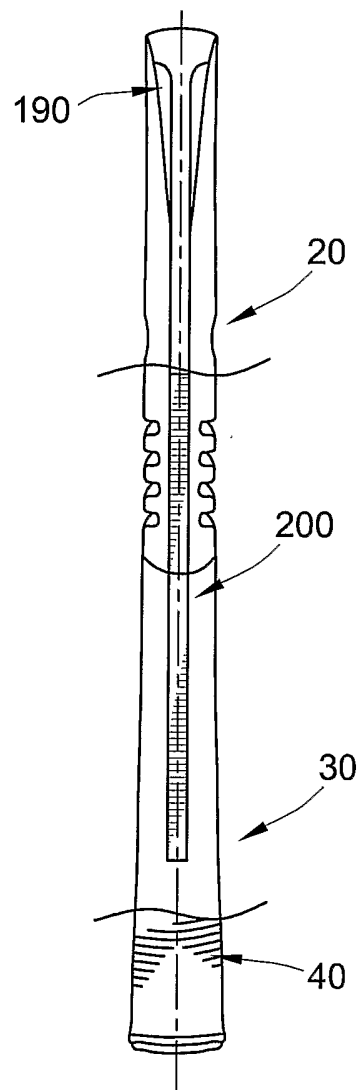


FIG. 5

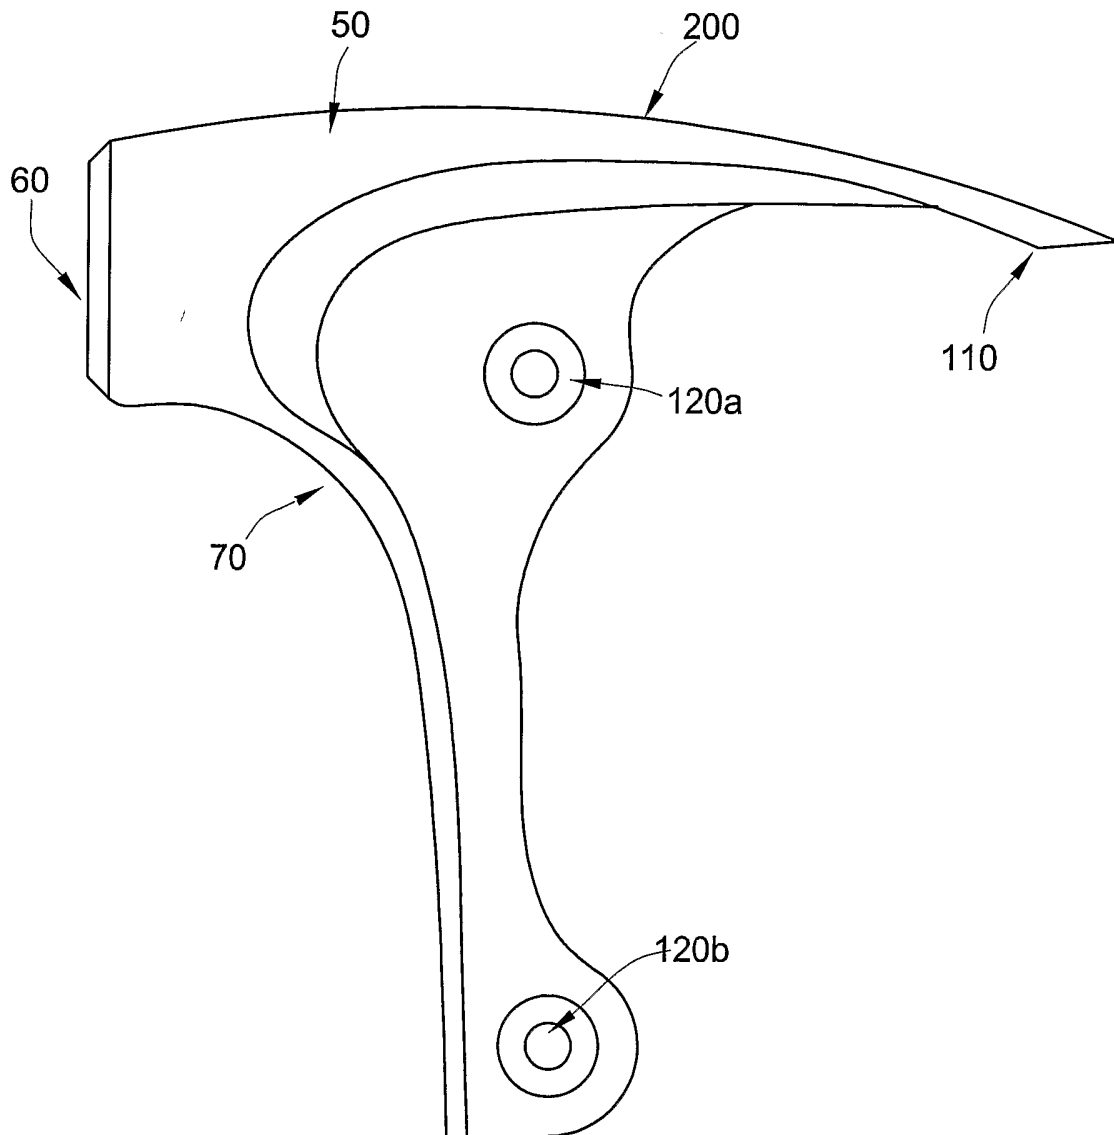
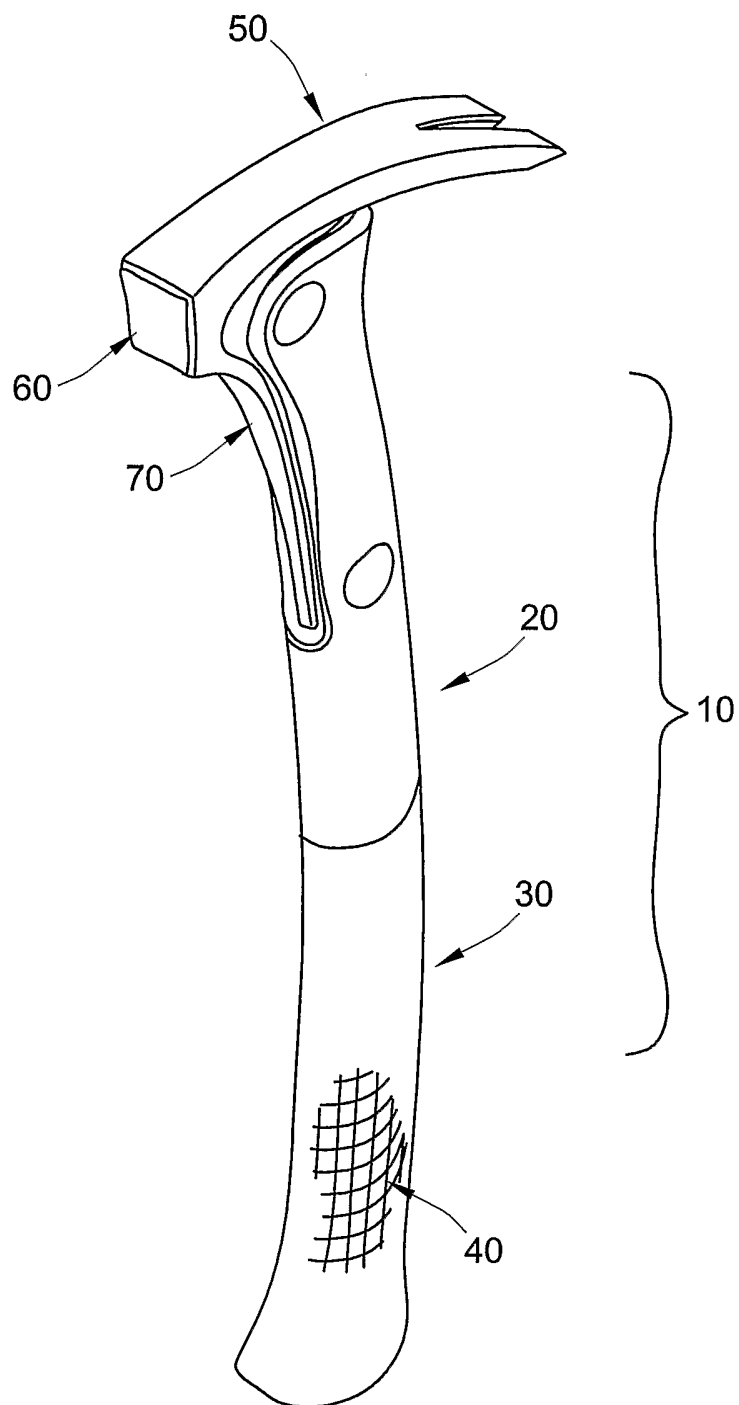
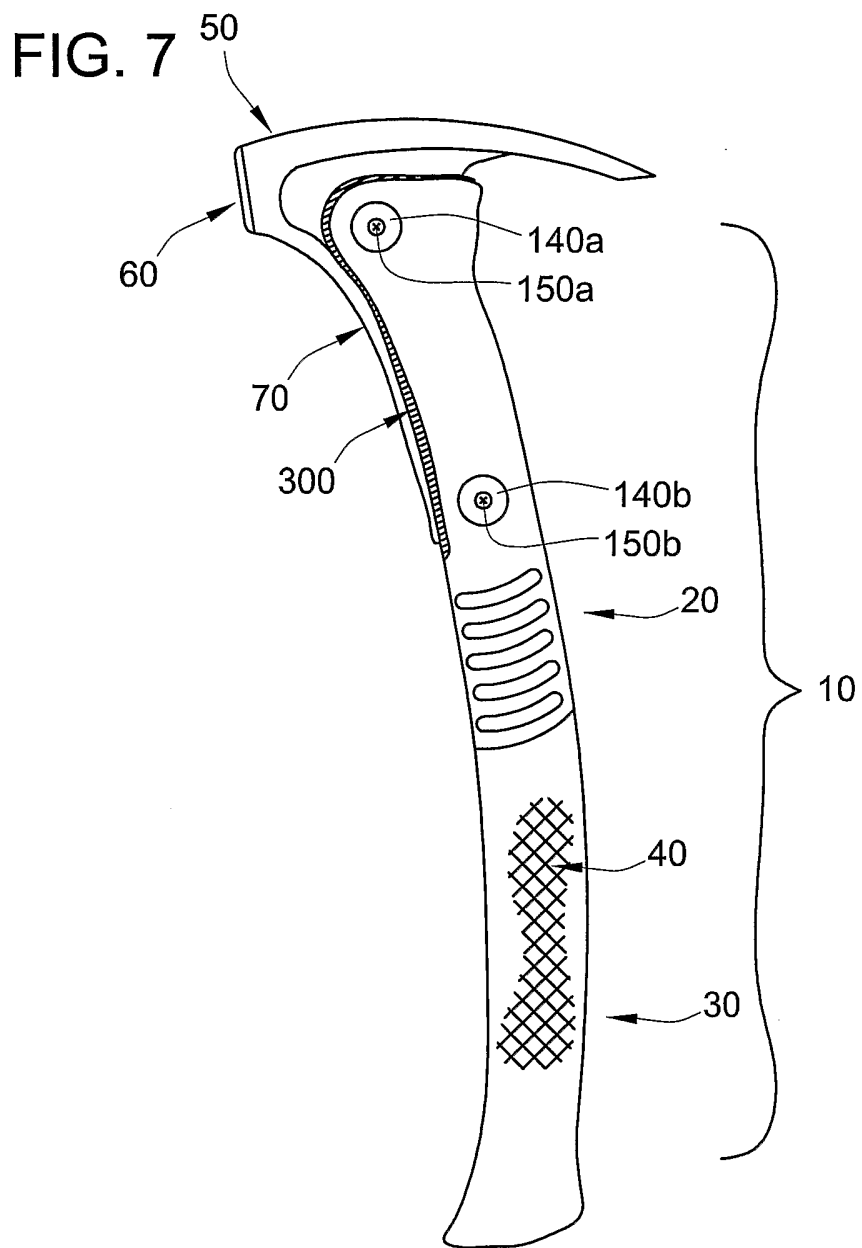


FIG. 6





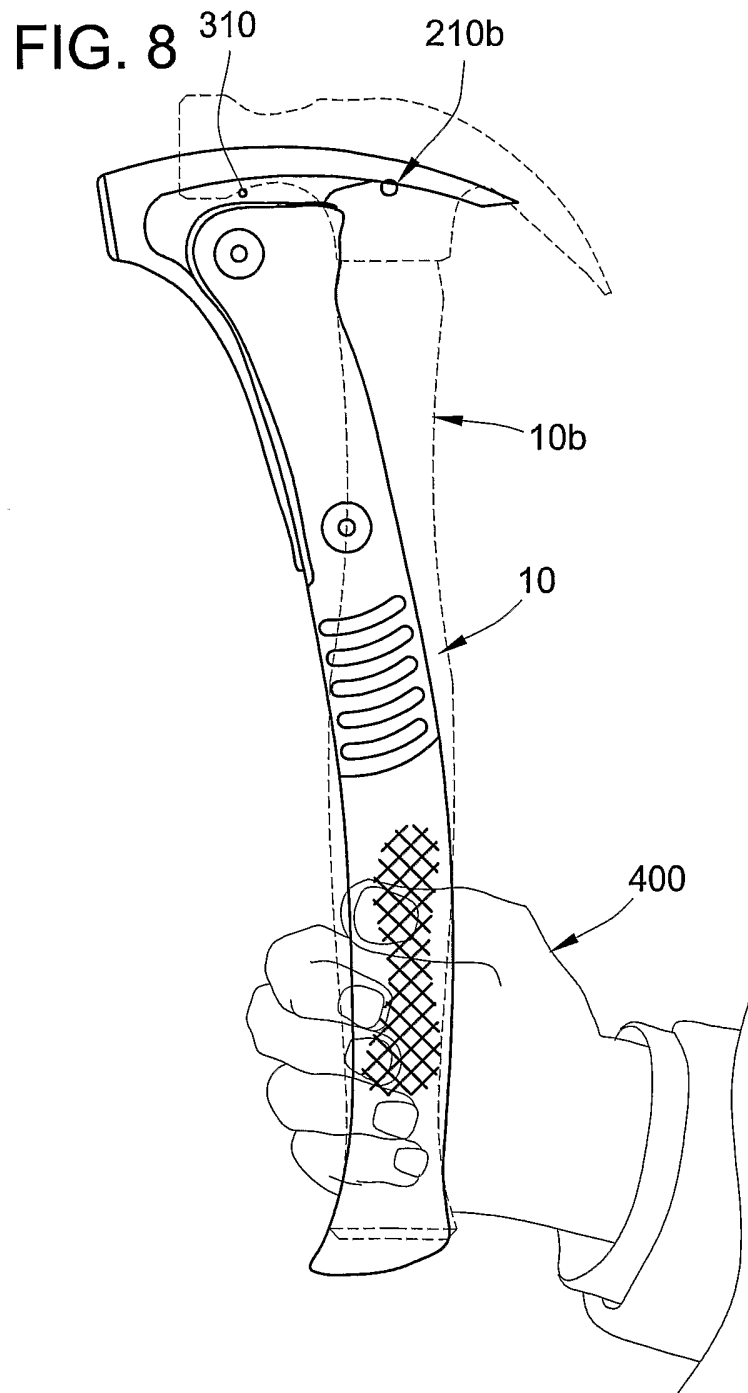


FIG. 9




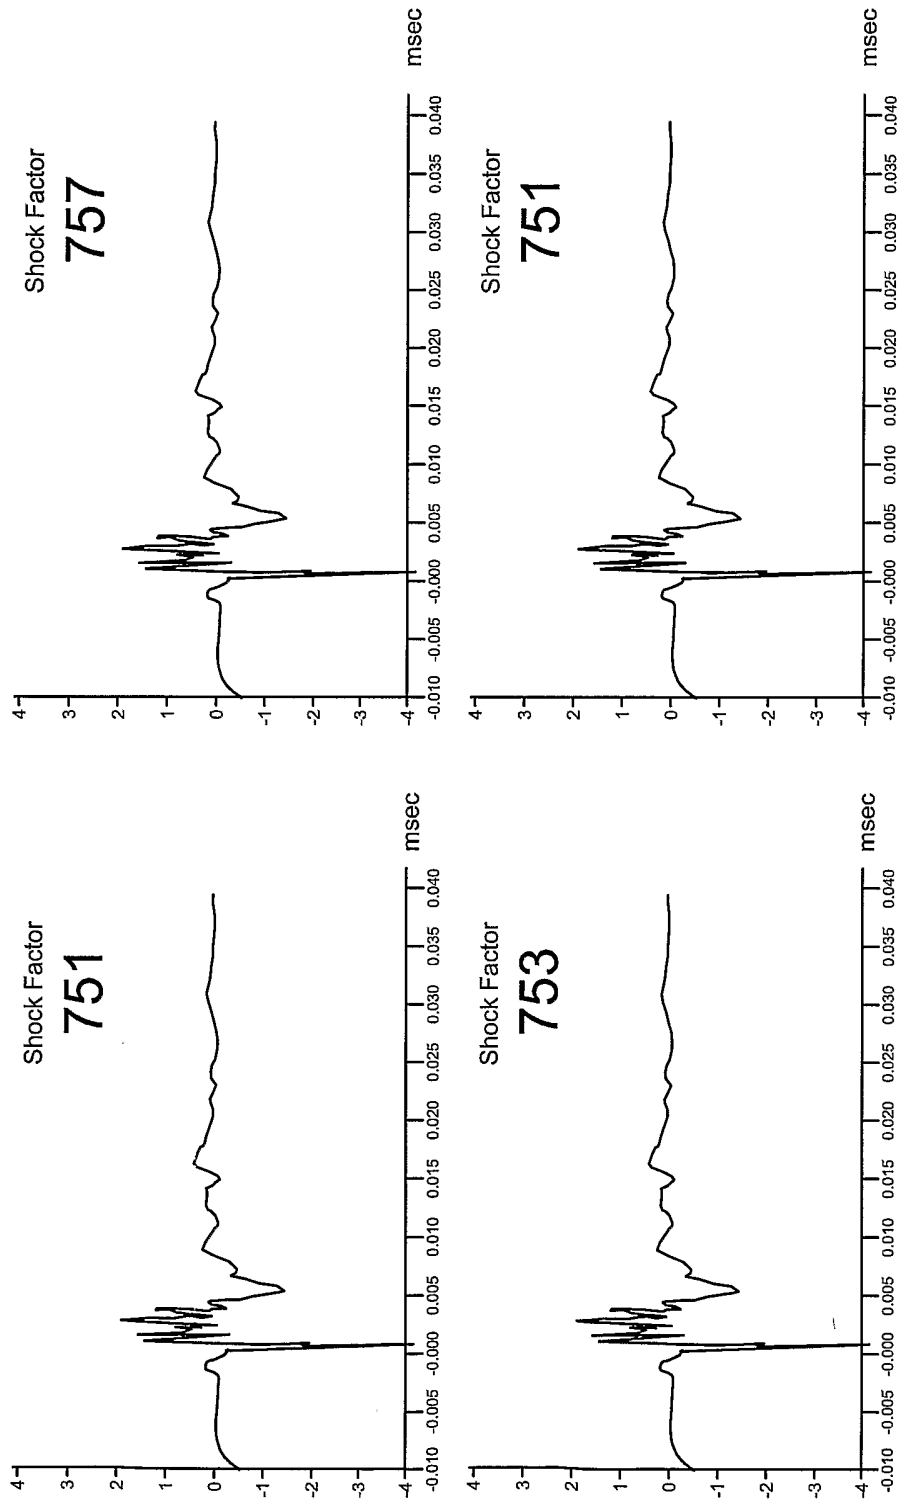


FIG. 10

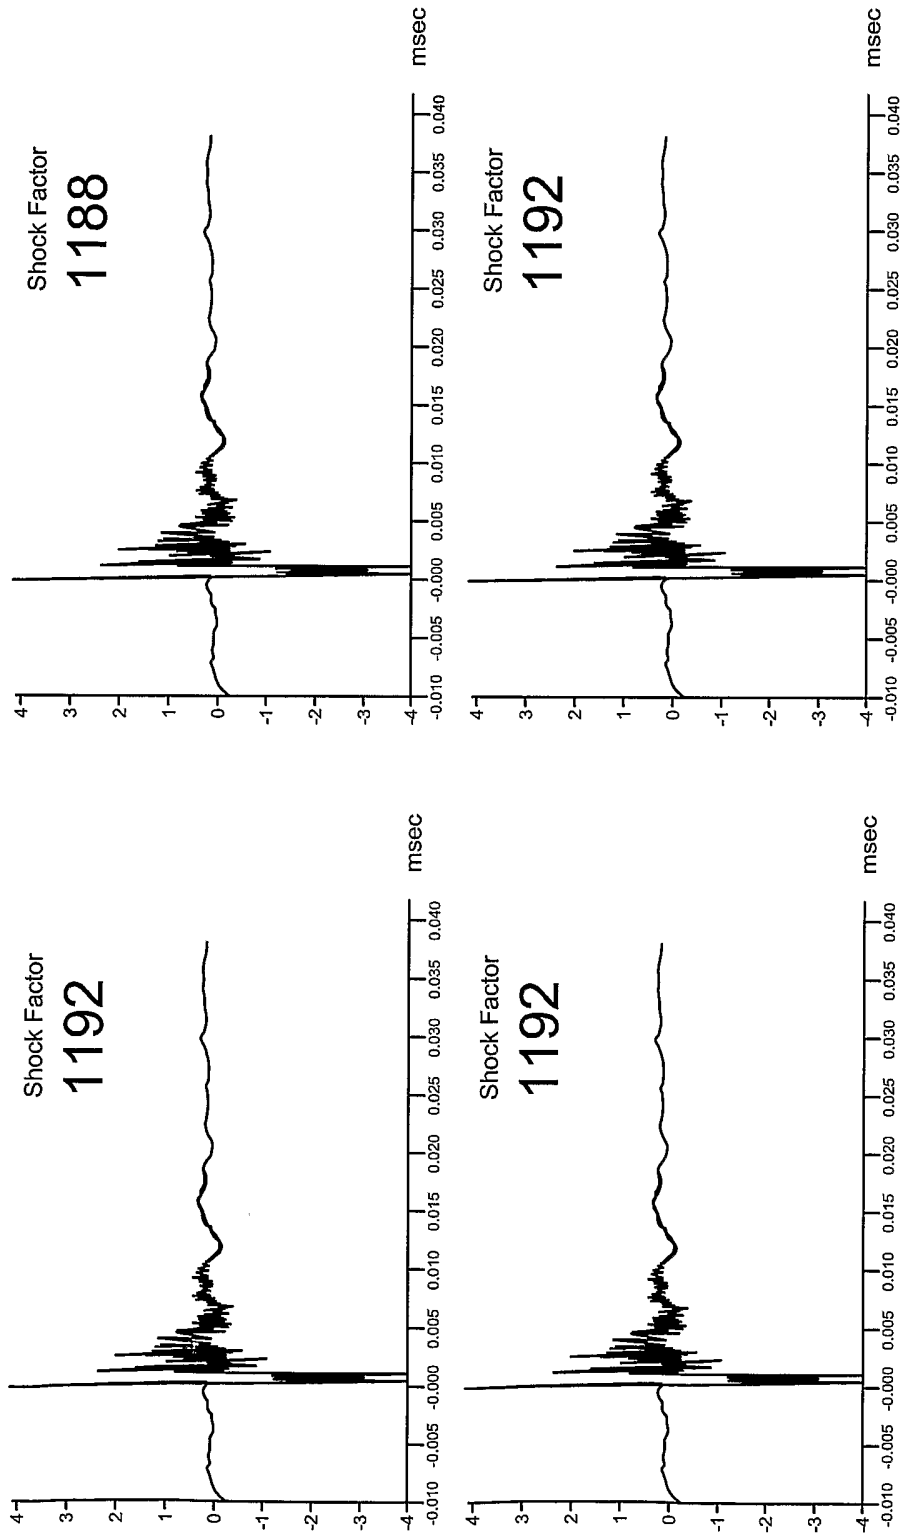

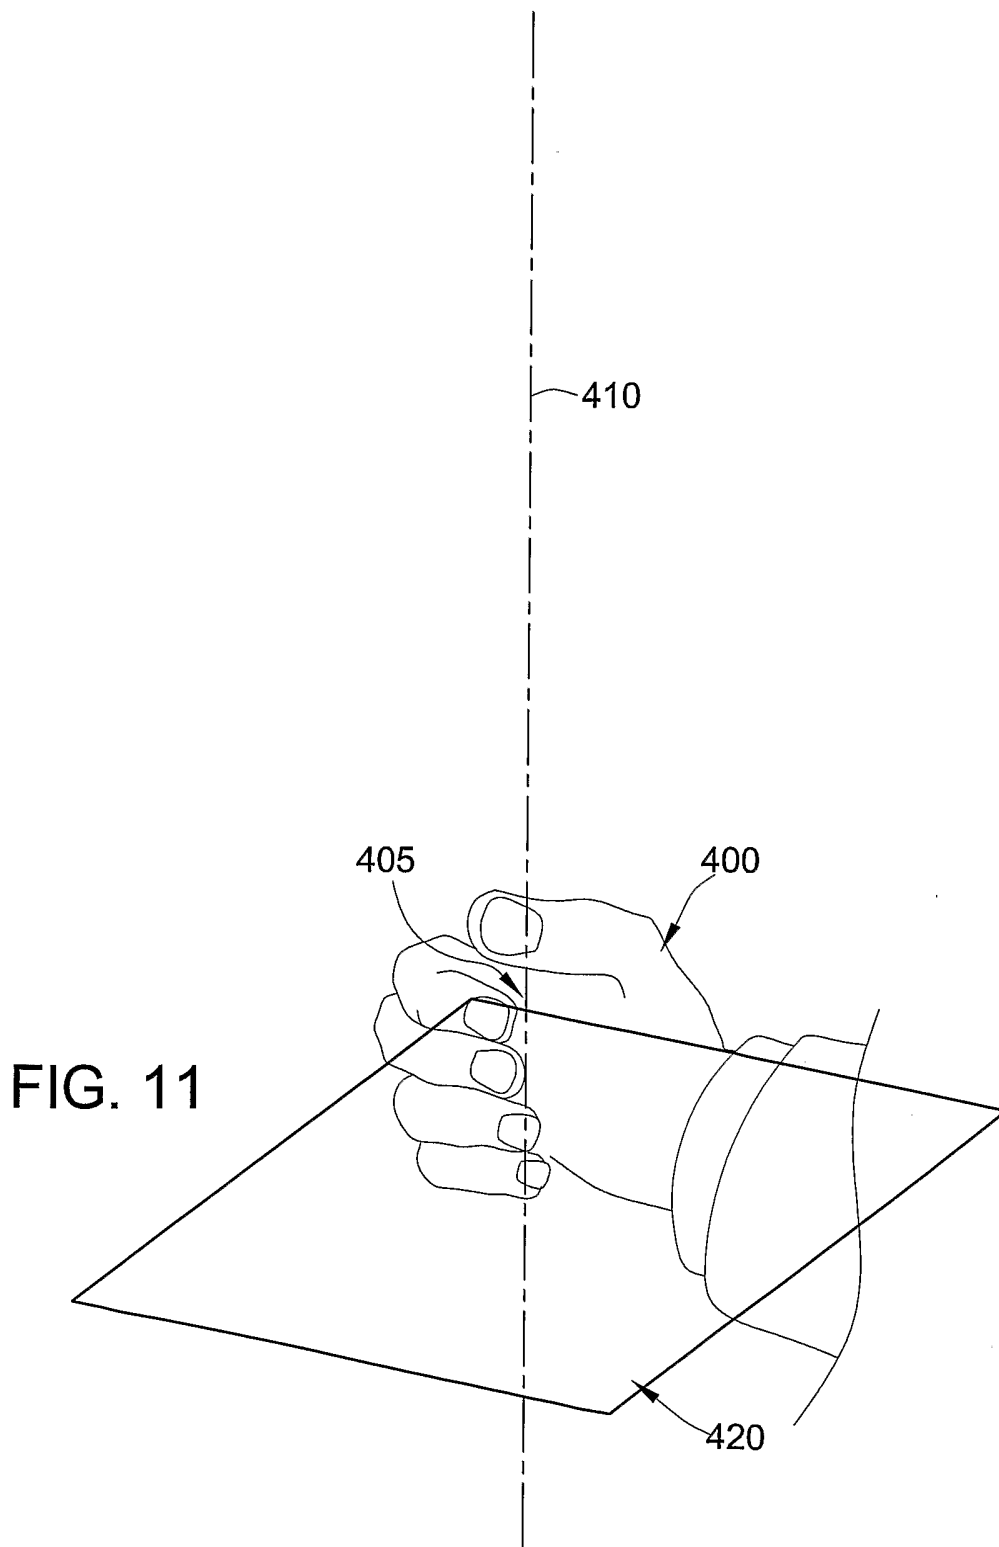

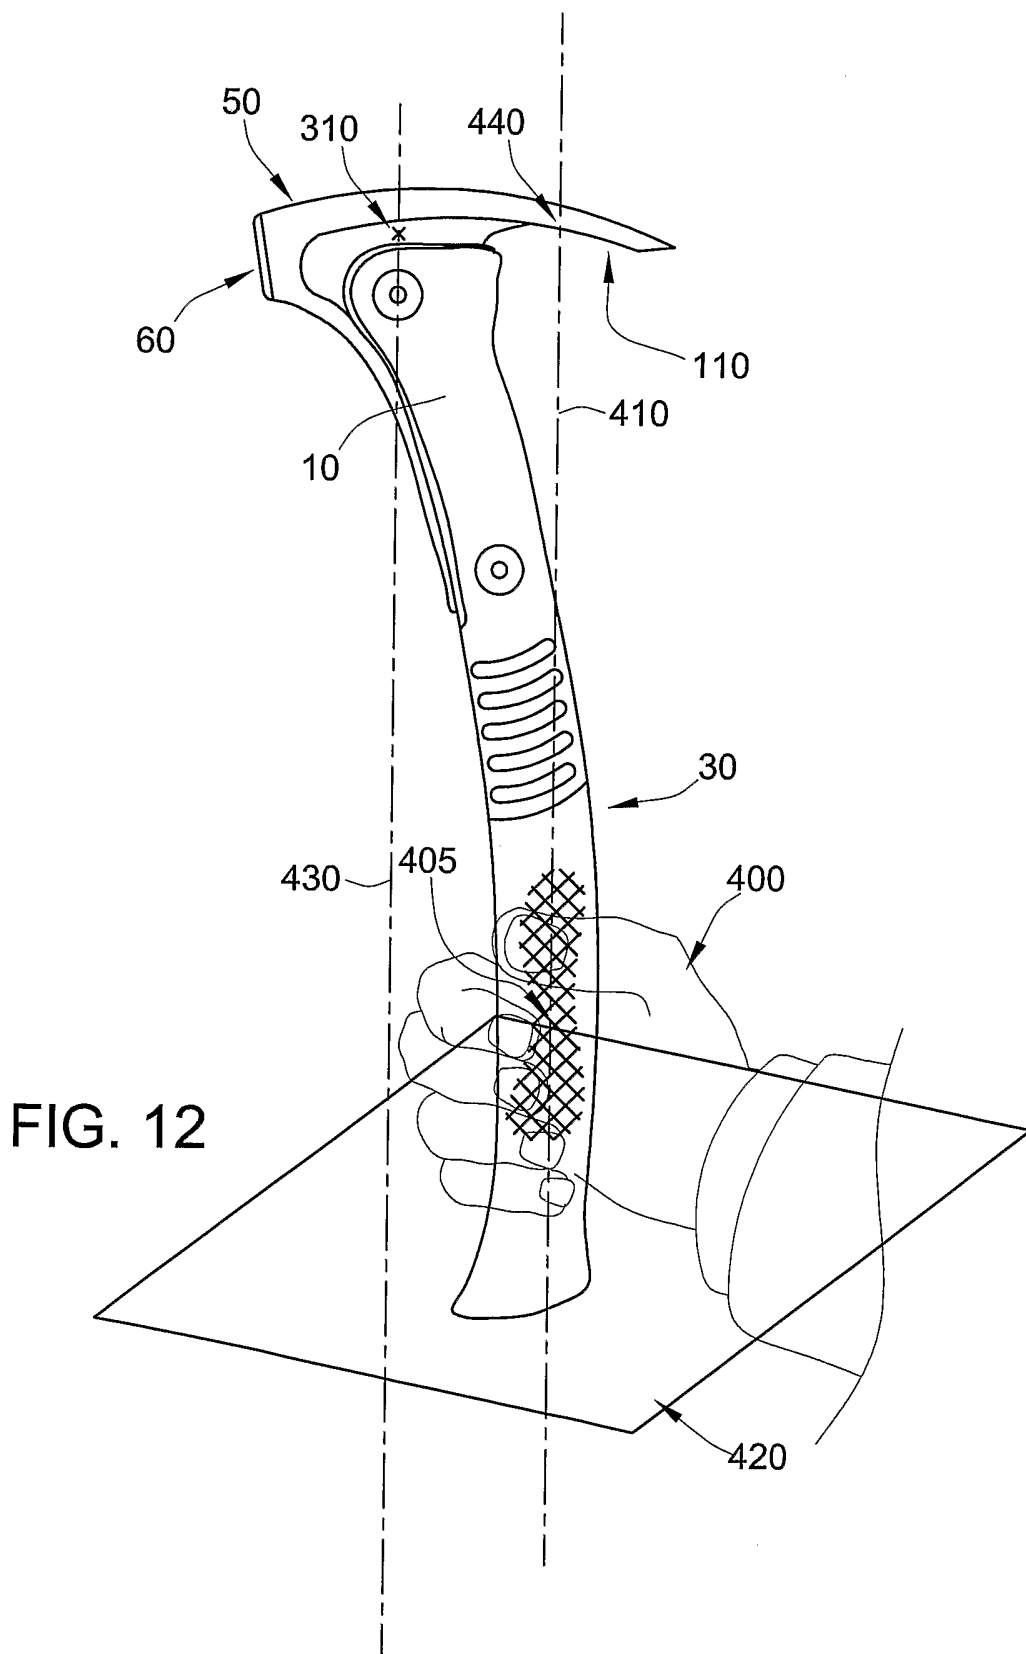

19/34

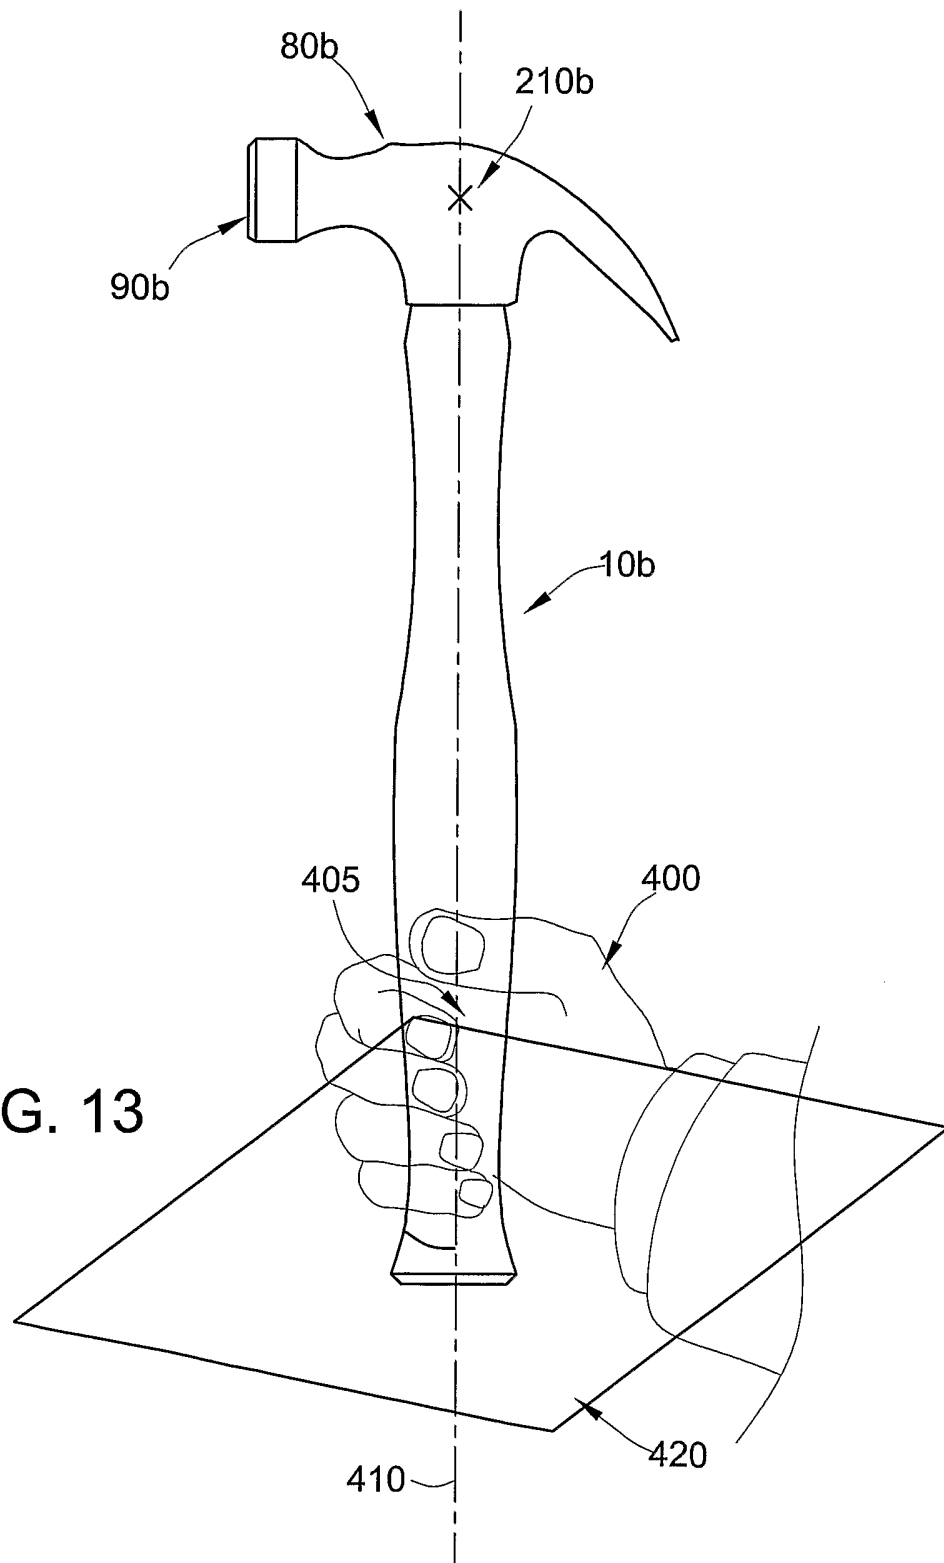
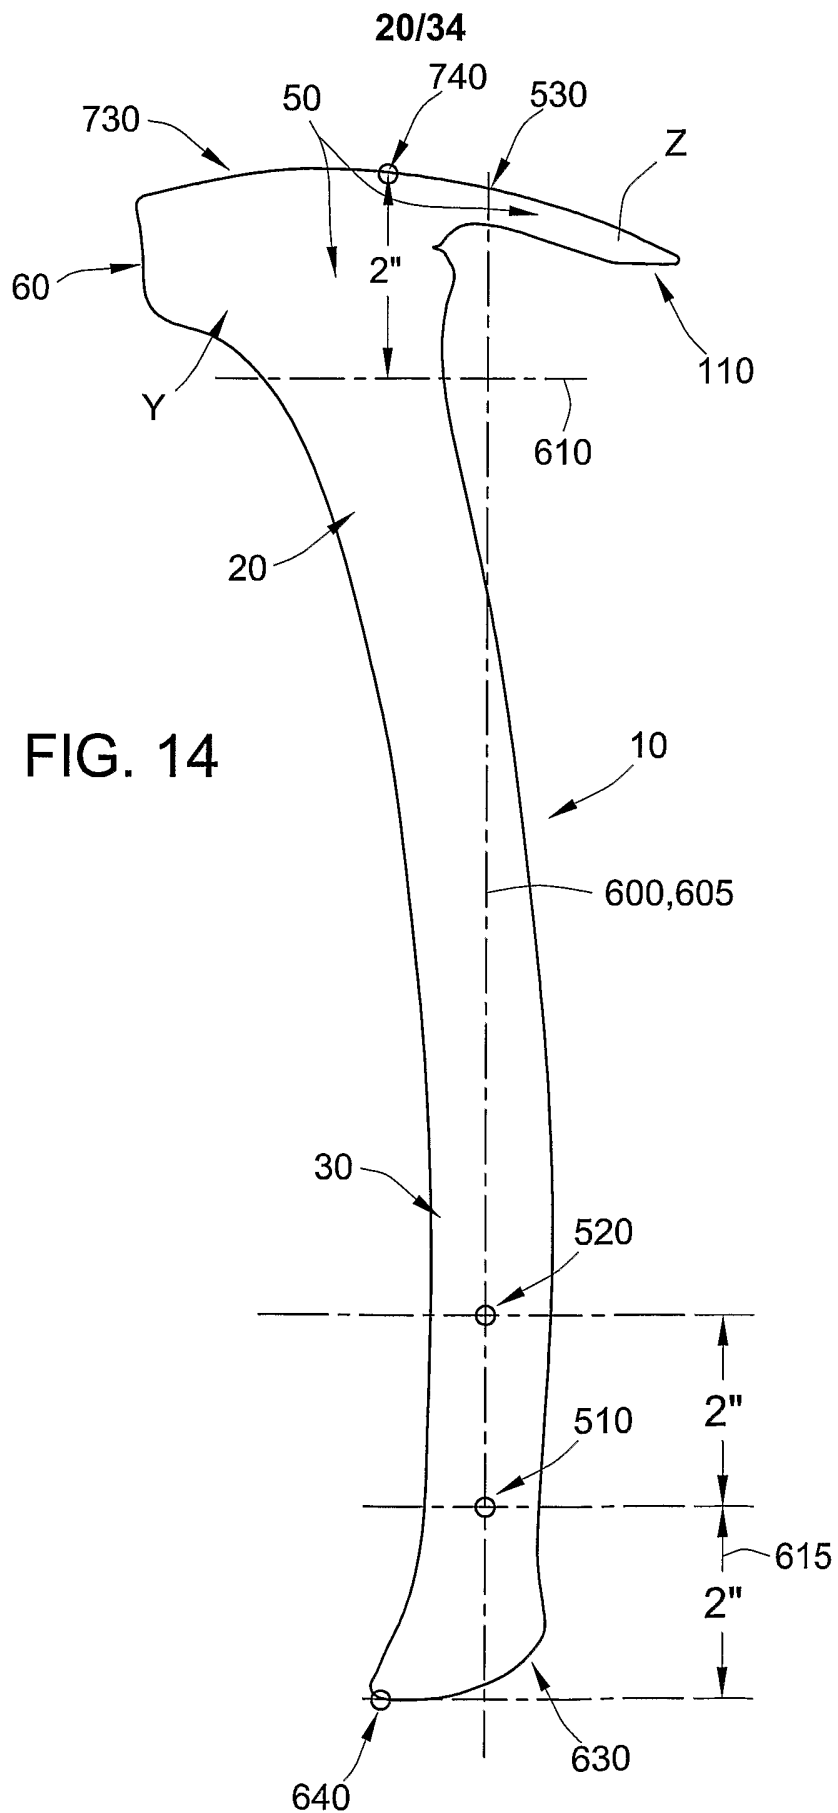
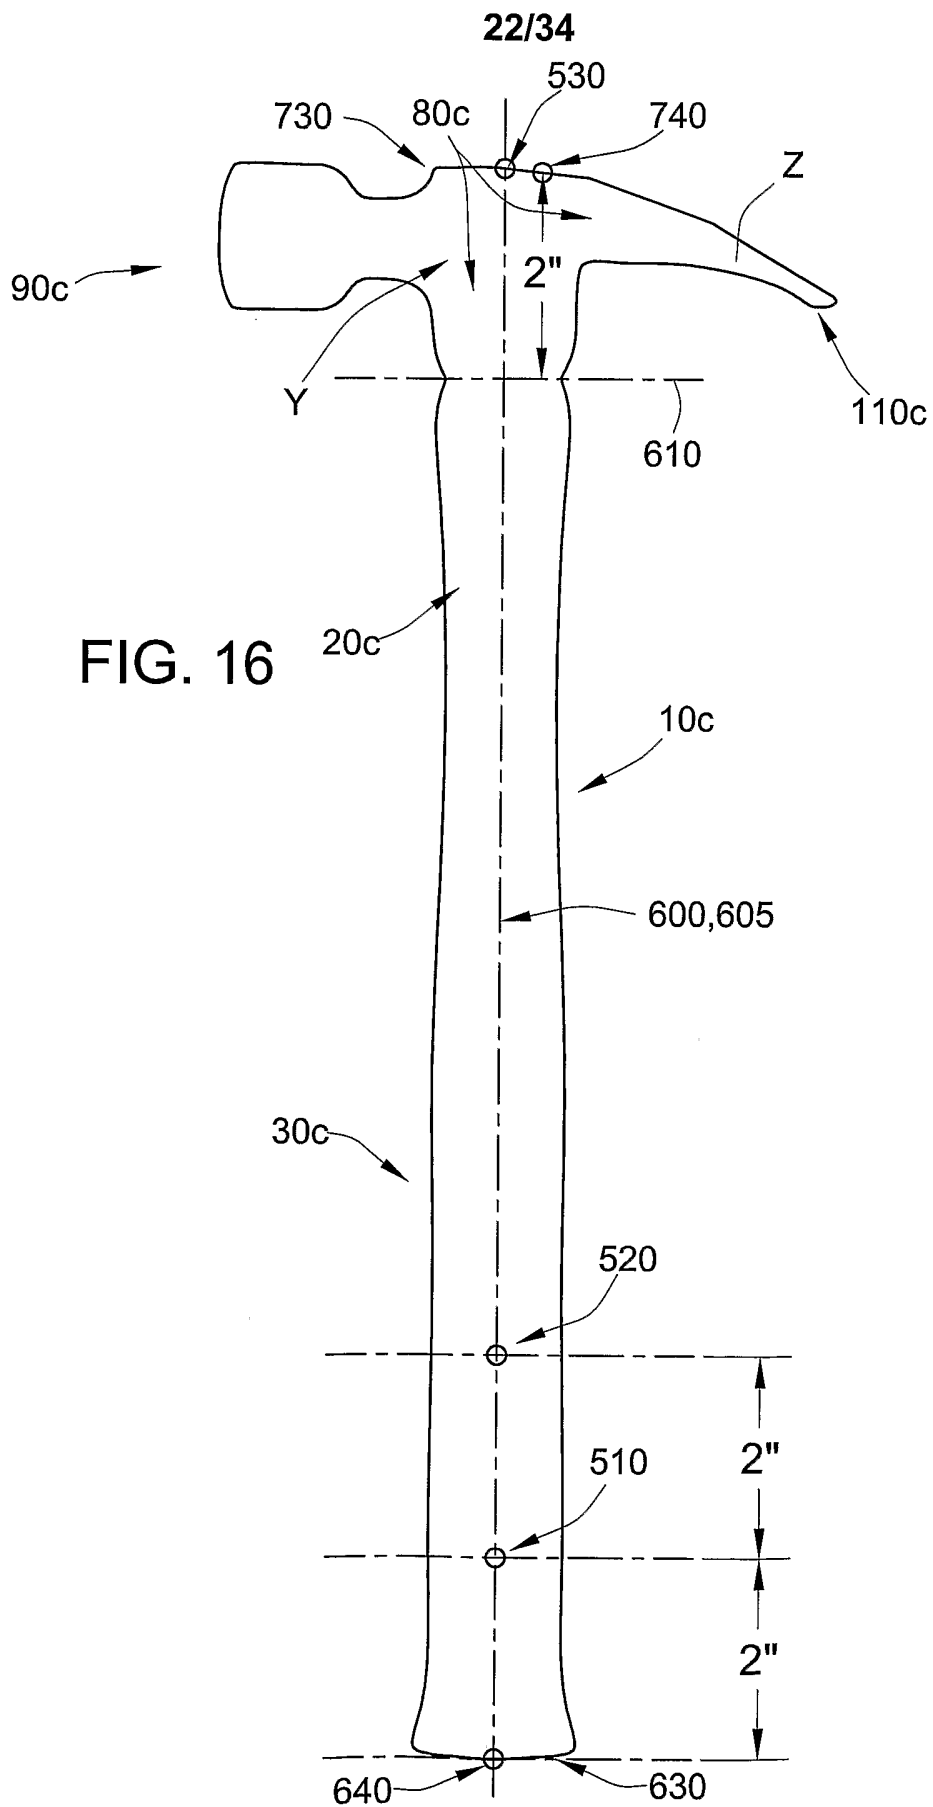


FIG. 13






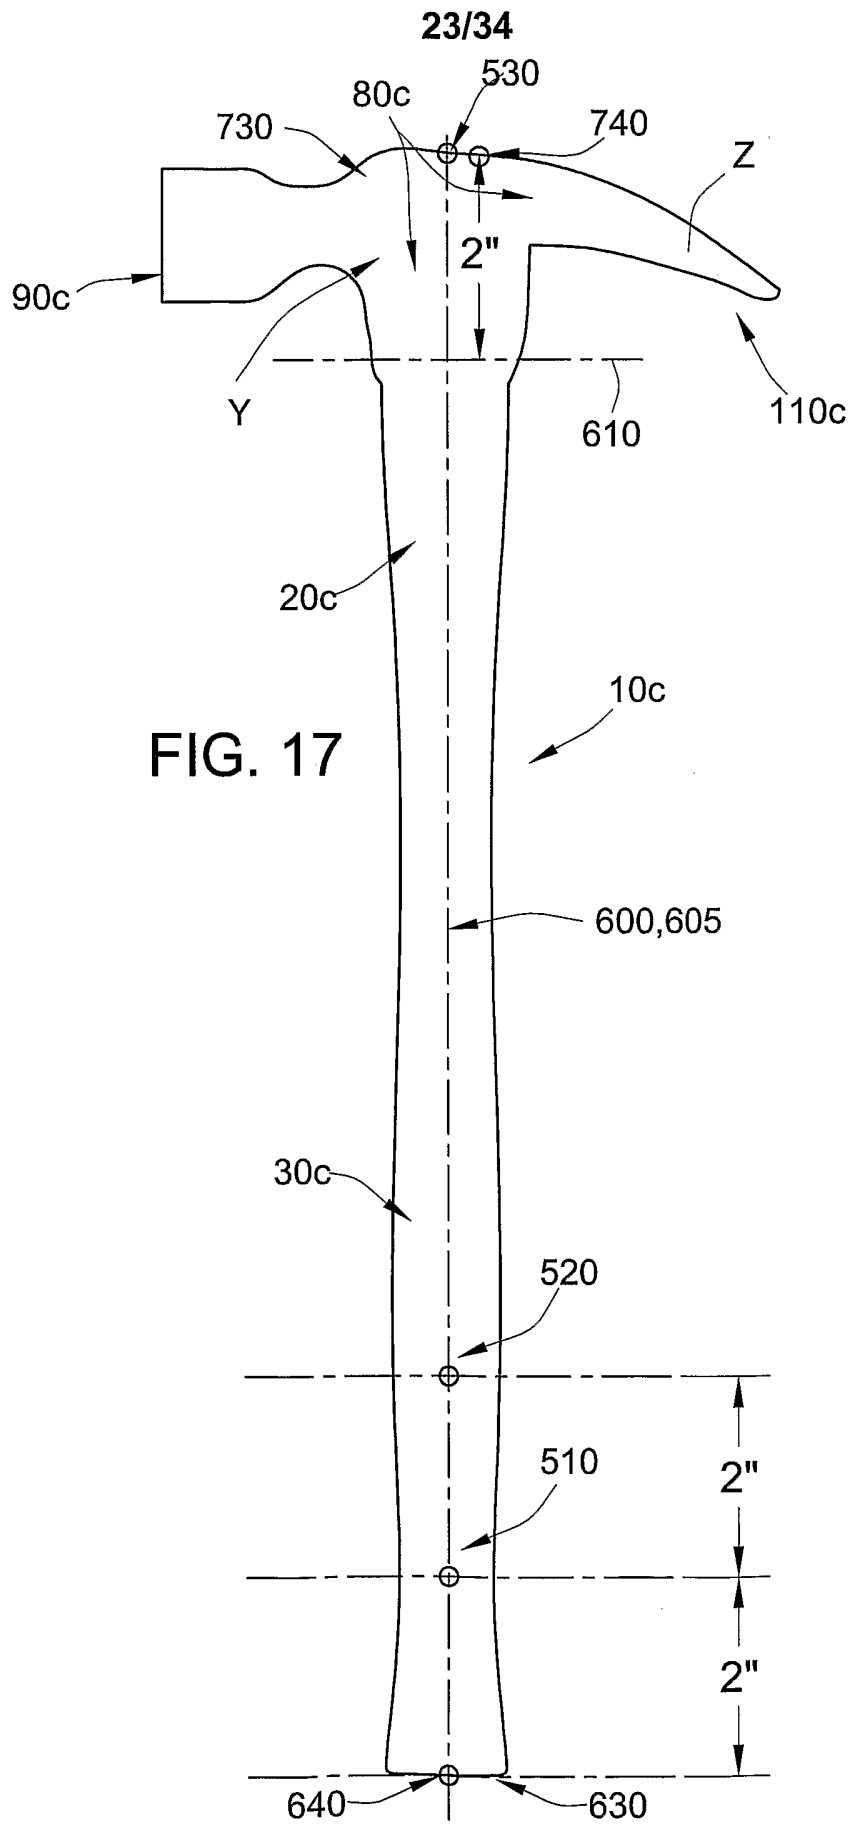


FIG. 17

24/34

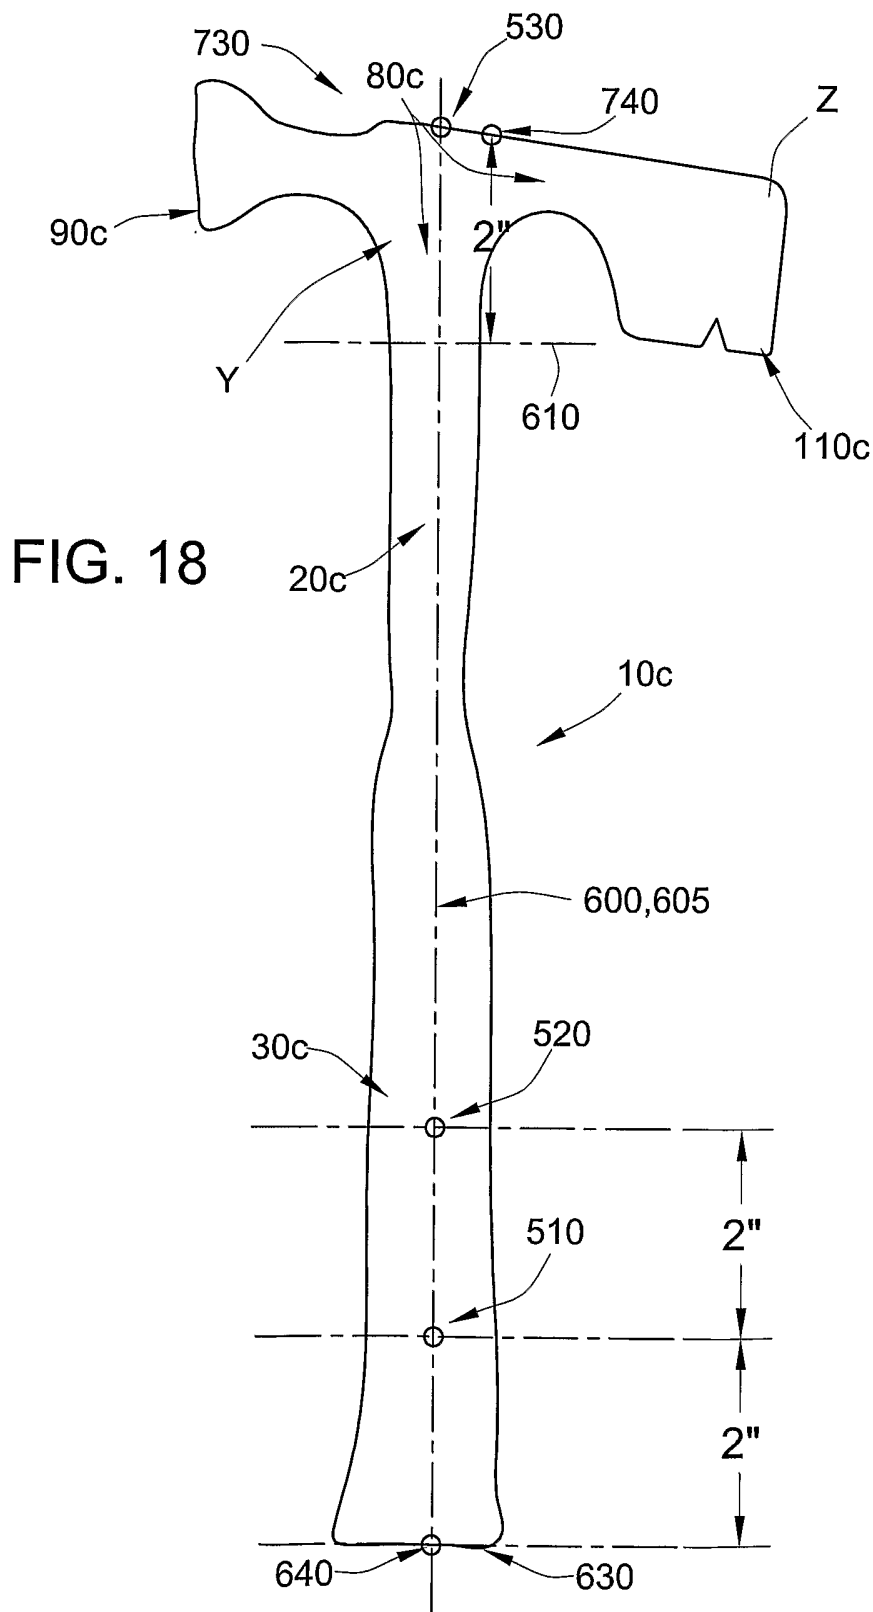

27/34

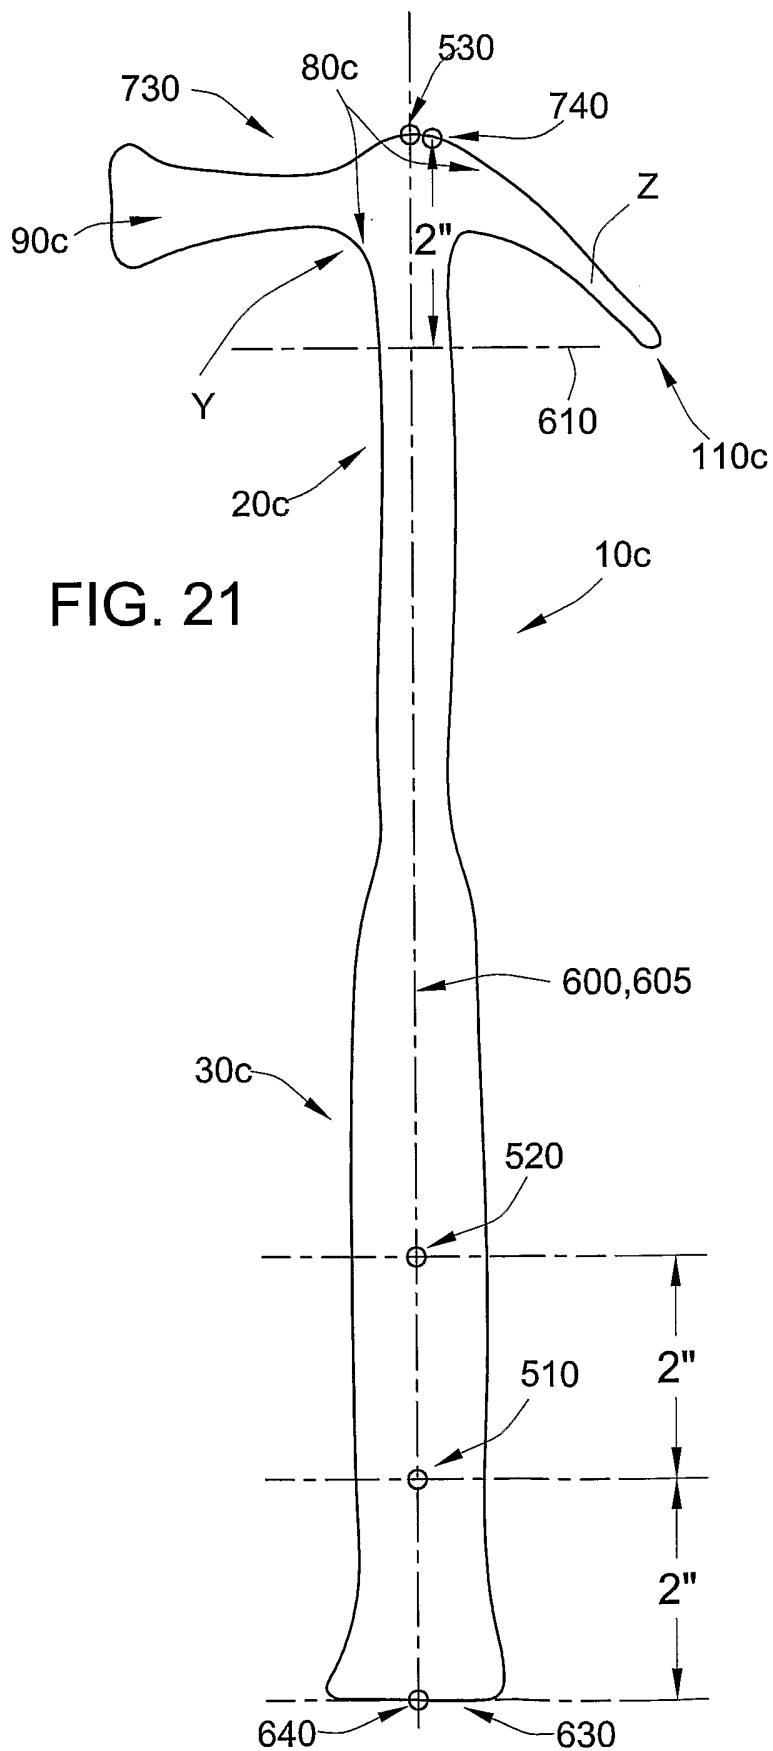


FIG. 21

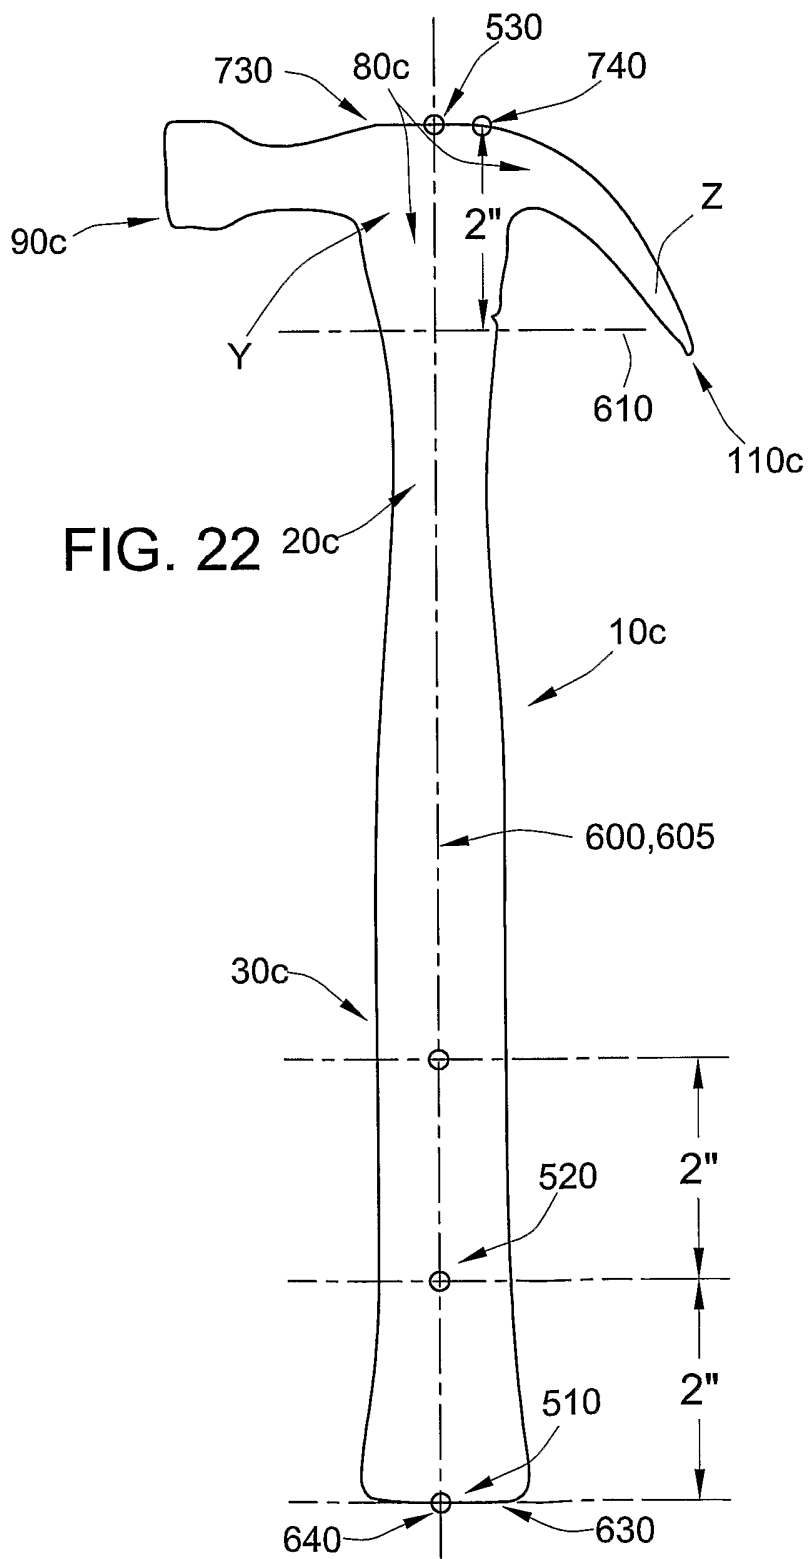


FIG. 22


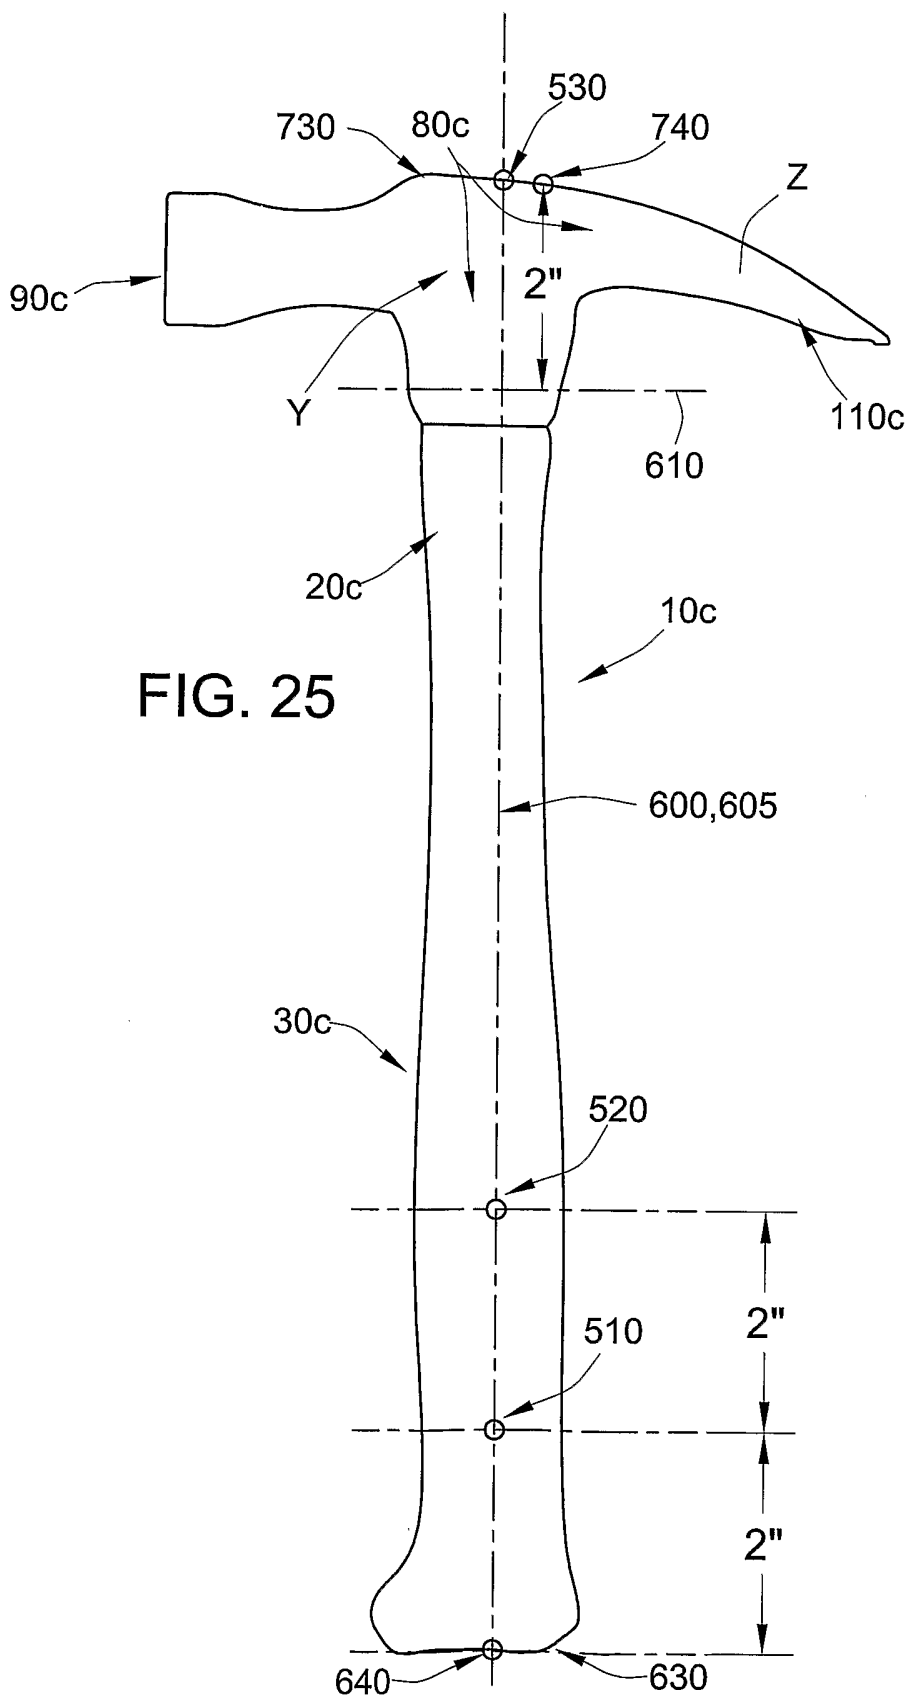


FIG. 25

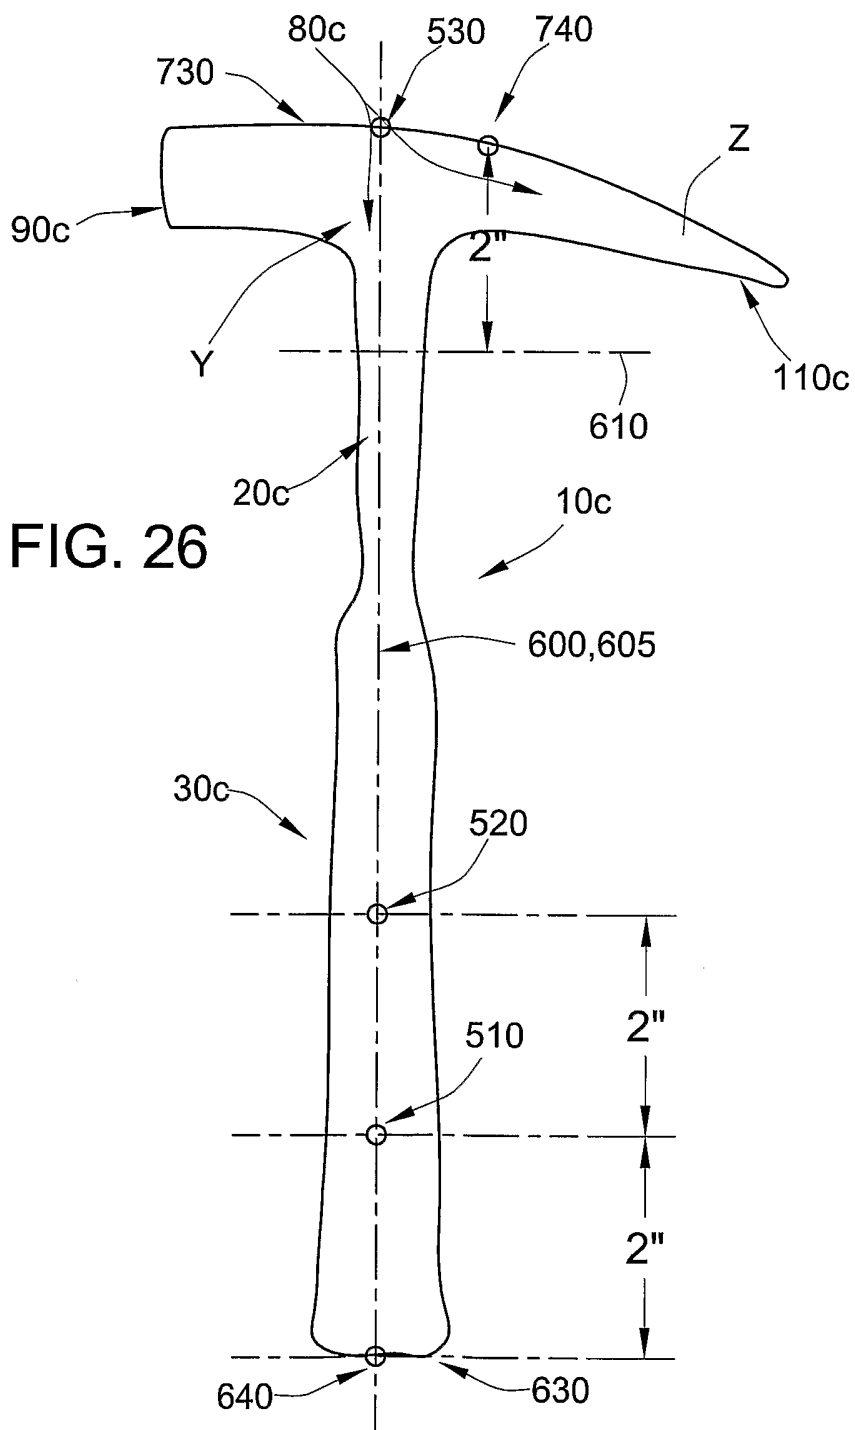

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/25067

A. CLASSIFICATION OF SUBJECT MATTER
 IPC(7) : B25D 1/00, 1/12
 US CL : 81/20, 22; 30/308.1; 254/26R
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 U.S. : 81/20, 22, 26; 30/308, 308.1, 340; 254/26R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 1,934,706 A (GREEN) 14 November 1933, see entire document.	1-6, 10-20, 24-28
A	US 4,030,847 A (CARMEN) 21 June 1977, see entire document.	1-6, 10-20, 24-28
X	US 4,154,273 A (POLLAK) 15 May 1979, see entire document.	1-6, 10-12, 15-20, 24-26
Y		----- 1-6, 10-20, 24-28
X	US 4,363,344 A (POLLAK) 14 December 1982, see entire document.	1-6, 10-12, 15-20, 24-26
Y		----- 1-6, 10-20, 24-28
A	US 5,425,176 A (BRAINERD et. al.) 20 June 1995, see entire document.	1-6, 10-20, 24-28
Y	US 5,657,674 A (BURNETT) 19 August 1997, see entire document.	13, 14, 27, 28

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T"
"A" document defining the general state of the art which is not considered to be of particular relevance	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search: 20 November 2002 (20.11.2002)
 Date of mailing of the international search report: 10 DEC 2002

Name and mailing address of the ISA/US: Commissioner of Patents and Trademarks, Box PCT, Washington, D.C. 20231, Facsimile No. (703)305-3230
 Authorized officer: James G. Smith, Telephone No. 703-308-1148
 Signature: Sheila Venev, Paralegal Specialist, Group 3700

INTERNATIONAL SEARCH REPORT

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,906,144 A (STAVISKI et. al.) 25 May 1999, see entire document.	1-6, 10-12, 15-20, 24-26 ----- 1-6, 10-20, 24-28
X --- Y	US 5,996,235 A (BRAINERD) 07 December 1999, see entire document.	1-6, 10-12, 15-20, 24-26 ----- 1-6, 10-20, 24-28
A	US 6,131,488 A (COONRAD) 17 October 2000, see entire document.	1-6, 10-20, 24-28
A	US 6,202,511 B1 (MURRAY et. al.) 20 March 2001, see entire document.	1-6, 10-20, 24-28
A	US 6,405,616 B1 (CHEN) 18 June 2002, see entire document.	1-6, 10-20, 24-28
A	US 6,460,430 B2 (COONRAD) 08 October 2002, see entire document.	1-6, 10-20, 24-28
A	US 2001/0029813 A1 (SCHRODER) 18 October 2001, see entire document.	1-6, 10-20, 24-28

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/25067

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claim Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claim Nos.: 7-9,21-23 and 33-38
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Please See Continuation Sheet

3. Claim Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:
Please See Continuation Sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
 2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
 3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

 4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 1-28, 33-38
- Remark on Protest** The additional search fees were accompanied by the applicant's protest.
 No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

PCT/US02/25067

Continuation of Box I Reason 2:

It is unclear as to what is meant by "the end opposite the end of the handle" in claims 7 and 21.

There is also no antecedent basis for "the cutting tool" and "the horizontal surface" in claim 33.

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I, claim(s) 1-28 and 33-38, drawn to a striking tool.

Group II, claim(s) 29-32, drawn to a method of making a tool.

The inventions listed as Groups I and II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the Group II method of manufacture has the technical feature of molding the grip to the handle, however there is no such feature in the apparatus claims of Group I, thus there are different technical features.