



(11) **EP 3 343 144 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

26.01.2022 Bulletin 2022/04

(21) Application number: **16838410.5**

(22) Date of filing: **17.06.2016**

(51) International Patent Classification (IPC):

F25D 17/06 ^(2006.01)

(52) Cooperative Patent Classification (CPC):

F25D 17/045; F25D 17/065; F25D 2317/062;
F25D 2317/0655; F25D 2317/0665

(86) International application number:

PCT/CN2016/086186

(87) International publication number:

WO 2017/032150 (02.03.2017 Gazette 2017/09)

(54) **REFRIGERATOR**

KÜHLSCHRANK

RÉFRIGÉRATEUR

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **26.08.2015 CN 201510534154**

(43) Date of publication of application:

04.07.2018 Bulletin 2018/27

(73) Proprietor: **Qingdao Haier Joint Stock Co., Ltd**
Qindao, Shandong 266101 (CN)

(72) Inventors:

- **TAO, Haibo**
Qingdao
Shandong 266101 (CN)
- **NIE, Shengyuan**
Qingdao
Shandong 266101 (CN)
- **WANG, Ke**
Qingdao
Shandong 266101 (CN)

• **LIU, Jianru**

Qingdao
Shandong 266101 (CN)

(74) Representative: **dompatent von Kreisler Selting**
Werner -

Partnerschaft von Patent- und Rechtsanwälten
mbB

Deichmannhaus am Dom
Bahnhofsvorplatz 1
50667 Köln (DE)

(56) References cited:

EP-A1- 1 621 831	CN-A- 101 551 189
CN-A- 102 506 539	CN-A- 102 506 539
CN-A- 102 538 339	CN-A- 102 937 355
CN-A- 105 042 989	CN-A- 105 042 994
CN-U- 202 420 084	CN-U- 204 923 644
CN-U- 204 923 645	KR-A- 20040 073 084
KR-Y1- 200 159 980	US-A- 2 279 804
US-A- 2 890 574	US-A1- 2012 047 922

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present invention is related to the field of freezing and refrigeration technologies, and more particularly, to a refrigerator.

BACKGROUND

[0002] Air-cooled refrigerators can maintain the freshness of food, extend food storage time and improve food safety, so they become essential home appliances. However, in current air-cooled refrigerators, usually the air supply passage is arranged at the rear part of a storage compartment. After cooled air is blown, it sinks. As a result, the temperature at the front part of the storage compartment is relatively high, while the temperature at the rear part thereof is relatively low, causing uneven temperatures. The front part of the storage compartment is close to the door and heat leak can easily occur. Accordingly, the temperature at the front part of the storage compartment will be even higher, which is unfavorable for storing food. How to realize even temperature distribution in the storage compartment of a refrigerator is an urgent problem for improving the refrigeration effect of refrigerators. EP 1 621 831 A1 discloses a refrigerator with the features of the preamble of claim 1. A further refrigerator is disclosed in US 2 279 804 A.

SUMMARY

[0003] This invention aims to overcome at least one defect of existing refrigerators, and provides a novel refrigerator. The refrigerator can efficiently realize even temperature distribution in the storage compartment.

[0004] Accordingly, this invention provides a refrigerator according to claim 1.

[0005] Optionally, the refrigeration air passage communicates with a rear space of the storage compartment to supply refrigeration air to the storage compartment.

[0006] Optionally, the refrigerator further comprises a movable air supply hood provided at an outer side of the air outlet of the cooling chamber and configured to provide an opening allowing the refrigeration air to flow into the refrigeration air passage when closing the air outlet of the cooling chamber.

[0007] Optionally, the refrigerator further comprises an air door configured to controllably close or open the refrigeration air passage.

[0008] Optionally, the refrigerator further comprises a top blower configured to blow the refrigeration air and the return air to the storage compartment in a mixed manner via the mixed air outlet.

[0009] Optionally, the refrigerator further comprises a top air passage cover plate mounted at a lower surface of the top wall of the storage compartment to form the top air passage.

[0010] Optionally, the top air passage cover plate comprises: a web portion extending upwards from its rear end to its front end and provided with a through hole; and an air aperture portion extending downwards from an edge of the through hole, having a lower end opening acting as the mixed air outlet, and having the blower mounted therein.

[0011] Optionally, the refrigerator further comprises a refrigeration air passage cover plate mounted at a front surface of the rear wall of the storage compartment to form the refrigeration air passage, and provided with multiple refrigeration air outlets to provide the refrigeration air to the storage compartment and/or the top air passage.

[0012] The refrigerator of this invention comprises a top air passage which allows refrigeration air to mix with return air with a relatively high temperature in the storage compartment and supplies the mixed air to the storage compartment, so that the refrigeration output/temperature in the storage compartment is evenly distributed, realizing quick, even and efficient refrigeration. In addition, the top air passage enables the refrigeration air path in the storage compartment to change from a single circulation process to a multiple circulation process, realizing even temperature distribution in the storage compartment.

[0013] Further, the refrigeration air passage in the refrigerator of this invention can directly supply refrigeration air to the storage compartment, considerably improving the refrigeration efficiency of the refrigerator.

[0014] The above and other objects, advantages and features of the invention will be understood by those skilled in the art more clearly with reference to the detailed description of the embodiments of this invention below with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The followings will describe some embodiments of this invention in detail in an exemplary rather than restrictive manner with reference to the accompanying drawings. The same reference signs in the drawings represent the same or similar parts. Those skilled in the art shall understand that these drawings are only schematic ones of this invention, and may not be necessarily drawn according to the scales. In the drawings:

Fig. 1 is a schematic drawing of a refrigerator according to an embodiment of this invention;

Fig. 2 is a schematic drawing of a refrigerator according to another embodiment of this invention; and

Fig. 3 is a schematic drawing of a refrigerator according to yet another embodiment of this invention.

DETAILED DESCRIPTION

[0016] Fig. 1 is a schematic drawing of a refrigerator 100 according to an embodiment of this invention. As shown in Fig. 1, the embodiment of this invention provides a refrigerator 100. The refrigerator 100 may typically comprise a storage compartment 11 for storing food, a refrigeration air passage 30 for providing refrigeration air to the storage compartment 11, and a door 20 for closing the storage compartment 11. In particular, the refrigerator 100 may further comprise: a top air passage 40. The top air passage 40 is provided at a top wall of the storage compartment 11, comprises a rear end air inlet 41, a front end air inlet 42 and a mixed air outlet 43 opening downwards, and is configured to receive refrigeration air blown from the refrigeration air passage 30 via the rear end air inlet 41, receive return air returning from the storage compartment 11 via the front end air inlet 42, and allow the refrigeration air and the return air to flow into the storage compartment 11 in a mixed manner via the mixed air outlet 43 so as to increase the refrigeration speed in the storage compartment 11. Specifically, when the refrigerator 100 works, the top air passage 40 allows the refrigeration air from the refrigeration air passage 30 to merge and mix with the return air close to the door 20 of the storage compartment 11 and having a relatively high temperature, and blow the mixed air substantially vertically downwards to the storage compartment 11, making the temperature in the storage compartment 11 more even.

[0017] In some embodiments of this invention, the refrigerator 100 further comprises a top blower 50 provided at the mixed air outlet 43 and configured to blow the refrigeration air and the return air to the storage compartment 11 in a mixed manner via the mixed air outlet 43 so as to improve the air supply efficiency. The top blower 50 may be an axial blower. In some alternative embodiments of this invention, a blower may be provided at each air inlet of the top air passage 40 to blow air into the top air passage 40. In other alternative embodiments of this invention, each air inlet may directly receive air flow blown from other air passages.

[0018] In some embodiments of this invention, the refrigerator 100 may further comprise a top air passage cover plate 44 mounted at a lower surface of the top wall of the storage compartment 11 to form the top air passage 40. Specifically, the top air passage cover plate 44 may be mounted at the lower surface of the top wall of the storage compartment 11, and comprises a web portion 441 with a through hole provided therein and an air aperture portion 442. The web portion 441 extends upwards from its rear end to its front end, and an included angle between the web portion and the horizontal plane may be 5 to 30 degrees. The air aperture portion 442 extends downwards in a direction perpendicular with the web portion 441 from an edge of the through hole, so that the mixed air outlet 43 is slightly inclined forwards, guaranteeing a low temperature environment at the door 20 of

the refrigerator 100. The top blower 50 may be installed in the air aperture portion 442. In other alternative embodiments of this invention, the top air passage cover plate 44 may be mounted at an upper surface of the top wall of the storage compartment 11 to form the top air passage 40. Or the top air passage 40 may be directly formed in the top wall of the storage compartment 11.

[0019] Further, the refrigerator 100 may further comprise two end cover plates each having an air inlet. The two end cover plates may be mounted at the two sides of the top air passage cover plate 44 respectively.

[0020] Fig. 2 is a schematic drawing of a refrigerator according to another embodiment of this invention. As shown in Fig. 2, in the refrigerator 100 of this embodiment, the refrigeration air passage 30 communicates with a rear space of the storage compartment 11 to supply refrigeration air to the storage compartment 11. Specifically, in some embodiments, the refrigerator 100 may further comprise a refrigeration air passage cover plate mounted at a front surface of the rear wall of the storage compartment 11 to form the refrigeration air passage 30. The refrigeration air passage cover plate is provided with multiple refrigeration air outlets 31 to provide the refrigeration air to the storage compartment 11 and/or the top air passage 40. For example, the surfaces on which some refrigeration air outlets 31 of the multiple refrigeration air outlets 31 are located abut against the end surface of the rear end air inlet 41 of the top air passage 40 to allow the refrigeration air to enter the top air passage 40. Alternatively, the surfaces on which some refrigeration air outlets 31 of the multiple refrigeration air outlets 31 are located may be spaced from the end surface of the rear end air inlet 41 of the top air passage 40 by a predetermined clearance to allow the refrigeration air to enter the top air passage 40. The some refrigeration air outlets and the rear end air inlet 41 of the top air passage 40 are located inside the storage compartment 11. The remaining refrigeration air outlets 31 of the multiple refrigeration air outlets 31 may supply refrigeration air to the storage compartment 11. In some alternative embodiments of this invention, the refrigeration air passage cover plate may be mounted at a rear surface of the rear wall of the storage compartment 11 to form the refrigeration air passage 30, and the rear wall of the storage compartment 11 is provided with multiple refrigeration air outlets 31.

[0021] In some embodiments of this invention, the refrigerator 100 may further comprise a cooling chamber 13, a cooling device 60, a blower 70 and a return air passage. The cooling chamber 13 is provided with an air outlet connected with the refrigeration air passage 30. The cooling device 60 is provided in the cooling chamber 13 to cool the air passing the cooling chamber. The cooling device 60 may be an evaporator of a compression refrigeration system. The blower 70 may be arranged at the air outlet. The return air passage connects a lower space of the storage compartment 11 and the cooling chamber 13 such that a part or all of the air in the storage compartment 11 enters the cooling chamber 13 via the

return air passage and enters the refrigeration air passage 30 after being cooled by the cooling device 60.

[0022] In some embodiments of this invention, to facilitate picking and placing of articles, the refrigerator 100 may further comprise a drawer 90 for receiving the articles 92, such as beef, water melons and beverages. The drawer 90 can be operably inserted into the storage compartment 11 and pulled out of the same. In other words, the drawer 90 is installed inside the storage compartment 11. Optionally, lower parts of the front and rear walls of the drawer 90 comprises ventilation holes 91, so that the air flow flowing out of the mixed air outlet 43 can easily flow out of the drawer 90 via the ventilation holes 91 of the drawer 90 after exchanging heat with the articles 92 inside the drawer 90. Further, the air flowing out of the ventilation holes 91 of the front wall of the drawer 90 may return to the front end air inlet 42 of the top air passage 40 for circulation. The air flowing out of the ventilation holes 91 of the rear wall of the drawer 90 may return to the return air passage for circulation.

[0023] In some embodiments of this invention, the refrigerator 100 may further comprise another storage compartment 12, which may be arranged blow the storage compartment 11. For example, the storage compartment 11 may be a refrigeration compartment, and the another storage compartment 12 may be a freezing compartment. Further, a quick freezing compartment may be provided between the storage compartment 11 and the another storage compartment 12. The cooling chamber 13 may be arranged behind the another storage compartment 12. The refrigerator 100 further comprises another refrigeration air passage 32 connecting the air outlet of the cooling chamber 13 and the another storage compartment 12, and another return air passage 33 connecting the another storage compartment 12 and the cooling chamber 13.

[0024] In some embodiments of this invention, as shown in Fig. 3, the refrigerator 100 may further comprise an air door 81 and a movable air supply hood 82. The air door 81 is configured to controllably close or open the refrigeration air passage 30. The movable air supply hood 82 is provided at an outer side of the air outlet of the cooling chamber 13 and configured to provide an opening allowing refrigeration air to flow into the refrigeration air passage 30 when closing the air outlet of the cooling chamber 13. That is, when the movable air supply hood 82 closes the air outlet of the cooling chamber 13, the another refrigeration air passage 32 connected with the another storage compartment 12 can be closed, so that the refrigeration air passage 30 is not blocked.

[0025] The refrigerator 100 of the embodiments of this invention may have multiple working modes. The multiple working modes may comprise the following working modes: an independent working mode of the storage compartment 11, an independent working mode of the another storage compartment 12, a joint working mode, a quick refrigeration mode and another joint work mode. In the independent working mode of the storage com-

partment 11, the movable air supply hood 82 is closed, the air door 81 is opened, the blower 70 works while the top blower 50 does not work, so that the storage compartment 11 works independently. In the independent working mode of the another storage compartment 12, the movable air supply hood 82 is opened, the air door 81 is closed, the blower 70 works while the top blower 50 does not work, so that the another storage compartment 12 works independently. In the joint working mode, the movable air supply hood 82 is opened, the air door 81 is opened, the blower 70 works while the top blower 50 does not work, so that the two storage compartments 11, 12 work jointly. In the quick refrigeration mode, the movable air supply hood 82 is closed, the air door 81 is opened, and both the blower 70 and the top blower 50 work, so that quick refrigeration can be performed in the storage compartment 11. As shown in Fig. 1, the arrows in this figure represent the flow directions of air flow. To prevent excessive temperature rise in the another storage compartment 12, after the quick refrigeration mode operates for a certain period, the refrigerator automatically exits from this mode. In the another joint work mode, the movable air supply hood 82 is opened, the air door 81 is opened, and both the blower 70 and the top blower 50 work, so that quick refrigeration can be performed in the storage compartments 11, 12. As shown in Fig. 3, the arrows in this figure represent the flow directions of air flow.

Claims

1. A refrigerator (100), comprising:

a storage compartment (11);
a refrigeration air passage (30) configured to supply refrigeration air; and
a top air passage (40) that is provided at a top wall of the storage compartment (11), comprises a rear end air inlet (41), a front end air inlet (30) and a mixed air outlet (43) opening downwards, and is configured to receive refrigeration air blown from the refrigeration air passage (30) via the rear end air inlet (41), receive return air returning from the storage compartment (11) via the front end air inlet (42), and allow the refrigeration air and the return air to flow into the storage compartment (11) in a mixed manner via the mixed air outlet (43), **characterized in that**, the refrigerator (100) further comprising:

a cooling chamber (13) provided with an air outlet connected with the refrigeration air passage (30);
a cooling device (60) provided in the cooling chamber (13) to cool the air passing the cooling chamber (13);
a blower (70) provided at the air outlet of

- the cooling chamber (13);
 a return air passage connecting a lower space of the storage compartment (11) and the cooling chamber (13), such that a part or all of the air in the storage compartment (11) enters the cooling chamber (13) via the return air passage and enters the refrigeration air passage (30) after being cooled by the cooling device (60);
 another storage compartment (12) provided below the storage compartment (11) and in front of the cooling chamber (13);
 another refrigeration air passage (32) connecting the air outlet of the cooling chamber (13) and the another storage compartment (12); and
 another return air passage (33) connecting the another storage compartment (12) and the cooling chamber (13).
2. The refrigerator of claim 1, wherein the refrigeration air passage (30) communicates with a rear space of the storage compartment (11) to supply refrigeration air to the storage compartment (11).
3. The refrigerator of claim 1, further comprising: a movable air supply hood (82) provided at an outer side of the air outlet of the cooling chamber (13) and configured to provide an opening allowing the refrigeration air to flow into the refrigeration air passage (30) when closing the air outlet of the cooling chamber.
4. The refrigerator of claim 1, further comprising: an air door (81) configured to controllably close or open the refrigeration air passage (30).
5. The refrigerator of claim 1, further comprising: a top blower (50) configured to blow the refrigeration air and the return air to the storage compartment (13) in a mixed manner via the mixed air outlet (43).
6. The refrigerator of claim 5, further comprising: a top air passage cover plate (44) mounted at a lower surface of the top wall of the storage compartment (11) to form the top air passage (40).
7. The refrigerator of claim 6, wherein the top air passage cover plate (44) comprises:
- a web portion (441) extending upwards from its rear end to its front end and provided with a through hole; and
 an air aperture portion (442) extending downwards from an edge of the through hole, having a lower end opening acting as the mixed air outlet (43), and having the blower (50) mounted therein.

8. The refrigerator of claim 1, further comprising: a refrigeration air passage cover plate mounted at a front surface of the rear wall of the storage compartment (11) to form the refrigeration air passage (30), and provided with multiple refrigeration air outlets (31) to provide the refrigeration air to the storage compartment (11) and/or the top air passage (40).

10 Patentansprüche

1. Kühlschrank (100), der aufweist:

ein Aufbewahrungsfach (11);
 einen Kühlluftdurchgang (30), der so ausgebildet ist, dass er Kühlluft zuführt, und einen oberen Luftdurchgang (40), der an einer oberen Wand des Aufbewahrungsfachs (11) vorgesehen ist, einen Lufteinlass (41) am hinteren Ende, einen Lufteinlass (30) am vorderen Ende und einen sich nach unten öffnenden Mischluftauslass (43) aufweist, und so ausgebildet ist, dass er Kühlluft aufnimmt, die aus dem Kühlluftdurchgang (30) über den Lufteinlass (41) am hinteren Ende geblasen wird, Rückluft aufnimmt, die aus dem Aufbewahrungsfach (11) über den Lufteinlass (42) am vorderen Ende zurückkehrt, und der Kühlluft und der Rückluft ermöglicht, in das Aufbewahrungsfach (11) in einer gemischten Weise über den Mischluftauslass (43) zu strömen, **dadurch gekennzeichnet, dass**

der Kühlschrank (100) ferner aufweist:

einen Kühlraum (13), der mit einem Luftauslass versehen ist, der mit dem Kühlluftdurchgang (30) verbunden ist;
 eine Kühlvorrichtung (60), die in dem Kühlraum (13) vorgesehen ist, um die den Kühlraum (13) durchlaufende Luft zu kühlen;
 ein Gebläse (70), das am Luftauslass des Kühlraums (13) vorgesehen ist;
 einen Rückluftdurchgang, der einen unteren Raum des Aufbewahrungsfachs (11) und den Kühlraum (13) verbindet, so dass ein Teil der Luft oder sämtliche Luft in dem Aufbewahrungsfach (11) über den Rückluftdurchgang in den Kühlraum (13) eintritt und in den Kühlluftdurchgang (30) eintritt, nachdem sie von der Kühlvorrichtung (60) gekühlt wurde;
 ein weiteres Aufbewahrungsfach (12), das unterhalb des Aufbewahrungsfachs (11) und vor dem Kühlraum (13) vorgesehen ist;
 ein weiterer Kühlluftdurchgang (32), der den Luftauslass des Kühlraums (13) und des weiteren Aufbewahrungsfachs (12) verbindet; und

ein weiterer Rückluftdurchgang (33), der das weitere Aufbewahrungsfach (12) und den Kühlraum (13) verbindet.

2. Kühlschrank nach Anspruch 1, wobei der Kühlluftdurchgang (30) mit einem hinteren Raum des Aufbewahrungsfachs (11) kommuniziert, um dem Aufbewahrungsfach (11) Kühlluft zuzuführen. 5
3. Kühlschrank nach Anspruch 1, der ferner aufweist: eine bewegbare Luftzufuhrhaube (82), die an einer Außenseite des Luftauslasses des Kühlraums (13) vorgesehen ist und so ausgebildet ist, dass sie eine Öffnung bereitstellt, die ermöglicht, dass die Kühlluft in den Kühlluftdurchgang (30) strömt, wenn der Luftauslass des Kühlraums geschlossen wird. 10 15
4. Kühlschrank nach Anspruch 1, der ferner aufweist: eine Lufttür (81), die so ausgebildet ist, dass sie den Kühlluftdurchgang (30) gesteuert schließt oder öffnet. 20
5. Kühlschrank nach Anspruch 1, der ferner aufweist: ein oberes Gebläse (50), das so ausgebildet ist, dass es die Kühlluft und die Rückluft in einer gemischten Weise über den Mischluftauslass (43) in das Aufbewahrungsfach (13) bläst. 25
6. Kühlschrank nach Anspruch 5, der ferner aufweist: eine obere Luftdurchgangs-Abdeckplatte (44), die an einer unteren Fläche der oberen Wand des Aufbewahrungsfachs (11) montiert ist, um den oberen Luftdurchgang (40) zu bilden. 30
7. Kühlschrank nach Anspruch 6, wobei die obere Luftdurchgangs-Abdeckplatte (44) aufweist: 35
 - einen Stegabschnitt (441), der sich von seinem hinteren Ende zu seinem vorderen Ende nach oben erstreckt und mit einem Durchgangsloch versehen ist; und 40
 - einen Luftöffnungsabschnitt (442), der sich von einem Rand des Durchgangslochs nach unten erstreckt, eine untere Öffnung aufweist, die als Mischluftauslass (43) dient, und das darin montierte Gebläse (50) aufweist. 45
8. Kühlschrank nach Anspruch 1, der ferner aufweist: eine Kühlluftdurchgangs-Abdeckplatte, die an einer vorderen Fläche der hinteren Wand des Aufbewahrungsfachs (11) montiert ist, um die Kühlluftdurchgang (30) zu bilden, und die mit mehreren Kühlluftauslässen (31) versehen ist, um die Kühlluft dem Aufbewahrungsfach (11) und/oder dem oberen Luftdurchgang (40) bereitzustellen. 50 55

Revendications

1. Réfrigérateur (100), comprenant :

un compartiment de stockage (11) ;
 un passage d'air de réfrigération (30) configuré pour fournir de l'air de réfrigération ; et
 un passage d'air haut (40) qui est prévu au niveau d'une paroi haute du compartiment de stockage (11), comprend une entrée d'air d'extrémité arrière (41), une entrée d'air d'extrémité avant (30) et une sortie d'air mixte (43) débouchant vers le bas, et est configuré pour recevoir de l'air de réfrigération soufflé depuis le passage d'air de réfrigération (30) via l'entrée d'air d'extrémité arrière (41), recevoir de l'air de retour revenant du compartiment de stockage (11) via l'entrée d'air d'extrémité avant (42), et permettre à l'air de réfrigération et à l'air de retour de circuler dans le compartiment de stockage (11) de manière mixte via la sortie d'air mixte (43), **caractérisé en ce que,**

le réfrigérateur (100) comprend en outre :

une chambre de refroidissement (13) munie d'une sortie d'air reliée au passage d'air de réfrigération (30) ;
 un dispositif de refroidissement (60) prévu dans la chambre de refroidissement (13) pour refroidir l'air passant par la chambre de refroidissement (13) ;
 une soufflante (70) prévue au niveau de la sortie d'air de la chambre de refroidissement (13) ;
 un passage d'air de retour reliant un espace inférieur du compartiment de stockage (11) et la chambre de refroidissement (13), de sorte qu'une partie ou la totalité de l'air dans le compartiment de stockage (11) entre dans la chambre de refroidissement (13) via le passage d'air de retour et entre dans le passage d'air de réfrigération (30) après refroidissement par le dispositif de refroidissement (60) ;
 un autre compartiment de stockage (12) prévu en dessous du compartiment de stockage (11) et devant la chambre de refroidissement (13) ;
 un autre passage d'air de réfrigération (32) reliant la sortie d'air de la chambre de refroidissement (13) et l'autre compartiment de stockage (12) ; et
 un autre passage d'air de retour (33) reliant l'autre compartiment de stockage (12) et la chambre de refroidissement (13).

2. Réfrigérateur selon la revendication 1, dans lequel le passage d'air de réfrigération (30) communique

avec un espace arrière du compartiment de stockage (11) pour alimenter en air de réfrigération le compartiment de stockage (11).

3. Réfrigérateur selon la revendication 1, comprenant en outre : une hotte d'alimentation en air mobile (82) prévue au niveau d'un côté externe de la sortie d'air de la chambre de refroidissement (13) et configurée pour former une ouverture permettant à l'air de réfrigération de circuler dans le passage d'air de réfrigération (30) lors de la fermeture de la sortie d'air de la chambre de refroidissement. 5
10
4. Réfrigérateur selon la revendication 1, comprenant en outre : une trappe d'air (81) configurée pour fermer ou ouvrir de façon commandée le passage d'air de réfrigération (30). 15
5. Réfrigérateur selon la revendication 1, comprenant en outre : une soufflante haute (50) configurée pour souffler l'air de réfrigération et l'air de retour vers le compartiment de stockage (13) de manière mixte via la sortie d'air mixte (43). 20
6. Réfrigérateur selon la revendication 5, comprenant en outre : une plaque de couverture de passage d'air haut (44) montée au niveau d'une surface inférieure de la paroi haute du compartiment de stockage (11) pour former le passage d'air haut (40). 25
30
7. Réfrigérateur selon la revendication 6, dans lequel la plaque de couverture de passage d'air haut (44) comprend :
 - une portion de bande (441) s'étendant vers le haut de son extrémité arrière à son extrémité avant et munie d'un trou traversant ; et 35
 - une portion d'orifice d'air (442) s'étendant vers le bas depuis un bord du trou traversant, ayant une ouverture d'extrémité inférieure faisant office de sortie d'air mixte (43), et ayant la soufflante (50) montée en son sein. 40
8. Réfrigérateur selon la revendication 1, comprenant en outre : une plaque de couverture de passage d'air de réfrigération montée au niveau d'une surface avant de la paroi arrière du compartiment de stockage (11) pour former le passage d'air de réfrigération (30), et munie de multiples sorties d'air de réfrigération (31) pour fournir l'air de réfrigération au compartiment de stockage (11) et/ou au passage d'air haut (40). 45
50

55

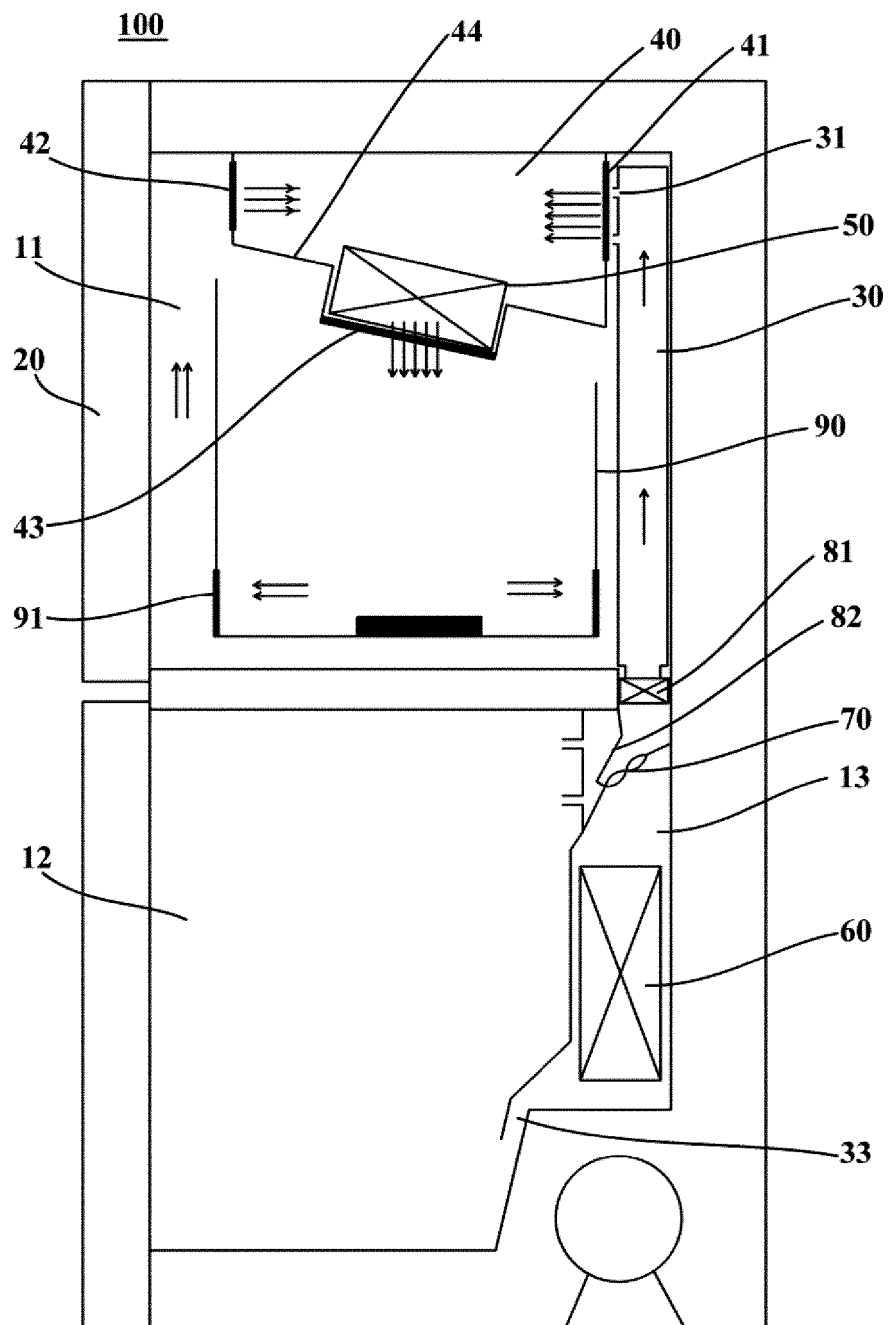


Fig. 1

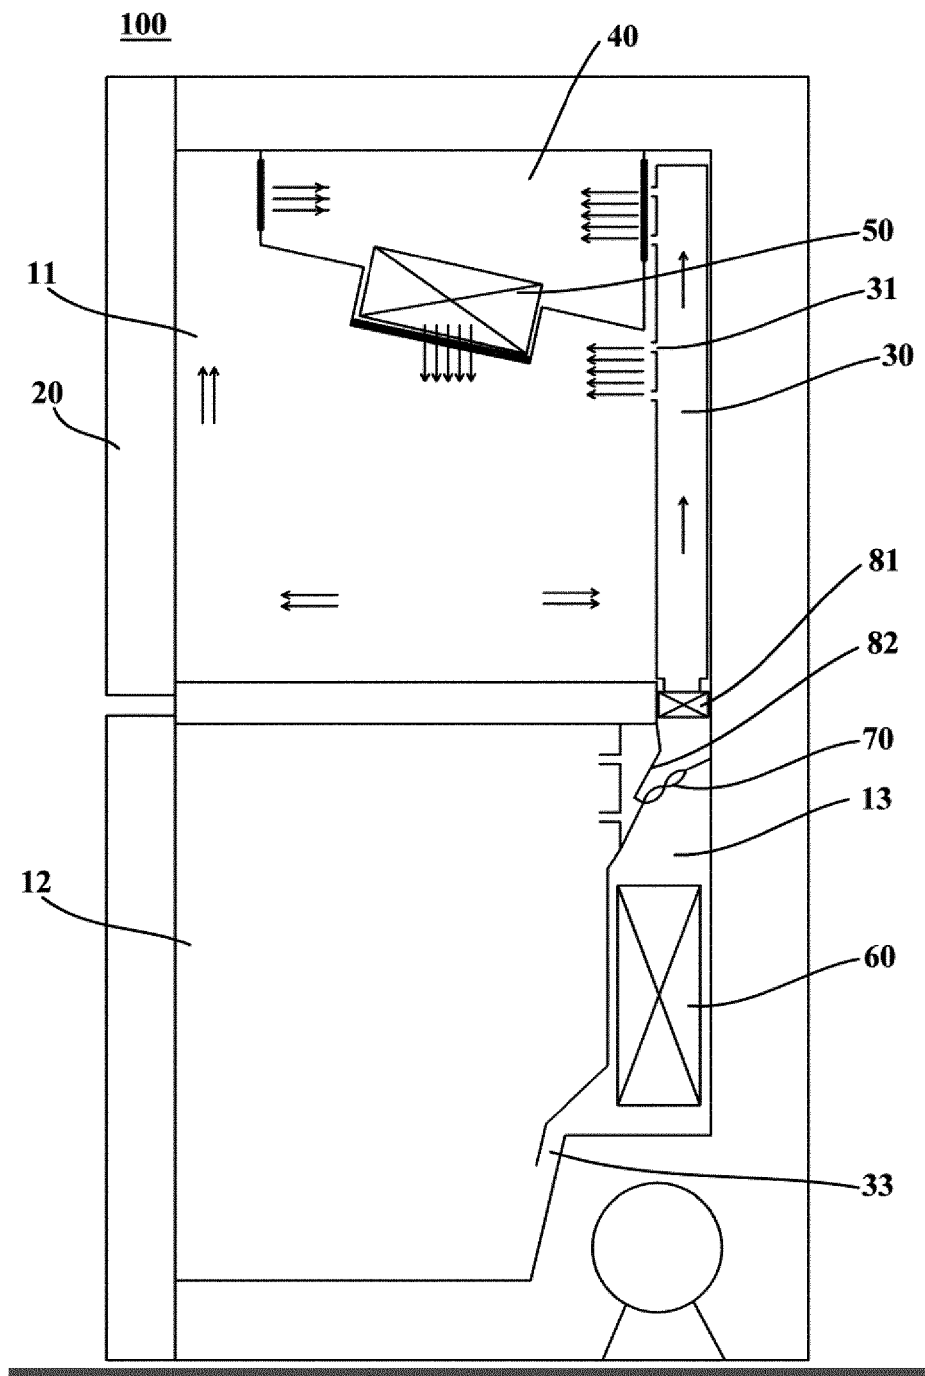


Fig. 2

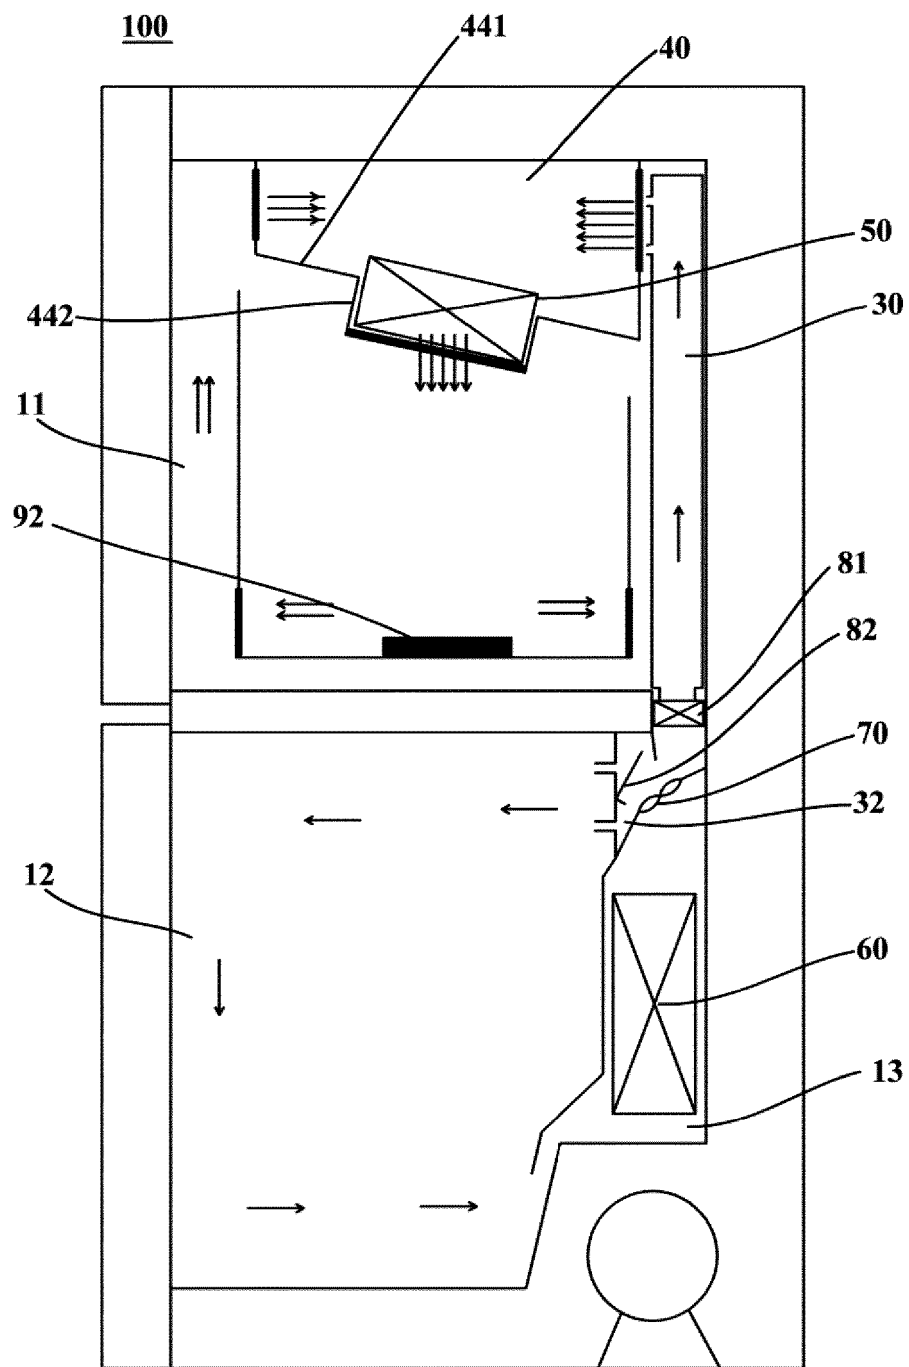


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1621831 A1 [0002]
- US 2279804 A [0002]