

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 August 2001 (02.08.2001)


PCT

(10) International Publication Number
WO 01/56252 A2

- (51) International Patent Classification⁷: H04L 29/06, 12/18, 29/12, H04N 7/173
- (74) Agent: BEVER, Patrick T.; Bever, Hoffman, Harms, LLP, Suite 320, 2099 Gateway Place, San Jose, CA 95110-1017 (US).
- (21) International Application Number: PCT/US01/02617
- (22) International Filing Date: 25 January 2001 (25.01.2001)
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/491,458 26 January 2000 (26.01.2000) US
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: VIOCLIX, INC. [US/US]; 1400 Dell Avenue, Campbell, CA 95008-6620 (US).
- (72) Inventors: NOBAKHT, Lida; 1400 Dell Avenue, Campbell, CA 95008 (US). CLYMER, James, R., W.; 1400 Dell Avenue, Campbell, CA 95008 (US).

[Continued on next page]

(54) Title: USER TERMINAL FOR CHANNEL-BASED INTERNET NETWORK

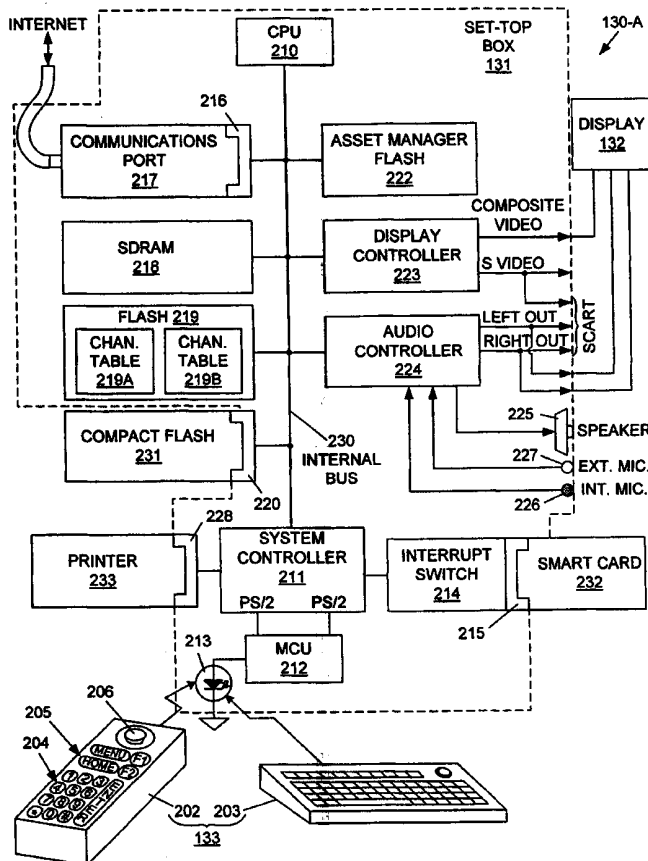

(57) Abstract: A user terminal for a channel-based network, the user terminal including a set-top box (131), a display (132), and one or more input devices (133). The set-top box includes a non-volatile memory (219) for storing a semi-permanent copy of a channel table downloaded from a server via the Internet. The channel table includes a list of channel numbers, associated Internet site names, and associated Internet addresses. The user terminal also includes a volatile memory (218) for storing a temporary copy of the channel table during user sessions. The channel numbers and associated Internet site names are read from the volatile memory and displayed in a menu-like manner. A user selects an Internet site name from the displayed menu, and enters the channel number associated with the selected Internet site name using a numeric keypad provided on an input device that is similar to a television remote control. The user terminal then accesses the selected Internet site by reading the Internet address associated with the entered channel number from the volatile memory, and transmitting the Internet address onto the Internet.

WO 01/56252 A2



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

1 USER TERMINAL FOR CHANNEL-BASED INTERNET NETWORK

2

3

Lida Nobakht

4

James R. W. Clymer

5

Kwon Kiyoung

6

7 FIELD OF THE INVENTION

8 The present invention relates to telecommunications,
9 and more particularly to networks and systems used to
10 access the Internet.

11

12 RELATED ART

13 The Internet is a modern communication system that
14 allows computer operators (users) to network with other
15 operators as well as a variety of Internet databases
16 (sites). These Internet sites often provide useful
17 information, such as news and weather information, or
18 offer products or services that can be purchased by users
19 using, for example, credit card numbers.

20 Although the Internet is steadily increasing in
21 popularity, many prospective users are unable to overcome
22 the cost and complexity of gaining access to the Internet
23 using conventional methods. First, a prospective user
24 must purchase an expensive personal computer and
25 appropriate software. Next, the prospective user must
26 establish an account with an Internet access provider or
27 on-line service provider such as America Online. The
28 prospective user must master the operating system of the
29 personal computer to establish access to the Internet.
30 Finally, the user must search for useful and interesting
31 Internet sites, often requiring the user to memorize and
32 enter long and confusing uniform resource locators
33 (URLs), or to search through pull-down tables for a
34 desired Internet site. Faced with these hurdles, many

1 prospective users become overwhelmed and abandon their
2 efforts to gain access to the Internet.

3 Recognizing that there are a vast number of
4 potential users that cannot afford to purchase a personal
5 computer, or who are intimidated by personal computer
6 operation, computer makers have sought to provide low
7 cost and easy-to-understand Internet access systems. One
8 such system is produced by WebTV Networks, Inc. of
9 Mountain View, California. The WebTV system provides a
10 set-top box that connects to a user's television and
11 allows the user to access the Internet using a wireless
12 input device, thereby eliminating the cost of a computer
13 monitor, while providing a convenient data input method.
14 However, the WebTV set-top box is comparable to personal
15 computers in price, and requires the user to master much
16 of the same expensive and confusing software that is used
17 on personal computers. Therefore, although the WebTV
18 system makes accessing the Internet somewhat less
19 complicated, it remains too expensive and complex for
20 many potential users.

21 What is needed is an Internet access system that is
22 significantly less expensive than personal computers, and
23 is as easy to use as a television.

24

25 SUMMARY

26 The present invention is directed to a user terminal
27 for a channel-based network. The channel-based network
28 includes a system server, at least one user terminal, and
29 at least one Internet site. The system server stores a
30 master channel table that is downloaded, at least in
31 part, to the user terminals in a scheduled manner. The
32 master channel table includes a list of Internet site
33 names, associated channel numbers, and Internet
34 addresses.

1 In accordance with a first aspect of the present
2 invention, each user terminal includes a memory circuit
3 (e.g., a flash or SDRAM memory) that is configured to
4 store a local version of the channel table. In a menu
5 mode, channel numbers and associated Internet site names
6 stored in the local channel table are displayed on, for
7 example, a television or other display device. The user
8 terminal is provided with an input device (e.g., a device
9 similar to a television remote control) that allows the
10 user to select an Internet site from the displayed menu
11 by entering the channel number displayed next to the
12 selected Internet site name using, for example, a numeric
13 keypad. When a channel number is entered, the Internet
14 address (e.g., URL) associated with the entered channel
15 number is read from the local channel table, and the user
16 terminal is connected with the selected Internet site by
17 transmitting the Internet address onto the Internet. By
18 allowing a user to access internet sites using channel
19 numbers, the user terminal of the present invention
20 provides a key advantage over conventional networks that
21 access internet sites using pull-down displays. That is,
22 when a large number of Internet sites are stored in such
23 pull-down displays, a user must perform the tedious task
24 of locating and highlighting a corresponding site name or
25 icon before accessing the selected Internet site. In
26 contrast, similar to located a favorite television
27 station, the present invention allows a user to enter a
28 memorized channel number, thereby immediately accessing
29 the selected Internet site without manipulating pull-down
30 displays. Further, by storing and accessing the Internet
31 sites using a channel table, the manufacturing costs
32 associated with user terminals are significantly less
33 than conventional personal computers.

1 In accordance with another aspect of the present
2 invention, each user terminal includes a non-volatile
3 memory (e.g., a flash memory) for storing a semi-
4 permanent version of the channel table, and a volatile
5 memory for storing a temporary version of the channel
6 table. At the beginning of each user session, a control
7 unit of the user terminal interacts with the network
8 server to authorize the user session (e.g., by comparing
9 information transmitted from a smart card with
10 information stored at the server), and then copies the
11 semi-permanent channel table from the non-volatile memory
12 into the volatile memory if the user session is
13 authorized. By providing a semi-permanent channel table
14 in the non-volatile memory, irritating delays caused by
15 downloading channel table data from the server are
16 minimized. Further, because the control unit only
17 operates using the temporary channel table stored in the
18 volatile memory, which is erased at the beginning of each
19 user session, unintended access of, for example, a minor
20 user to adult Internet sites, is avoided. In other
21 words, each user terminal is provided with an innate
22 security system because the control unit must copy the
23 semi-permanent channel table from the non-volatile memory
24 into the volatile memory before the user terminal can be
25 used to access Internet sites.

26 In accordance with another aspect of the present
27 invention, each user terminal downloads the master
28 channel table from the network server over the Internet,
29 thereby providing a local copy of the master channel
30 table that can be accessed during a user session. As
31 mentioned above, channel numbers and associated internet
32 site names are then read from the local copy and
33 displayed, for example, on a television, thereby allowing
34 a user to access each Internet site simply by entering a

1 selected channel number. By supporting channel table
2 downloads from the server, updated channel table
3 information is conveniently provided to each user
4 terminal when the master channel table at the server is
5 updated. Further, guest users are able to access
6 personal channel table information at remote locations
7 simply by identifying themselves to the server using, for
8 example, a smart card.

9 The present invention will be more fully understood
10 in view of the following description and drawings.

11

12 BRIEF DESCRIPTION OF THE DRAWINGS

13 Fig. 1 is a block diagram showing a channel-based
14 network according to the present invention;

15 Fig. 2 is a block diagram showing a user terminal of
16 the channel-based network according to an embodiment of
17 the present invention;

18 Figs. 3(A) through 3(C) are simplified diagrams
19 depicting the contents of a channel table flash memory, a
20 smart card, and an asset manager flash memory that are
21 associated with the user terminal shown in Fig. 2;

22 Fig. 4 is a block diagram showing various system
23 functions performed by the channel-based network of the
24 present invention;

25 Figs. 5(A) through 5(C) are simplified diagrams
26 depicting the contents of a channel table database, a
27 network database, and an update manager database that are
28 accessed by the server shown in Fig. 4;

29 Fig. 6 is a simplified state diagram showing
30 functions performed by the server shown in Fig. 4;

31 Fig. 7 is a flow diagram showing an initiation
32 process performed when a user terminal is turned on;

33 Figs. 8(A) and 8(B) are flow diagram showing
34 alternative channel table loading processes performed by

1 the system server and user terminal in a channel-based
2 network; and

3 Fig. 9 is a simplified state diagram showing user
4 interface operations supported by a user terminal in a
5 channel-based network.

6

7 DETAILED DESCRIPTION

8 Fig. 1 shows a channel-based network 100 according
9 to an embodiment of the present invention. Channel-based
10 network 100 includes a system server 110, Internet sites
11 120-1 through 120-4, and user terminals 130-A through
12 130-D.

13 System server 110 is connected to the Internet using
14 known communication hardware and methods, and stores a
15 master channel table 112. Master channel table 112
16 includes a list of channel numbers (CH. NO.), Internet
17 site names (SITE NAME), and Internet addresses (SITE
18 ADDRESS). Each channel number is assigned to an
19 associated Internet site address and Internet site name
20 in accordance with the business model described in co-
21 owned and co-pending U.S. Patent application entitled
22 "METHOD FOR ESTABLISHING CHANNEL-BASED INTERNET ACCESS
23 NETWORK", serial no. xx/xxx,xxx [Attorney Docket CTV-
24 004]. Briefly described, in exchange for payment from
25 Internet sites 120-1 through 120-4, the owner of server
26 110 includes these sites in channel-based network 100 by
27 assigning each Internet site a channel number, and
28 updating master channel table 112 to include associated
29 Internet site names and the Internet addresses of
30 Internet sites 120-1 through 120-4. For example, assume
31 that Internet site 130-1 (i.e., XYZ News) is accessible
32 on the Internet using the Internet address
33 "www.XYZN.com", and wishes to be included in channel-
34 based network 100. In exchange for a fee paid to the

1 owner of server 110, the owner assigns channel number
2 "010" to Internet address "www.XYZN.com". In addition,
3 the Internet site name "XYZ NEWS" is stored in the
4 Internet name field associated with channel number "010".
5 As described in detail below, updated master channel
6 table 112 is then downloaded from server 110 to user
7 terminals 130-A through 130-D in a scheduled manner,
8 thereby allowing a user to access "XYZ NEWS" simply by
9 entering channel number "010" into user terminals 130-A
10 through 130-D.

11 Each user terminal 130-A through 130-D includes
12 circuitry for downloading and storing channel table data
13 downloaded from server 110, displaying the channel
14 numbers and Internet site names from the downloaded
15 channel table data, allowing a user to enter selected
16 channel numbers, and connecting the user terminal to a
17 selected Internet site 120-1 through 120-4 that is
18 associated with the selected channel number. These user
19 terminal functions, as well as the numerous additional
20 functions described below, can be performed on
21 (implemented in) a wide range of platforms. For example,
22 user terminal 130-A depicts a set-top box arrangement,
23 user terminal 130-B depicts a personal computer platform,
24 user terminal 130-C depicts a cellular telephone
25 platform, and user terminal 130-D depicts a personal
26 digital assistant (PDA) platform. Each of these
27 platforms can be modified to implement the user terminal
28 functions (described below) that are associated with the
29 channel-based network of the present invention. Further,
30 those of ordinary skill in the art will recognize that
31 additional platforms (not shown) may also be used to
32 implement the various functions performed on user
33 terminals 130-A through 130-D. Therefore, the appended

1 claims are not necessarily limited to the preferred
2 embodiment described below.

3 Of the various user terminals 130-A through 130-D
4 shown in Fig. 1, user terminal 130-A depicts a presently-
5 preferred embodiment. User terminal 130-A includes a
6 set-top box 131 that is connected to the Internet and to
7 a television 132, and receives channel number selections
8 from a wireless (e.g., infra-red) input device 133. Set-
9 top box 131 includes communication circuitry for
10 interfacing with the Internet using well-known
11 techniques, a channel table memory for storing channel
12 table data, interface circuitry for communicating with
13 television 132 and input device 133, and a central
14 processing unit (CPU). In response to instructions
15 stored in set-top box 131, the CPU of set-top box 131
16 connects user terminal 130-A to a selected Internet site
17 (e.g., site 120-1) by receiving a selected channel number
18 (e.g., "010") entered by a user through input device 133,
19 reading the Internet address (e.g., "www.XYZN.com")
20 associated with the selected channel number from the
21 channel table memory, and transmitting the associated
22 Internet address onto the Internet using the
23 communication circuitry. The selected Internet site then
24 responds by transmitting site information that is
25 received through the communication circuitry and
26 displayed on television 132 using known techniques.
27 Additional details regarding user terminal
28 130-A are provided in the following description of a
29 specific embodiment.

30

31 User Terminal 130-A

32 Fig. 2 is a block diagram showing user terminal 130-
33 A in accordance with one embodiment of the present
34 invention.

1 In the embodiment shown in Fig. 2, input devices 133
2 include, but are not limited to, a remote control 202 and
3 a wireless keyboard 203. Remote control 202 includes a
4 numeric keypad 204, one or more dedicated keys 205 and a
5 joystick 206. Although not specifically indicated,
6 wireless keyboard 203 includes similar dedicated keys,
7 numeric keypad and joystick as those provided on remote
8 control 202. In addition, keyboard 203 includes a
9 standard QWERTY keyboard for entering text messages. As
10 described in more detail below, each input device 133 of
11 the disclosed embodiment must be capable of providing
12 unicode symbols to set-top box 131 by transmitting infra-
13 red (IR) signals to an IR detector in set-top box 131.
14 In other embodiments, other technologies (such as hard-
15 wired connections) may be utilized to transmit input
16 signals to set-top box 131.

17 In addition to display 132, user terminal 130-A is
18 provided with one or more output devices that include a
19 compact flash 231 and a printer 233. These output
20 devices are described in more detail below.

21 Set-top box 131 includes central processing unit
22 (CPU) 210, system controller 211, micro-controller unit
23 (MCU) 212, IR receiver 213, interrupt switch 214, smart
24 card socket 215, communications port socket 216,
25 communication port 217, synchronous dynamic random access
26 memory (SDRAM) 218, dedicated flash memory 219, compact
27 flash socket 220, asset manager flash memory 222, display
28 controller 223, audio controller 224, speaker 225,
29 internal microphone 226, external microphone jack 227 and
30 parallel port socket 228. The various elements are
31 connected by an internal bus 230 as illustrated. A
32 compact flash card 231 is selectively insertable into
33 compact flash socket 220, and a printer 233 is
34 selectively connected to parallel port socket 228.

1 Similarly, a smart card 232 is selectively insertable
2 into smart card socket 215.

3 In the described embodiment, CPU 210 is a 32-bit, 80
4 MHz Super-H RISC processor (80 MIPS), which is available
5 from Hitachi as Part No. SH7709 (SH-3). CPU 210 runs the
6 Windows CE® operating system. Other processors can be
7 used in other embodiments. CPU 210 interfaces directly
8 with system controller 211. In the described embodiment,
9 system controller 211 is formed on an application
10 specific integrated circuit (ASIC) which includes a
11 complete set of integrated Windows® CE drivers with
12 integrated power management. The functions provided by
13 system controller 211 are compatible with Windows® CE 2.x
14 and above.

15 CPU 210 and system controller 211 are coupled to the
16 other elements of set-top box 131 as illustrated.
17 Communications port 217, which is inserted into socket
18 216, enables set-top box 131 to access the Internet.
19 Thus, communications port 217 can be a dial-up modem that
20 provides a conventional 16C550 compatible serial channel,
21 such as an RS-232 serial channel, on a standard telephone
22 line. Alternatively, communications port 217 can be a
23 10baseT port, a direct subscriber line (DSL) modem or a
24 V.90 protocol modem. Other communications ports enabling
25 access to the Internet can be used in other embodiments.
26 Socket 216 advantageously enables different types of
27 communication ports to be easily installed in set-top box
28 131.

29 In the described embodiment, SDRAM 218 is a
30 conventional 16 MByte volatile memory circuit. In other
31 embodiments, SDRAM 218 can have other sizes or be formed
32 from another type of volatile memory. As described in
33 more detail below, SDRAM 218 stores channel table
34 information which is used to access predetermined web

1 sites on the Internet. SDRAM 218 advantageously exhibits
2 a relatively high density and fast access times.

3 In the described embodiment, dedicated flash memory
4 219 is a 16 MByte memory circuit from the 640F series
5 available from Intel Corp. In other embodiments, flash
6 memory 219 can have other sizes or be formed from another
7 type of non-volatile memory. As described in more detail
8 below, flash memory 219 provides non-volatile storage for
9 the latest (most current) version of one or more channel
10 tables 219A-219B that are downloaded from server 110 (see
11 Fig. 1). For this reason, flash memory 219 will be
12 referred to as channel table flash memory 219.

13 Fig. 3(A) is simplified diagram depicting an example
14 of the data stored in channel table flash memory 219.
15 Channel table flash memory 219 is divided into two or
16 more sections (e.g., USER 1 channel table 219A and USER 2
17 channel table 219B), each section storing channel table
18 data for a registered user of user terminal 130-A.
19 Although Fig. 3(A) shows two channel tables, channel
20 table flash memory 219 is capable of storing any number
21 of channel tables for a corresponding number of users.
22 Each channel table includes a list of channel numbers
23 (CH. NO.), Internet site names (SITE NAME), Internet site
24 addresses (SITE ADDRESS), parental control codes, and
25 favorite site codes. Each channel number is encoded as a
26 unicode value that is assigned by server 110 (Fig. 1) to
27 a particular Internet site. Each Internet site name is a
28 text field that includes either a description of an
29 associated Internet site, or a recognizable Internet name
30 (e.g., America Online). The parental control codes are
31 optionally provided to allow a parent to selectively
32 restrict the Internet sites that can be accessed by a
33 young user. For example, an adult administrator (e.g.,
34 USER 1) of a set-top box may restrict access of a minor

1 user (e.g., user 2) to an adult-content site (e.g., ADULT
2 SITE, channel number 60) by setting the parent code for
3 this site to "N" (as indicated in channel table 219B).
4 The favorite site codes are optionally provided to allow
5 quick listing of a user's favorite Internet sites in a
6 convenient manner (e.g., by pressing function key F1 on
7 remote control 202 while displaying the channel table
8 menu). In the described embodiment, each entry of the
9 channel table (i.e., channel number, site name, site
10 address, parental code and favorite code) requires 100
11 bytes of storage. The three digit channel number enables
12 up to 1000 channel entries. Thus, each channel table can
13 require up to 100 kB in channel table flash memory 219.

14 Returning now to Fig. 2, compact flash memory card
15 231 can be connected to set-top box 131 through compact
16 flash socket 220. In the described embodiment, compact
17 flash socket 220 includes a 32-bit wide fine pitch
18 DRAM/Flash DIMM socket for receiving a compact flash
19 memory card. As described in more detail below, compact
20 flash memory card 231 is capable of storing information
21 downloaded from the Internet by set-top box 131, such as
22 e-mail. Compact flash memory card 231 can then be
23 removed from socket 220 and re-installed in a compatible
24 device, thereby enabling the transfer of data from set-
25 top box 131 to another device.

26 CPU 210 and system controller 211 further support an
27 IrDA (Infra-red Data Association) protocol and two fully
28 compliant PS/2 keyboard/mouse interface ports. Up to two
29 external PS/2 compatible devices can be connected to
30 system controller 211 through the two PS/2 interface
31 ports. Thus, when a user presses a key, IR receiver 213
32 receives corresponding infra-red signals from either
33 remote control 202 or wireless keyboard 203, and provides
34 these signals to micro-controller 213. Micro-controller

1 213 identifies the origin of these infra-red signals by
2 identification codes included in the infra-red signals,
3 and routes the data signals (i.e., identifying which key
4 was pressed by the user) received from remote control 202
5 to one of the PS/2 ports, and the data signals received
6 from wireless keyboard 203 to the other one of the PS/2
7 ports.

8 CPU 210 and system controller 211 also support a
9 smart card access protocol. Smart card 232 is inserted
10 into smart card socket 215, thereby providing a
11 connection between smart card 232 and system controller
12 211. Interrupt switch 214 generates an interrupt signal
13 each time that a smart card is inserted or removed from
14 smart card socket 215. In general, smart card 232
15 includes identification information that is specific to
16 the owner of the smart card.

17 Fig. 3(B) is a block diagram illustrating smart card
18 232 in accordance with the described embodiment. Smart
19 card 232 includes a socket 310 that interfaces with
20 socket 215 (see Fig. 2), and a controller 320 for
21 preventing unauthorized reading from and/or writing to a
22 non-volatile memory 330. Non-volatile memory 330 stores
23 limited-write data that is protected by a write protect
24 fence, and may also store optional routinely-rewritten
25 data.

26 The limited-write data, which is located within the
27 write protect fence in Fig. 3(B), includes a customer
28 number 331, a personal identification number (USER PIN)
29 332, a user home page URL 333, a security password 334,
30 POP information 335, and user age identifier 336. In one
31 embodiment, a "customer" is defined as the group of users
32 associated with user terminal 130-A that can have
33 corresponding channel tables stored in channel table
34 flash memory 219. An example of a "customer" is a family

1 that includes one or more adults and one or more
2 children. Each user will typically have his or her own
3 smart card. Each person in a customer group will share
4 the same customer identification number 331. However,
5 each person in a customer group will have a unique PIN
6 332. As discussed below, the customer identification
7 number 331 is matched with a serial number stored in
8 asset manager flash 222 by server 110. Home page URL
9 field 333 can be used to access a personal home page
10 provided at server 110 (see Fig. 1) for the user.
11 Alternatively, home page URL field 333 may identify a
12 specific Internet site provided by a smart card
13 distributor (i.e., a bank account, or a promotional
14 site). Password 334 is a user-selected word that
15 authorizes changes to the limited-write data. POP
16 information 335, which is the same for all members of a
17 customer group, is used if communication port 217
18 requires dial-up Internet access. Age identifier 336
19 indicates the age group of the particular user. For
20 example, age identifier 336 can indicate that the user is
21 under 18 years old. Alternatively, age identifier 336
22 can identify a specific age range of the user.

23 The optional routinely-rewritten data provided on
24 smart card 232 includes recently-visited site information
25 and favorite site information. This information may be
26 downloaded onto smart card 232 at the end of each
27 session, thereby allowing the smart card owner to access
28 the channel-based network as a "guest" (i.e., using a
29 terminal on which the user is not a customer).
30 Alternatively, the recently-visited site information and
31 favorite site information may be stored at server 110,
32 thereby allowing the user to access this information
33 through any authorized user terminal of the channel-based
34 network.

1 Fig. 3(C) is a block diagram illustrating an example
2 of the data stored in asset manager flash 222. Asset
3 manager flash 222 is a non-volatile memory that is
4 permanently connected to internal bus 230. Asset manager
5 flash 222 permanently stores information that identifies
6 set-top box 131, such as serial number 342 and
7 manufacture date 344. Asset manager flash 222 also
8 stores current channel table version information 344 for
9 each user in the customer group associated with set-top
10 box 131. As described in additional detail below, this
11 channel table version information is used to control
12 channel table download operations (i.e., to update a
13 channel table stored in channel table flash 219 when the
14 master channel table 112 is updated; see Fig. 1). In
15 addition, asset manager flash 222 stores one or more
16 operating system version numbers 346 and application
17 software version numbers 347 that are used to
18 automatically upgrade the operations of set-top box 131.
19 In one embodiment, the operating system and application
20 software associated with these numbers is stored on flash
21 219.

22 Referring again to Fig. 2, CPU 210 and system
23 controller 211 combine with display controller 223 to
24 support the display of information on display 132 (e.g.,
25 a conventional television). Display controller 223 also
26 supports the display of information on color or
27 monochrome LCD panels, including QVGA panels and SVGA
28 panels. Display controller 223 is capable of providing a
29 composite video output (RS-170) and a super video (S
30 video) output. In one embodiment, display controller
31 223 includes an IGST Inc. CyberPro 5000 integrated
32 circuit, and is constructed with balanced impedances to
33 enhance display picture quality. In addition, pure red
34 and pure white colors are preferably omitted from

1 incoming video signals, as well as single pixel lines,
2 thereby further enhancing display picture quality.

3 CPU 210 and system controller 211 also combine with
4 audio controller 224 to support 8-bit WAV file record and
5 playback using conventional Windows® CE application
6 programming interfaces (APIs). Audio controller 224 is
7 capable of receiving input signals from internal
8 microphone 226 or an external microphone (not shown),
9 through external microphone jack 227. Audio controller
10 224 provides output signals to speaker 225. Audio
11 controller 224 can also provide left and right output
12 signals (LEFT OUT and RIGHT OUT) to external speakers
13 (e.g., television speakers). The left and right output
14 signals are also combined with the S video signal from
15 display controller 223 to provide a conventional SCART
16 (Syndicat des Constructeurs d'Appareils Radio Recepteurs
17 et Televiseurs) signal, which is the European display
18 protocol. In the described embodiments, display
19 controller 223 and audio controller 224 are connected to
20 display 132.

21

22 Channel-Based Network Operation

23 Fig. 4 is a simplified block diagram showing various
24 system functions performed by channel-based network 100
25 in accordance with an embodiment of the present
26 invention. Specifically, Fig. 4 depicts various
27 functions executed by server 110 and set-top box 131 to
28 establish and update channel-based network 100.
29 Although the depicted interactions between functions
30 performed by the CPUs of server 110 and set-top box 131
31 and associated hardware resources are generally accurate,
32 some simplifications are employed to avoid confusion.
33 For example, Fig. 4 user identification (USER ID) depicts
34 information passing directly from smart card 232 to an

1 "AUTHORIZATION/VERSION CHECK" function performed by CPU
2 210 of set-top box 131, instead of through system
3 controller (SYS CNTRLR) 211.

4 Referring to the upper portion of Fig. 4, server 110
5 includes an input terminal 401 (e.g., a personal computer
6 or workstation), a CPU 412, a channel table database 414,
7 a network database 416, and an update manager database
8 418. The hardware components of server 110, both shown
9 and not shown, are conventional and well known to those
10 of ordinary skill in the art. Input terminal 401 is used
11 to enter channel table data and user/terminal information
12 into channel table database 414 and network database 416,
13 respectively, using known data processing techniques. In
14 the disclosed embodiment, the channel table data is
15 encrypted before being stored in channel table database
16 414, thereby minimizing the amount of time needed to
17 download channel table information to set-top box 131
18 (i.e., because encryption is not performed during each
19 download process). Channel table database 414 stores one
20 or more master channel tables entered in this manner.
21 Network database 416 stores user and terminal information
22 used to identify and authorize users that request
23 service. In addition, network database 416 may store
24 optional user home page information that allows each user
25 convenient and secure access to e-mail, chat, and other
26 Internet applications currently available to conventional
27 network users. Update manager database 418 stores
28 terminal information, current channel table version
29 numbers, and other information used to coordinate user
30 terminal update procedures.

31 Figs. 5(A), 5(B), and 5(C) are diagrams depicting
32 the data stored in channel table database 414, network
33 database 416, and update manager database 418 in

1 accordance with a simplified embodiment of the present
2 invention.

3 Fig. 5(A) is a diagram depicting the data fields
4 stored in channel table database 414. For purposes of
5 describing the present invention, channel table database
6 414 stores a single master channel table 112-A. In other
7 embodiments, multiple master channel tables may be stored
8 in channel table database 414. Similar to channel table
9 112 shown in Fig. 1, master channel table 112-A includes
10 channel number, Internet site address and Internet site
11 name information. In addition, master channel table 112-
12 A includes one or more optional data fields that
13 categorize or otherwise identify the material presented
14 in each Internet site listed in master channel table 112-
15 A. For example, as shown in the rightmost column,
16 parental guidance codes, similar to used in the motion
17 picture industry to rate the content of movies, are
18 provided to allow a user terminal administrator (i.e., a
19 parent) to control the types of Internet sites available
20 to a particular user (i.e., a child). For instance, the
21 user terminal administrator may restrict access to all
22 sites rated "PG" or "G". In another embodiment, these
23 parental guidance codes may be utilized by server 110, in
24 conjunction with user age data 336 stored on smart card
25 222 (see Fig. 3(B)), to limit downloaded channel table
26 information that is authorized for a particular age
27 group. Those of ordinary skill in the art will recognize
28 that a wide range of additional data fields may be
29 provided in channel table database 414.

30 As indicated at the lower portion of Fig. 5(A),
31 channel numbers that correspond to well-known services
32 may be assigned to sites providing similar services in
33 channel table database 414. For example, the three-digit
34 number "411" may be assigned to an Internet site

1 providing telephone directory services. In addition, the
2 three-digit number "911" may be assigned to an Internet
3 site providing emergency ambulance services. As
4 discussed in co-owned patent application serial no.
5 xx/xxx,xxx [Attorney Docket CTV-004], three-digit numbers
6 having an easily remembered pattern (e.g., "111", "123",
7 "999") may be assigned to Internet sites willing to pay
8 premium prices for these numbers.

9 Fig. 5(B) is a diagram depicting the data fields
10 stored in network database 416. Network database 416 is
11 primarily used to store customer/user information (i.e.,
12 user name/PIN), "home" user terminal serial number, and
13 user status information. As indicated in greater detail
14 below, the "home" user terminal information is used to
15 determine whether a particular user has accessed the
16 network from the user terminal storing the particular
17 user's personal channel table, or whether the particular
18 user is a "guest" on another user terminal (e.g.,
19 provided at a hotel). User status information is used to
20 determine whether a user is currently authorized to
21 access the network. For example, user "DAN DELAY" is
22 indicated as having an expired account due, for example,
23 to late payment of user fees or misconduct.

24 In addition to the primary customer/user
25 information, network database 416 may store one or more
26 optional data fields that relate to specific options
27 presented in a particular channel-based network. For
28 example, a particular network may provide a "standard"
29 package of Internet sites along with one or more
30 "premium" packages that provides access to exclusive
31 Internet sites (similar to cable television "pay-per-
32 view" events). Using this model, the number of channels
33 of master channel table 112-A that are downloaded to a
34 particular user is determined by the package purchased by

1 the particular user. For example, user "JOE JOCK" may
2 subscribe to a premium package that provides access to
3 sports-based Internet sites. In addition, a young user
4 may only be authorized to download pre-defined children's
5 sites and/or educational sites from master channel table
6 112-A.

7 Additional optional information may be stored in
8 network database that relates to configuration
9 preferences associated with a user's home page. For
10 example, as indicated in display 132 at the bottom of
11 Fig. 4, user page information may include currently-
12 received e-mail messages, stock portfolio information,
13 and links to local news providers that are of particular
14 interest to the user.

15 Those of ordinary skill in the art will recognize
16 that a wide range of additional data fields may be
17 provided in network database 416.

18 Fig. 5(C) is a diagram depicting the data fields
19 stored in update manager database 418. As described in
20 additional detail below, update manager database 418 is
21 used to coordinate the download of updated channel table
22 information to the user terminals connected to channel-
23 based network 100. To facilitate the update process,
24 update manager database 418 stores user and terminal
25 information (which may be shared from network database
26 416), a list of currently-available channel table
27 versions, and an update schedule. The current channel
28 table version information is used to determine whether a
29 user terminal is storing the most recently updated
30 version of master channel table 112-A. The update
31 schedule information is used to coordinate the updating
32 of all user terminals connected to the network to prevent
33 strain on server 110 (e.g., due to too many update
34 process requests at the same time). In one embodiment,

1 the update schedule information may assign groups of
2 users certain time periods during which update processes
3 may be performed. In another embodiment, server 110 may
4 monitor and limit the number of update processes being
5 performed at a particular time. Those of ordinary skill
6 in the art will recognize that a wide range of additional
7 data fields may be provided in update manager database
8 418.

9 Returning to Fig. 4, in addition to data entry,
10 server 110 automatically performs several network
11 operation functions that maintain and update channel-
12 based network 100. The network operation functions
13 performed by server 110 include user terminal
14 authorization (AUTHORIZATION), download control (DOWNLOAD
15 CNTL), update control (UPDATE CNTL), version check
16 (VERSION CHECK). As described in detail below, CPU 412
17 automatically performs (i.e., without user participation)
18 the terminal authorization and download control functions
19 such that server 110 to controls (authorizes) and updates
20 user terminals of channel-based network 100 from a
21 centralized location, thereby allowing users to simply
22 turn on their user terminals and connect to desired
23 Internet sites in a manner similar to operating a
24 television. In addition, CPU 412 performs user home page
25 hosting functions similar to those provided by currently-
26 existing Internet service providers.

27 Fig. 6 is a simplified state diagram illustrating
28 the main network operating functions performed by server
29 110 in accordance with an embodiment of the present
30 invention. In particular, the main network operating
31 functions included in Fig. 6 are user/terminal
32 information input operations, channel table data update
33 operations, and server-to-terminal communications with
34 the user terminals of channel-based network 100.

1 Referring to the leftmost column of Fig. 6, a
2 user/terminal information input operation is initiated
3 when new or updated user and/or terminal information is
4 entered via input terminal 401 (Fig. 4) into server 110
5 (step 610). The new/updated information is stored in
6 network database 416 (step 615). Referring to Fig. 5(B),
7 when new user/terminal data is entered, this step
8 involves creating a new record identified, for example,
9 by user name (e.g., JOE JOCK), customer name (e.g.,
10 CUSTOMER 2), and the user terminal (e.g., TERMINAL 2)
11 upon which the new user is a "resident" user. Other
12 information associated with the new user, including the
13 channel table package requested by the user (e.g.,
14 SPORTS), and the subscription status (e.g., CURRENT), are
15 also stored in network database 416. Returning to Fig.
16 6, after the new data is entered, update manager database
17 418 is updated to include a new record for the new user.
18 Referring to Fig. 5(C), this process involves entering
19 terminal and user identification data, and the version
20 number of the master channel table stored in channel
21 table database 414. For example, assuming that a portion
22 of master channel table 414 is designated as the SPORTS
23 channel type subscribed to by user JOE JOCK, a version
24 number (e.g., SPORTS 013) is stored in update manager
25 database 418 in the JOE JOCK record that indicates the
26 current channel table version available for download to
27 TERMINAL 2. In addition, an update schedule code is
28 provided in accordance with a predetermined update policy
29 generated by server 110. Referring back to Fig. 6, after
30 step 620, server 110 then returns to an idle state
31 awaiting further function requests.

32 Referring now to the center column of Fig. 6, a
33 channel table update operation is initiated when new or
34 updated channel table data is entered via input terminal

1 401 (Fig. 4) into server 110 (step 630). As described
2 above with reference to Fig. 5, the channel table update
3 operation is typically performed after a selected channel
4 number is assigned to an Internet site, and involves
5 entering an associated Internet address and site name
6 that correspond with the Internet site. In one
7 embodiment, all channel table data is encrypted (step
8 635) before it is stored in channel table database 414
9 (step 640). Note that the encryption process (step 650)
10 is performed using a 132-bit or more encryption method.
11 In an alternative embodiment, channel table data may be
12 stored in an unencrypted form, and encryption can be
13 performed during download to a user terminal (however,
14 this embodiment may delay download procedures). Next, an
15 update policy is generated (step 645) that schedules
16 downloading of the updated channel table information to
17 the user terminals. Finally, update manager database 418
18 is modified to include both new channel table version
19 numbers and update schedule information (step 650). Note
20 that upgrades to operating system software and
21 application software utilized in the user terminals are
22 performed in a manner similar to channel table updates.
23 Server 110 then returns to an idle state awaiting further
24 function requests.

25 Referring to the rightmost column of Fig. 6, server-
26 to-terminal communications are initiated in response to
27 service requests transmitted from a user terminal (step
28 660). The functions performed by server 110 in response
29 to these requests begin with authorization and version
30 check procedures (step 665). If the user and terminal
31 are authorized by server 110, and if a more recent
32 version of the channel table is stored in channel table
33 database 414 than by the user terminal, an authorization
34 code and update available code are transmitted to the

1 requesting user terminal. In response to these codes,
2 the user terminal will automatically request a channel
3 table download (step 670). In response to this request,
4 encrypted channel table data that is authorized for the
5 requesting user terminal is downloaded from channel table
6 database 414 to the user terminal (step 675). Finally,
7 the update manager database 418 is modified to record
8 that the user terminal has been updated (step 680).
9 Server 110 then returns to an idle state awaiting further
10 function requests.

11 Referring now to the lower portion of Fig. 4, the
12 operating system software and application software stored
13 in set-top box 131 are utilized by CPU 210 to perform
14 terminal-to-server communications (i.e., authorization,
15 version check, and download control), decryption of the
16 downloaded channel table data, and interface operations
17 that produce terminal-to-site communications (i.e.,
18 interaction with Internet sites and the user home page
19 hosted by server 110). The authorization function works
20 in conjunction with corresponding functions performed by
21 server 110 to allow centralized control over channel-
22 based network 100 by downloading authorization codes that
23 are used to enable terminal operations for authorized
24 users and terminals. Download control functions
25 performed by set-top box 131 are known to those skilled
26 in the art of network communications.
27 Encryption/decryption is preferably used to prevent the
28 "pirating" of channel table information.

29 Figs. 7 through 9 are diagrams illustrating method
30 steps performed during a user terminal session in
31 accordance with an embodiment of the present invention.
32 The user terminal session generally includes an
33 initiation phase (Figs. 7, 8(A), and 8(B)) and a user
34 interface phase (Fig. 9). Note that, other than

1 customer service interactions (discussed below), all
2 functions performed by set-top box 131 are automatic.
3 That is, all terminal-to-server and server-to-terminal
4 communications performed during the initiation phase are
5 performed without the participation of the user. During
6 user interface operations (i.e., after the initiation
7 phase is completed), a user enters channel numbers and
8 interacts with the user home page and Internet sites
9 provided on the channel-based network by entering channel
10 numbers or interacting with displayed site features using
11 numeric keypad 204, function keys 205, and joystick 206
12 that are provided on the user's input device 133 (see
13 Fig. 2). Therefore, user terminal 130-A operates
14 essentially like a television in that the user need only
15 initiate a user terminal session by inserting a smart
16 card into the user terminal, and then enter selected
17 channel numbers as soon as the user terminal is
18 initialized.

19 Figs. 7, 8(A), and 8(B) are flow diagrams showing
20 data transfers between server 110 and set-top box 131 of
21 user terminal 130-A during an initialization phase of a
22 user terminal session. This initialization phase
23 corresponds with the server-to-terminal communication
24 functions performed by server 110 that are shown in Fig.
25 6 (i.e., steps 660 through 680), and corresponding steps
26 in Figs. 6, 7, 8(A), and 8(B) are identified with like
27 reference numerals. The initiation phase is generally
28 separated into two parts: authorization, which is shown
29 in Fig. 7, and the process of loading of a channel table
30 into SDRAM 218, which is shown as alternative embodiments
31 in Figs. 8(A) and 8(B). Note that operations performed
32 by server 110 are shown on the left side of each figure,
33 and operations performed by set-top box 131 are shown on
34 the right side of each figure.

1 Fig. 7 is a flow diagram illustrating the
2 authorization process performed by set-top box 131 and
3 server 110 in accordance with one embodiment of the
4 present invention. Referring to the upper right side of
5 Fig. 7, set-top box 131 detects the presence of a user
6 and begins an initialization process by detecting the
7 insertion of smart card 232 into socket 215 (step 705).
8 Interrupt switch 214 is physically actuated by the
9 insertion of smart card 232 in socket 215. As a result,
10 interrupt switch 214 transmits an interrupt signal to
11 system controller 211, which in turn notifies CPU 210.
12 In response, CPU 210 clears (erases) SDRAM 218 (step 710)
13 and begins a user authorization process by transmitting a
14 service request message to server 110 using communication
15 port 217 (step 715).

16 Referring to the left side of Fig. 7, server 110
17 responds to the service request transmitted from set-top
18 box 131 by performing an authorization check (step 665-
19 1). First, server 110 transmits a request for user and
20 terminal information (step 730), and in turn receives
21 user identification information from the inserted smart
22 card (e.g., customer identification number 331, user PIN
23 332, and age identifier 336; see smart card 232, Fig.
24 3(B)), and terminal identification information from the
25 asset manager flash memory of the requesting terminal
26 (e.g., box serial number 342; see asset manager flash
27 222, Fig. 3(C)). Server 110 then determines whether the
28 information transmitted from the terminal requesting
29 service identifies a valid customer account (step 730).
30 This step involves comparing the transmitted customer
31 identification information and terminal information with
32 corresponding information stored in network database 416.
33 If the customer account is not valid (e.g., the customer
34 has not paid required periodic fees for access to the

1 network), or if the serial number of the transmitting
2 set-top box 131 is invalid, then server 110 transmits a
3 customer service URL to set-top box 110, thereby causing
4 the customer service site to be automatically accessed by
5 the terminal requesting service (step 760) and displayed
6 by the user terminal (step 765, see bottom right portion
7 of Fig. 7). In one embodiment, the customer service site
8 transmits information regarding the reasons for denying
9 the service request (e.g., delinquent account,
10 unauthorized user terminal). The customer service site
11 also provides a telephone number for the customer to call
12 if there are any additional questions. As described
13 below, the failure of server 110 to transmit an
14 authorization code to set-top box 131 prevents a channel
15 table from being loaded into SDRAM 218, thereby allowing
16 server 110 to remotely enable each user terminal of the
17 channel-based network at the beginning of each user
18 terminal session. If server 110 identifies a valid
19 customer account, then control passes from step 730 to
20 step 735. Next, server 110 determines whether the
21 inserted smart card identifies a resident user of the
22 terminal requesting service, or a guest user (step 735).
23 In one embodiment, this determination is performed by
24 comparing the user identification information (e.g., user
25 PIN or customer number from the inserted smart card) and
26 terminal information (e.g., the box serial number from
27 the asset manager flash) that is received from the
28 requesting terminal with the home terminal number
29 information stored in network database 416. If a guest
30 user is detected (i.e., the received user and terminal
31 identification information fail to match the home
32 terminal number for that user; YES branch from step 735),
33 then server 110 transmits a guest authorization code to
34 the requesting terminal (step 740). Conversely, if a

1 resident user is detected (i.e., the received user and
2 terminal identification information matches the home
3 terminal number for that user; NO branch from step 735),
4 then server 110 transmits a resident user authorization
5 code to the requesting terminal (step 745-1).

6 Returning to the right side of Fig. 7, after
7 transmitting user identification and terminal
8 identification information to server 110 (step 725), set-
9 top box 131 waits to receive an authorization code from
10 server 110. In one embodiment, if a guest authorization
11 code is received from server 110 (step 750), then set-top
12 box 131 determines whether the guest is authorized. This
13 determination process involves checking pre-set flags or
14 information controlled by the owner of set-top box 131,
15 thereby allowing the owner to deny access to guest users.
16 In other embodiments, the guest authorization
17 determination process can be performed before service
18 request (step 715). If a guest is not authorized (NO
19 branch from step 750), then the user terminal is
20 connected to the customer service site hosted by server
21 110 (step 760, see bottom left portion of Fig. 7), which
22 is then displayed by the user terminal (step 765). If a
23 guest is authorized (YES branch from step 750, or if a
24 resident user authorization code is received from server
25 110 (step 745-1), then set-top box 131 completes the
26 initialization process by storing an authorized channel
27 table in SDRAM 218 (step 800, described below with
28 reference to Figs. 8(A) and 8(B)), and then entering the
29 user interface phase (step 900, described below with
30 reference to Fig. 9).

31 Figs. 8(A) and 8(B) are flow diagrams showing the
32 process of loading (storing) a channel table into SDRAM
33 218 in accordance with alternative embodiments. In
34 particular, Fig. 8(A) illustrates a channel table loading

1 process in which a channel table is downloaded into
2 channel table flash 219 before being loaded into SDRAM
3 218 (see Fig. 4). Alternatively, Fig. 8(B) illustrates a
4 channel table loading process in which channel table is
5 downloaded directly into SDRAM 218, and then copied into
6 channel table flash 219. In both embodiments, some of
7 the steps performed during the loading process overlap
8 with steps performed during the authorization process
9 (see Fig. 7), and are therefore identified with like
10 reference numbers.

11 Referring briefly to Fig. 7, note that set-top box
12 131 transmits, along with user and terminal information,
13 a channel table version number to server 110 (step 725).
14 This channel table version number indicates the most
15 recent version of the channel table stored in channel
16 table flash 219 for the user (assuming the user is a
17 resident user).

18 Referring now to the left side of Fig. 8(A), the
19 process of loading (storing) a channel table into SDRAM
20 218 begins with a version check procedure that is
21 performed by server 110 (step 645-2). In one embodiment,
22 this version check procedure is performed after a
23 resident user is identified in the authorization phase
24 (i.e., NO branch of step 735; see Fig. 7) and before the
25 transmission of the authorization code (step 745-1; Fig.
26 7). The version check procedure includes comparing the
27 channel table version number transmitted from set-top box
28 131 with the current channel table version number stored
29 in update manager database 418 (see Fig. 5(C)) for the
30 resident user requesting service (step 737). In one
31 embodiment, an UPDATE AVAILABLE code is assigned a first
32 value (e.g., 1) if the channel table stored in set-top
33 box 131 is different from the current (master) channel
34 table stored by server 110 (step 737N), and assigned a

1 second value (e.g., 0) if the channel table stored in
2 set-top box 131 and the current (master) channel table
3 are the same (step 737Y). This UPDATE AVAILABLE code is
4 then transmitted to set-top box 131 of the requesting
5 user terminal (step 745-2). Note that the transmission
6 of the UPDATE AVAILABLE code may be simultaneous with the
7 transmission of a resident user authorization code (see
8 step 745-1; Fig. 7). Subsequently, if a channel table
9 download request is received from the requesting terminal
10 (step 670), the requested channel table is transmitted to
11 the terminal (step 675), and then the update manager
12 database 418 is modified (step 680) in the manner
13 described above. After update manager database 418 is
14 modified, server 110 returns to an idle state, as shown
15 in Fig. 6.

16 Referring now to the right side of Fig. 8(A), the
17 process of loading a channel table into SDRAM 218 begins
18 with interpreting the UPDATE AVAILABLE code received from
19 server 110 (step 810). Note that this step is only
20 performed for resident users. If no update is available
21 (NO branch of step 810), then set-top box 131 copies the
22 requesting user's channel table from channel table flash
23 219 into SDRAM 218 (step 860), and initiates user
24 interface operations (step 900). If an update is
25 available (YES branch of step 810), or if a guest user is
26 authorized by set-top box 131 (YES branch of step 750;
27 see Fig. 7), then set-top box 131 transmits a request to
28 download the current channel table data (step 820). Note
29 that the specific channel table data requested is
30 determined by the user identification information stored
31 on the inserted smart card and in network database 416,
32 thereby preventing users from accessing unauthorized
33 channel table data. In the disclosed embodiment, if the
34 requesting user is a guest user (NO branch in step 830),

1 then the downloaded channel table information is stored
2 directly into SDRAM 218 (step 840). Conversely, if the
3 requesting user is a resident user (YES branch in step
4 830), then the downloaded channel table is stored in
5 channel table flash 219 (step 850), and then copied into
6 SDRAM 218 (step 860). After a channel table has been
7 stored in SDRAM 218, set-top box 131 enters the user
8 interface phase (step 900), which is described below.

9 Fig. 8(B) shows a channel table loading process
10 according to an alternative embodiment of the present
11 invention. Process steps that are identical to those
12 utilized in the embodiment shown in Fig. 8(A) are
13 identified with the same reference numbers, and the
14 description of these steps is omitted for brevity.

15 Referring to the right side of Fig. 8(B), in
16 accordance with the second embodiment, if the UPDATE
17 AVAILABLE code received from server 110 indicates that
18 channel table flash 219 stores a current channel table
19 for the resident user requesting service (NO branch of
20 step 810), then the channel table is copied from channel
21 table flash 219 to SDRAM 218 (step 815), and then user
22 interface operations are initiated (step 900).
23 Conversely, if an update is available (YES branch of step
24 810), or if a guest user is authorized by set-top box 131
25 (YES branch of step 750; see Fig. 7), then set-top box
26 131 transmits a request to download the current channel
27 table data (step 820). In the second embodiment, the
28 downloaded channel table information is stored directly
29 into SDRAM 218 (step 835). Subsequently, if the
30 requesting user is a resident user (YES branch in step
31 845), then the downloaded channel table is copied into
32 that user's portion of channel table flash 219 (step
33 855). This copying process can occur any time during the
34 session (i.e., not necessarily before user interface

1 operations are initiated, as suggested in Fig. 8(B)). In
2 the disclosed embodiment, user interface operations (step
3 900) are initiated after the copying process (step 855),
4 or if the requesting user is a guest (NO branch from step
5 845). In another embodiment, the copying process can
6 occur any time during the session (i.e., not necessarily
7 before user interface operations are initiated, as
8 suggested in Fig. 8(B)).

9 Fig. 9 is a simplified state diagram illustrating
10 user interface phase 900 that is performed by CPU 210 and
11 system controller 211 of set-top box 131 (see Fig. 2) in
12 accordance with one embodiment of the present invention.
13 As mentioned above, user interface phase 900 is performed
14 after a channel table is loaded (stored) in SDRAM 218
15 (set-top box 131 cannot operate unless this condition is
16 met).

17 Referring to the left side of Fig. 9, in the
18 disclosed embodiment, user interface operations are
19 initiated by transmitting from set-top box 131 the home
20 page URL stored on the inserted smart card, receiving and
21 display home page information downloaded from server 110
22 (step 910), and then entering an idle mode (i.e.,
23 indicated by the horizontal line across the top of Fig.
24 9). This home page site can also be accessed any time
25 during the session by pressing the HOME function key
26 (step 920) on input device 133 (see Fig. 2). Home page
27 operations are then performed using the various input
28 keys provided on input device 133. Although user
29 interface operations are initiated in Fig. 9 by accessing
30 the user's home page, in alternative embodiments
31 initiation may include displaying channel numbers and
32 site names for a predetermined portion of the channel
33 table stored in SDRAM 218 (i.e., pre-selected "favorite"
34 sites).

1 After user interface operations are initialized, the
2 user has several options for accessing additional
3 Internet sites. For example, the user may press a "MENU"
4 function key located on remote 202 (step 930), thereby
5 causing CPU 210 to display channel numbers and site names
6 (not URLs) from the channel table stored in SDRAM 218
7 (Step 935). The menu may include groups of related
8 Internet sites categorized by a common feature (e.g., on-
9 line stores), or simply list available channel numbers
10 and associated Internet site names. The user can enter
11 an Internet site either by selecting the Internet site
12 name using the joystick 206 on remote 202 (i.e.,
13 positioning a cursor and then pressing (clicking) a
14 button associated with the joystick) (step 940), entering
15 the three-digit channel number using the numeric keypad
16 204 on remote 202 (step 942), or pressing a pre-assigned
17 "site" key, which operates in a manner similar to a
18 speed-dial button on a telephone (step 946). If a
19 channel code is entered using any of these methods, CPU
20 210 reads and transmits the corresponding Internet
21 address (URL) from the channel table stored in SDRAM 218,
22 and downloads Internet site information received from the
23 selected Internet site.

24 Alternatively, the user may simply enter a memorized
25 channel number, thereby accessing the selected Internet
26 site without displaying the menu information. For
27 example, the user can enter channel number "010" on
28 numeric keypad 204 of remote 202, thereby causing CPU 210
29 to look up and transmit the URL corresponding with
30 channel number "010" in SDRAM 218 (i.e., www.XYZN.com),
31 thereby allowing the user to immediately access the "XYZ
32 News" site. This feature provides a key advantage over
33 conventional networks that access internet sites using
34 pull-down displays. That is, when a large number of

1 Internet sites are stored in such pull-down displays, a
2 user must perform the tedious task of locating and
3 highlighting a corresponding site name or icon before
4 accessing the selected Internet site. In contrast,
5 similar to locating a favorite television station, the
6 present invention allows a user to enter a memorized
7 channel number, thereby immediately accessing the
8 selected Internet site without manipulating pull-down
9 displays.

10 In addition to accessing Internet sites using
11 channel numbers, the user is able to interact with the
12 Internet sites using numeric keypad or 204 function keys
13 205 (steps 950 and 955) in any manner supported by the
14 selected Internet site. Similarly, joystick function
15 commands supported by the Internet site (i.e.,
16 positioning a cursor to select a product for purchase)
17 are distinguished from channel selection (step 944), and
18 then performed (step 955). Other function keys on remote
19 202 may be provided to correspond with other commonly
20 used browsing and television functions. Examples of such
21 buttons are "BACK" and "FORWARD" (i.e., return to
22 previous sites), "CHANNEL UP" (to access the next
23 numerically-numbered Internet site), and "CHANNEL DOWN".

24 Wireless keyboard 203 operates in a manner similar
25 to remote 202. Thus, the user can enter a channel number
26 using numeric keys on the keyboard. Similarly, site keys
27 can be provided on keyboard 203. In addition, the user
28 can use wireless keyboard 203 to enter text messages
29 associated with, for example, e-mail functions provided
30 by the user's home page.

31 The user removes smart card 232 when the session is
32 completed (step 960). The physical removal of smart card
33 232 again actuates interrupt switch 214, thereby
34 transmitting an interrupt signal to CPU 210 via system

1 controller 211. In one embodiment, CPU 210 ignores
2 (disables) all signals received from input device 133
3 when no smart card is detected (step 970). In another
4 embodiment, CPU 210 may erase SDRAM 218 upon removal of
5 the smart card, thereby erasing the channel table
6 information previously stored in SDRAM 218.

7 Other modifications to the disclosed channel-based
8 network are also possible. For example, as indicated in
9 Fig. 1 by user terminal 130-C, a cellular "web" phone may
10 be produced that utilizes hardware and software
11 components different from those indicated in Fig. 2 to
12 perform some or all of the user terminal functions
13 described above. Further, although the cost and
14 simplification benefits of user terminal 130-A (described
15 above) would be diminished, the user terminal functions
16 of the present invention can be performed on a personal
17 computer running a high-level operating system such as
18 Windows 95. Thus, the invention is limited only by the
19 following claims.

1 CLAIMS

2

3 1. A user terminal of a channel-based network, the
4 user terminal comprising:

5 a memory circuit that is configured to store a
6 channel table, the channel table including a plurality of
7 channel numbers, each channel number having an associated
8 Internet address and an associated Internet site name;

9 an input device for entering a selected channel
10 number; and

11 means for reading the Internet address associated
12 with the selected channel number from the memory circuit,
13 and for connecting the user terminal to a selected
14 Internet site that is addressed by the Internet address
15 associated with the selected channel number.

16

17 2. The user terminal according to Claim 1, wherein
18 the memory circuit comprises a synchronous dynamic random
19 access memory (SDRAM).

20

21 3. The user terminal according to Claim 1, wherein
22 the memory circuit comprises a flash memory.

23

24 4. The user terminal according to Claim 3, wherein
25 the flash memory includes a first section for storing a
26 first channel table and a second section for storing a
27 second channel table.

28

29 5. The user terminal according to Claim 3, wherein
30 each Internet address stored in the channel table
31 includes an associated parental guidance code, and
32 wherein processor includes means for preventing the
33 transmission of Internet addresses that are associated

1 with parental guidance codes having a predetermined
2 value.

3

4 6. The user terminal according to Claim 3, wherein
5 each Internet site name stored in the channel table
6 includes an associated favorite site code, and wherein
7 processor includes means for listing on the display
8 apparatus a group of Internet site names that are
9 associated with favorite site codes having a
10 predetermined value.

11

12 7. The user terminal according to Claim 1, further
13 comprising a display apparatus for displaying the
14 plurality of channel numbers and associated Internet site
15 names that are stored in the memory circuit.

16

17 8. The user terminal according to Claim 7, where
18 the display apparatus comprises a television.

19

20 9. The user terminal according to Claim 1, wherein
21 said means for reading comprises:

22 communication circuitry configured to transmit
23 signals to and receive signals from the Internet;

24 a control unit for receiving the selected channel
25 number from the input device; and

26 a processor configured to read the Internet address
27 associated with the selected channel number from the
28 memory circuit, and to transmit the associated Internet
29 address via the communication circuitry onto the
30 Internet.

31

32 10. The user terminal according to Claim 9, wherein
33 the control unit comprises a system controller and a

1 micro-controller connected to the system controller via a
2 PS/2 interface port.

3

4 11. The user terminal according to Claim 10,
5 wherein the control unit further comprises an infra-red
6 detector connected to the micro-controller, and wherein
7 the input device comprises means for transmitting infra-
8 red signals to the infra-red detector.

9

10 12. The user terminal according to Claim 11,
11 wherein the input device comprises a numeric keypad, one
12 or more dedicated function keys and a joystick.

13

14 13. The user terminal according to Claim 12,
15 wherein the input device is implemented in a remote
16 control unit.

17

18 14. The user terminal according to Claim 12,
19 wherein the input device includes a QWERTY keyboard.

20

21 15. The user terminal according to Claim 8,
22 further comprising a smart card socket and an interrupt
23 switch connected between the system controller and the
24 smart card socket.

25

26 16. The user terminal according to Claim 1, further
27 comprising an asset manager memory for storing a serial
28 number of the user terminal, and for storing a version
29 number of the channel table stored by the memory circuit.

30

31 17. The user terminal according to Claim 1, wherein
32 the user terminal comprises a set-top box connected to a
33 television.

34

1 18. The user terminal according to Claim 1, wherein
2 the user terminal comprises a personal computer.

3

4 19. The user terminal according to Claim 1, wherein
5 the user terminal comprises a cellular telephone.

6

7 20. The user terminal according to Claim 1, wherein
8 the user terminal comprises a personal digital assistant.

9

10 21. A user terminal of a channel-based network that
11 is connected to the Internet, the user terminal
12 comprising:

13 a non-volatile memory circuit for storing a first
14 channel table, the first channel table including a
15 plurality of channel numbers, each channel number having
16 an associated Internet address and an associated Internet
17 site name;

18 a volatile memory circuit;

19 an input device;

20 a control unit for receiving a selected channel
21 number entered by a user through the input device; and

22 means for selectively copying the first channel
23 table from the non-volatile memory circuit to the
24 volatile memory circuit, for reading the Internet address
25 associated with the selected channel number from the
26 volatile memory circuit, and for transmitting the
27 associated Internet address via the communication
28 circuitry onto the Internet, thereby connecting the user
29 terminal to a selected Internet site that is addressed by
30 the associated Internet address.

31

32 22. The user terminal according to Claim 20,
33 wherein the non-volatile memory circuit is a flash

1 memory, and wherein the volatile memory circuit is a
2 synchronous dynamic random access memory (SDRAM).

3

4 23. The user terminal according to Claim 20,
5 further comprising:

6 communication circuitry for downloading a second
7 channel table from the Internet;

8 means for detecting one of a resident user and a guest
9 user; and

10 means for storing the downloaded second channel
11 table in the non-volatile memory circuit when the
12 resident user is detected, and for storing the downloaded
13 second channel table in the volatile memory when the
14 guest user is detected,

15 wherein, when the resident user is detected, the
16 means for selectively copying copies the second channel
17 table into the volatile memory after it is stored in the
18 non-volatile memory circuit.

19

20 24. The user terminal according to Claim 23,
21 wherein the means for detecting comprises a system
22 controller, a smart card socket, and an interrupt switch
23 connected between the smart card socket and the system
24 controller.

25

26 25. The user terminal according to Claim 24,
27 further comprising means for erasing said volatile memory
28 in response to an interrupt control signal transmitted
29 from the interrupt switch.

30

31 26. A user terminal of a channel-based network that
32 is connected to the Internet, the channel-based network
33 including a system server and an Internet site having
34 Internet address, the user terminal comprising:

1 means for downloading a channel table from the system
2 server via the Internet, the channel table including a
3 plurality of channel numbers associated Internet
4 addresses and associated Internet site names, wherein a
5 first channel number is associated with the Internet
6 address of the Internet site and an Internet name that is
7 descriptive of the Internet site; and

8 means for transmitting the Internet address from the
9 downloaded channel table onto the Internet when the first
10 channel number is entered by the user, thereby connecting
11 the user terminal to the Internet site.

12

13 27. The user terminal according to Claim 26,
14 further comprising means for transmitting user
15 information from a user's smart card and terminal
16 information from an asset manager memory to the system
17 server via the Internet, and for receiving an
18 authorization code from the system server indicating that
19 the user is authorized to operate the user terminal.

20

21 28. The user terminal according to Claim 27,
22 further comprising:

23 a non-volatile memory circuit;

24 a volatile memory circuit;

25 means detecting whether an authorized user is a resident
26 user or a guest user; and

27 means for storing the downloaded channel table in the
28 non-volatile memory circuit when the user is a resident
29 user, and for storing the downloaded channel table in the
30 volatile memory when the user is a guest user.

31

32 29. A method for operating a user terminal in a
33 channel-based network, the user terminal including a non-
34 volatile memory circuit and a volatile memory circuit,

1 the non-volatile memory circuit being configured to store
2 a user channel table, the user channel table including a
3 plurality of channel numbers, associated Internet
4 addresses and associated Internet site names, wherein the
5 method comprises:

6 detecting the presence of a user;

7 determining whether the user is a resident user or a
8 guest user; and

9 copying a user channel table from the non-volatile
10 memory to the volatile memory only when the user is
11 determined to be a resident user.

12

13 30. The method according to Claim 29, wherein the
14 step of detecting comprises receiving an interrupt signal
15 from an interrupt switch that is connected to a smart
16 card socket indicating the connection of a smart card
17 [232] to the smart card socket.

18

19 31. The method according to Claim 29, further
20 comprising the step of erasing the volatile memory after
21 the step of detecting and before the step of determining.

22

23 32. The method according to Claim 29, further
24 comprising the step of downloading the user channel table
25 from the Internet into the non-volatile memory after the
26 step of determining and before the step of copying.

27

28 33. A method for operating a user terminal in a
29 channel-based network including a system server, the
30 system server including a channel table database storing
31 a master channel table, the user terminal including a
32 non-volatile memory circuit storing a user channel table,
33 wherein each of the master channel table and the user
34 channel table include a plurality of channel numbers,

1 associated Internet addresses and associated Internet
2 site names, wherein the method comprises:
3 determining whether the master channel table is
4 different from the user channel table;
5 downloading the master channel table from the system
6 server when the master channel table is different from
7 the user channel table;
8 storing the master channel table in the non-volatile
9 memory such that the master channel table replaces the
10 user channel table.

11

12 34. The method according to Claim 33, wherein the
13 step of determining comprises:

14 transmitting a version number associated with the
15 user channel table to the system server; and

16 receiving an update available signal from the system
17 server indicating that the user channel table is
18 different from the master channel table.

19

20 35. The method according to Claim 33, wherein the
21 step of downloading comprises:

22 transmitting a request to the system server; and

23 storing the master channel table transmitted from
24 the system server in a volatile memory.

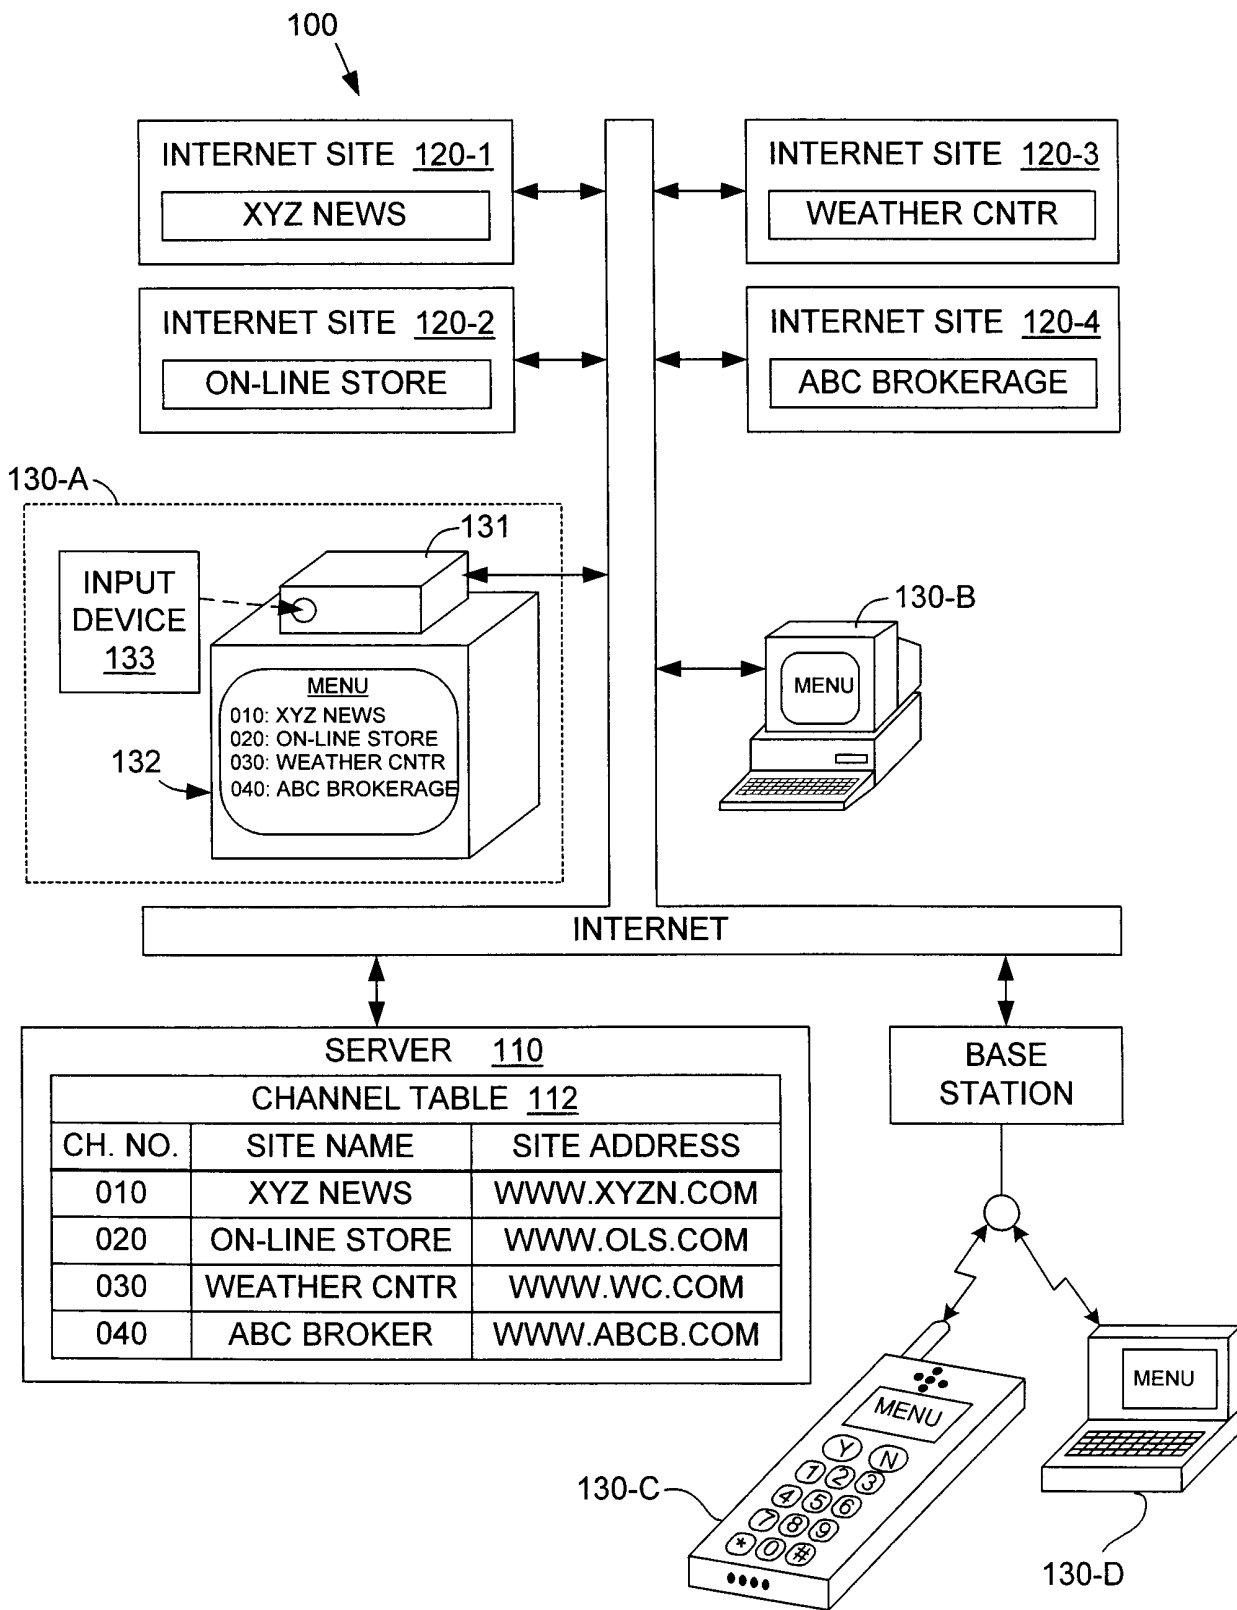


FIG. 1

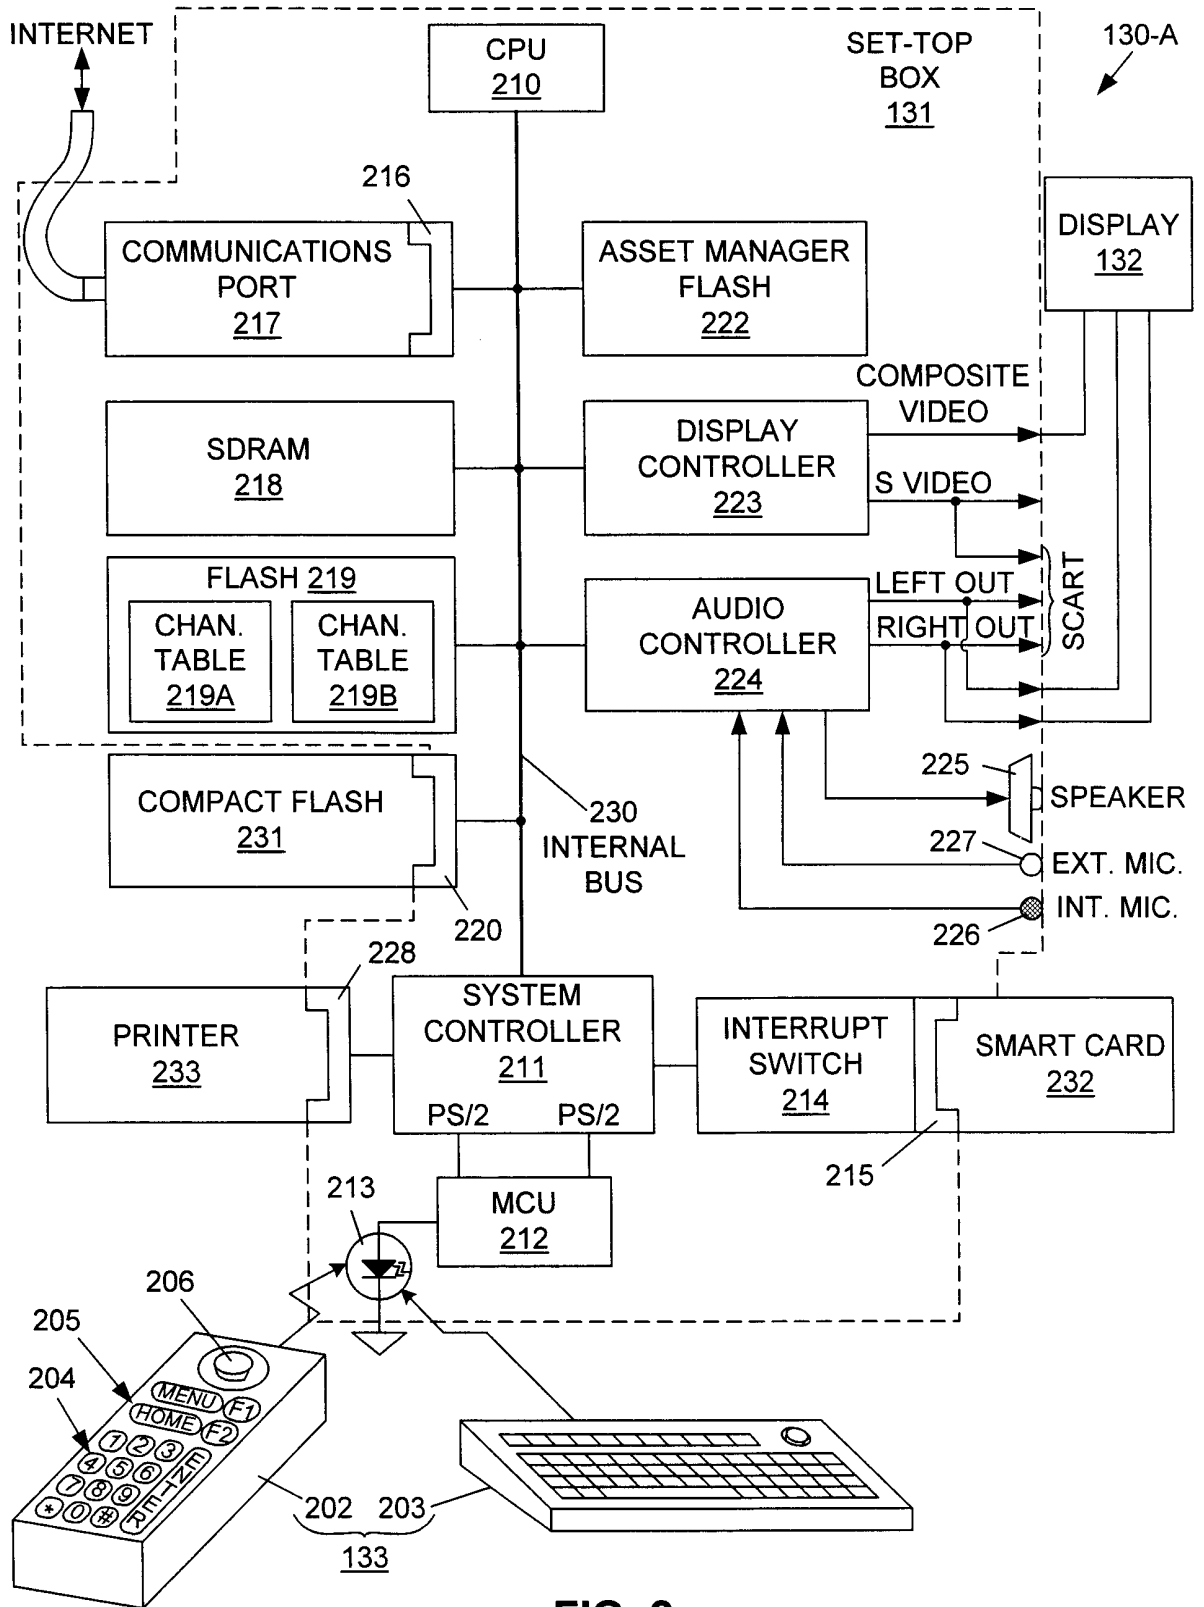


FIG. 2

CHANNEL TABLE FLASH <u>219</u>				
USER 1 CHANNEL TABLE <u>219A</u>				
CH. NO.	SITE NAME	SITE ADDRESS	PARENT CODE	FAVORITE
010	XYZ NEWS	WWW.XYZN.COM	Y	Y
020	ON-LINE STORE	WWW.OLS.COM	Y	N
030	WEATHER CNTR	WWW.WC.COM	Y	N
040	ABC BROKERAGE	WWW.ABCB.COM	Y	N
050	NET SCHOOL	WWW.NETS.COM	Y	N
060	ADULT SITE	WWW.ADULT.COM	Y	N
411	TEL DIRECTORY	WWW.ABELL.COM	Y	N
911	AMBULANCE S.	WWW.SOS.COM	Y	N
USER 2 CHANNEL TABLE <u>219B</u>				
CH. NO.	SITE NAME	SITE ADDRESS	PARENT CODE	FAVORITE
010	XYZ NEWS	WWW.XYZN.COM	Y	N
020	ON-LINE STORE	WWW.OLS.COM	Y	N
030	WEATHER CNTR	WWW.WC.COM	Y	Y
040	ABC BROKERAGE	WWW.ABCB.COM	Y	N
050	NET SCHOOL	WWW.NETS.COM	Y	Y
060	ADULT SITE	WWW.ADULT.COM	N	N
411	TEL DIRECTORY	WWW.ABELL.COM	Y	N
911	AMBULANCE S.	WWW.SOS.COM	Y	N

FIG. 3(A)

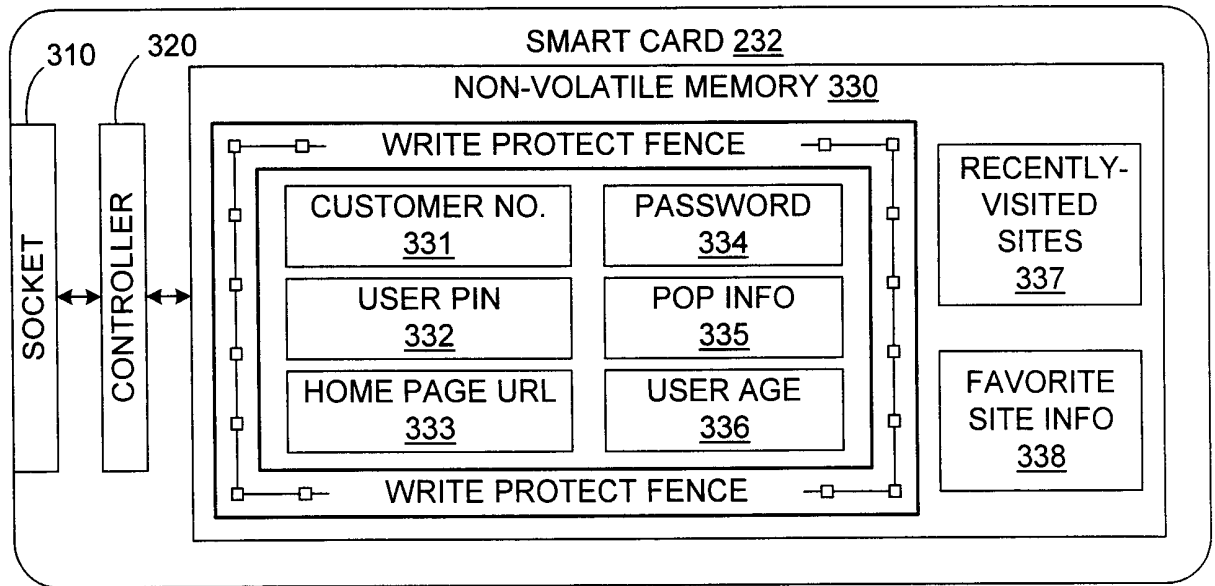


FIG. 3(B)

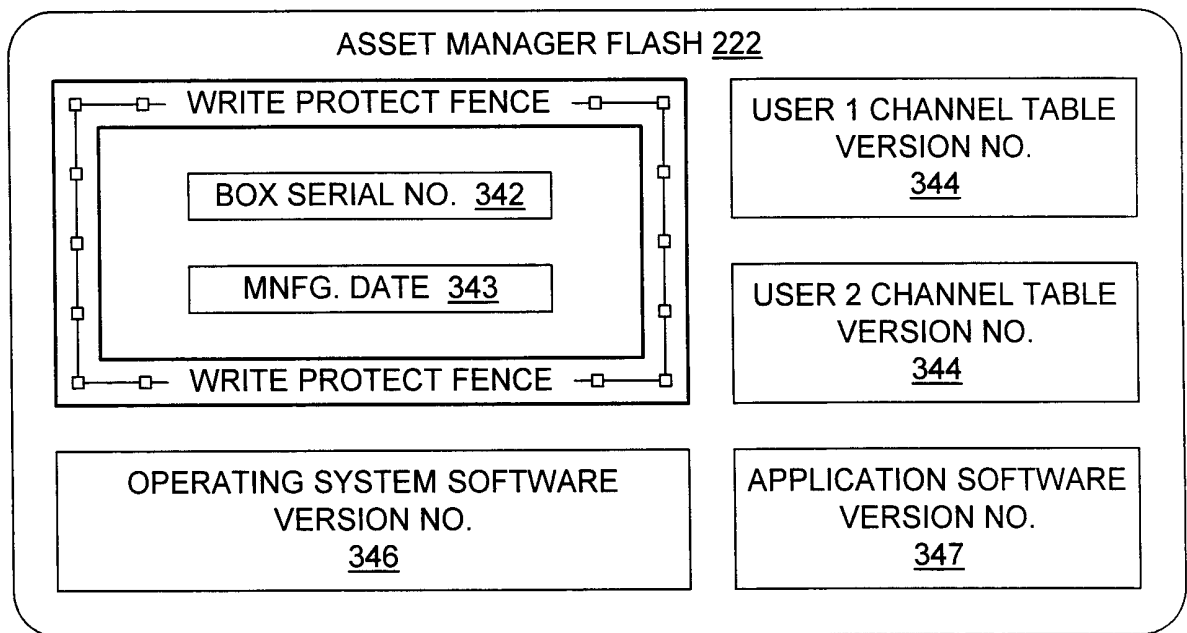


FIG. 3(C)

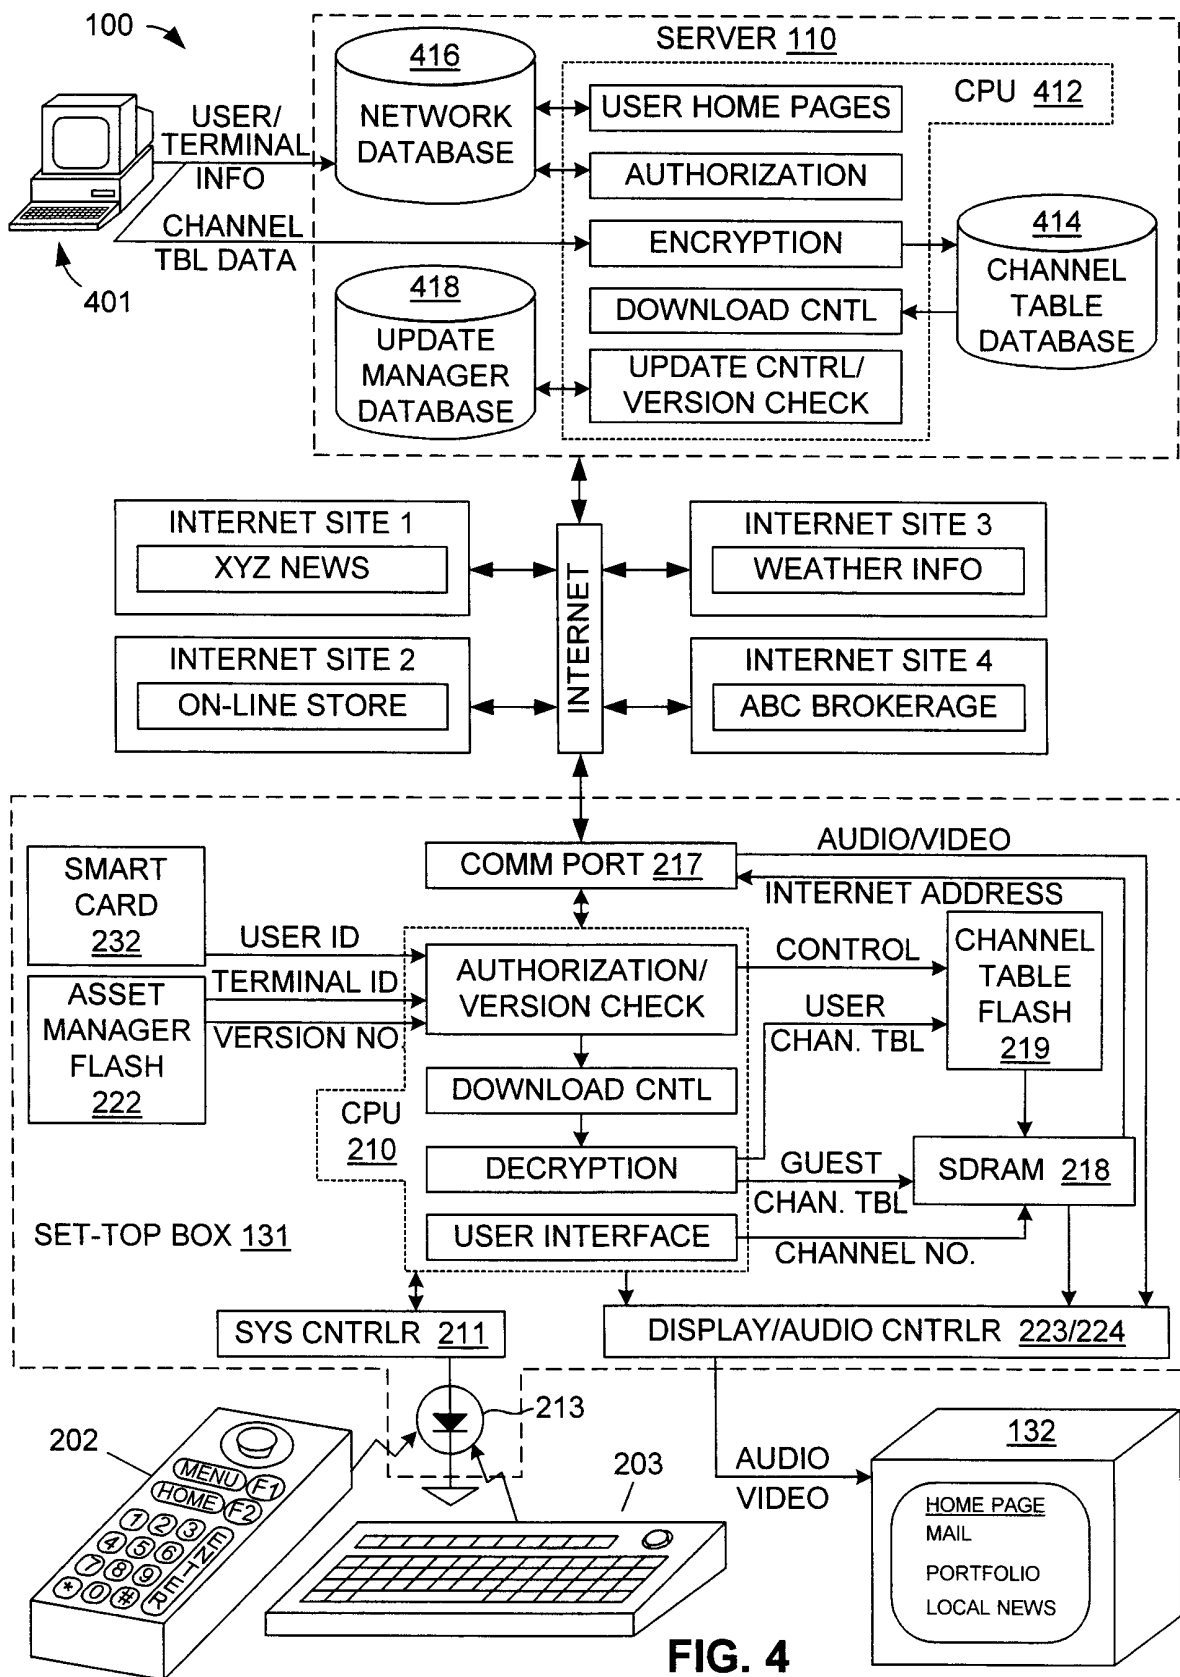


FIG. 4

CHANNEL TABLE DATABASE <u>414</u> (MASTER CHANNEL TABLE 112-A)			
CHANNEL NUMBER	SITE ADDRESS	SITE NAME	RATING
010	WWW.XYZN.COM	XYZ NEWS	PG
020	WWW.OLS.COM	ON-LINE STORE	PG
030	WWW.WC.COM	WEATHER CNTR	G
060	WWW.ADULT.COM	ADULT SITE	X
411	WWW.ABELL.COM	TELEPHONE DIRECTORY	G
911	WWW.SOS.COM	AMBULANCE SERVICE	R

FIG. 5(A)

NETWORK DATABASE <u>416</u>				
USER NAME	HOME TERMINAL NO.	USER STATUS	CHANNEL TABLE TYPE	CUST. NO.
JOHN DOE	TERMINAL 1	CURRENT	ALL	CUSTOMER 1
JANE DOE	TERMINAL 1	CURRENT	SHOPPING	CUSTOMER 1
BOY DOE	TERMINAL 1	CURRENT	CHILDREN	CUSTOMER 1
JOE JOCK	TERMINAL 2	CURRENT	SPORTS	CUSTOMER 2
S. STUDENT	TERMINAL 3	CURRENT	EDUCATION	CUSTOMER 3
DAN DELAY	TERMINAL 4	EXPIRED	ALL	CUSTOMER 4

FIG. 5(B)

UPDATE MANAGER DATABASE <u>418</u>			
TERMINAL NO.	USER NAME	CURRENT CHANNEL TABLE VERSION AVAILABLE	UPDATE SCHEDULED?
TERMINAL 1	JOHN DOE	STANDARD 020	YES
TERMINAL 1	JANE DOUGH	SHOPPING 007	YES
TERMINAL 2	JOE JOCK	SPORTS 013	NO
TERMINAL 4	DAN DELAY	STANDARD 020	NO

FIG. 5(C)

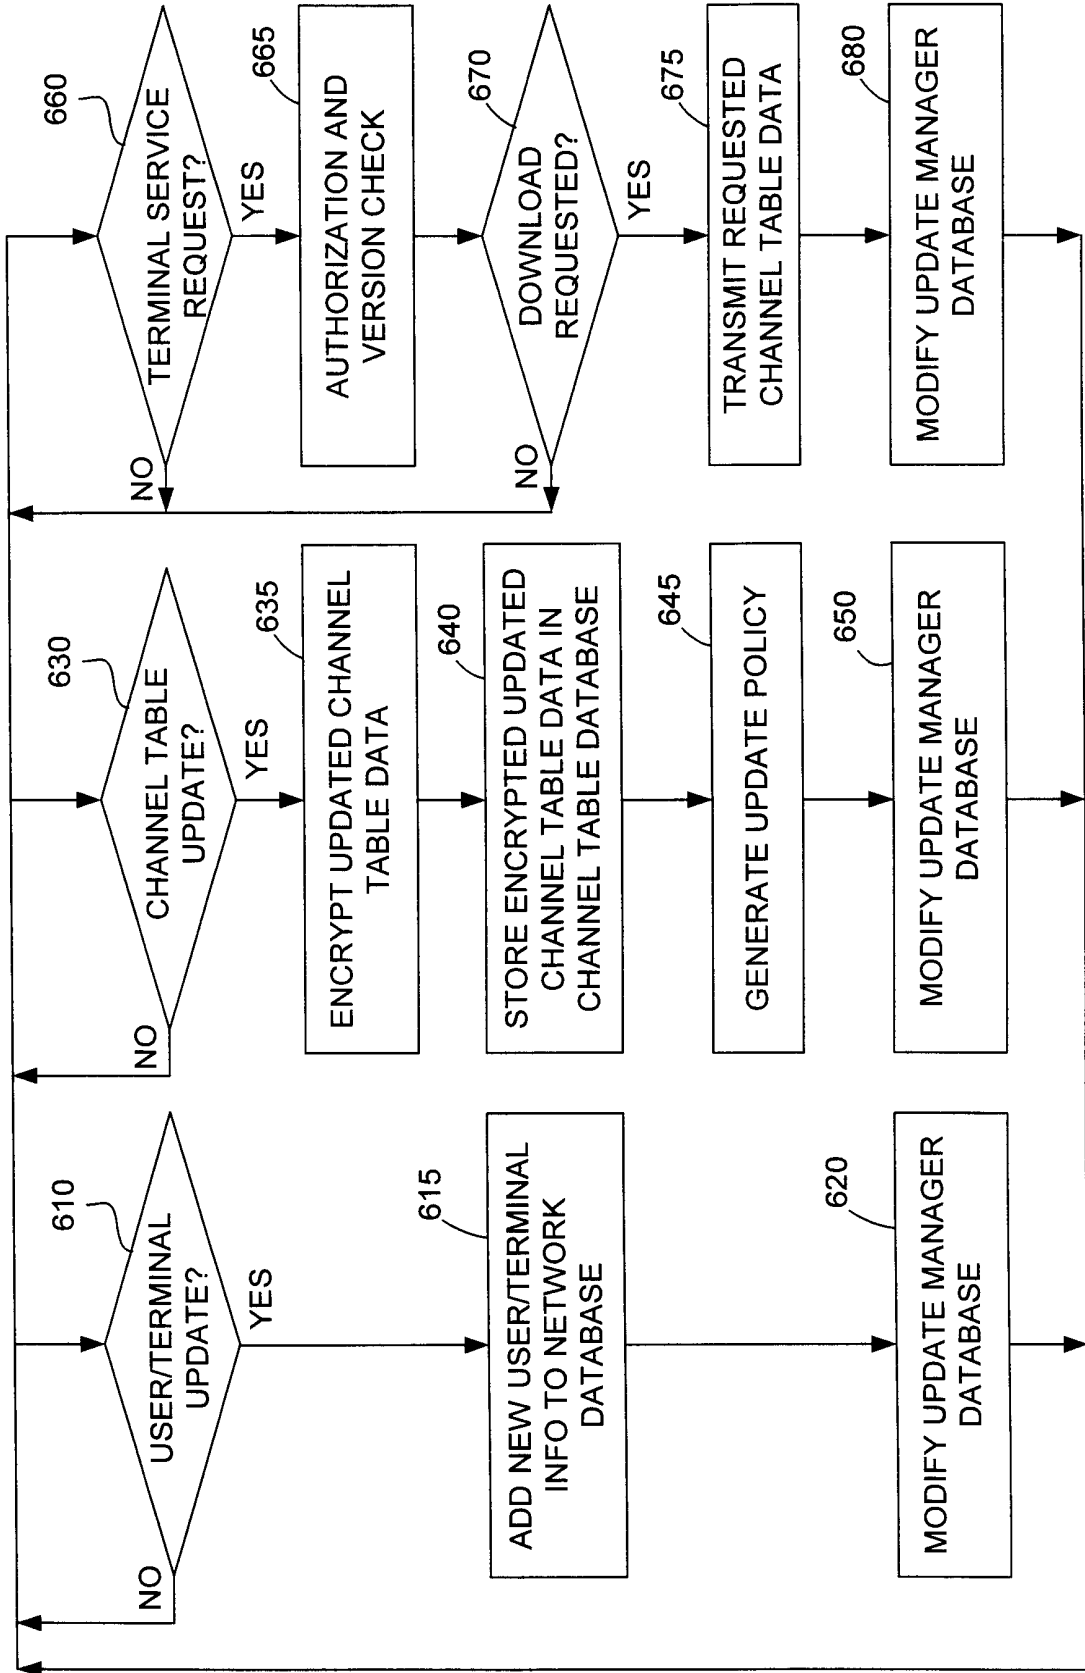


FIG. 6

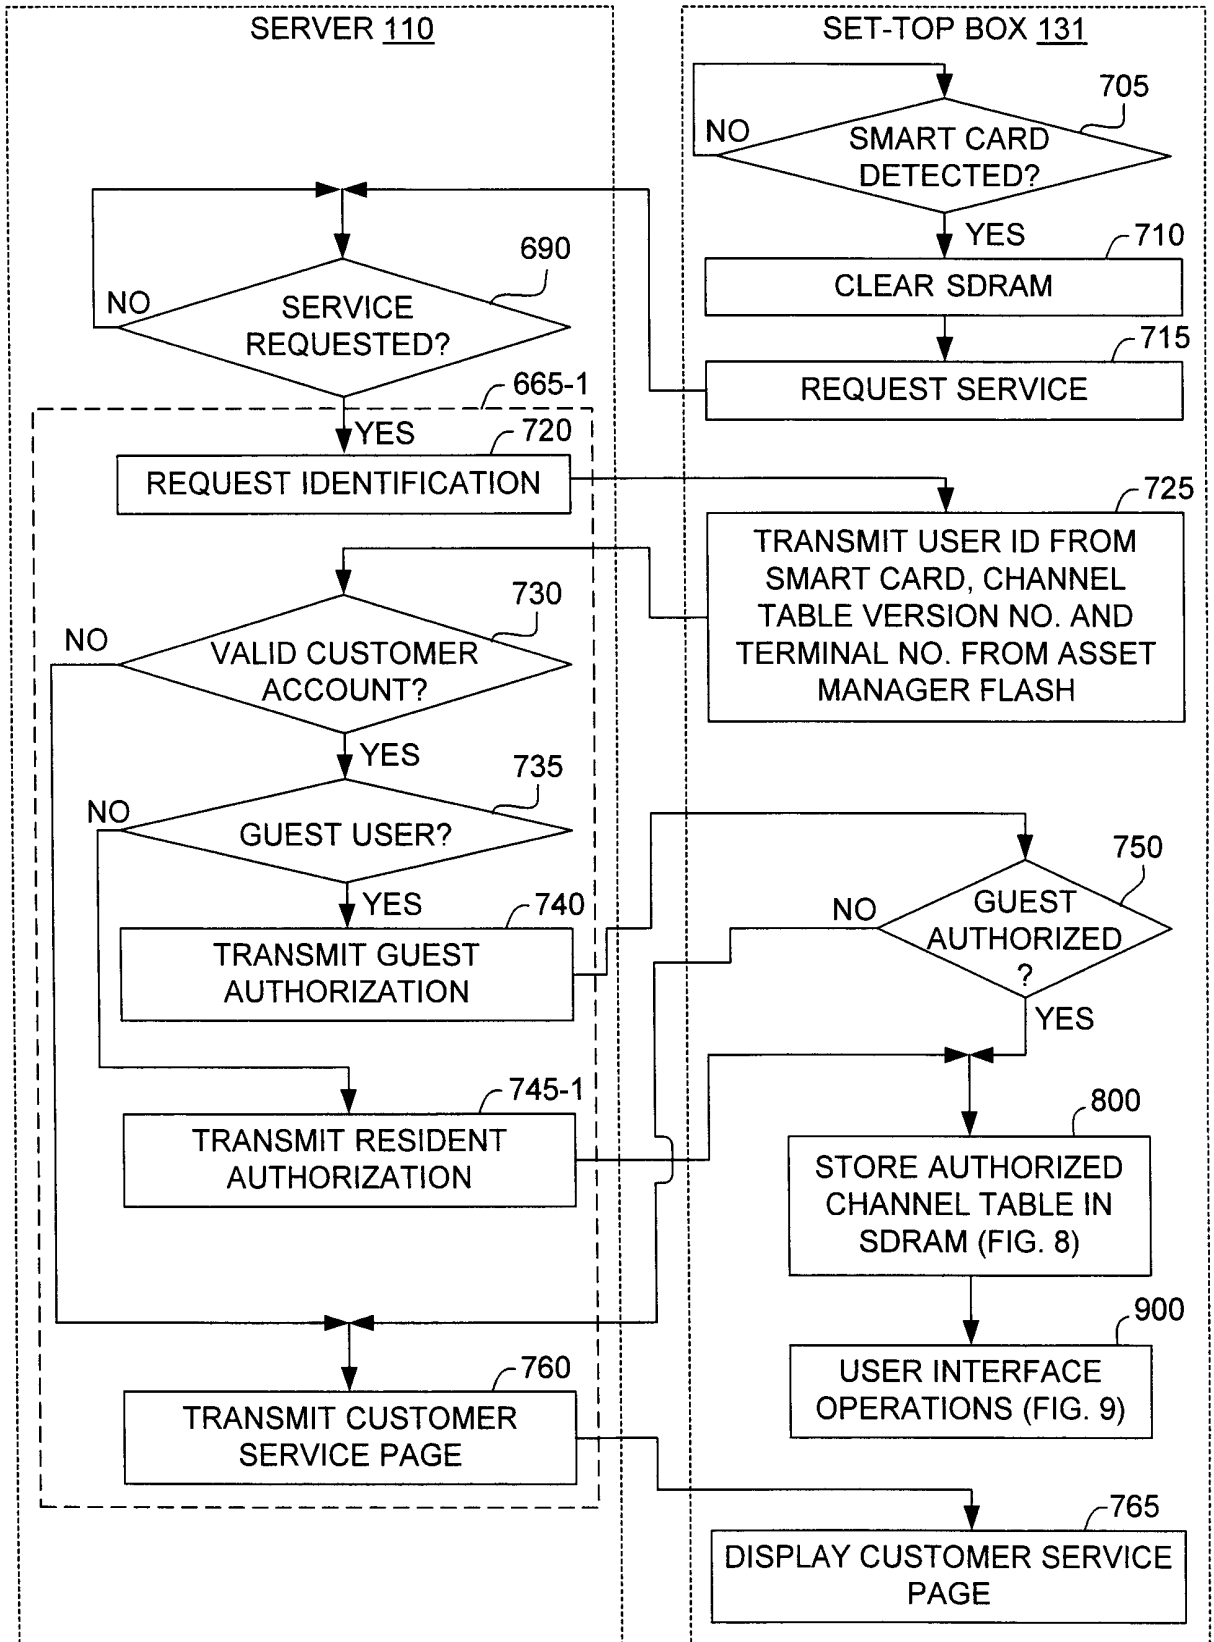


FIG. 7

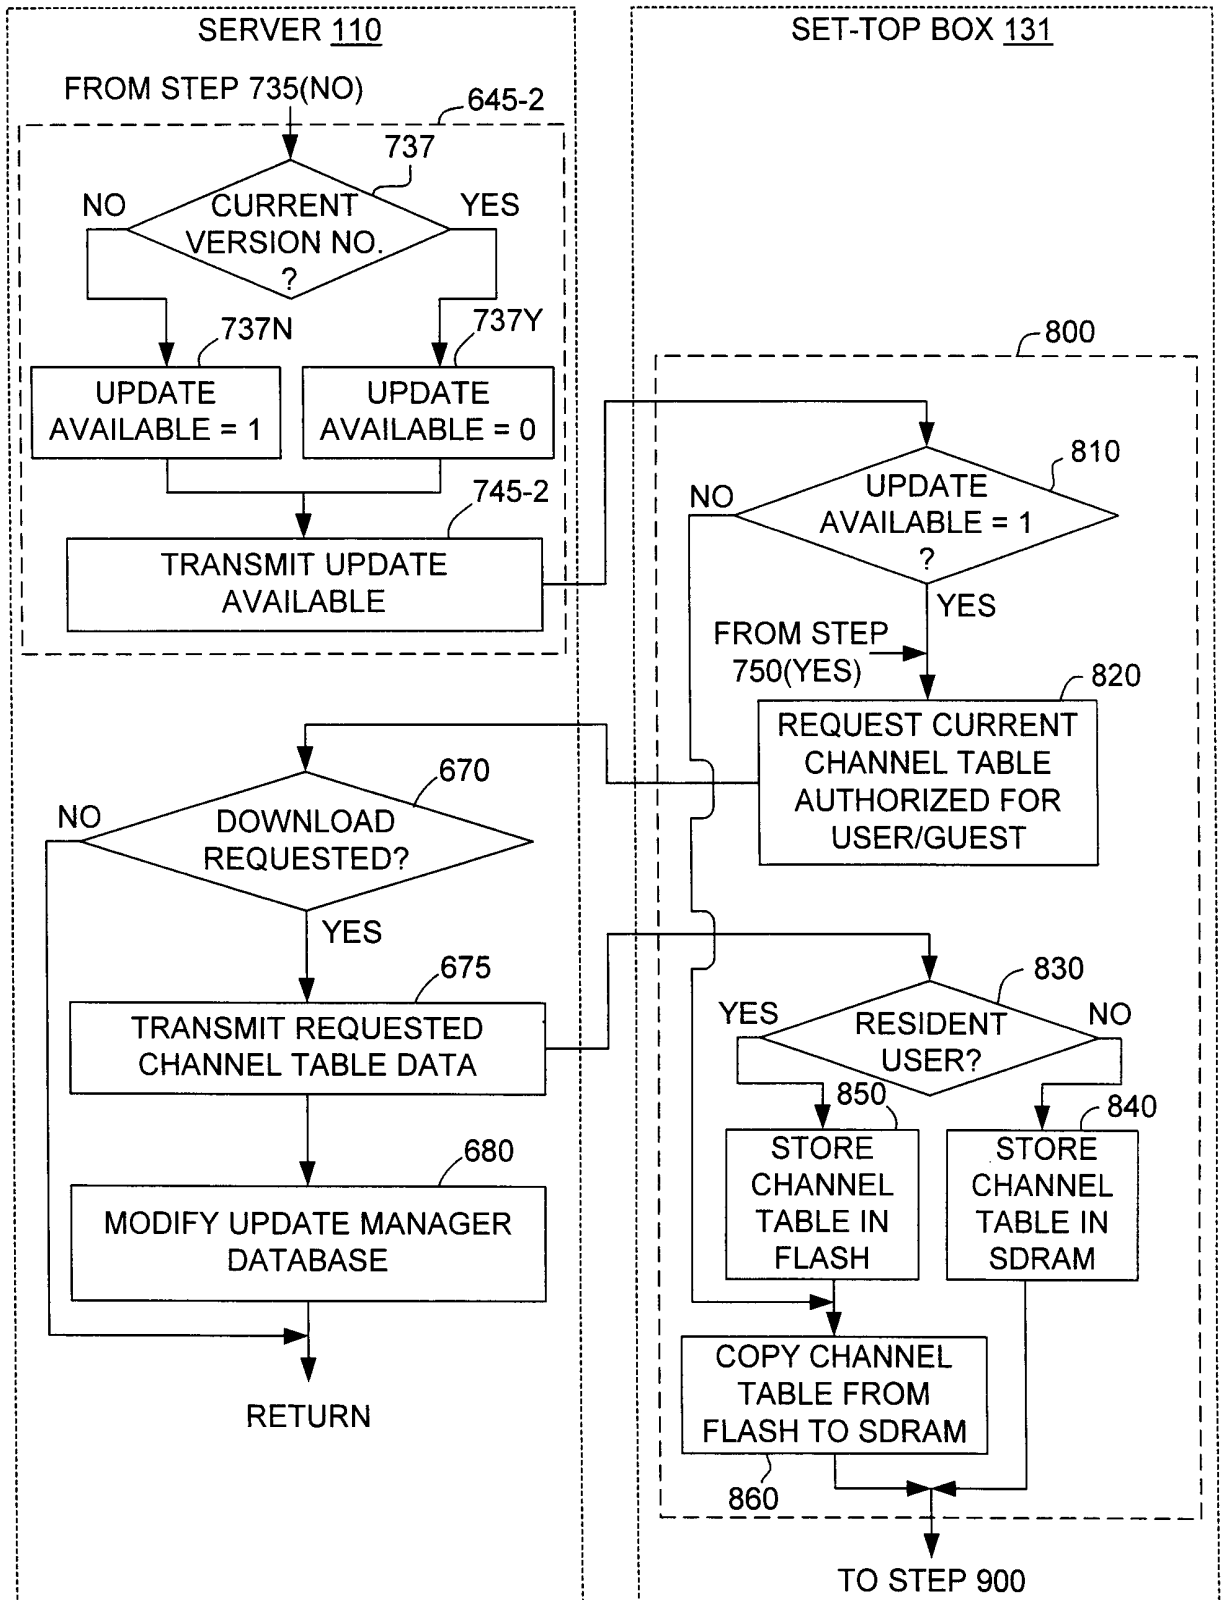


FIG. 8(A)

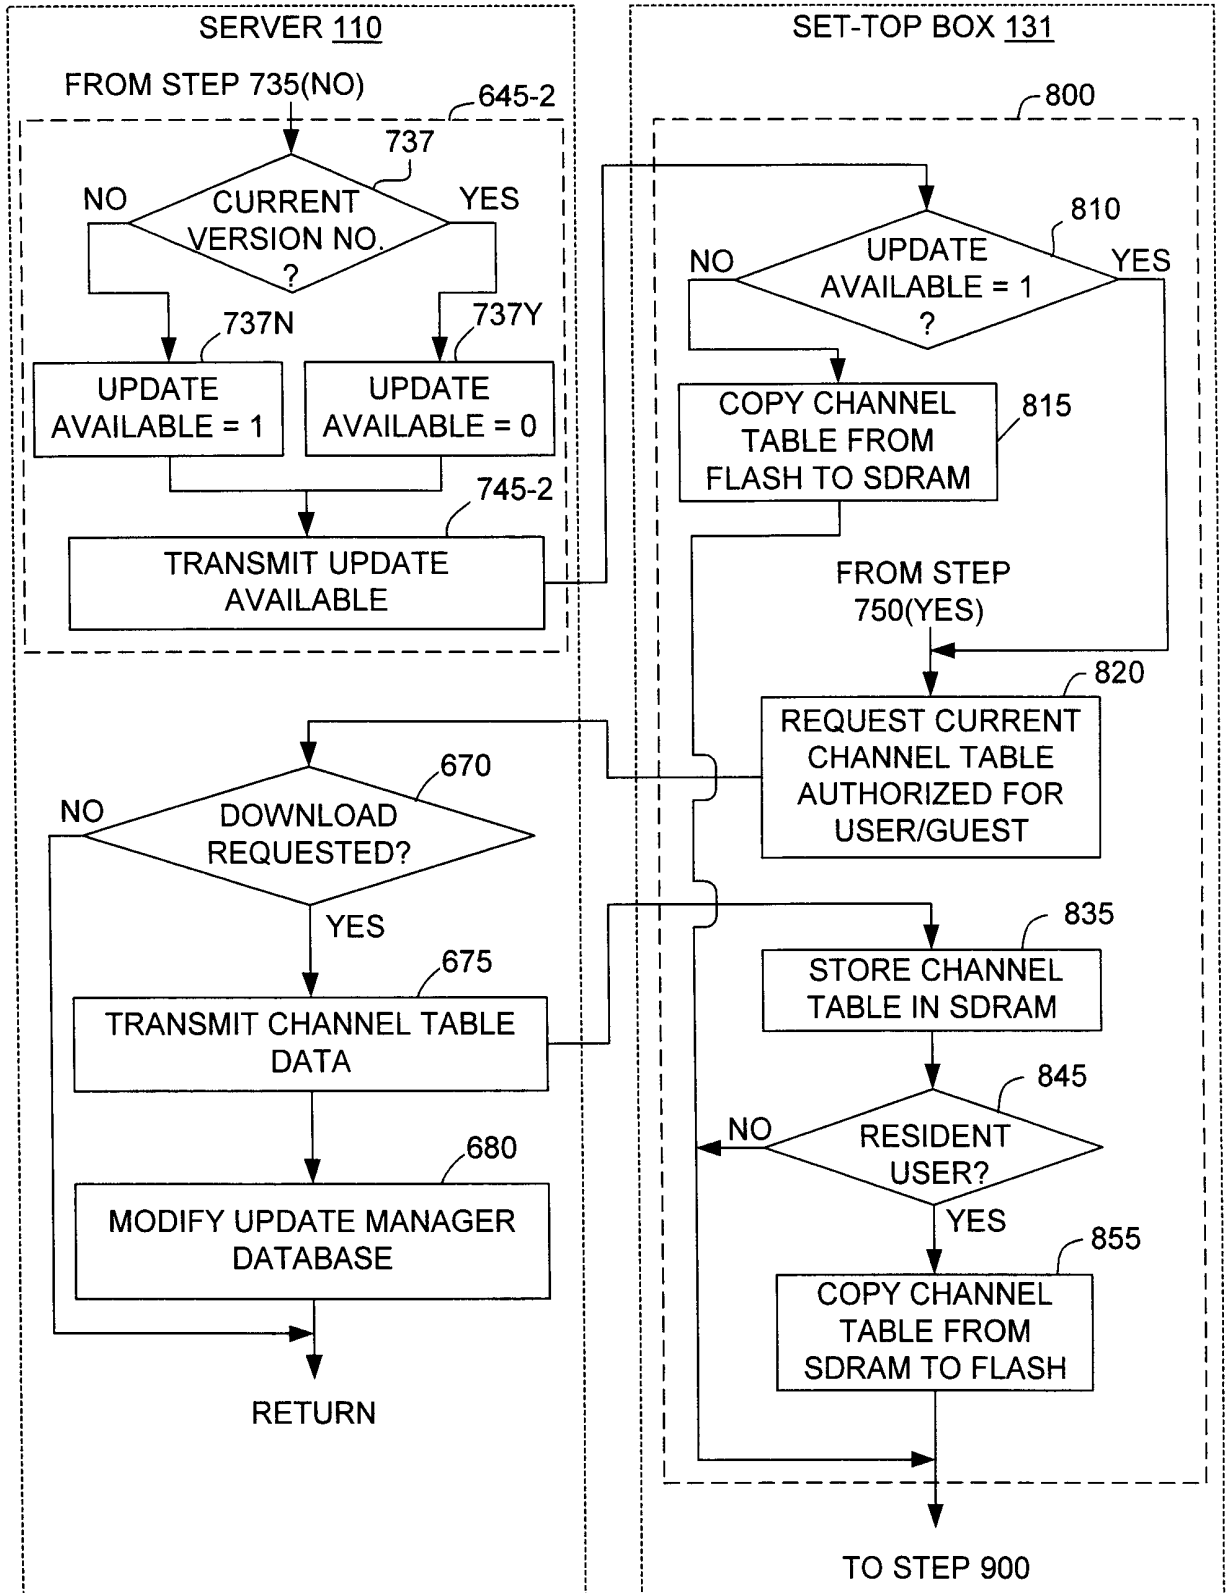


FIG. 8(B)

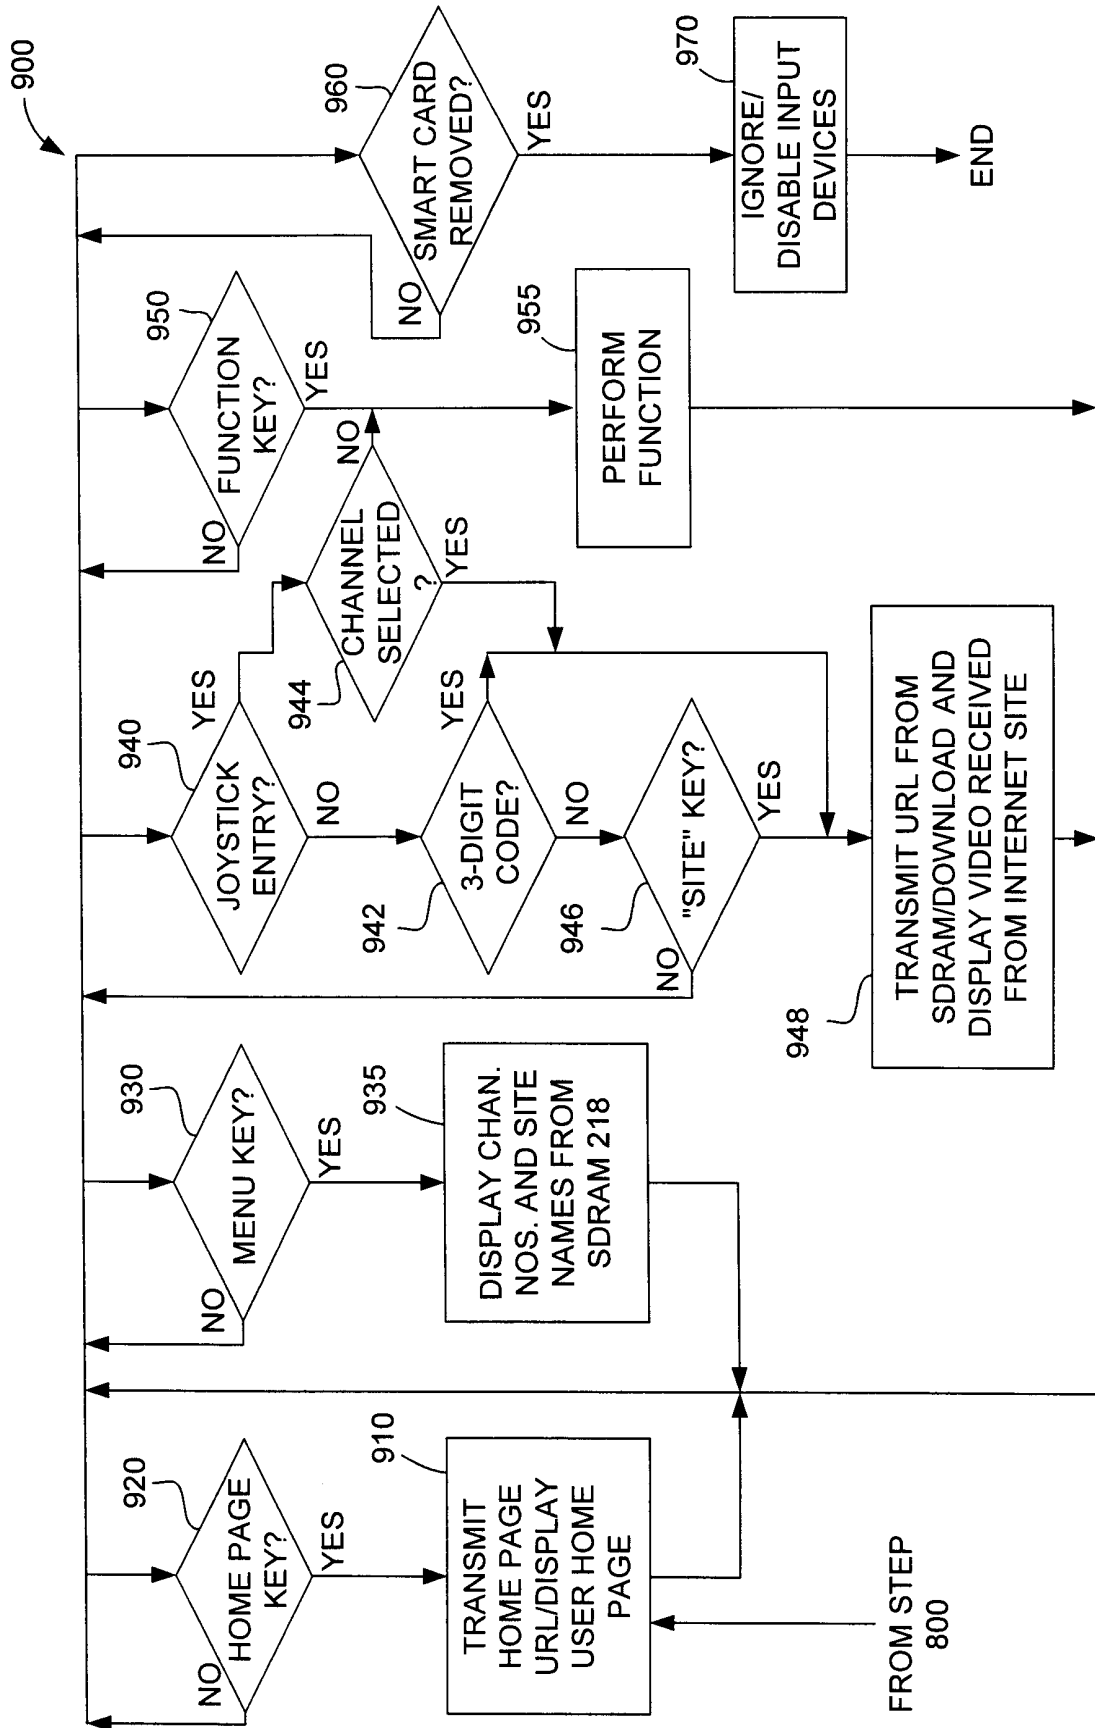


FIG. 9