Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2148742 C 2002/12/17

(11)(21) 2 148 742

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(22) Date de dépôt/Filing Date: 1995/05/05

(41) Mise à la disp. pub./Open to Public Insp.: 1995/11/07

(45) Date de délivrance/Issue Date: 2002/12/17

(30) Priorités/Priorities: 1994/05/06 (P44 16 189.1) DE;
1994/05/10 (P44 16 531.5) DE


(51) Cl.Int.^{6}/Int.Cl.^{6} A63C 9/00

(72) Inventeurs/Inventors:
RATZEK, THOMAS, DE;
NIEDERMEIER, CHRISTIAN, DE

(73) Propriétaire/Owner:
F2 INTERNATIONAL GES MBH, AT

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : FIXATION DE PLANCHE A NEIGE
(54) Title: SNOWBOARD BINDING

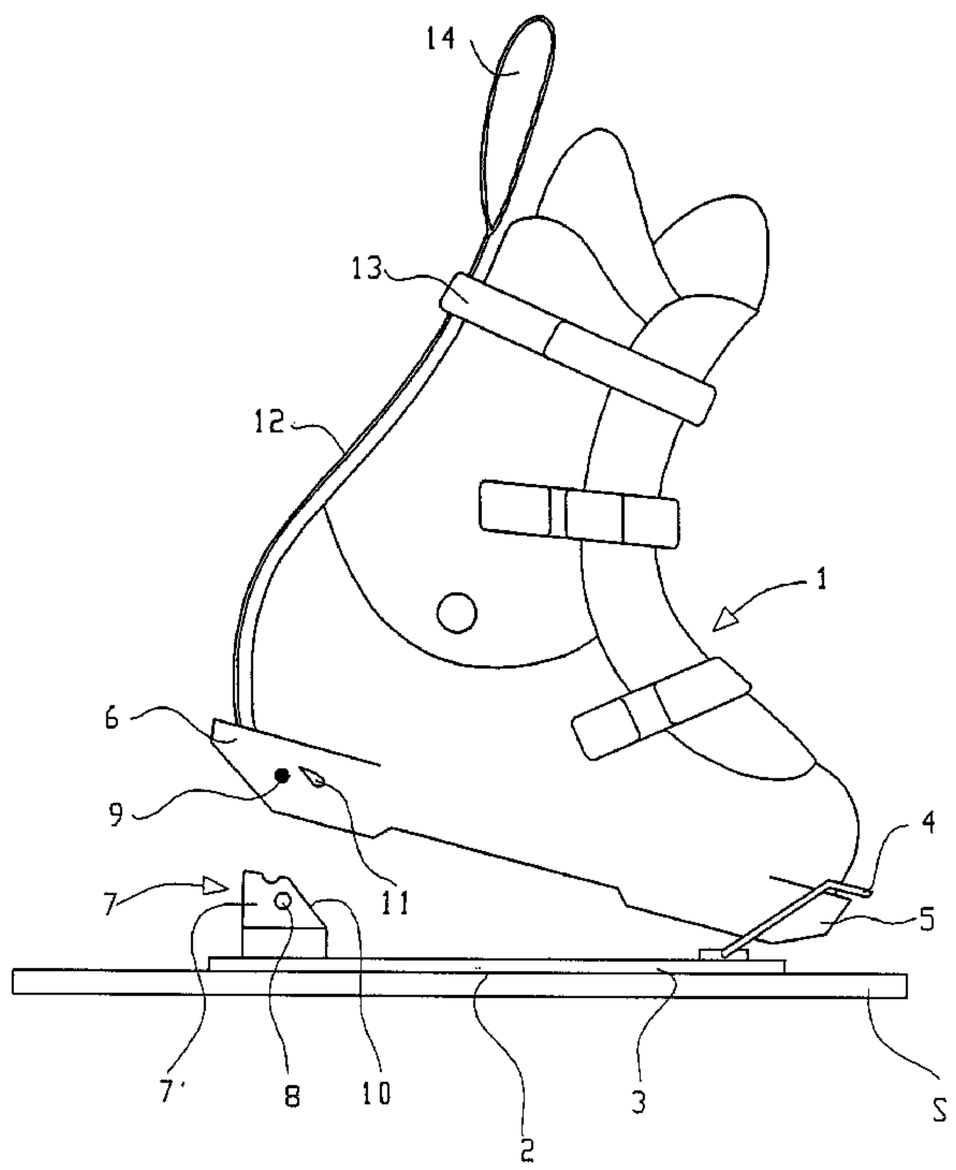

(57) Abrégé/Abstract:
The snowboard binding consist of a sole part (6) integrated in the snowboard boot (1) and a first binding element (7) cooperating with it and continuously connected to the snowboard (S). The sole part (6) has two spring-loaded pine 9 projecting laterally out of the sole part and capable of engaging with an opening (8) of the first binding element (7). The pins can be retracted with a device (12) attached to the snowboard boot and thus the binding can be opened.

SNOWBOARD BINDING

Abstract of the Disclosure:

The snowboard binding consists of a sole part (6) integrated in the snowboard boot (1) and a first binding element (7) cooperating with it and continuously connected to the snowboard (S). The sole part (6) has two spring-loaded pins 9 projecting laterally out of the sole part and capable of engaging with an opening (8) of the first binding element (7). The pins can be retracted with a device (12) attached to the snowboard boot and thus the binding can be opened (Figure 1).

SNOWBOARD BINDING

Description

The invention pertains to a snowboard binding. Such a binding was publicly exhibited at the ISPO [tradefair] in Munich on February 24, 1994. This binding had a front stirrup rigidly connected to the snowboard which reached over the front part of the boot sole and thus held it in place. A pin running transversely to the boot's longitudinal axis was inserted through the heel-side part of the boot sole and projected about 5-10 mm from the boot sole at both sides. A heel element to be screwed firmly in place on the snowboard consisted of two lateral cheeks running parallel and projecting vertically from the snowboard surface; these had a vertically oriented slot, into which the part of the pin projected out of the shoe could be introduced. A catch device on the lateral cheeks had the form of a hook which was pushed back during introduction of the pins into the slots and thus opened them, while with the pin parts completely housed in the slots it snapped into locking position and thus engaged the pins. In order to open the binding, a lever on one of the lateral cheeks had to be operated, by which means the stirrups could be moved into the opening position and the heel part of the shoe could be moved from the binding. This binding exhibited at the ISPO is also described in DE 4,311,630 A1, published subsequently.

AT 351,419 shows a ski binding with a shell nearly completely encompassing the skier's boot that can be folded open and is fastened tightly to the surface of the ski. A shell part covering the front part of the foot and one covering the front side of the shin are articulated to pivot at the front toe of the shell and can be pivoted between an opening or insertion position and a closed position. In the

closed position the two aforementioned shell parts are locked in place by spring-loaded catch pins on the stationary shell parts. The spring-loaded bolts can be brought into an unlocked position by cables in order to allow a release in case of excessive stress or an opening for stepping out. In the latter case, the skier can operate the cables by a lever housed on the stationary shell part. This is thus a shell binding which is intended to allow the use of very soft and therefore comfortable ski boots.

DE 2,556,817 A1 shows a ski binding with a binding plate that is attached by spring-loaded cables to the surface of the ski. When a release force is exceeded, this plate can be removed a distance preset by the length of the cables from the surface of the ski. A recess is provided for this plate in the sole of the ski boot. A catch mechanism is present in the interior of the plate and allows the locking of the plate in the recess of the ski boot sole. In case of a release of the binding due to excessive force, therefore, the boot is released from the ski together with the plate. For opening, that is, stepping out, the boot must be detached from the plate. An unlocking mechanism that can be operated by the skier either manually or with a ski pole is provided on the plate for this purpose.

Another so-called "step-in" binding, in which skier need not operate any locking elements when stepping into the binding, is described in DE 4,106,401 A1. The boot is held by two ordinary stirrups, a front and a heel stirrup. The heel stirrup, however, is articulated to a tread element which is in turn attached so as to be able to pivot to connection elements that are tightly connected to the snowboard. Herein is also attached a locking mechanism which grips the tread element when it is pressed completely down and holds it locked in position. In order to open the

binding the skier must bend down and operate this locking mechanism by hand in order to open it. If there is snow or ice beneath the shoe sole, a locking of the tread element is not assured, since this snow or ice would make contact with the binding, before the tread element was pushed all the way down. Thus this binding is only functional to a limited extent.

DE 2,511,332 A1 shows a ski binding in which part of the binding is likewise integrated into the heel of the ski boot. Two spring-loaded spherical-head bolts project laterally from the heel part of the boot sole and engage in matching recesses rigidly attached to the ski at the sides. This a self-releasing safety binding which opens when a predetermined force is exceeded. This force is determined by the springs pushing the two bolts outward as well as by the shape of the spherical heads of these bolts and by the shape of the recesses for these spherical heads.

The regular opening of the binding is done at the front jaw holding the toe of the boot, while the heel attachment can only be overcome by tipping the foot to overcome the spring force. For emergencies in which the skier might be injured, it is also provided that the elements housing the bolts can be rotated so that a groove located in them allows the boot to be pulled up and out of the binding.

DE 2,200, 056 A1 describes an additional release binding for skies. There too is provided a bolt pushed transversely through the boot sole; it engages with a hook-shaped, spring-loaded locking element. The entire locking element is pushed backward in the axial direction of the ski to open the binding; this is accomplished by operating a lever mounted on the ski.

DE 3, 141,425 A1 shows a safety binding for skis in which spring-loaded pins are attached to the boot and

matching receptacle devices are attached to the ski. Here too, a mechanism fastened to the ski is operated to open the binding.

Finally, DE 2,809,018 A1 shows a ski binding system consisting of ski boot and releasing binding elements, with a plate that projects beyond the boot incorporated into the sole or providing two bolts, somewhat separated, and pivoting hooks on the ski that grip laterally over this plate or the two bolts.

For snowboard bindings, many participants have long desired a so-called step-in binding, that is, a binding one could simply step into like a ski binding, without the snowboarder having to bend down to operate parts of the binding, such as locking stirrups. on the other hand, safety bindings that would permit complete release of the shoe from the snowboard in case of excessive force applied are still problematic for snowboards, since the resulting safety problems for participants and bystanders have not yet been satisfactorily solved, despite numerous proposals. Finally, the very serious problem of space also comes up in regard to snowboard bindings. The snowboarder is standing essentially transverse to the travel direction of the board, which means in practice that the angle between shoe longitudinal axis and snowboard longitudinal axis is between 45° and 90°, with some snowboarders even orienting their rear foot backwards, that is, at an angle of greater than 90° with respect to the direction of travel. Since snowboards, particularly the so-called alpine boards for snowboarders on prepared slopes, are becoming narrower and narrower, the toe of the boot and the heel of the ski boot are already projecting out over the contour of the snowboard. The principle can therefore be established that a snowboard binding must not project beyond the toe or heel

of the boot, since this could lead to projecting binding parts touching the snow when the board is turned on edge. For this reason, conventional ski bindings that have the step-in function are not suitable for snowboards.

The initially mentioned step-in binding for snowboards, publicly announced at the ISPO fair in February 1994, avoids these disadvantages. Its comfort of use leaves something to be desired, however, since the snowboarder must bend over to open the binding in order to operate a release lever connected directly to the board's surface. The design of this release lever is also rather elaborate technically, and it tends to raise the weight. This runs contrary to the trend towards snowboards and snow board bindings that are as light as possible.

The problem of the invention is therefore to improve the snowboard binding of the type mentioned initially in such a way that the comfort of the binding is further improved and which nevertheless meets the requirements for light weight, functional security and costs as low as possible.

This problem is solved by the snowboard binding according to the present invention.

The fundamental and essential idea of the invention lies in moving essential parts of the binding and especially the locking device into the snowboard boots, which not only enhances comfort when stepping out of the binding, so that the snowboarder need no longer bend when stepping out of the binding, but also achieves the advantages below. The binding parts to be fastened to the snowboard are light and insensitive to icing. The more expensive locking elements, also more subject to icing, are located inside the boot or boot sole and are therefore better protected against icing

and can thus be combined with other snowboards that use the same binding parts. An essential aspect of the invention lies in the fact that not only stepping into but also stepping out of the binding is considerably eased, so that a so-called "step-out" function is achieved. Finally it must also be especially emphasized that, after opening, the binding automatically returns to its initial position and is ready to be stepped into again without any active effort on the snowboarders part. This initial position is synonymous with the closed position, that is to say, the locking elements have the same rest position in a completely open and a completely closed binding. Thus it is impossible for the locking device to remain in a position, due to ice, perhaps, in which the binding might open inadvertently.

Additional advantages of the invention are explained in the description below.

The invention is described below on the basis of embodiment examples in conjunction with the drawings. These show:

Figure 1: a schematic side view of a first embodiment example of the snowboard binding and a snowboard boot with a not yet closed binding;

Figure 2: a side view of a heel part of the snowboard binding according to Figure 1 in the mounted stated;

Figure 3: a partial sectional top view of the part of the binding to be fastened to the snowboard;

Figure 3A: a plan view of Figure 3;

Figure 4: a sectional plan view of the components of the snowboard binding located in the heel part of the snowboard boot according to Figure 4;

Figure 5: a partial sectional side view of the heel part of the embodiment example according to Figure 4;

Figure 6: a view similar to Figure 4 for a second

embodiment example of the invention;

Figure 7: a view similar to Figure 4 for a third embodiment example of the invention;

Figure 8: a view similar to Figure 4 for a fourth embodiment example of the invention;

Figure 9: a view similar to Figure 4 for a fifth embodiment example of the invention;

Figure 10A: a side view of a snowboard boot according to a sixth embodiment example of the invention;

Figure 10B: a cross section through the boot and a partial cross section of the related binding element of the embodiment example of Figure 10A;

Figure 11A: a side view of the heel part of a snowboard boot according to a seventh embodiment example of the invention;

Figure 11B: a cross section through the heel part of the boot and a partial cross section of the matching binding element to be fastened rigidly to the snowboard in the embodiment example of Figure 11A;

Figure 12: a sectional plane view similar to Figure 4 of a seventh embodiment example of the invention;

Figure 12A: shows an enlarged detail view of a specific aspect of Figure 12, namely the guiding of the pin through the wall of the second binding part.

Figure 13: a side view of the binding according to the invention with a boot and a leg of a snowboarder to illustrate another aspect of the invention; and

Figure 14: a side view of the binding according to the invention in an additional variant.

Identical reference numerals in individual figures label identical or functionally corresponding parts.

Although the invention is described in most embodiment examples (except Figure 7) in connection with the use of a front stirrup, it should be pointed

out that in all embodiment examples the invention can also operate without such a front stirrup. In this case the shoe-side binding

part, as described in greater detail in conjunction with Figure 14, is mounted roughly in the middle of the shoe and it is assured with base blocks that the tip of the sole and the heel are positioned at the correct height with regard to the snowboard surface. In this case, it is also possible to omit a binding base plate. However, if it is desired that the fastening of the snowboard-side binding part to the snowboard should be more changeable, for instance, for adjusting the step size between the two bindings and/or the angle of rotation of the binding in regard to the longitudinal axis of the snowboard, then a base plate may be used in this variant as well.

Figure 1 shows a side view of a snowboard boot 1 just prior to its locked position with a binding element 2 to be fastened to the snowboard 5. This binding element 2 consists of a base plate 3 to be fastened to the snowboard, which can be done in a variety of ways. As is common with so-called plate bindings, the binding element has a front stirrup 4 which grips over a sole projection 5 of the snowboard boot 1 and thus holds the front end of the snowboard boot in place. A second binding element 6, configured here as the heel part 6 of the snowboard boot 1, contains essential parts of the binding that cooperate with a heel element 7 mounted on the binding element 2.

In a rough sketch, this heel element 7 has two parallel lateral cheeks 7',7", the spacing of which is only slightly greater than the width of the heel part 6 of the snowboard boot 1. Each lateral cheek 7',7" has an opening 8 into which a spring-loaded pin 9 projecting laterally out of the heel part 6 can engage respectively.

For the secure fastening of the snowboard boot it is necessary that it be pressed forward with a minimal force against the front stirrup 4. This therefore implies that

the spacing between the front stirrup 4 and the pin 9 or the opening 8 which houses it has a certain maximum length in order to produce this force. When stepping into the binding the boot is normally pushed against the front stirrup 4 with a lowered front foot and a somewhat elevated heel, which does not produce sufficient pressing force, however. Then the pins 9 and openings 8 would not be sufficiently aligned when the heel goes down. In order to achieve this alignment , a downward incline 10 is provided on each of the lateral cheeks 7',7"; these cooperate with laterally protruding projections 11 and press the boot as a whole forward when the heel is pressed down. The spacing between the pin 9 and the projection 11 corresponds exactly to the spacing between the opening 8 and the slope 10, so that as the heel is pressed down, the spring-loaded pin 9 is certainly guided past the opening 8 and then can engage in it. At the same time, the necessary force pushing the boot forward is produced, which presses the boot toe firmly against the front stirrup 4.

When the pins 9 are engaged in the openings 8, the boot is firmly attached to the snowboard and can no longer come loose inadvertently. To open the binding, the two pins 9 are pressed or drawn together inwardly in this embodiment example, so that they come loose from the openings 8, which means that the shoe can initially be raised somewhat by the heel and then removed from the binding. In order to displace the pins 9 in the manner described, a cable 12 is provided, which is led upward on the back side of the boot 1 to the shaft and held in place there by a belt 13. A grip loop 14 is placed on the cable 12. If the cable 12 is pulled, then, as will become clearer in the description below, the two pins 9 are pulled inward, which opens the binding.

A peculiarity of the invention is therefore the fact that the opening or unlocking of the binding is done on the boot and not on the part of the binding that is fastened to the snowboard or ski, as in previously known snowboard or ski bindings. This has the advantage, among others, that the snowboarder need not bend down to the binding or use ski poles (not present in snowboarding anyway) for assistance, as is the case with most ski bindings. If desired, the snowboarder can extend the length of the cables indefinitely, perhaps even up to belt height. An additional advantage is that essential components of the binding are integrated into the boot. Thus the binding element 2 which is constantly connected to the snowboard can be designed to be very simple and very economical, so that a snowboarder who owns several snowboards need only buy the more expensive binding parts once, together with the boot, whereas only the more economical binding element 2 need be purchased for all snowboards.

It should also be emphasized that the heel part 6, which contains essential components of the binding, can also be manufactured as a separate part and subsequently screwed or glued on onto a boot or fastened in some other manner.

Figure 2 shows a side view of heel-side components of the binding in the locked state, that is, in which the pin 9 is engaged with the opening 8. Also clearly seen here is the effect of the incline 10 and the projection 11, which cooperate to guide the boot while the heel is being pressed down such that the pin 9 and the opening 8 are oriented towards one another. It is recognized better from Figure 2 that the lateral cheek 7 is guided so it can be displaced on a mounting block 15 attached to the base plate 3, which means that the binding as a whole can be matched to the shoe size. A setscrew 16 is provided for displacing the lateral

cheeks.

The lateral cheeks have a dimple 17 at their upper end, which makes stepping into the binding easier, because with light pressure applied to the heel, the pin 9 moves to the lowest point of the dimple 17, which means that the projection 11 is then in the proper position with respect to the incline 10. It is also clearly recognizable from Figure 2 that the lower side of the shoe sole of the heel part is not yet in contact with any binding elements such as the mounting block 15, but instead maintains a distance from it. Thus a secure locking of the binding occurs even if there is snow underneath the boot sole. Since the heel is supposed to be somewhat higher than the toe of the boot for snowboards anyway, with the invention one can dispense with the wedge underlay otherwise used for the heel part.

Clearly recognizable in Figure 3 is the position of the two lateral cheeks 7',7", which stick out vertically from the snowboard parallel to one another and house the heel part of the snowboard boot between them. Both lateral cheeks 7',7" are connected together by a connection element 18 that lies on the mounting block 15. Both lateral cheeks 7',7" are extended in the direction of the base plate 3 beyond the connection element 18 and grip over the mounting block 15 with inward-directed arms 19',19". Thus the heel element 7 is firmly on the mounting block 15 and can be displaced only in the longitudinal direction of the snowboard. For this purpose, the mounting block 15 has an opening 20 for housing the setscrew 16 as well as a slot, not illustrated, which opens the opening 20 to the upper side of the mounting block 15, so that a threaded part (not shown) connected to the connection element 18 is in connection with the setscrew 16, with which a longitudinal adjustment of the heel element 7 is possible.

It is also easily recognizable from Figure 3 that the lateral cheeks 7',7" have an incline 21',21", respectively, above the openings 8 which insures that the spring-loaded pin is pressed inward into the heel part 6 of the shoe.

In order to design the effect of the dimple 17 to be more efficient, it is practical to insure that the bolts 9 are only pressed inward in the position in which they make contact with their cylindrical part on the upper side of the lateral cheeks. For this purpose an additional dimple 22 running parallel to the longitudinal extension of the inclines 7',7" is provided in the vicinity of the inclines 21',21"; the dimple is best recognized from Figure 3a and has a greater angle of inclination with respect to a central axis 23 perpendicular to the snowboard than the incline 21'. Only when the bolt 9 is in the deepest point of the dimple 17 does its free end make contact with the wall of the dimple 22, so that it is pressed inward when the heel is pressed downward.

It is also recognizable from Figure 3 that the central axis 24 of the openings 8 is spaced away from the upper side of the connection element 18, with this spacing being greater than the corresponding spacing between the midpoint of the pin 8 and the bottom side of the sole of the heel part 6 of the snowboard boot 1. In that way the functioning of the binding is not impaired by snow or ice on the sole of the snowboard boot.

Figure 4 shows a plan view of the inside of the heel part 6 of the snowboard boot 1. This heel part has a cavity 25 in which the pins 9,9' and the mechanism for displacing them are accommodated. Along an axis 26 that coincides with the axis 24 of Figure 3, the heel part 6 has two opposing aligned openings in which the guide bushings 27,27' are inset and in which the pins 9,9' respectively are guided so

as to be displaceable. Both pins are pressed outward by a spring 28, until here in the embodiment example of Figure 4 the pins 9,9', directly connected at their inside end faces by the spring 28, abut against a stop formed here by the guide bushings 27.

The spring 28 is constituted here as a U-shaped stirrup. The length of the pins 9,9' is dimensioned such that the pins 9,9' only protrude laterally by a predetermined amount, for instance 5-10 mm, from the contour of the heel part 6. The ends of the pins 9,9' protruding outward are rounded off in order to ease the insertion of the pins between the two lateral cheeks 7',7". The radius of curvature of this rounding is equal to half the diameter of the otherwise cylindrical pins, so that the points of the pins protruding outward form a hemisphere.

A tensile element 29,29', which may be a plastic or metal cable in the simplest example, is formed on the pins 9,9', respectively, in order to open the binding. These two tensile organs are guided in opposite directions over a deflection stanchion 30 and connected together in a connection element 31, as well as to the cord 12 which is guided through an opening 30 from the inside of the heel part 6, as illustrated in detail in Figure 1. The cable 12 can also be made of plastic or metal. If one pulls on this cable 12, the tensile force will be directed onto both tensile elements 29,29' and transferred by way of the deflection stanchion 30 to the pins 9,9' so that the latter are drawn inward along the axis 26 into the heel part 6. If the cable 12 is once again released, the two pin are pushed outward again by the spring 28.

It can also be easily recognized from Figure 4 that the projections 11,11' stick out roughly just as far as the pins 9,9' from the contour of the heel part 6, which shield the

pins 9,9' so that the danger of being caught on the pins in ordinary walking is reduced. To this end, the projections 11,11' also have a rounded off shape, an elliptical shape for instance, and thus act as guards to prevent the pins 9,9' from catching on any objects. The surfaces 33,33' of the projections 9,9' immediately facing the pins 9,9' are shaped essentially smooth and are fitted to the incline 10 (Figure 1).

Finally, it is also recognizable in Figure 4 that the heel part 6 is closed off all around and thus can be employed as an aftermarket product for conventional snowboard boots. Naturally it is also possible to integrate the heel part 6 completely into the shell of the snowboard boot.

The side view in Figure 5 clarifies the position of the spring 28, the tensile element 29 and the cable 12 in the heel part 6 of the snowboard boot 1. The deflection stanchion 30 can be provided as a separate part, but it can also be molded in one piece with the heel part, which generally consists of plastic.

Figure 6 shows another variant of the heel part, differing from the embodiment example of Figures 4 and 5 by the spring and the tensile elements. The spring 28 is constructed here as a coil spring oriented along the axis 26 and pressing against the two pins 9,9'. The two pins 9,9' each have an enlargement 33, 33' respectively at their ends, on which the spring 28 is supported and each of which also supports one arm of a lever 34,34' on the side of the enlargement 33 opposite the spring 28. This can be done on one side of the pin . The corresponding lever arms can also be constructed as claws that grip the pin on both sides. These arms are bent in a convex shape in order to slide along the enlargement 33 during pivoting of the levers

about pivot axis 35,35' respectively. The two other arms of the lever 34,34' are roughly perpendicular to the aforementioned arms and are connected via two short cables 36,36' to cable 12. In the illustration of Figure 6, the cable 12 is being pulled, so that the two pins 9,9' are roughly in the unlocked position. In the locked position, the two pins 9,9' abut against guide bushings 27,27', which in turn define the limit position of the pins 9,9'.

The variant in Figure 7 likewise works with a coil spring 28 and levers 34,34'. It is distinguished from the embodiment example of Figure 6 in essence only by the shape of the levers and their attachment to the pins 9,9'. The levers 34,34' are connected to the pin here by a slot connection, that is, the levers 34, 34' each have a slot 37,37', into which a bolt 37' running perpendicular to the axis 26 of pins 9' is inserted. When the levers are pivoted, this bolt 37' slides along the slot 37. Otherwise, the functioning corresponds to the embodiment example of Figure 6.

The embodiment example of Figure 8 likewise operates with a coil spring 28 and a rod linkage, which as a result the desired tensile force is exerted on the pins 9,9'. The pins 9,9' are bent so that the bent arms 38,38' are offset with respect to the axis 26. The free ends of these bent arms 38,38' are connected by slot connections 39,39' to a pivoting lever 40, the pivot axis of which is positioned mirror-symmetrically to the two pins 9,9' on the axis 26. The cable 12 can either be articulated at one end of the pivoting lever 40 or, depending on the desired exit point for the cable 12, to an additional pivoting lever 42, which is firmly connected to the pivoting lever 40 and thus transfers the tensile force of the cable 12 to the latter.

In the embodiment example of Figure 9, sections of the

pins located in the interior of the second binding part 6 are mutually laterally offset and here are pressed outward by a spring (not shown). The mutually overlapping part 42 of the pins has passage openings 43 with inclined sides 44. Inserted into these passage openings is a bolt 45 which has oppositely oriented ramp inclines 46,47. If the bolt 45 connected to cable 22 is displaced, then the two pins 9,9' are drawn inward, which opens the binding. The spring with a force tending to press the two pins 9,9' outward can be embodied in a great variety of ways. It may, for instance, attack directly at the bolt 45 as an extension of the central axis and be constructed as a compression or tension spring. It may also be designed as a strap spring, corresponding to the embodiment example of Figure 4. Finally, it is also possible to provide one or two compression springs that act directly on the pins.

In the embodiment example of Figures 10 and 11, one or two pins are attached to the lateral cheeks 7',7", while the locking mechanism has the form of one or two pivoting levers which grip behind the pin or pins.

Figure 10A shows a side view of the heel part 6 of a snowboard boot 1. In the rear sole area, a recess 48 extending inward on both sides, has an inclination 49 in the area pointing towards the sole tip, which ends in a rounding 51 near the lower side 50 of the sole. A locking lever 52,52' is housed in each of these two cutouts 48, both locking levers 52,52' being fastened to a common rotating shaft 53. This rotating shaft runs crosswise through the snowboard boot through the cavity 25. Another lever 54, connected to the cable 12, is attached without rotational play to the rotating shaft 53. Furthermore, a spring, not shown, can be attached to this lever 54 to press the lever 54 and thus the two locking levers 52,52' opposite the

tension direction of the cable 12 in the direction of the shoe toe, thus pressing the two locking levers into their locked position. The locking levers 52 are bent in a bow shape and have a flat locking surface 55, which is oriented roughly horizontally in the locked position and firmly contacts the associated pins 9,9' placed on the lateral cheeks 7',7''. Adjacent to this locking surface 55, the locking lever 52 has an inclined plane 56, which insures during the stepping-in process that the locking levers 52,52' are pivoted backwards into the opening position as soon as the inclined plane 56 touches the pins 9. As soon as the tip of the locking levers slides past the pin 9, the locking levers 52 are pressed forward by spring force into the locking position, and the binding is closed.

When stepping into the binding, the incline 49 serves as a guide surface which, as soon as it makes contact with the pin 9, displaces the boot forwards. It thus has essentially the same function as the projection 11 with the guide surfaces 33 in the previously described embodiment examples.

The locking levers are well protected in the recesses 48, so that there is no danger that these levers will get caught somewhere during the stepping-in process.

It can be seen even better from Figure 10B how the two pins 9,9' are fastened to the lateral cheeks 7',7" and point inwards at one another. The recess 48 and its protective function for the locking levers 52,52' are also clearly recognizable.

In connection with Figure 10A, it should also be pointed out that even in the inside of the boot, the cable 12 can be directed upwards into the boot, running, for instance, between shoe liner and shell. This arrangement is a fundamental possibility with all embodiment examples.

In order for the locking position of the locking levers to be securely fixed in place and not dependent on the force of the spring, it is practical to arrange the central axis of the of the rotating shaft 53 above the central axis of the pins 9 with the binding closed or even to displace it somewhat towards the boot toe. Forces directed perpendicularly upwards from the snowboard surface would then in the first instance not exert any torque onto the locking levers 52 or, in the case of an axis of the rotating shaft 53 displaced even further forward, would even produce a torque forcing the locking levers 52 more firmly into the locking position.

In the embodiment example of Figure 11, a pin 9, passing all the way through and connecting the two lateral cheeks 7',7" and only one central locking lever 52, which has the same cross section in the side view of Figure 11A as the two locking levers 52,52' of Figure 10, are used. The boot sole has a recess 57 opening downwards and ending laterally (Figure 11A) in an opening which in turn has an incline 58 on its wall pointing towards the boot toe and, in cooperation with the pin 9, forcing the boot forwards towards the toe. Here too the central locking lever is pressed by a spring, not shown, into the locking position. Otherwise the function is the same as in the embodiment example of Figure 10.

In the embodiment example of Figure 12, the pins 9 located in the interior of the second binding part 6 are connected by articulated levers 60,60' to the pivoting lever 40, with the ends of the articulated lever 60,60' each being connected by a pivot joint to the pins 9,9' and the pivoting lever 40. The central axis of the pivoting lever 40 runs perpendicular to the central axis of the pins 9,9'. One central axis of the articulated lever

60,60', by contrast, is positioned at an angle of roughly 45° to the central axis of the pivoting lever 40. The two pivoting levers 60,60' are parallel to one another and are each connected to one end of the pivoting lever 40. If the pivoting lever 40 is rotated about its pivot axis 41 (clockwise in Figure 12), then the articulated levers 60,60' each apply a tensile force to the pins 9,9' and pull them into the interior of the second binding part 6. The tensile element 12 is connected to one end of the pivoting lever 40. For this purpose, a blind hole 63 and a continuing [smaller] through-hole 64 are provided on the pivoting lever. The tensile element 12 is threaded through the through-hole 64 and thickened at its end by a knot, a press-on sleeve or the like so that it can no longer be pulled back through the through-hole 64. The thickened end is then arranged to be sunk into the blind hole 63.

In contrast to the previously described embodiment examples, the tensile element 12 runs in the interior of the second binding part 6 roughly at a right angle to the central longitudinal axis of the shoe and is therefore directed outwards laterally on the boot.

The second binding part 6 is constructed as an injection-molded plastic part, as was possible in principle for the other embodiment examples as well, and can be subsequently screwed onto the sole of a boot. Screw holes 65 are provided for this purpose. In order to be able to accommodate binding parts in this binding element 6, a recess 66 is provided and houses the individual parts, including the spring 28. This spring is constructed here as a leaf spring bent in a U-shape, supported on the ends of the pins 9,9' projecting into the interior of the binding part, as becomes clearer from the detailed view in Figure 12a.

It can also be recognized in Figure 12 that the second binding part 6 has drill holes 70 on both sides through which the tensile element 12 can be led out, since it is fundamentally desirable to lead the tensile element to the outside of the respective boot, that is on the right side of the right boot and on the left side of the left boot.

Figure 12a shows an enlarged detail view of a specific aspect of Figure 12, namely, the guiding of the pin 9 through the wall of the second binding part 6. Since a high degree of flexibility regarding the motions of the foot in all directions is desirable in snowboarding, but most snowboard boots in use with plate bindings have a relatively hard outer shell, this flexibility cannot be achieved by the shoe alone. For this reason, the pin 9 is flexibly supported in relation to the second binding part 6, which is rigidly connected to the boot. To this end, the pin 9 is supported so as to be displaceable in a metal easing 69, which is in turn connected to the second binding part 6 by an elastic easing 68. This elastic easing 68 can consist, for instance, of rubber or some other resilient material, such as an elastic plastic. In manufacturing the second binding part 6, the plastic "shell" of which is produced by injection molding technology, it is possible to mold on this flexible easing 68 in a second work step in the same injection molding form, which means that the easing 68 also obtains a very good connection to the binding part 6. Not only are shocks dampened and absorbed by this resilient supporting of the pins, which absorb the essential forces between the snowboard and the boot, the boot can also be tilted in an angle of 1-3° perpendicular to the longitudinal direction, which considerably increases comfort in use.

It can also be recognized from Figure 12a how the spring 28 is supported on the pin 9. In the embodiment

example shown here, the latter has a radially projecting collar 67, which, on one hand, serves as a stop that defines the limit position of the bolt and, on the other, supports the spring 28. Here the spring has a drillhole 28' through which projects the interior end of the pin, to which in turn the articulated lever 60 (Figure 12) is connected by way of the pivot bearing 61. It should be emphasized at this point that the flexible bearing of the pins according to Figure 12a can be applied to the variants of the invention.

Alternative to or in combination with this flexible bearing of the pin, the first binding part 7 can also be flexibly attached to the snowboard, for example by inserting a resilient plate of rubber or flexible plastic between the snowboard surface and the first binding part (as will be explained more closely in connection with Figure 14).

Figure 13 shows a refinement of the invention in which the tensile element 12 for opening the binding is extended further and is partially integrated into the snowboarder's clothing. The tensile element can thus be led upward to an arbitrary height to suit the comfort of the snowboarder. It has proven practical to guide the tensile organ roughly up to the height of the thigh, where it can be gripped by the snowboarder's hand without any bending at all. For this purpose, a loop 13 on upper end of the tensile element 12 is connected by a snap hook 71 or some other easily operated suspension device to an extension belt 72, preferably guided in the interior of the snowboard pants and only emerging at an opening 76. There the extension belt 72 has another loop 77 that can be gripped by hand. This loop 77 is held in position by an rubber belt 78 fastened, for instance, to the belt of the pants or a loop sewed onto the pants.

Most contemporary snowboard pants have a sleeve 74 that is sewn onto the pants along a seam 75 at the level of the

shin and extends partially over the upper part of the boot 1. The extension belt 72 is guided in this area between the pants 73 and the sleeve 74. When the snowboarder puts on the boot 1, he need only connect the extension belt 72 to the loop 14 of the tensile element 12 with the snap hook 71 and then has the additional comfort in operating the binding all day long.

Figure 14 shows an additional variant of the invention that can in principle be applied to all embodiment examples. The shoe-side second binding part is no longer accommodated here in the heel area but instead, approximately in the middle of the boot 1. Correspondingly, the snowboard-side binding part 7 is attached in a central position to the snowboard. Thus the boot is fastened only by the two pins and no longer by a front stirrup. In order to prevent swiveling of the boot about the rotational axis of the pins, tread plates 80, 81 are applied to the snowboard surface in the area of the heel and toe. These tread plates 80, 81 are preferably made of a resilient material in order to bring about a dampening and absorption of shocks and to allow a certain flexibility for a relative motion of the boot with respect to the snowboard. The tensile element 12 is effectively connected to the pins as in the other embodiment examples, so that the binding otherwise operates in the manner described above. Since in this variant, the boot need not be pushed forward against a front stirrup, the lateral cheeks 7 of the snowboard-side binding part are configured somewhat differently. The upper side of the lateral cheeks has two guide surfaces 10,10' arranged in a V-shape and terminating in a circular dimple 17. By means of these guide surfaces 10,10', the boot is led in the direction towards the dimple 17 when the pins are placed on these guide surfaces, where then, according to the

embodiment example of Figures 3 and 3a the dimple 22 insures that the pins are pressed inward and only go into their locking position upon reaching the opening 8.

In order to make the entire binding somewhat more elastic, an additional resilient block 82 is inserted here between the surface of the snowboard S and the snowboard-side first binding part 7.

CLAIMS:

1. A snowboard binding for releasably binding a snowboard boot to a snowboard for use by a snowboarder, the snowboard having an upper surface to which the snowboard boot is bound, the snowboard boot having an upper, a toe, a sole, and a heel attached to the sole, the snowboard binding comprising a first binding element to be firmly connected to the snowboard and a second binding element to be firmly connected to the snow- board boot and protruding on both sides of the sole of the boot from its outer surface and being lockable to the first binding element, further comprising an unlocking device for loosening the connection between the two binding elements, characterized in that the unlocking device is permanently arranged on or inside the snowboard boot and being operable manually by an operating element being also arranged on or inside the snowboard boot and extending at least up to the upper of the boot.

2. A snowboard binding with a snowboard boot according to claim 1, characterized in that the second binding element, comprises two pins loaded by a spring and projecting from the outer surface of the sole of the boot, the first binding element has two lateral cheeks being parallely arranged with respect to each other in a distance corresponding to the width of the sole of the boot and being substantially perpendicular to the upper surface of the snowboard and each comprising an opening for receiving the pins and that the unlocking device comprises means for pulling the pins against the force of the spring into the interior of the sole of the boot, so that the pins are pulled out of the openings.

3. A snowboard binding with a snowboard boot according to claim 2, characterized in that the lateral cheeks of the first binding element each comprise an incline declining in the direction of a front stirrup and that the snowboard boot comprises projections being arranged in a distance with respect to the pins and being staggered in the direction of the toe of the boot, which projections each comprising an even surface coming together with the incline, so that the boot is automatically pressed forward in the direction of said front stirrup, when the heel is pressed down.

4. A snowboard binding with a snowboard boot according to claim 1, characterized in that the second binding element comprises at least one locking lever being fixed to a rotating shaft which locking lever being prestressed by a spring in a locking position, that the first binding element comprises at least one pin firmly connected thereto and that the locking lever comprises a locking surface reaching over the pin.

5. A snowboard binding with a snowboard boot according to claim 4, characterized in that the locking lever comprises an inclined plane which is pivoted by the pin into an opening position, when the second binding element is pressed down in the direction of the first binding element.

6. A snowboard binding with a snowboard boot according to claim 4 or 5, characterized in that the second binding element comprises two locking levers laterally projecting from the outer surfaces of the sole of the boot, which locking levers are arranged in a recess which is staggered inwardly with respect to the outer surface of the snowboard boot and that the

surfaces of these recesses which face the toe end of the boot are inclinations coming together with the pins which are provided at the first binding element and which automatically press forward the boot in the direction of the front stirrup when the heel is pressed down.

7. A snowboard binding with a snowboard boot according to claim 2, characterized in that each of the lateral cheeks comprises a dimple on its end facing away from the upper surface of the snowboard for guiding the pins.

8. A snowboard binding with a snowboard boot according to any one of claims 2, 3 and 7, characterized in that each of the lateral cheeks comprises a dimple at its surfaces facing each other, starting from the free end of the lateral cheeks up to the opening.

9. A snowboard binding with a snowboard boot according to any one of claims 2 to 8, characterized in that the two lateral cheeks are connected by a connection element situated perpendicular to the lateral cheeks and that the distance from a central axis of the openings to this connection element is greater than the distance between a central axis of the pins and a lower side of the sole of the snowboard boot.

10. A snowboard binding with a snowboard boot according to claim 9, characterized in that the lateral cheeks and the connection element are supported as to be displaced parallel above the upper surface of the snowboard on a guide block to be fastened to the snowboard by screws, and being held in place in a

direction perpendicular to the upper surface of the snowboard by arms reaching over the guide block.

11. A snowboard binding with a snowboard boot according to claim 2 or 3, characterized in that the two pins are pressed apart by a strap spring which has a substantially U-shape when seen from above.

12. A snowboard binding with a snowboard boot according to claim 11, characterized in that tensile elements wrapping around a post in opposite directions and being connected to the operating element configured as a cable are attached to both pins or to the ends of the strap spring firmly connected to these pins, with the operating element being guided out through an opening to the outside of the snowboard boot.

13. A snowboard binding with a snowboard boot according to claim 2 or 3, characterized in that the pins are pressed apart by a coil spring and that the unlocking device comprises a lever for each pin, which is pivotable about an axis of rotation, the levers being supported on a thickening of the inner ends of the pins and the levers being connected to the operating element.

14. A snowboard binding with a snowboard boot according to claim 13, characterized in that the levers are curved in a convex shape in the contact area with the thickenings.

15. A snowboard binding with a snowboard boot according to claim 2 or 3, characterized in that the two pins are pressed outward by a coil spring and that the locking device comprises levers seated so as to pivot, and each of said levers has a slot and is

connected to one of the pins by a bolt which is inserted into the pins perpendicular to their longitudinal axis.

16. A snowboard binding with a snowboard boot according to claim 2 or 3, characterized in that the pins have arms bent over inside the second binding element and that the bent arms are connected together by a pivot lever which is directly or indirectly connected to the operating element.

17. A snowboard binding with a snowboard boot according to any one of claims 2 to 5, characterized in that inside the second binding element the pins are offset and overlap one another and having passage openings with inclined sides in areas where said overlap exists, wherein a bolt having corresponding opposite inclined planes is inserted into the passage openings and that this bolt is connected to the operating element.

18. A snowboard binding with a snowboard boot according to any one of claims 2, 3 and 7 to 11, characterized in that the pins are each connected by means of an articulated lever to one end of a pivotable lever, wherein the two articulated levers are supported both on the corresponding pins as well as on the pivoting lever and that the tensile element is connected to one end of the pivoting lever and extends substantially perpendicular with respect to its longitudinal axis.

19. A snowboard binding with a snowboard boot according to any one of claims 1 to 18, characterized in that inside the snowboard boot the operating element is led upward to the upper of the boot between a shoe

liner and a shell of the snowboard boot.

20. A snowboard binding with a snowboard boot according to any one of claims 1 to 19, characterized in that the operating element is extended beyond the upper of the boot, preferably up to the level of the snowboarder's hip.

21. A snowboard binding with a snowboard boot according to any one of claims 2 to 19, characterized in that the pins are resiliently supported in the second binding element and that the resilient support is realized by a sleeve comprising an elastic sleeve element.

22. A snowboard binding with a snowboard boot according to any one of claims 1 to 20, characterized in that the second binding element is located in the middle of the boot between its heel and toe.

23. A snowboard binding with a snowboard boot according to any one of claims 1 to 21, characterized in that the binding comprises a front stirrup extending over the sole of the snowboard boot in its front region and that the second binding element is arranged at the heel region of the snowboard boot.

24. A snowboard with a snowboard binding and a snowboard boot according to claim 23, characterized in that elastic tread blocks are mounted on the snowboard in a tread area of the heel and the toe of the snowboard boot.

25. A snowboard with a snowboard binding and a snowboard boot, according to any one of claims 1 to 19 and 23, characterized in that a resilient block is

provided between the upper surface of the snowboard and the first binding element which is fixed to the snowboard.

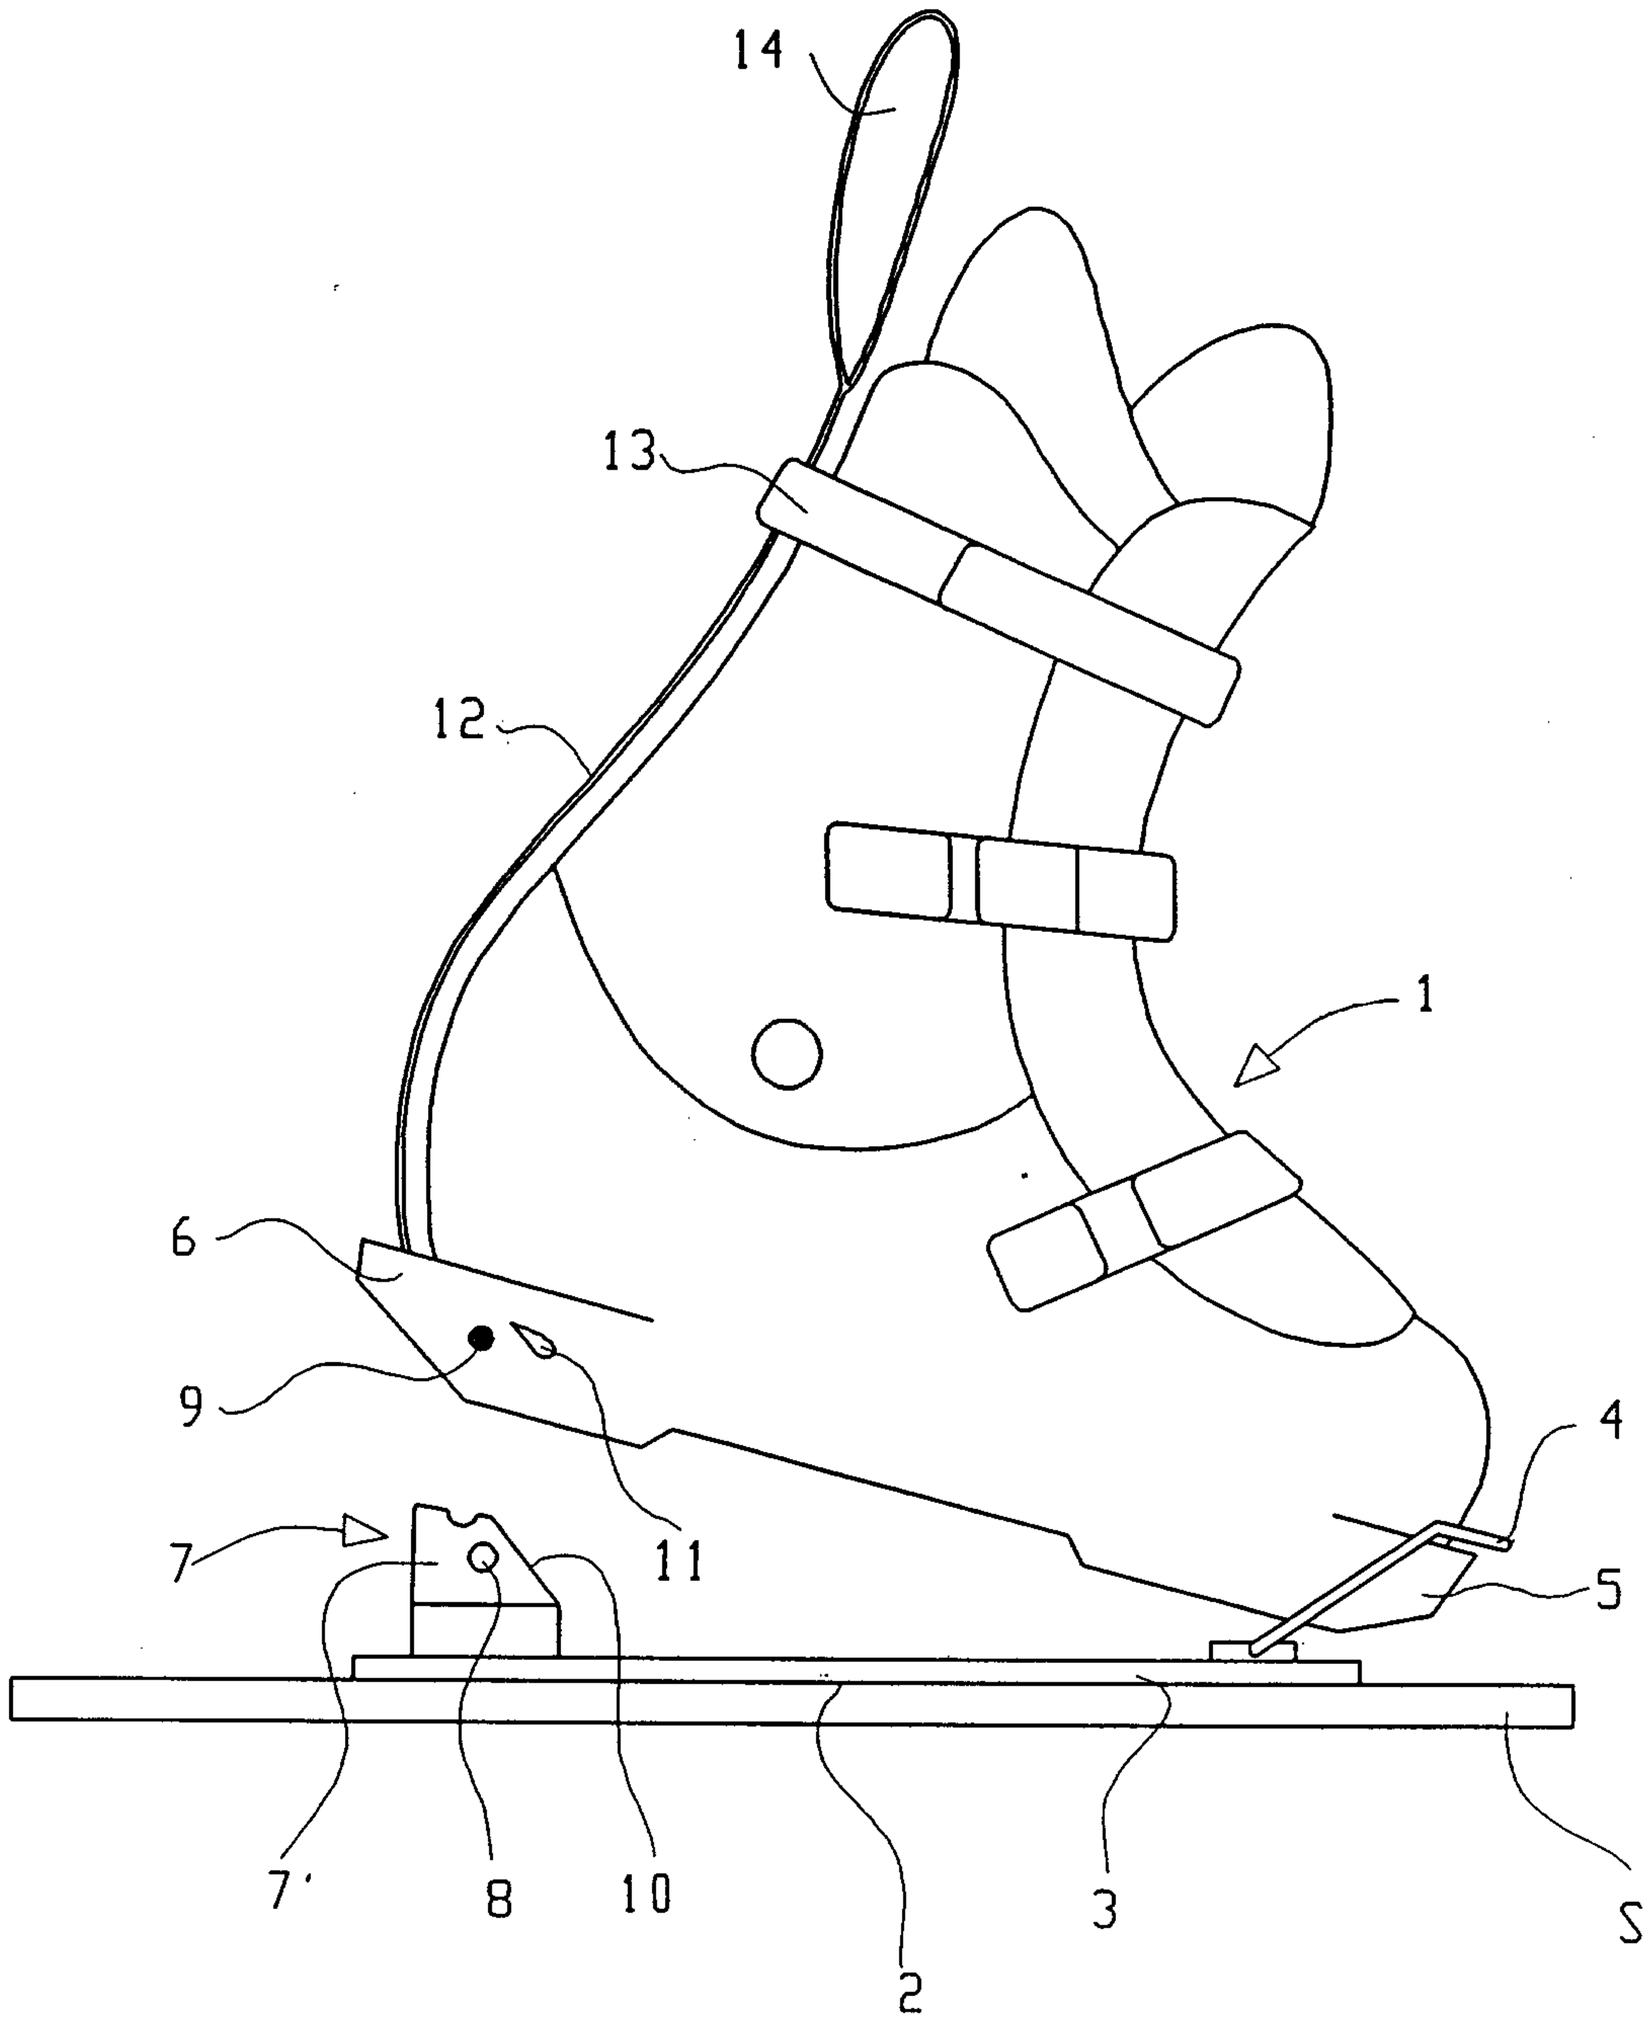


Fig. 1

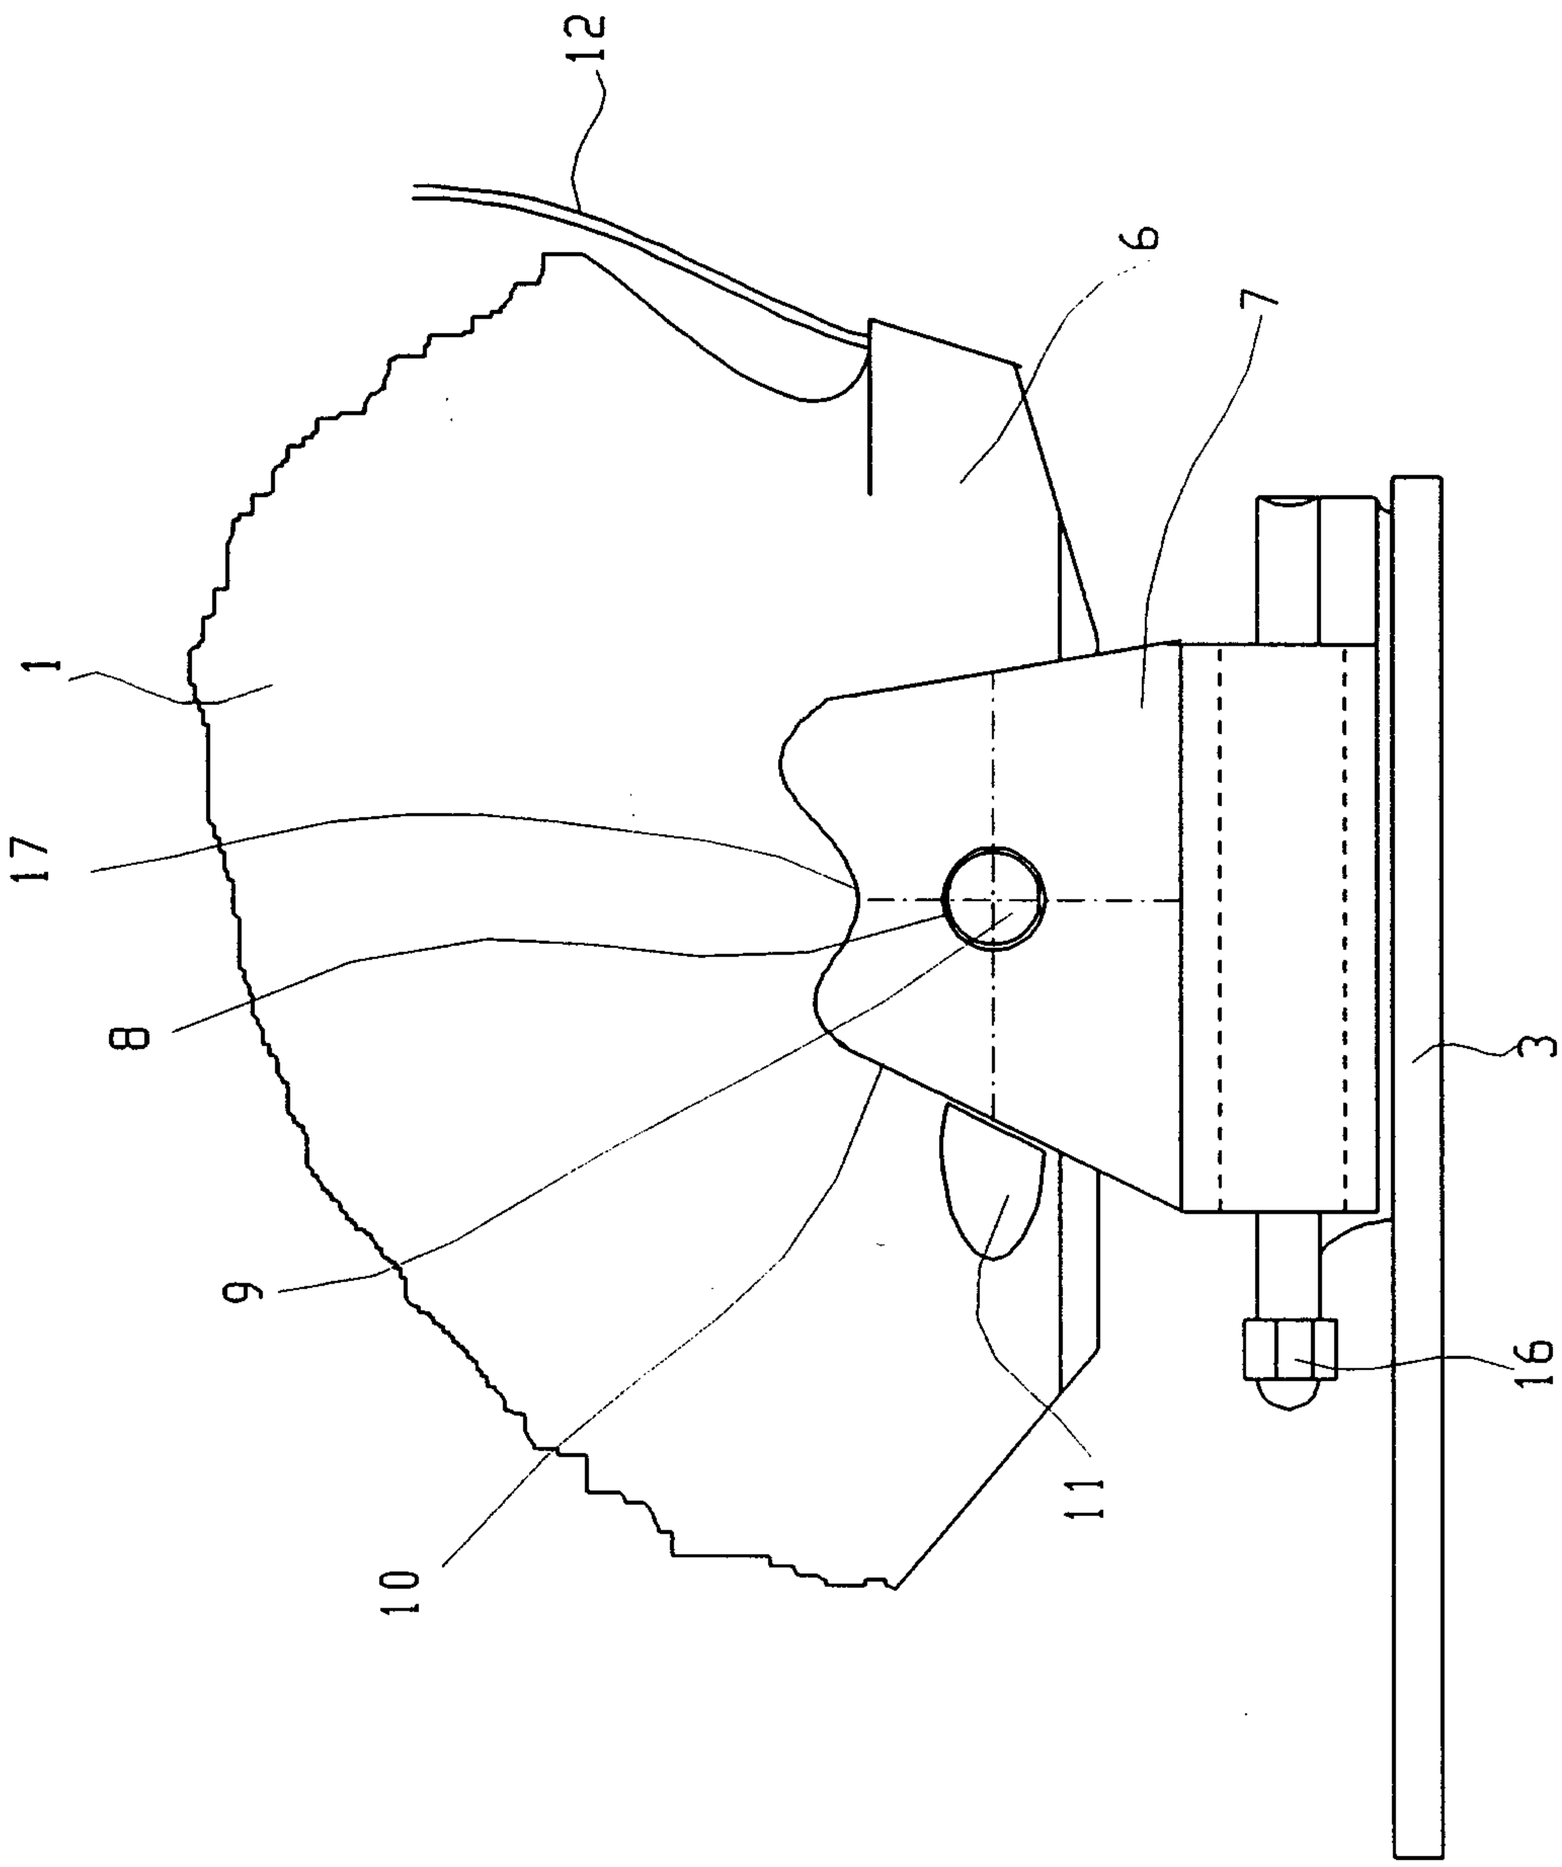


Fig. 2

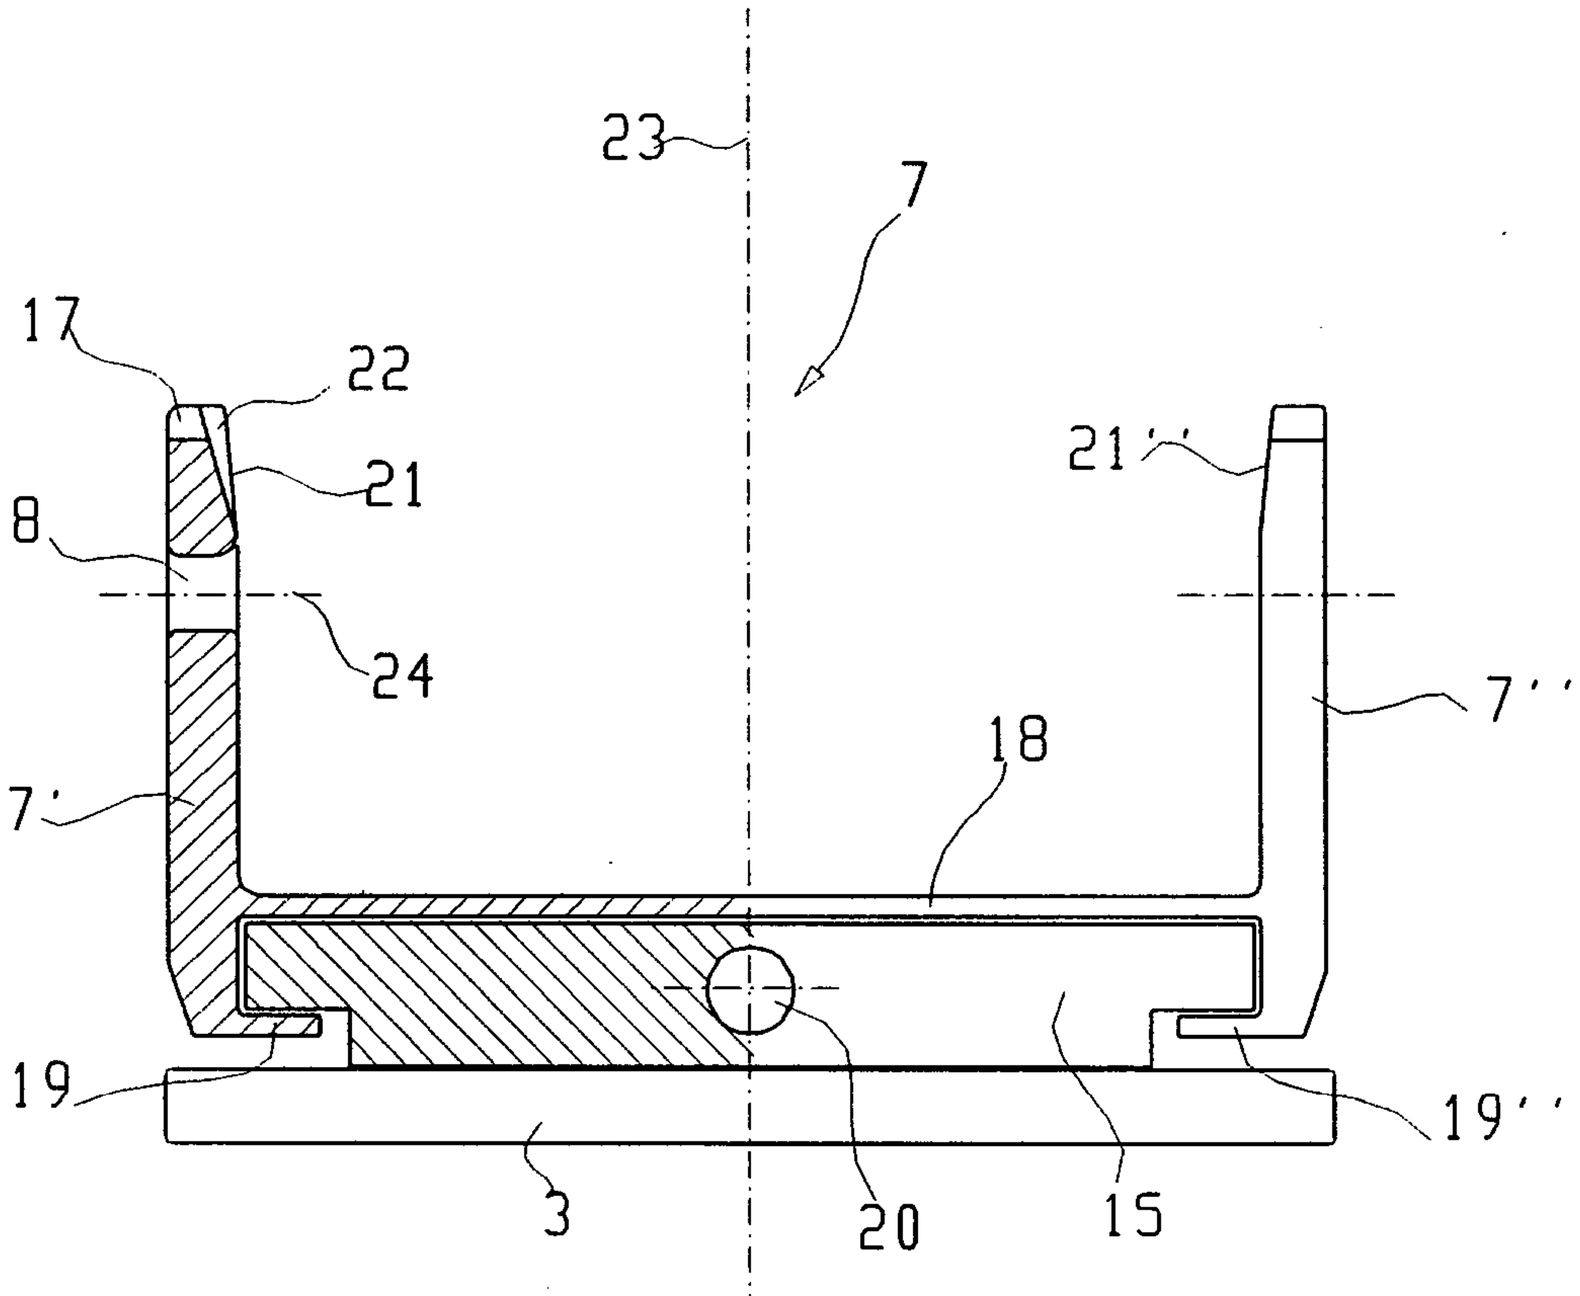


Fig. 3

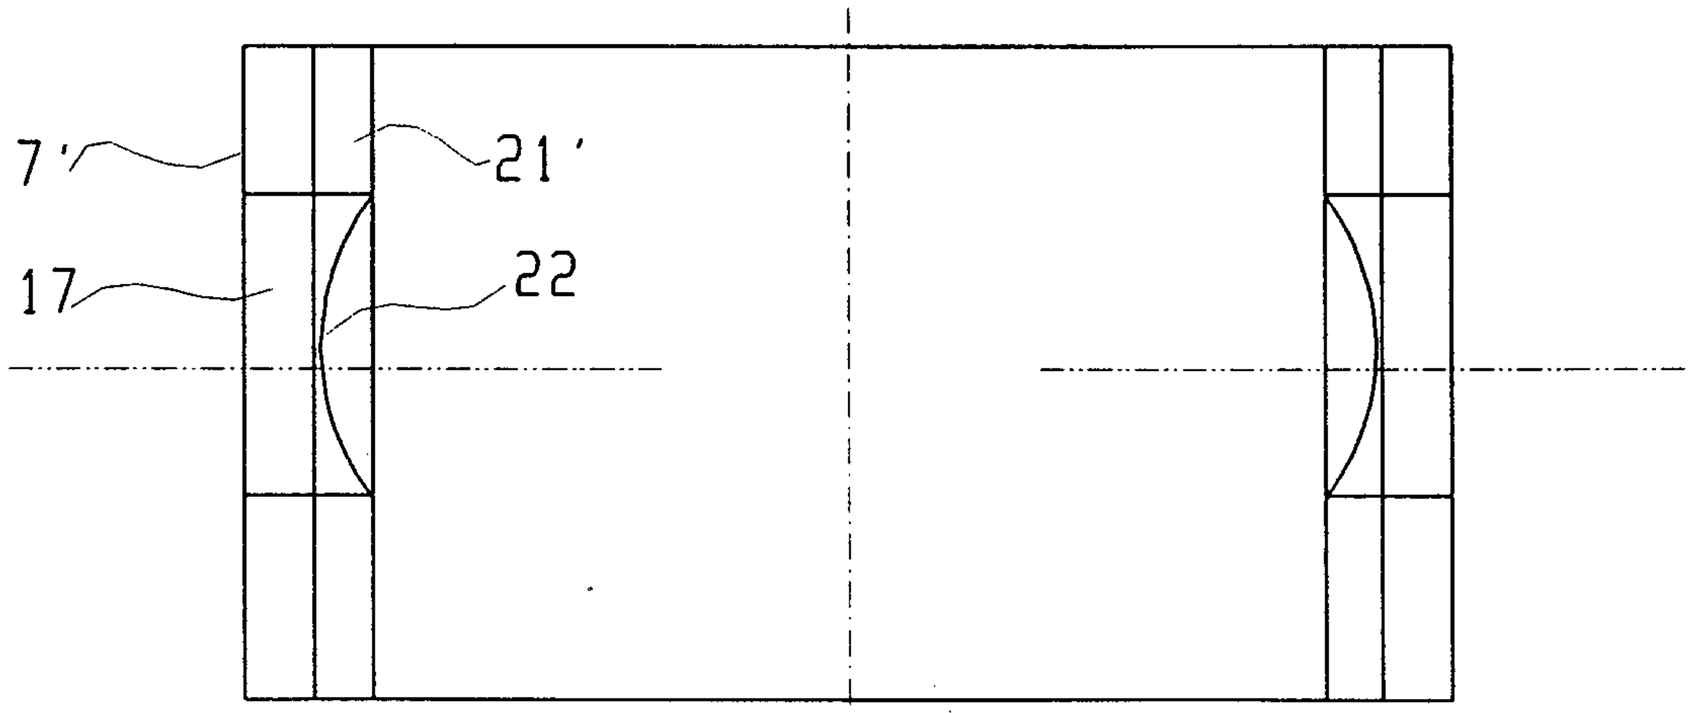


Fig. 3a

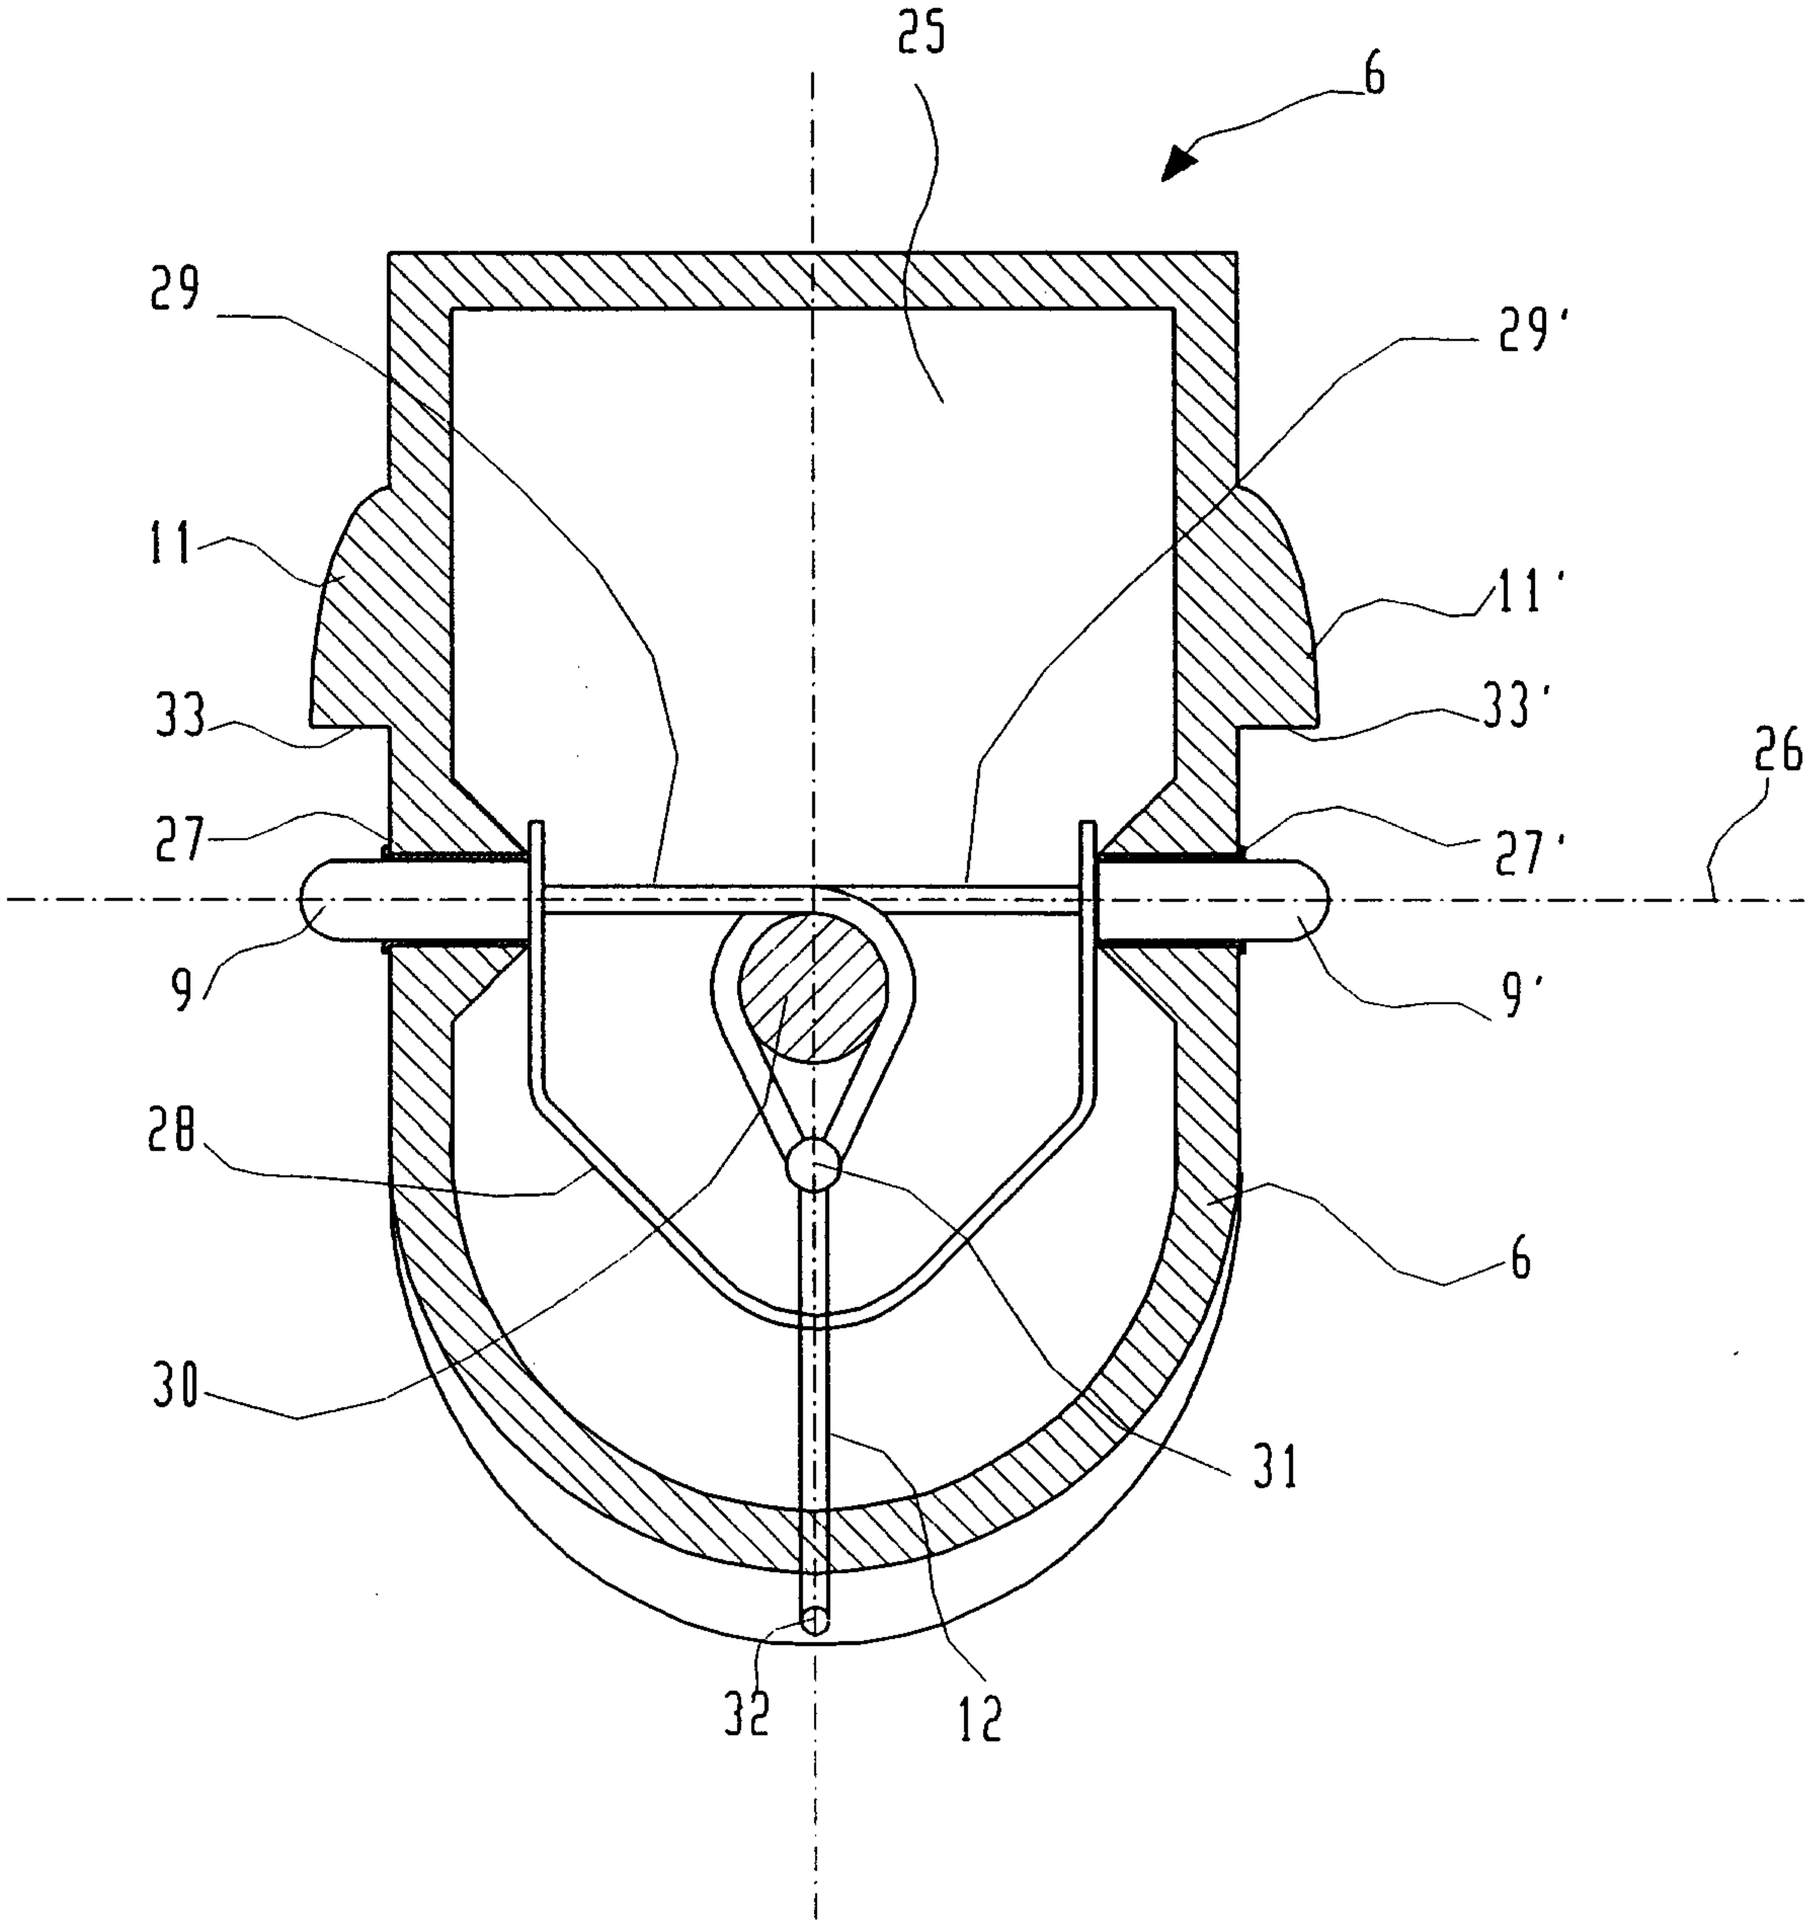


Fig. 4

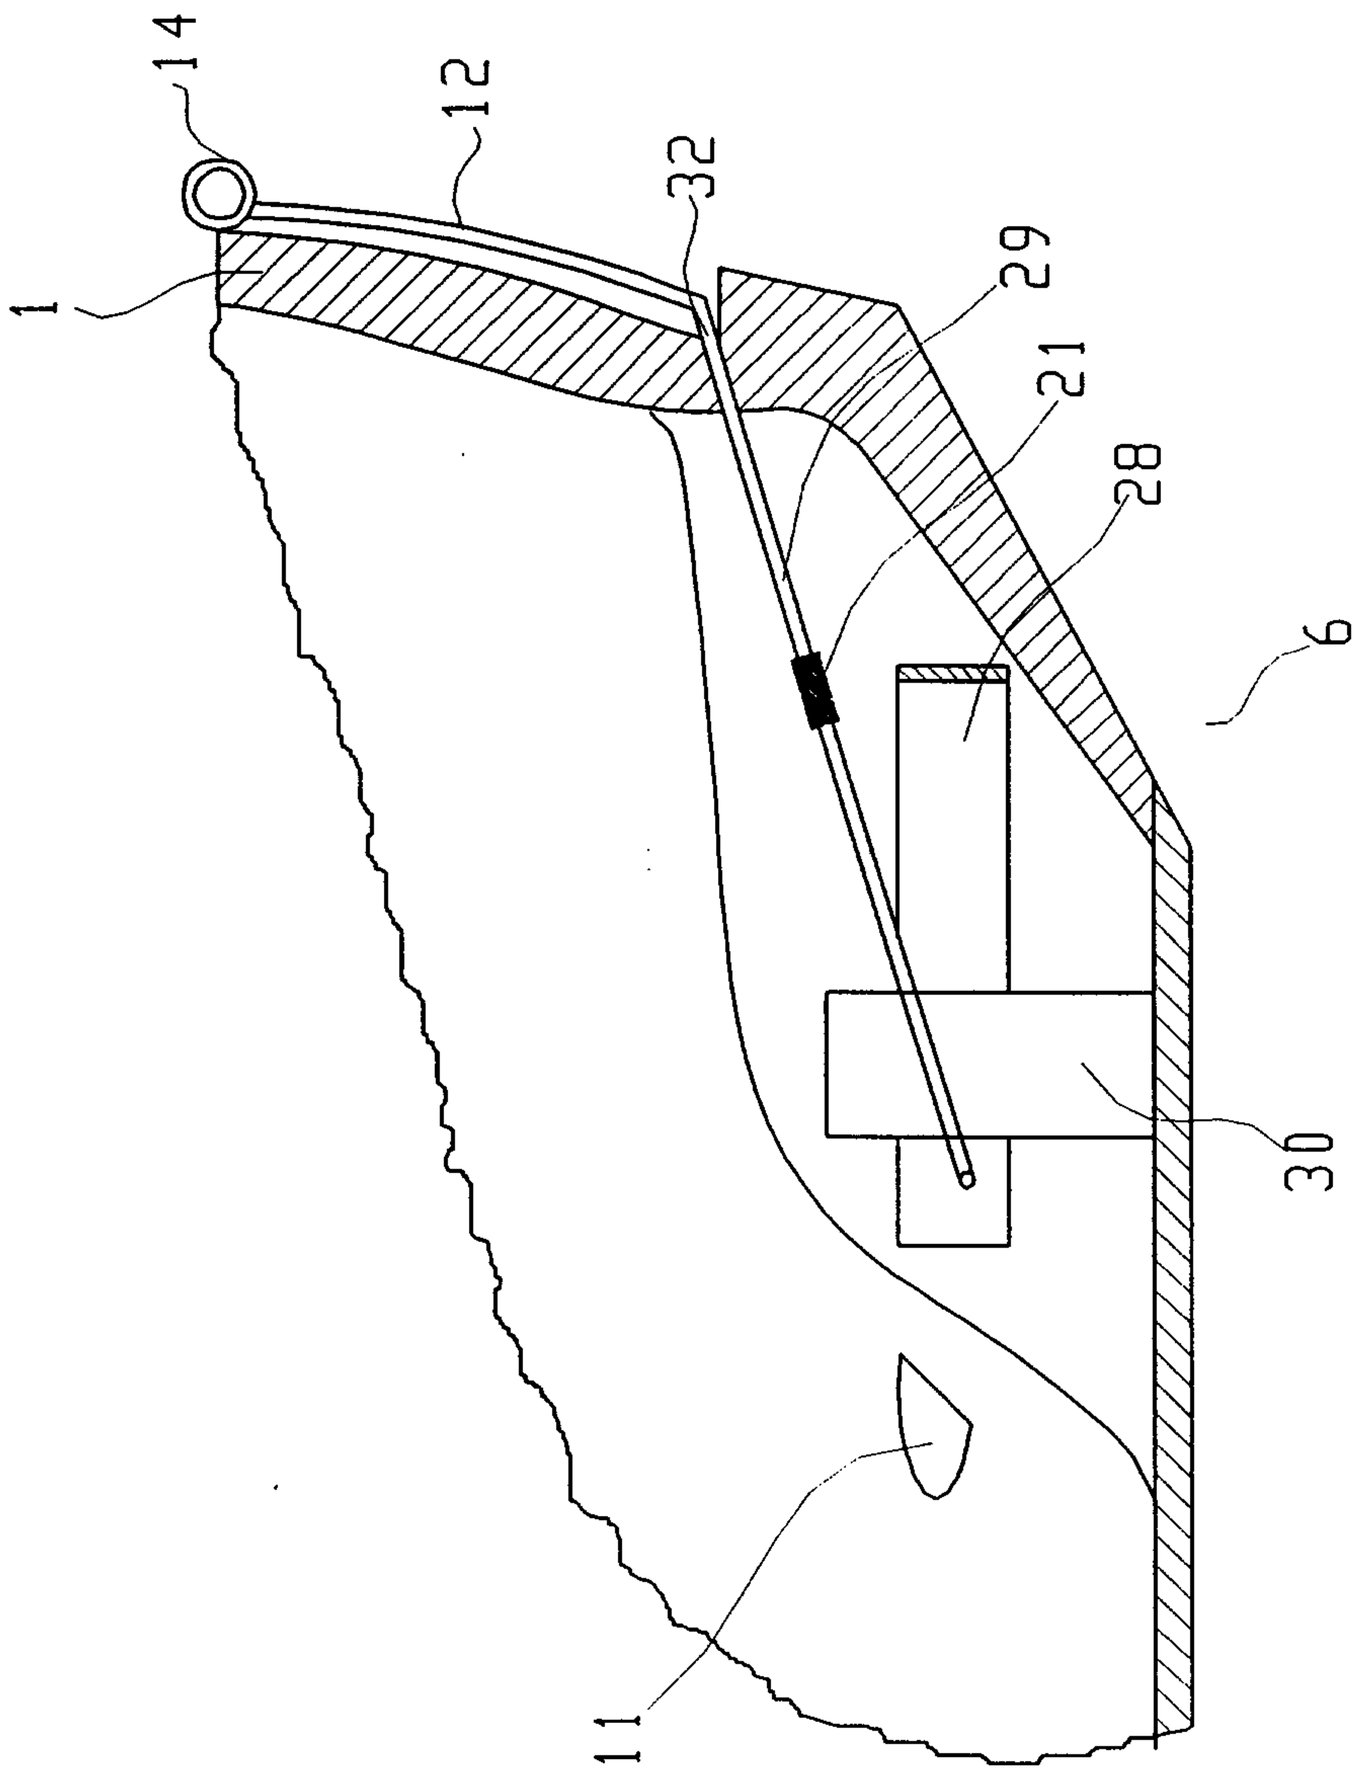


Fig. 5

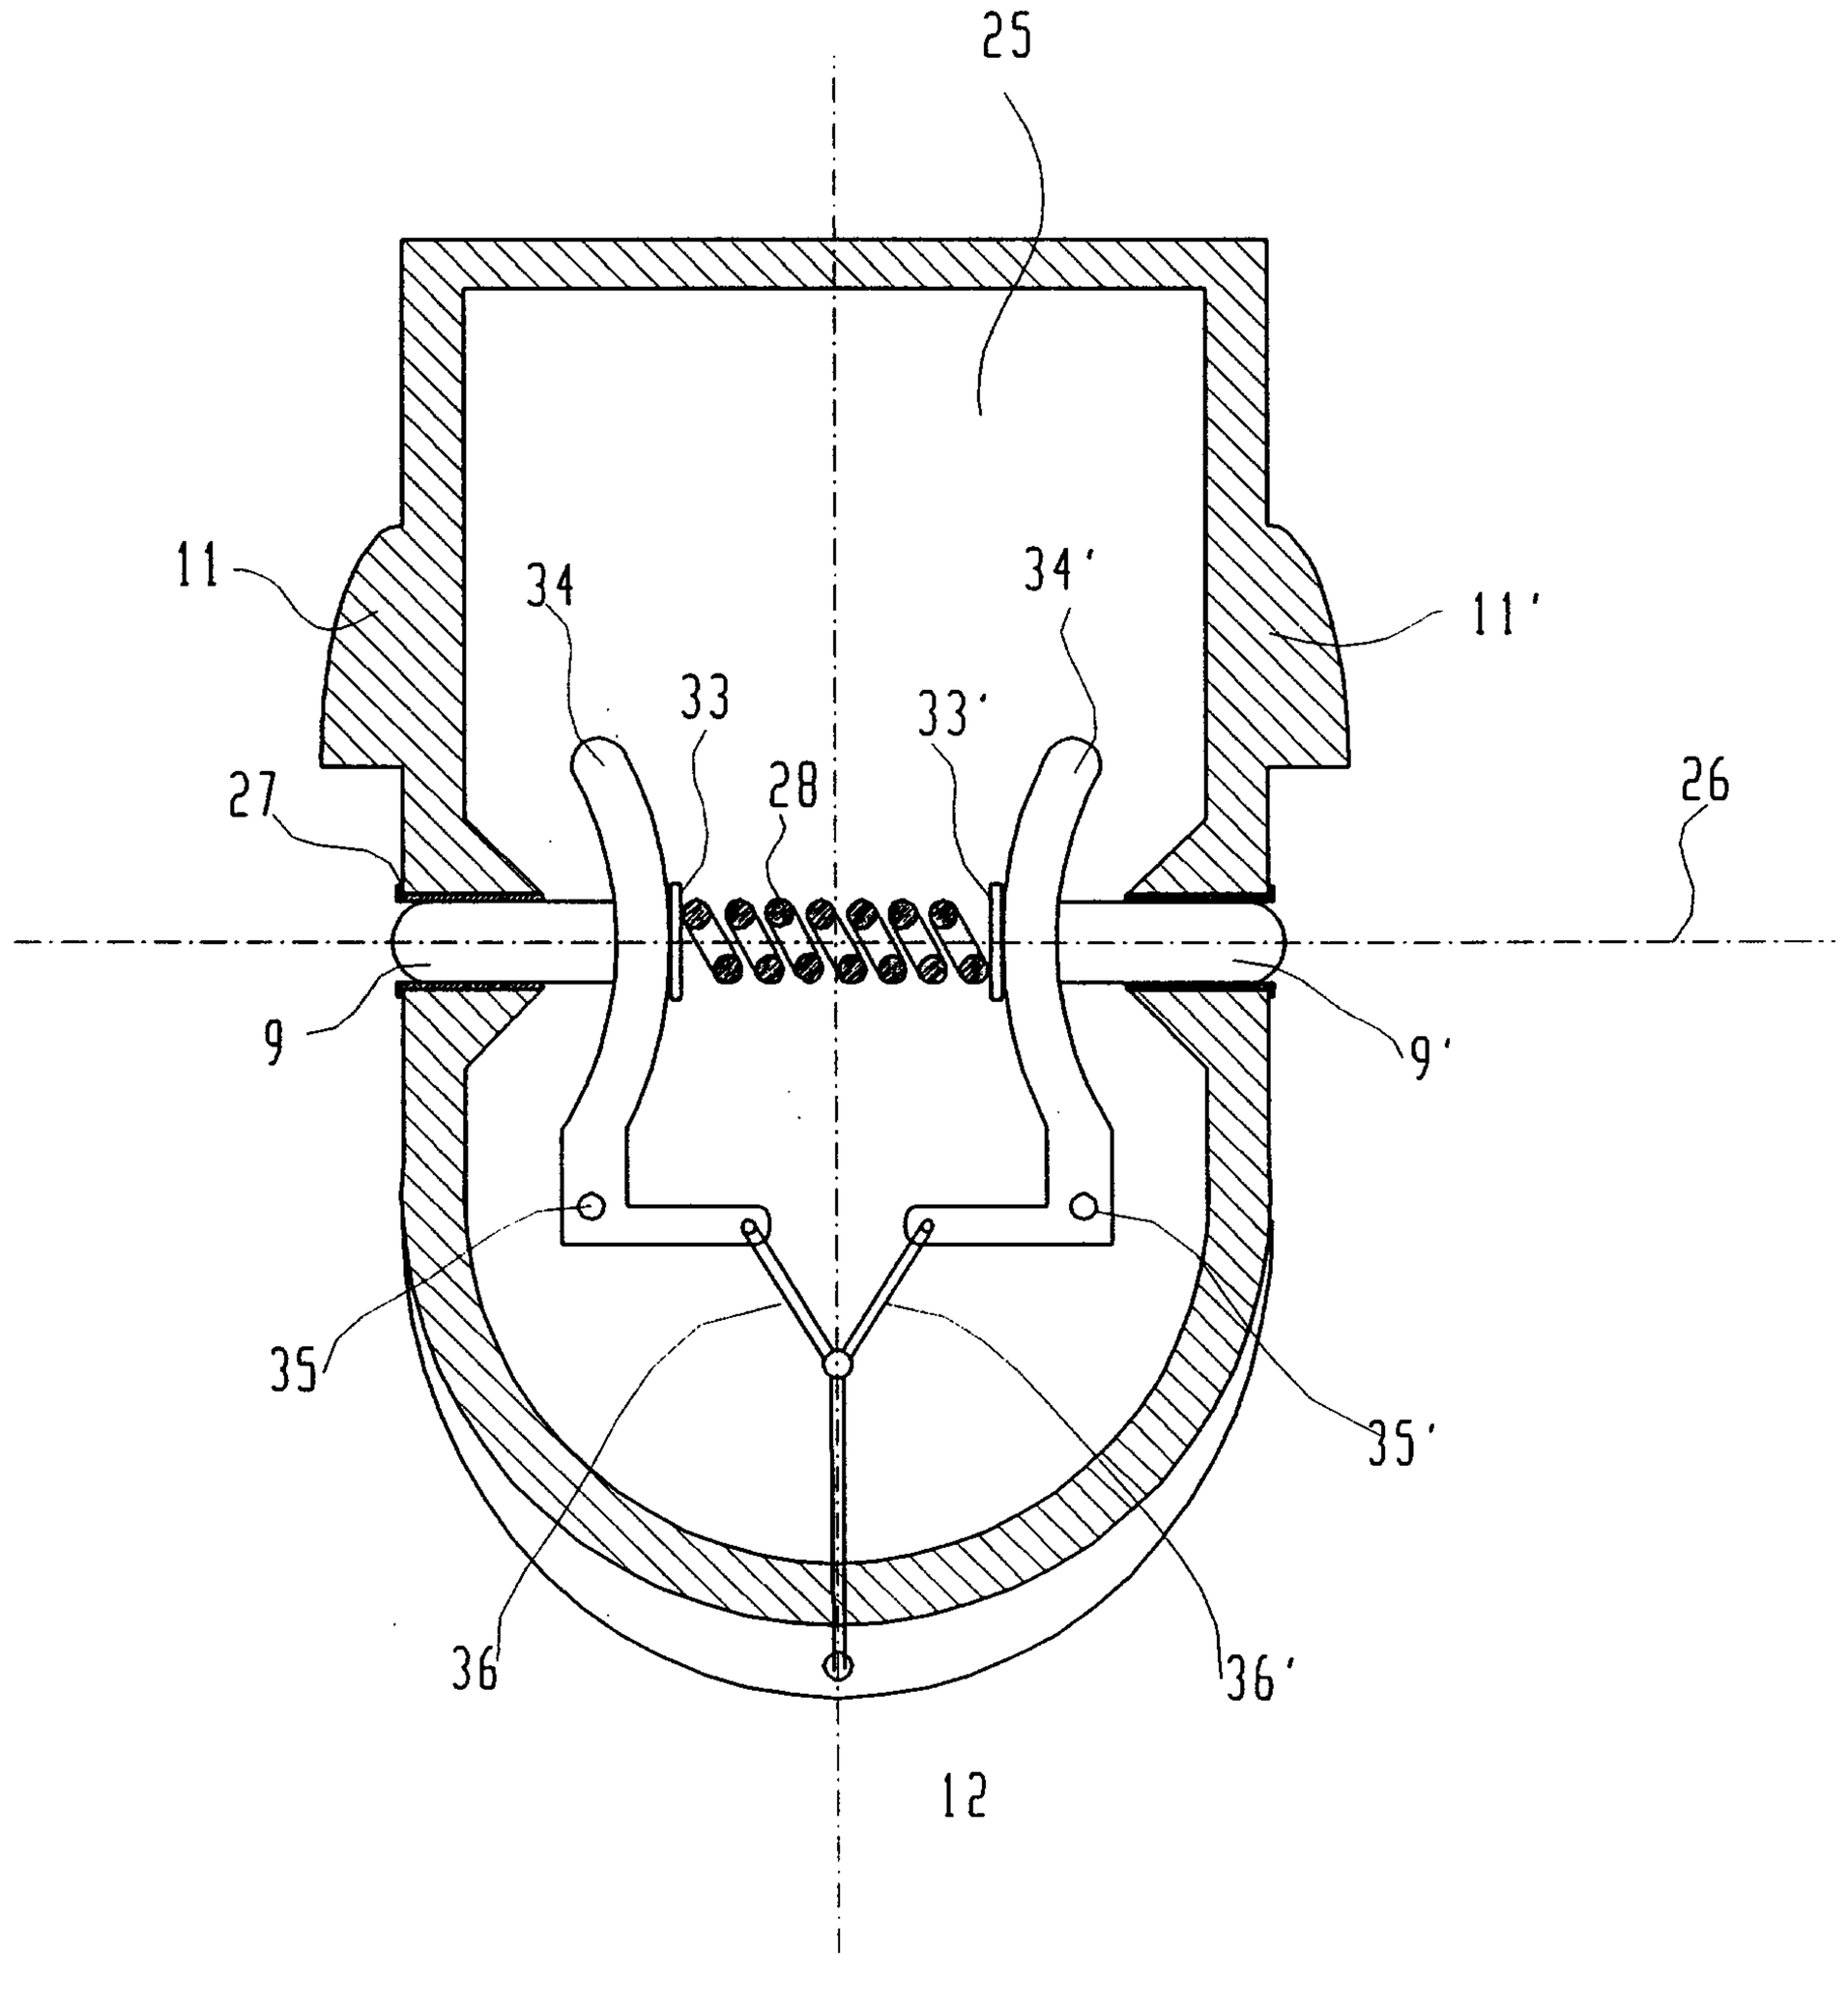


Fig. 6

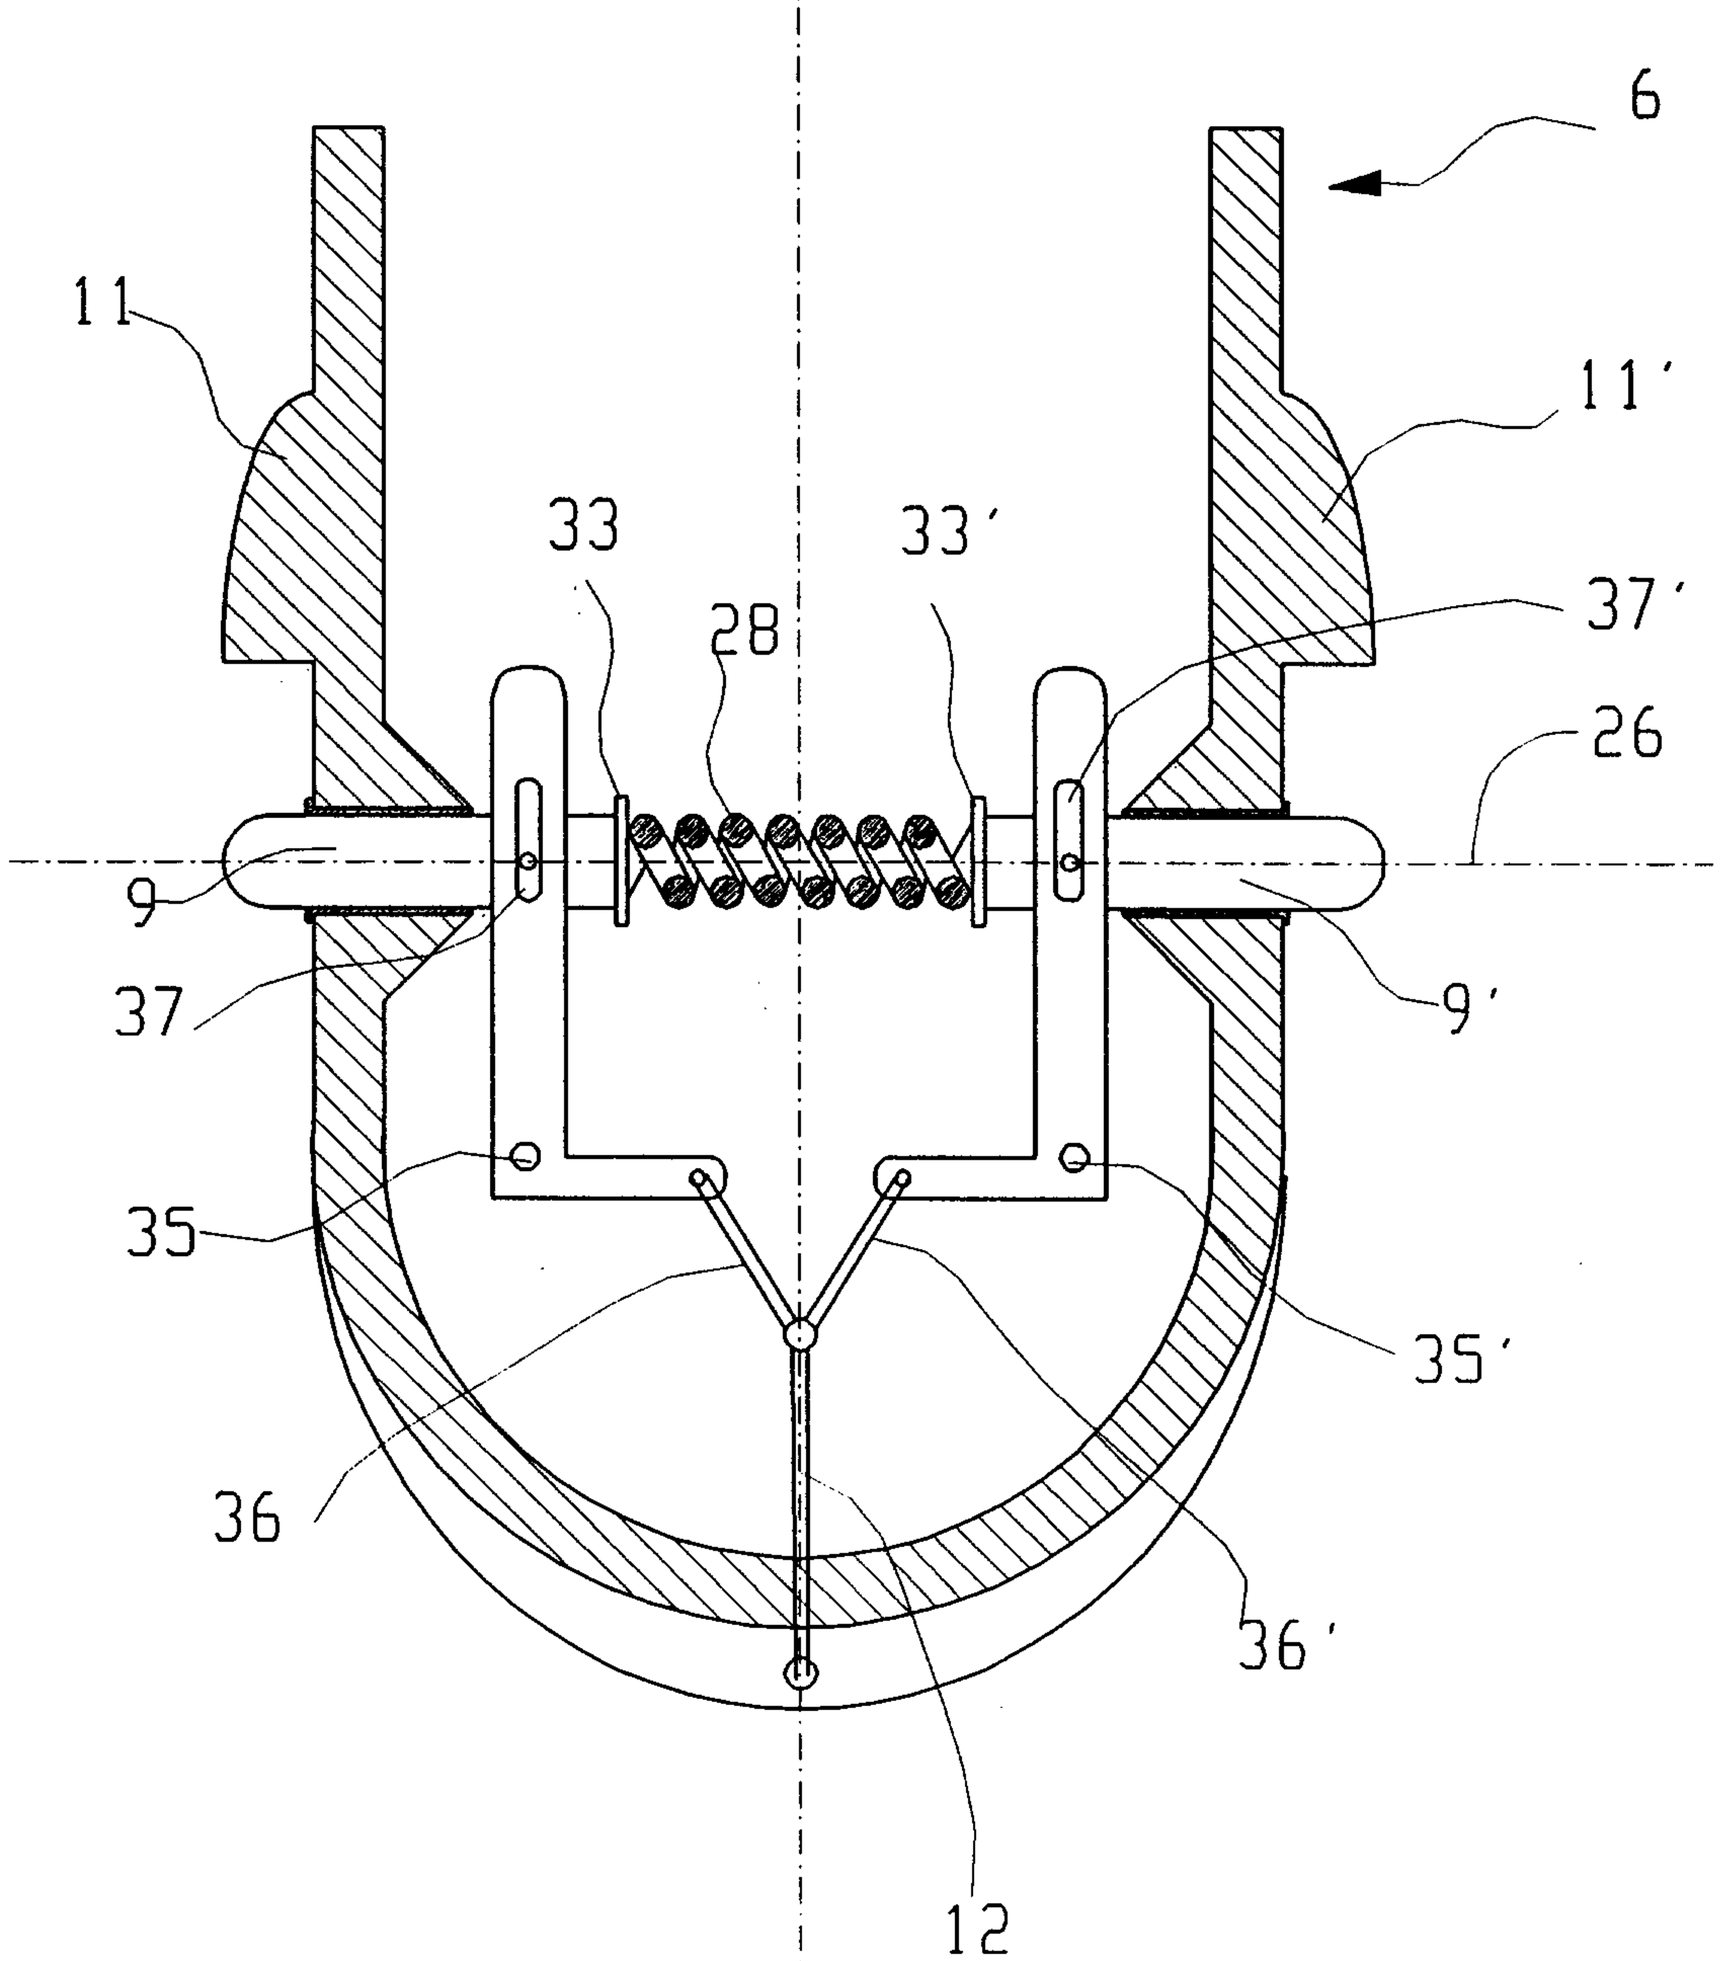


Fig. 7

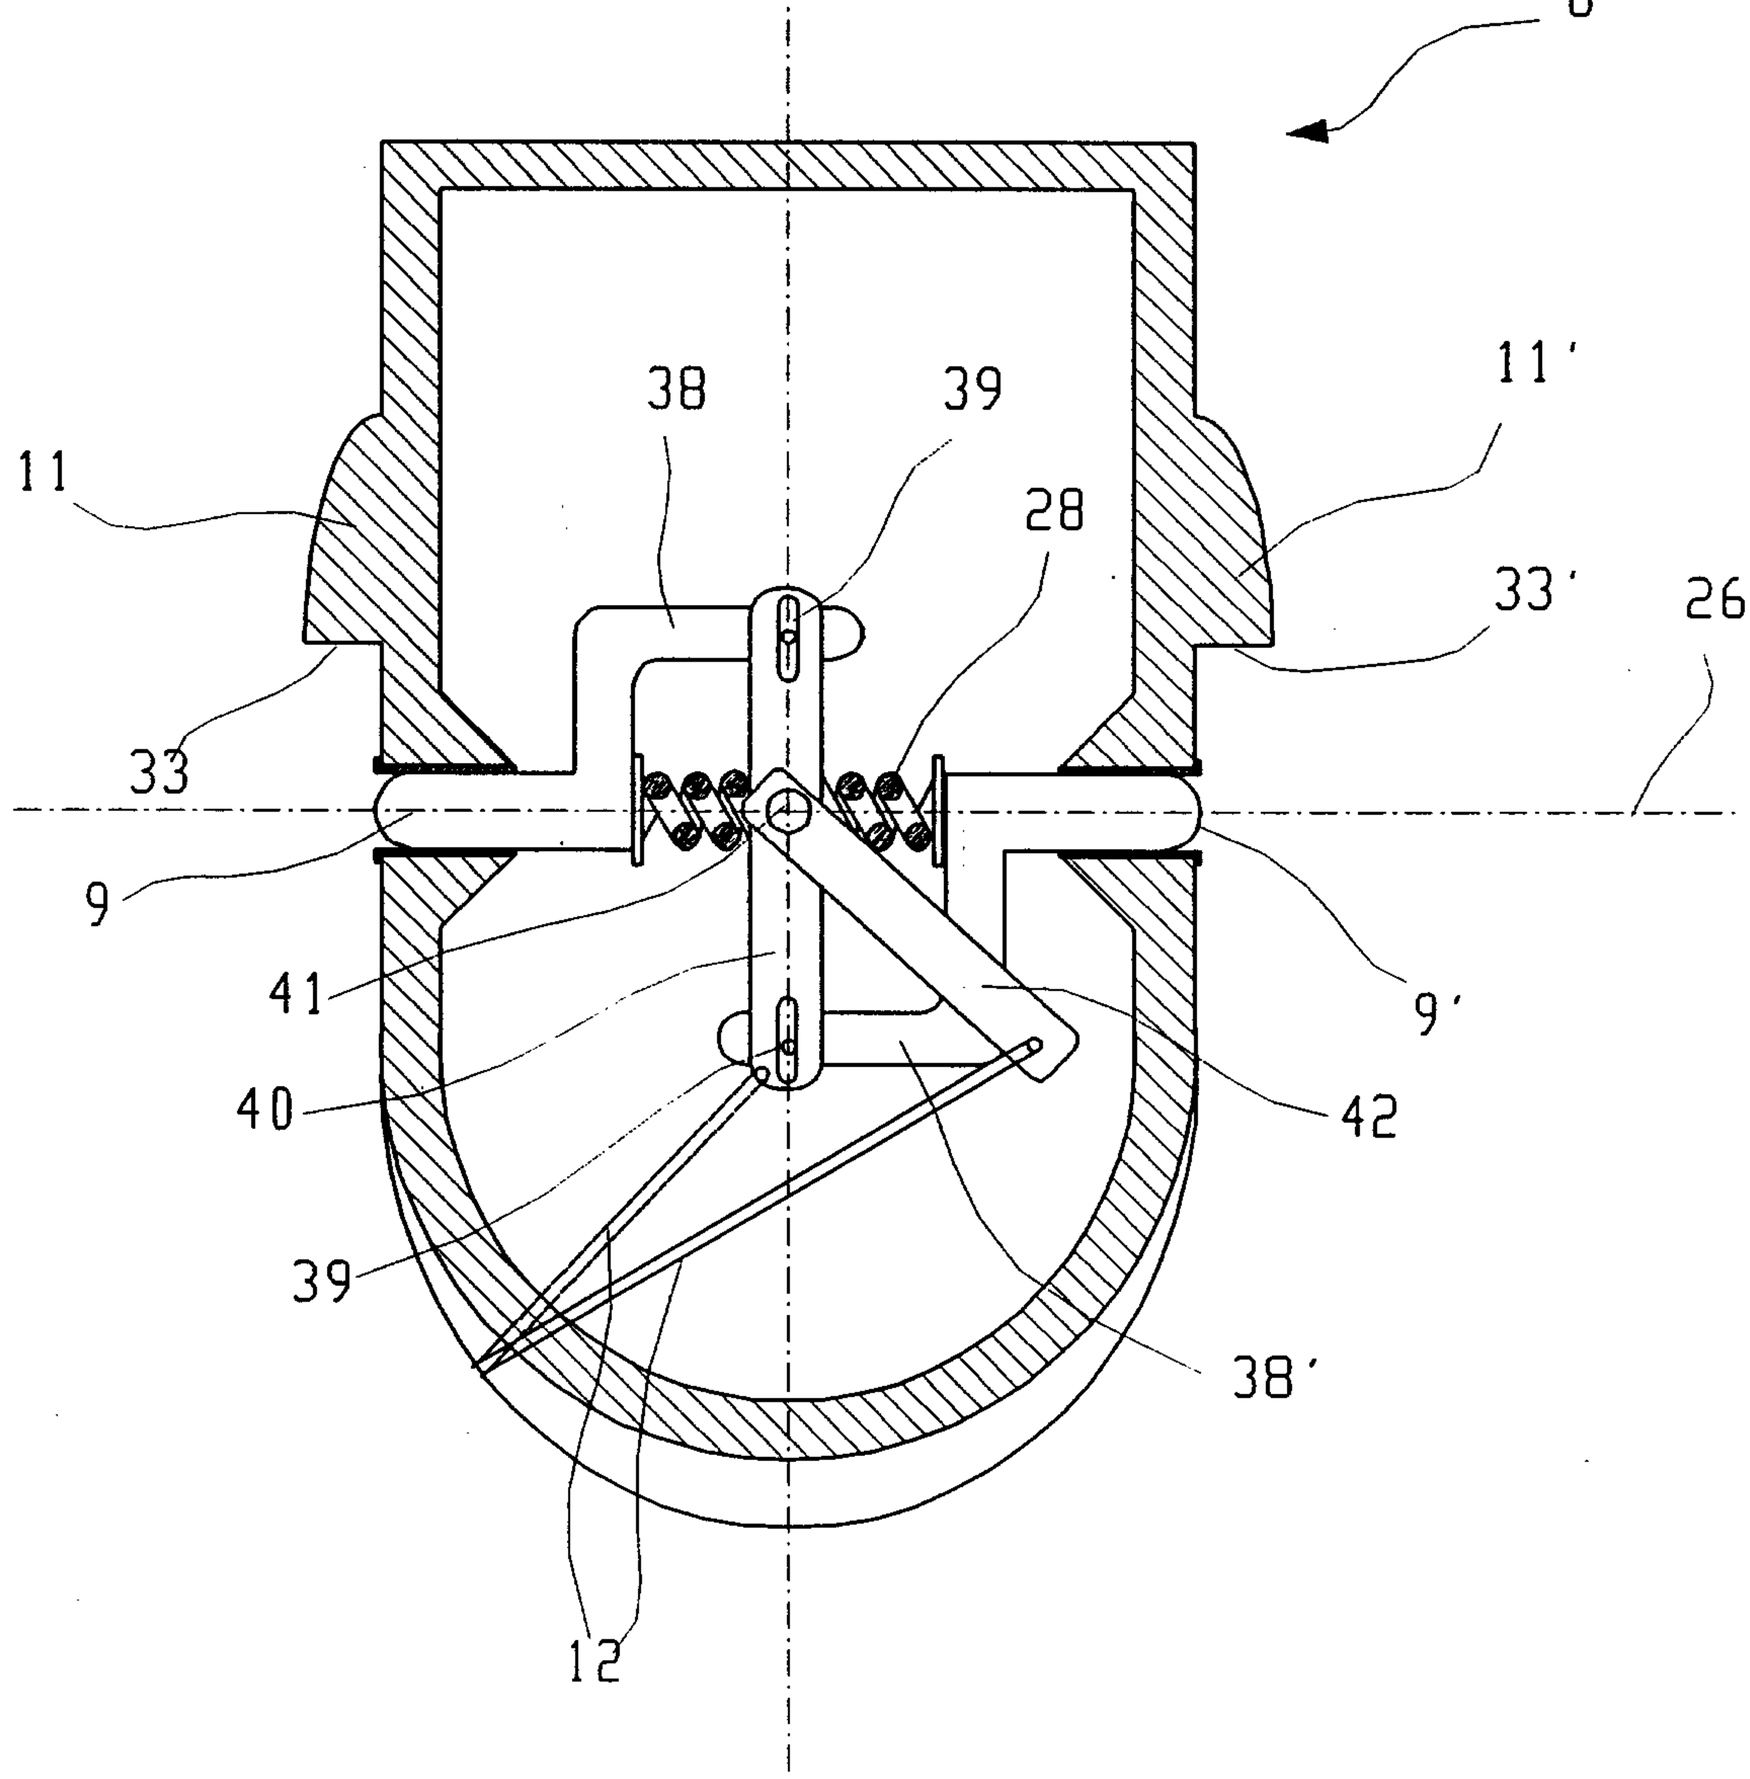


Fig. 8

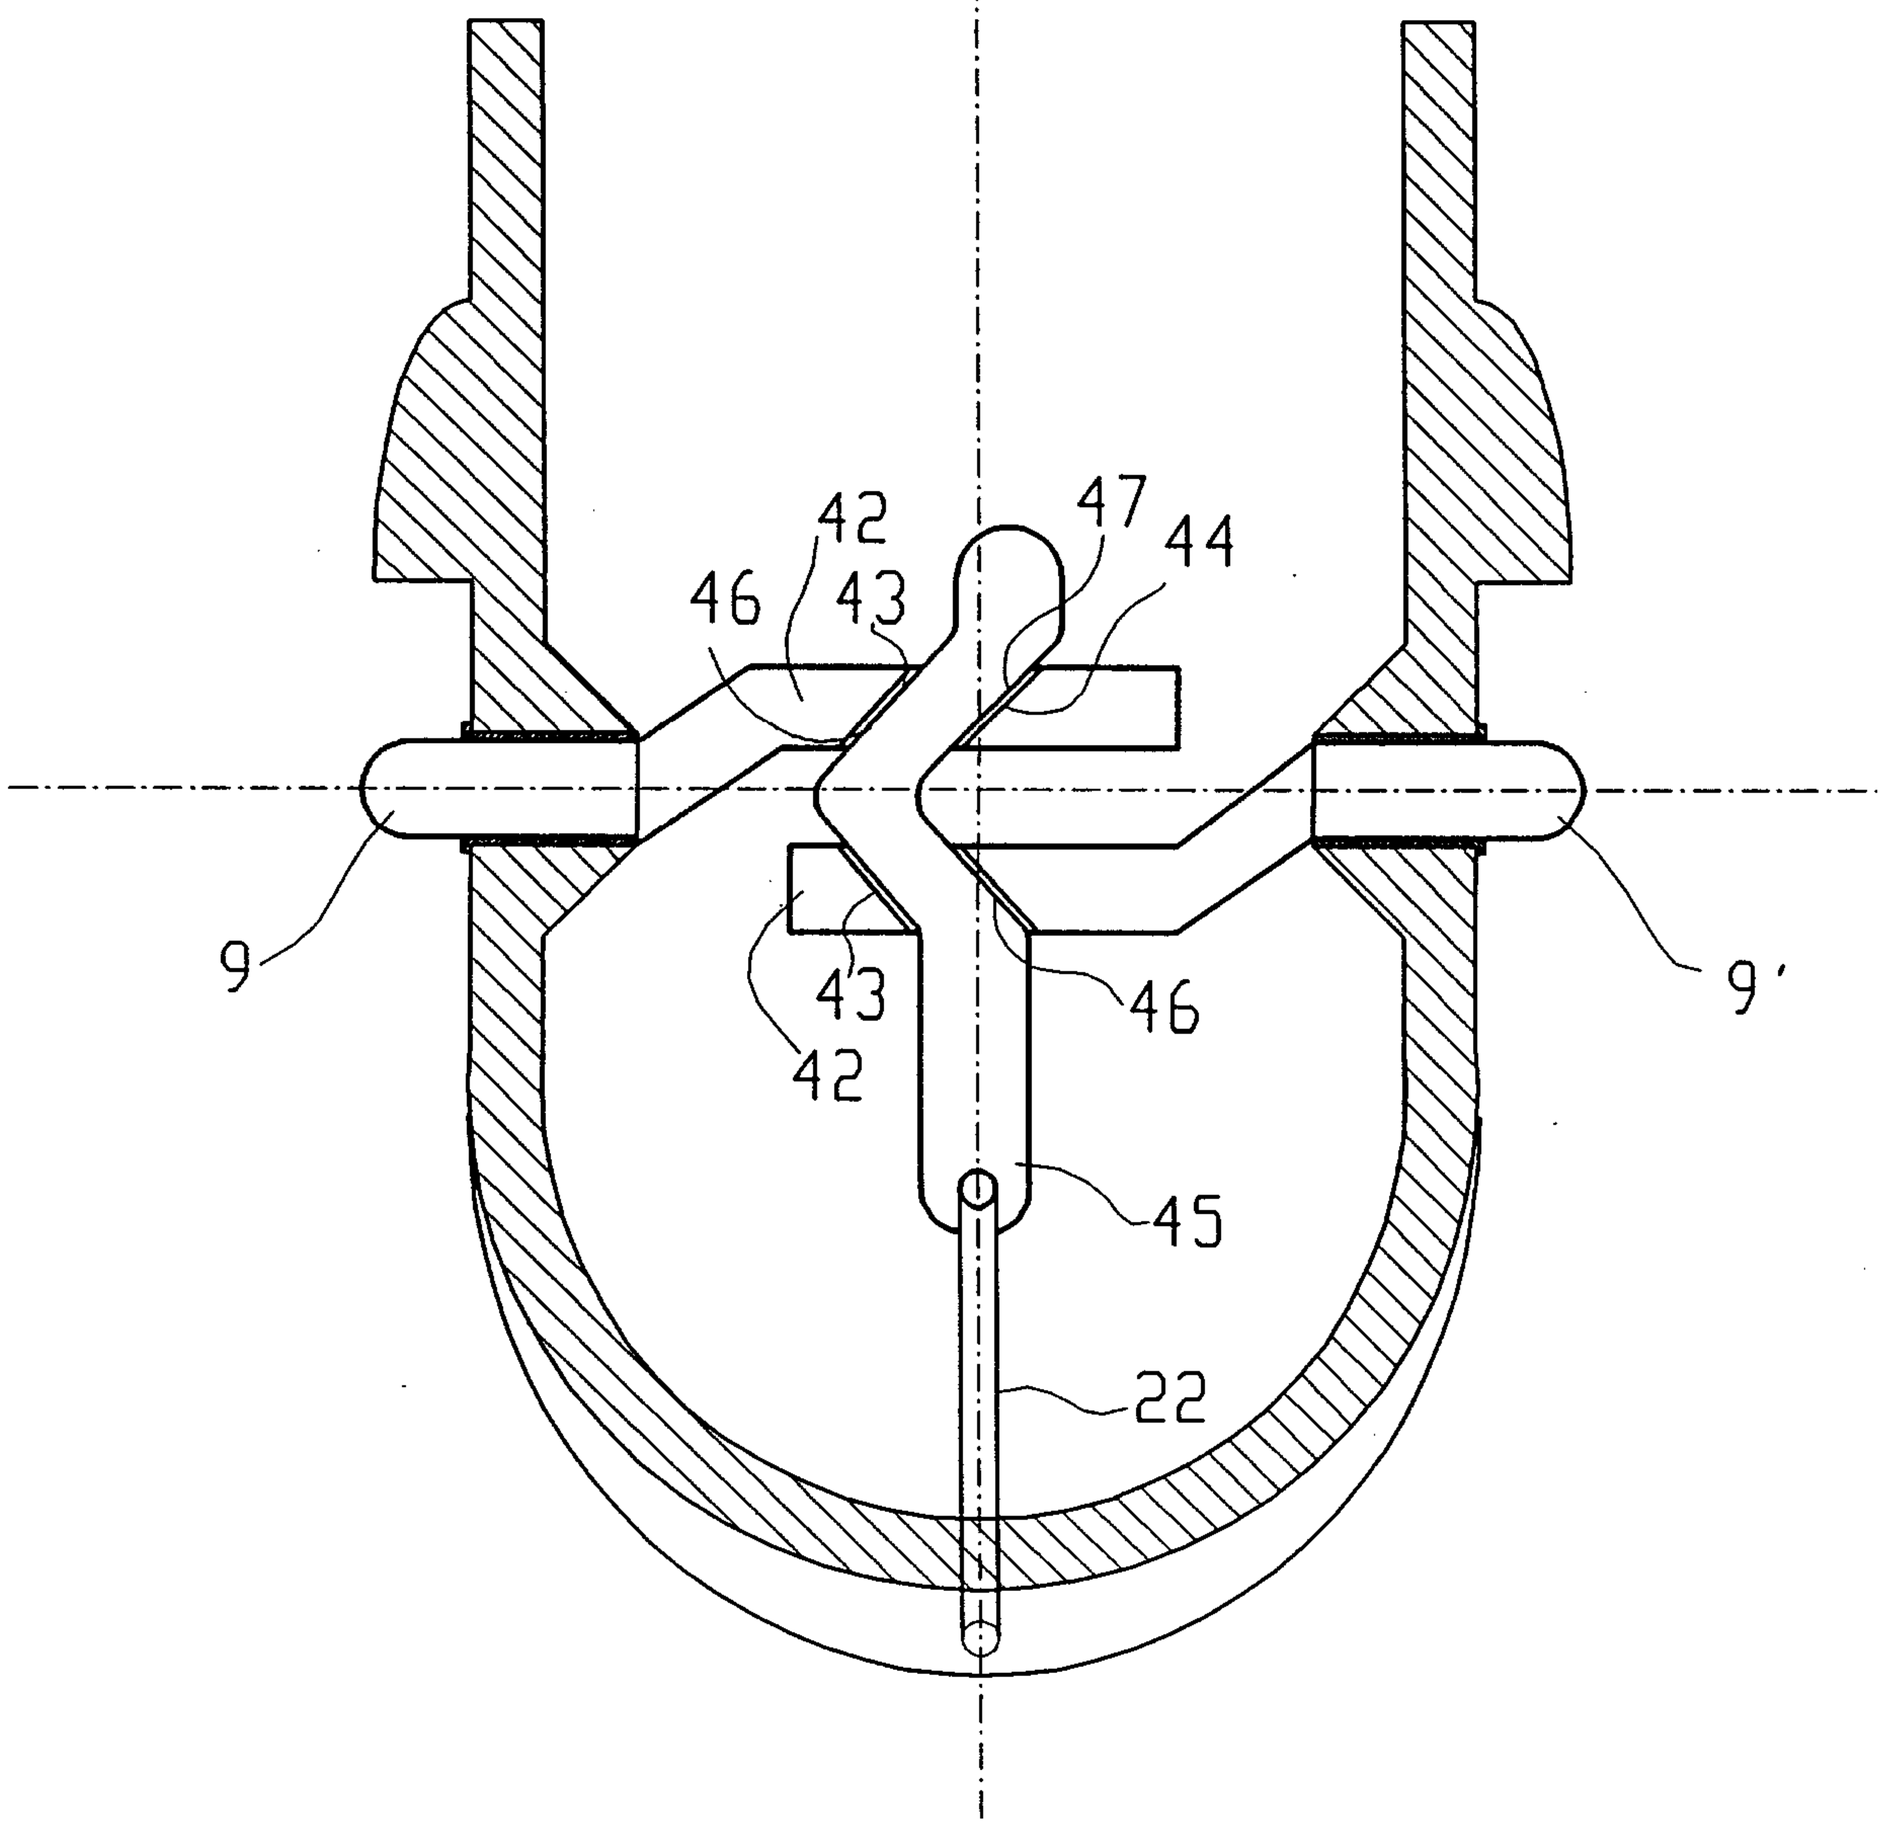


Fig. 9

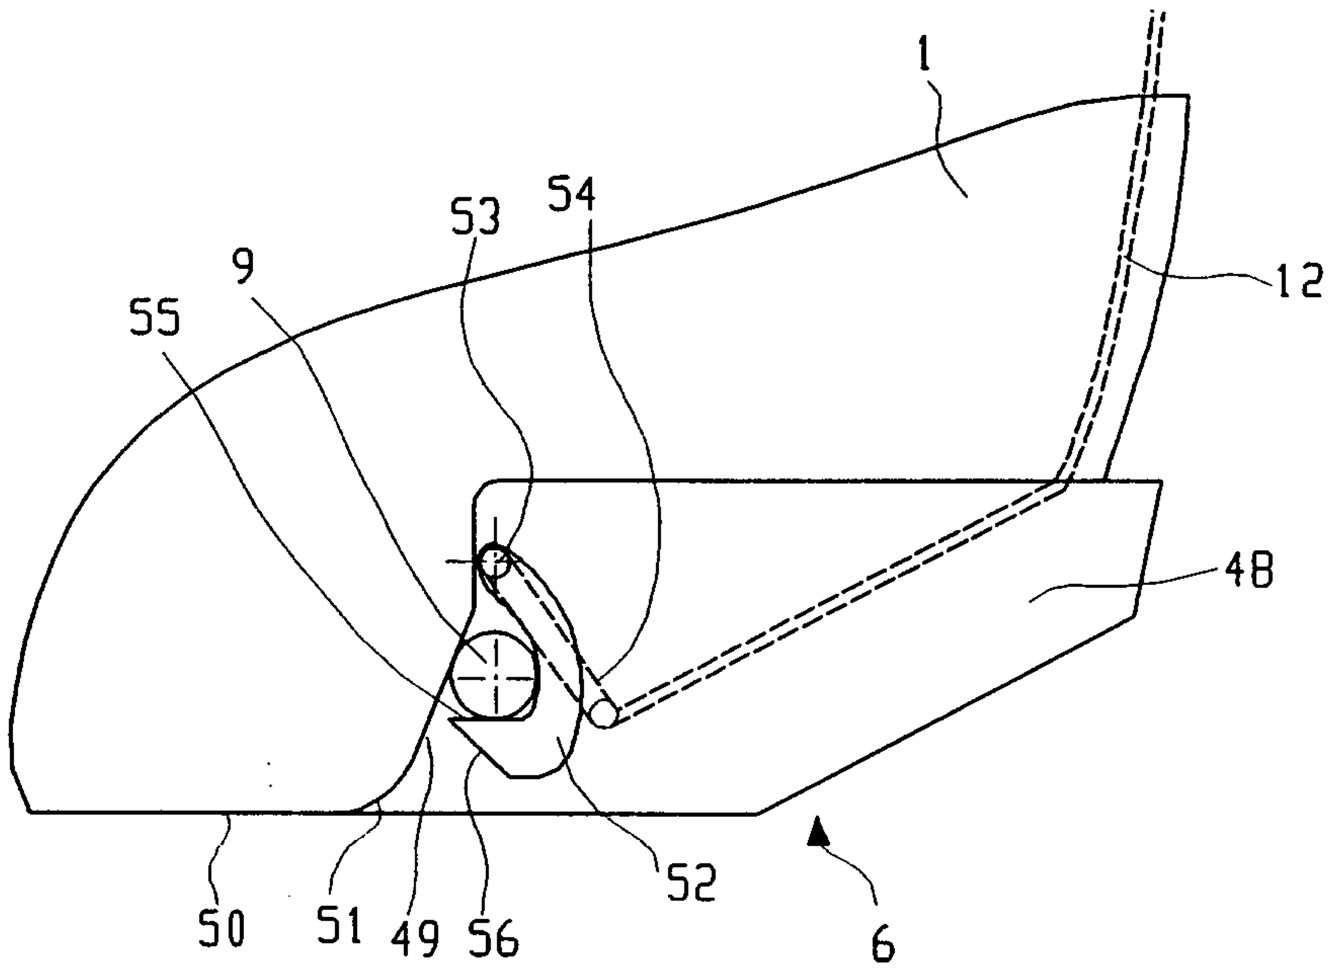


Fig. 10A

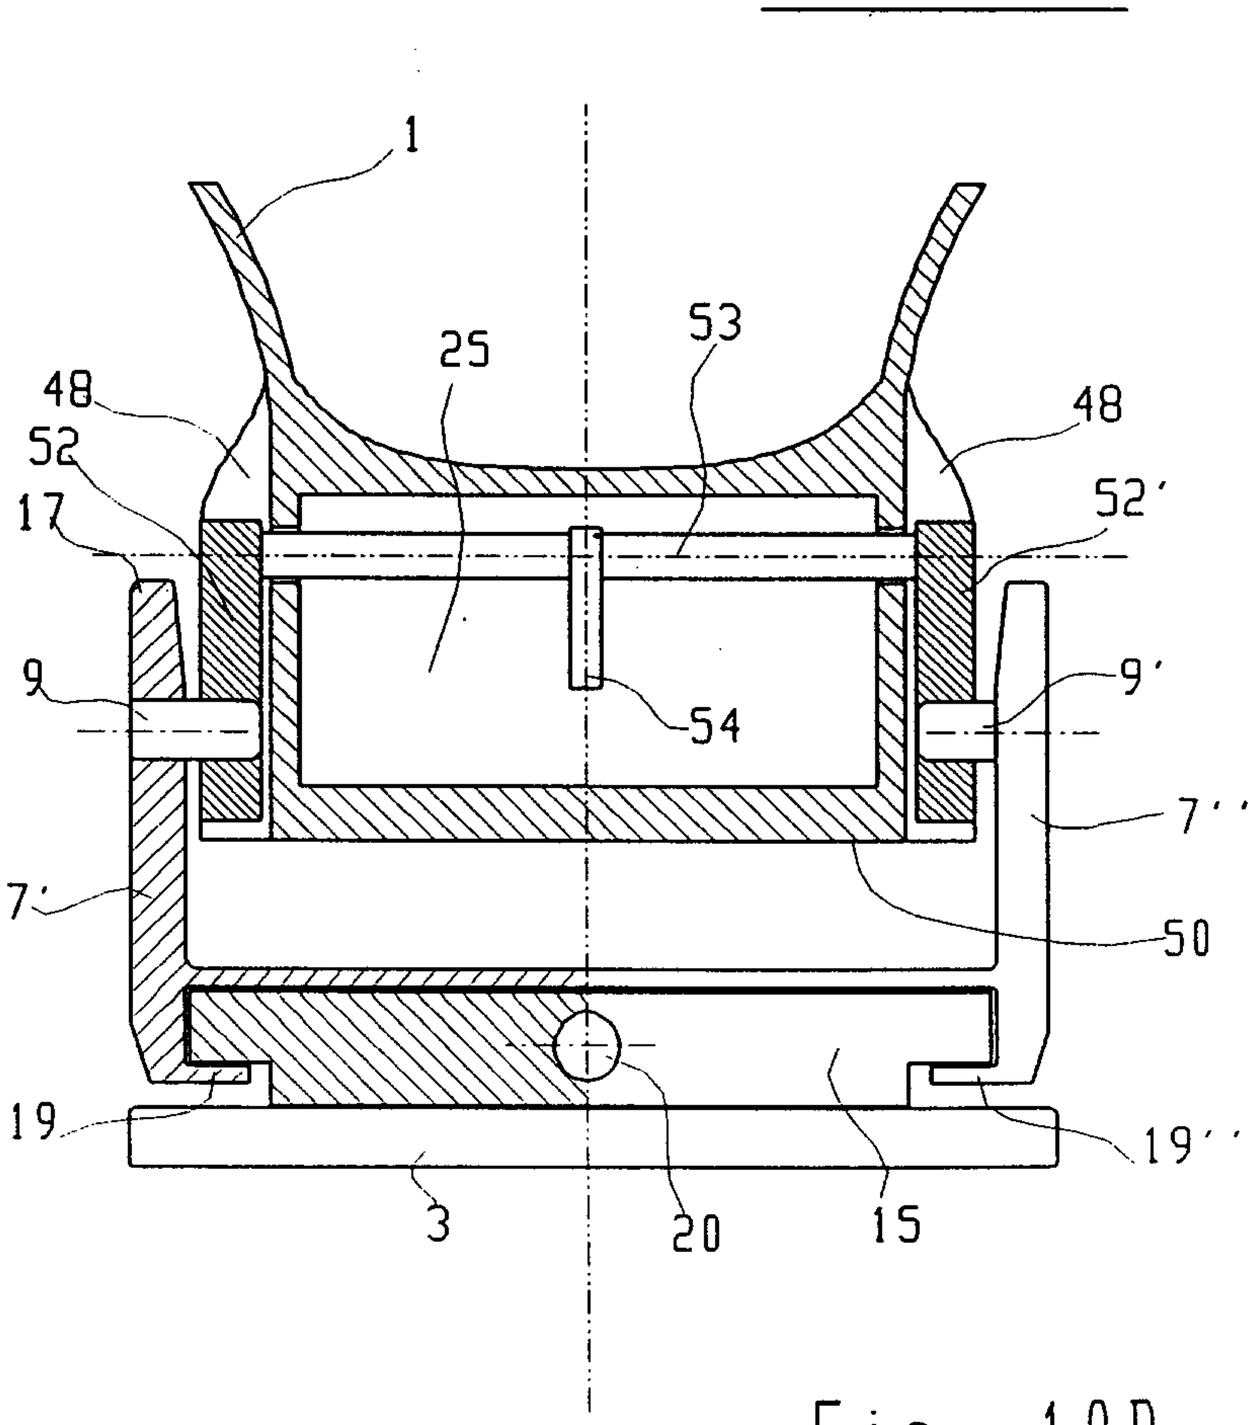


Fig. 10B

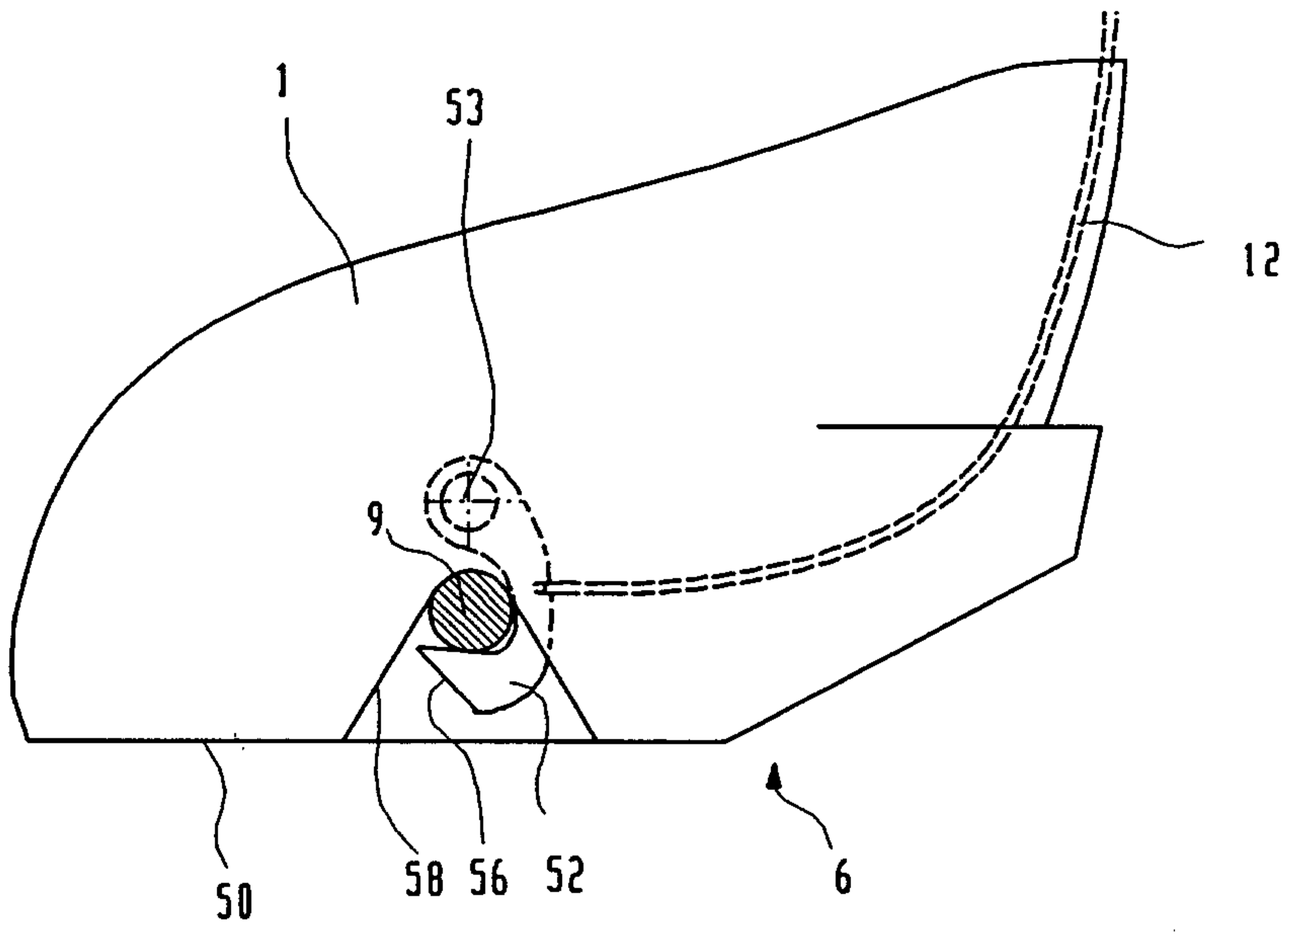


Fig. 11A

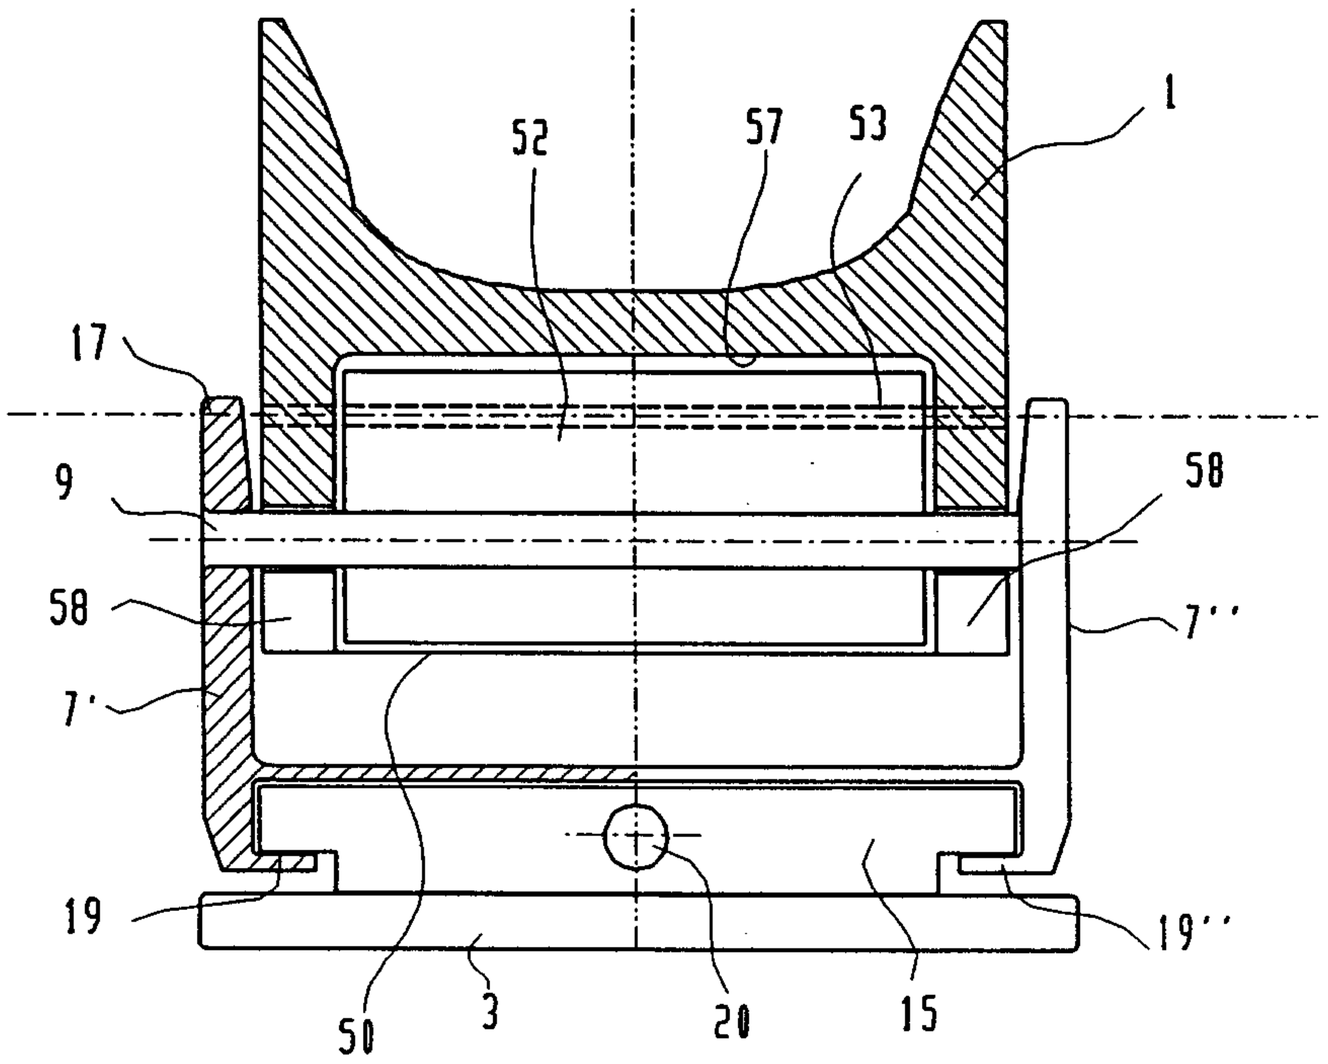


Fig. 11B

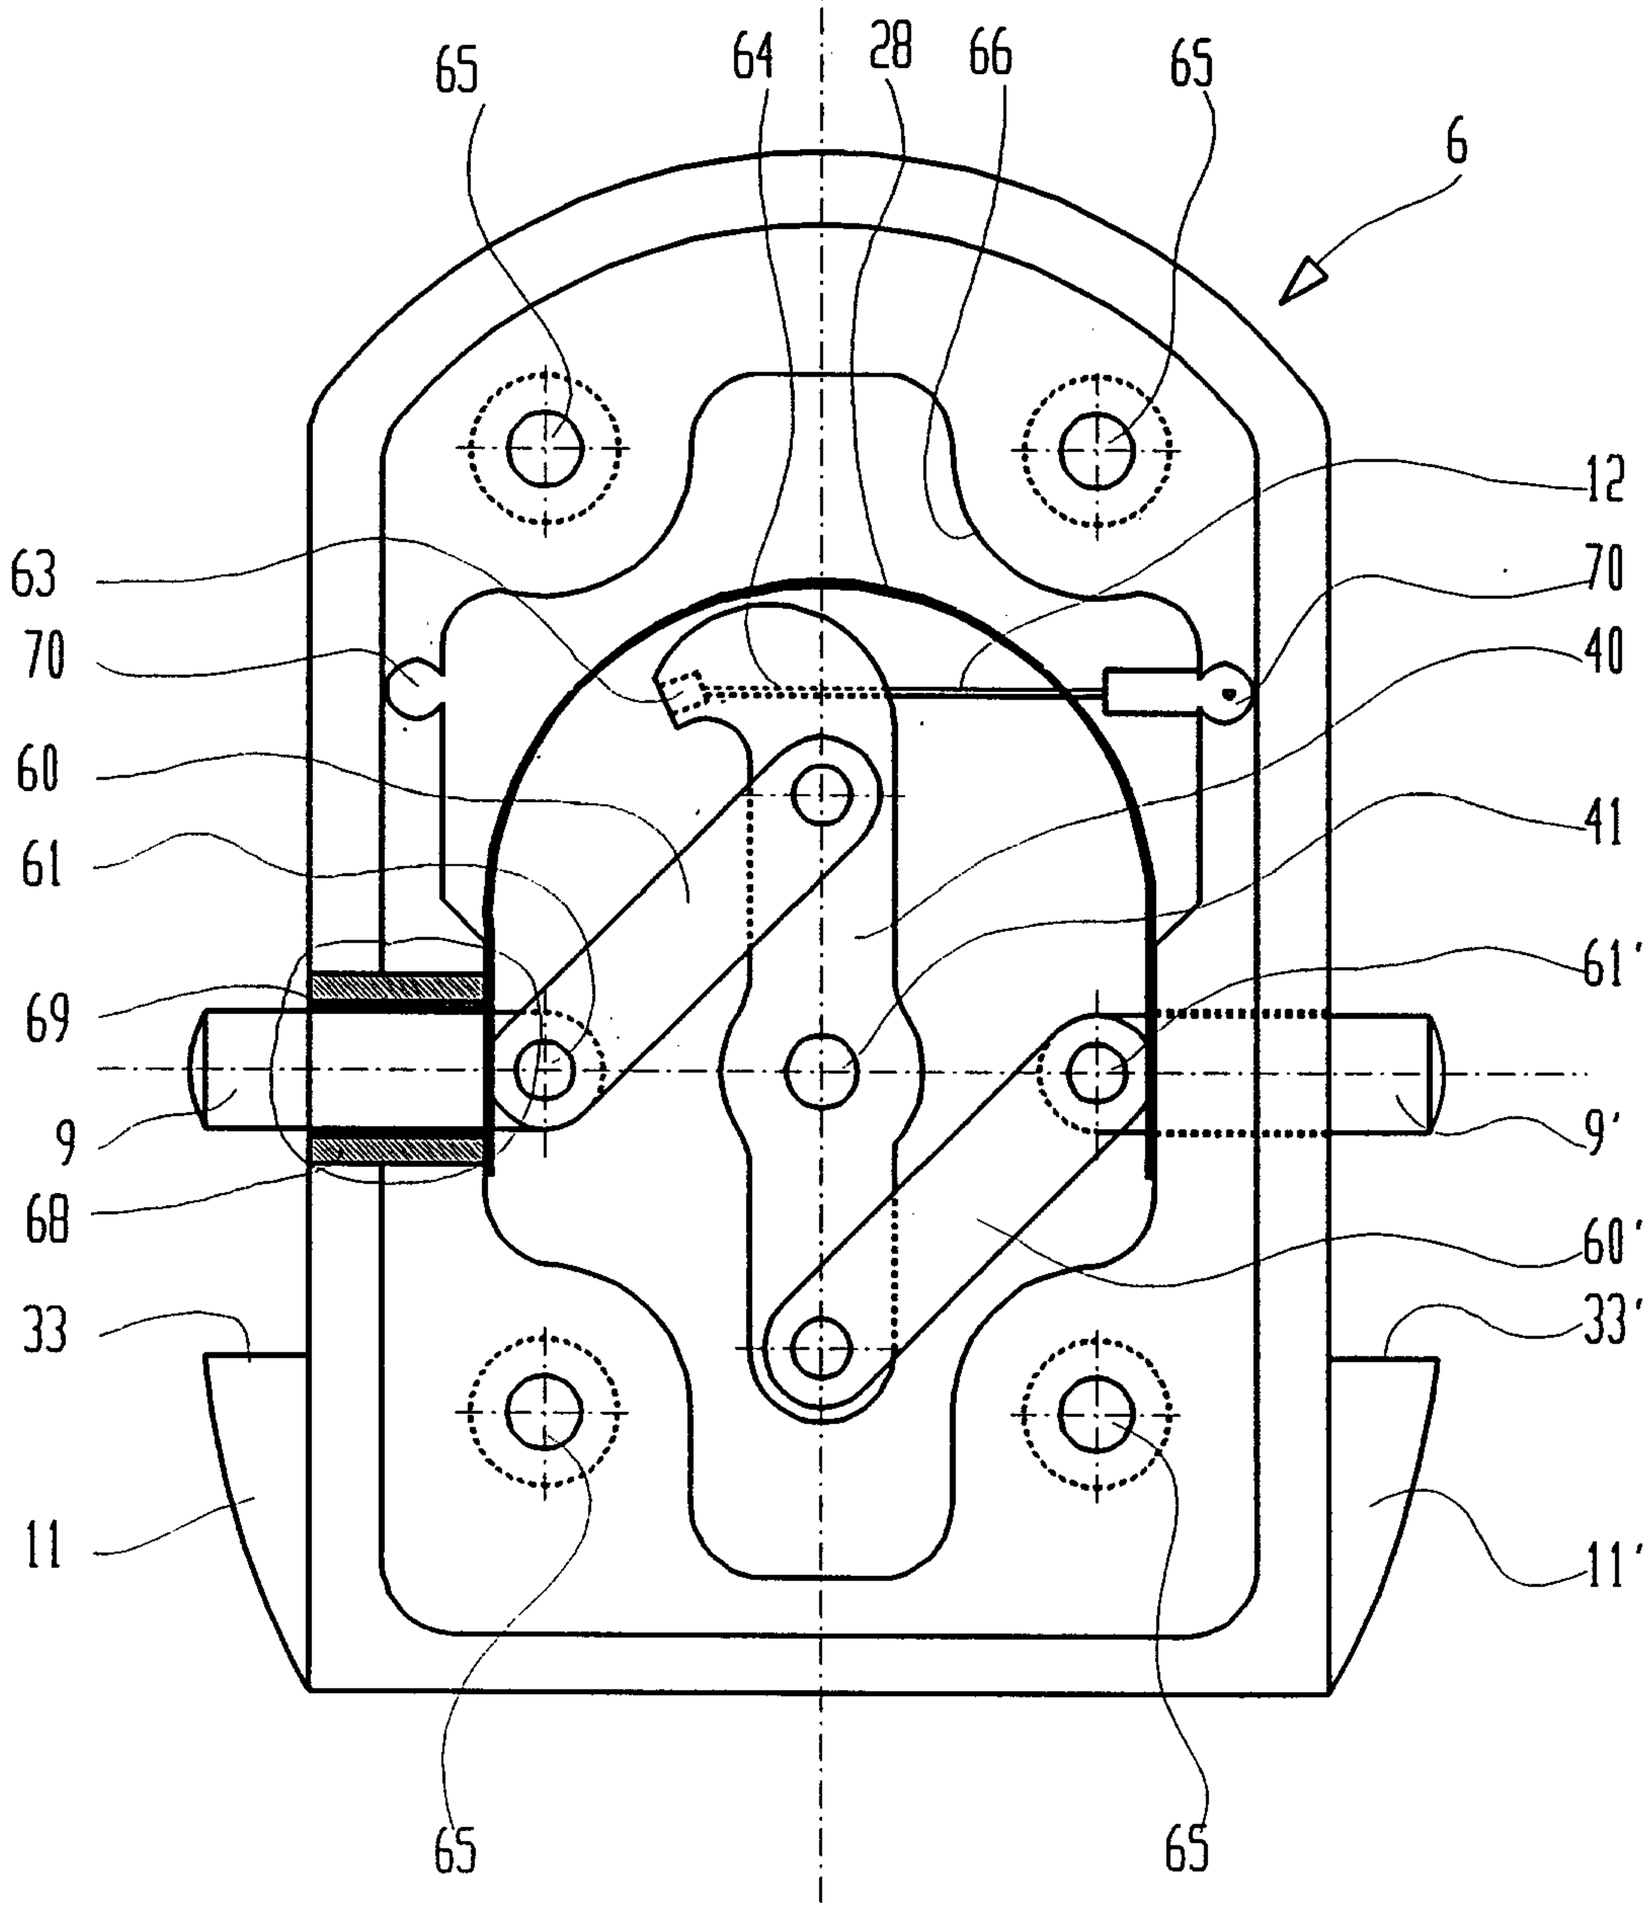


Fig. 12

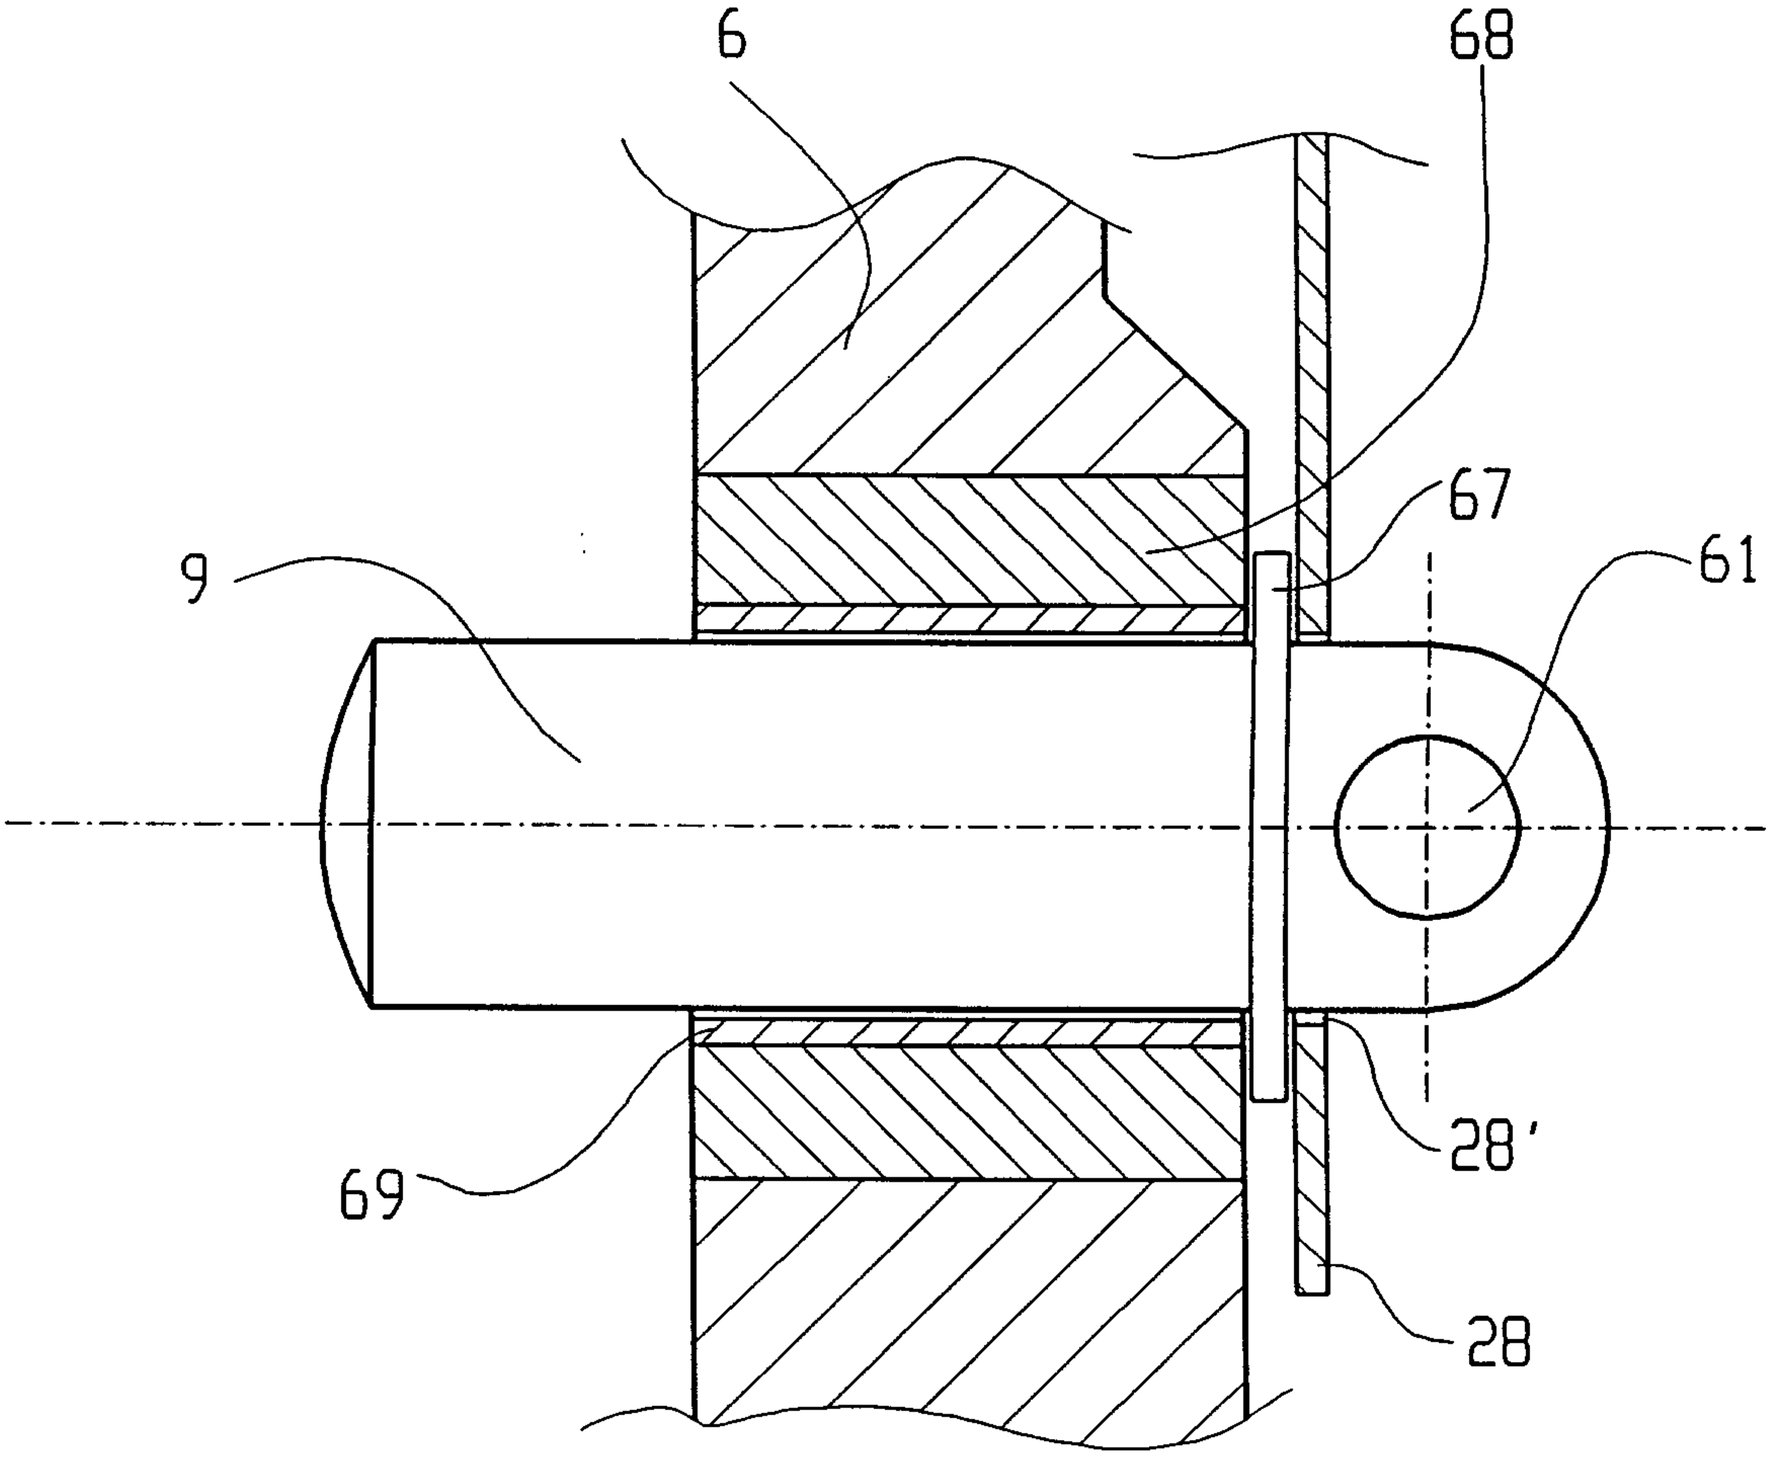


Fig. 12a

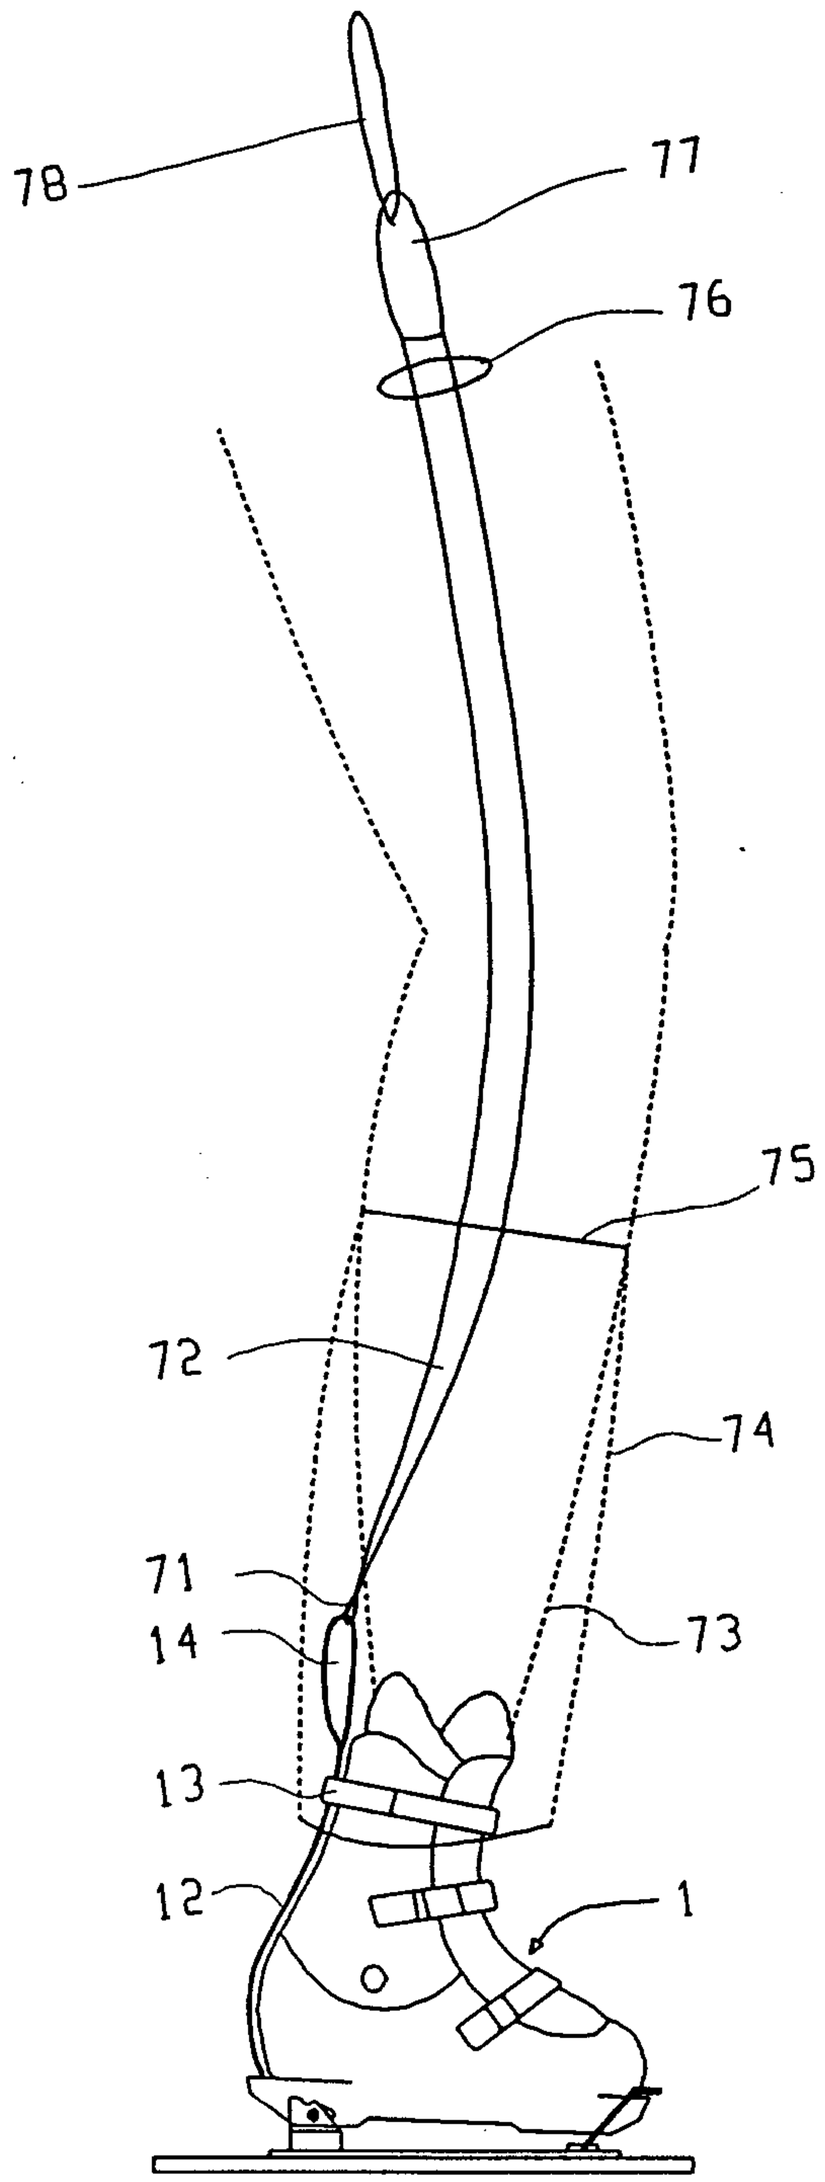


Fig. 13

2148742

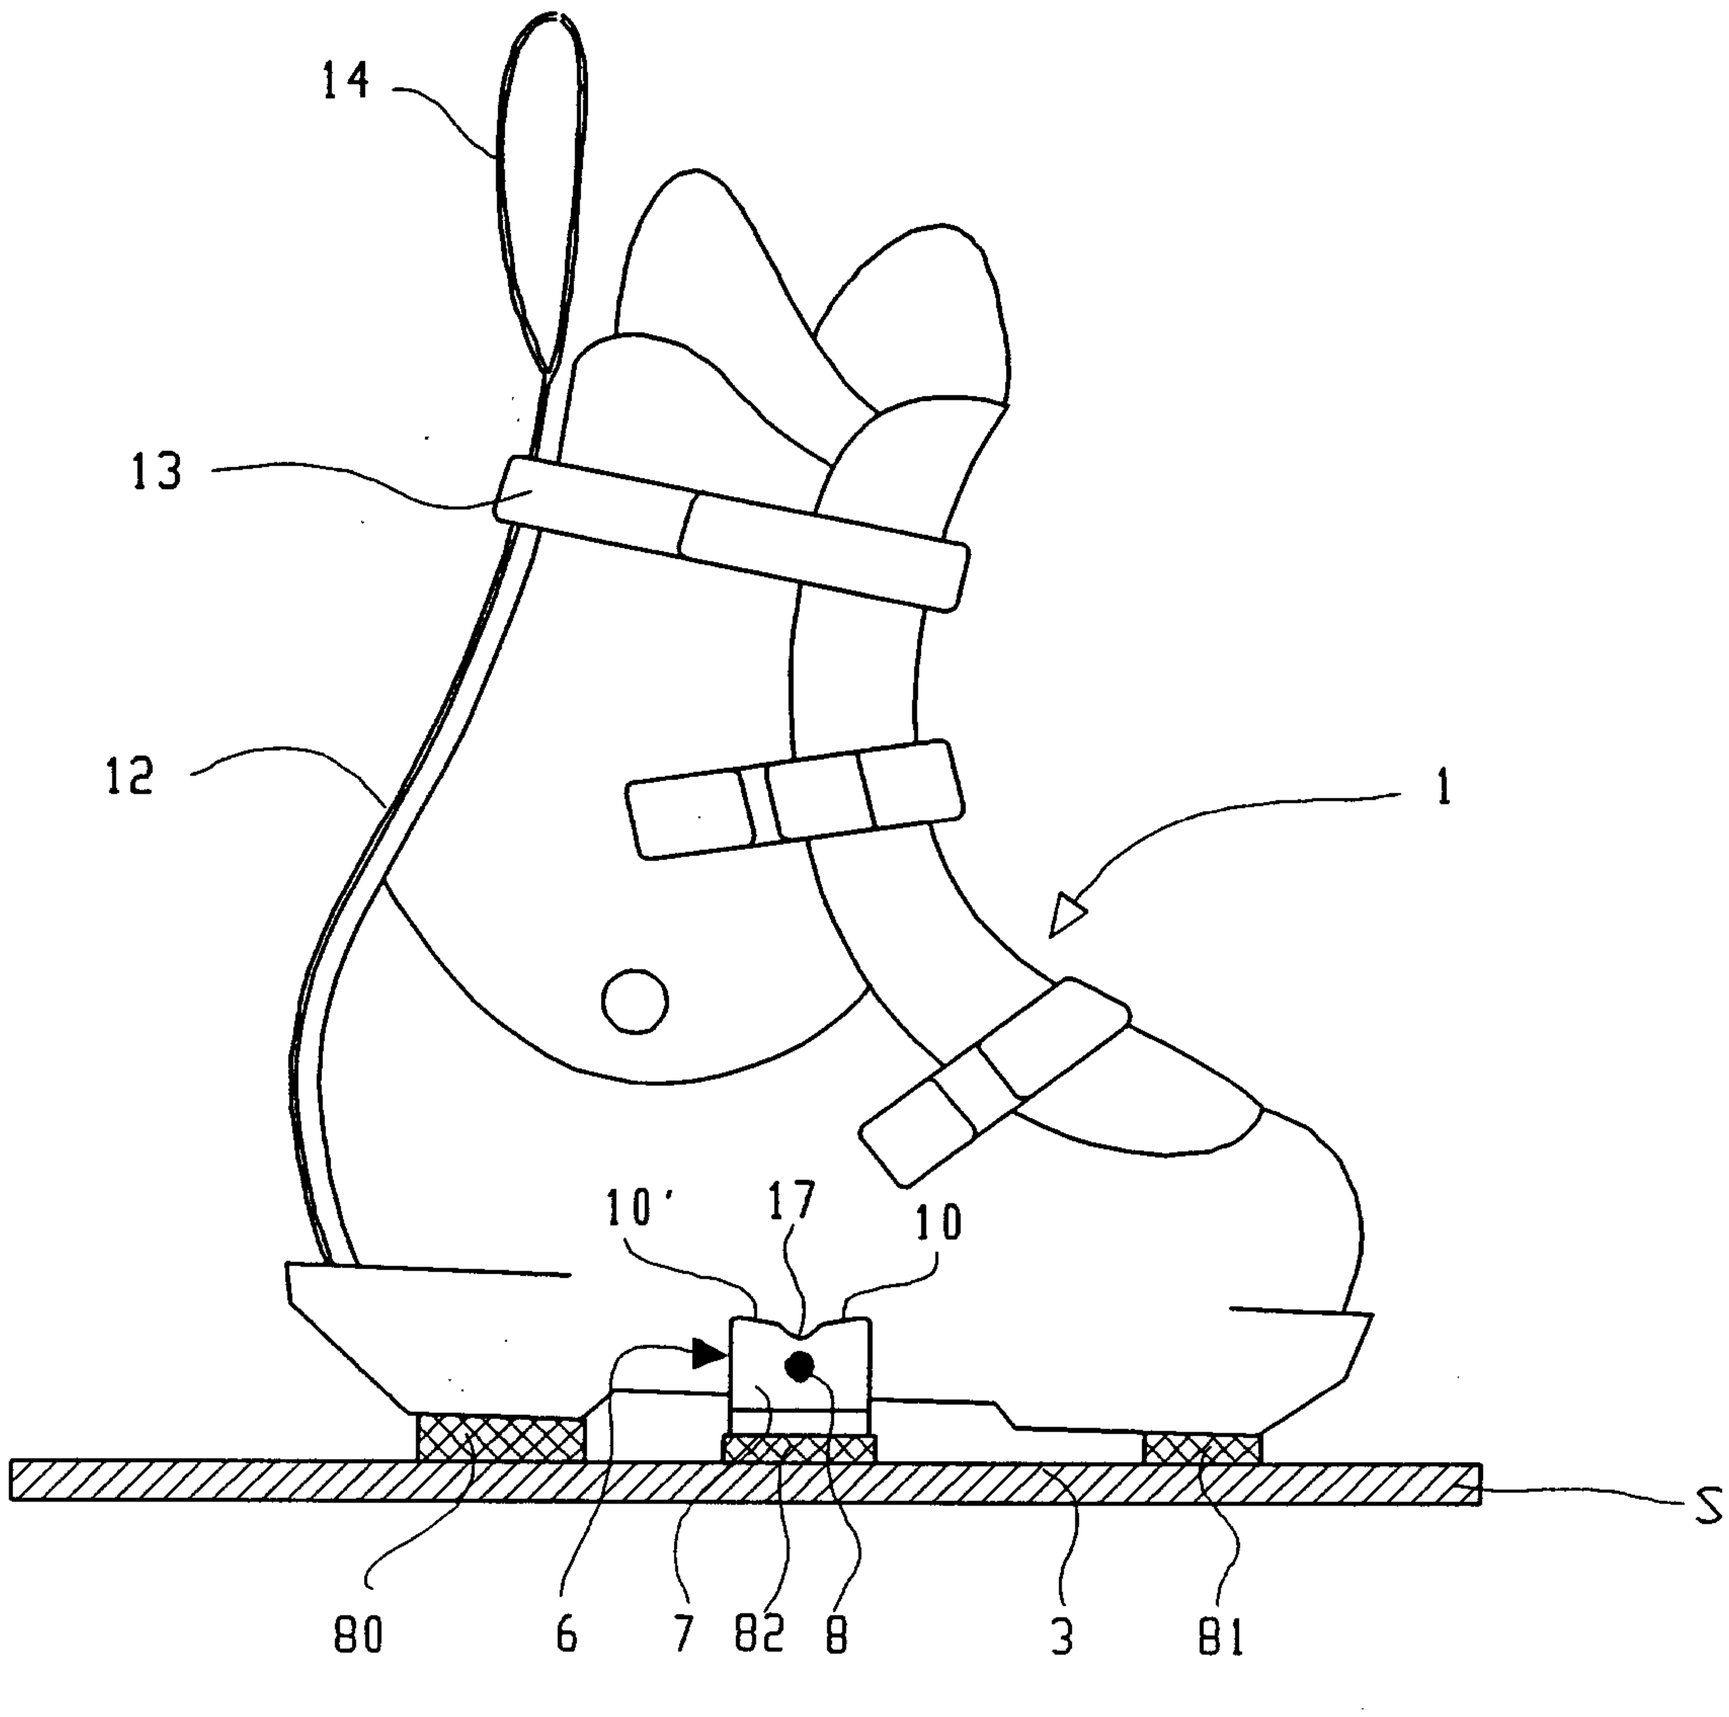
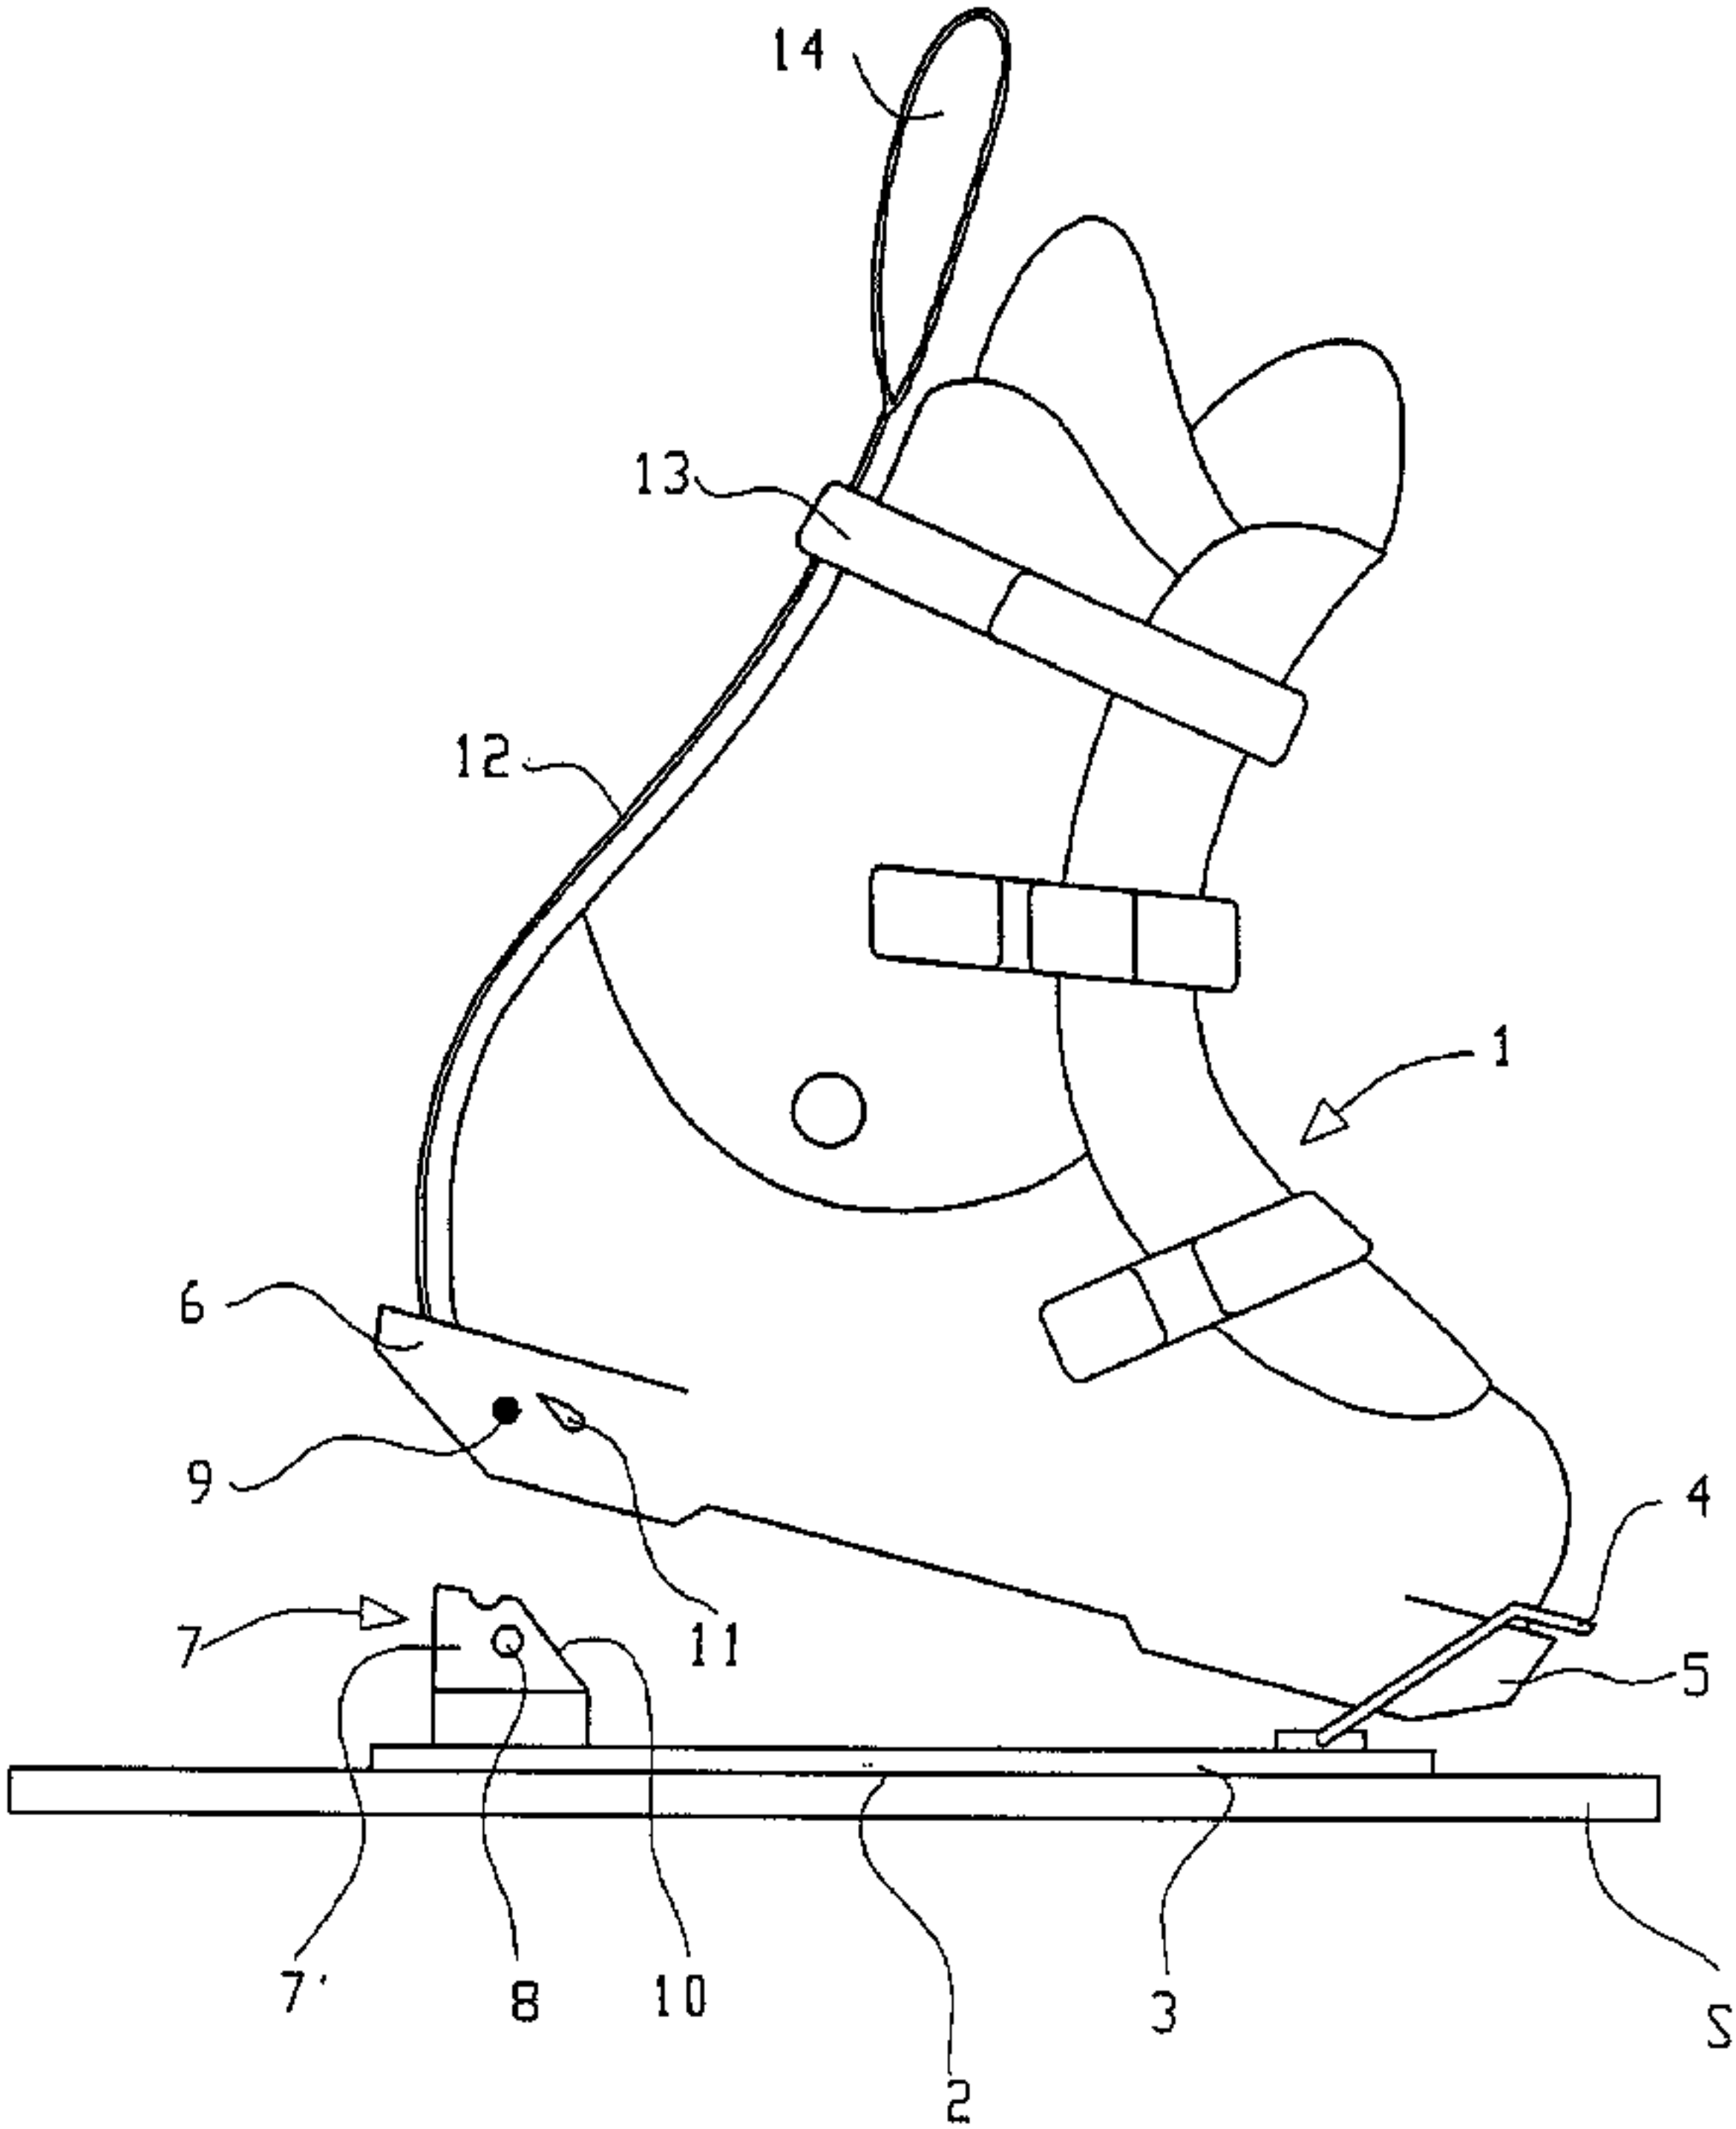


Fig. 14


14
13
12
1
6
9
11
4
5
7
7'
8
10
3
2
S