

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952

616762

CONVENTION APPLICATION FOR A PATENT

We, E.I. DU PONT DE NEMOURS AND COMPANY., a corporation organized and existing under the laws of the State of Delaware, of Wilmington, Delaware, 19898, United States of America., hereby apply for the grant of a patent for an invention entitled, "IMPROVED FOOD TRAY", which is described in the accompanying complete specification.

The application is a Convention Application and is based on the application for a patent or similar protection made in the United States of America on 2 June 1988 numbered 201,234.

Our address for service is: Care of

LAWRIE James M.

Register No. 113

RYDER Jeffrey A.

Register No. 199

HQUILHAN Michael J.

Register No. 227


Patent Attorneys - 72 Willsmere Road, Kew, 3101, Victoria, Australia.

DATED This 31 day of May 1989

E.I. DU PONT DE NEMOURS AND COMPANY

NO09523 01/06/89

By:

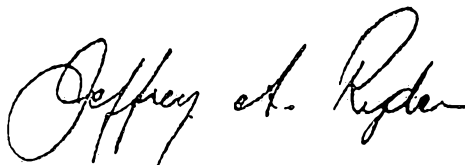

Registered Patent Attorney

Declaration in Support of an Application for a Patent

*Strike out for
non-convention

In support of the *Convention** application made for a patent ~~patent of addition~~ for an invention entitled
IMPROVED FOOD TRAY

Insert full
name and address
of declarant

I, James Joseph Flynn, Asst. Secretary of the Patent Board,
of E. I. DU PONT DE NEMOURS AND COMPANY, 2604 Montchanin
Building, 100 W. 10th Street, Wilmington, Delaware 19898, U.S.A.
do solemnly and sincerely declare as follows:

1. ~~I am~~
~~We are~~ ~~the applicant(s) for the~~ ~~patent~~
~~patent of addition~~
~~(or in the case of an application by a body corporate)~~

1. I am authorised by E. I. DU PONT DE NEMOURS AND COMPANY
the applicant for the patent ~~patent of addition~~ to make this declaration on its behalf.

2. The basic application(s) as defined by section 141 of the Act ~~is~~
~~are~~

Number	Filing Date	Country	Applicant(s)
201,234	6/2/88	U.S.A.	Edward Johnson Deyrup

Insert details
for the or EACH
basic application

3. ~~I am~~
~~We are~~ ~~the actual inventor(s) of the invention.~~
~~(or, where a person other than the inventor is the applicant)~~

3. Edward Johnson Deyrup,
of 25 Colonial Circle, Northeast, Maryland 21901, United
States of America

Insert full
name(s) and
address(es) of
inventor(s)

~~are~~ is the actual inventor(s) of the invention and the facts upon which the applicant is entitled to make the
application are as follows: E. I. DU PONT DE NEMOURS AND COMPANY is the
assignee of the invention and of the priority right from the
said actual inventor(s).

See over for
instructions


Strike out Para 4
for non-convention

4. The basic application(s) referred to in this Declaration ~~was~~
~~were~~ the first application(s) made in a
Convention country in respect of the invention the subject of the application.

No Legalization
No Corporate Seal

DECLARED AT Wilmington, Delaware, U.S.A

this 23 day of May 1989:

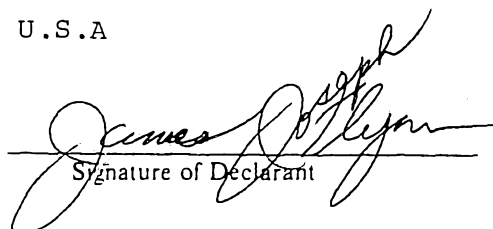
Signature of Declarant

To: The Commissioner of Patents.

(12) PATENT ABRIDGMENT (11) Document No. AU-B-35897/89
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 616762

(54) Title
IMPROVED FOOD TRAY COMPRISING THERMOPLASTIC CORE WITH GLASS FLAKE REINFORCED PET OUTER LAYERS

International Patent Classification(s)
(51)⁴ **B32B 027/36 B32B 001/02 B65D 001/34 B65D 081/34**

(21) Application No. : **35897/89** (22) Application Date : **01.06.89**

(30) Priority Data

(31) Number (32) Date (33) Country
201234 02.06.88 US UNITED STATES OF AMERICA

(43) Publication Date : **07.12.89**

(44) Publication Date of Accepted Application : **07.11.91**

(71) Applicant(s)
E.I. DU PONT DE NEMOURS AND COMPANY

(72) Inventor(s)
EDWARD JOHNSON DEYRUP

(74) Attorney or Agent
CALLINAN LAWRIE , Private Bag 7, KEW VIC 3101

(53) Prior Art Documents
US 4693941
AU 444036 21556/83 C09J 7/02
US 4375494

(57) Claim

1. A composite structure comprising at least one core layer comprising a thermoplastic polymeric material and at least one outer layer on each side of the core layer comprising polyethylene terephthalate and 10 to 60 percent glass flake, based on the weight of the outer layers, wherein the core layer comprises 25% to 90% of the thickness of the composite structure.

23. A process for preparing a composite structure, comprising the steps of:

- (a) coextruding a core layer of a thermoplastic polymeric material and at least two outer layers of 10 to 60 percent glass flake filled polyethylene terephthalate, based on the weight of the outer layers, one on either side of the core layer, to form a composite sheet, wherein said core layer comprises 25% to 90% of the thickness of the composite structure;
- (b) cooling the composite sheet to a temperature below the glass transition temperature of the polyethylene terephthalate; and
- (c) thermoforming the composite sheet into the desired structure.



616762

Form 10

PATENTS ACT 1952-1973

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE

Class:

Int. Cl:

Application Number:
Lodged:

Complete Specification—Lodged:
Accepted:
Published:

Priority:

Related Art:

TO BE COMPLETED BY APPLICANT

Name of Applicant: E.I. DU PONT DE NEMOURS AND COMPANY., a corporation
organized and existing under the laws of the State

Address of Applicant: of Delaware, of Wilmington, Delaware, 19898, United
States of America.

Actual Inventor: Edward Johnson DEYRUP

Address for Service: Care of: LAWRIE James M. Register No. 113

RYDER Jeffrey A. Register No. 199

HOULIHAN Michael J. Register No. 227

Patent Attorneys - 72 Willsmere Road, Kew, 3101, Victoria, Australia.

Complete Specification for the invention entitled: IMPROVED FOOD TRAY

The following statement is a full description of this invention, including the best method of performing it known to me:—

*Note: The description is to be typed in double spacing, pica type face, in an area not exceeding 250 mm in depth and 160 mm in width, on tough white paper of good quality and it is to be inserted inside this form.

TITLE

IMPROVED FOOD TRAY

BACKGROUND OF THE INVENTION

This invention relates to food trays and
5 other thermoformed structures comprising a core layer
with outer layers of polyethylene terephthalate
reinforced by glass flakes.

Glass flakes have been used to reinforce
polyethylene terephthalate (PET). U.S. Patent
10 4,555,439, to Ueda et al., discloses rolled
sheet-like materials having superior physical
properties, in particular toughness and heat resistant
properties. These materials comprise 20-90%
thermoplastic resin and 10-80% flaky filler. The
15 thermoplastic resin may be PET, and the flaky filler
may be glass flakes.

U.S. Patent 4,425,457, to Christiansen et
al., discloses a composition of 40-95% by weight PET,
4-65% by weight of a reinforcing agent, and 0.1-25% by
20 weight of an alkali metal salt. The reinforcing agent
can be glass flake. The alkali metal salt is a
nucleating agent. Such compositions can be molded to
produce a molded article having a smooth and glossy
surface and at the same time sustaining high heat
25 deflection temperature levels.

Japanese Patent Application 58/020636 (as
reported in Derwent Abstracts) discloses a plastic
container obtained by mixing a thermoplastic resin
(e.g. PET) with 0.1-30 wt.% of plate form glass
30 granules. The plastic resin mixture is melted and
molded into a container form by extrusion or injection
blowing such that part of the thermoplastic container
is stretched in at least one direction. The plastic
container has excellent thermal shrinkage resistance
35 and mechanical strength.

AD-5648

U.S. Patent 4,693,941, to Ostapchenko
discloses a process for thermoforming an article from
a sheet of a composition having a crystallinity of
0-5%. The composition consists essentially of 60-77%
5 PET, 3-10% of at least one terpolymer of ethylene,
methacrylic acid, and preferably isobutyl acrylate,
and 20 to 30 % of a reinforcing filler such as glass
flake, with the proviso that the composition does not
contain a nucleating agent. The terpolymer of
10 ethylene has 0-100% of its carboxylic groups converted
to their salt form, the cation being a divalent metal
ion such as zinc. Sheets made from the compositions
of this patent are said to have good
thermoformability.

15 With the recent increase in popularity of
microwave cooking, it has become common to use trays
or dishes made of various plastic materials for both
cooking or heating and serving of food. It is
important that the plastic material used to make the
20 dishes retains its physical properties at the
relatively high temperatures encountered during the
cooking process. Even more rigorous high temperature
properties are demanded of materials used for dishes
which are intended to be suitable for cooking in
25 conventional ovens.

A common material of construction for such
trays is crystalline polyethylene terephthalate
(CPET). Trays prepared from unreinforced CPET are
limited in their use because they are too flexible
30 when removed from a hot oven. Unless such trays are
supported on a metal tray, they will warp and sag
under the weight of the food. This is because,
although PET has a very high melting point (about
250°C), it loses modulus around 85°C due to the
35 presence of a glass transition.

Mineral filled CPET compositions, including compositions filled with glass flake, have better stiffness at high temperatures, but tend to suffer from a combination of brittleness and poor color.

5 Glass fiber reinforced compositions tend to be difficult to make and give uneven dimensions. In addition, reinforcing fillers, whether flakes or fibers, are quite expensive, and can make the cost of a reinforced tray prohibitive.

10 Thermoset polyesters may also be used to make food trays. But the high fabrication costs of thermoset resins make such trays commercially unattractive.

15 There is therefore a need for a plastic tray that is stiff at elevated temperature, can be easily produced using conventional thermoforming operations, has good color and surface smoothness, and is relatively inexpensive. It has now been found that glass flake reinforcement of at least one outer or
20 near outer layer on each side of a core layer of such plastic trays results in a product which retains excellent stiffness when removed from a hot oven and which is easy to produce at a low cost.

SUMMARY OF THE INVENTION

25 The present invention provides a composite structure comprising at least one core layer comprising a thermoplastic polymeric material and at least one outer layer on each side of the core layer comprising polyethylene terephthalate and about 10 to
30 about 60 percent glass flake, based on the weight of the outer layers, wherein the core layer comprises about 25% to about 90% of the thickness of the composite structure.

In a preferred embodiment the present
35 ~~The present~~ invention further provides this composite structure in the form of a tray.



The invention further provides a process for preparing a composite structure, comprising the steps of:

- 5 (a) coextruding a core layer of a thermoplastic polymeric material and at least two outer layers of about 10 to about 60 percent glass flake filled polyethylene terephthalate, based on the weight of the outer layers, one on either side of the core layer, to form a composite sheet, wherein said core layer comprises about 25% to about 90% of the thickness of the composite structure;
- 10 (b) cooling the composite sheet to a temperature below the glass transition temperature of the polyethylene terephthalate; and
- (c) thermoforming the composite sheet into the desired structure.

DETAILED DESCRIPTION OF THE INVENTION

15 The present invention includes a composite of at least three layers. One layer is a central or core layer. Its composition is not critical, and it may be prepared from any of a number of thermoplastic resins, including PET, described in more detail below. The PET used in this central layer may include a variety of comonomers, including diethylene glycol, cyclohexanedimethanol, poly(ethylene glycol), glutaric acid, azelaic acid, sebacic acid, isophthalic acid, and the like. In addition to these comonomers, branching agents like trimesic acid, pyromellitic acid, trimethylolpropane and trimethylolethane, and pentaerythritol may be used. It is preferred that the amount of branching agent be no more than about 1 mole percent of the acid component in the polyester.

20 The core layer can contain a variety of other polymers such as polyethylene, and may also contain regrind material. The thickness of the core layer may be 25 from about 0.05 to about 3.0 mm (2 to 120 mils), most preferably from about 0.4 to about 1.3 mm (15 to 50 mils).

On each side of the core is an outer layer of containing PET and glass flake, optionally with other materials. The PET is obtained by known



polymerization techniques from either terephthalic acid or its lower alkyl esters (e.g., dimethyl terephthalate, and ethylene glycol. The terephthalic acid or dimethyl terephthalate is esterified or transesterified and then polycondensed with ethylene glycol to an inherent viscosity (IV) ranging from 0.5 to 0.8 dL/g as measured in a mixed solvent of 1:3 methylene chloride and trifluoroacetic acid. In order to obtain even higher molecular weight material, the polyethylene terephthalate so formed may be subjected to a solid phase polycondensation. This process is generally carried out by subjecting granulated PET to a temperature which is from 60 to 6°C below the melting point of the polymer, either in a stream of inert gas like nitrogen or under a vacuum. By means of this treatment, inherent viscosities of greater than 1.0 dL/g can be attained. For the material of the outer layer of the present invention, PET having an inherent viscosity in the range of about 0.5 to about 0.85 dL/g is preferred.

While it is desirable to have a polymer for the outer layers which has a high melting point, it is possible to use PET which contains other comonomers, in amounts small enough not to effect substantially the high temperature properties of the PET. Typically the presence of up to about 5 mole % comonomer is acceptable. The term "PET" is intended to include such suitable copolymers. Representative comonomers include diethylene glycol, cyclohexanedimethanol, poly(ethylene glycol), glutaric acid, azelaic acid, sebacic acid, and isophthalic acid.

The second major component of the outer layers is glass flake. The composition of the glass is not limiting; "type C" glass (soda lime

borosilicate glass) has been found to be suitable. Glass flakes may be present at about 10 to 60 % by weight, based on the total weight of the layer, preferably 20 to 50 % and most preferably 25 to 45 %.

5 Suitable glass flakes include thin flakes that have been broken by impact in a hammermill and passed through a screen of a designated size. A suitable flake size, before compounding is about 0.001 mm to 0.005 mm thickness and 0.1 to 0.3 mm length of sides.

10 The size of the glass flakes in the final article may be somewhat smaller, due to breakage during processing; flakes about 0.002 to about 0.08 mm on a side are typical.

The outer layers may also contain 0 to about 40 percent, based on the weight of the polymer components, of a low modulus polymeric material. This low modulus polymeric material is useful to improve the impact strength of the glass reinforced PET. Various low modulus ethylene copolymers useful to improve the impact strength are disclosed in U.S. Patents 4,172,859 and 3,435,093. Polyetherester, as disclosed in French Patent 2,194,741, can also be used. Alternatively, the toughener can be a core-shell type material, as generally disclosed in U.S. Patent 4,086,300. Core-shell materials comprising a core of poly(butyl acrylate) and a shell of a less tacky material such as polymethylmethacrylate are suitable. It is preferred to use an ethylene/carboxylic acid copolymer or an ionomer as the toughening agent.

30 Ionomers are partially neutralized copolymers of ethylene, unsaturated carboxylic acids, and optionally other comonomers, and are described more fully in U.S. Patent 3,264,272. Neutralization by divalent metal ions, particularly zinc, has been found to be especially suitable for the purposes of this

35

invention. Copolymers and ionomers of methacrylic acid, alkyl acrylate, and at least about 50 mole percent ethylene are most preferred.

5 The material of the outer layers preferably includes various stabilizers. Suitable stabilizers include hindered phenolic antioxidants and phosphite stabilizers. Examples of such stabilizers are tetrakis(methylene-3-(3,5-di-t-butyl-4-hydroxyphenyl)-propionate)methane, 1,3,5-trimethyl-2,4,6-tris-
10 (3,5-di-t-butyl-4-hydroxybenzyl)benzene, and trisnonylphenyl phosphite. These may be used in concentrations from 0.05 to 1.0% based on the weight of the layer. It is particularly preferred to use a combination of stabilizers such as a phenolic and a
15 phosphite stabilizer.

In addition, it may be useful under certain circumstances to include nonfibrous minerals fillers such as talc or CaCO_3 in the outer layer. The amount of these materials should preferably not exceed about
20 35 weight percent of the layer, in order to avoid deterioration of properties, difficulty in processing, and nonuniformity. Under certain circumstances, it may also be useful to include fibrous reinforcements such as wollastonite or other mineral fibers, or glass
25 fibers. Similarly, the amount of fibrous reinforcement should preferably not exceed about 15 weight percent.

The thickness of the outer layer should be from about 0.04 to about 1.3 mm (1.5 to 50 mils),
30 preferably 0.05 to 0.80 mm (2 to 30 mils), and most preferably 0.05 to 0.20 mm (2 to 8 mils).

The composites of the present invention are not particularly limited in terms of their total thickness. However, for formation of trays, plates,
35 and the like, it is desirable that the composites be

about 0.25 to about 3.0 mm (10 to 120 mils) thick,
preferably about 0.5 to about 1.3 mm (20 to 50 mils).
These thicknesses are suitable for many food serving
applications.

5 Although compositions having only three
layers are quite suitable, additional layers may be
used if desired. For example, there can be an
additional surface layer of unreinforced PET,
optionally toughened as described above, overlying one
10 or both sides of the construction. This additional
surface layer will provide an even smoother surface
than that obtained using only the reinforced PET layer
as the outer layer. Such an additional surface layer
should preferably be less than about 10 percent of the
15 total sheet thickness. It is also permissible to
include one or more barrier layers to reduce oxygen
permeability. Such a layer may be present as an
additional internal layer. The thickness of such a
layer may ordinarily be from about 8 micrometers (0.3
20 mils) up to the entire thickness of the core, in which
case the barrier layer may even serve as the core
layer. A barrier layer may be prepared from a ^{q barrier resin, i.e. a} polymer
having low oxygen permeability, such as ethylene vinyl
alcohol copolymer, a polyamide, or even another
25 polyester.

 In addition to the materials mentioned
above, any of the layers of the structures of the
present invention may include customary amounts of
traditional additives, such as antioxidants,
30 plasticizers, colorants, etc., provided that the
levels of such additives are not so high as to
interfere with the advantages of the invention.

 The structure is preferably made by
coextrusion. The core material is delivered by one
35 extruder and the glass flake reinforced outer layers



are supplied by another extruder. The polymer forming the outer layer should be dried to less than 0.02% water content before being fed to the extruder in order to avoid hydrolysis of the polymer. The polymer forming the core material should also be dried if the volume percent PET in the core layer exceeds about 45%. The extruder temperatures should be adjusted so that the streams are molten but there is no extensive degradation. For the stream containing the glass flake, the melt temperature should exceed about 250°C but should be less than about 330°C. As the molten composite sheet emerges from the die, it is quenched on rolls immediately adjacent to the die. The PET of the sheet will then be in a substantially amorphous state.

The sheet can be converted to a heat stable shape by any thermoforming method, such as vacuum assist, air assist, mechanical plug assist or matched mold thermoforming. Thermoforming methods such as these are well known to those skilled in the art. Examples of articles that can be prepared using thermoforming processes are containers such as bottles, jars, cans, bowls, trays, and dishes. The mold should be heated to a temperature sufficient to allow the sheet to be shaped and permit the PET to crystallize to some extent. The operable range of mold temperatures is about 120 to 215°C, with a preferred range of about 130 to 190°C.

The formed part can be stripped out of the thermoforming mold cavity by known means. Once the heat set part has been removed from the mold, the excess portion of the sheeting which remains attached to the part is trimmed away. The remainder of the material (regrind) can be reintroduced into the extruder that melts the core material. This regrind

can be as much as 100 percent of the core material but would more normally be 10 to 50 percent of the core material.

While not bound by any theory, it is
5 believed that the presence of the reinforcing glass flake selectively in the outer layers of the composite structures of the present invention is important to provide outstanding physical properties at low cost. Such selective reinforcement gives strength to
10 precisely the parts of the composite where it is most needed. The core material, which is not so critical for stiffness, need not be reinforced, and acts as a spacer to separate the outer layers. Thus the amount of costly reinforcing glass flake is reduced.

15 The compositions of the present invention thus provide many advantages. Composite sheets of the material of the present invention can be thermoformed as easily as unreinforced PET sheets, and at comparable rates. The composites of the present
20 invention are uniform, isotropic, substantially colorless, and exhibit no delamination. The composites may be used to form low cost trays which maintain stiffness even when used for cooking in a microwave or even a conventional oven. Articles made
25 from the composites of the present invention have surprisingly smooth and uniform surfaces, despite the fact that the flake dimensions are large compared to the thickness of the layers. The articles also exhibit a surprising combination of stiffness and
30 toughness.

Examples 1-3 and Comparative Example 1

The materials used for Examples 1-3 and for the Comparative Example 1 were prepared as follows. The blends used for the skin layers were prepared by
35 combining the materials in the proportions indicated

in Table I. All these materials except for the glass flake were added to the back end of a 58 mm twin screw extruder. The glass flake, if present, was fed into the front of the extruder, after the polymer had been melted. Composite sheets, 34 cm wide, of the compositions of these examples and comparative examples, were prepared by extruding the core material (also identified in Table I) on a 50.8 mm (2 inch) extruder. The skin material, when it was present, was simultaneously extruded on a 25.4 mm (1 inch) extruder. The skin and core streams were fed to a feedblock, which split the skin stream in two and produced the final three layer extrudate. Both extruders were maintained at approximately 268°C. The extruded sheet was passed between two rolls, maintained at 21° and 43° C, respectively, and then a third roll maintained at 21° C. The overall rate of extrusion was about 59 kg per hour. Compositions of the composite sheets is shown in Table II.

Sheets from examples 1-3 were very tough. They were thermoformed on a continuous lab thermoformer into food trays. These trays had good mold definition and could be readily formed. The trays exhibited uniform shrinkage and low warpage so that the desired final dimensions were obtained.

The trays prepared from examples 1-3 were loaded with three frozen potato patties and were placed in a 202°C oven for thirty minutes. When the trays were removed they were stiff and showed very little deformation resulting from the weight of the food.

In contrast, sheets prepared from the composition of Comparative Example 1, which did not contain the glass flakes in the outer layers, were difficult to vacuum form. There was poor definition

of details imparted by the mold and the trays stuck to the mold. When the trays were oven aged at 202°C for thirty minutes they severely warped.

Comparative Example 2.

5 An attempt was made to extrude a multiple
layer structure using as the core material a blend of
PET with 45% Suzorite mica 200HK, 2.2% terpolymer "a"
and 0.45% of material "c," and as the outer layers,
material "A" from Table I. The attempted extrusion
10 was unsuccessful, since it was not possible to produce
a uniform sheet for any length of time.

15

20

25

30

35

TABLE I
LAYER COMPOSITIONS

		PET	TOUGHENER	GLASS	ADDITIVES
5	Comp.	%	%	%	%
	(Outer)				
	A	81.6	a, 18	0	c, 0.45
	B	66.1	b, 3.8	30	c, 0.095
	C	66.1	a, 3.8	30	c, 0.095
10	D	51.9	a, 3	45	c, 0.075
	(Inner)				
	X	56.8*	a, 18	0	c, 0.19; d, 25
	Y	100.0†	0	0	0

- 15 a = terpolymer of ethylene with 10 wt. %
isobutyl acrylate and 10 wt. % methacrylic
acid, M.I. = 35.
b = the terpolymer of (a), 36% neutralized
with zinc ions.
c = "Irganox" 1010, tetrakis(methylene-3-
(3,5-di-t-butyl-4-hydroxyphenyl)propion-
ate)methane.
20 d = Suzorite mica, 200 HK
* 0.6 I.V.
† 0.85 I.V.

TABLE II*

25	Ex.	Outer Layer	Glass %	Thickness (mm)		Core Type	Thick (mm)
				Outer Layer 1	Outer Layer 2		

30	Comp. 1	A	0	0.10	0.10	X	0.58
	1	B	30	0.23	0.20	Y	0.51
	2	C	30	0.20	0.20	Y	0.43
	3	D	45	0.18	0.18	Y	0.48

* See Table I for outer and core layer types.

The claims defining the invention are as follows:

1. A composite structure comprising at least one core layer comprising a thermoplastic polymeric material and at least one outer layer on each side of the core layer comprising polyethylene terephthalate and 10 to 60 percent glass flake, based on the weight of the outer layers, wherein the core layer comprises 25% to 90% of the thickness of the composite structure.
2. The composite structure of claim 1, wherein the core layer comprises polyethylene terephthalate.
3. The composite structure of claim 1, wherein the core layer comprises a barrier resin.
4. The composite structure of claim 1, wherein the core layer also comprises regrind material.
5. The composite structure of any one of claims 1 to 4, wherein the thickness of the core layer is 0.05 to 3.0 mm.
6. The composite structure of claim 5, wherein the thickness of the core layer is 0.4 to 1.3 mm.
7. The composite structure of claim 1 or claim 2, wherein the polyethylene terephthalate of the outer layers contains a branching agent.
8. The composite structure of any one of claims 1 to 4, wherein the thickness of each outer layer is from 0.04 to 1.3 mm.
9. The composite structure of claim 8, wherein the thickness of each of the outer layer is from 0.05 to 0.80 mm.
10. The composite structure of claim 9, wherein the thickness of each of the outer layer is from 0.05 to 0.20 mm.
11. The composite structure of any one of claims 1 to 10, wherein the glass flake has dimensions of 0.002 to 0.08 mm on a side.
12. The composite structure of claim 11, wherein the glass flake is soda lime borosilicate glass.



13. The composite structure of claim 11 or claim 12, wherein the outer layer contains from 20 to 50% glass flake, based on the weight of the outer layer.
14. The composite structure of claim 13, wherein the outer layers contain from 25 to 45% glass flake, based on the weight of the outer layer.
15. The composite structure of any one of claims 1 to 10, wherein the outer layers contain 0 to 40 percent, based on the weight of the polymer components of the outer layer, of a low modulus polymeric material.
16. The composite structure of claim 15, wherein the low modulus polymeric material is a copolymer of methacrylic acid, alkyl acrylate, and at least 50 mole percent ethylene.
17. The composite structure of claim 16, wherein the acid groups of the copolymer are partially converted to their salt form, the cation being a divalent metal ion.
18. The composite structure of claim 17, wherein the metal ion is zinc ion.
19. The composite structure of any one of claims 1 to 18, further comprising at least one surface layer of unreinforced polyethylene terephthalate overlying at least one outer layer of glass reinforced polyethylene terephthalate, wherein the thickness of the layer of unreinforced polyethylene terephthalate is less than 10% of the total thickness of the composite structure.
20. The composite structure of claim 2, further comprising at least one layer of a polymer having a layer of a barrier polymer.
21. The composite structure of claim 1 in the form of a tray.
22. A composite structure substantially as herein described with reference to any one of the Examples but excluding any Comparative Examples.
23. A process for preparing a composite structure, comprising the steps of:
 - (a) coextruding a core layer of a thermoplastic polymeric material and at least two outer layers of 10 to 60 percent glass flake filled polyethylene terephthalate, based on the weight of the outer layers, one on either side of the core layer, to form a composite sheet,



wherein said core layer comprises 25% to 90% of the thickness of the composite structure;

- (b) cooling the composite sheet to a temperature below the glass transition temperature of the polyethylene terephthalate; and
- (c) thermoforming the composite sheet into the desired structure.

24. A process for preparing a composite structure, which process is substantially as herein described with reference to any one of the Examples but excluding any Comparative Examples.

DATED this 19th day of August 1991.

E.I. DU PONT DE NEMOURS AND COMPANY

By their Patent Attorneys:

CALLINAN LAWRIE

