



(86) Date de dépôt PCT/PCT Filing Date: 2012/11/28
(87) Date publication PCT/PCT Publication Date: 2013/06/06
(85) Entrée phase nationale/National Entry: 2014/05/28
(86) N° demande PCT/PCT Application No.: US 2012/066816
(87) N° publication PCT/PCT Publication No.: 2013/082128
(30) Priorité/Priority: 2011/12/03 (US13/310,733)

(51) Cl.Int./Int.Cl. *F16K 31/08* (2006.01)

(71) Demandeur/Applicant:
BIG HORN VALVE, INC., US

(72) Inventeurs/Inventors:
BURGESS, KEVIN, US;
YAKOS, DAVID, US;
WALTHALL, BRYAN, US

(74) Agent: CLARK WILSON LLP

(54) Titre : ENSEMBLE ADAPTATEUR DE VANNE TOURNANTE COMPORTANT UN SYSTEME DE TRAIN
EPICYCLOIDAL

(54) Title: ROTARY VALVE ADAPTER ASSEMBLY WITH PLANETARY GEAR SYSTEM

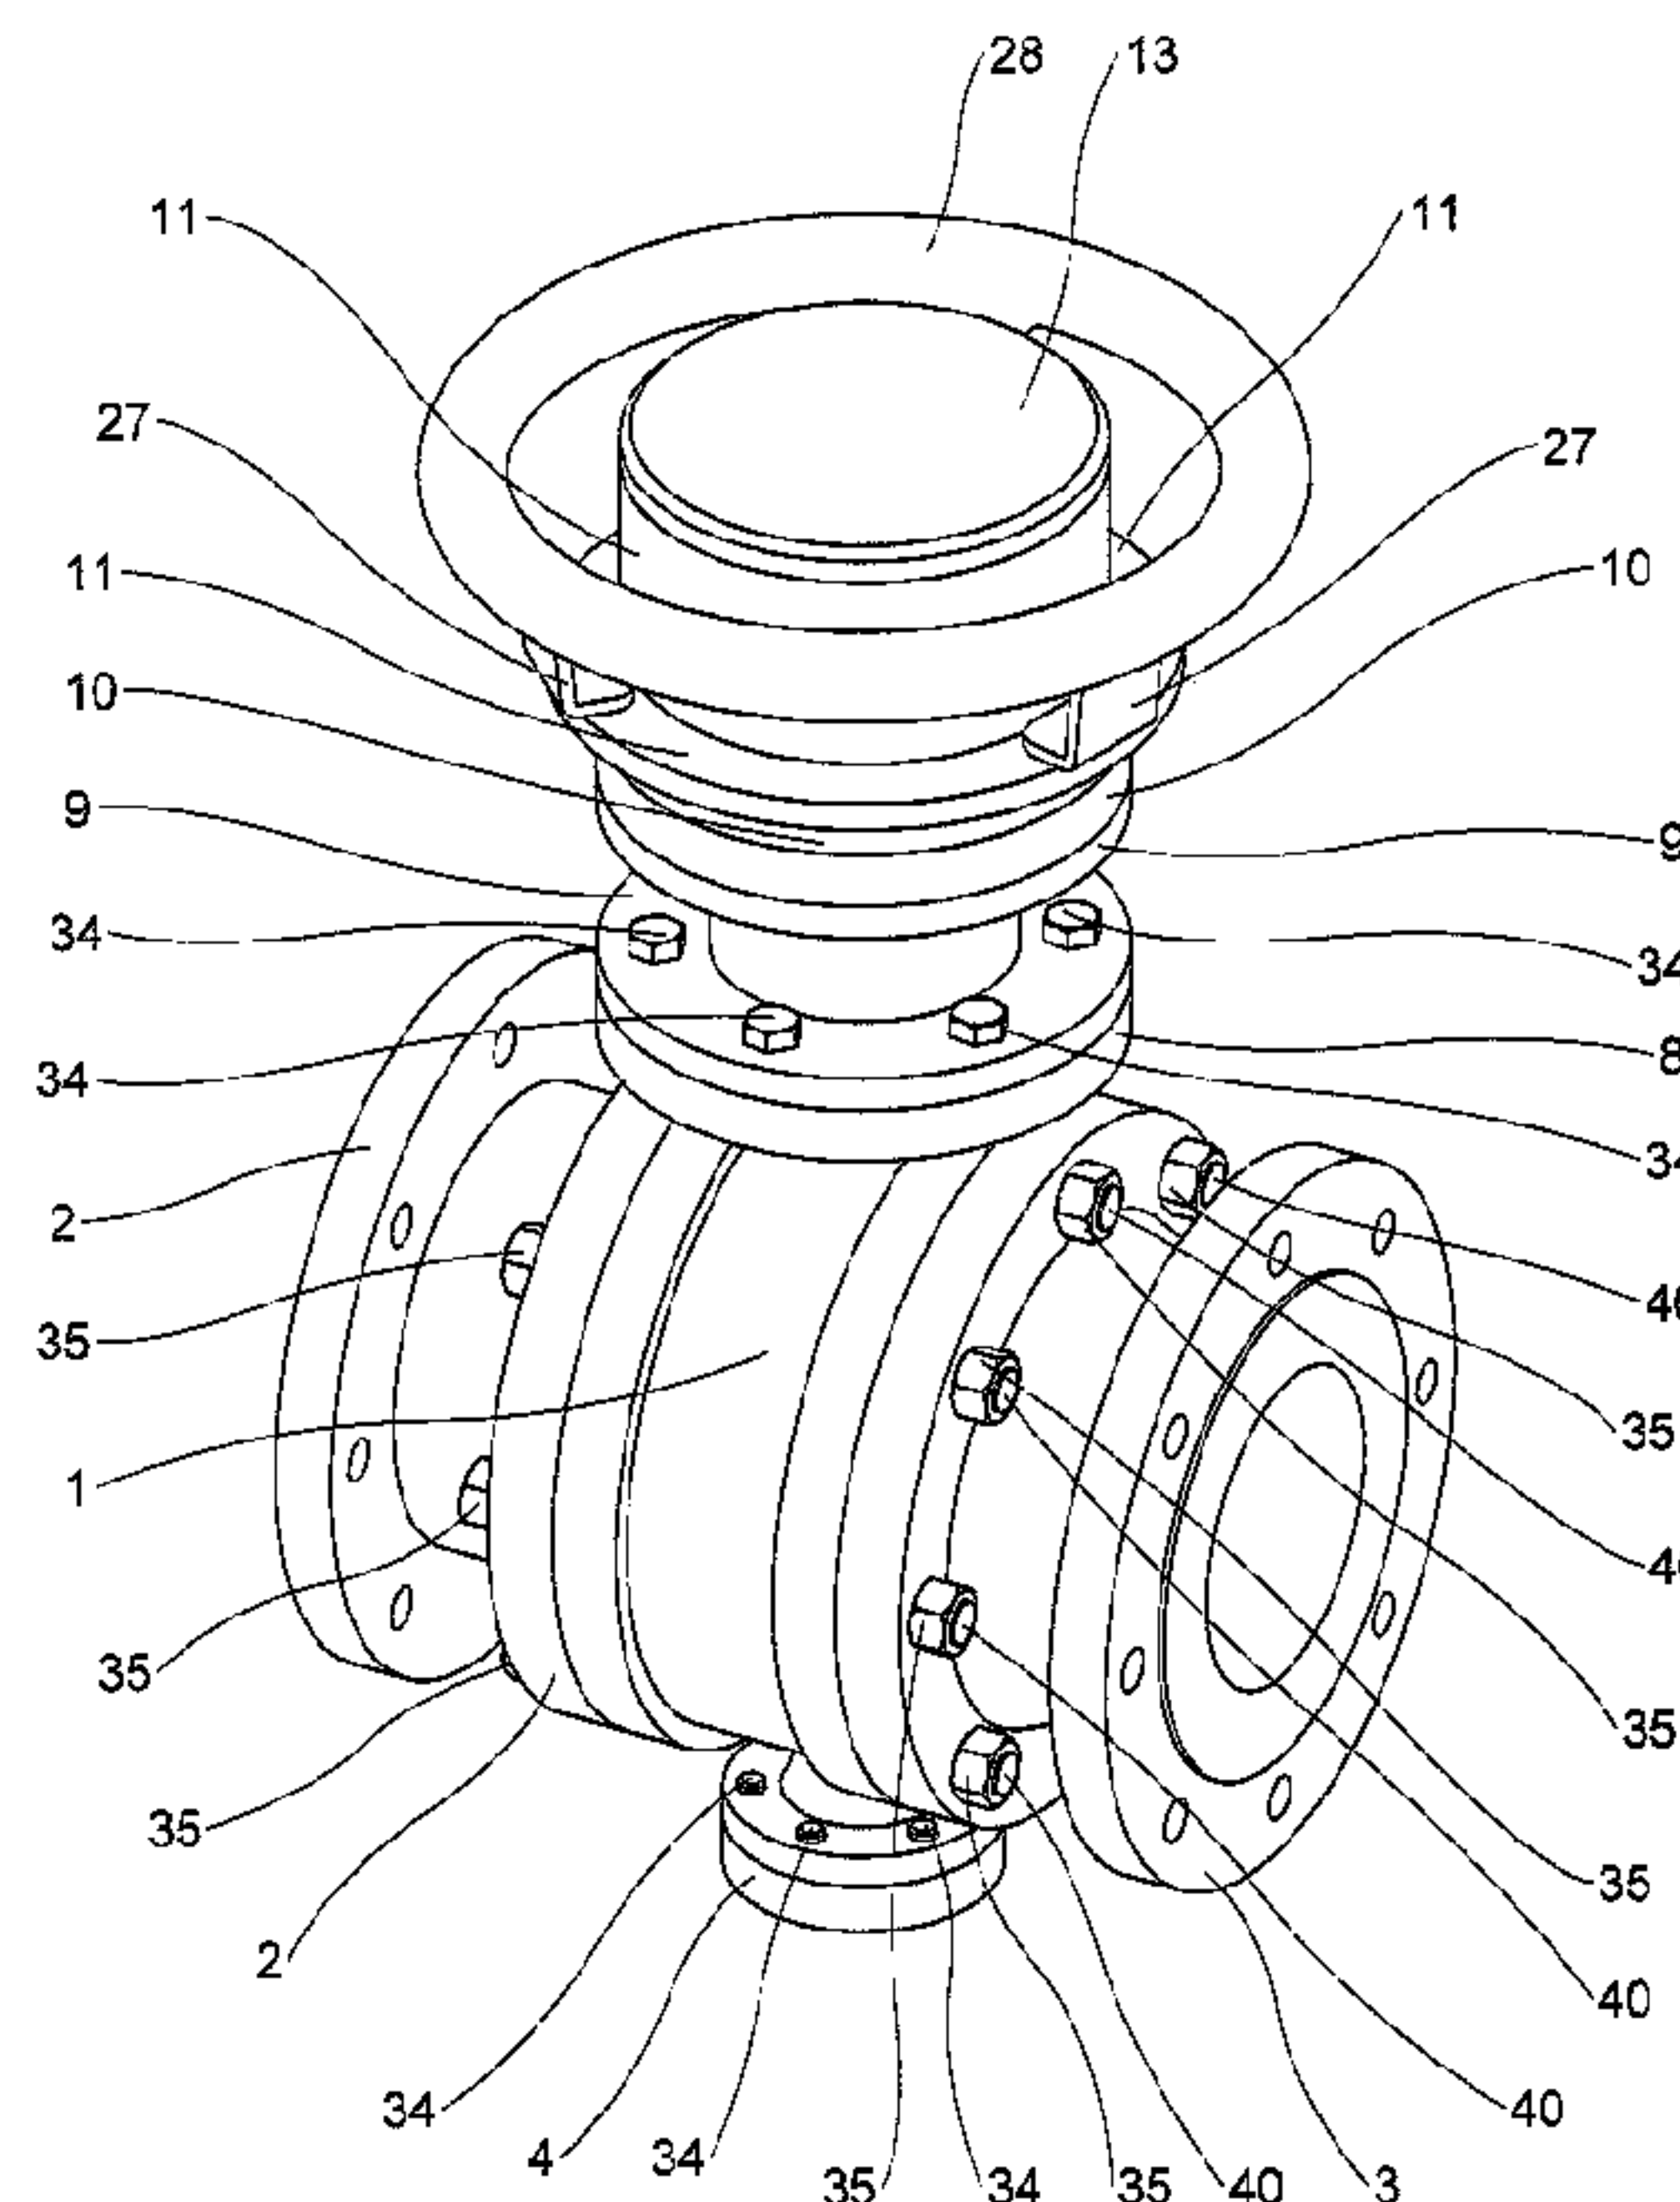


FIG. 1

(57) **Abrégé/Abstract:**

A rotary valve adapter assembly comprising an adapter plate configured to attach to a rotary valve body, a torque multiplier assembly comprising one or more planetary gear subassemblies, each of which composes a sun gear, a ring gear, and a plurality of planetary gears, a magnetic actuator assembly comprising two sets of magnetically coupled magnets, and a shaft; The magnetic actuator assembly interfaces with the torque multiplier assembly such that when the magnets of the magnetic actuator assembly rotate, they cause the sun gear of a first planetary gear subassembly to rotate and the planetary gears to walk on the ring gear. When the carrier of the first, planetary gear subassembly rotates, it causes the sun gear of a second planetary gear subassembly to rotate. When the carrier of the second planetary gear subassembly rotates, the shaft also rotates, thereby causing the valve to open and close.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2013/082128 A1(43) International Publication Date
6 June 2013 (06.06.2013)(51) International Patent Classification:
F16K 31/08 (2006.01)(21) International Application Number:
PCT/US2012/066816(22) International Filing Date:
28 November 2012 (28.11.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/310,733 3 December 2011 (03.12.2011) US(71) Applicant: **BIG HORN VALVE, INC.** [US/US]; 1664
Terra Ave., #5, Sheridan, WY 82801 (US).(72) Inventors: **BURGESS, Kevin**; 1664 Terra Ave #5, Sherid-
an, WY 82801 (US). **YAKOS, David**; 2014 Gilkerson Dr.,
Unit A, Bozeman, MT 59715 (US). **WALTHALL, Bryan**;
2014 Gilkerson Dr., Unit A, Bozeman, MT 59715 (US).(74) Agent: **TEASE, Antoinette, M.**; Antoinette M. Tease,
P.L.L.C., P.O. Box 51016, Billings, MT 59105 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ROTARY VALVE ADAPTER ASSEMBLY WITH PLANETARY GEAR SYSTEM

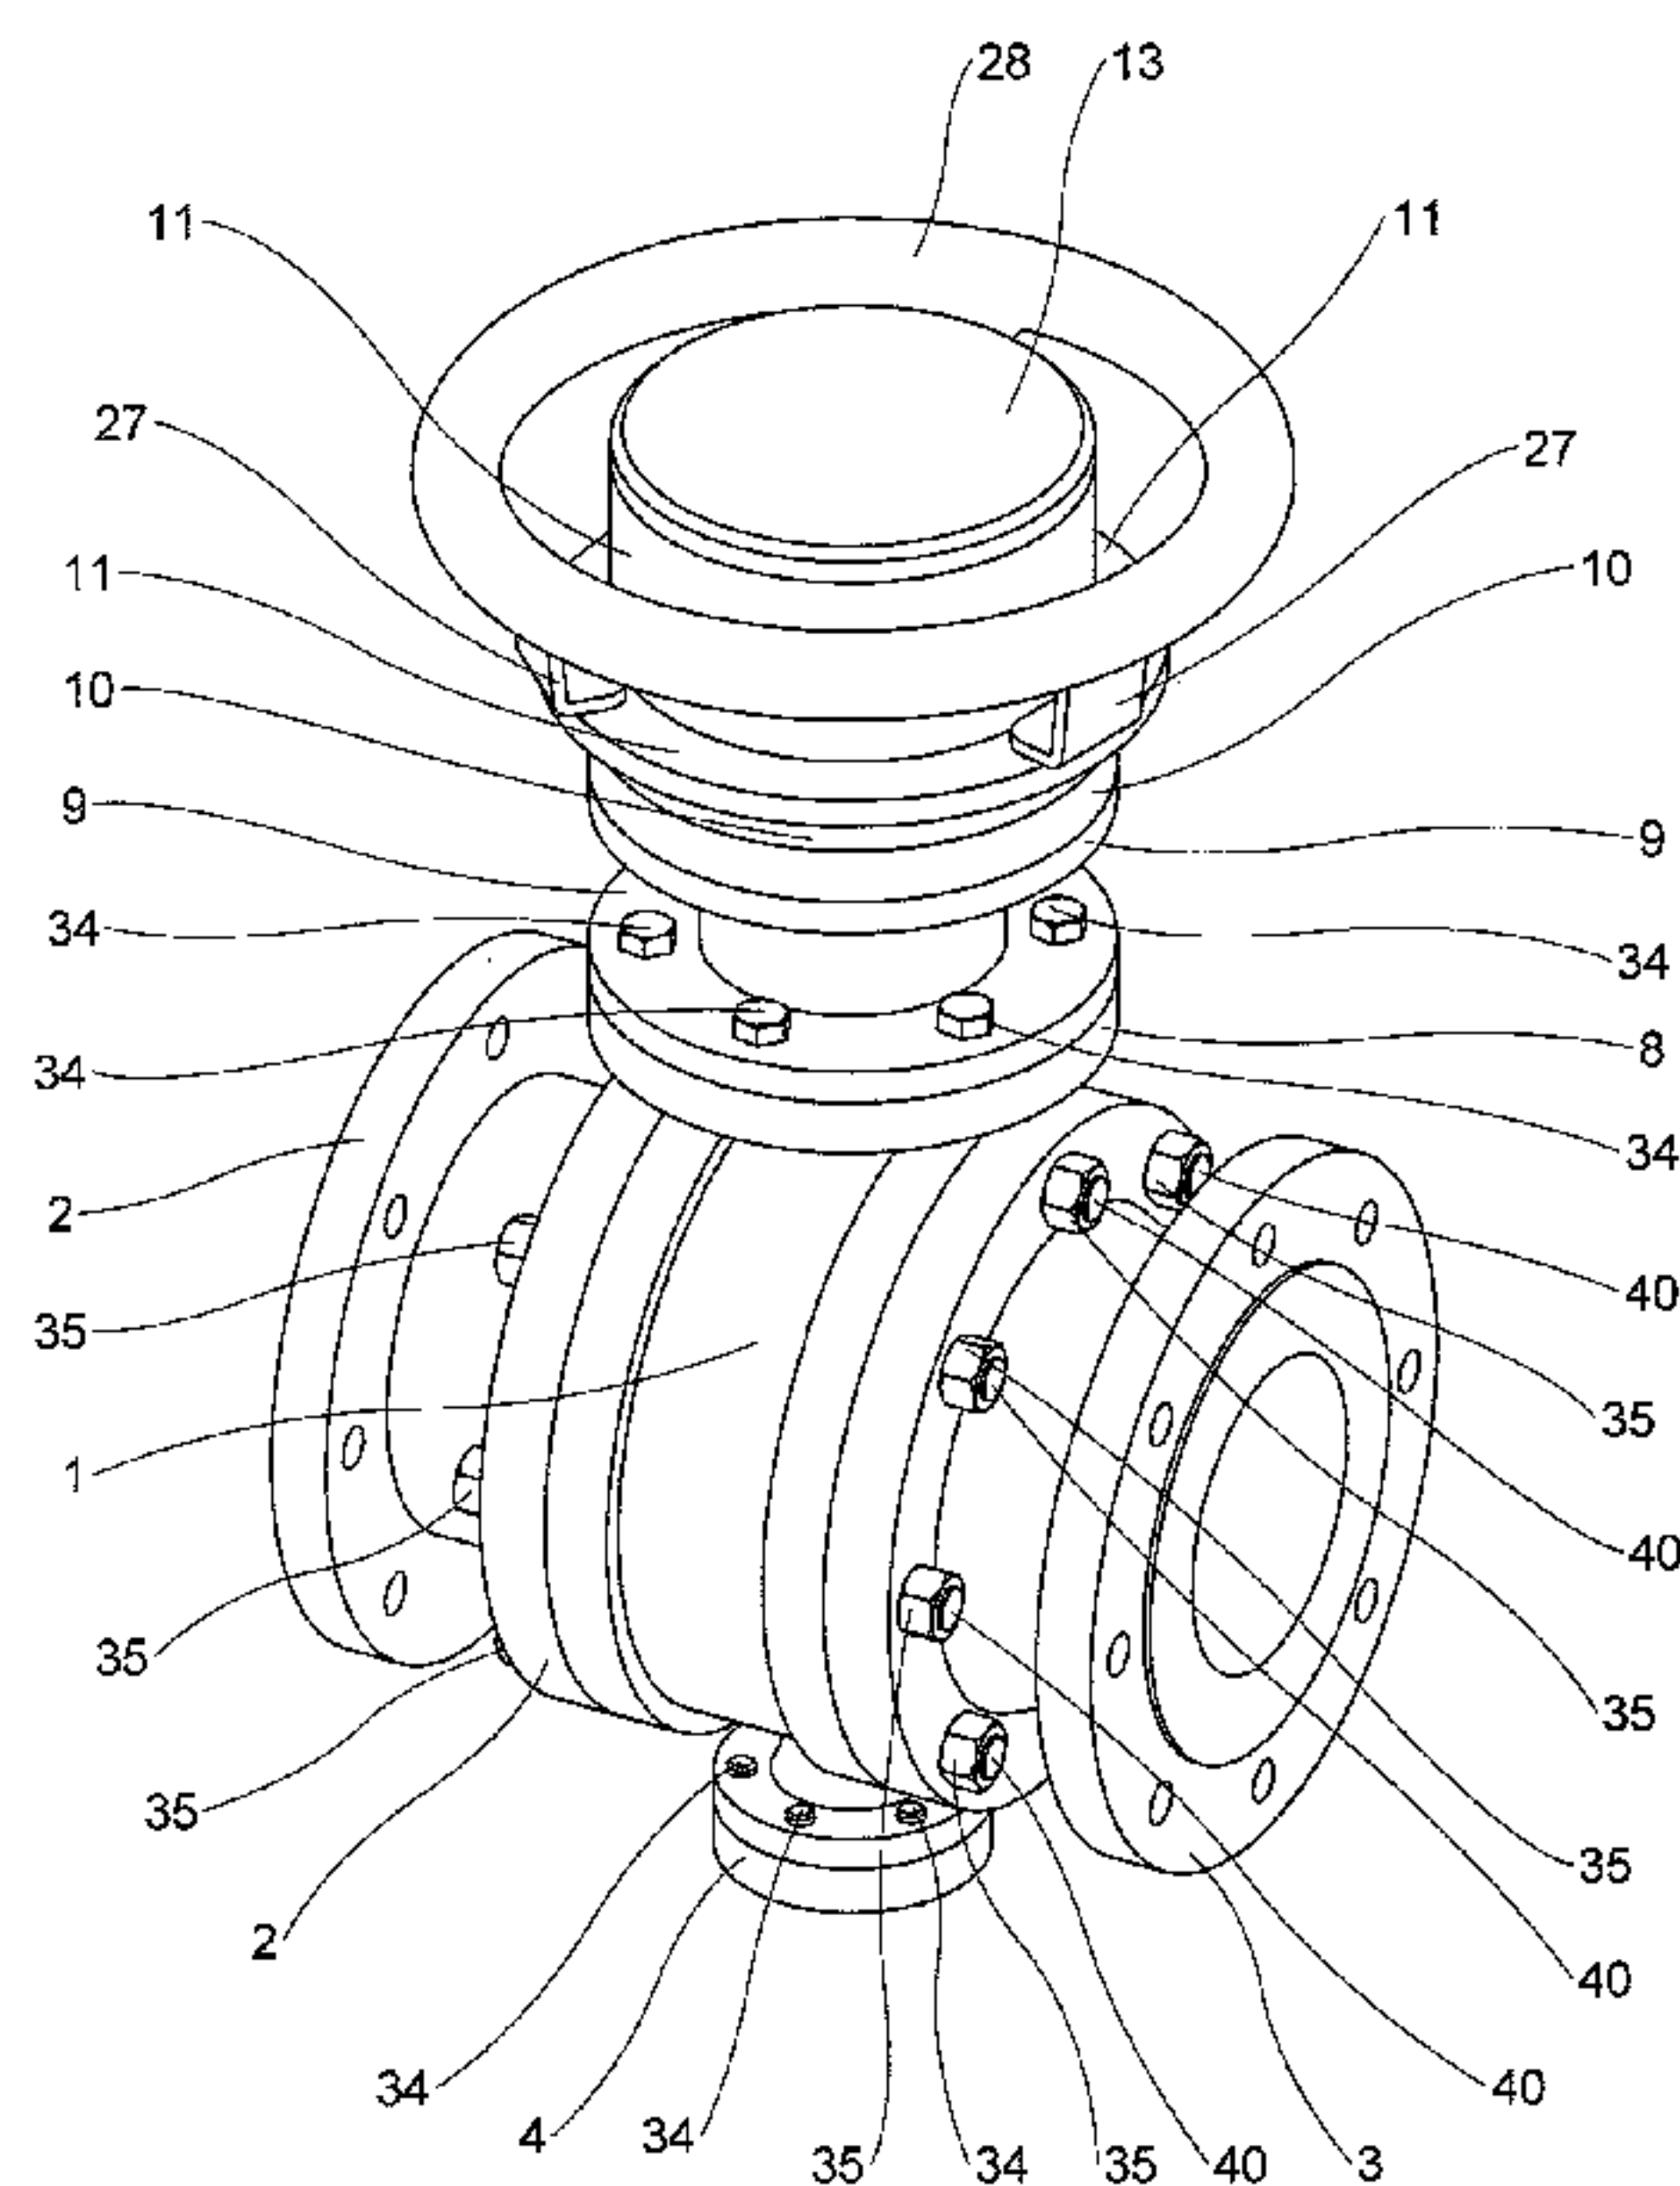


FIG. 1

(57) Abstract: A rotary valve adapter assembly comprising an adapter plate configured to attach to a rotary valve body, a torque multiplier assembly comprising one or more planetary gear subassemblies, each of which composes a sun gear, a ring gear, and a plurality of planetary gears, a magnetic actuator assembly comprising two sets of magnetically coupled magnets, and a shah; The magnetic actuator assembly interfaces with the torque multiplier assembly such that when the magnets of the magnetic actuator assembly rotate, they cause the sun gear of a first planetary gear subassembly to rotate and the planetary gears to walk on the ring gear. When the carrier of the first, planetary gear subassembly rotates, it causes the sun gear of a second planetary gear subassembly to rotate. When the carrier of the second planetary gear subassembly rotates, the shah also rotates, thereby causing the valve to open and close.

WO 2013/082128 A1

WO 2013/082128 A1

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

ROTARY VALVE ADAPTER ASSEMBLY WITH PLANETARY GEAR SYSTEM

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority back to U.S. Patent Application No. 13/310,733 filed on December 3, 2011. The contents of that application are hereby incorporated by reference into the present disclosure.

BACKGROUND OF THE INVENTION

1. Field of the Invention.

The present invention relates generally to the field of valves and, more specifically, to a rotary valve adapter assembly with a planetary gear system.

2. Description of the Related Art.

A number of patent applications have been filed for valve actuators that mitigate stem leakage through the use of a magnetic interlock. These actuator chambers either enclose the dynamic seal that is present in every valve around the stem of the valves, or they eliminate the need for the seal entirely. This dynamic seal is known as a packing or mechanical seal. The magnetic interlock is employed to transmit force from outside of the actuator chamber to the inside, thus avoiding the penetration of the chamber wall by a mechanical stem actuator. Penetration of the chamber wall would nullify the purpose for the chamber in the first place—to enclose the dynamic seal around the stem and prevent leakage from the seal.

The problem with the various magnetic actuators proposed is that the amount of force transmitted by the magnets is not adequate to ensure the proper function of the valve. If an actuator is designed to provide adequate force to open and close the valve, the magnet coupling is so large as to make it impractical. Even with the use of modern rare-earth magnets such as Neodymium-Iron-Boron and Samarium-Cobalt, the ability to transmit adequate force to the valve stem is still difficult. The forces provided by the magnets are only a fraction (usually less than 20%) of the force that a mechanical stem actuator can provide. This does not give the valve operator the confidence that his valve

can be opened or closed under situations where high force is required, such as high fluid pressure, dry seals, or debris in the fluid path.

Rather than increasing force by building ever larger magnetic couplings, the present invention incorporates a set of planetary gears to take the force supplied by the inner magnetic coupling and magnify it many times over through gear speed reduction (*i.e.*, the use of reducing gears). For example, through the use of a planetary gear assembly, the rotational movement supplied by the inner magnetic cartridge is reduced three-fold, while at the same time the force supplied by the inner magnetic cartridge is magnified three-fold. This means that by using a planetary gear assembly with a 12:1 ratio (*i.e.*, the outer magnetic cartridge rotates twelve times for every one rotation of the internal thread ring), one can either gain twelve times as much force for the valve stem, or else the strength required of the magnetic coupling can be reduced by twelve times. A reduction in the strength requirement leads to a corresponding reduction in size or mass of the magnetic coupling. This reduction in size is desirable because the magnetic coupling is the most expensive component of the actuator, and its size is generally proportional to its cost.

Through the incorporation of a planetary gear assembly, the present invention provides a magnetically activated valve actuator that can be used in the harshest conditions. Magnetic actuation is no longer appropriate for light applications only. Rather, it is a robust alternative that provides rotational force to the stem that is equivalent to that of dynamically sealed stemmed valves. This innovation is most needed in places like chemical plants, refineries, paint factories, paper mills, etc. where valves are the central workhorses of the plant itself.

In addition to increasing force and/or decreasing the size of the magnetic coupling, the present invention has the advantage of completely containing any leakage of fluids from the valve bonnet. The present invention is intended to be coupled to valves that are used in hazardous fluid or chemical applications, where stem leakage poses a pollution threat to the outside environment or a safety threat to personnel working nearby. At the very least, leakage from stem packings results in the loss of product, which can be costly. Fugitive emissions account for over 125,000 metric tones of lost product per year

in the United States alone. Of this amount, the percentage of fugitive emissions that come from valve stems is estimated to be between 60% and 85%. [1, 2]

The threat posed to the environment by leaking valve stems is great, particularly when the product that is leaked is a fugitive emission, that is, a leaked or spilled product that cannot be collected back from the environment. An example of a fugitive emission would be methane leaking from a valve on a pipeline or in a refinery, in which case the methane immediately goes into the atmosphere and cannot be recaptured. Another example would be crude oil leakage from a valve on an offshore rig, where the oil is carried away by ocean currents and cannot be brought back.

Safety requirements are becoming more stringent with each passing year. Personnel who are required to work near hazardous chemicals—such as operators in a petrochemical plant—are subject to injury from leaking valve stems, especially from reciprocating stems where the hazardous material inside the valve is transported to the outside environment via the stem as it retracts from the valve body. For example, if the valve is handling chlorine, a leaking stem transports it to the outside environment, where it becomes hydrochloric acid when it reacts with moisture in the air. This acid corrodes the stem, which makes it even more difficult to seal as time goes by.

The above examples illustrate the need for leak-free valves. The magnetic actuator of the present invention, described more fully below, is capable of addressing this need by safely enclosing the dynamic (stem) seal of stemmed rotary valves.

BRIEF SUMMARY OF THE INVENTION

The present invention is a rotary valve adapter assembly comprising: an adapter plate configured to attach to a rotary valve body; a torque multiplier assembly comprising one or more planetary gear subassemblies, each of which comprises a sun gear, a ring gear, and a plurality of planetary gears; a magnetic actuator assembly comprising two sets of magnetically coupled magnets; and a shaft comprising two ends; wherein the magnetic actuator assembly interfaces with the torque multiplier assembly such that when the magnets of the magnetic actuator assembly rotate, they cause the sun gear of a first planetary gear subassembly to rotate, thereby causing the planetary gears to walk on the ring gear; wherein the planetary gears of each planetary gear subassembly are situated

within or on a carrier, and when the planetary gears walk on the ring gear, they cause the carrier to rotate; wherein when the carrier of the first planetary gear subassembly rotates, it causes the sun gear of a second planetary gear subassembly to rotate; and wherein one end of the shaft extends into the carrier of the second planetary gear subassembly such that when the carrier of the second planetary gear subassembly rotates, the shaft also rotates, thereby causing the valve to open and close.

In a preferred embodiment, the invention further comprises a top enclosure and a bottom enclosure containing the planetary gear subassembly(ies), the top enclosure containing a first part of the magnetic actuator assembly and fitting inside of a driver housing, and the driver housing containing a second part of the magnetic actuator assembly. Preferably, the top enclosure has a bottom disc, and the driver housing has a bottom part that rotates on top of the bottom disc of the top enclosure. The driver housing preferably has a top, and the invention further comprises a driver cap that is affixed to the top of the driver housing.

In a preferred embodiment, the invention further comprises an actuator wheel that is connected to the driver housing by actuator spokes such that when the actuator wheel is turned, the driver housing rotates. Preferably, the magnetic actuator assembly comprises a follower support containing a plurality of inner magnets and fitting into the top enclosure and a driver support containing a plurality of outer magnets that are magnetically coupled with the inner magnets such that when the outer magnets in the driver support rotate, the inner magnets in the follower support also rotate, and the driver housing encloses the driver support. A portion of the top enclosure is preferably situated between the inner and outer magnets.

In a preferred embodiment, the invention further comprises a first planetary adapter with two ends, one end of which extends into the follower support and the other end of which extends into the sun gear of the first planetary gear subassembly. Preferably, the invention further comprises a second planetary adapter with two ends, one end of which extends into the carrier of the first planetary gear subassembly and the other end of which extends into the sun gear of the second planetary gear subassembly. The ring gear of each planetary gear subassembly is preferably held stationary within the bottom enclosure.

In a preferred embodiment, the invention further comprises a ring seal around the shaft, and the ring seal is fully enclosed by the top and bottom enclosures. Preferably, the invention further comprises a valve-adapter plate seal between the valve body and the adapter plate. The magnetic actuator assembly preferably comprises a motor actuator assembly.

In a preferred embodiment, the motor actuator assembly comprises a clutch, a motor gear, a motor mounting bracket, a motor ring gear, and a motor, and the motor turns the motor gear, which engages with the motor ring gear, causing it to rotate. Preferably, the motor ring gear is attached to a driver housing containing outer magnets such that when the motor ring gear rotates, it also causes the driver housing to rotate.

In a preferred embodiment, the magnetic actuator assembly comprises a plurality of radial driver magnets held by a radial driver magnet support and a plurality of radial follower magnets held by a radial follower magnet support. Preferably, the radial driver magnets in the radial driver magnet support and the radial follower magnets in the radial follower magnet support are arranged linearly within a top enclosure with a portion of the top enclosure between them, and the radial driver magnets are magnetically coupled to the radial follower magnets. The radial driver magnet support is preferably inserted into a top part of the top enclosure, and the radial follower magnet support is preferably inserted into a bottom part of the top enclosure.

In a preferred embodiment, the invention further comprises a radial driver magnet cap that is situated on top of the top enclosure, and a wheel actuator is attached to the radial driver magnet cap by actuator spokes such that when the wheel actuator is turned, it causes the radial driver magnets and the radial follower magnets to rotate. Preferably, the invention further comprises a planetary adapter with two ends, one end of which extends into the radial follower magnet support and the other end of which extends into the sun gear of a first planetary gear subassembly. The magnetic actuator assembly preferably comprises a motor actuator assembly.

In a preferred embodiment, the motor actuator assembly comprises a motor, a clutch, and a motor coupler, the motor causes the motor coupler to rotate, the motor coupler is attached to a radial driver magnet cap such that when the motor coupler rotates, it causes the radial driver magnet cap to rotate at the same rate as the motor, the radial

driver magnet cap is attached to a top enclosure, and the top enclosure contains the radial driver magnets and radial follower magnets.

In a preferred embodiment, the invention is a rotary valve adapter assembly comprising: an adapter plate configured to attach to a rotary valve body; a torque multiplier assembly comprising a planetary gear subassembly having a sun gear, a ring gear, and a plurality of planetary gears; a magnetic actuator assembly comprising two sets of magnetically coupled magnets; and a shaft comprising two ends; the magnetic actuator assembly interfaces with the torque multiplier assembly such that when the magnets of the magnetic actuator assembly rotate, they cause the sun gear of the planetary gear subassembly to rotate, thereby causing the planetary gears to walk on the ring gear; the planetary gears of the planetary gear subassembly are situated within or on a carrier, and when the planetary gears walk on the ring gear, they cause the carrier to rotate; and one end of the shaft extends into the carrier of the planetary gear subassembly such that when the carrier of the planetary gear subassembly rotates, the shaft also rotates, thereby causing the valve to open and close.

In a preferred embodiment, the invention further comprises a top enclosure and a bottom enclosure containing the planetary gear subassembly, the top enclosure containing a first part of the magnetic actuator assembly and fitting inside of a driver housing, and the driver housing containing a second part of the magnetic actuator assembly. Preferably, the top enclosure has a bottom disc, and the driver housing has a bottom part that rotates on top of the bottom disc of the top enclosure. The driver housing preferably has a top, and the invention further comprises a driver cap that is affixed to the top of the driver housing.

In a preferred embodiment, the invention further comprises an actuator wheel that is connected to the driver housing by actuator spokes such that when the actuator wheel is turned, the driver housing rotates. Preferably, the magnetic actuator assembly comprises a follower support containing a plurality of inner magnets and fitting into the top enclosure and a driver support containing a plurality of outer magnets that are magnetically coupled with the inner magnets such that when the outer magnets in the driver support rotate, the inner magnets in the follower support also rotate, and the driver

housing encloses the driver support. A portion of the top enclosure is preferably situated between the inner and outer magnets.

In a preferred embodiment, the invention further comprises a first planetary adapter with two ends, one end of which extends into the follower support and the other end of which extends into the sun gear of the planetary gear subassembly. Preferably, the ring gear of the planetary gear subassembly is held stationary within the bottom enclosure.

In a preferred embodiment, the invention further comprises a ring seal around the shaft, and the ring seal is fully enclosed by the top and bottom enclosures. Preferably, the invention further comprises a valve-adapter plate seal between the valve body and the adapter plate. The magnetic actuator assembly preferably comprises a motor actuator assembly.

In a preferred embodiment, the motor actuator assembly comprises a clutch, a motor gear, a motor mounting bracket, a motor ring gear, and a motor, and the motor turns the motor gear, which engages with the motor ring gear, causing it to rotate. Preferably, the motor ring gear is attached to a driver housing containing outer magnets such that when the motor ring gear rotates, it also causes the driver housing to rotate.

In a preferred embodiment, the magnetic actuator assembly comprises a plurality of radial driver magnets held by a radial driver magnet support and a plurality of radial follower magnets held by a radial follower magnet support. Preferably, the radial driver magnets in the radial driver magnet support and the radial follower magnets in the radial follower magnet support are arranged linearly within a top enclosure with a portion of the top enclosure between them, and the radial driver magnets are magnetically coupled to the radial follower magnets. The radial driver magnet support is preferably inserted into a top part of the top enclosure, and the radial follower magnet support is preferably inserted into a bottom part of the top enclosure.

In a preferred embodiment, the invention further comprises a radial driver magnet cap that is situated on top of the top enclosure, and a wheel actuator is attached to the radial driver magnet cap by actuator spokes such that when the wheel actuator is turned, it causes the radial driver magnets and the radial follower magnets to rotate. Preferably, the invention further comprises a planetary adapter with two ends, one end of which

extends into the radial follower magnet support and the other end of which extends into the sun gear of the planetary gear subassembly. The magnetic actuator assembly preferably comprises a motor actuator assembly.

In a preferred embodiment, the motor actuator assembly comprises a motor, a clutch, and a motor coupler, the motor causes the motor coupler to rotate, the motor coupler is attached to a radial driver magnet cap such that when the motor coupler rotates, it causes the radial driver magnet cap to rotate at the same rate as the motor, the radial driver magnet cap is attached to a top enclosure, and the top enclosure contains the radial driver magnets and radial follower magnets.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of the present invention in a fully assembled state.

Figure 2 is a side view of the present invention in a fully assembled state.

Figure 3 is an exploded view of the present invention.

Figure 4 is a section view of the adapter plate assembly of the present invention.

Figure 5 is an exploded view of the adapter plate assembly of the present invention.

Figure 6 is an exploded view of the actuator assembly of the present invention.

Figure 7 is a section view of the actuator assembly of the present invention.

Figure 8 is an exploded view of the torque multiplier assembly of the present invention.

Figure 9 is an exploded view of the planetary gear subassembly of the torque multiplier assembly of the present invention.

Figure 10 is a section view of the planetary gear subassembly of the torque multiplier assembly of the present invention.

Figure 11 is a detail perspective view of two planetary gear subassemblies and the planetary adapter of the torque multiplier assembly of the present invention.

Figure 12 is a perspective view of the inner magnets, follower support, planetary adapters, planetary gear subassembly, shaft, and ball of the present invention.

Figure 13 is a section view of the actuator assembly and torque multiplier assembly of the present invention.

Figure 14 is a cropped section view of the present invention in a fully assembled state.

Figure 15 is a detail perspective view of the top enclosure, bottom enclosure, o-rings, valve body, ring seal, valve-adapter plate seal, shaft, and adapter plate of the present invention.

Figure 16 is a perspective view of the shaft with a positive stop and adapter plate with a positive stop.

Figure 17 is a detail perspective view of the shaft with a positive stop and adapter plate with a positive stop with the valve in an open position.

Figure 18 is a detail perspective view of the shaft with a positive stop and adapter plate with a positive stop with the valve in a closed position.

Figure 19 is a perspective view of the present invention shown with a motor actuator assembly.

Figure 20 is an exploded view of the motor actuator assembly of the present invention.

Figure 21 is a section view of the motor actuator assembly of the present invention.

Figure 22 is a perspective view of the present invention shown attached to a butterfly valve.

Figure 23 is a perspective cut-away view of the present invention shown attached to a plug valve.

Figure 24 is a perspective view of the present invention shown with a radial magnet actuation system.

Figure 25 is a perspective cut-away view of the radial magnet actuation system.

Figure 26 is an exploded view of the present invention shown with a radial magnet actuation system.

Figure 27 is a section view of the present invention shown with a radial magnet actuation system.

Figure 28 is a perspective view of the present invention on a butterfly valve, shown with a radial magnet actuation system.

Figure 29 is a perspective view of the present invention on a plug valve, shown with a radial magnet actuation system.

Figure 30 is a perspective view of the present invention shown with a radial magnet actuation system and a motor actuator assembly.

Figure 31 is an exploded view of the present invention shown with a radial magnet actuation system and a motor actuator assembly.

REFERENCE NUMBERS

1	Valve body
2	Left flange
3	Right flange
4	Trunnion cover
5	Ball
6	Shaft
6a	Shaft recess
6b	Shaft driver
7	Trunnion
8	Adapter plate
8a	Cutout (in adapter plate)
8b	Protrusion (into cutout in adapter plate)
9	Bottom enclosure
9a	Ridges (of bottom enclosure)
10	Top enclosure
10a	Bottom disc (of top enclosure)
11	Driver housing
11a	Bottom part (of driver housing)
12	Driver support
13	Driver cap
14	Outer magnet
15	Follower support
15a	Socket (of follower support)

16	Inner magnet
17	Carrier
17a	Socket (of carrier)
17b	Aperture (of carrier)
18	Planetary plate
18a	Aperture (in planetary plate)
18b	Center aperture (in planetary plate)
19	Planetary adapter
20	Planetary gear
20a	Axle (of planetary gear)
21	Sun gear
22	Ring gear
22a	Internal thread (on ring gear)
22b	Channel (on ring gear)
23	Seat
24	Rubber spring gasket
25	Ring seal
26	Valve-adapter plate seal
27	Actuator spoke
28	Actuator wheel
29	Clutch
30	Motor gear
31	Motor mounting bracket
32	Motor ring gear
33	Motor
33a	Motor drive shaft (corresponding to motor 33)
34	Bolt
35	Hex nut
37	O-ring
39	Driver cap
40	Stud

- 41 Adapter plate assembly
- 42 Torque multiplier assembly
- 43 Cylindrical magnet wheel actuator assembly
- 44 Planetary gear subassembly
- 45 Butterfly valve assembly
- 46 Plug valve assembly
- 47 Cylindrical magnet motor actuator assembly
- 48 Radial magnet wheel actuator assembly
- 49 Radial driver magnet
- 50 Radial follower magnet
- 51 Top enclosure (alternate embodiment with radial magnets)
- 52 Butterfly valve body
- 53 Butterfly disc
- 54 Butterfly valve cover
- 55 Plug valve body
- 56 Plug
- 57 Plug valve cover
- 58 Radial driver magnet support
- 59 Radial driver magnet cap
- 60 Radial follower magnet support
- 61 Radial magnet motor actuator assembly
- 62 Motor (alternate embodiment with radial magnets)
- 62a Motor drive shaft (corresponding to motor 62)
- 63 Motor Enclosure
- 64 Top Enclosure (alternate embodiment for radial magnets with motor actuator)
- 65 Motor coupler
- 66 Set Screw
- 67 Clutch (alternate embodiment for radial magnets with motor actuator)

DETAILED DESCRIPTION OF INVENTION

Figure 1 is a perspective view of the present invention in a fully assembled state. This figure shows the valve body 1, the left flange 2, the right flange 3, and the trunnion cover 4. The left and right flanges 2, 3 are bolted to the valve body 1 and allow the valve to be connected to piping (not shown). The trunnion cover 4 houses the trunnion 7 (not shown). The present invention comprises an adapter plate 8, which is bolted to the bottom enclosure 9, as well as the valve body 1 (see Figure 2). Note that the adapter plate 8 may also be integral with (*i.e.*, the same part as) the bottom enclosure 9 rather than a separate part. As shown in subsequent figures, the bottom enclosure 9 contains the planetary gear subassemblies 44.

The bottom enclosure 9 in turn is bolted to the top enclosure 10, which contains part of the cylindrical magnet wheel actuator assembly 43 (not shown). In an alternate embodiment, the bottom and top enclosures 9, 10 are a single part. The top enclosure 10 fits inside of the driver housing 11 (see Figures 6 and 14), and the bottom part 11a of the driver housing 11 rotates on top of the bottom disc 10a of the top enclosure 10. The driver cap 13 is affixed to the top of the driver housing 11 and seals the top of the driver housing 11 so that no dirt or debris comes into contact with the outer magnets 14 (not shown).

In the embodiment shown in Figure 1, the valve is actuated by an actuator wheel 28. Actuator spokes 27 connect the actuator wheel 28 to the driver housing 11. Various bolts 34, hex nuts 35 and studs 40, all of which serve to connect various parts together, are also shown in Figure 1.

Figure 2 is a side view of the present invention in a fully assembled state. This figure shows the three main assemblies of the present invention: the adapter plate assembly 41, the torque multiplier assembly 42, and the cylindrical magnet wheel actuator assembly 43. These various assemblies will be broken down and discussed in connection with subsequent figures.

Figure 3 is an exploded view of the present invention. This figure shows the adapter plate assembly 41, the torque multiplier assembly 42, and the cylindrical magnet wheel actuator assembly 43. As shown in this figure, these three assemblies are bolted together when the invention is fully assembled.

Figure 4 is a section view of the adapter plate assembly of the present invention. This figure shows the valve body 1, left flange 2, right flange 3 and trunnion cover 4. It also shows the ball 5, shaft 6, trunnion 7 and adapter plate 8. Although this figure is shown with a ball valve 5, as will be explained below, the present invention is designed to work with any type of rotary valve. One end of the shaft 6 extends into the ball 5 and causes the ball to rotate. In a preferred embodiment, the ball 5 rotates about the trunnion 7, which is stationary in the trunnion cover 4. Alternately, the ball 4 and trunnion 7 could rotate together in the trunnion cover 4.

A ball seat 23 lies on either side of the ball 5. The purpose of the ball seats 23 is to seal out fluid between the ball 5 and the right and left flanges 2, 3. A rubber spring gasket 24 surrounds each seat 23 and provides a seal between the flanges 2, 3 and the seat 23. The rubber spring gasket 24 also provides positive pressure between the seat 23 and the ball 5. A ring seal 25 surrounds the shaft 6 and is situated between the valve body 1 and the adapter plate 8. The purpose of the ring seal 25 is to prevent fluid from exiting the valve body 1 and coming into contact with the torque multiplier assembly 42 (not shown). The ring seal 25 also acts to equalize pressure between fluid inside of the valve body 1 and fluid inside of the top and bottom enclosures 9, 10. The valve-adapter plate seal 26 provides a static seal between the valve body 1 and the adapter plate 8. An o-ring 37 lies inside of a recess in the adapter plate 8 and acts as a static seal between the adapter plate 8 and the bottom enclosure 9. Bolts 34, hex nuts 35 and studs 40 serve to secure the various parts together.

Figure 5 is an exploded view of the adapter plate assembly of the present invention. The figure shows the same parts as in Figure 4, namely, the left flange 2, right flange 3, trunnion cover 5, ball 5, shaft 6 and trunnion 7. It also shows the seats 23 on either side of the ball 5, the rubber spring gaskets 24, the ring seal 25, and the valve-adapter plate seal 26. Bolts 34, hex nuts 35 and studs 40 serve to secure the various parts together.

Figure 6 is an exploded view of the magnetic actuator assembly of the present invention. This figure shows the top enclosure 10, the driver housing 11, and the driver cap 13. It also shows the follower support 15, which carries a plurality of inner magnets 16. The follower support 15 (with inner magnets 16) fits into the top enclosure 10, which

in turn fits into the driver housing 11. This figure also shows the actuator spokes 27, which are connected to the actuator wheel 28. When the invention is fully assembled, the actuator spokes 27 are bolted into the driver housing 11 so that when the actuator wheel 28 is turned, the driver housing 11 also rotates. As shown in the next figure, outer magnets 14 are housed within the driver housing 11 and are magnetically coupled with the inner magnets 16 in the follower support 15. The top enclosure 10 acts as a physical barrier between the inner and outer magnets 16, 14 but does not prevent them from being magnetically coupled.

Thus, as the driver housing 11 is rotated by the actuator wheel 28, the magnetic coupling between the outer magnets 14 in the driver housing 11 and the inner magnets 16 in the follower support 15 cause the follower support 15 to rotate at the same rate as the driver housing 11. The top enclosure 10 is bolted to the bottom enclosure 9.

Figure 7 is a section view of the magnetic actuator assembly of the present invention. This figure shows the top enclosure 10, the driver housing 11, and the driver support 12. The driver housing 11 contains the outer magnets 14 and the driver support 12. Figure 7 also shows the outer magnets 14, the follower support 15, and the inner magnets 16. This figure shows how the inner magnets 16 are arrayed within the follower support 15 and the outer magnets 14 are arrayed within the driver support 12. It also shows how the top enclosure 10 acts as a physical barrier between the inner 16 and outer 14 magnets and how the driver housing 11 encloses the driver support 12 and outer magnets 14.

Figure 8 is an exploded view of the torque multiplier assembly of the present invention. The torque multiplier assembly 42 includes the bottom enclosure 9, which houses the planetary gear subassemblies 44. An o-ring 37 is situated in a recess in the top of the bottom enclosure 9 to provide a static seal between the bottom and top enclosures 9, 10. In this figure, two planetary gear subassemblies 44 are shown, but the present invention is not limited to any particular number of planetary gear subassemblies. In fact, it is contemplated by the inventors that a preferred embodiment could comprise anywhere from one to ten planetary gear subassemblies. The number of planetary gear subassemblies included will depend on the torque and space requirements for the particular valve application.

The planetary adapter 19 is inserted into the center of the planetary gear subassembly 44. As shown in Figure 8, each planetary gear subassembly has a planetary adapter 19. The function of the planetary adapter 19 will be discussed more fully in connection with Figure 11.

Figure 9 is an exploded view of the planetary gear subassembly of the torque multiplier assembly of the present invention. As shown in this figure, each planetary gear subassembly 44 is comprised of a sun gear 21, a ring gear 22, and three planetary gears 20. In a preferred embodiment, there are three planetary gears (because they represent the most efficient configuration), but the present invention is not limited to any particular number of planetary gears. The ring gear 22 comprises internal threads 22a and one or more channels 22b on the outside of the ring gear. The planetary gears 20 fit into (*i.e.*, are situated within or on) a carrier 17, which is bolted to a planetary plate 18. Note that the axle 20a of each planetary gear 20 fits into an aperture 18a in the planetary plate 18 and an aperture 17b (only one of three apertures 17b is shown) in the carrier 17.

Figure 10 is a section view of the planetary gear subassembly of the torque multiplier assembly of the present invention. This figure shows a single planetary gear subassembly 44 fully assembled. As shown in this figure, the sun gear 21 is located in the center of the planetary gear subassembly, and the three planetary gears 20 are situated around and engage with the sun gear 21 so that as the sun gear 21 rotates, the planetary gears 20 also rotate. As the planetary gears 20 rotate, they “walk” around the inside of the ring gear 22, thereby causing the carrier 17 to rotate (see Figure 9, which shows how the planetary gears 20 fit into the carrier 17). The channels 22b on the outside of the ring gear 22 correspond to ridges 9a in the bottom enclosure 9 (see Figure 8) such that the ring gear 22 is held in place (*i.e.*, stationary) within the bottom enclosure 9.

Figure 11 is a detail perspective view of two planetary gear subassemblies and the planetary adapter of the torque multiplier assembly of the present invention. As noted above, in the embodiment shown in the figures, the torque multiplier assembly (see Figure 8) comprises two planetary gear subassemblies 44 and two planetary adapters 19. The present invention is not limited to any particular number of planetary gear subassemblies, however. As shown in Figure 11, each planetary gear subassembly 44 comprises a sun gear 21, a ring gear 22, and three planetary gears 20 (see also Figures 9

and 10). The ring gear 22 comprises channels 22b that allow the ring gear to fit into the bottom enclosure 9 (see Figure 8). These channels 22b correspond to ridges 9a in the bottom enclosure 9. In this manner, the ring gear 22 is held stationary inside the bottom enclosure 9.

Bolts 34 secure the carrier 17 to the planetary plate 18 of each planetary gear subassembly 44. One end of the planetary adapter 19 fits into a socket 17a in the carrier 17 of the first planetary gear subassembly 44 such that the planetary adapter 19 rotates with the carrier 17. The other end of the planetary adapter 19 is inserted into the center of the sun gear 21 of the second planetary gear subassembly 44. Both ends of the planetary adapter 19 are preferably hexagon-shaped so that the sun gear 21 will not rotate on the planetary adapter 19 but rather will rotate with it. Thus, the sun gear 21 on the second (in Figure 11, the lower) planetary gear subassembly 20 rotates at the same speed as the planetary adapter 19, which rotates at the same speed as the carrier 17 in the first planetary gear subassembly 20. Note that the aperture 18b in the center of the planetary plate 18 is not hex-shaped but round, which allows the planetary plate 18 to rotate about the planetary adapter 19.

Figure 12 is a perspective view of the inner magnets, follower support, planetary adapters, planetary gear subassembly, shaft, and ball of the present invention. As shown in this figure, there is a planetary adapter 19 located between the follower support 15, which houses the inner magnets 16, and the first planetary gear subassembly 44. One end of this planetary adapter 19 fits into a socket 15a (see Figure 13) in the follower support 15 such that the planetary adapter 19 rotates with the follower support 15. The second end of this planetary adapter 19 is inserted into the center of the sun gear 21 (not shown) of the first planetary gear subassembly 44 and causes the sun gear 21 of the first planetary gear subassembly 44 to rotate at the same speed as the follower support 15.

One end of the shaft 6 is inserted into the carrier 17 (not shown) on the second (lower in Figure 12) planetary gear subassembly 44 such that the shaft 6 rotates at the same speed as the carrier 17. The other end of the shaft 6 is inserted into the ball 5, thereby causing the ball to rotate with the carrier 17 of the planetary gear subassembly 44 that is physically most proximate (closest) to the ball 5 (*i.e.*, the last planetary gear

subassembly 44 in the series of planetary gear subassemblies of the torque multiplier assembly 42).

Due to the magnetic interlock between the outer and inner magnets 14, 16, the follower support 15 and inner magnets 16 rotate at the same speed as the driver housing 11, driver support 12, driver cap 13 and outer magnets 14, all of which rotate at the same speed as the wheel actuator 28. The first planetary adapter 19 rotates at the same speed as the follower support 15. The planetary adapter 19 in turn causes the sun gear 21 of the first planetary gear subassembly 44 to rotate at the same speed as the planetary adapter 19. As noted above, rotation of the sun gear 21 causes the planetary gears 20 to rotate around the inside of the ring gear 22. The planetary gears 20 rotate about the sun gear 21 at a speed that is slower than the speed at which the sun gear 21 rotates. This speed reduction is based on the ratio between the size of the sun gear 21 and the size of the ring gear 22 (or, in other words, on the size of the planetary gears 20 in relation to the sun gear 21 because they span the distance between the sun gear 21 and the ring gear 22). Torque is increased with the transfer of energy between the sun gear 21 and the planetary gears 20.

The ring gear 22 does not rotate; however, the carrier 17 rotates at the same speed at which the planetary gears 20 rotate about the sun gear 21. Thus, the carrier 17 rotates at a speed slow than that of the sun gear 21. The planetary adapter 19 between the first and second planetary gear subassemblies 44 rotates at the same speed as the carrier 17 of the first planetary gear subassembly 44 and causes the sun gear 21 of the second planetary gear subassembly 44 to rotate at this same rate. (The sun gear 21 of the second planetary gear subassembly 44 rotates more slowly than the sun gear 21 of the first planetary gear subassembly 44 due to the speed reduction provided by the planetary gears 20 of the first planetary gear subassembly 44. This is true for each planetary gear subassembly 44 in the torque multiplier assembly 42.) In turn, the planetary gears 20 of the second planetary gear subassembly 44 cause the carrier 17 on the second planetary gear subassembly 44 to rotate at a speed that is slower than that of the planetary adapter 19 between the two planetary gear subassemblies 44 (and slower than that of the carrier 17 on the first planetary gear subassembly).

As explained above, the torque increases with the transfer of energy from the sun gear 21 to the planetary gears 20 of the second planetary gear subassembly 44. In a preferred embodiment, the torque multiplier for each planetary gear subassembly is roughly 3.5:1. With two planetary gear subassemblies, the torque multiplier from the wheel actuator 28 to the ball 5 is roughly 12.25 (*i.e.*, 3.5 times 3.5). The speed reduction is equal to the increase in torque; for example, if the torque increase is 12.25, then the speed reduction is also 12.25.

Figure 13 is a section view of the actuator assembly and torque multiplier assembly of the present invention. The actuator wheel 28 is connected via actuator spokes 27 (not shown) to the driver housing 11, which contains the driver support 12, which in turn houses the outer magnets 14 (see Figure 7). The top enclosure 10 is situated between the outer and inner magnets 14, 16. The planetary adapter 19 of the first planetary gear subassembly 44 fits into a socket 15a in the follower support 15. The lower half of Figure 13 shows the two planetary gear subassemblies 44 installed into the bottom enclosure 9. It also shows how the two planetary adapters 19 are linearly aligned with one another. The shaft 6 (not shown) is inserted into the socket 17a in the carrier 17 of the second planetary gear subassembly 44.

As used herein, the term “first planetary gear subassembly” refers to the planetary gear subassembly that interfaces directly (via the planetary adapter 19) with the follower support, and the term “second planetary gear subassembly” refers to the planetary gear subassembly that interfaces directly via the shaft) with the ball 5. There may be any number of planetary gear subassemblies, and each would interface with the other in the manner shown in Figure 13 (*i.e.*, via a planetary adapter 19, one end of which is inserted into the carrier of the previous planetary gear subassembly and the other end of which is inserted into the sun gear of the next planetary gear subassembly). As claimed in claim 1, the rotation of the carrier in the first planetary gear subassembly causes the sun gear of the second planetary gear subassembly to rotate—either directly via the planetary adapter between the first and second planetary gear subassemblies or indirectly via the other planetary gear subassemblies and their planetary adapters—regardless of how many other planetary gear subassemblies there are between the first and second planetary gear subassemblies or whether there are none at all.

Figure 14 is a cropped section view of the present invention in a fully assembled state. All of the parts shown in this figure have been mentioned and/or described in connection with previous figures.

Figure 15 is a detail perspective view of the top enclosure, bottom enclosure, o-rings, valve body, ring seal, valve-adapter plate seal, shaft, and adapter plate of the present invention. All of the parts shown in this figure have been mentioned and/or described in connection with previous figures. This figure clearly shows the ridges 9a in the bottom enclosure 9 that hold the ring gear 22 in place (the ridges 9a fit into the channels 22b in the ring gear 22). It also shows the end of the shaft 6 that fits into the carrier 17 on the second planetary gear subassembly 44 (not shown). This figure provides a detail view of the ring seal 25 and adapter-plate seal 26. Because the shaft 6 is rotating, the ring seal 25 is a dynamic seal; however, it is also fully enclosed because the top and bottom enclosures 9, 10 prevent any emissions from escaping to the outside environment. The ring seal 25 is the only dynamic seal in the present invention.

Figure 16 is a perspective view of the shaft with a positive stop and adapter plate with a positive stop. As shown in this figure, the adapter plate 8 has a cutout 8a in the center of the adapter plate 8 through which the shaft 6 is inserted (see also Figure 15). In a preferred embodiment, this cutout 8a comprises a protrusion 8b that interacts with a recess 6a on one end of the shaft 6. This interaction between the shaft recess 6a and adapter plate protrusion 8b ensures that the ball 5 (not shown) will not rotate more than ninety (90) degrees. The driver 6b on the same end of the shaft 6 as the recess 6a extends into the carrier 17 of the second planetary gear subassembly 44 (see Figure 14).

Figure 17 is a detail perspective view of the shaft with a positive stop and adapter plate with a positive stop with the valve in an open position. Figure 18 is a detail perspective view of the shaft with a positive stop and adapter plate with a positive stop with the valve in a closed position. These two figures show the positive stop (*i.e.*, the shaft recess 6a and adapter plate protrusion 8a) in operation.

Figure 19 is a perspective view of the present invention shown with a motor actuator assembly. In this embodiment, the actuator wheel 28 is replaced with a cylindrical magnet motor actuator assembly 47 comprising a clutch 29, a motor gear 30, a motor mounting bracket 31, a motor ring gear 32, and a motor 33. The purpose of the

clutch 29 is to conditionally attach the motor 33 to the motor gear 30. The purpose of the motor mounting bracket 31 is to secure the motor 33 to the top enclosure 10 and to ensure proper positioning of the motor gear 30 in relation to the motor ring gear 32. The motor 33 turns the motor gear 30, which engages with the motor ring gear 32, causing it to rotate.

Figure 20 is an exploded view of the motor actuator assembly of the present invention. As shown in this figure, the motor ring gear 32 is preferably bolted to the bottom part 11a of the driver housing 11. The magnetic coupling between the outer magnets 14 (not shown but located inside of the driver housing 11) and the inner magnets 16 (not shown but located inside the top enclosure 10) is the same as described above. In this embodiment, the ring gear 32 causes the driver housing 11 (and, therefore, the outer magnets 14) to rotate. The driver cap 39 is specialized in form (namely, it has a relatively large hole in the center) to allow the motor mounting bracket 31 to be bolted directly to the top enclosure 10, as shown in Figures 19 and 20.

Figure 21 is a section view of the motor actuator assembly of the present invention. Note that the bolts 34 securing the motor bracket 31 to the top enclosure 10 do not penetrate through to the interior of the top enclosure 10. The purpose of the top enclosure 10 is to contain any emissions from the dynamic seal at the shaft 6 (described above); therefore, puncturing the top enclosure 10 is something that should be avoided.

Figure 22 is a perspective view of the present invention shown attached to a butterfly valve, and Figure 23 is a perspective cut-away view of the present invention shown attached to a plug valve. The embodiments previously described are all shown with a ball valve; however, the present invention may be used with any kind of rotary valve, as noted above. In Figure 22, the present invention is shown with a butterfly valve assembly 45. The butterfly valve assembly comprises a butterfly valve body 52, a butterfly disc 53, and a butterfly valve cover 54. In Figure 23, the present invention is shown with a plug valve assembly 46. The plug valve assembly 46 comprises a plug valve body 55, a plug 56, and a plug valve cover 57. The present invention is not limited to any particular type of rotary valve.

Figures 24-27 illustrate an alternate embodiment of the present invention with a different magnetic configuration than the embodiments previously shown. These figures

show the radial magnet wheel actuator assembly 48. In this embodiment, rather than the inner magnets 16 being contained within a follower support 15 that fits into a top enclosure 10, which in turn fits into a driver housing 11 that houses a driver support 12 containing the outer magnets 14 (i.e., the array of inner magnets is basically located inside of the array of outer magnets), radial driver magnets 49 held by a radial driver magnet support 58 and radial follower magnets 50 held by a radial follower magnet support 60 are stacked (i.e., arranged linearly within the top enclosure 51) with a portion of the top enclosure 51 between them.

Figure 24 is a perspective view of the present invention shown with a radial magnet actuation system. In this embodiment, the radial driver magnet cap 59 replaces the driver cap 13 of the previous embodiment. In addition, the top enclosure 51 replaces the top enclosure 10 previously shown.

Figure 25 is a perspective cut-away view of the radial magnet actuation system. As shown in this figure, the radial driver magnets 49 are contained within a radial driver magnet support 58. The radial driver magnet support 58 is inserted into the top part of the top enclosure 51. (Note that this top enclosure 51 is shaped differently than the top enclosure 10 described in connection with previous embodiments.) The radial follower magnets 50 are contained within a radial follower magnet support 60. The radial follower magnet support 60 is inserted into the bottom part of the top enclosure 51; however, part of the top enclosure 51 provides a physical barrier between the inner and outer radial magnets 49, 50 (see Figure 27).

With this embodiment, the wheel actuator 28 is attached to the radial driver magnet cap 59 by the actuator spokes 27. As the wheel actuator 28 is turned, the radial driver magnet cap 59 rotates, causing the radial driver magnets 49 in the radial driver magnet support 58 to rotate as well. Due to the magnetic coupling between the radial driver magnets and the radial follower magnets, the radial follower magnet support 60 rotates as well. One end of the planetary adapter 19 extending from the first planetary gear subassembly 44 is inserted into a socket (not shown) in the radial follower magnet support 60, and the other end of the planetary adapter 19 is inserted into the sun gear 21 (not shown) of the first planetary gear subassembly (see Figure 27). In this manner, as the radial follower magnet support 60 rotates, so does the sun gear 21 of the first

planetary gear subassembly 44. All other aspects of the invention are as previously described.

Figure 26 is an exploded view of the present invention shown with a radial magnet actuation system. As shown in this figure, the top enclosure 51 is bolted to the bottom enclosure 9. The top and bottom enclosures 51, 9 are stationary. The wheel actuator 28, actuator spokes 27, radial driver magnet cap 59, radial driver magnet support 58, radial driver magnets 49, radial follower magnet support 60, and radial follower magnets 50 are the only parts that rotate within the actuator assembly. Figure 27 is a section view of the present invention shown with a radial magnet actuation system.

Figure 28 is a perspective view of the present invention, with the radial magnet actuation system described above, shown attached to a butterfly valve. Figure 29 is a perspective cut-away view of the present invention, with the radial magnet actuation system described above, shown attached to a plug valve. As stated above, any of the embodiments of the present invention may be used with any type of rotary valve.

Figures 30 and 31 show the radial magnet actuation system with a motor actuator assembly. The radial magnet motor actuator assembly 61 shown in Figures 30 and 31 is different than the cylindrical magnet motor actuator assembly 47 shown in Figures 19-21 because it has been specifically designed to work with the radial magnets. In Figures 30 and 31, the motor drive shaft 62a is connected to the radial driver magnets 49 conditionally through the clutch 67. In Figures 19-21, on the other hand, the motor drive shaft 33a is connected to the outer magnets 14 through the clutch 39 and a set of gears 30, 32. In Figures 30 and 31, the motor 62 is attached to the clutch 67 with bolts 34, and the clutch 67 is attached to the motor coupler 65 by a set screw 66. The motor coupler 65 is attached to the radial driver magnet cap 59 by bolts 34. Because the radial driver magnets 49 are contained within the top enclosure 64, which is bolted to the radial driver magnet cap 59, they rotate at the same speed as the motor 62. The motor enclosure 63 ensures that the motor is protected from dirt and debris, etc., and it also provides a mounting point for the motor and clutch.

The embodiment shown in Figures 30 and 31—namely, the radial magnet actuation system coupled with the motor actuator assembly—is a preferred embodiment because the motor is coupled directly to the radial driver magnets, thereby eliminating the

need for the type of ring gear 32 shown in Figure 20. The latter embodiment is more costly because it entails an extra set of gears on the outside of the actuator; in addition, because the ring gear 32 is exposed to the outside environment, it needs to be protected in some manner from corrosion, dust and debris (this consideration is not present in the embodiment shown in Figures 30 and 31).

Although the preferred embodiment of the present invention has been shown and described, it will be apparent to those skilled in the art that many changes and modifications may be made without departing from the invention in its broader aspects. The appended claims are therefore intended to cover all such changes and modifications as fall within the true spirit and scope of the invention.

REFERENCES

1. Shaw, M., Valve World, Vol. 5, Issue 4 (2000) 32-35.
2. Hathaway, N., Valve World, Vol. 2, Issue 1 (1997) 41.

CLAIMS

We claim:

1. A rotary valve adapter assembly comprising:
 - (a) an adapter plate configured to attach to a rotary valve body;
 - (b) a torque multiplier assembly comprising one or more planetary gear subassemblies, each of which comprises a sun gear, a ring gear, and a plurality of planetary gears;
 - (c) a magnetic actuator assembly comprising two sets of magnetically coupled magnets; and
 - (d) a shaft comprising two ends;wherein the magnetic actuator assembly interfaces with the torque multiplier assembly such that when the magnets of the magnetic actuator assembly rotate, they cause the sun gear of a first planetary gear subassembly to rotate, thereby causing the planetary gears to walk on the ring gear;
wherein the planetary gears of each planetary gear subassembly are situated within or on a carrier, and when the planetary gears walk on the ring gear, they cause the carrier to rotate;
wherein when the carrier of the first planetary gear subassembly rotates, it causes the sun gear of a second planetary gear subassembly to rotate; and
wherein one end of the shaft extends into the carrier of the second planetary gear subassembly such that when the carrier of the second planetary gear subassembly rotates, the shaft also rotates, thereby causing the valve to open and close.
2. The rotary valve adapter assembly of claim 1, further comprising a top enclosure and a bottom enclosure containing the planetary gear subassembly(ies), the top enclosure containing a first part of the magnetic actuator assembly and fitting inside of a driver housing, and the driver housing containing a second part of the magnetic actuator assembly.
3. The rotary valve adapter assembly of claim 2, wherein the top enclosure has a bottom disc, and the driver housing has a bottom part that rotates on top of the bottom disc of the top enclosure.

4. The rotary valve adapter assembly of claim 2, wherein the driver housing has a top, further comprising a driver cap that is affixed to the top of the driver housing.

5. The rotary valve adapter assembly of claim 2, further comprising an actuator wheel that is connected to the driver housing by actuator spokes such that when the actuator wheel is turned, the driver housing rotates.

6. The rotary valve adapter assembly of claim 2, wherein the magnetic actuator assembly comprises a follower support containing a plurality of inner magnets and fitting into the top enclosure and a driver support containing a plurality of outer magnets that are magnetically coupled with the inner magnets such that when the outer magnets in the driver support rotate, the inner magnets in the follower support also rotate, and wherein the driver housing encloses the driver support.

7. The rotary valve adapter assembly of claim 6, wherein a portion of the top enclosure is situated between the inner and outer magnets.

8. The rotary valve adapter assembly of claim 6, further comprising a first planetary adapter with two ends, one end of which extends into the follower support and the other end of which extends into the sun gear of the first planetary gear subassembly.

9. The rotary valve adapter assembly of claim 8, further comprising a second planetary adapter with two ends, one end of which extends into the carrier of the first planetary gear subassembly and the other end of which extends into the sun gear of the second planetary gear subassembly.

10. The rotary valve adapter assembly of claim 2, wherein the ring gear of each planetary gear subassembly is held stationary within the bottom enclosure.

11. The rotary valve adapter assembly of claim 2, further comprising a ring seal around the shaft, wherein the ring seal is fully enclosed by the top and bottom enclosures.

12. The rotary valve adapter assembly of claim 1, further comprising a valve-adapter plate seal between the valve body and the adapter plate.

13. The rotary valve adapter assembly of claim 2, wherein the magnetic actuator assembly comprises a motor actuator assembly.

14. The rotary valve adapter assembly of claim 13, wherein the motor actuator assembly comprises a clutch, a motor gear, a motor mounting bracket, a motor ring gear,

and a motor, wherein the motor turns the motor gear, which engages with the motor ring gear, causing it to rotate.

15. The rotary valve adapter assembly of claim 14, wherein the motor ring gear is attached to a driver housing containing outer magnets such that when the motor ring gear rotates, it also causes the driver housing to rotate.

16. The rotary valve adapter assembly of claim 1, wherein the magnetic actuator assembly comprises a plurality of radial driver magnets held by a radial driver magnet support and a plurality of radial follower magnets held by a radial follower magnet support.

17. The rotary valve adapter assembly of claim 16, wherein the radial driver magnets in the radial driver magnet support and the radial follower magnets in the radial follower magnet support are arranged linearly within a top enclosure with a portion of the top enclosure between them, and wherein the radial driver magnets are magnetically coupled to the radial follower magnets.

18. The rotary valve adapter assembly of claim 17, wherein the radial driver magnet support is inserted into a top part of the top enclosure, and the radial follower magnet support is inserted into a bottom part of the top enclosure.

19. The rotary valve adapter assembly of claim 17, further comprising a radial driver magnet cap that is situated on top of the top enclosure, wherein a wheel actuator is attached to the radial driver magnet cap by actuator spokes such that when the wheel actuator is turned, it causes the radial driver magnets and the radial follower magnets to rotate.

20. The rotary valve adapter assembly of claim 16, further comprising a planetary adapter with two ends, one end of which extends into the radial follower magnet support and the other end of which extends into the sun gear of a first planetary gear subassembly.

21. The rotary valve adapter assembly of claim 16, wherein the magnetic actuator assembly comprises a motor actuator assembly.

22. The rotary valve adapter assembly of claim 21, wherein the motor actuator assembly comprises a motor, a clutch, and a motor coupler, wherein the motor causes the motor coupler to rotate, wherein the motor coupler is attached to a radial driver magnet

cap such that when the motor coupler rotates, it causes the radial driver magnet cap to rotate at the same rate as the motor, wherein the radial driver magnet cap is attached to a top enclosure, and wherein the top enclosure contains the radial driver magnets and radial follower magnets.

23. A rotary valve adapter assembly comprising:

- (a) an adapter plate configured to attach to a rotary valve body;
- (b) a torque multiplier assembly comprising a planetary gear subassembly having a sun gear, a ring gear, and a plurality of planetary gears;
- (c) a magnetic actuator assembly comprising two sets of magnetically coupled magnets; and
- (d) a shaft comprising two ends;

wherein the magnetic actuator assembly interfaces with the torque multiplier assembly such that when the magnets of the magnetic actuator assembly rotate, they cause the sun gear of the planetary gear subassembly to rotate, thereby causing the planetary gears to walk on the ring gear;

wherein the planetary gears of the planetary gear subassembly are situated within or on a carrier, and when the planetary gears walk on the ring gear, they cause the carrier to rotate; and

wherein one end of the shaft extends into the carrier of the planetary gear subassembly such that when the carrier of the planetary gear subassembly rotates, the shaft also rotates, thereby causing the valve to open and close.

24. The rotary valve adapter assembly of claim 23, further comprising a top enclosure and a bottom enclosure containing the planetary gear subassembly, the top enclosure containing a first part of the magnetic actuator assembly and fitting inside of a driver housing, and the driver housing containing a second part of the magnetic actuator assembly.

25. The rotary valve adapter assembly of claim 24, wherein the top enclosure has a bottom disc, and the driver housing has a bottom part that rotates on top of the bottom disc of the top enclosure.

26. The rotary valve adapter assembly of claim 24, wherein the driver housing has a top, further comprising a driver cap that is affixed to the top of the driver housing.

27. The rotary valve adapter assembly of claim 24, further comprising an actuator wheel that is connected to the driver housing by actuator spokes such that when the actuator wheel is turned, the driver housing rotates.

28. The rotary valve adapter assembly of claim 24, wherein the magnetic actuator assembly comprises a follower support containing a plurality of inner magnets and fitting into the top enclosure and a driver support containing a plurality of outer magnets that are magnetically coupled with the inner magnets such that when the outer magnets in the driver support rotate, the inner magnets in the follower support also rotate, and wherein the driver housing encloses the driver support.

29. The rotary valve adapter assembly of claim 28, wherein a portion of the top enclosure is situated between the inner and outer magnets.

30. The rotary valve adapter assembly of claim 28, further comprising a first planetary adapter with two ends, one end of which extends into the follower support and the other end of which extends into the sun gear of the planetary gear subassembly.

31. The rotary valve adapter assembly of claim 24, wherein the ring gear of the planetary gear subassembly is held stationary within the bottom enclosure.

32. The rotary valve adapter assembly of claim 24, further comprising a ring seal around the shaft, wherein the ring seal is fully enclosed by the top and bottom enclosures.

33. The rotary valve adapter assembly of claim 23, further comprising a valve-adapter plate seal between the valve body and the adapter plate.

34. The rotary valve adapter assembly of claim 24, wherein the magnetic actuator assembly comprises a motor actuator assembly.

35. The rotary valve adapter assembly of claim 34, wherein the motor actuator assembly comprises a clutch, a motor gear, a motor mounting bracket, a motor ring gear, and a motor, wherein the motor turns the motor gear, which engages with the motor ring gear, causing it to rotate.

36. The rotary valve adapter assembly of claim 35, wherein the motor ring gear is attached to a driver housing containing outer magnets such that when the motor ring gear rotates, it also causes the driver housing to rotate.

37. The rotary valve adapter assembly of claim 23, wherein the magnetic actuator assembly comprises a plurality of radial driver magnets held by a radial driver magnet support and a plurality of radial follower magnets held by a radial follower magnet support.

38. The rotary valve adapter assembly of claim 37, wherein the radial driver magnets in the radial driver magnet support and the radial follower magnets in the radial follower magnet support are arranged linearly within a top enclosure with a portion of the top enclosure between them, and wherein the radial driver magnets are magnetically coupled to the radial follower magnets.

39. The rotary valve adapter assembly of claim 38, wherein the radial driver magnet support is inserted into a top part of the top enclosure, and the radial follower magnet support is inserted into a bottom part of the top enclosure.

40. The rotary valve adapter assembly of claim 38, further comprising a radial driver magnet cap that is situated on top of the top enclosure, wherein a wheel actuator is attached to the radial driver magnet cap by actuator spokes such that when the wheel actuator is turned, it causes the radial driver magnets and the radial follower magnets to rotate.

41. The rotary valve adapter assembly of claim 37, further comprising a planetary adapter with two ends, one end of which extends into the radial follower magnet support and the other end of which extends into the sun gear of the planetary gear subassembly.

42. The rotary valve adapter assembly of claim 37, wherein the magnetic actuator assembly comprises a motor actuator assembly.

43. The rotary valve adapter assembly of claim 42, wherein the motor actuator assembly comprises a motor, a clutch, and a motor coupler, wherein the motor causes the motor coupler to rotate, wherein the motor coupler is attached to a radial driver magnet cap such that when the motor coupler rotates, it causes the radial driver magnet cap to rotate at the same rate as the motor, wherein the radial driver magnet cap is attached to a top enclosure, and wherein the top enclosure contains the radial driver magnets and radial follower magnets.

1/30

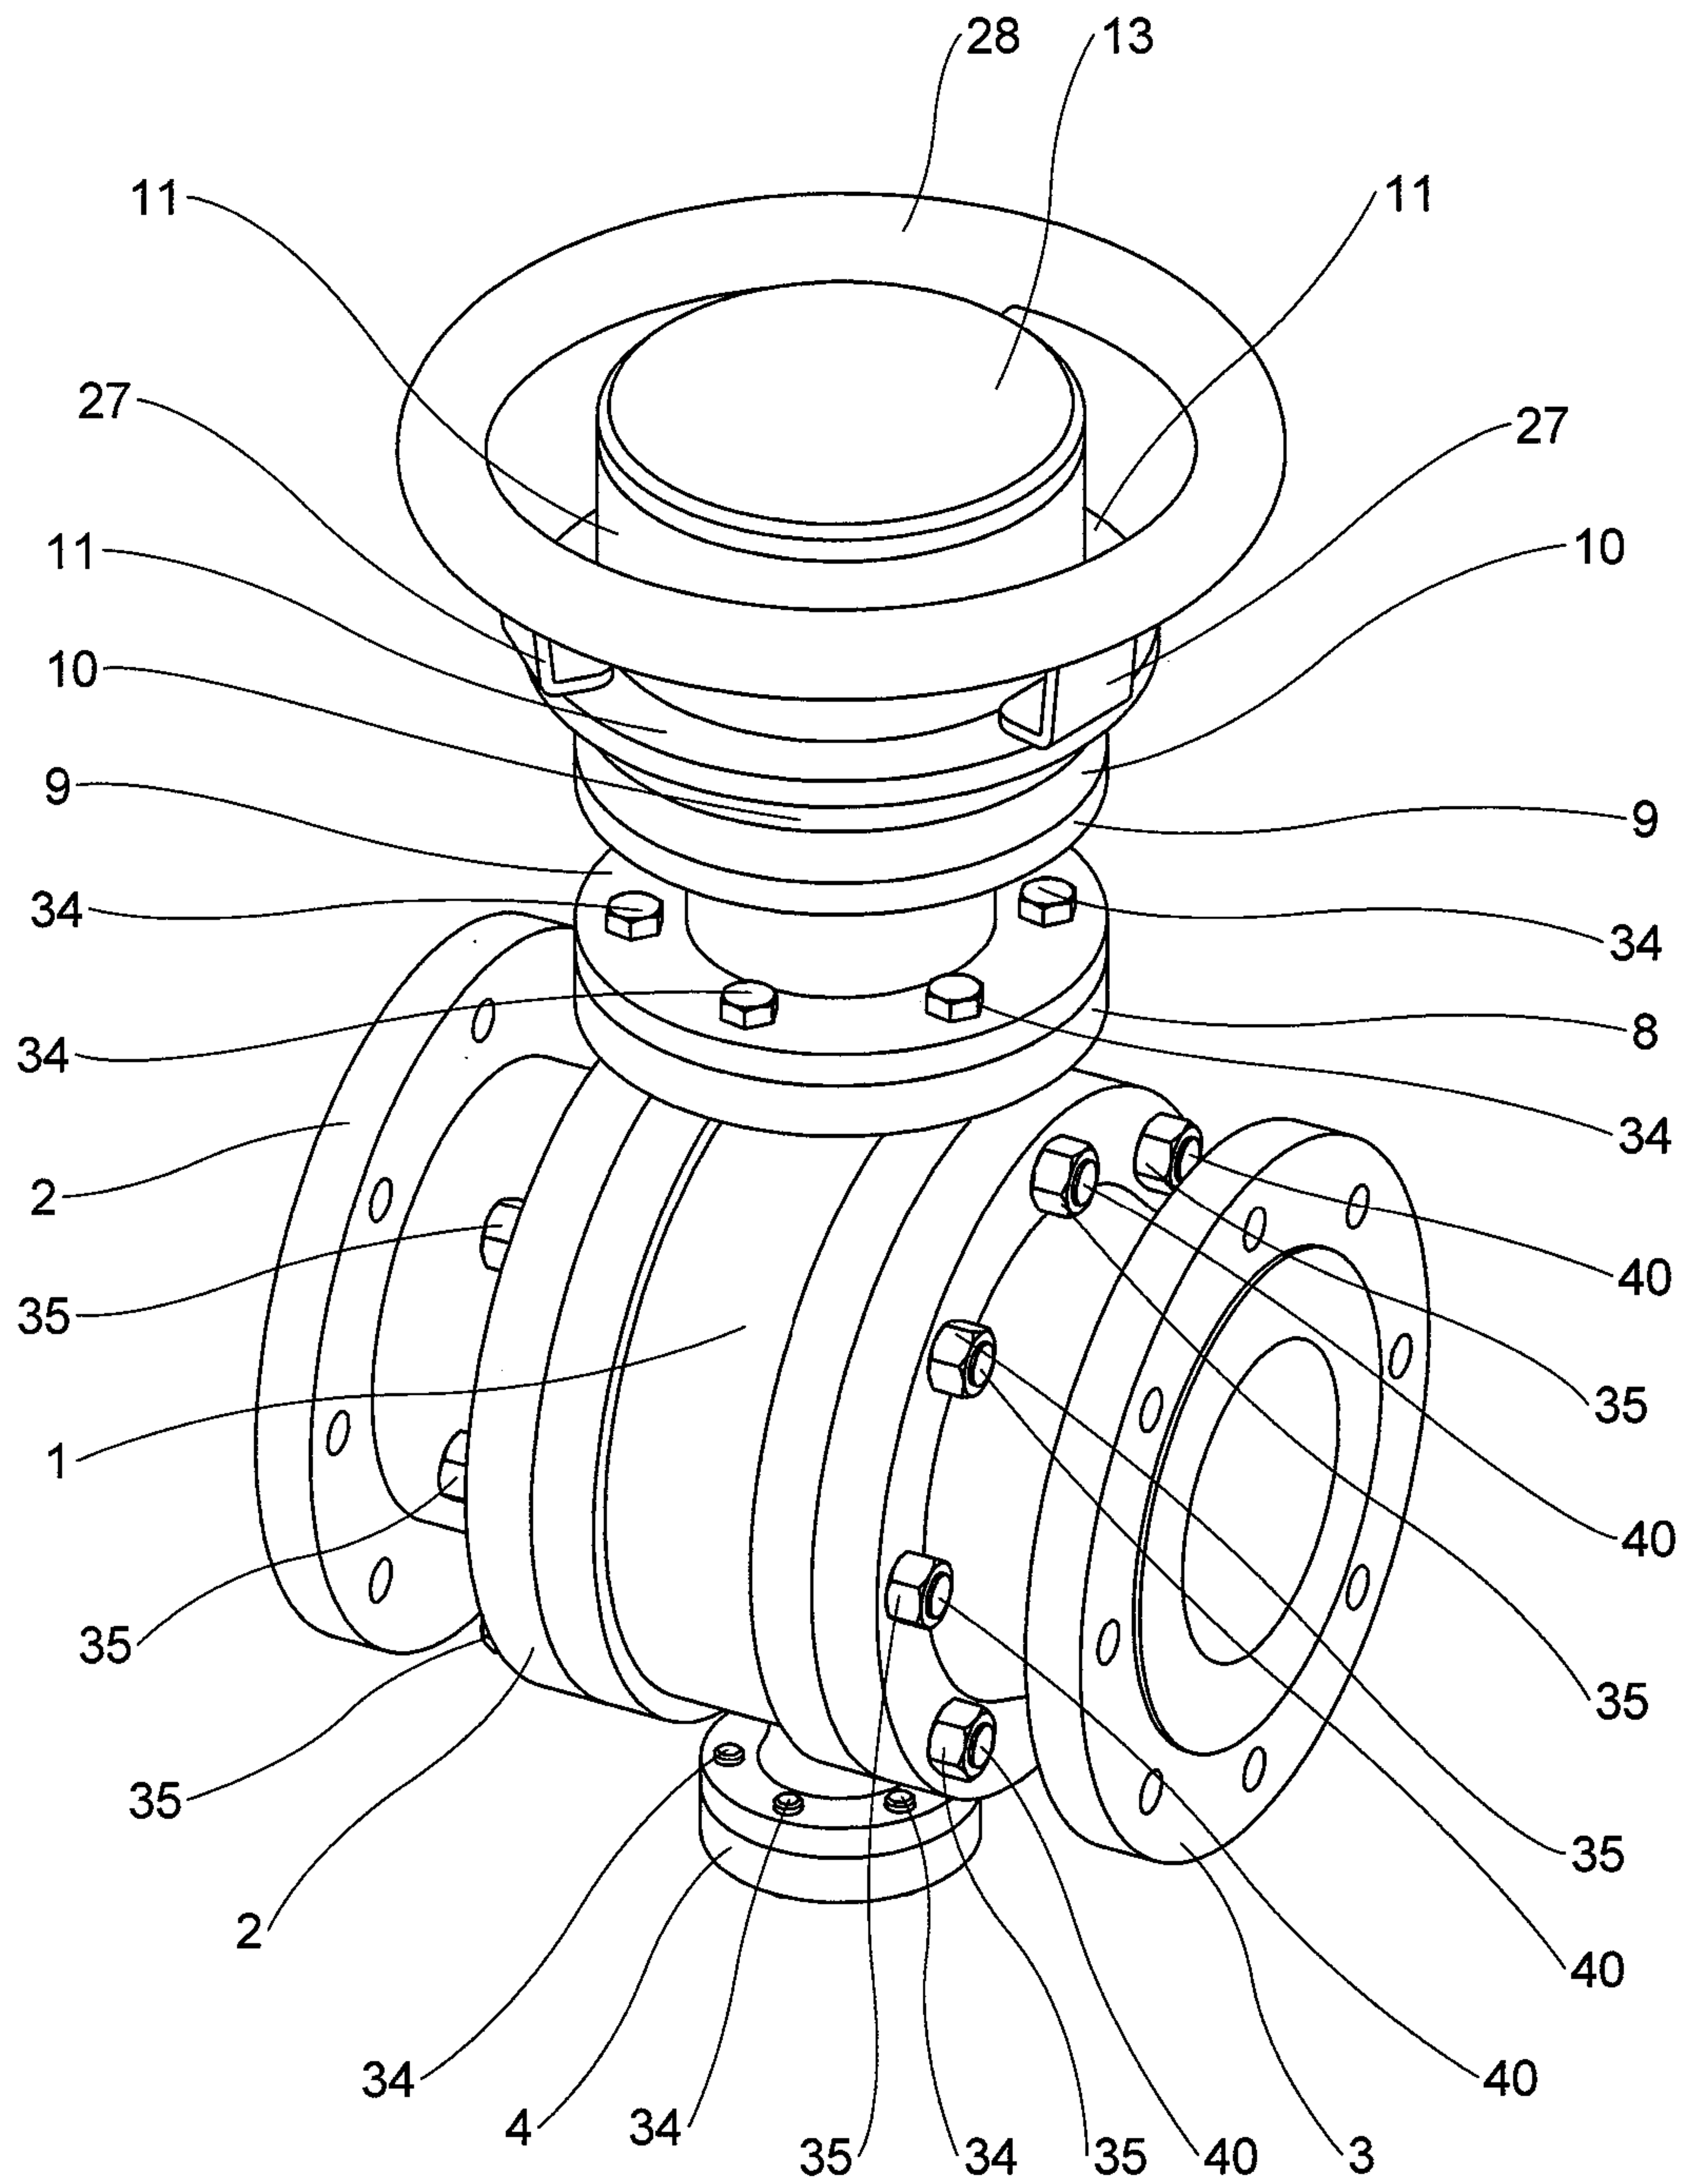


FIG. 1

2/30

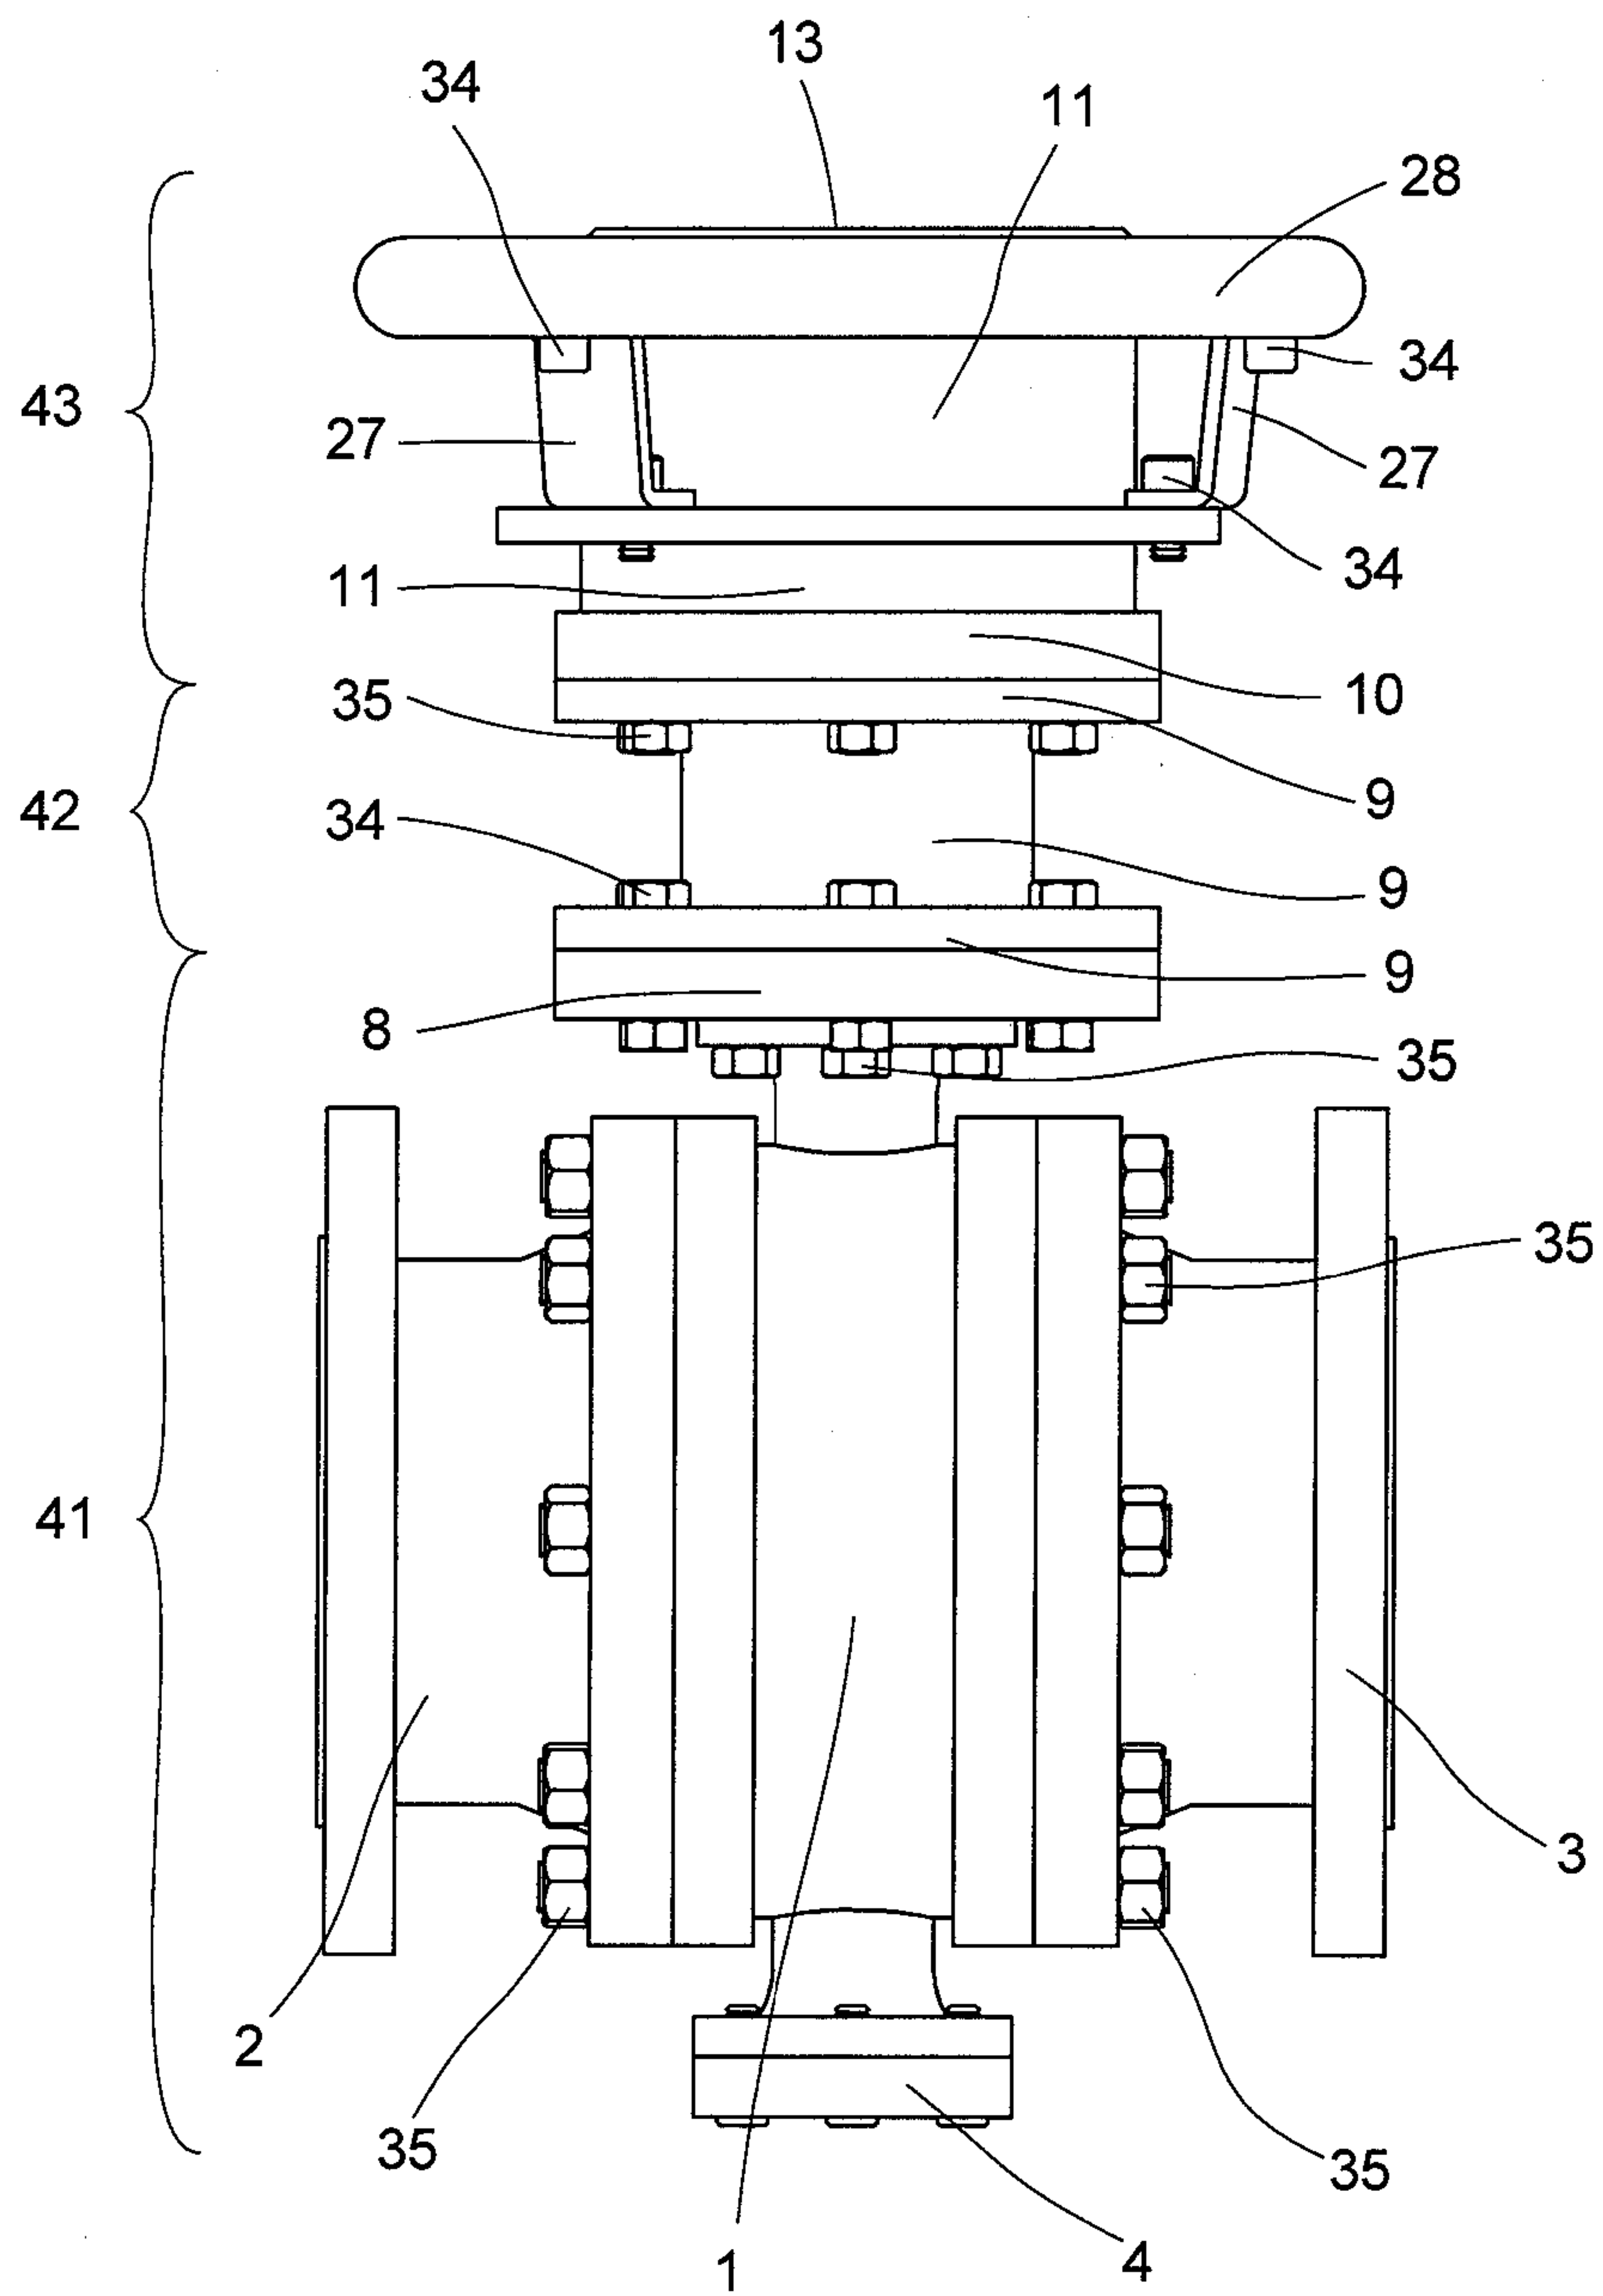


FIG. 2

3/30

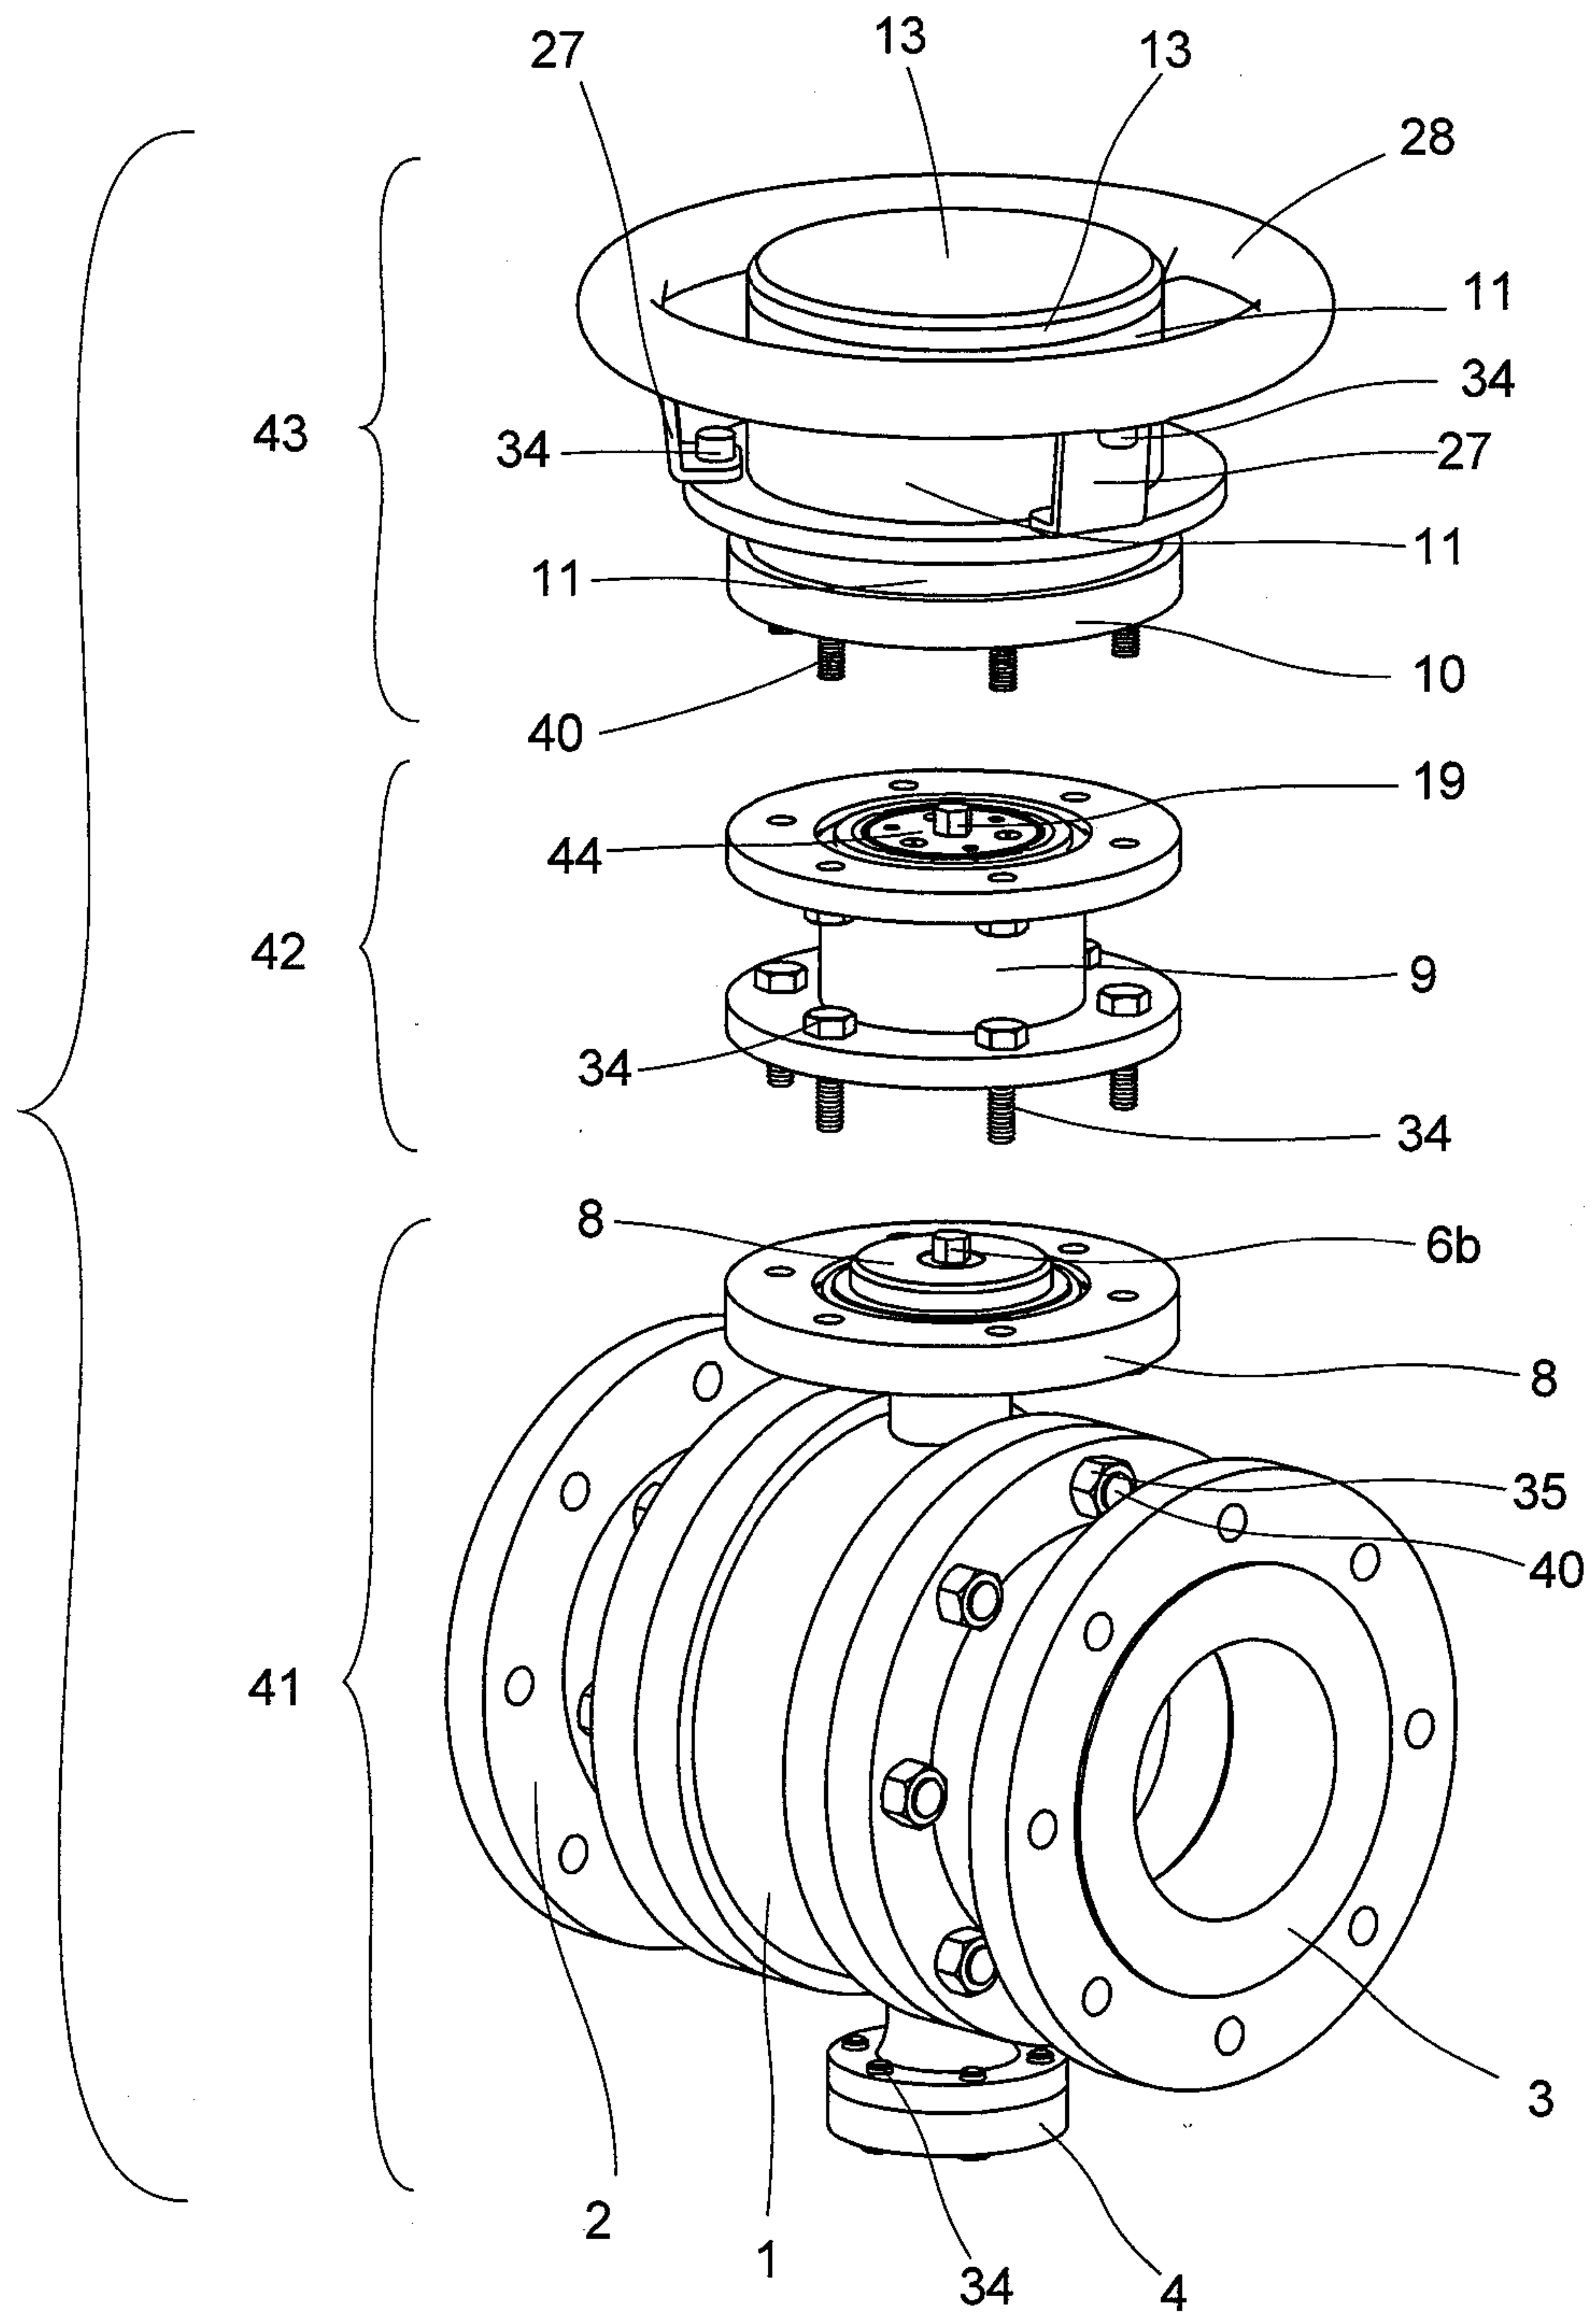


FIG. 3

4/30

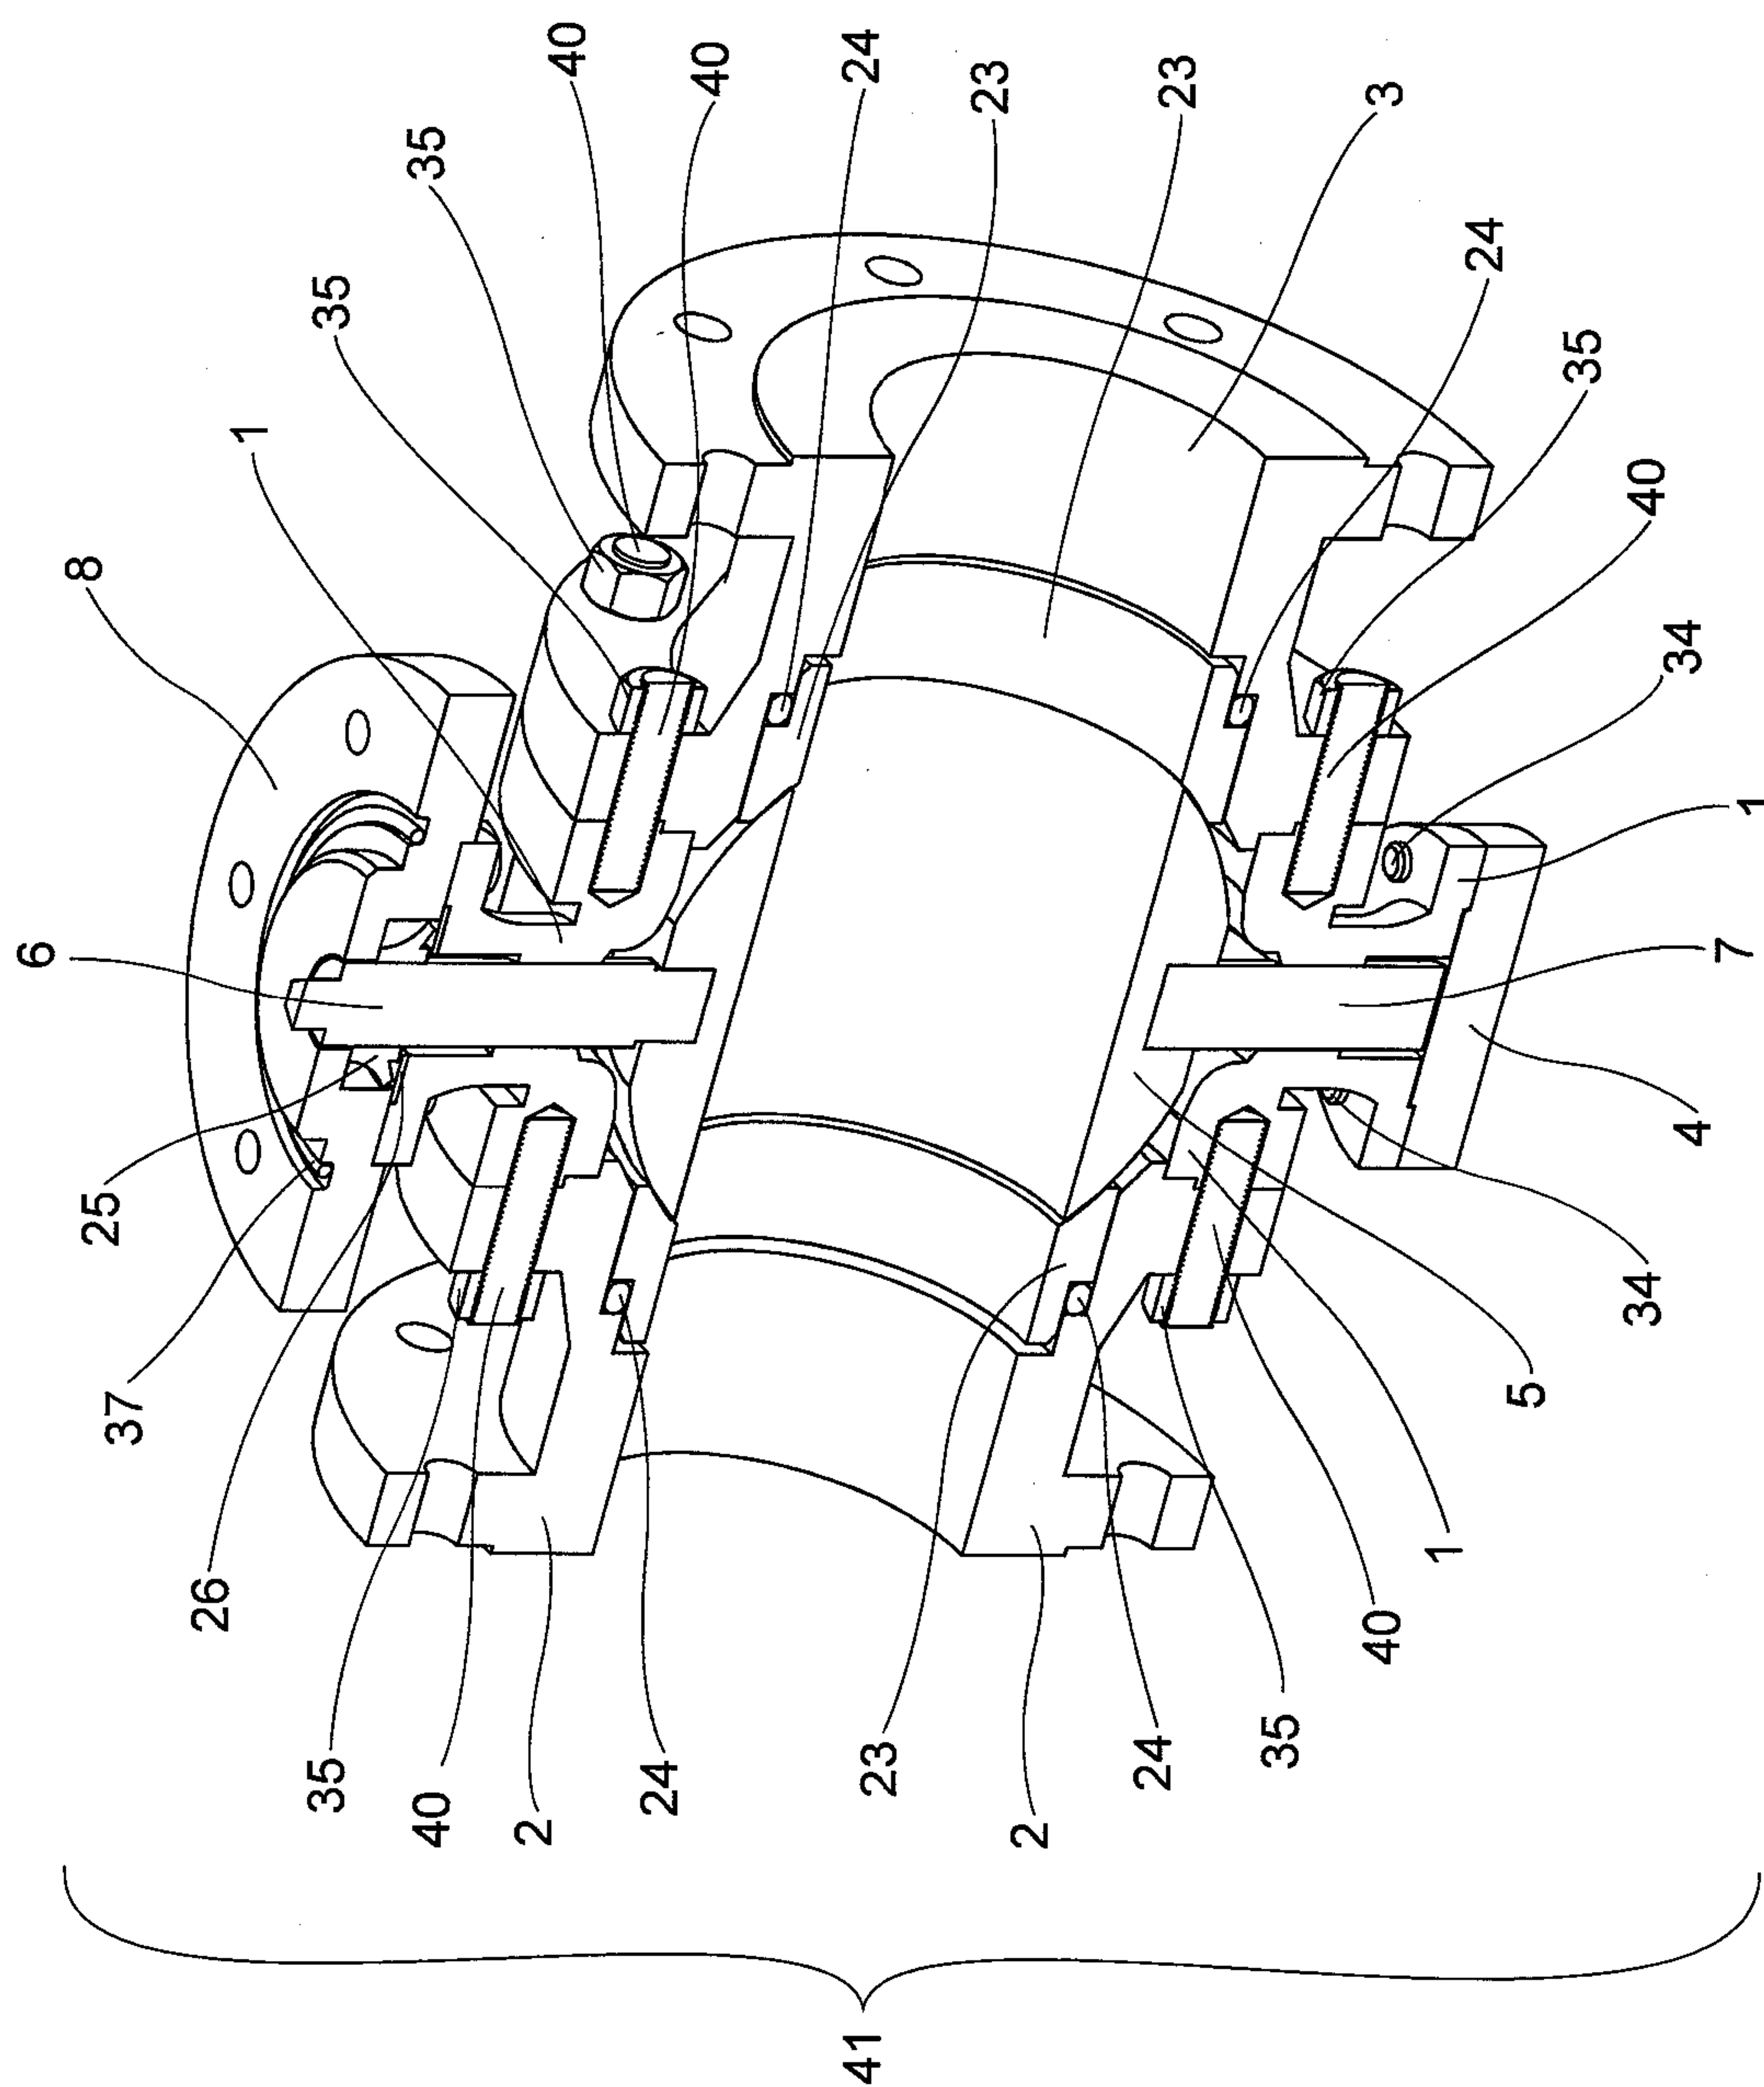
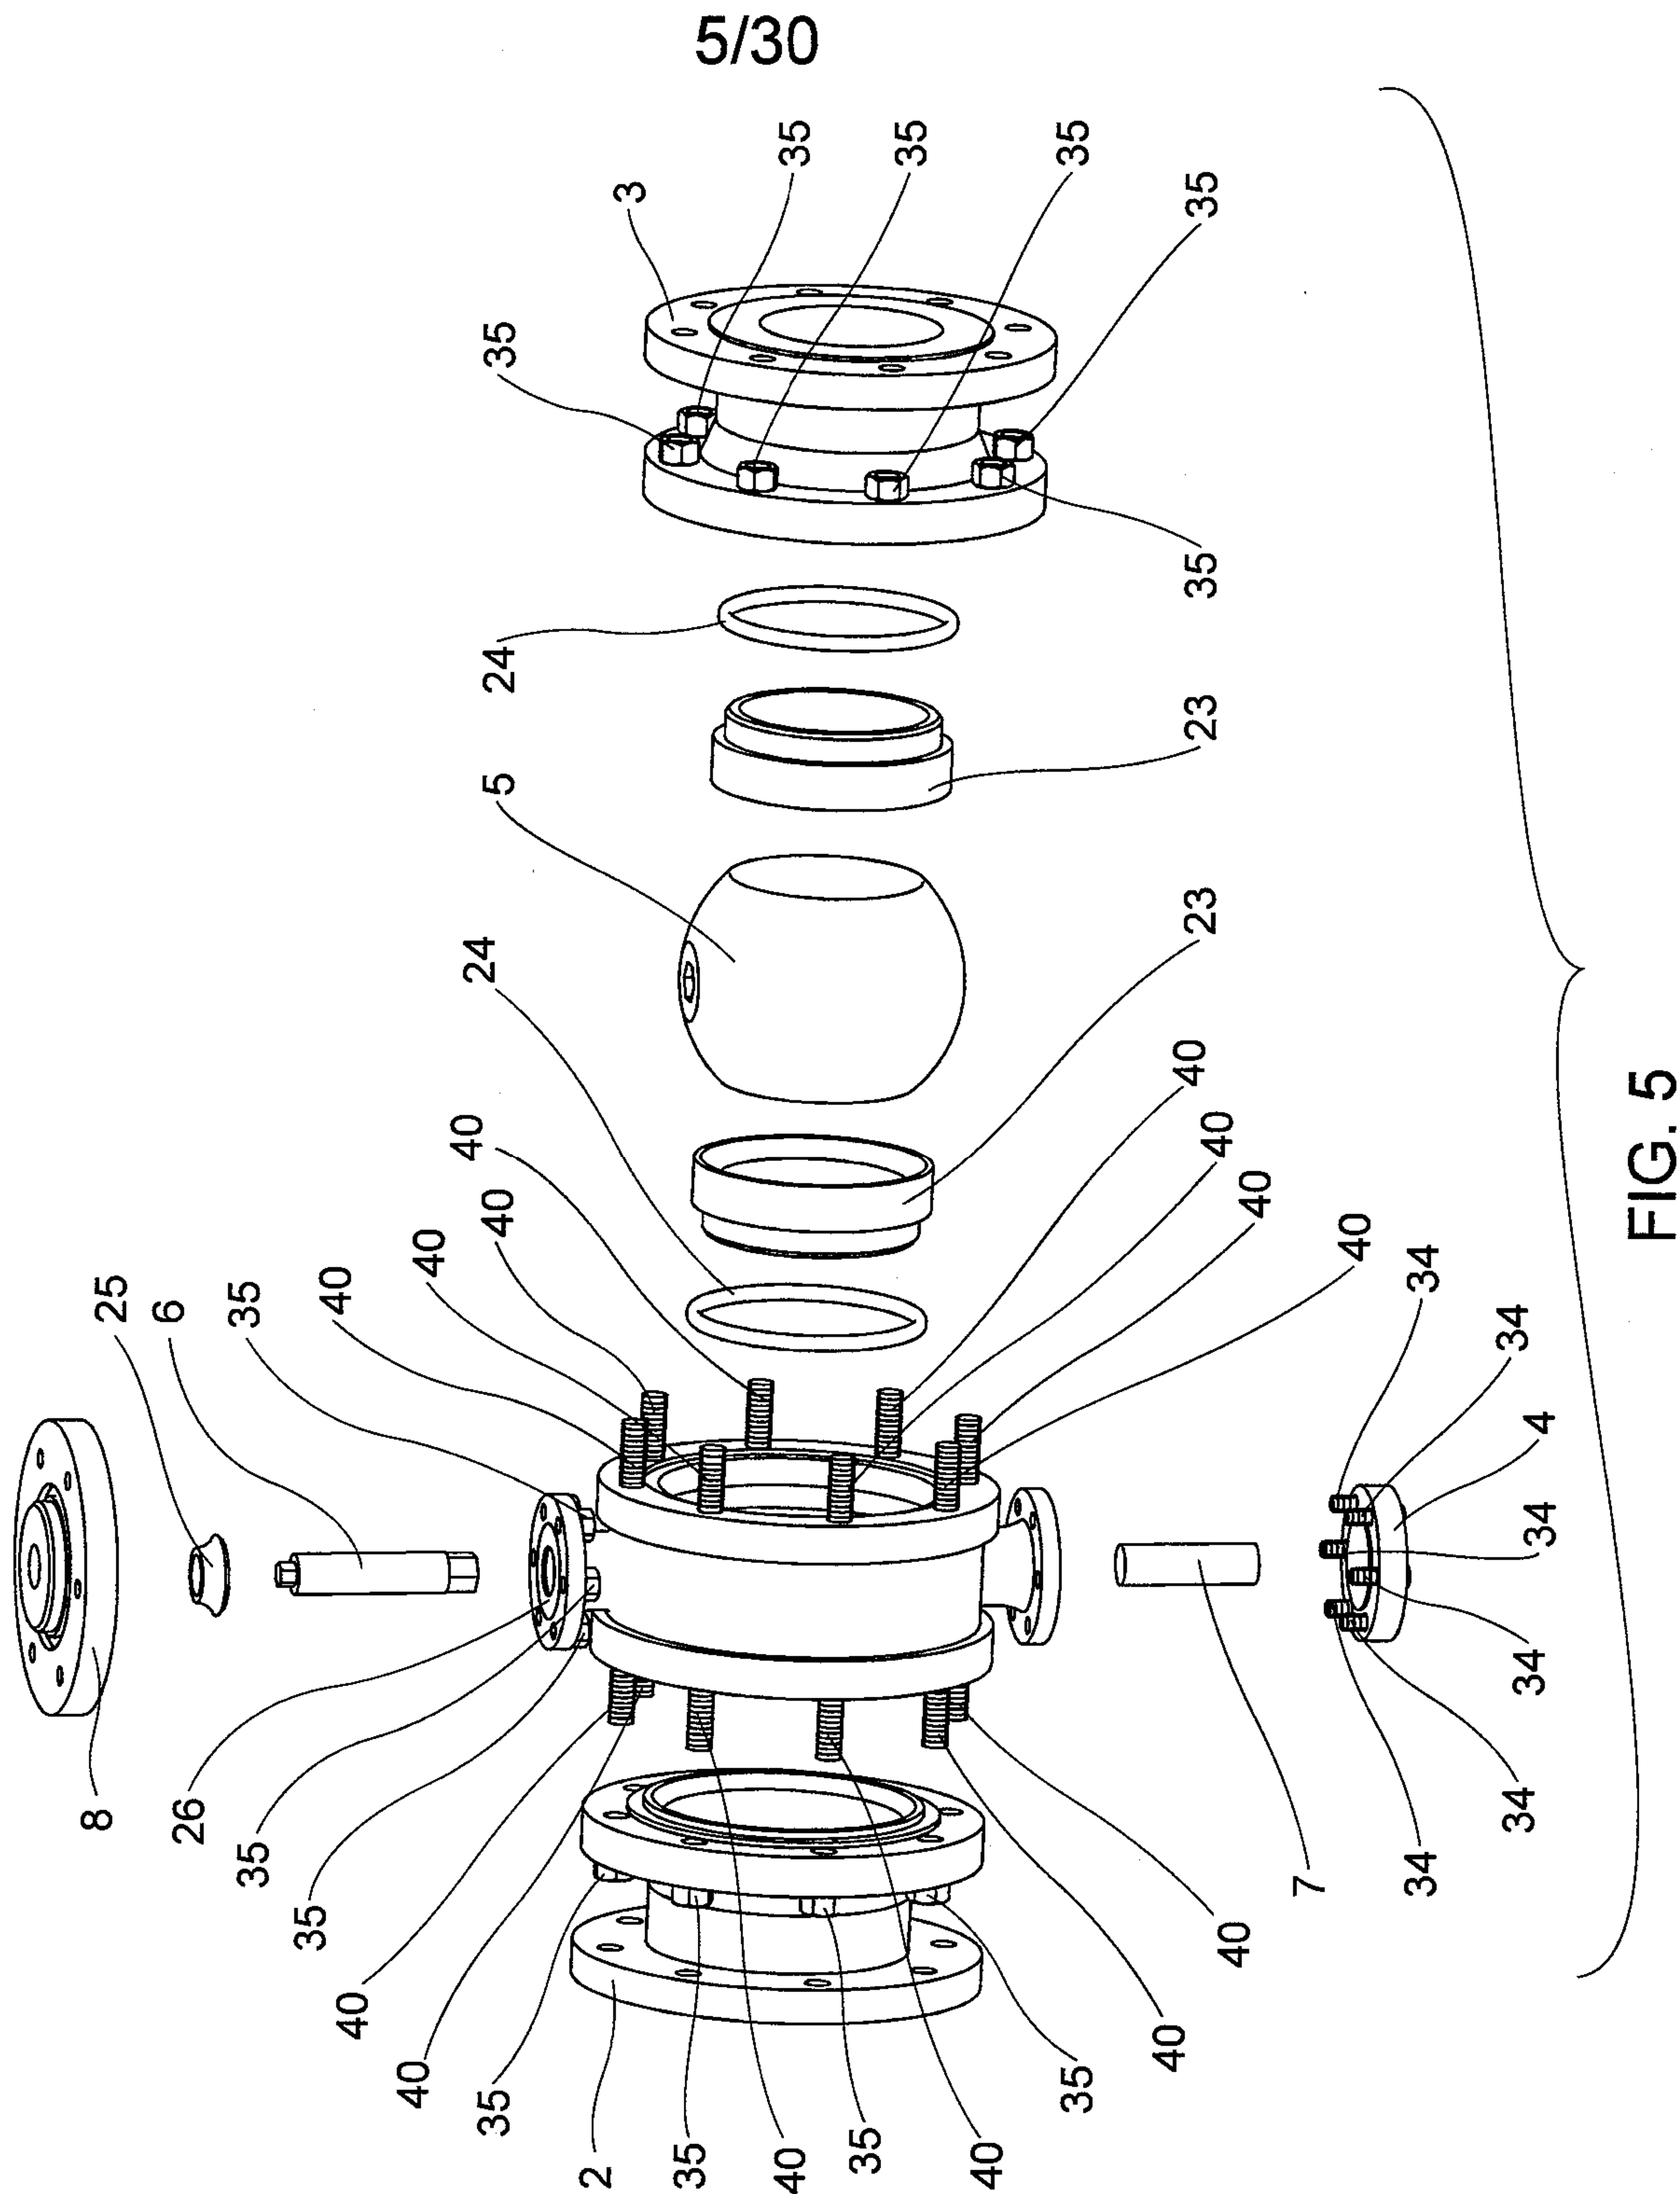


FIG. 4



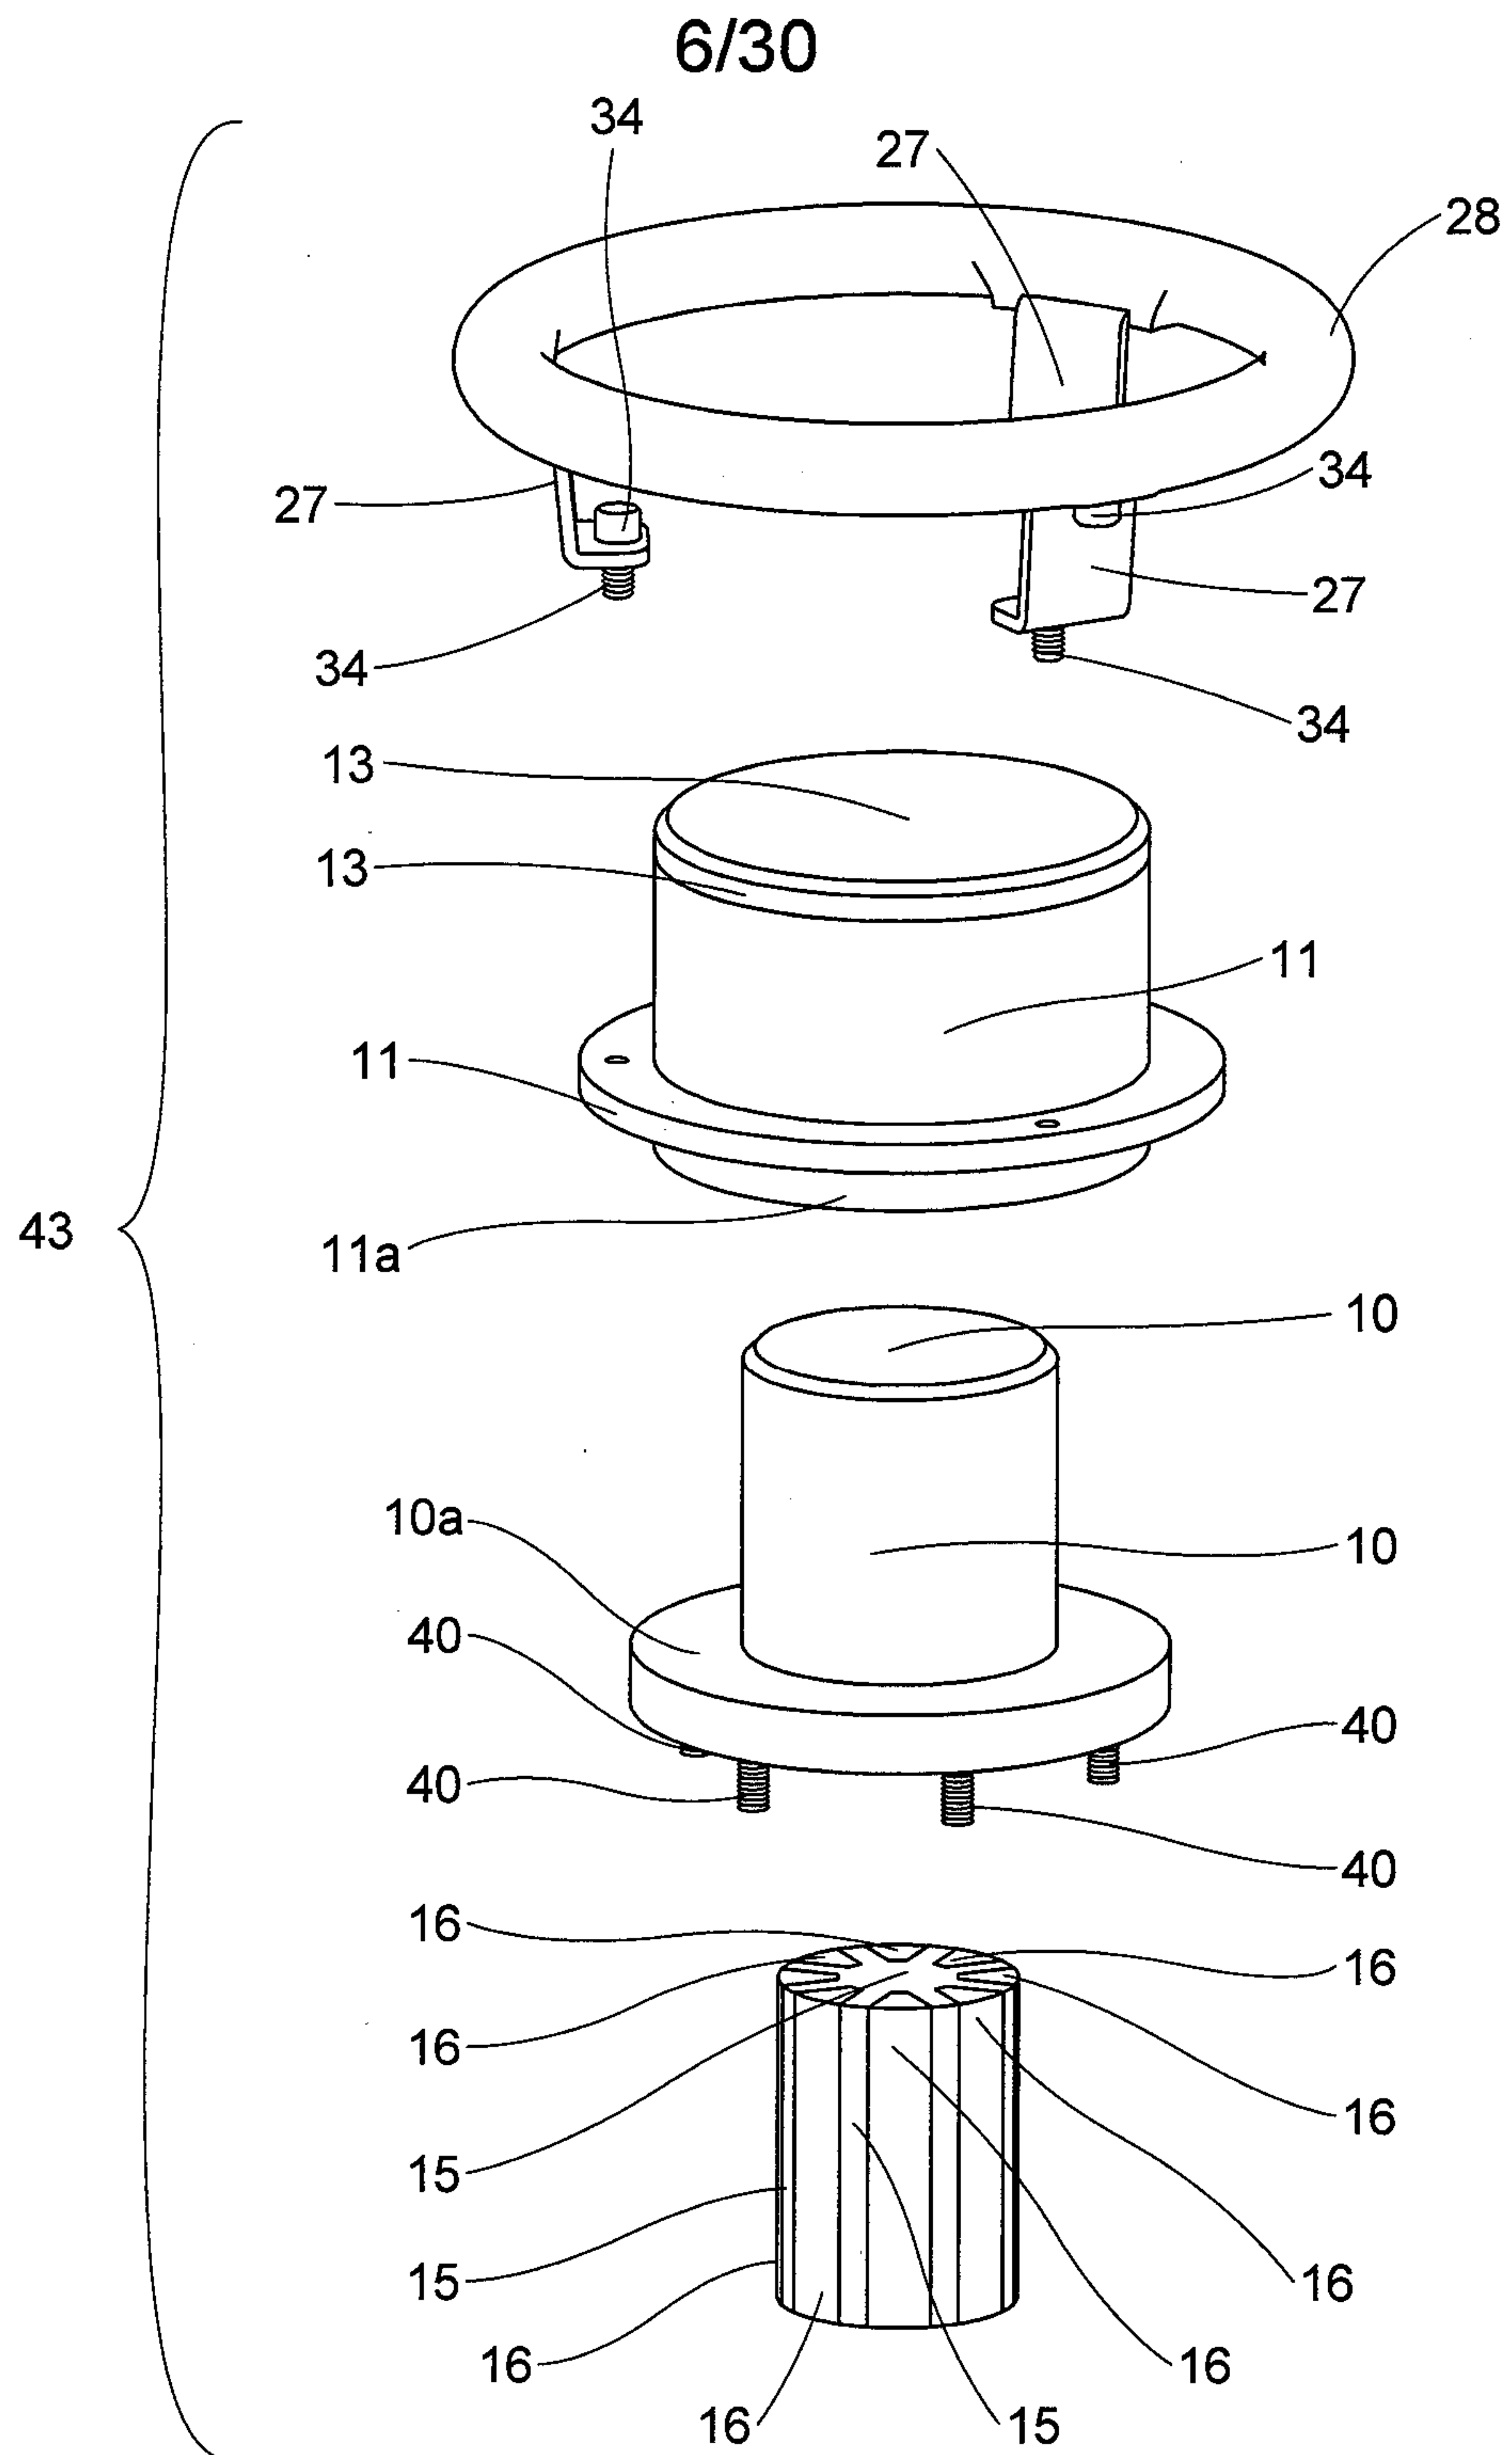


FIG. 6

7/30

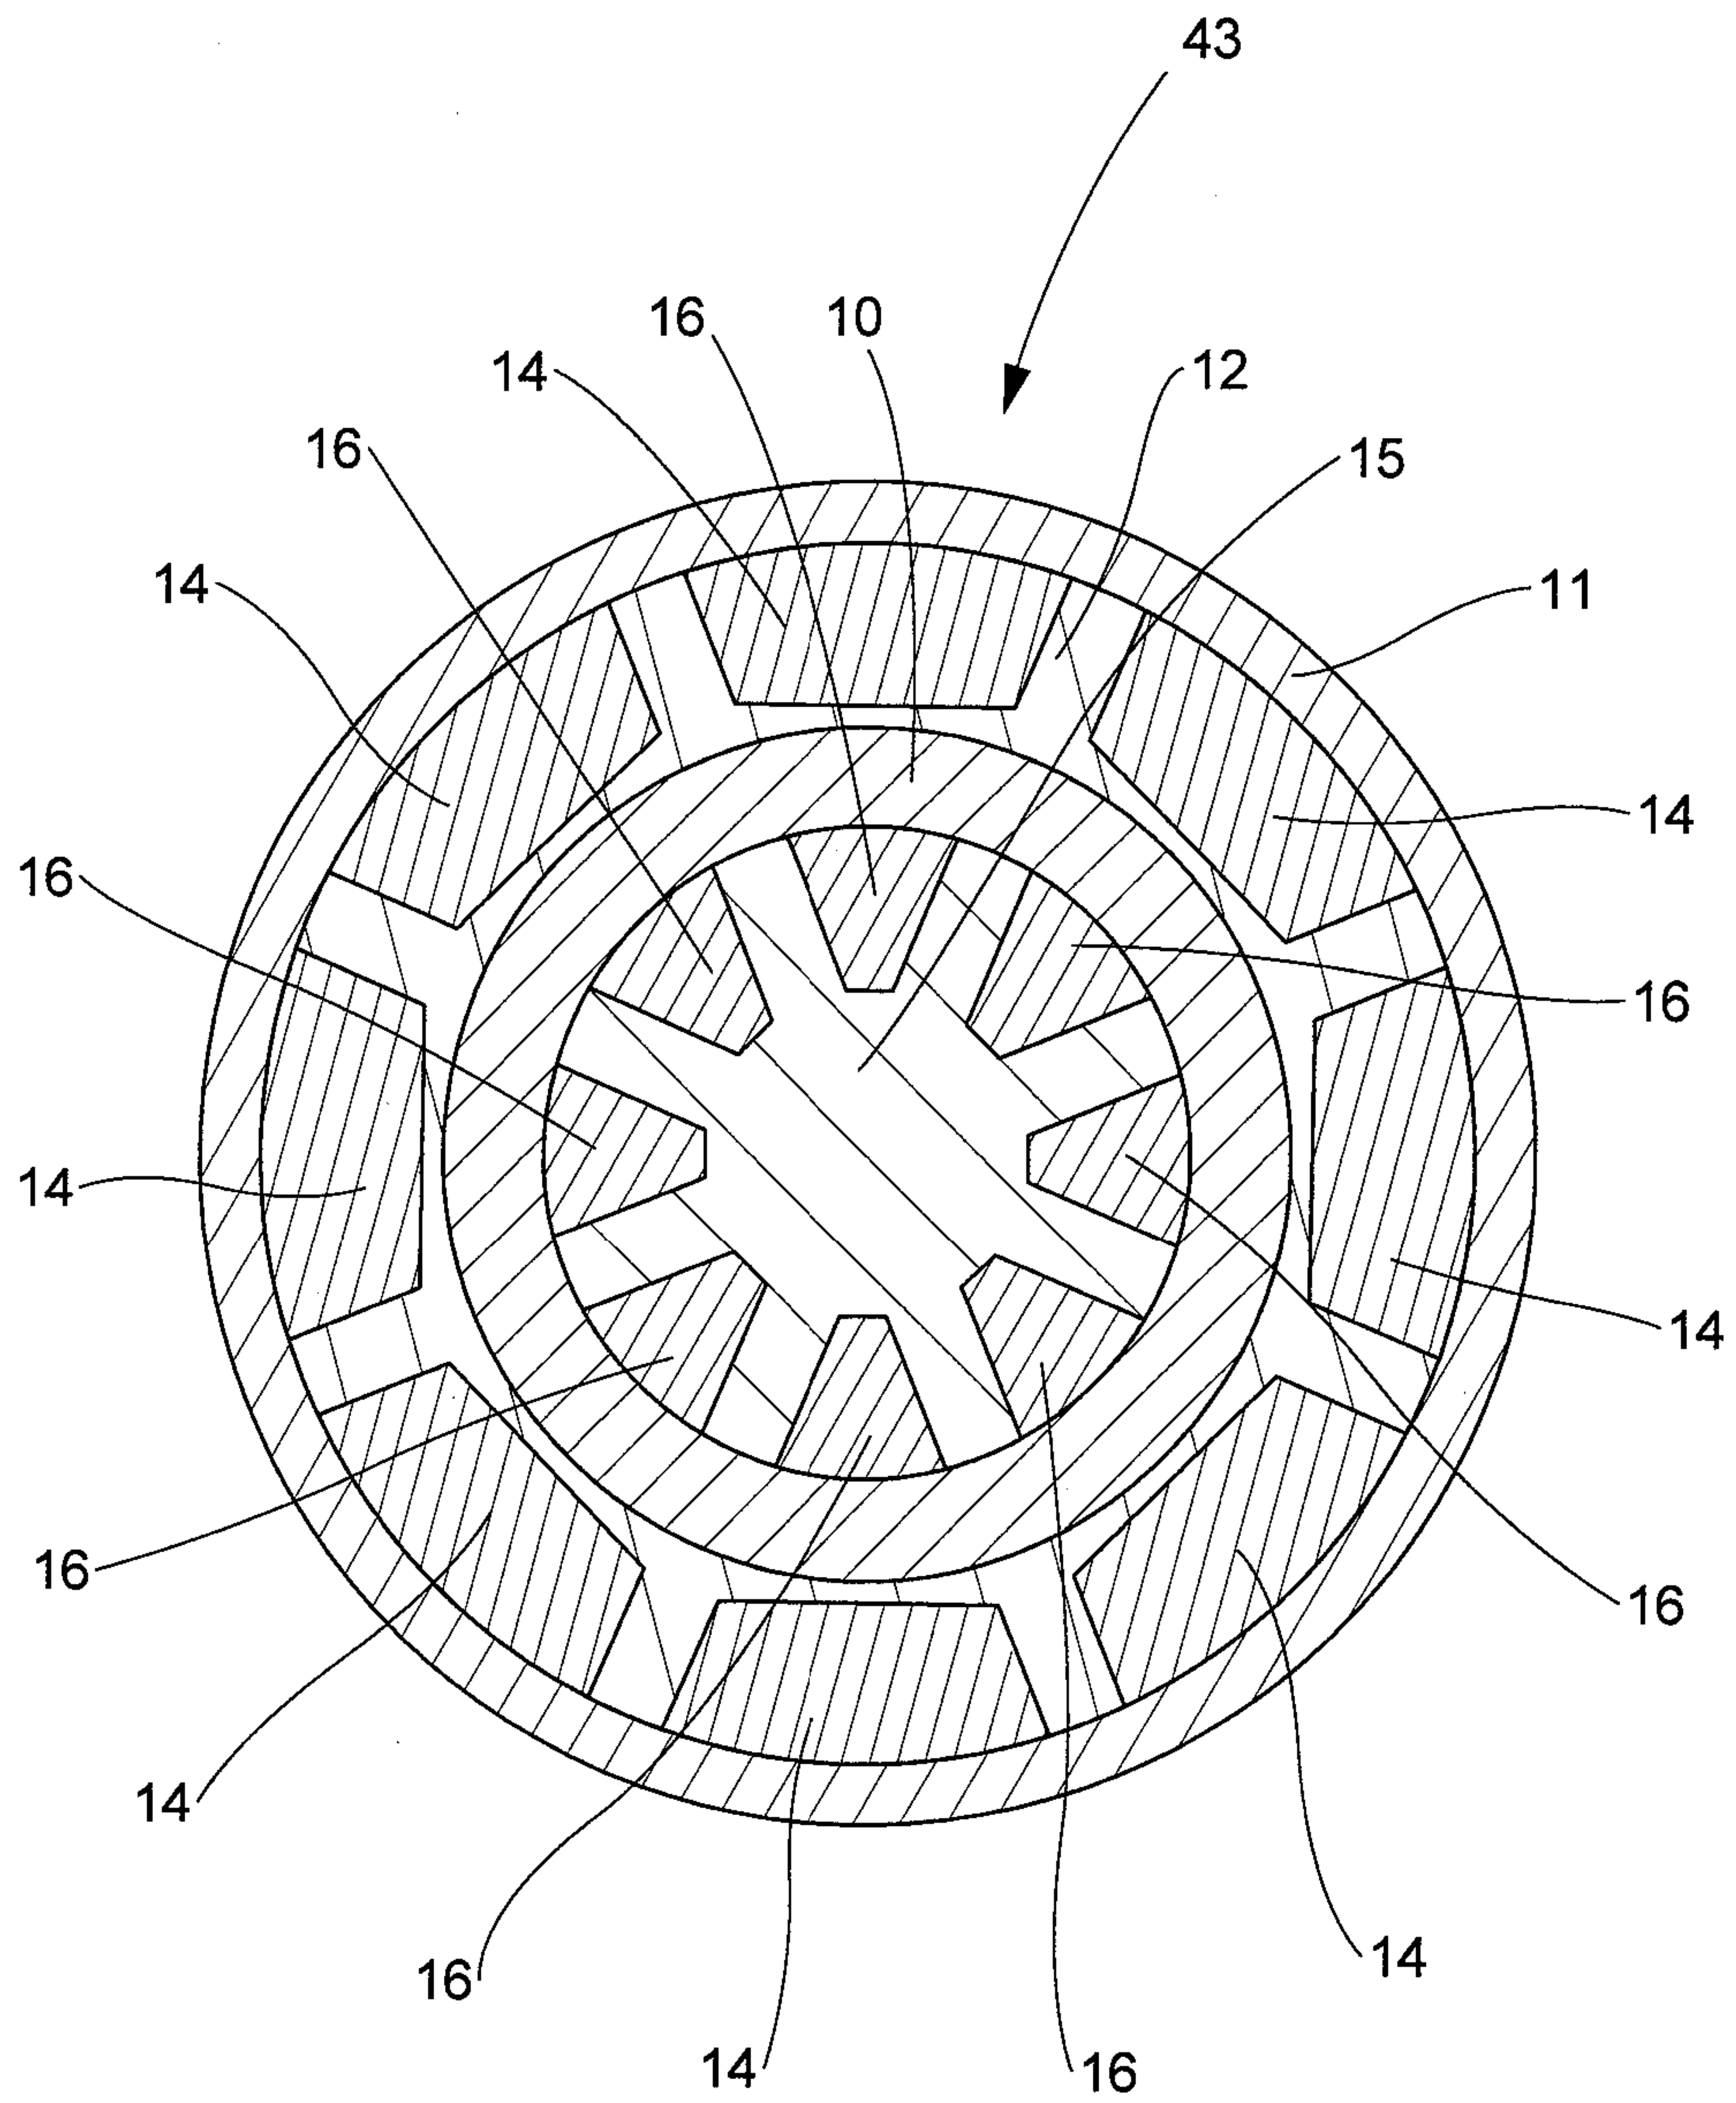


FIG. 7

8/30

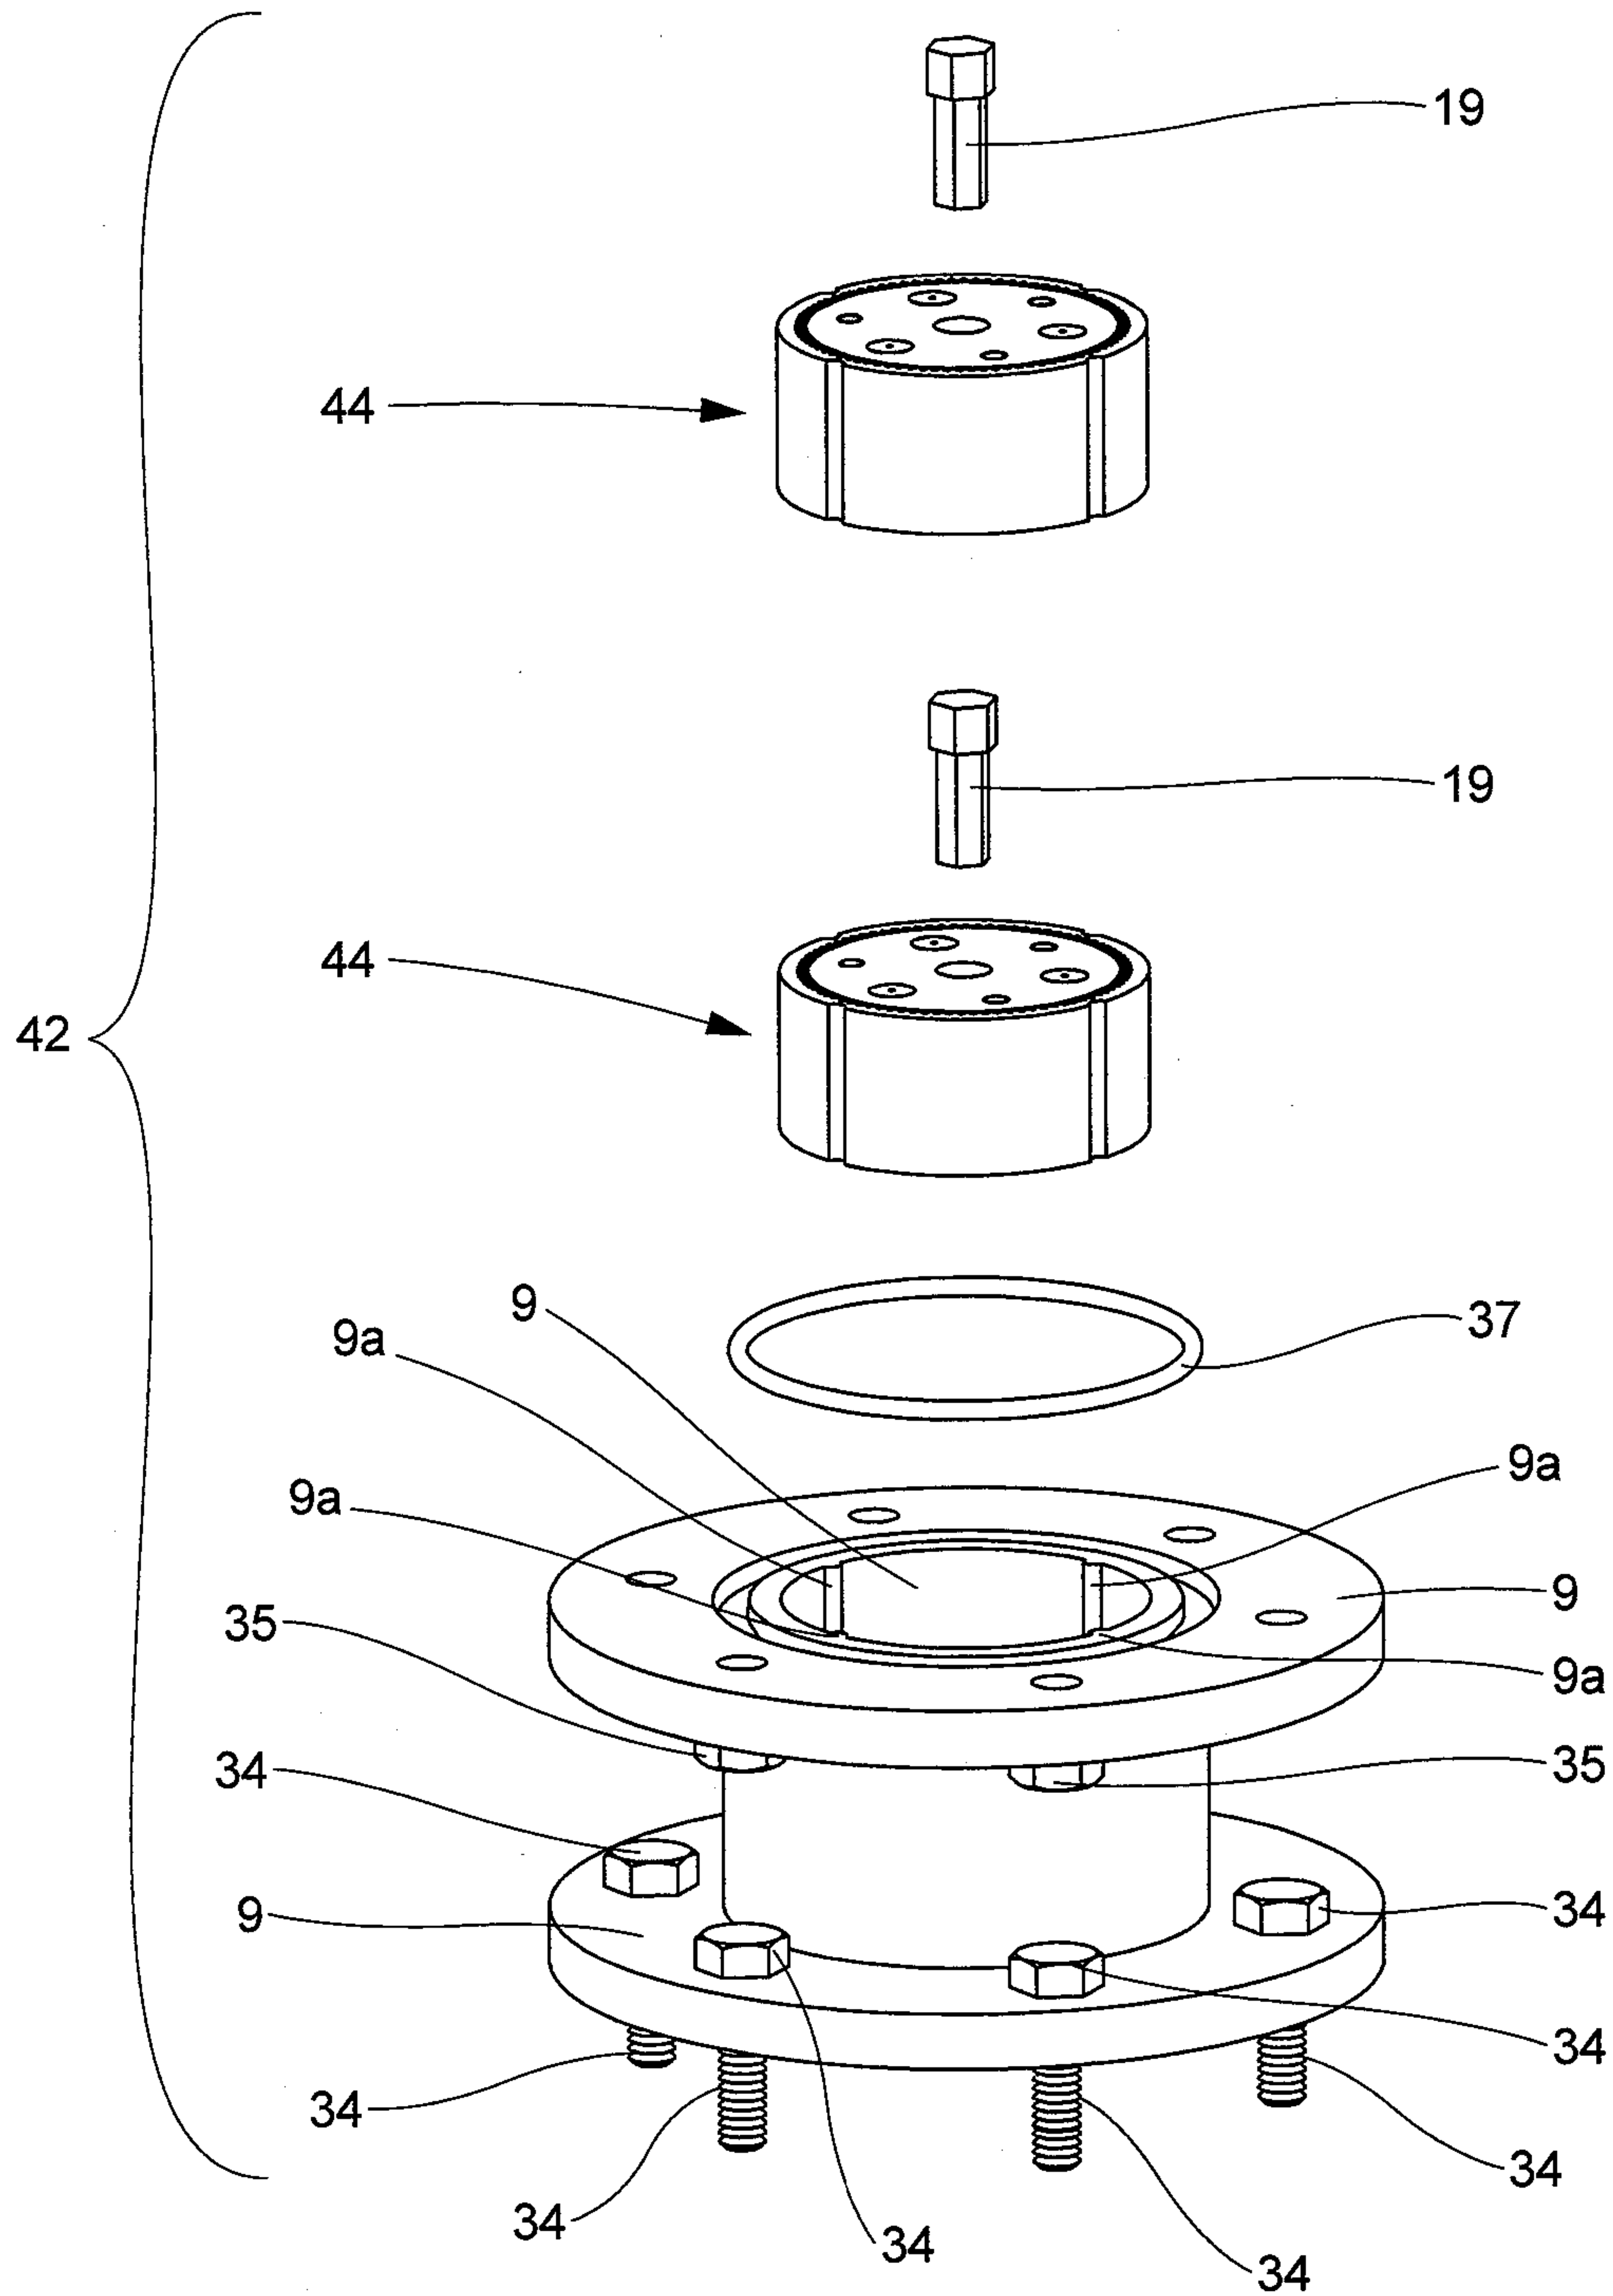


FIG. 8

9/30

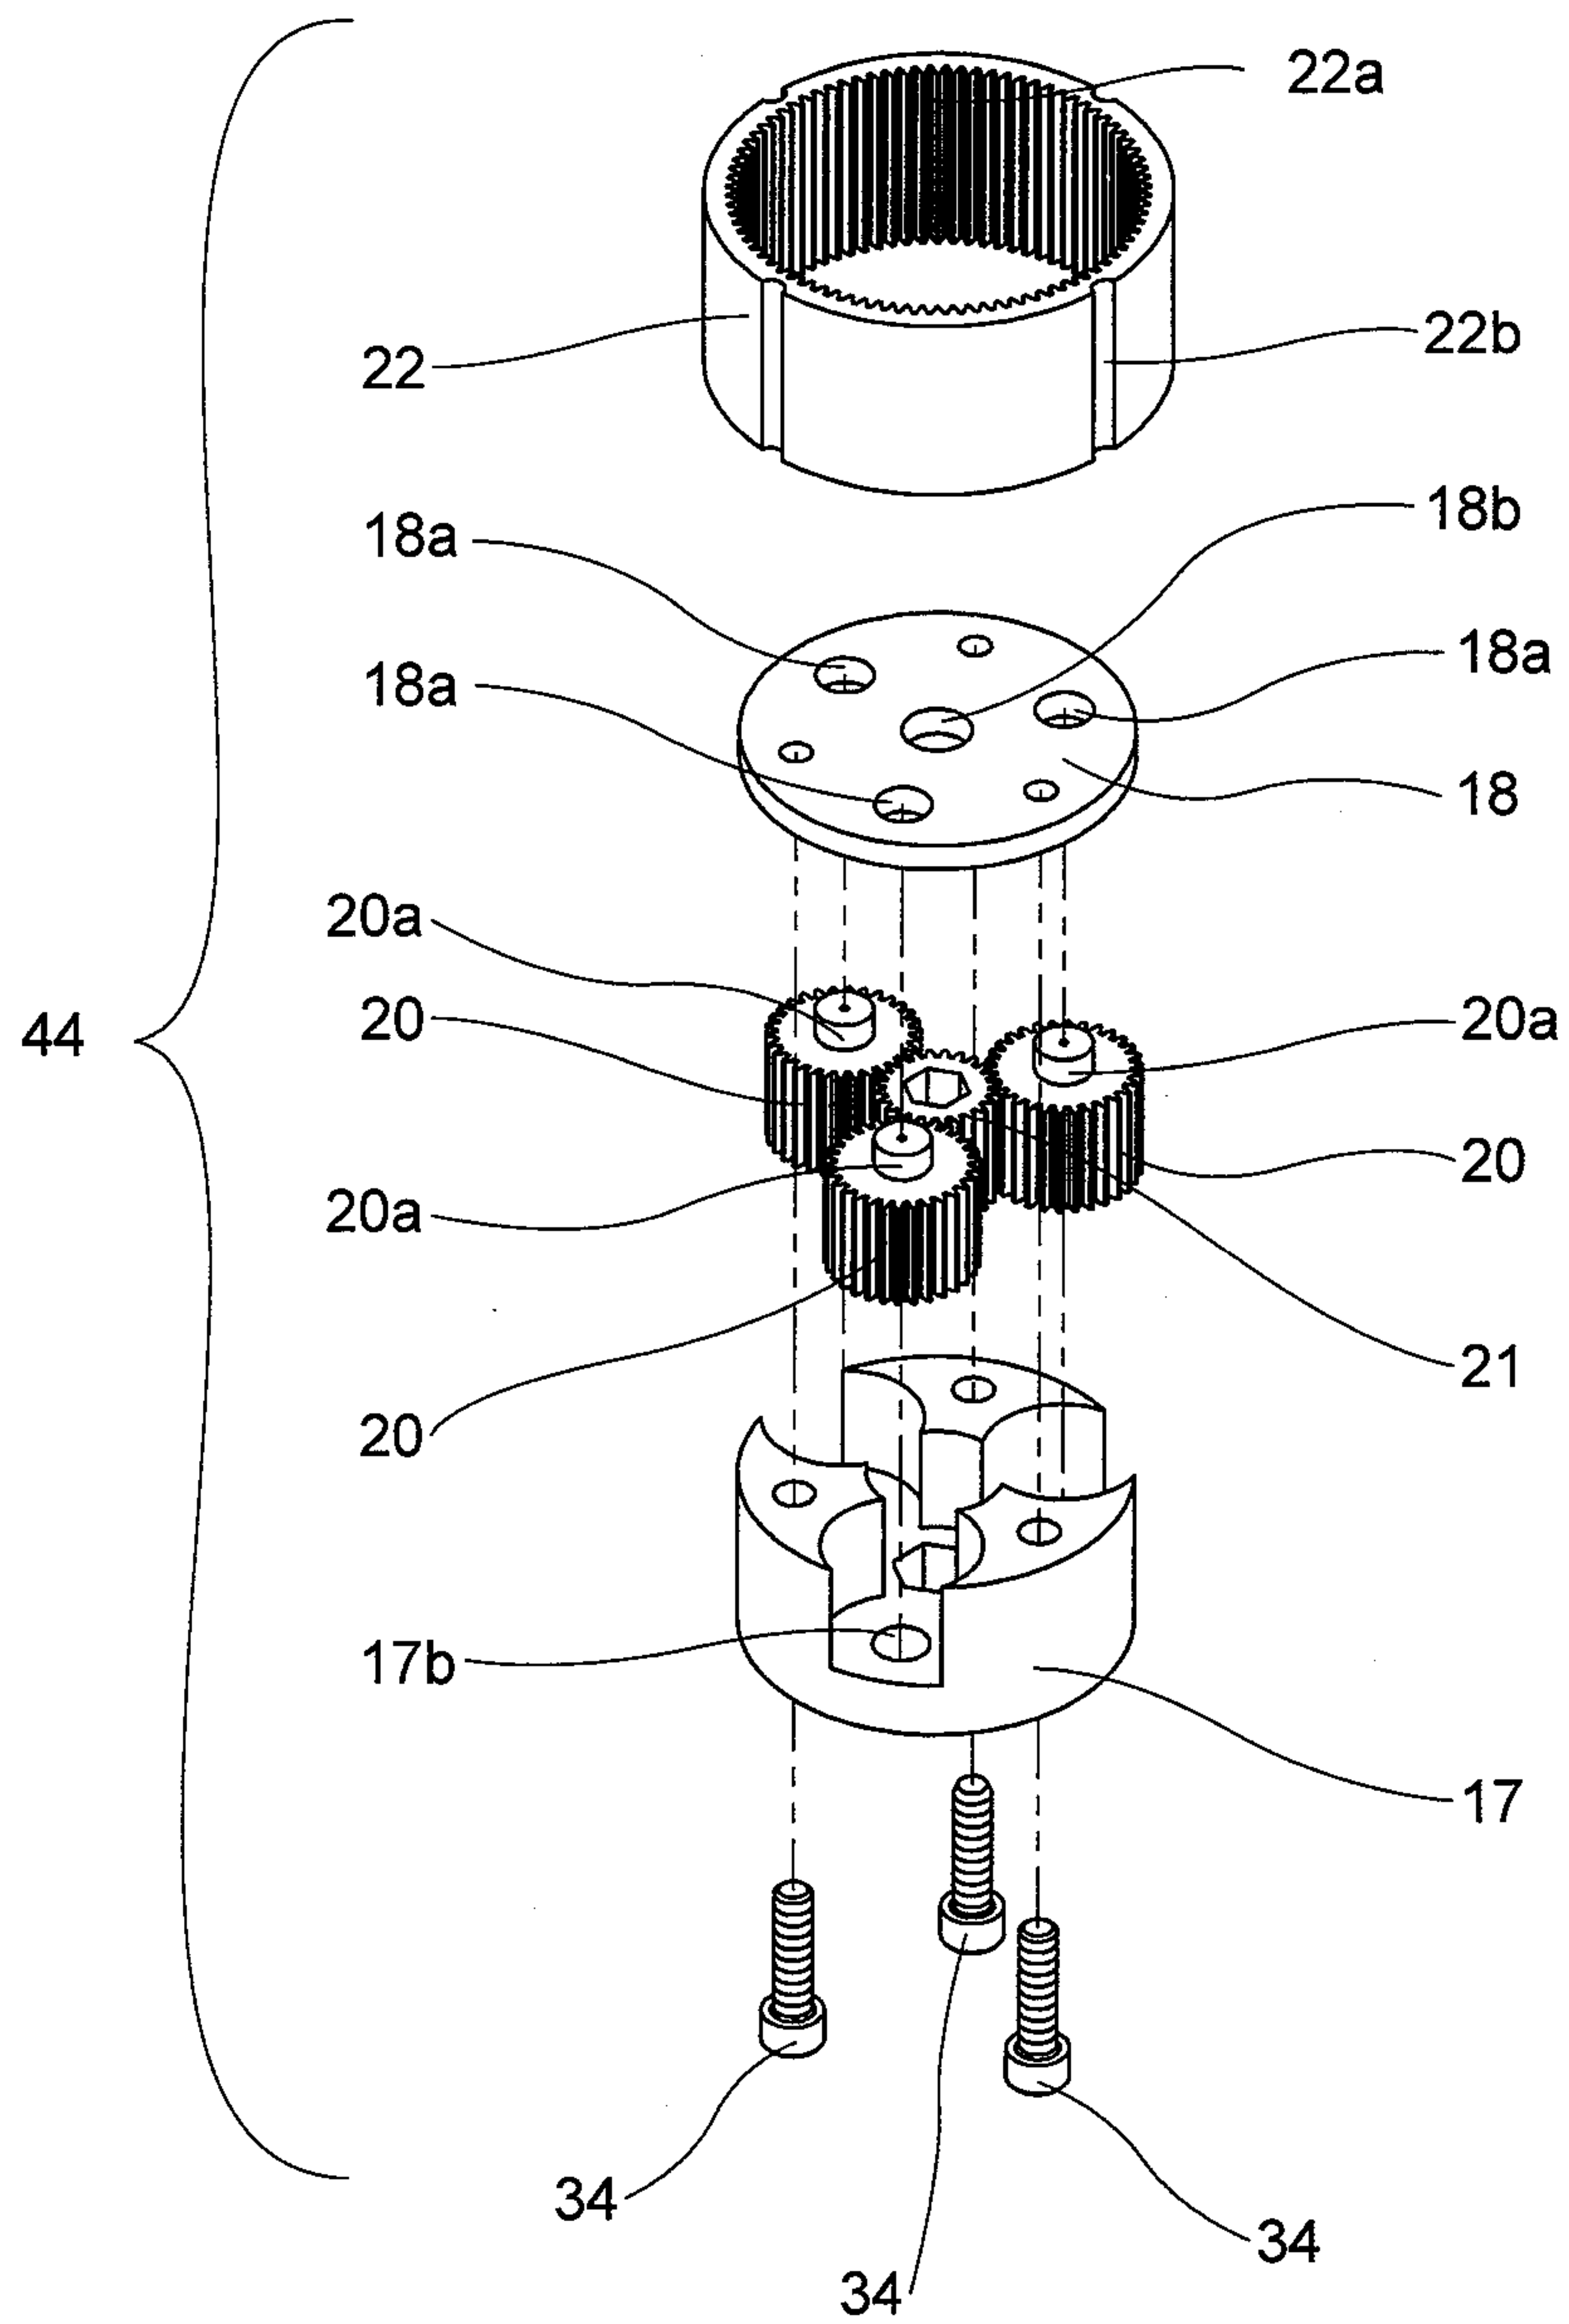


FIG. 9

10/30

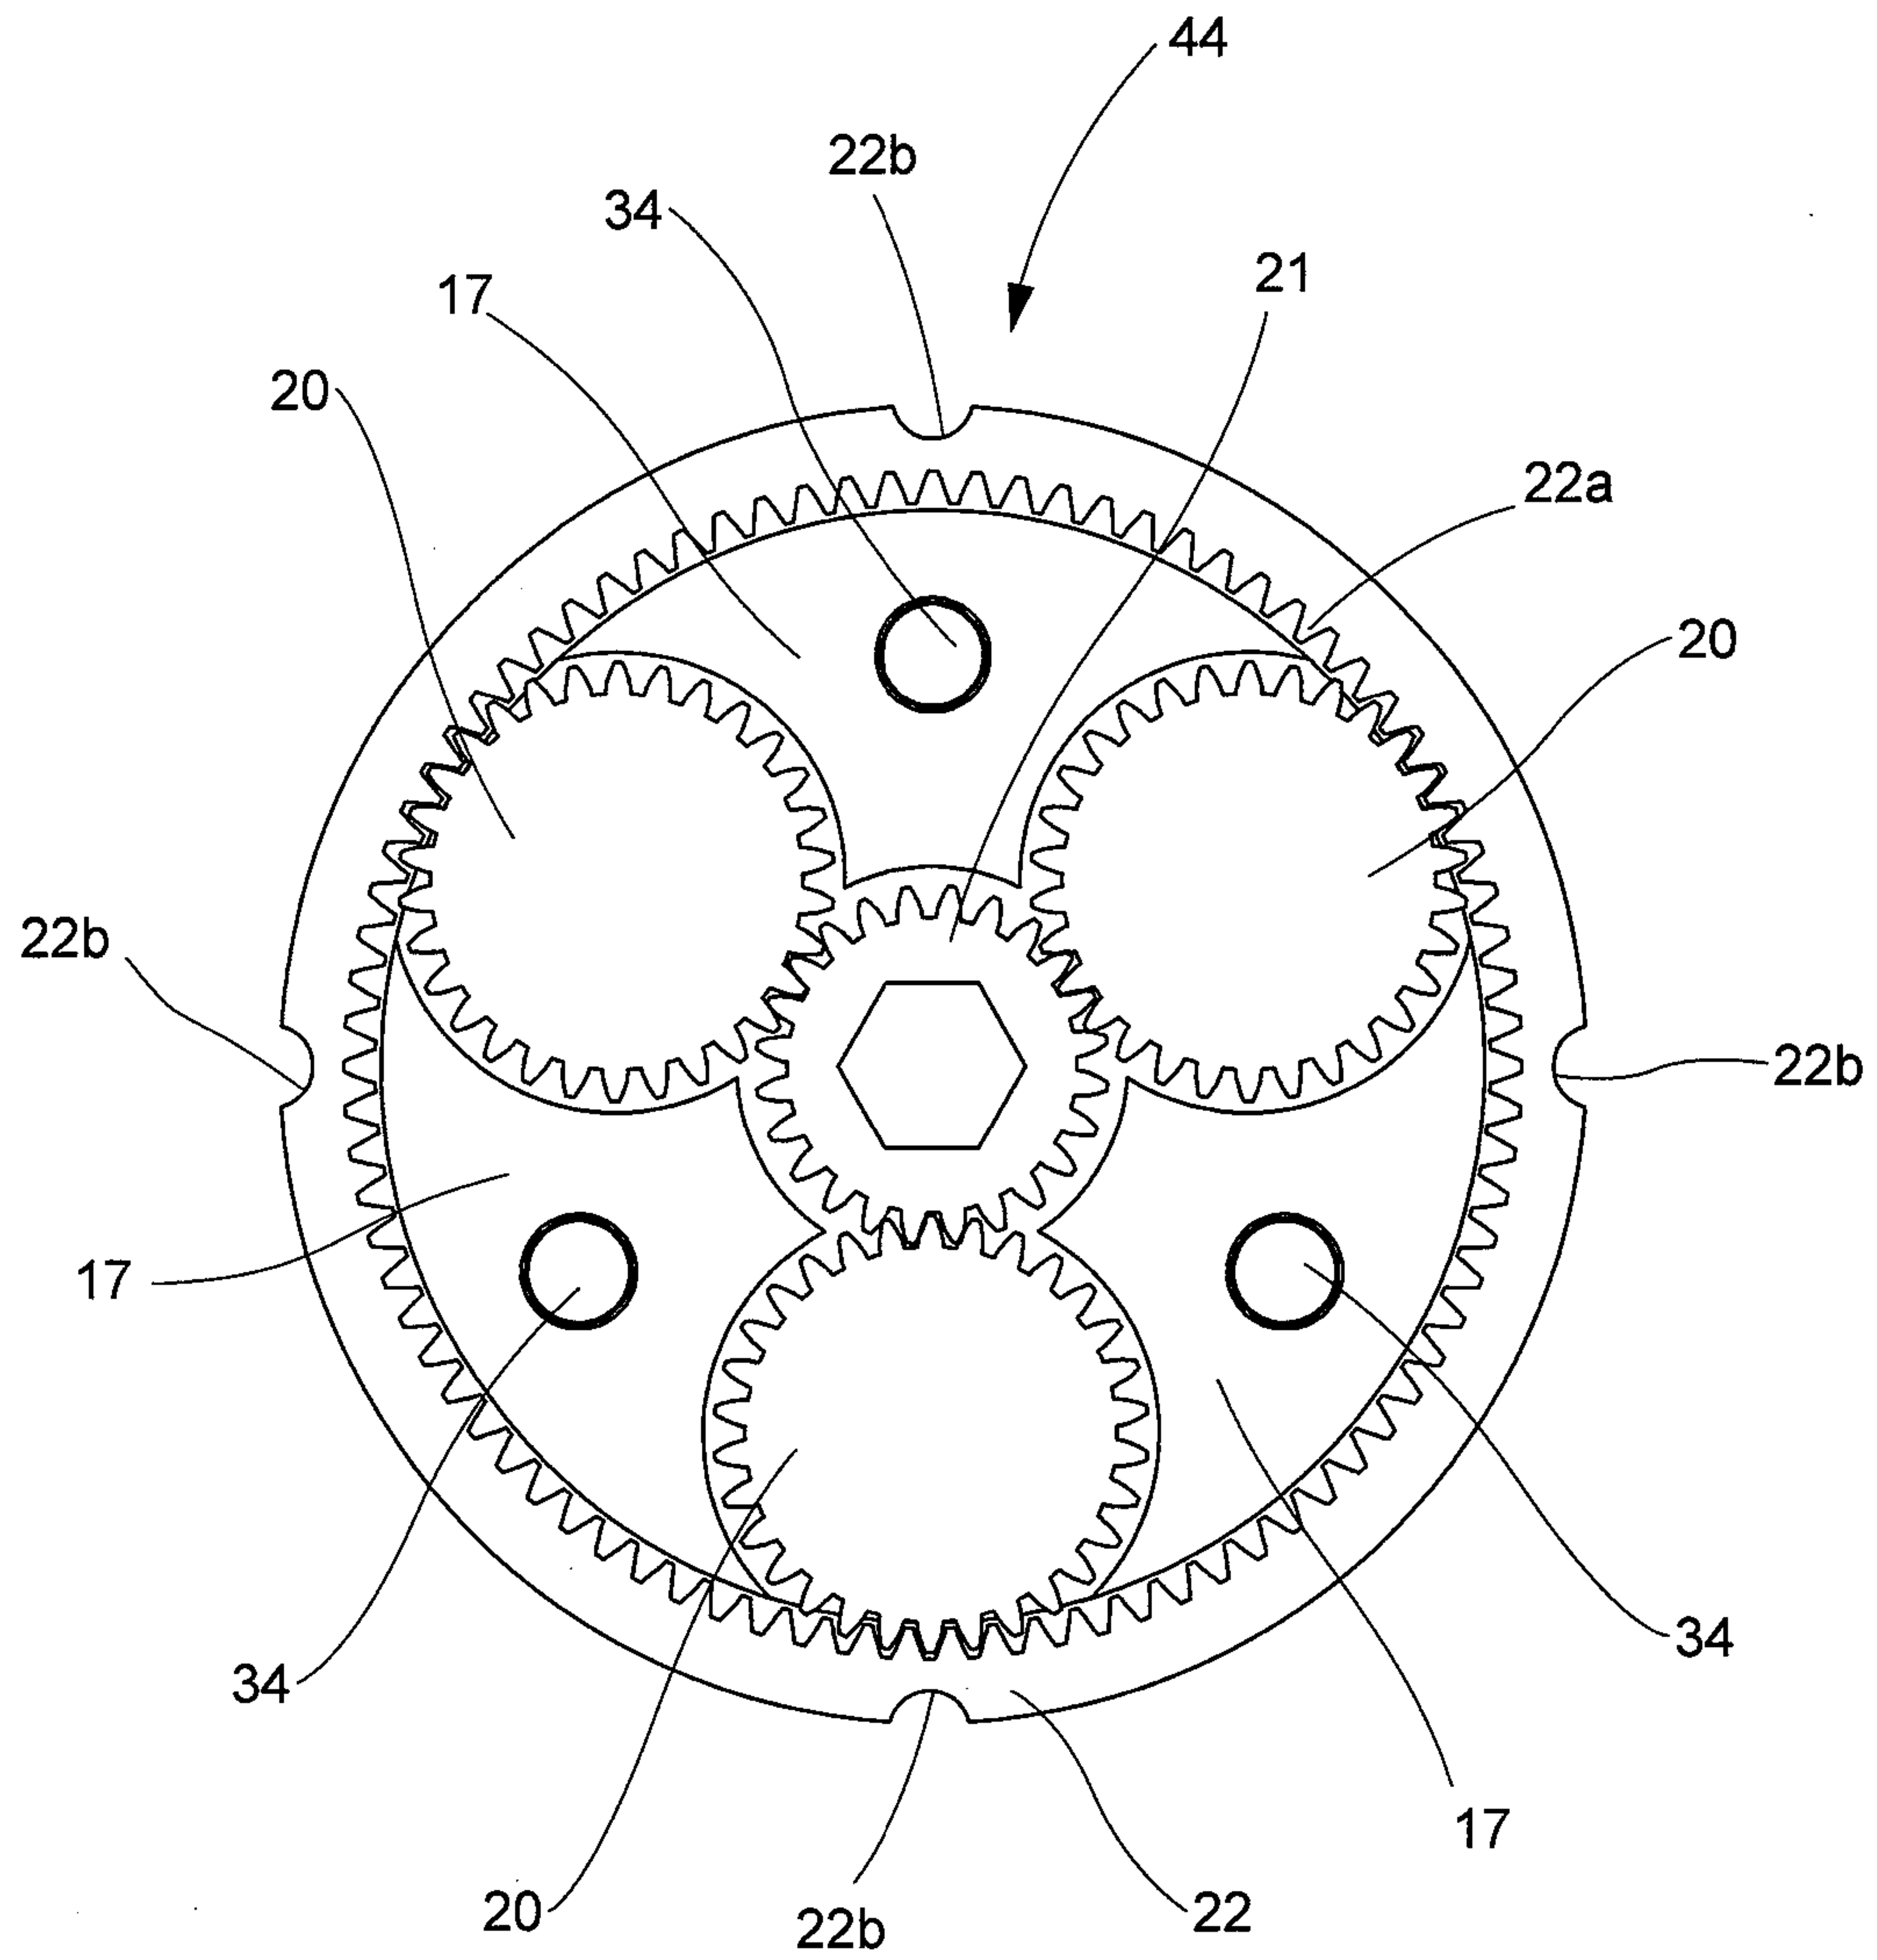
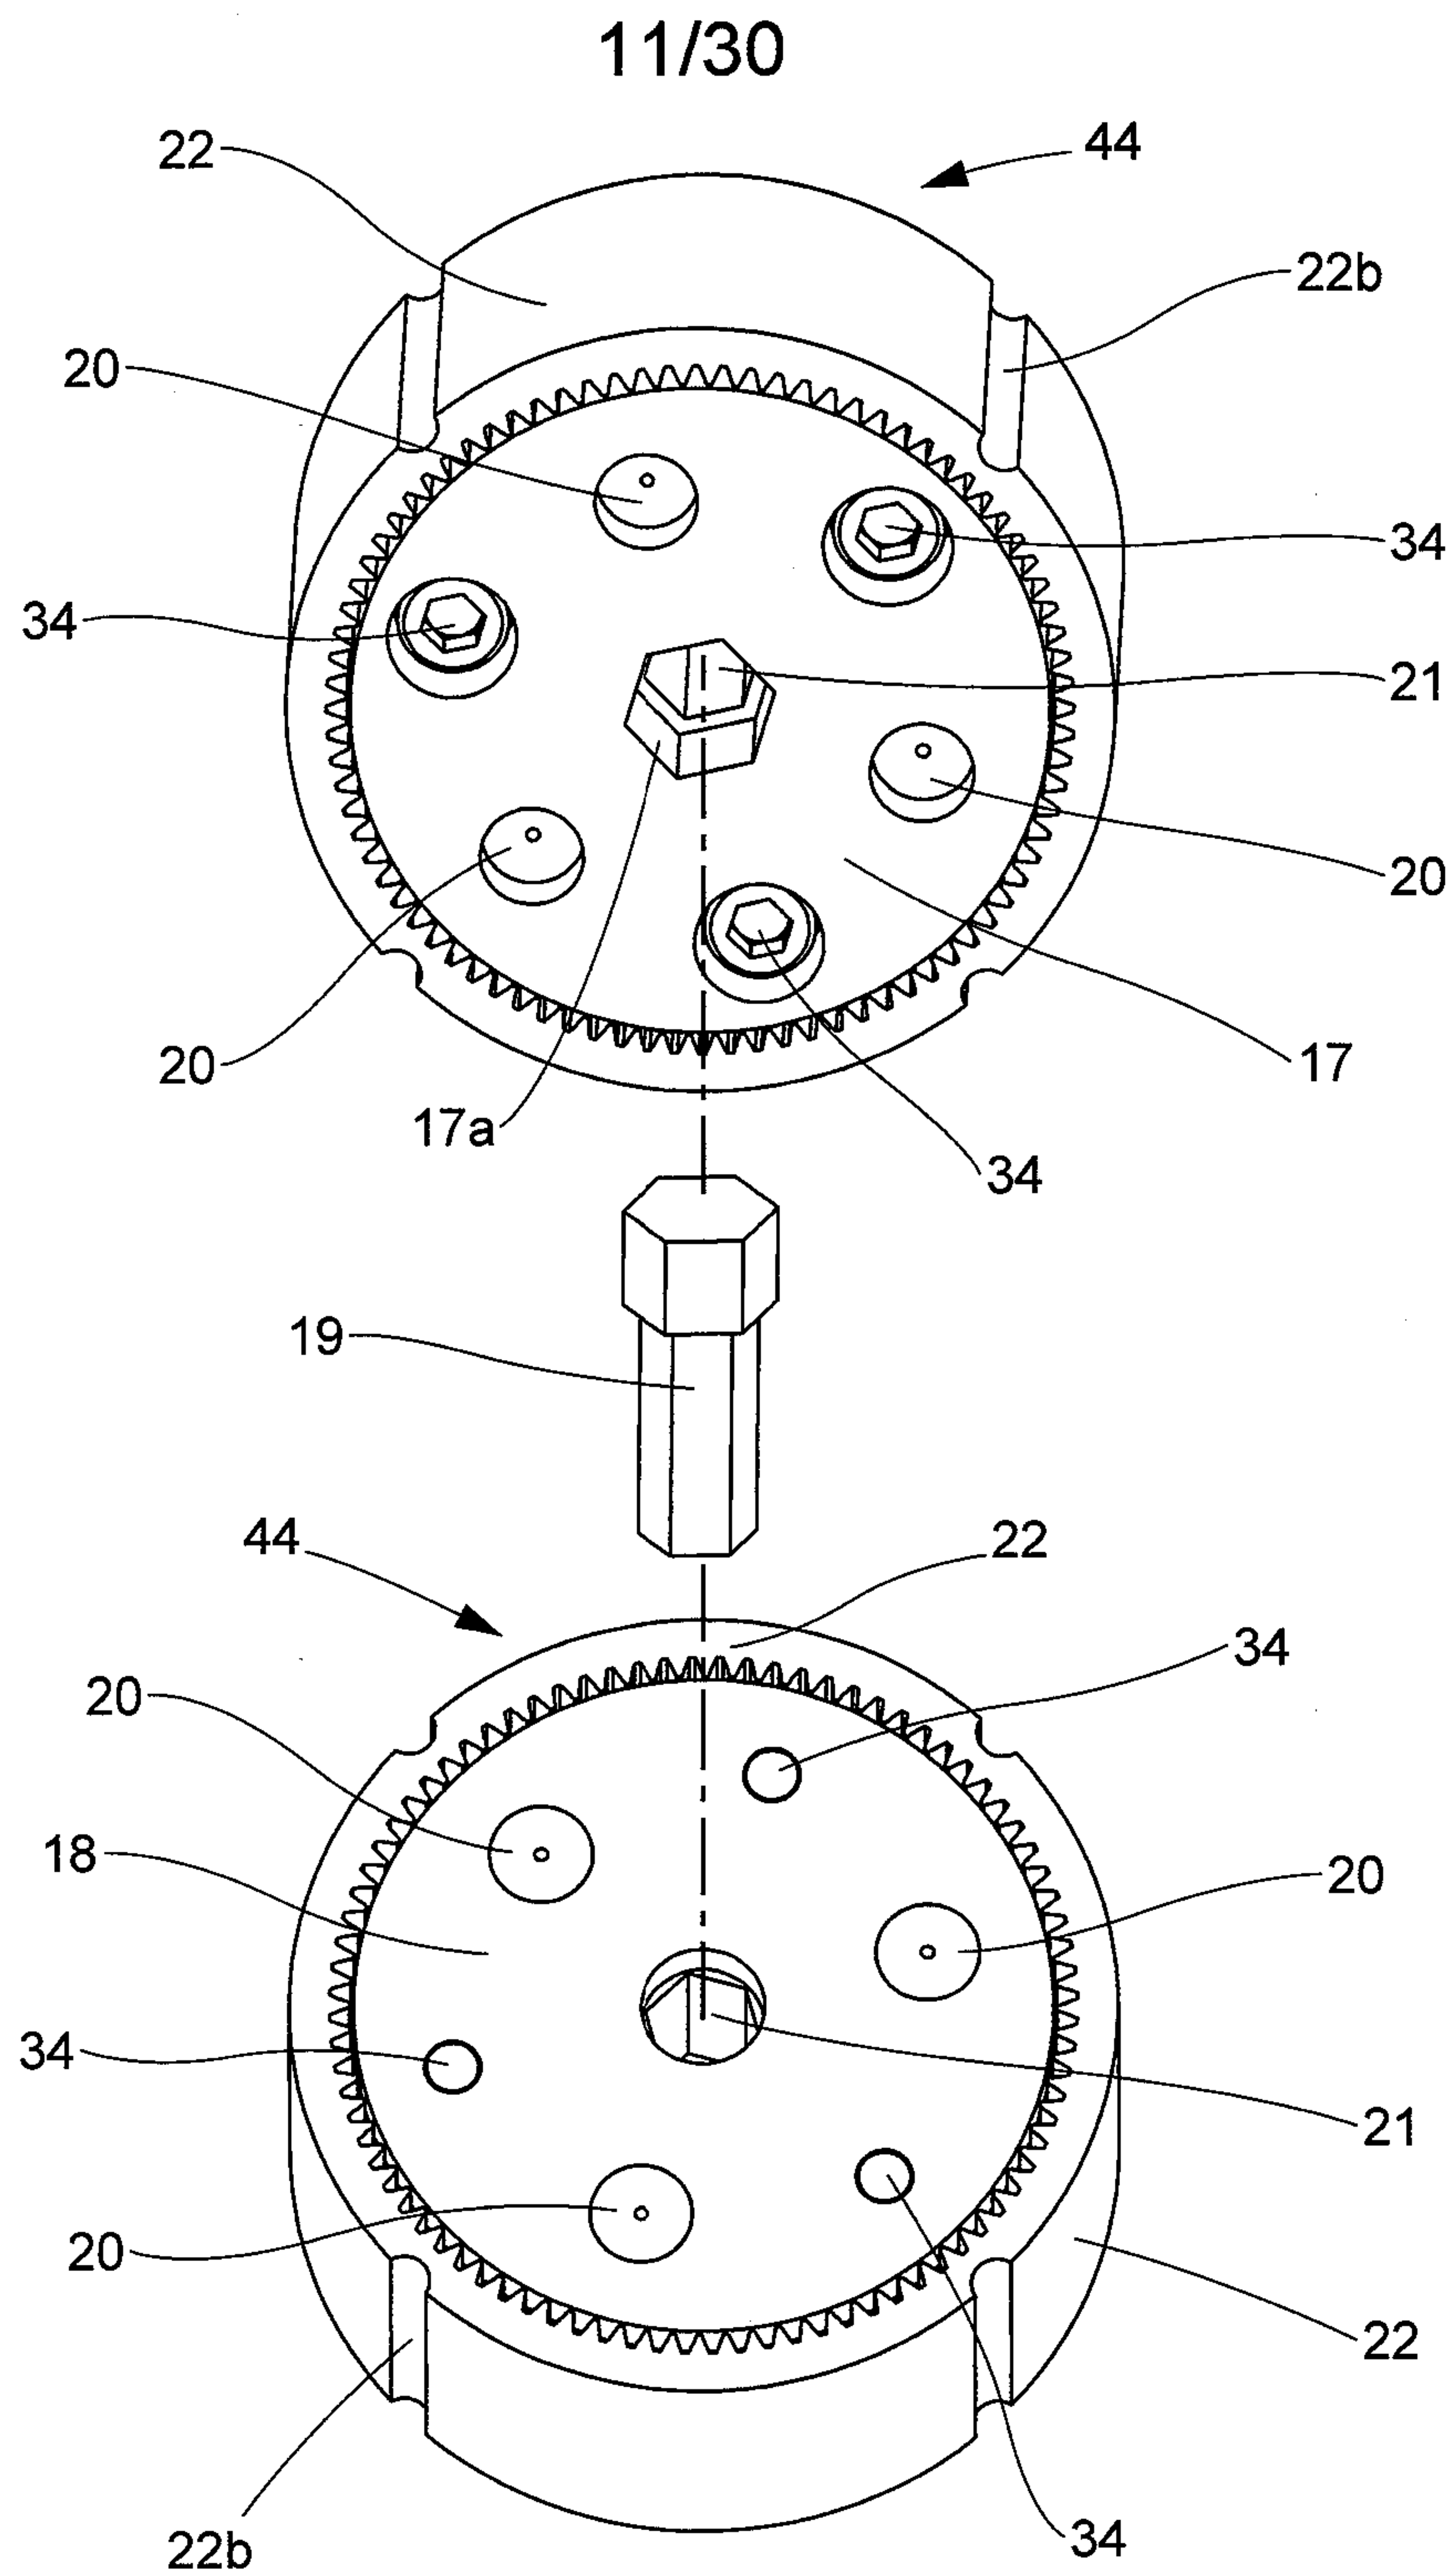


FIG. 10



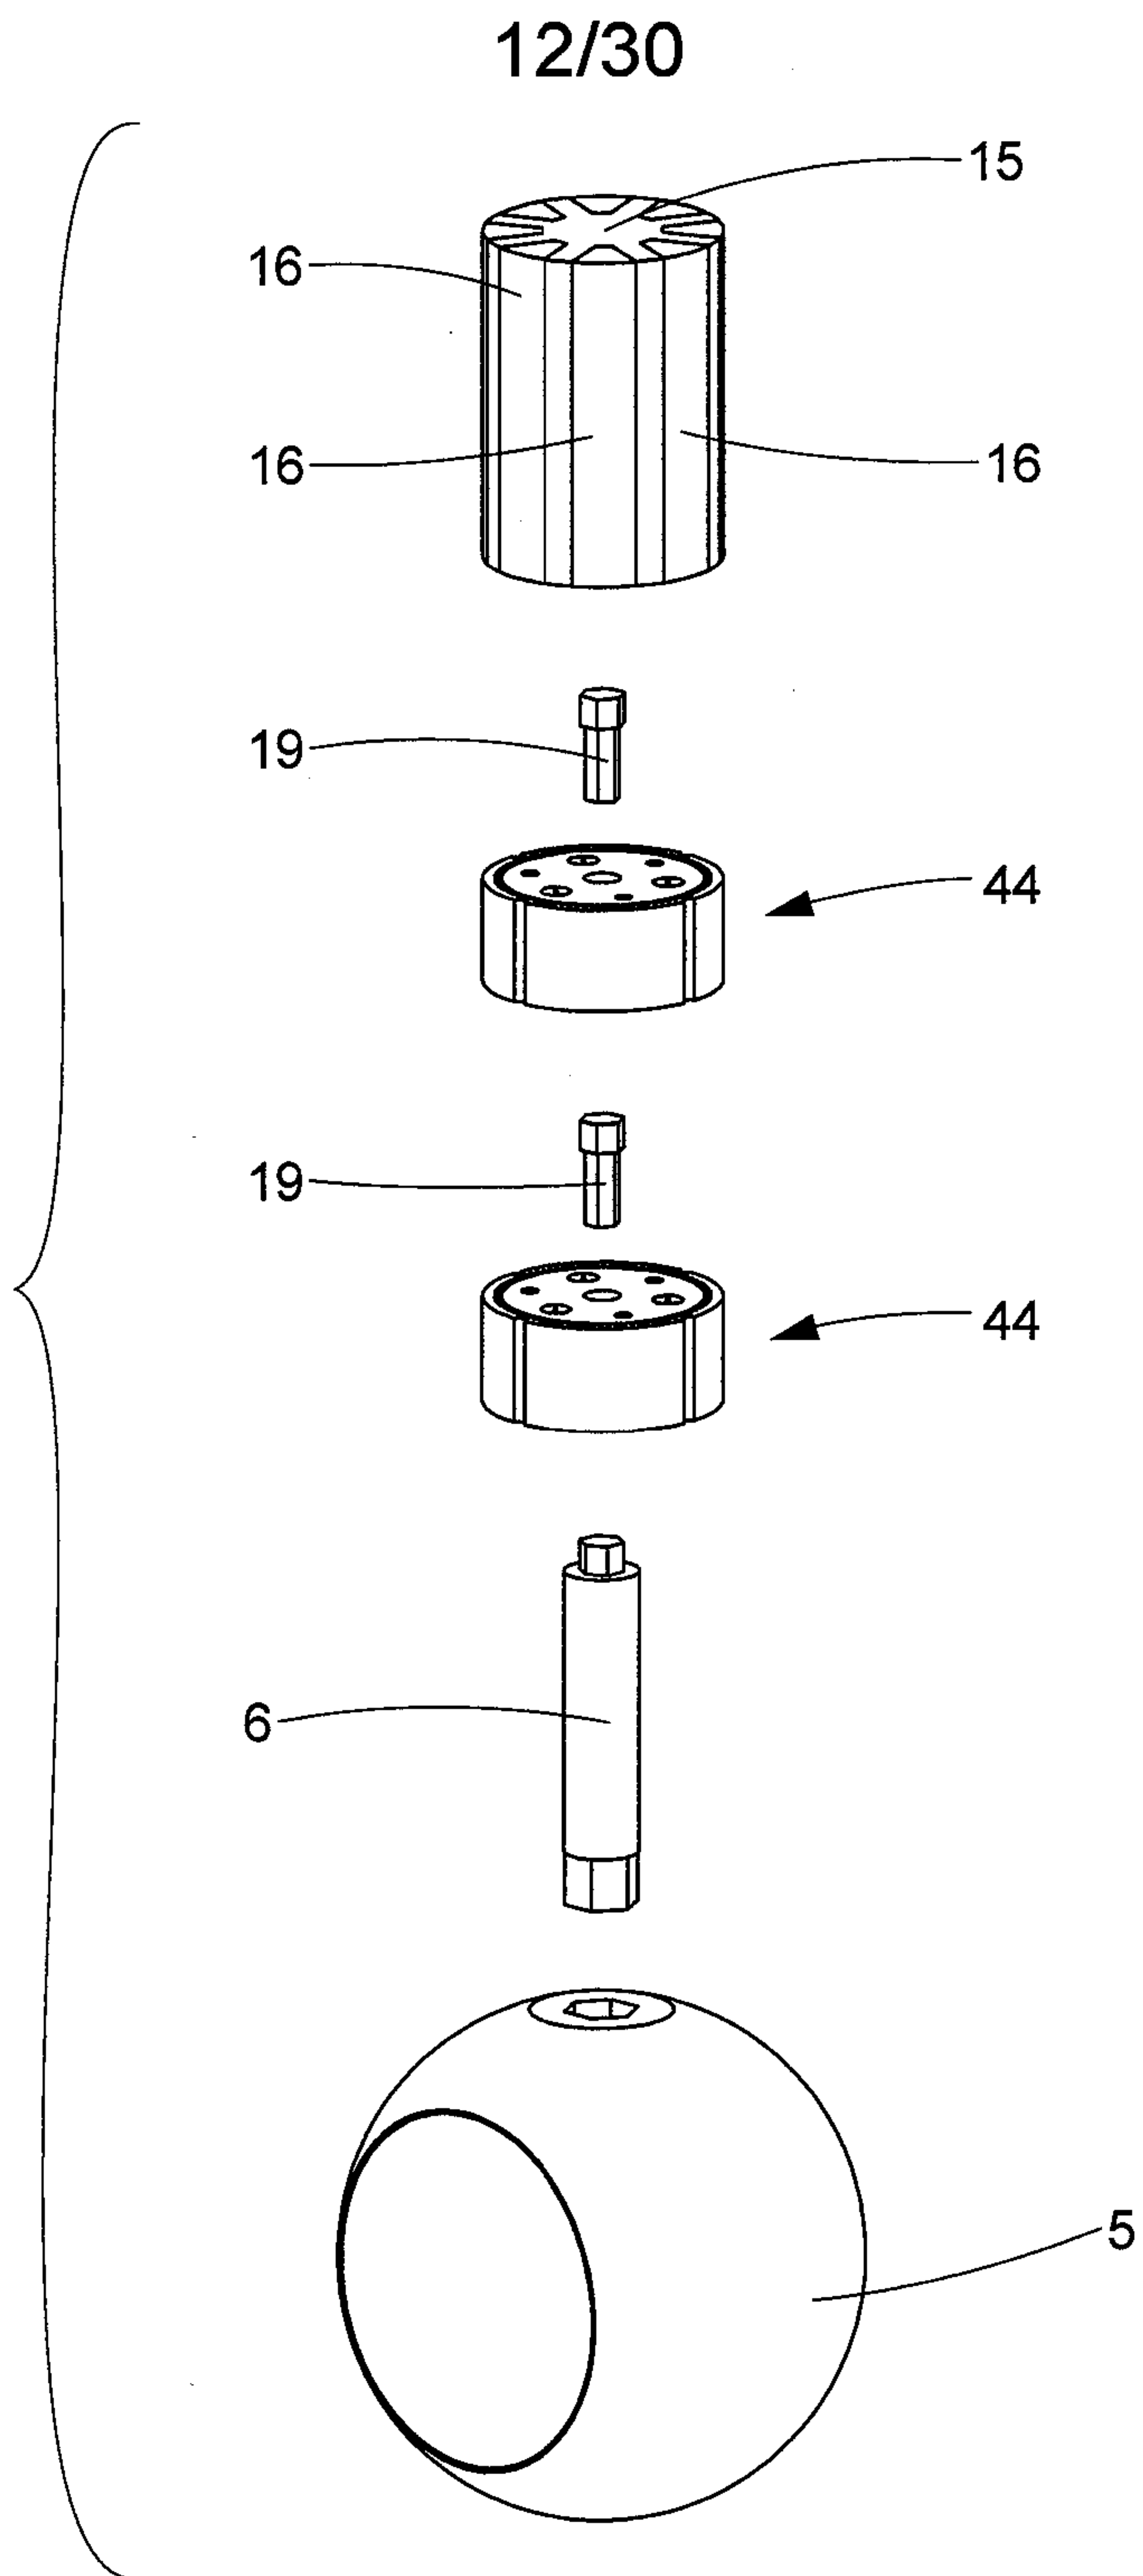


FIG. 12

13/30

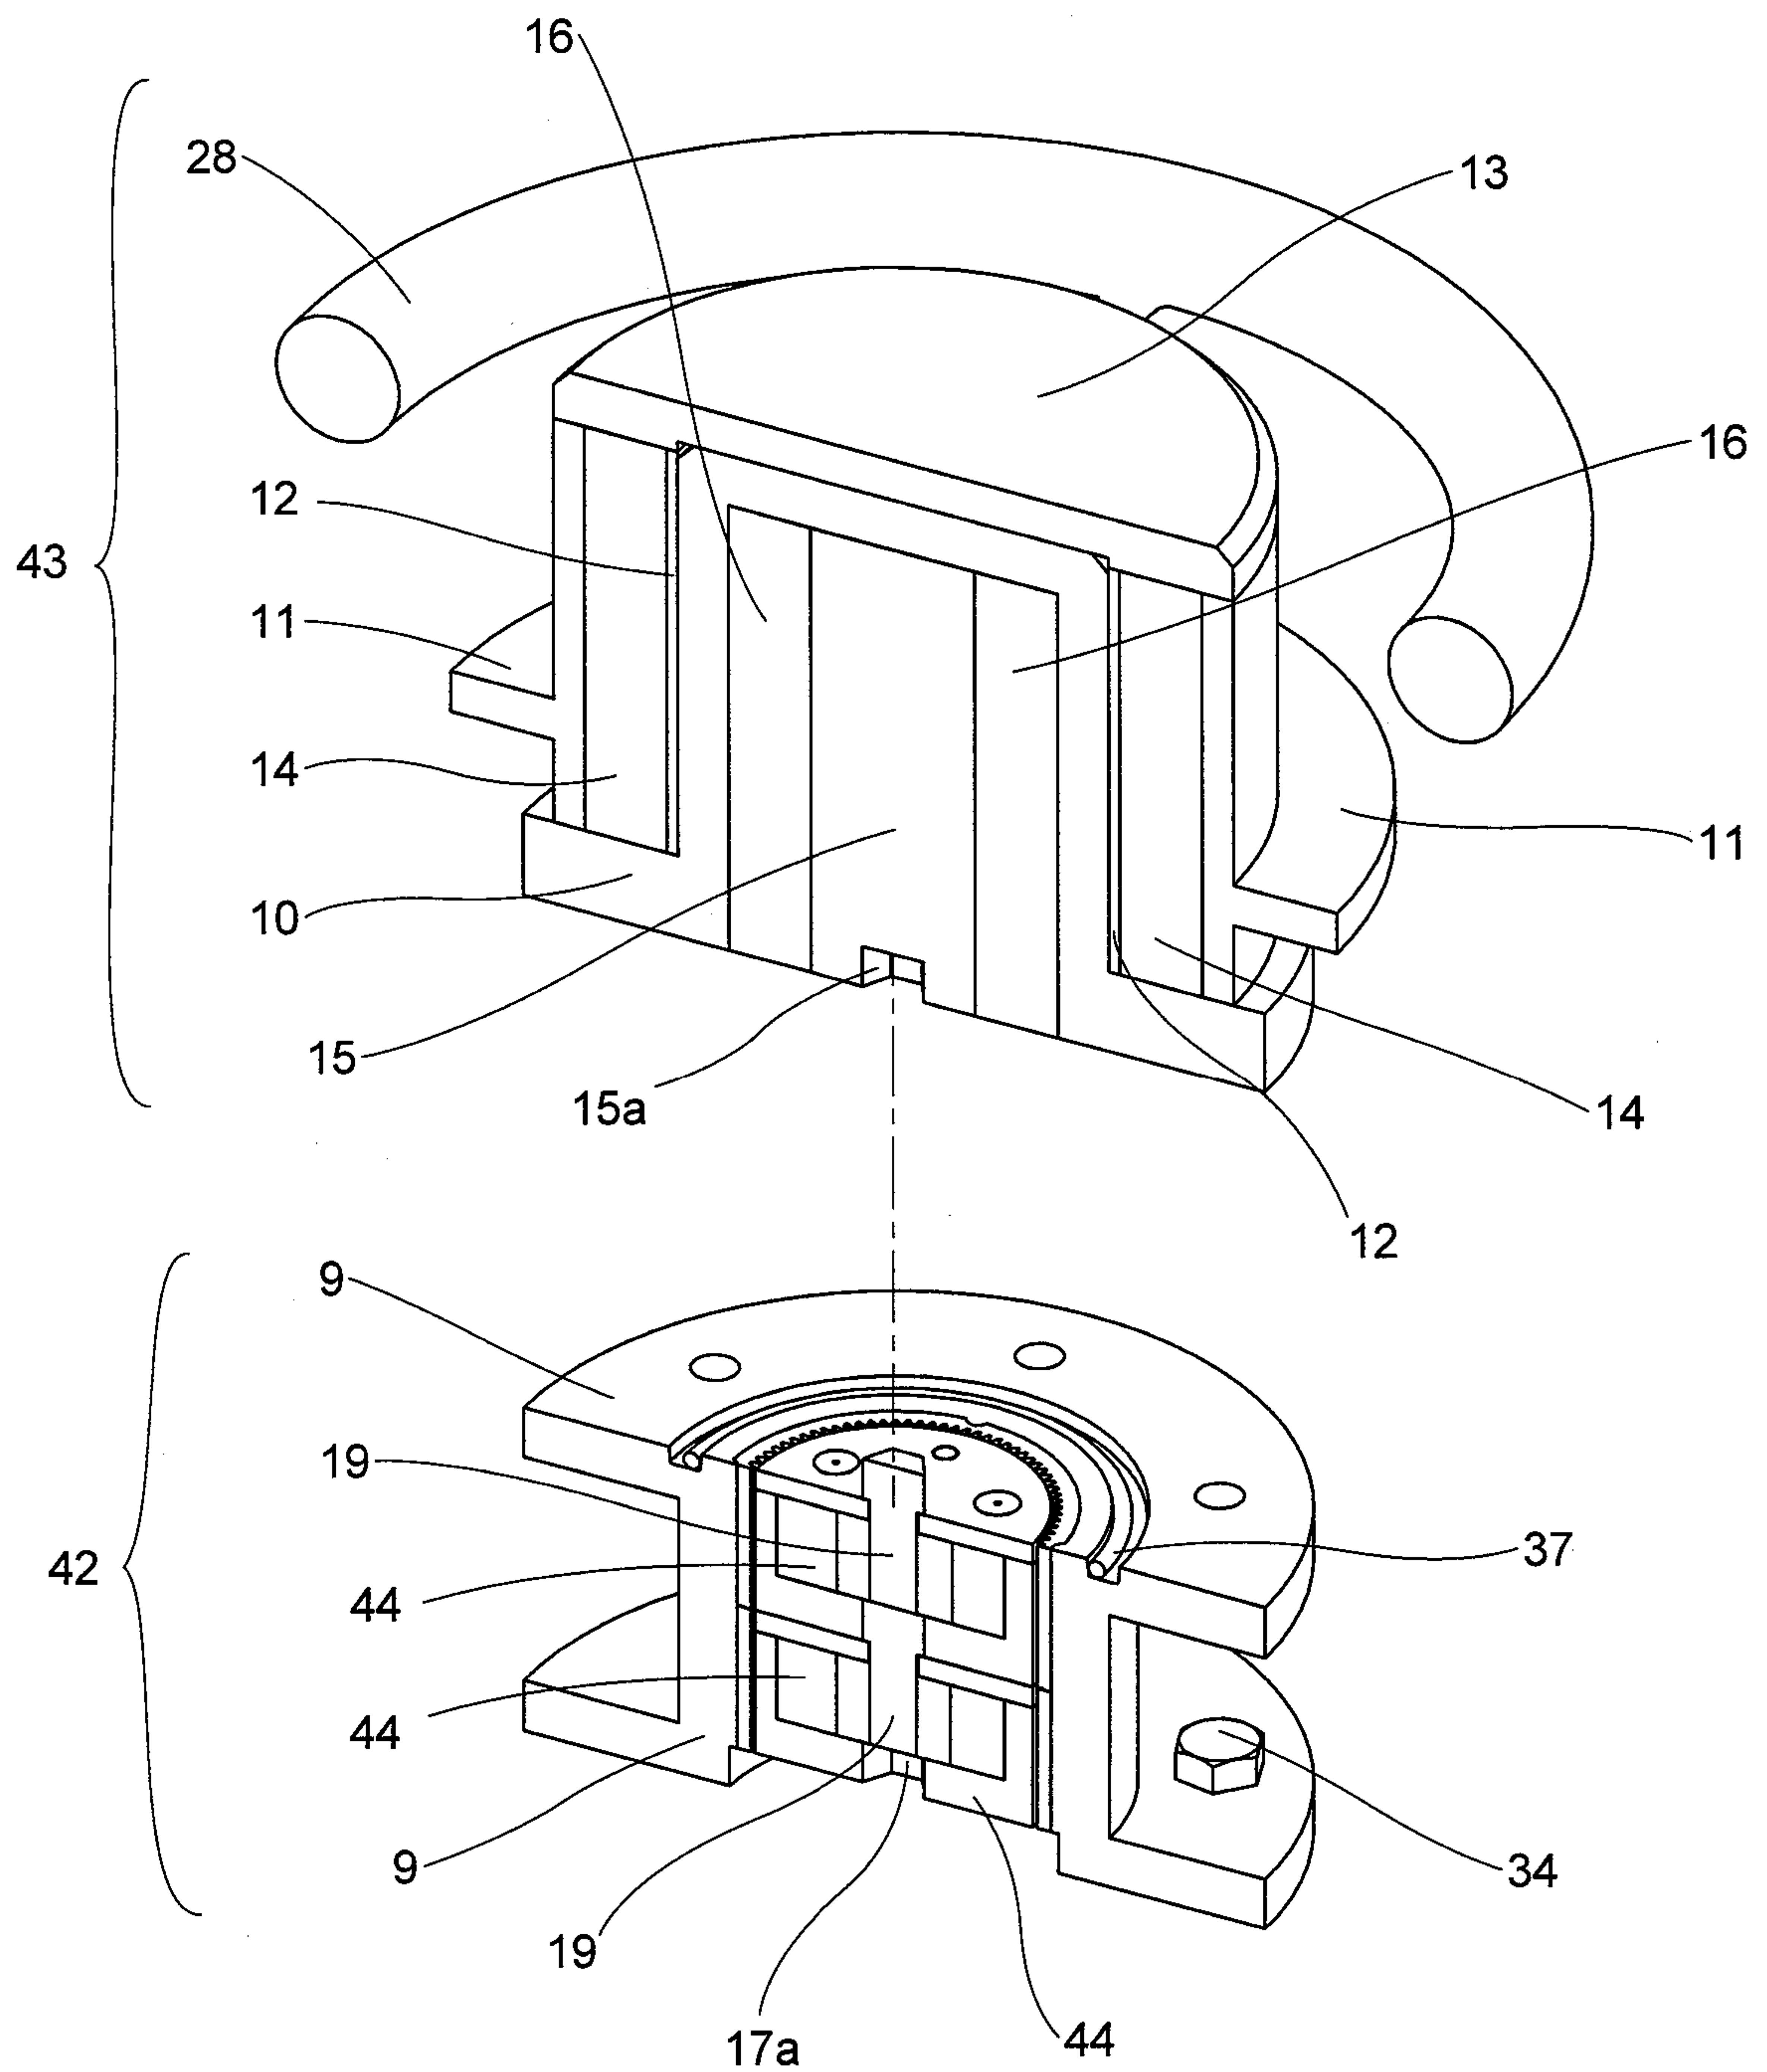


FIG. 13

14/30

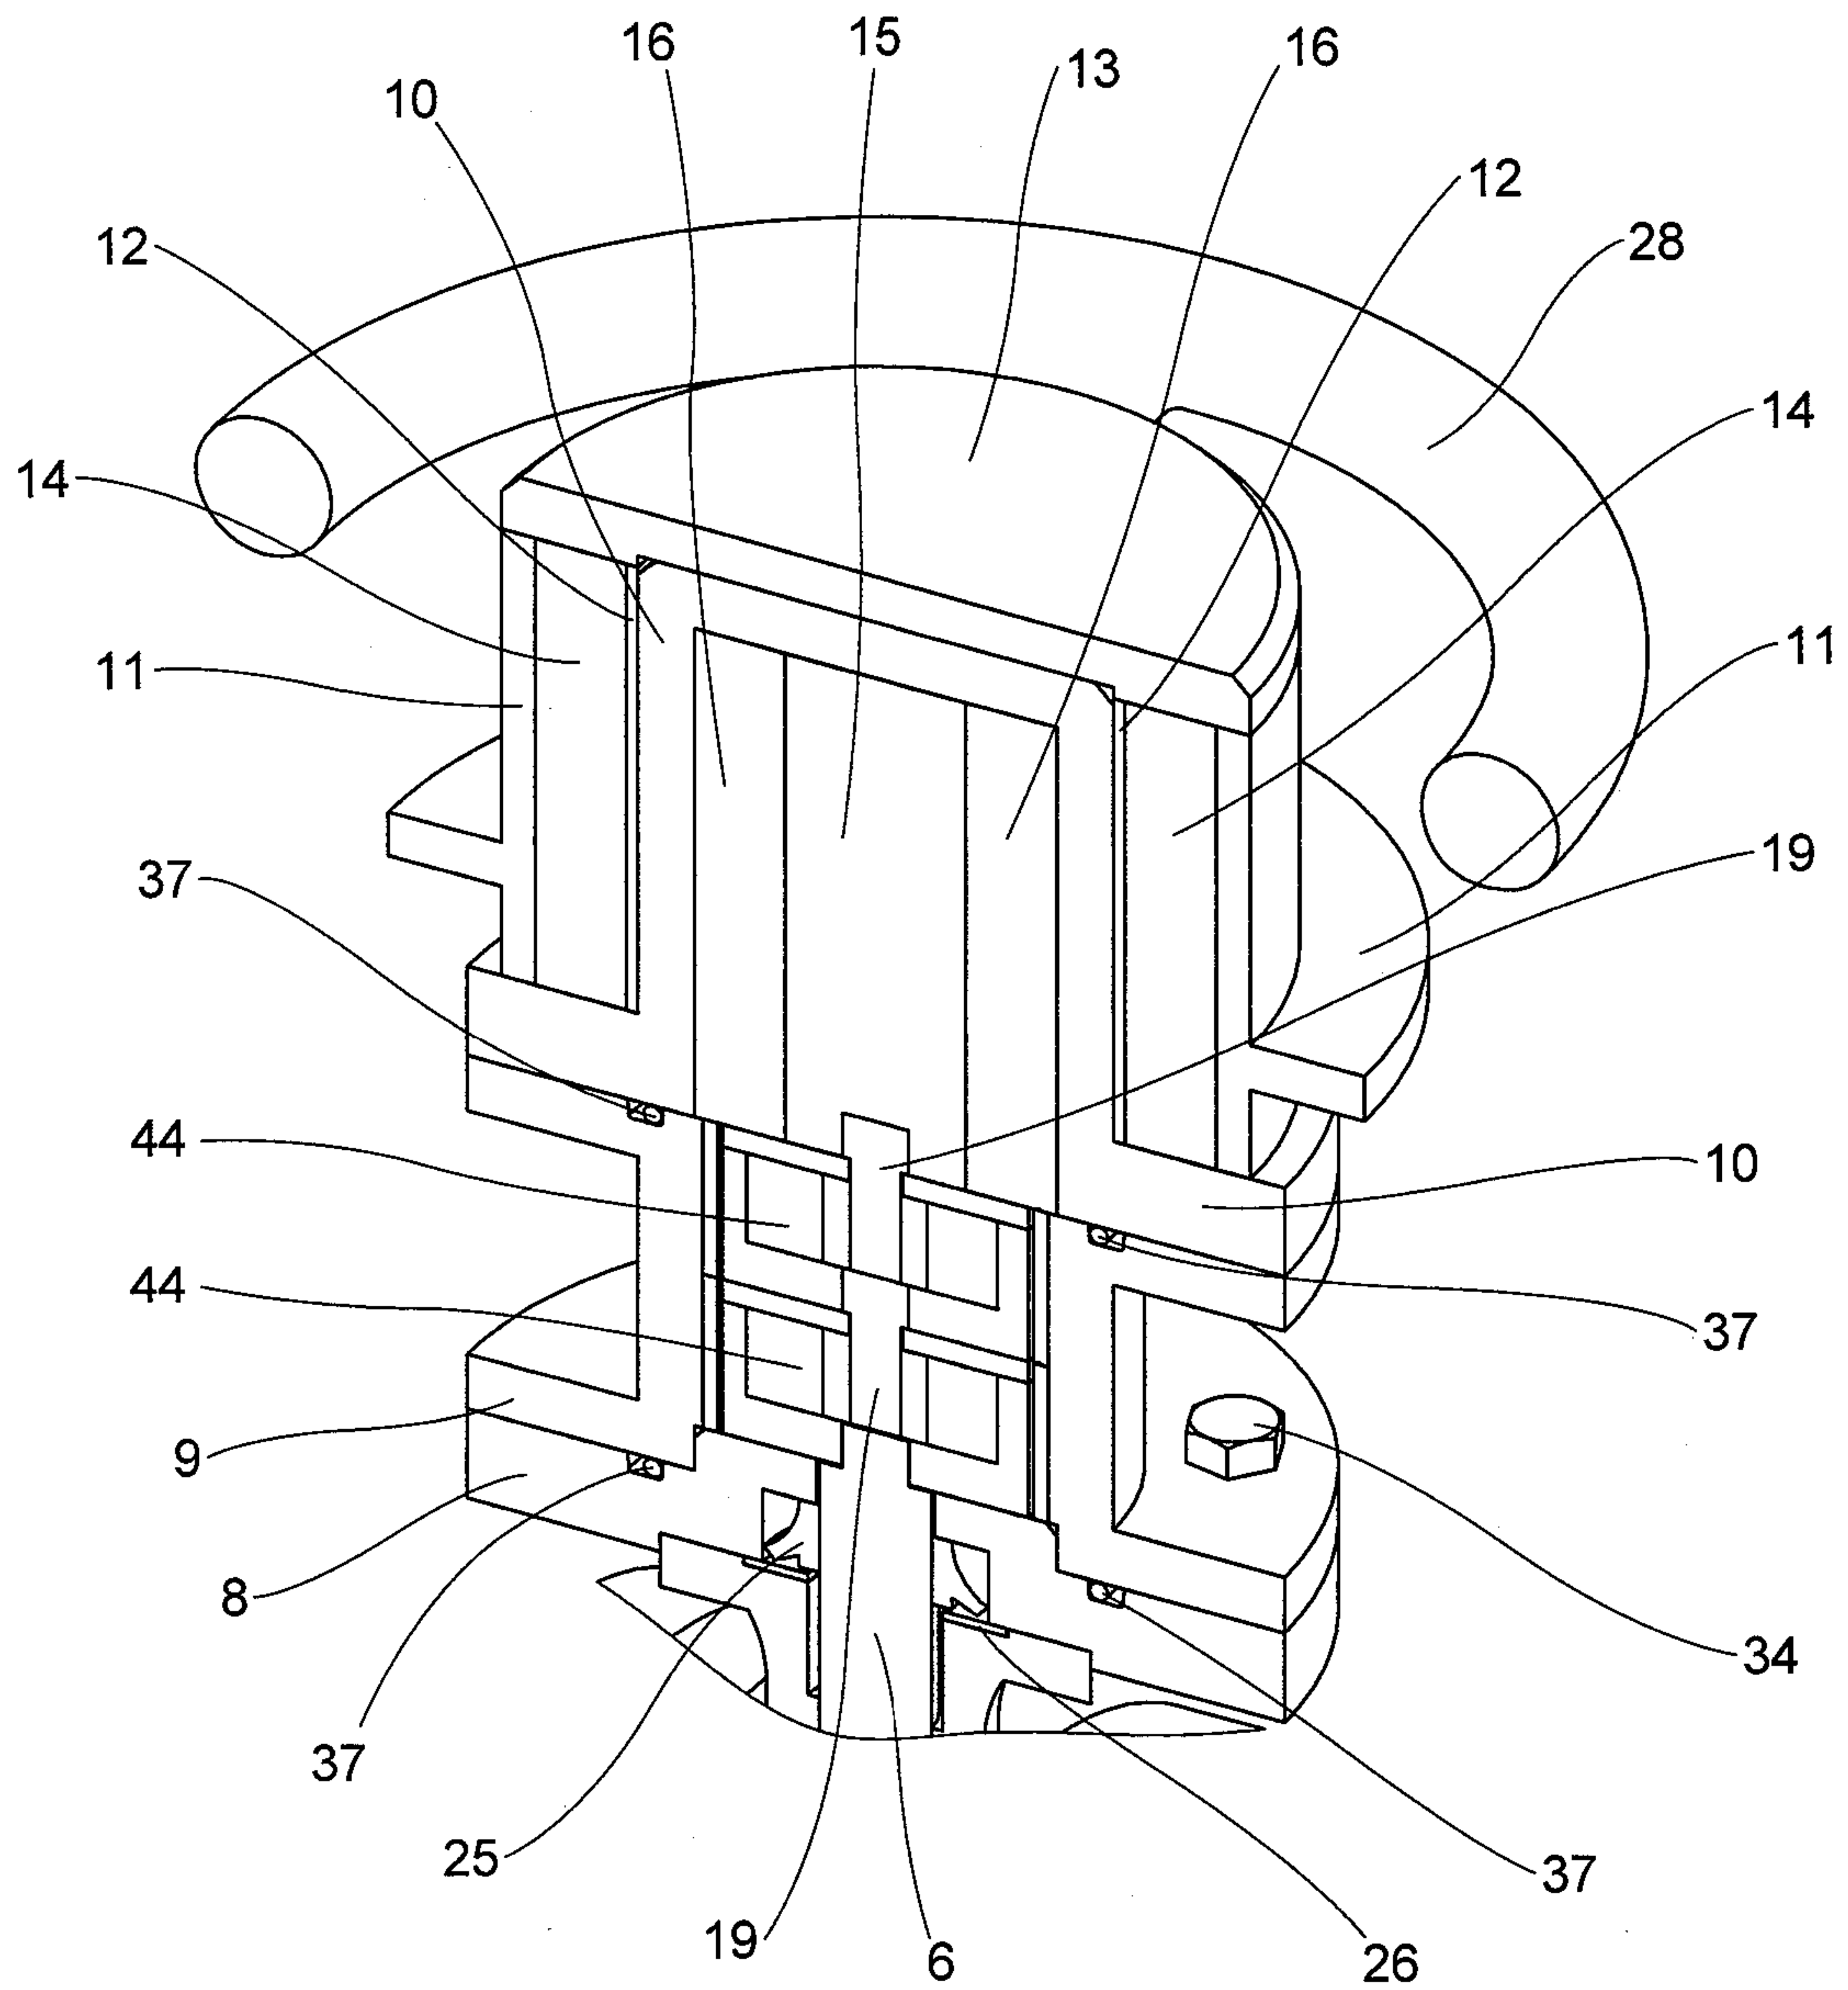


FIG. 14

15/30

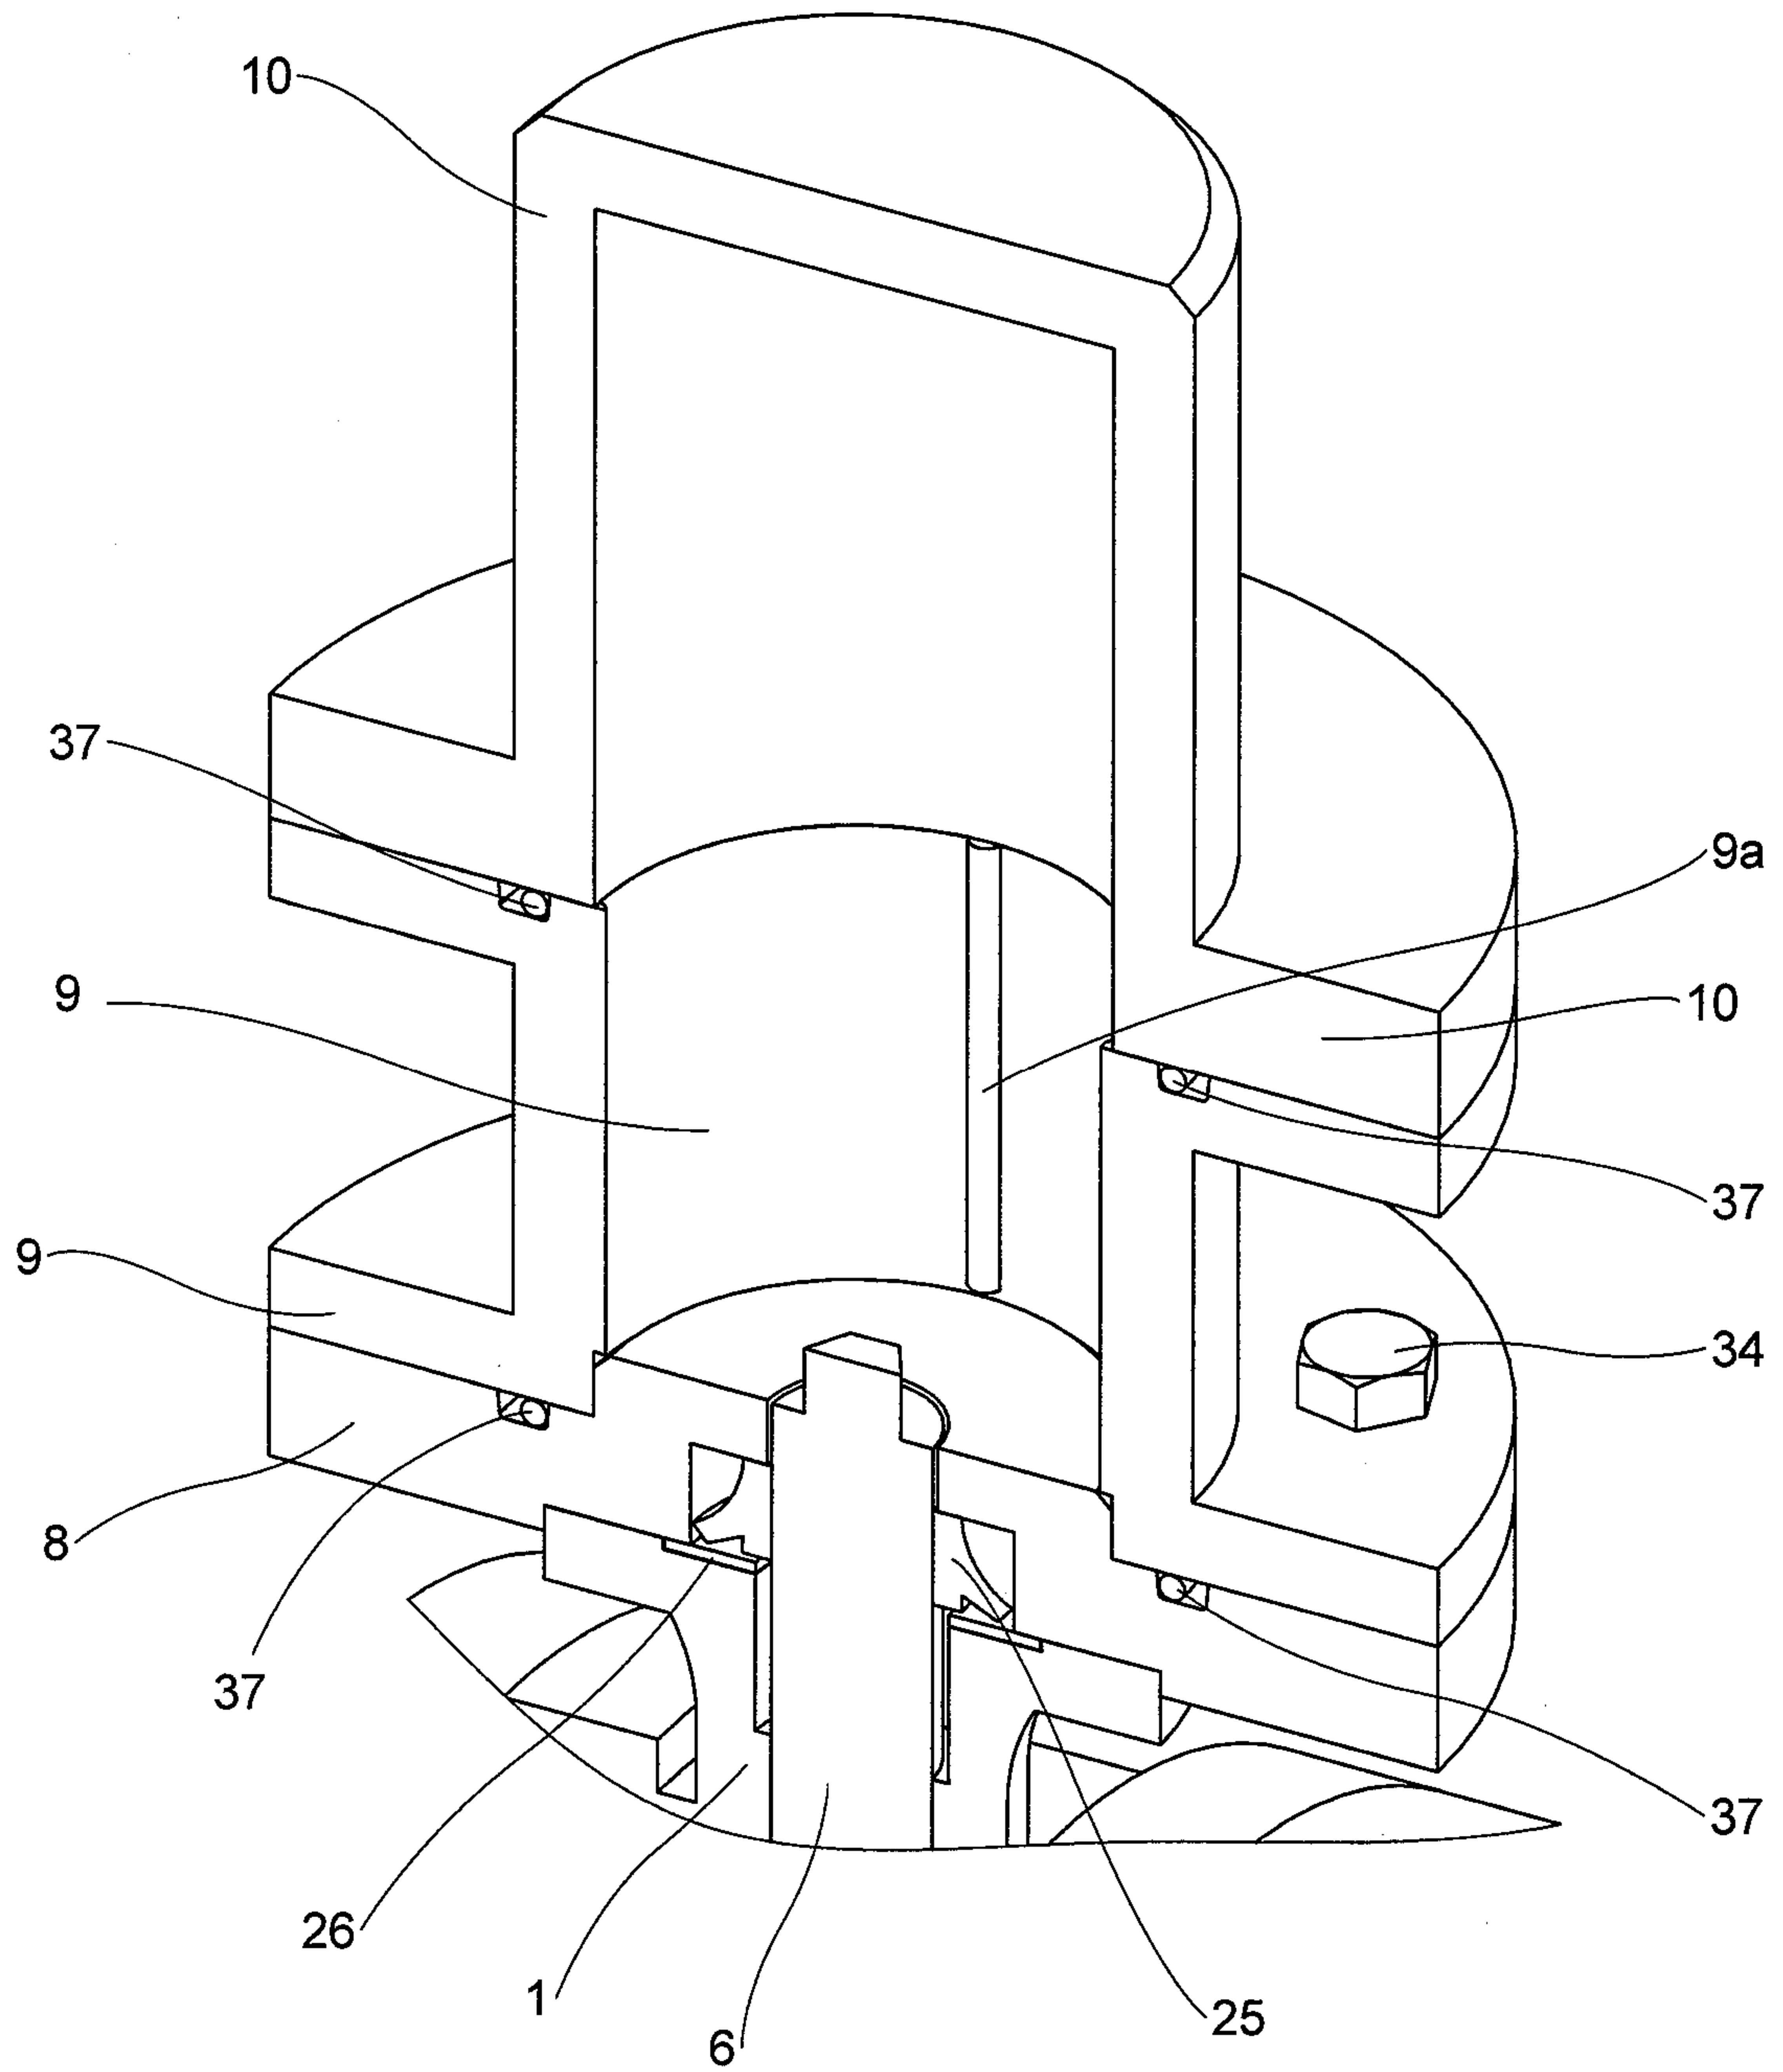


FIG. 15

16/30

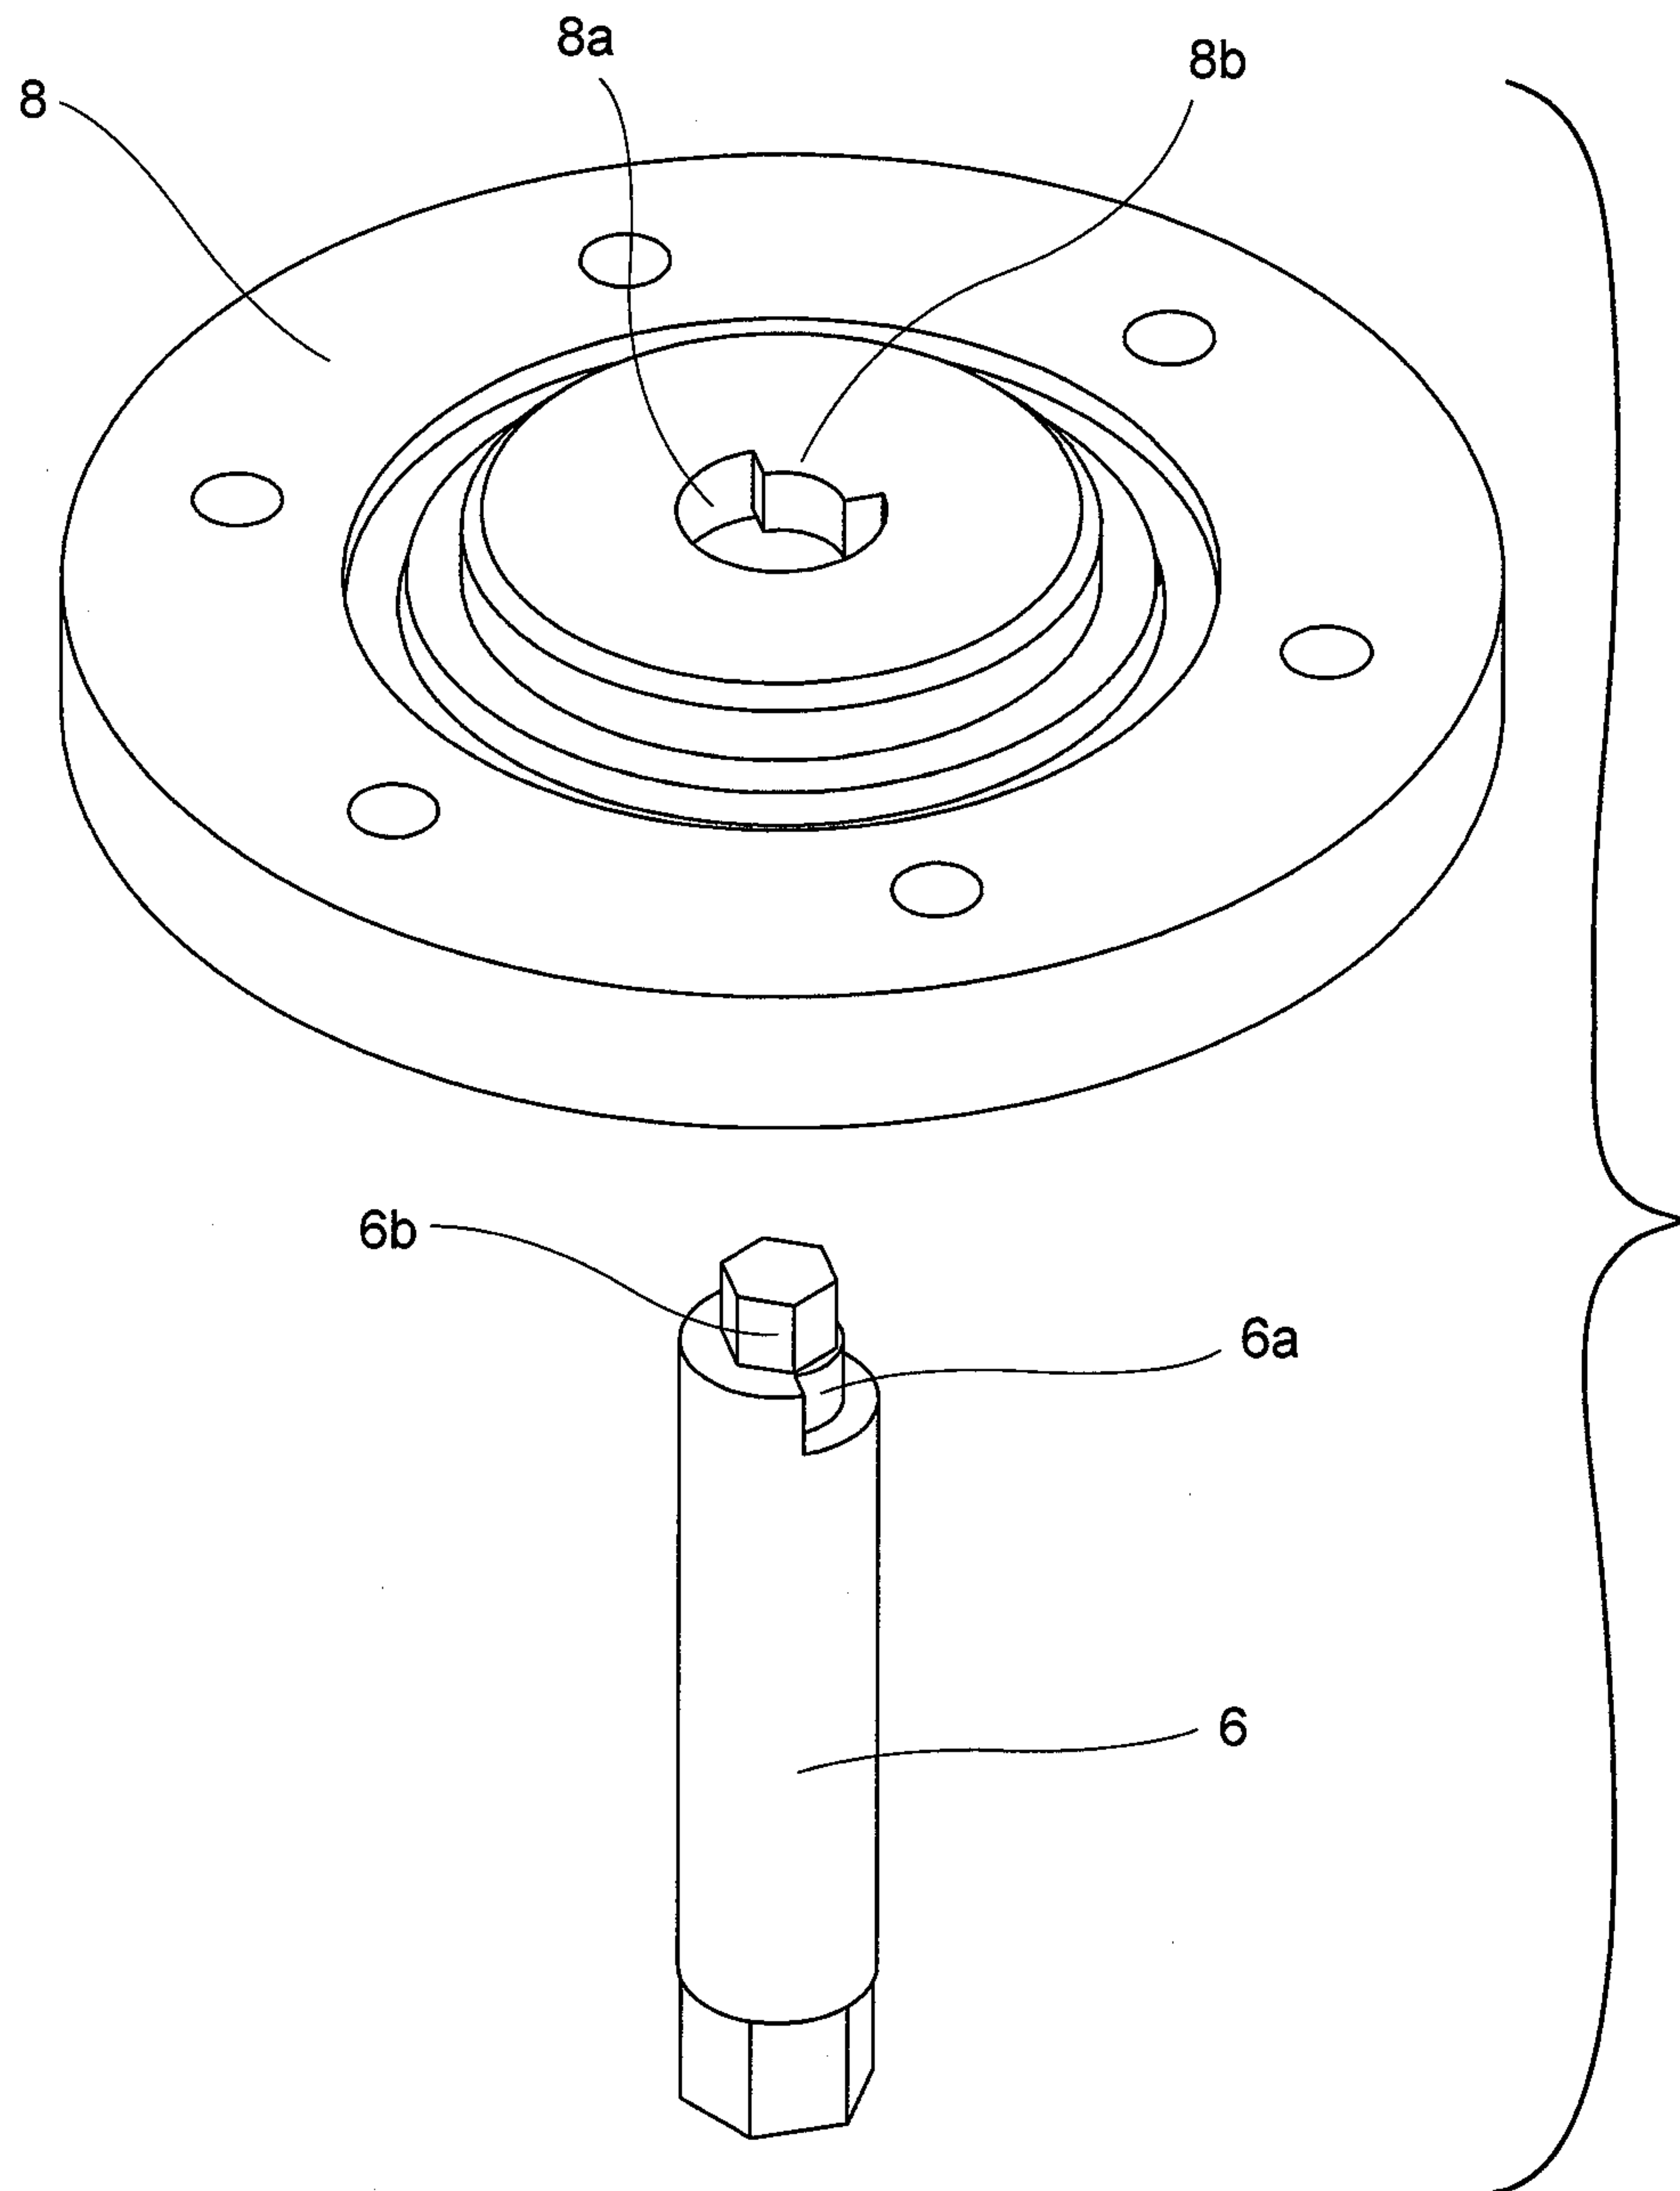


FIG. 16

17/30

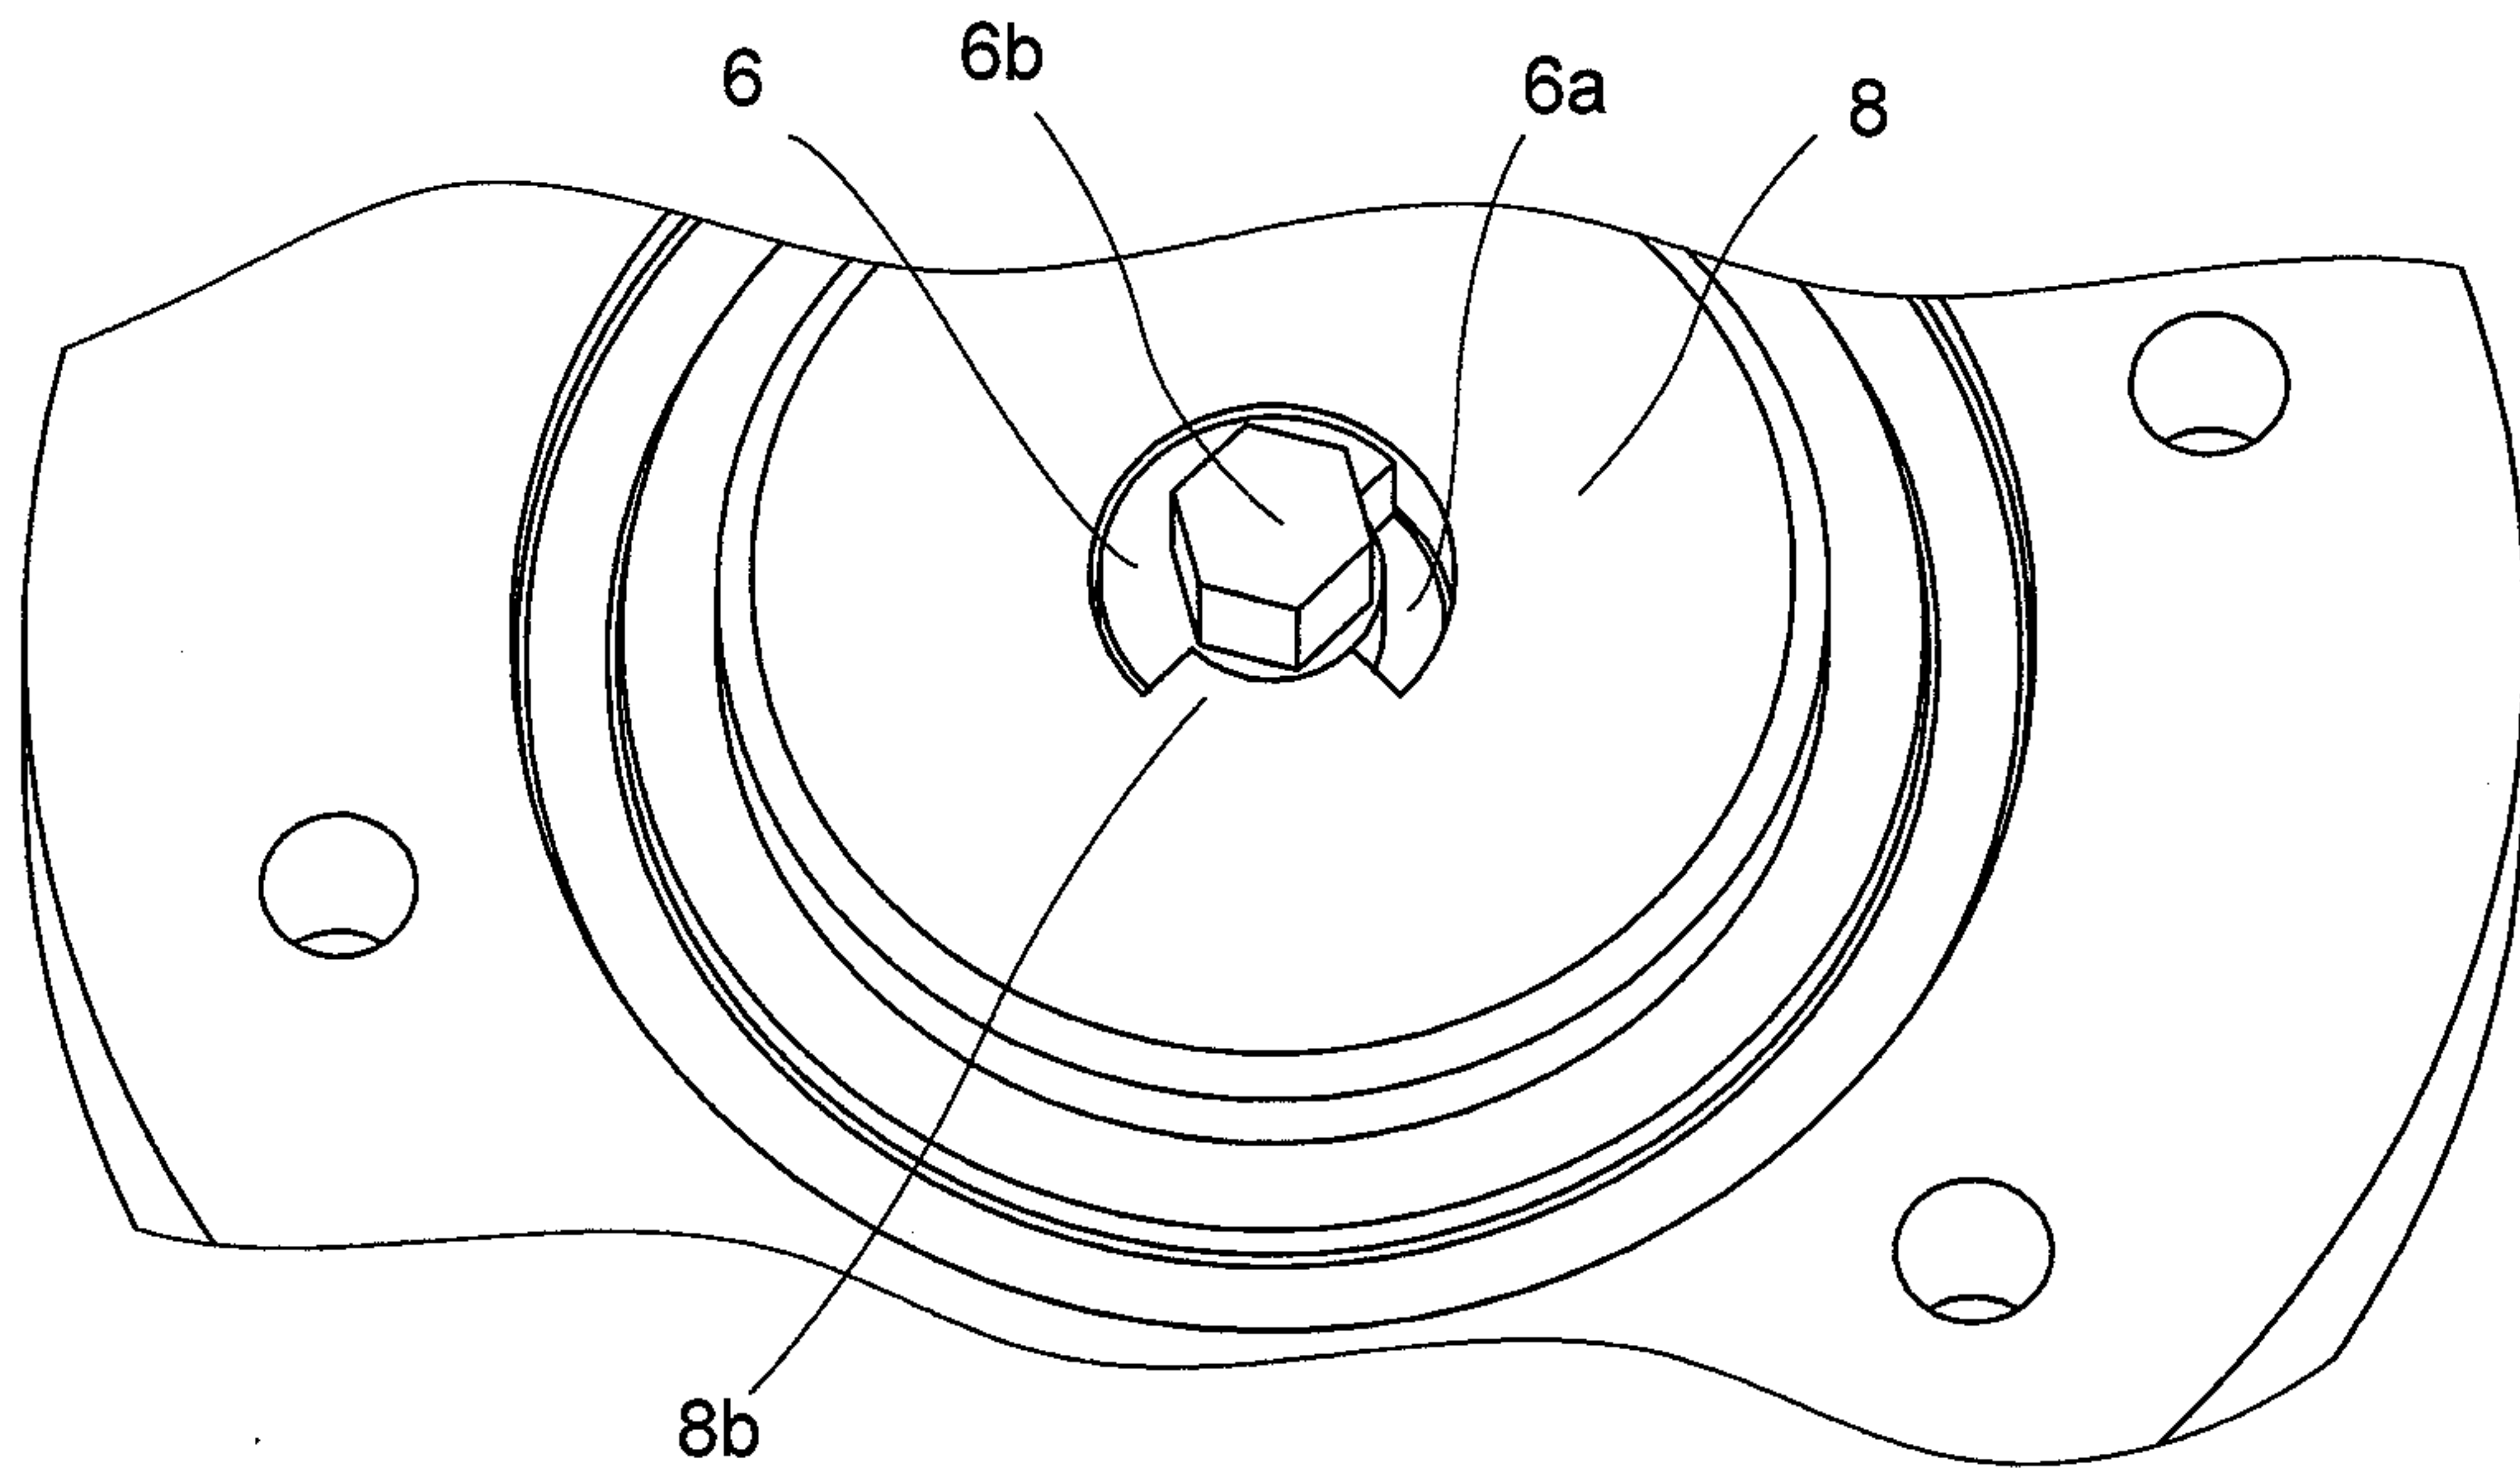


FIG. 17

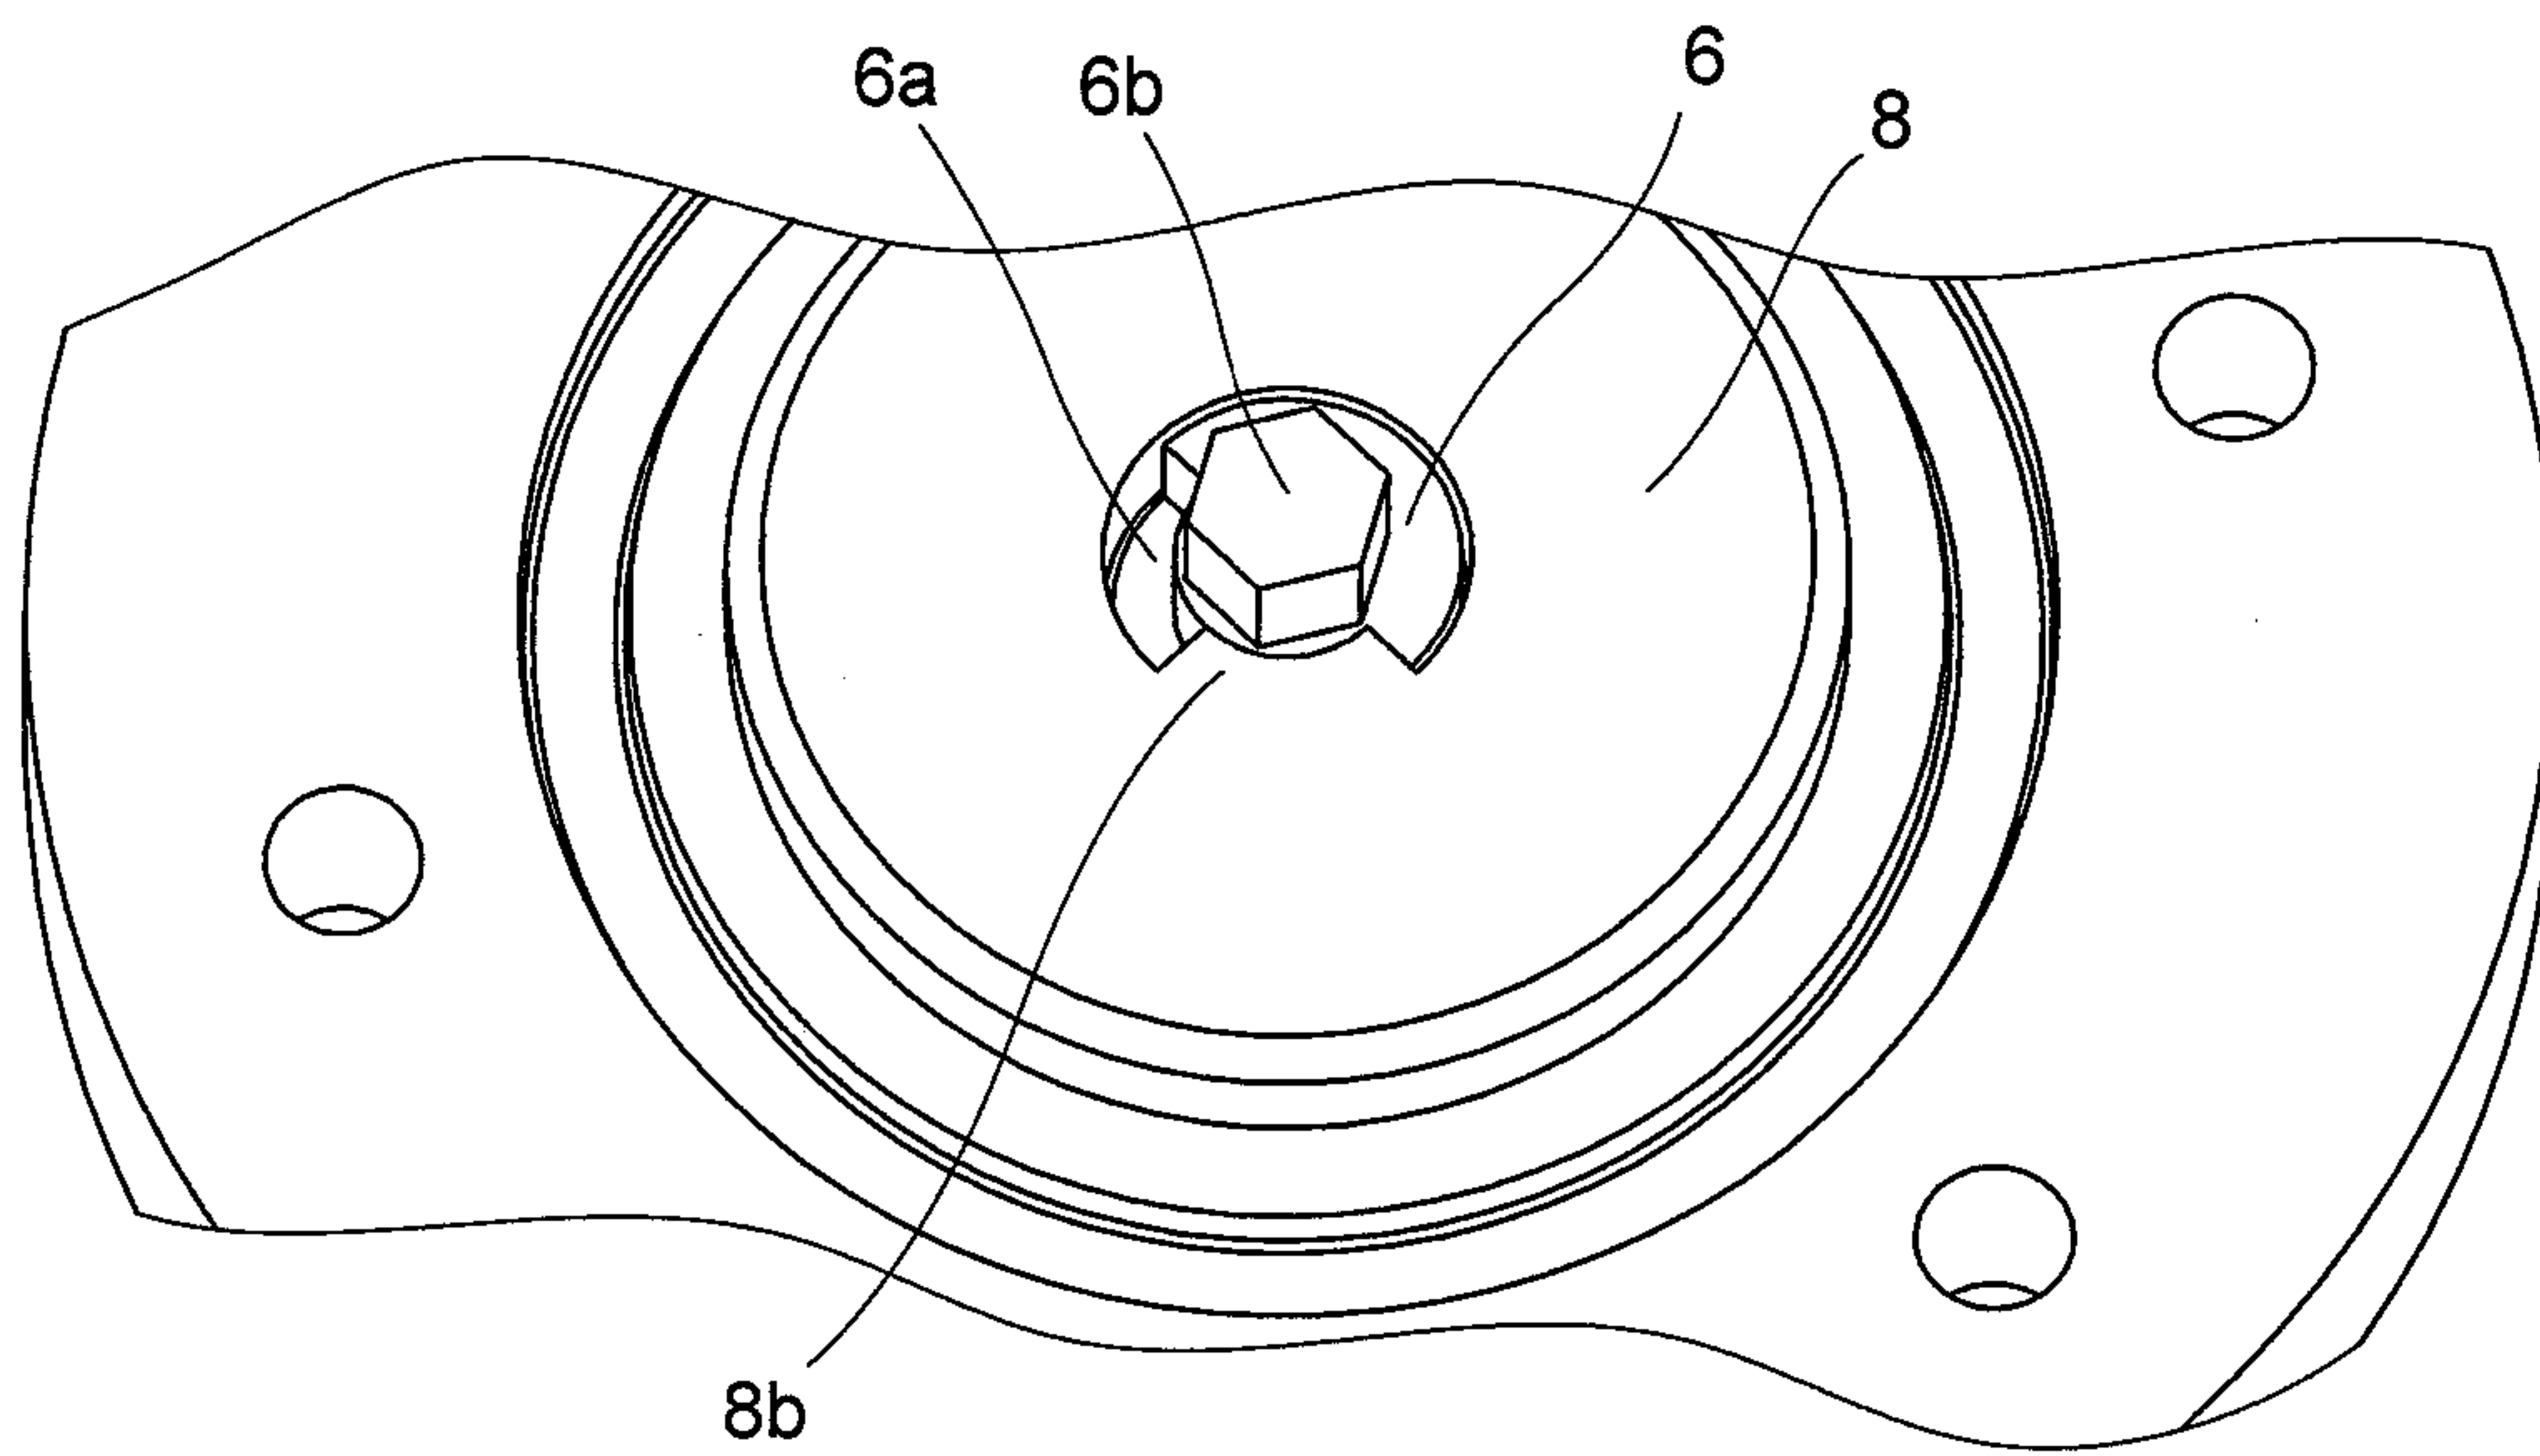


FIG. 18

18/30

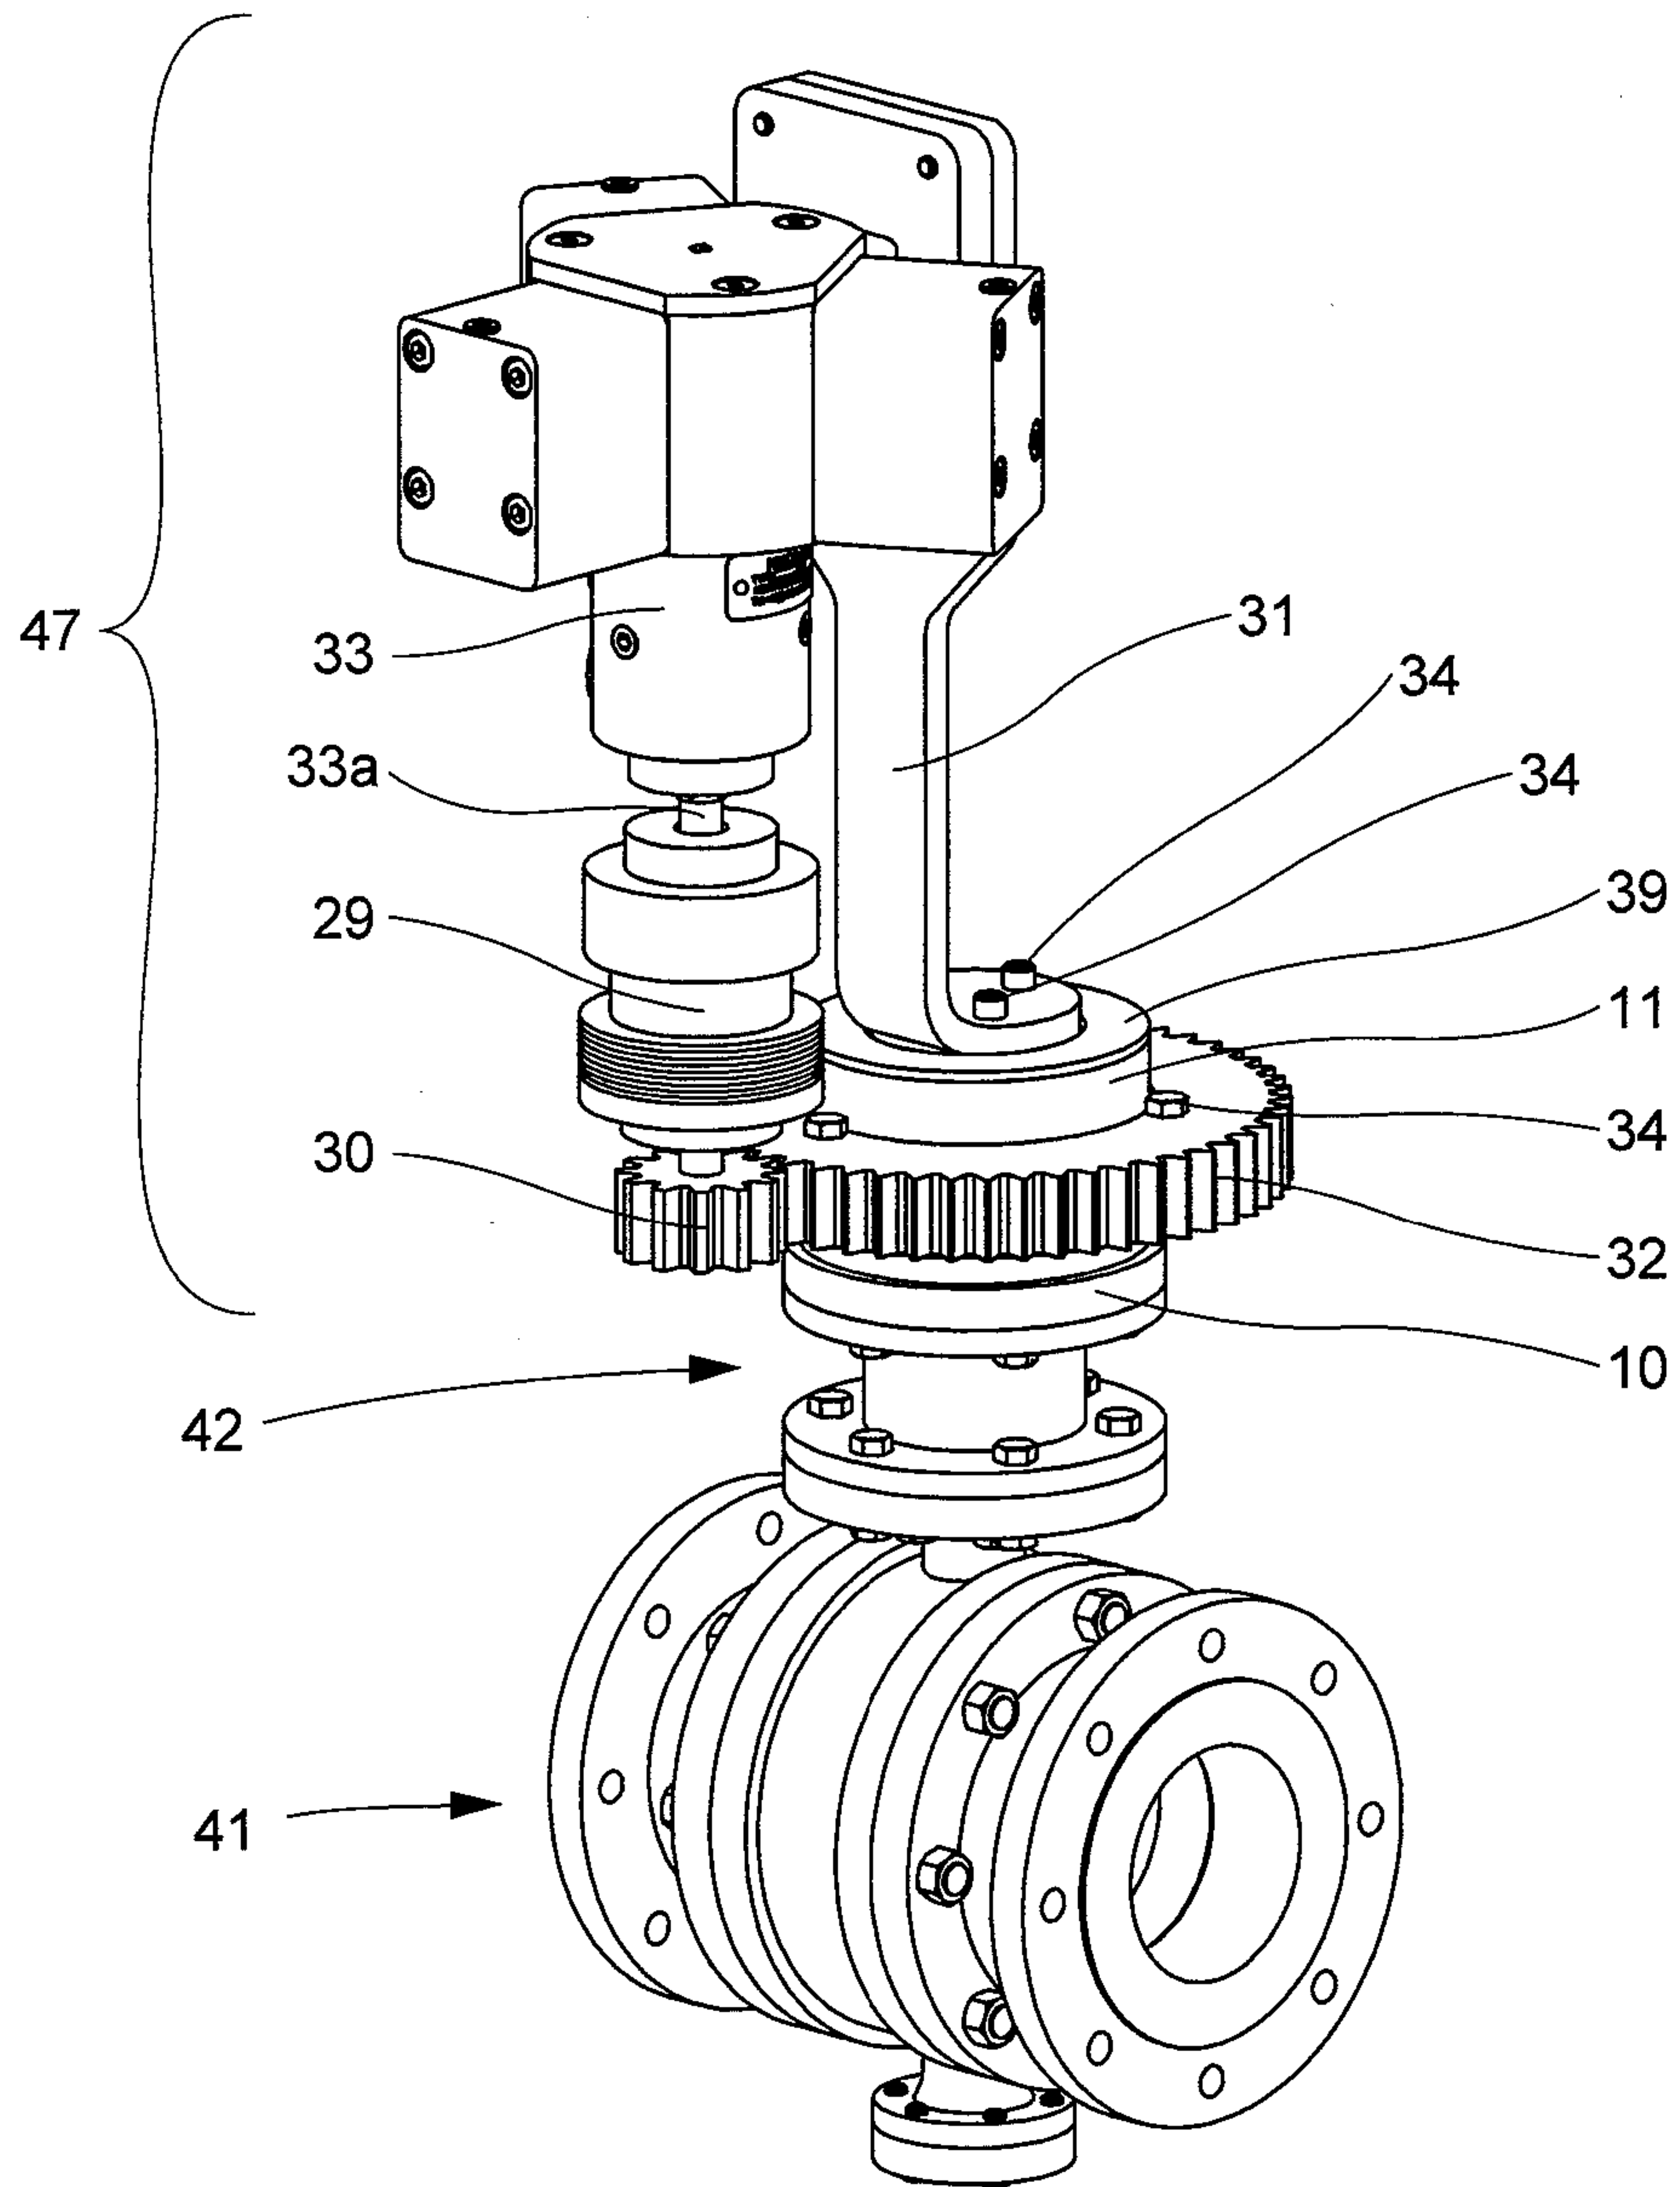


FIG. 19

19/30

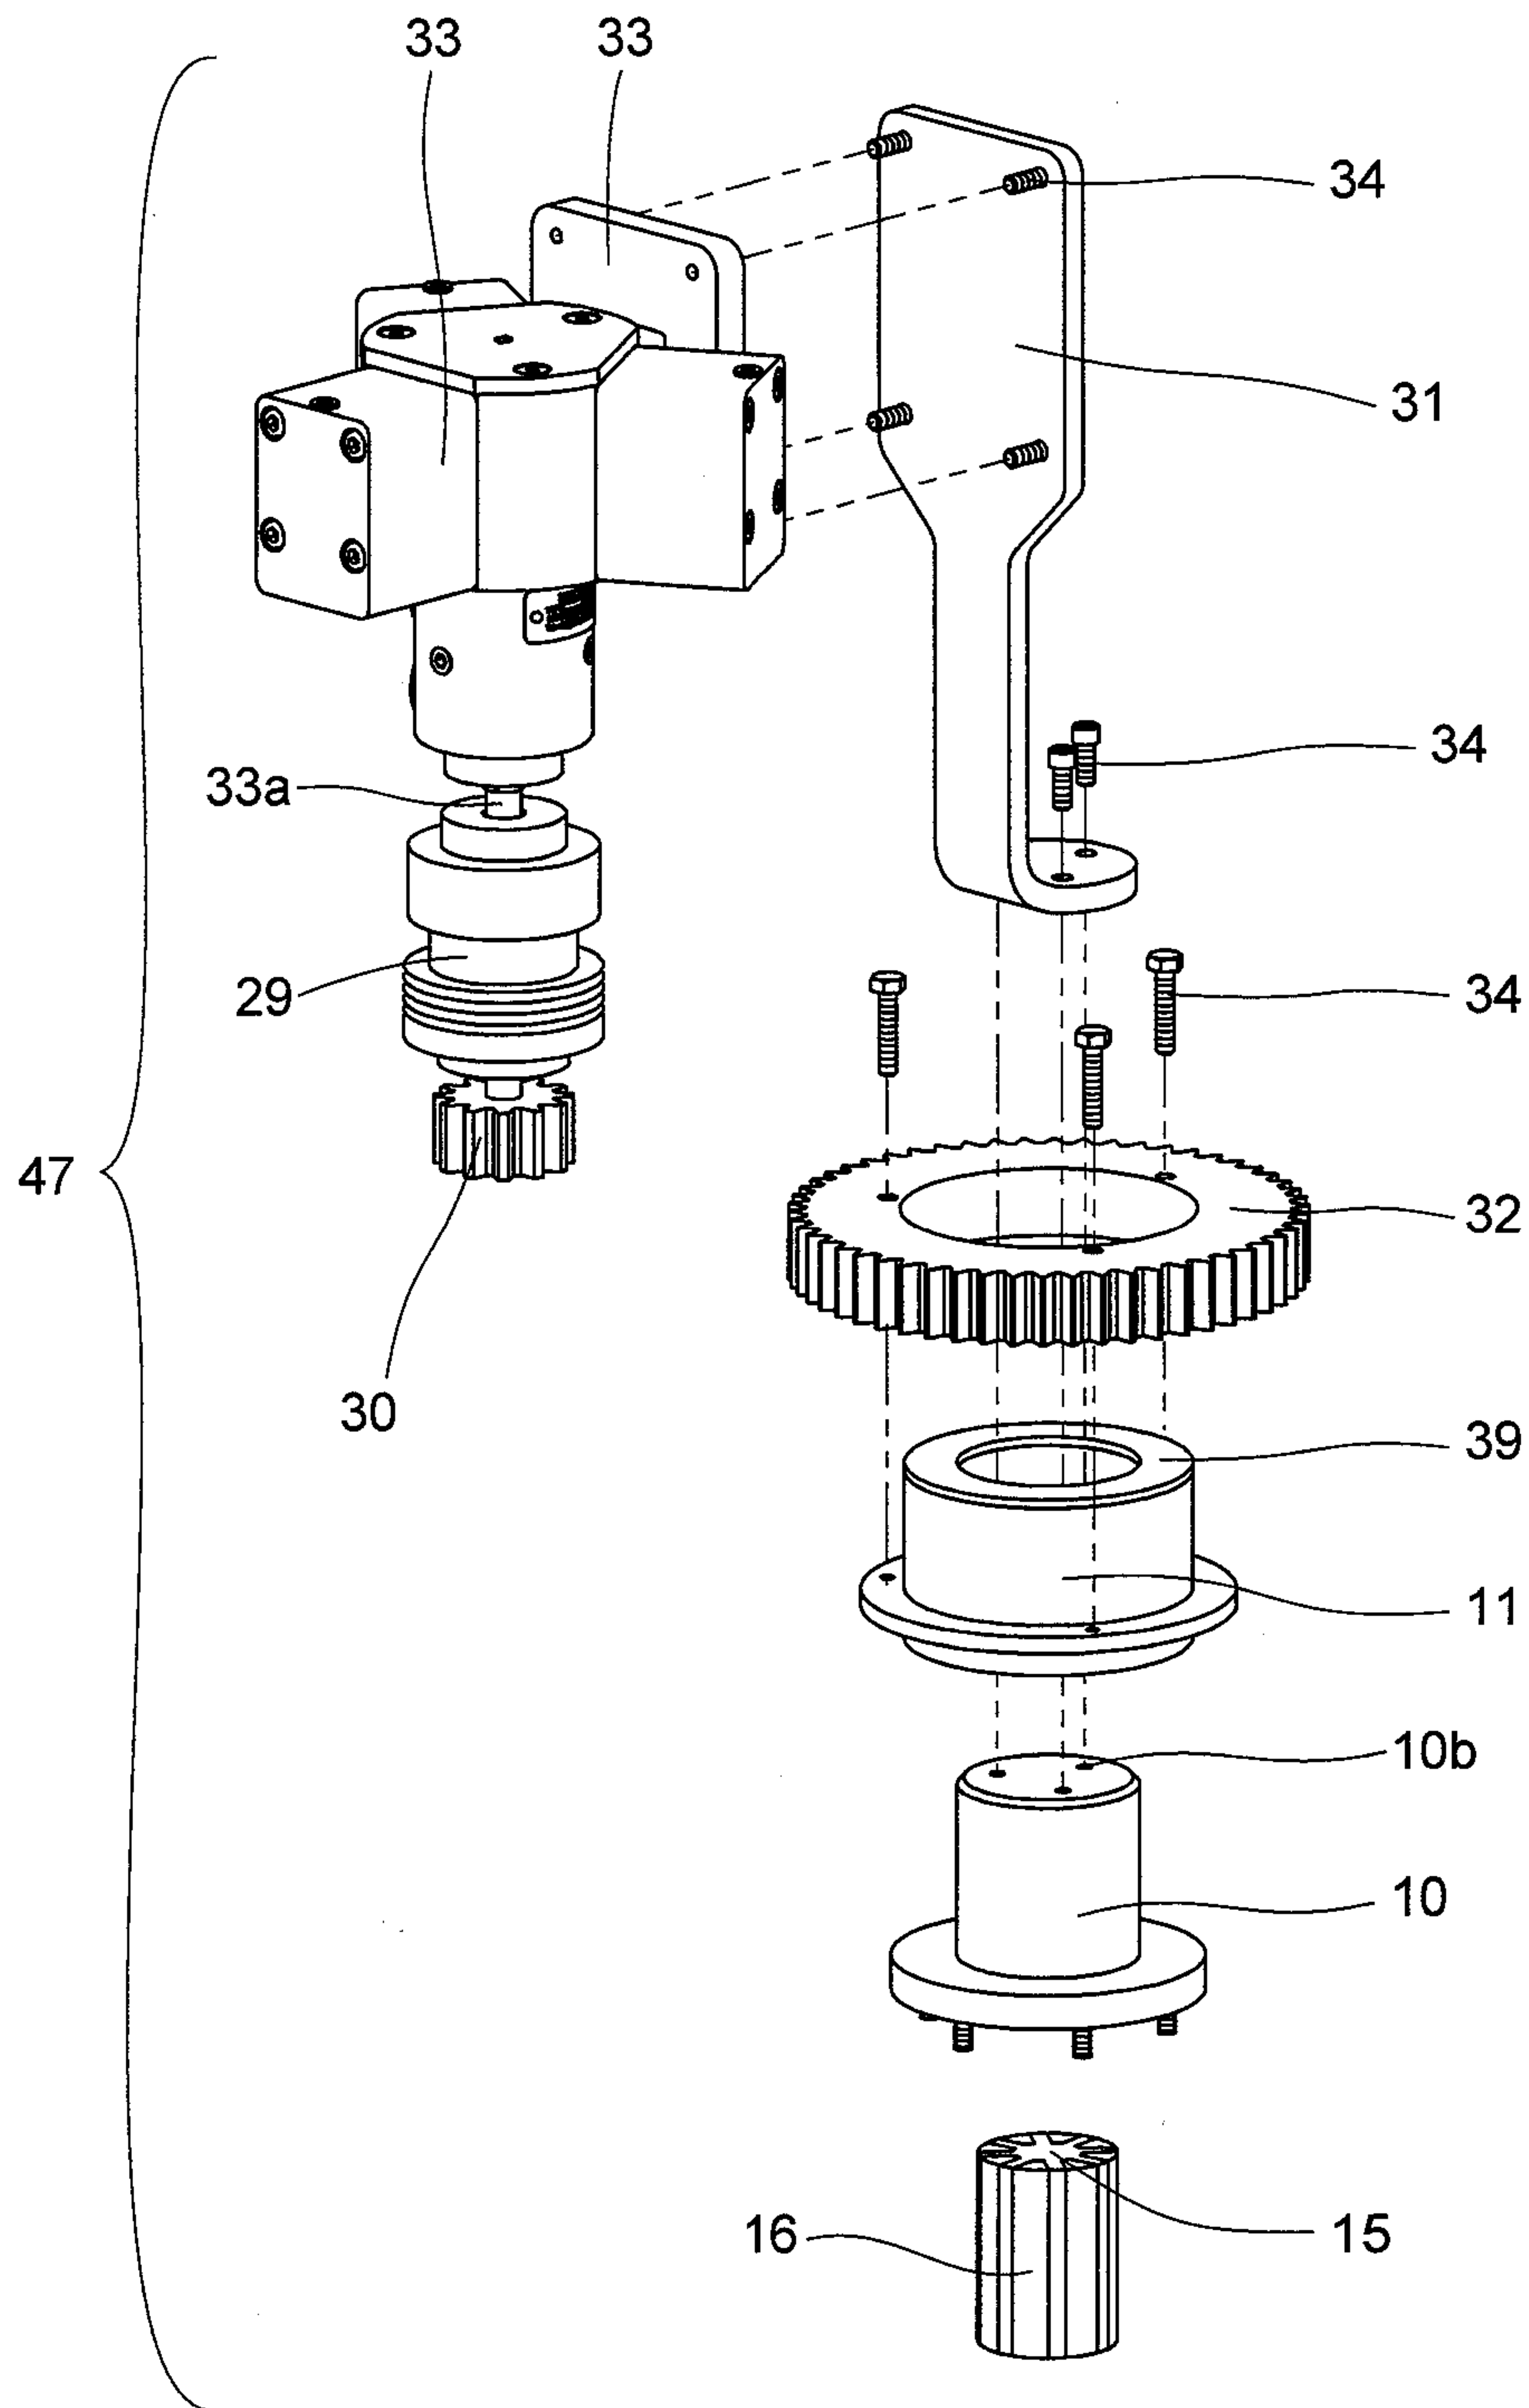


FIG. 20

20/30

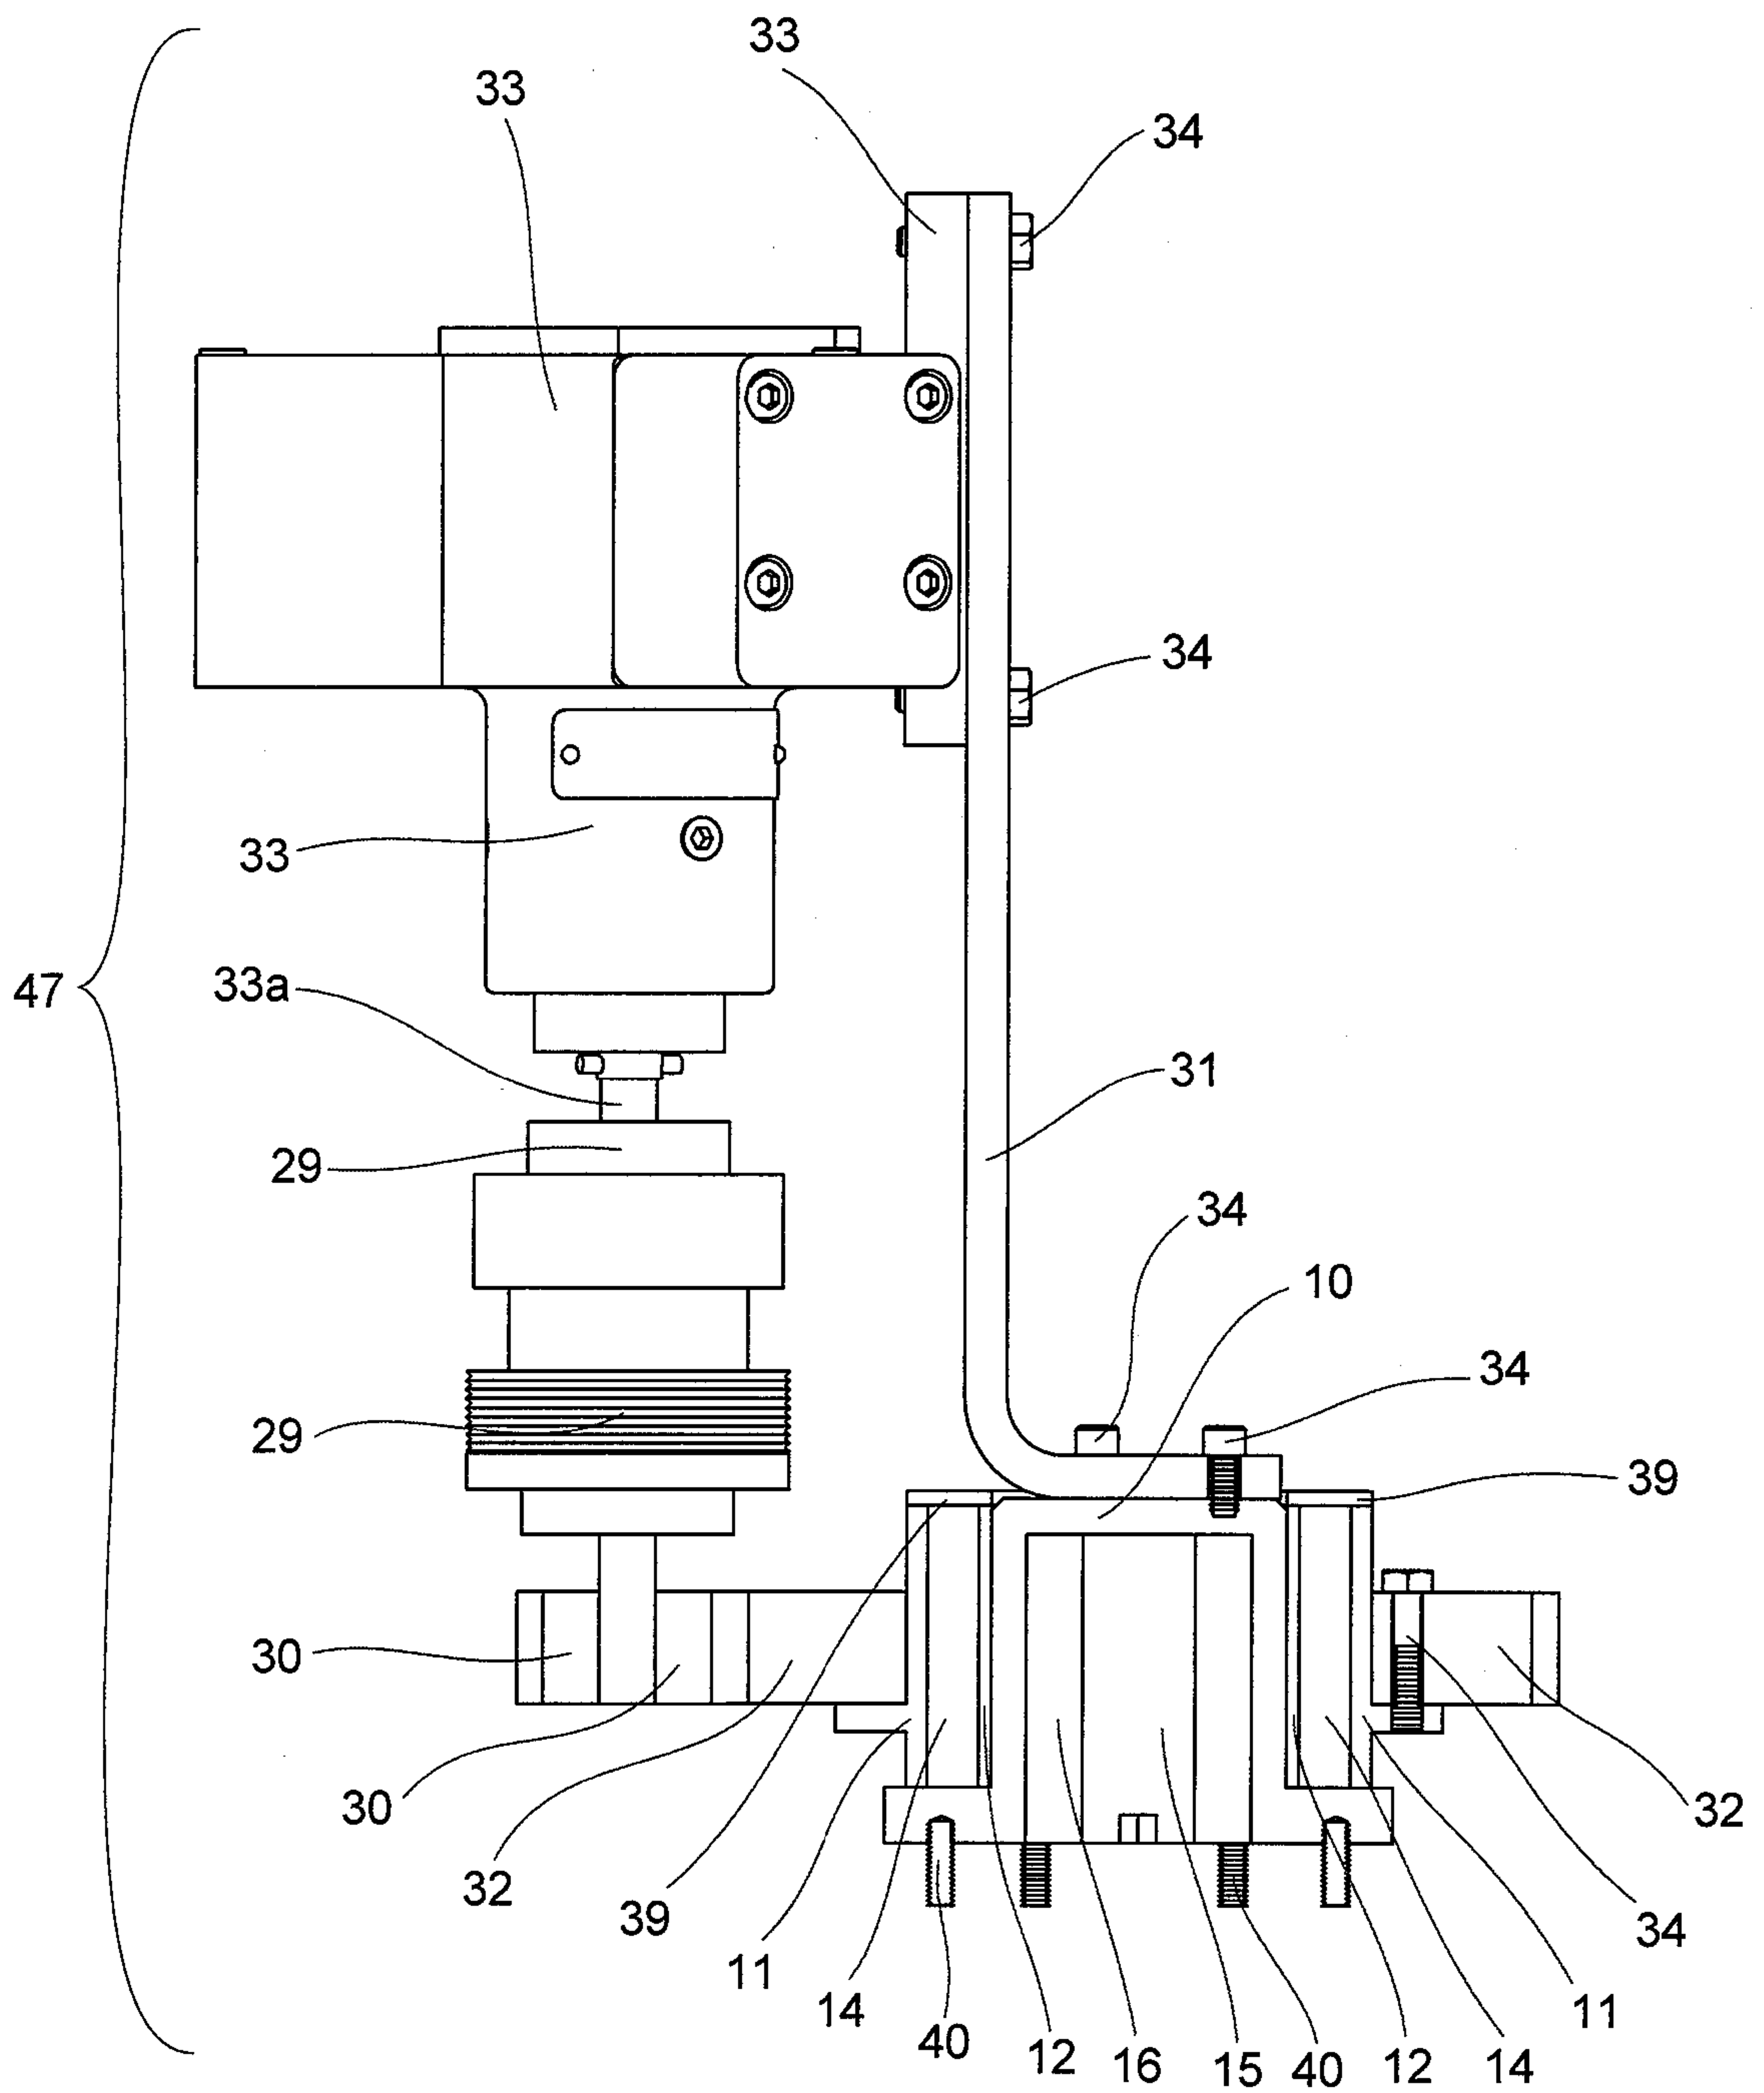


FIG. 21

21/30

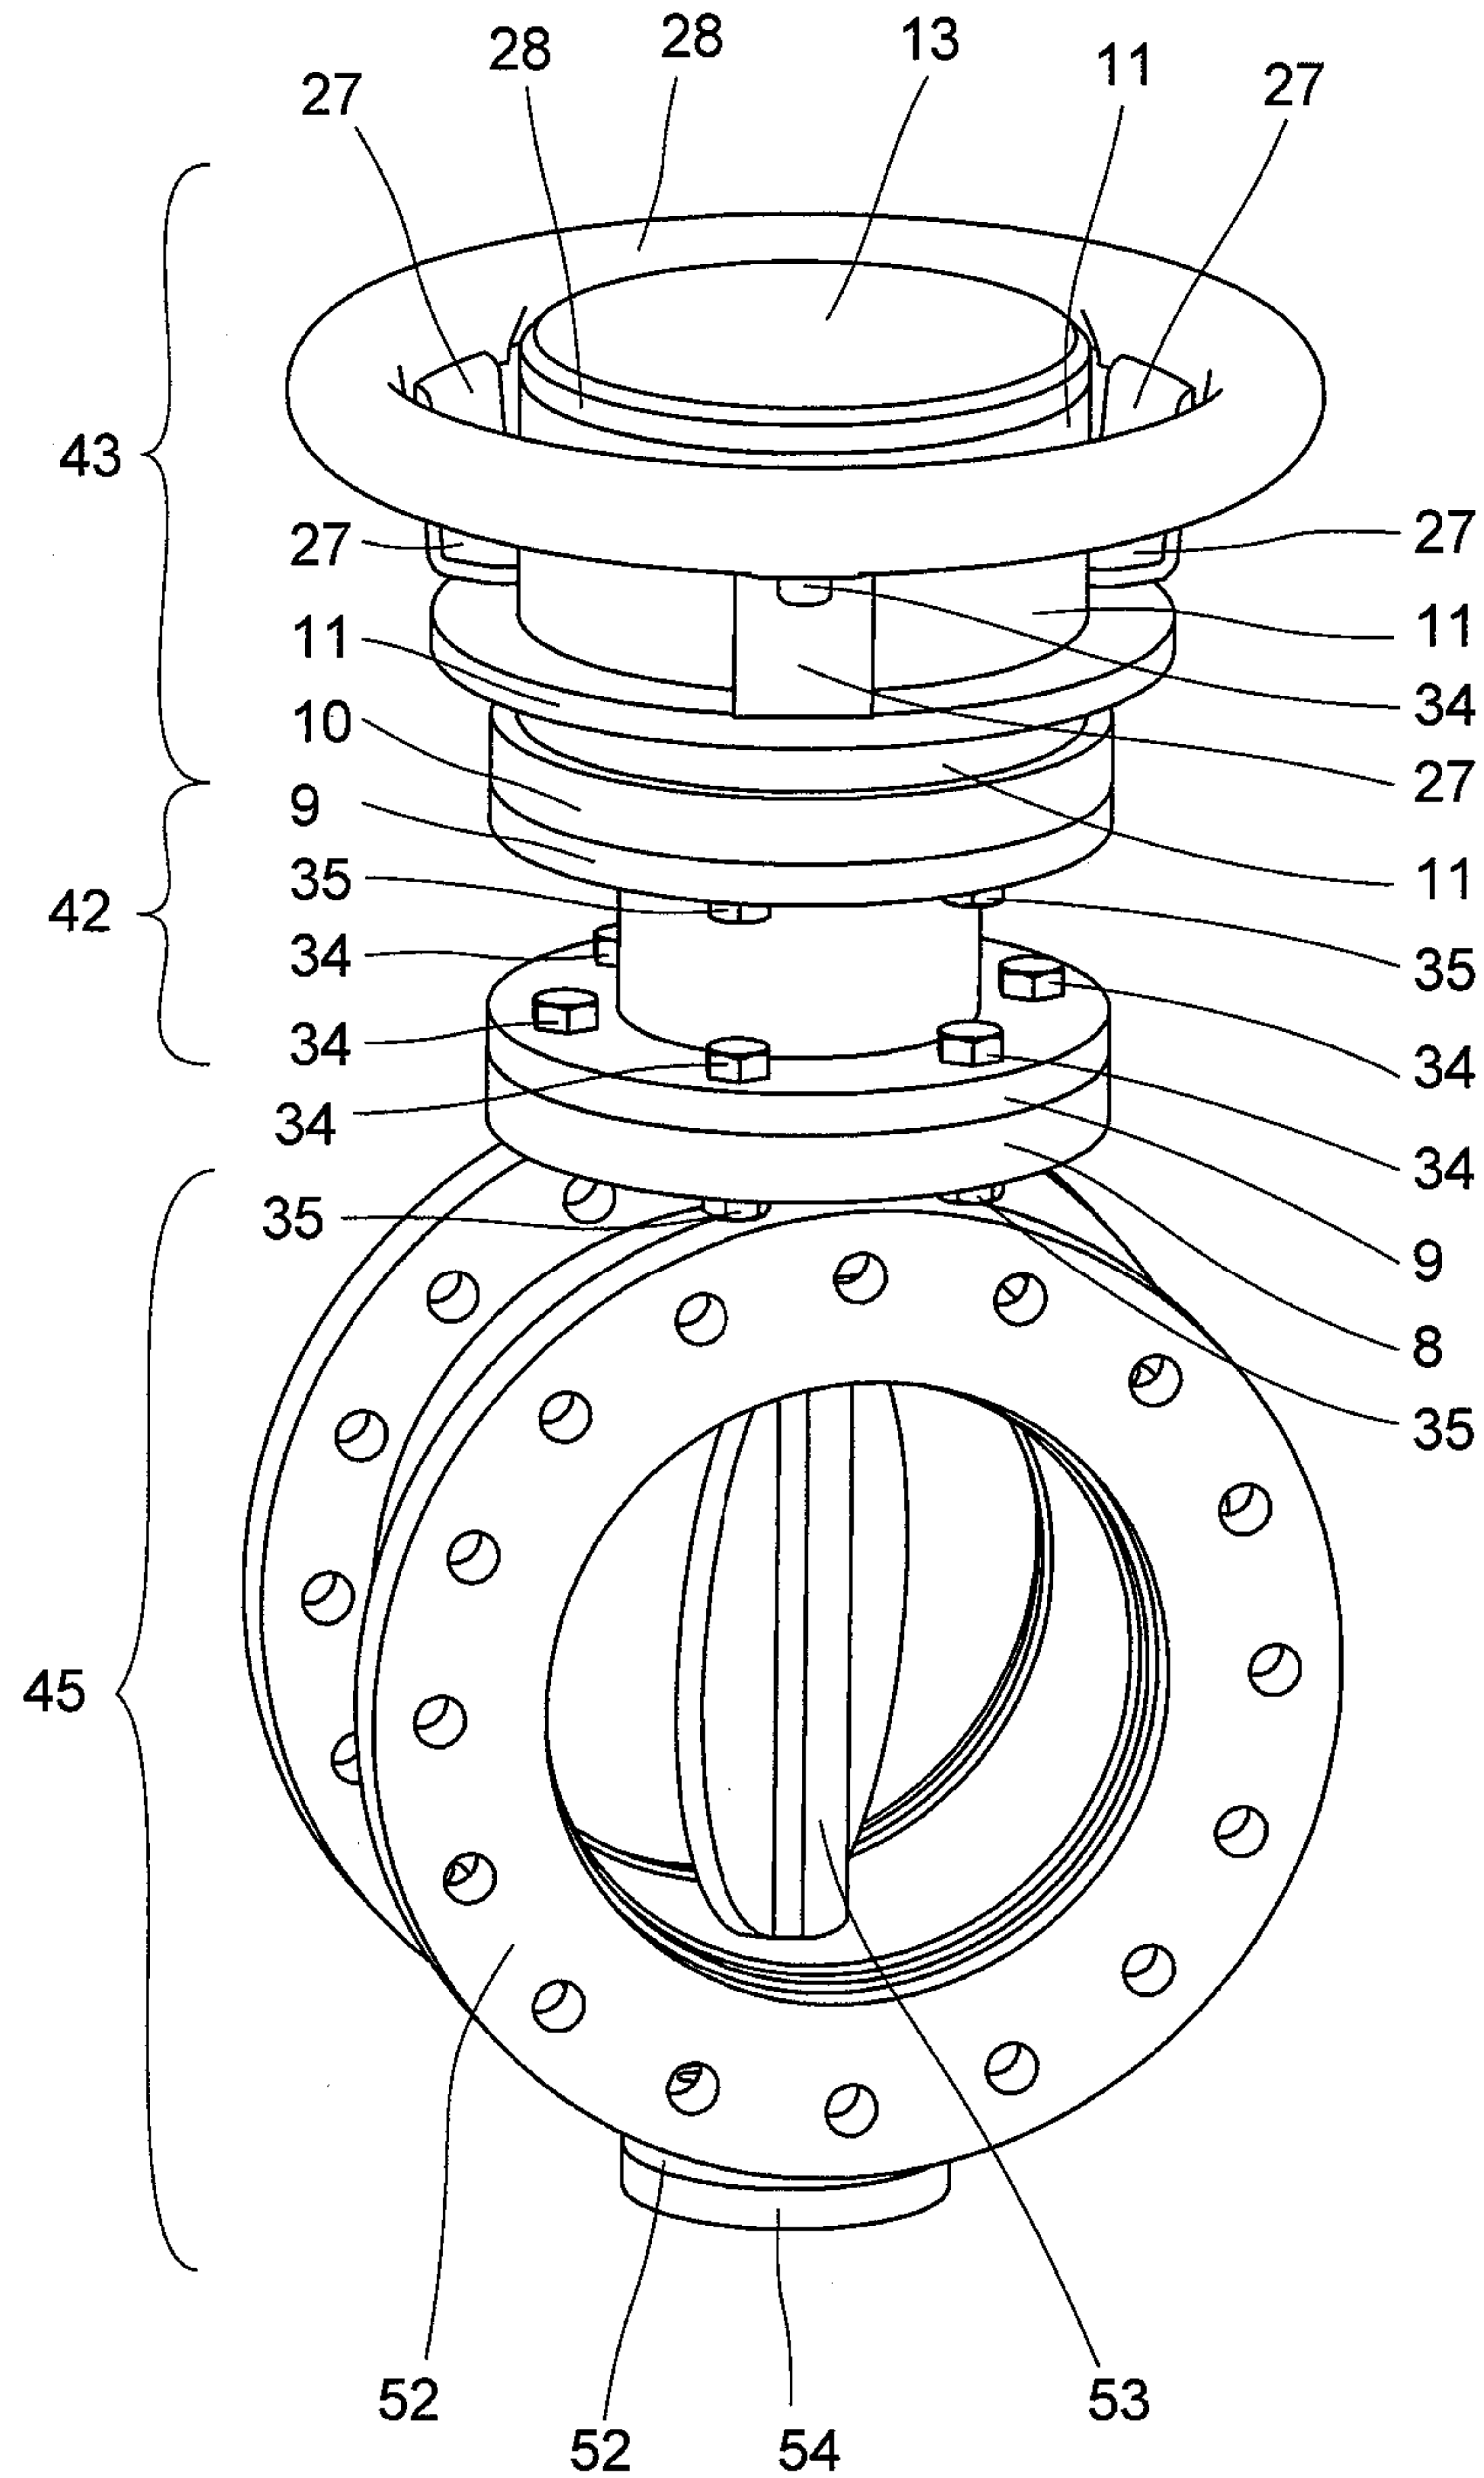


FIG. 22

23/30

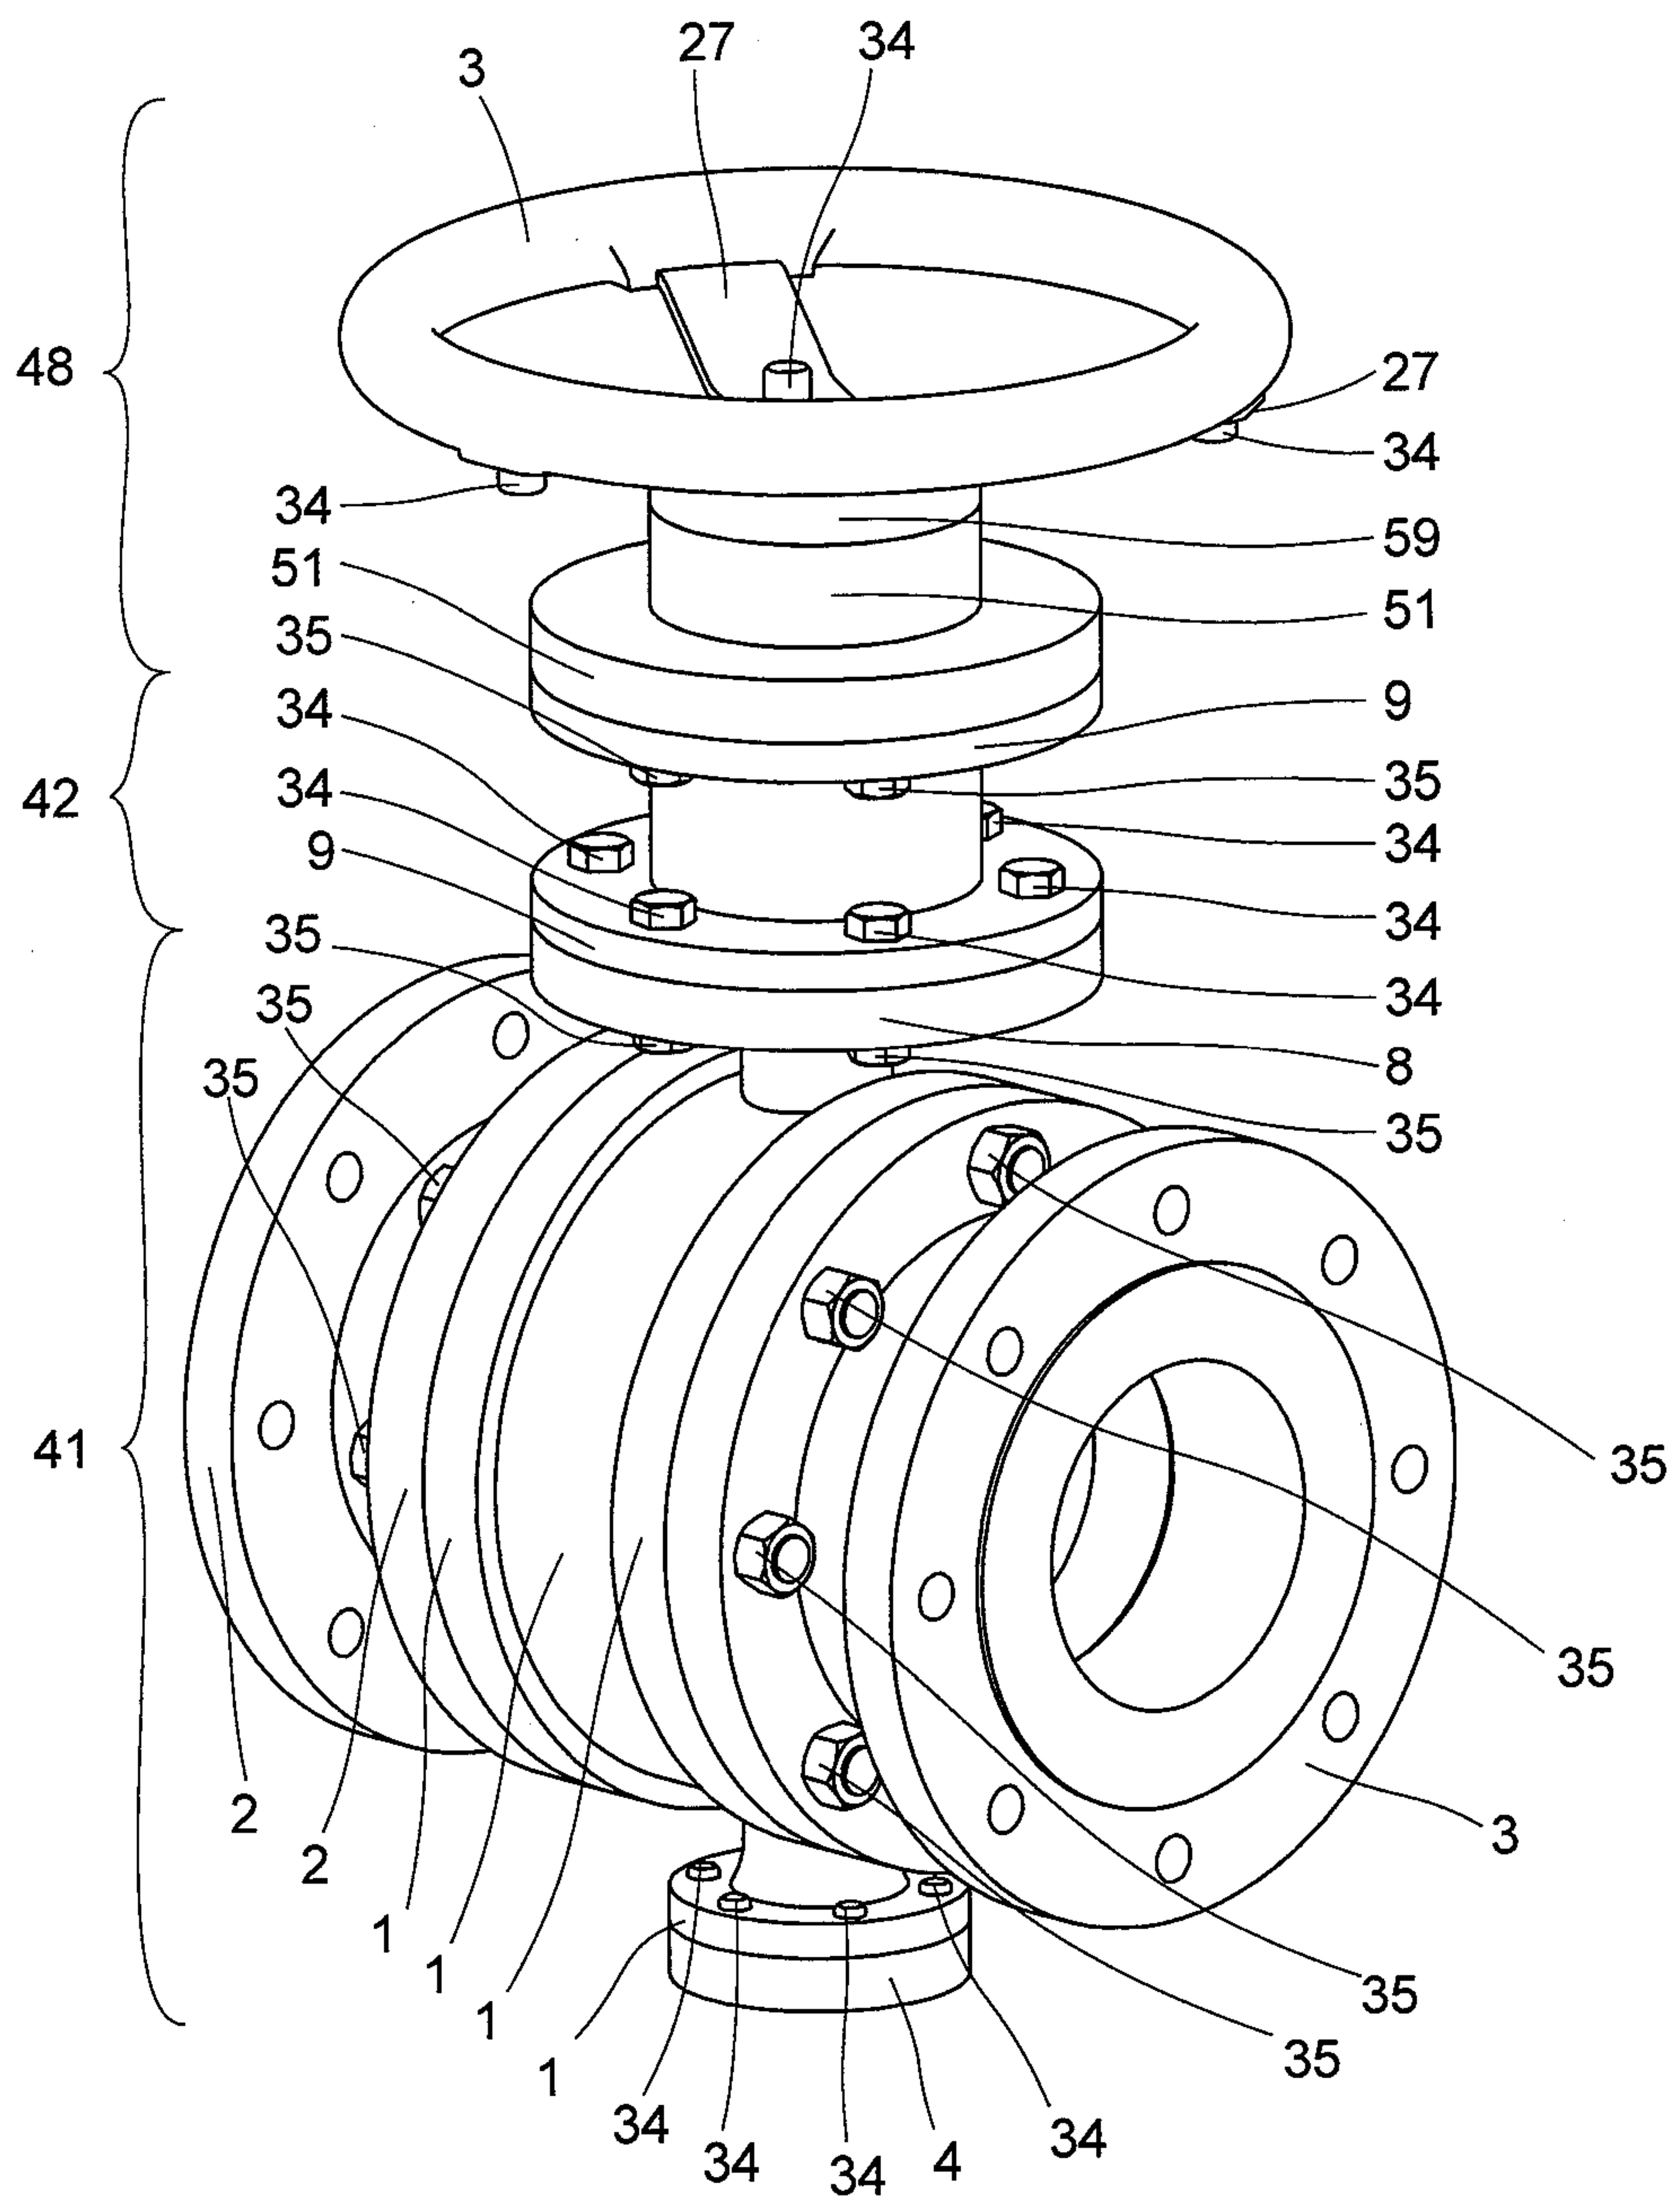


FIG. 24

24/30

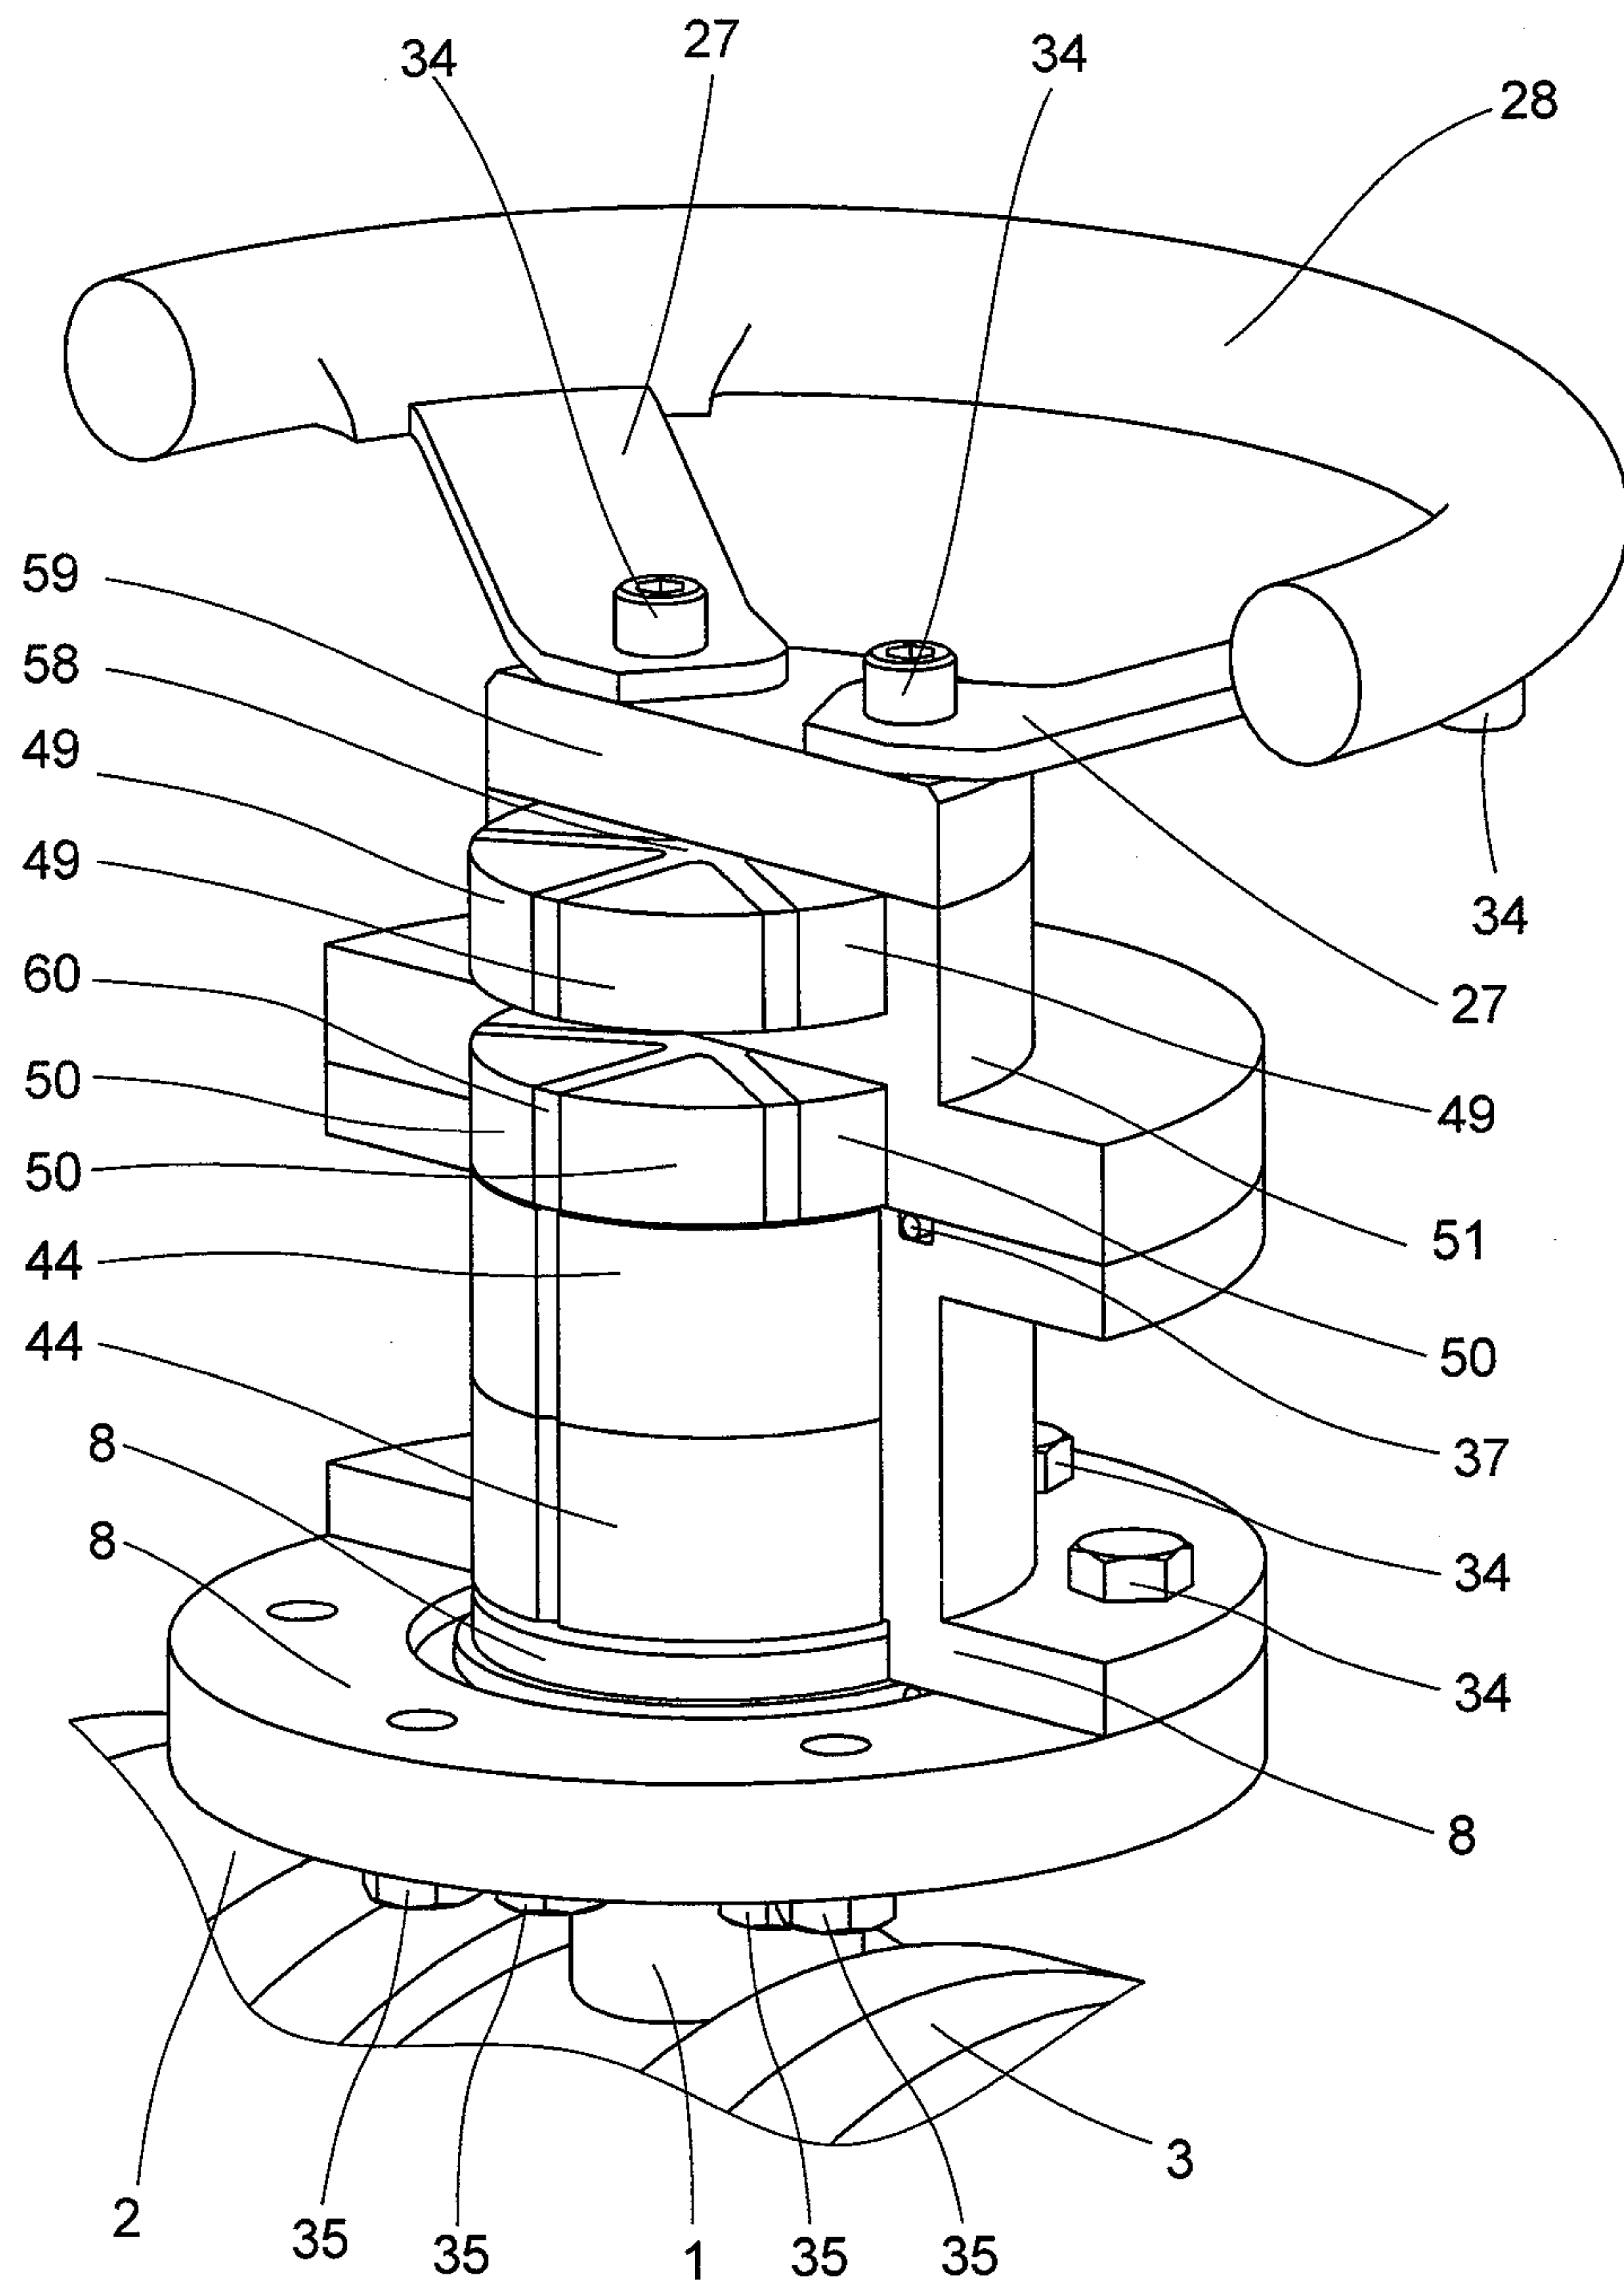


FIG. 25

25/30

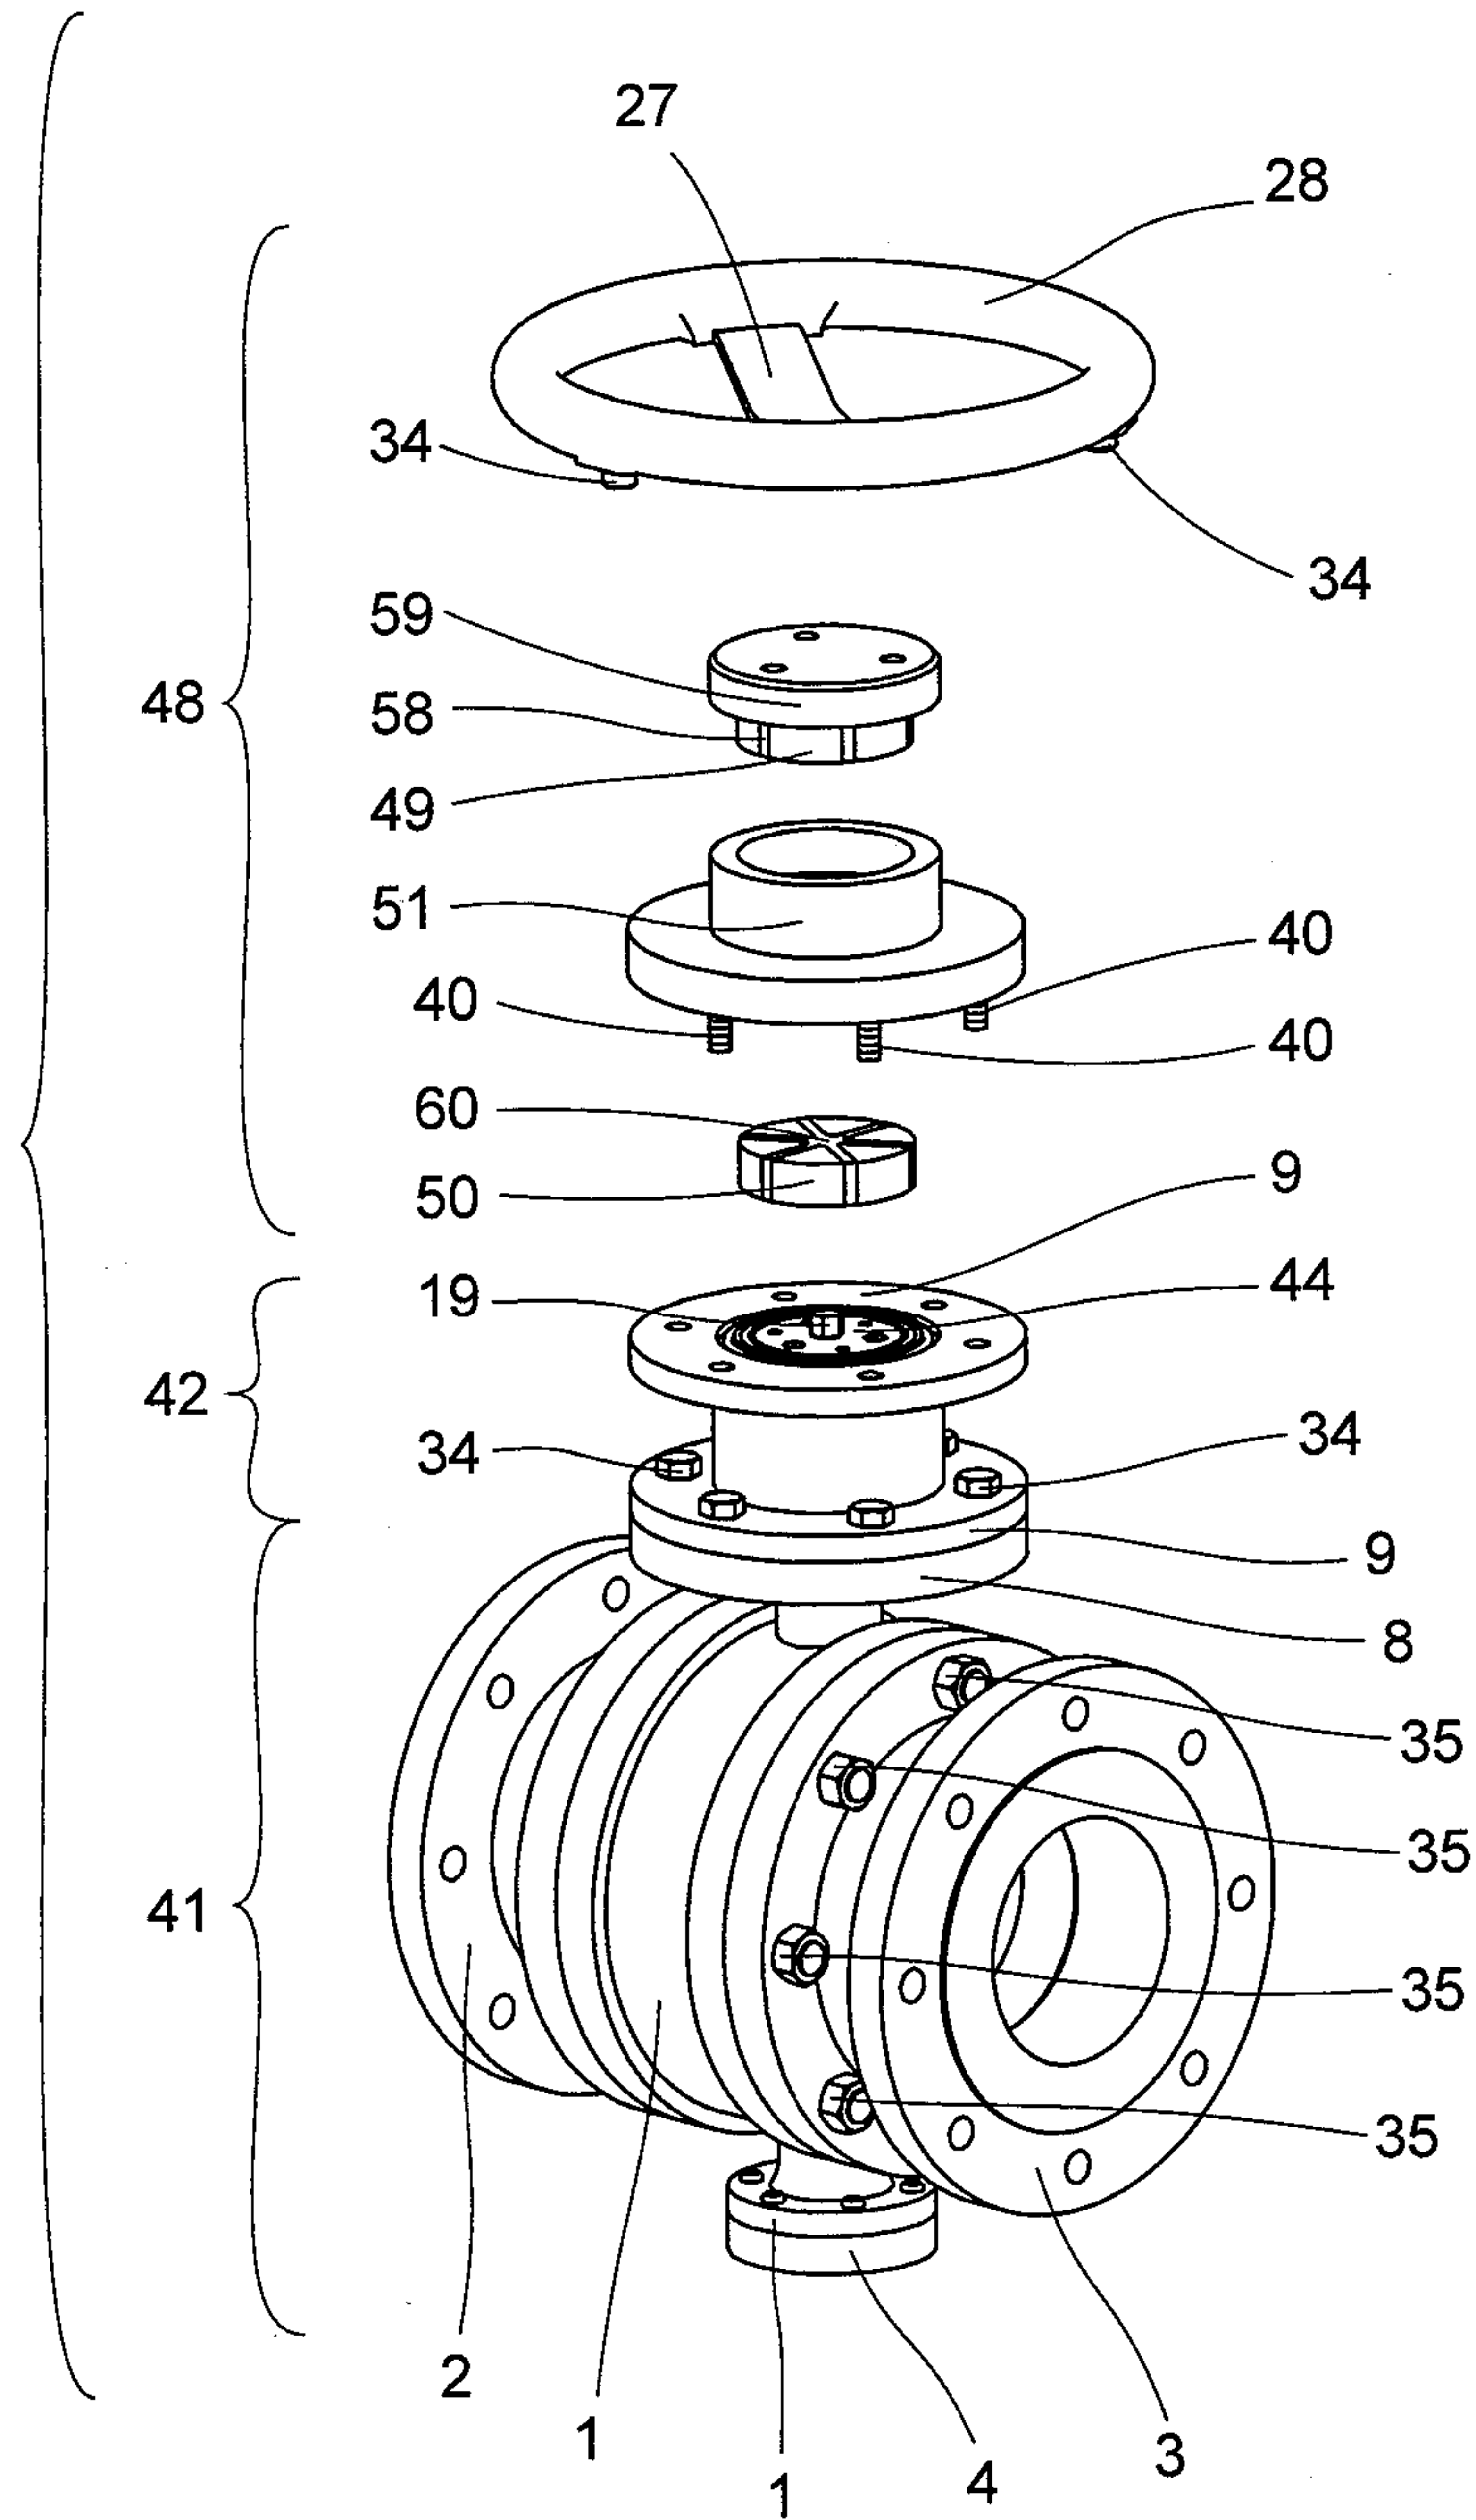


FIG. 26

26/30

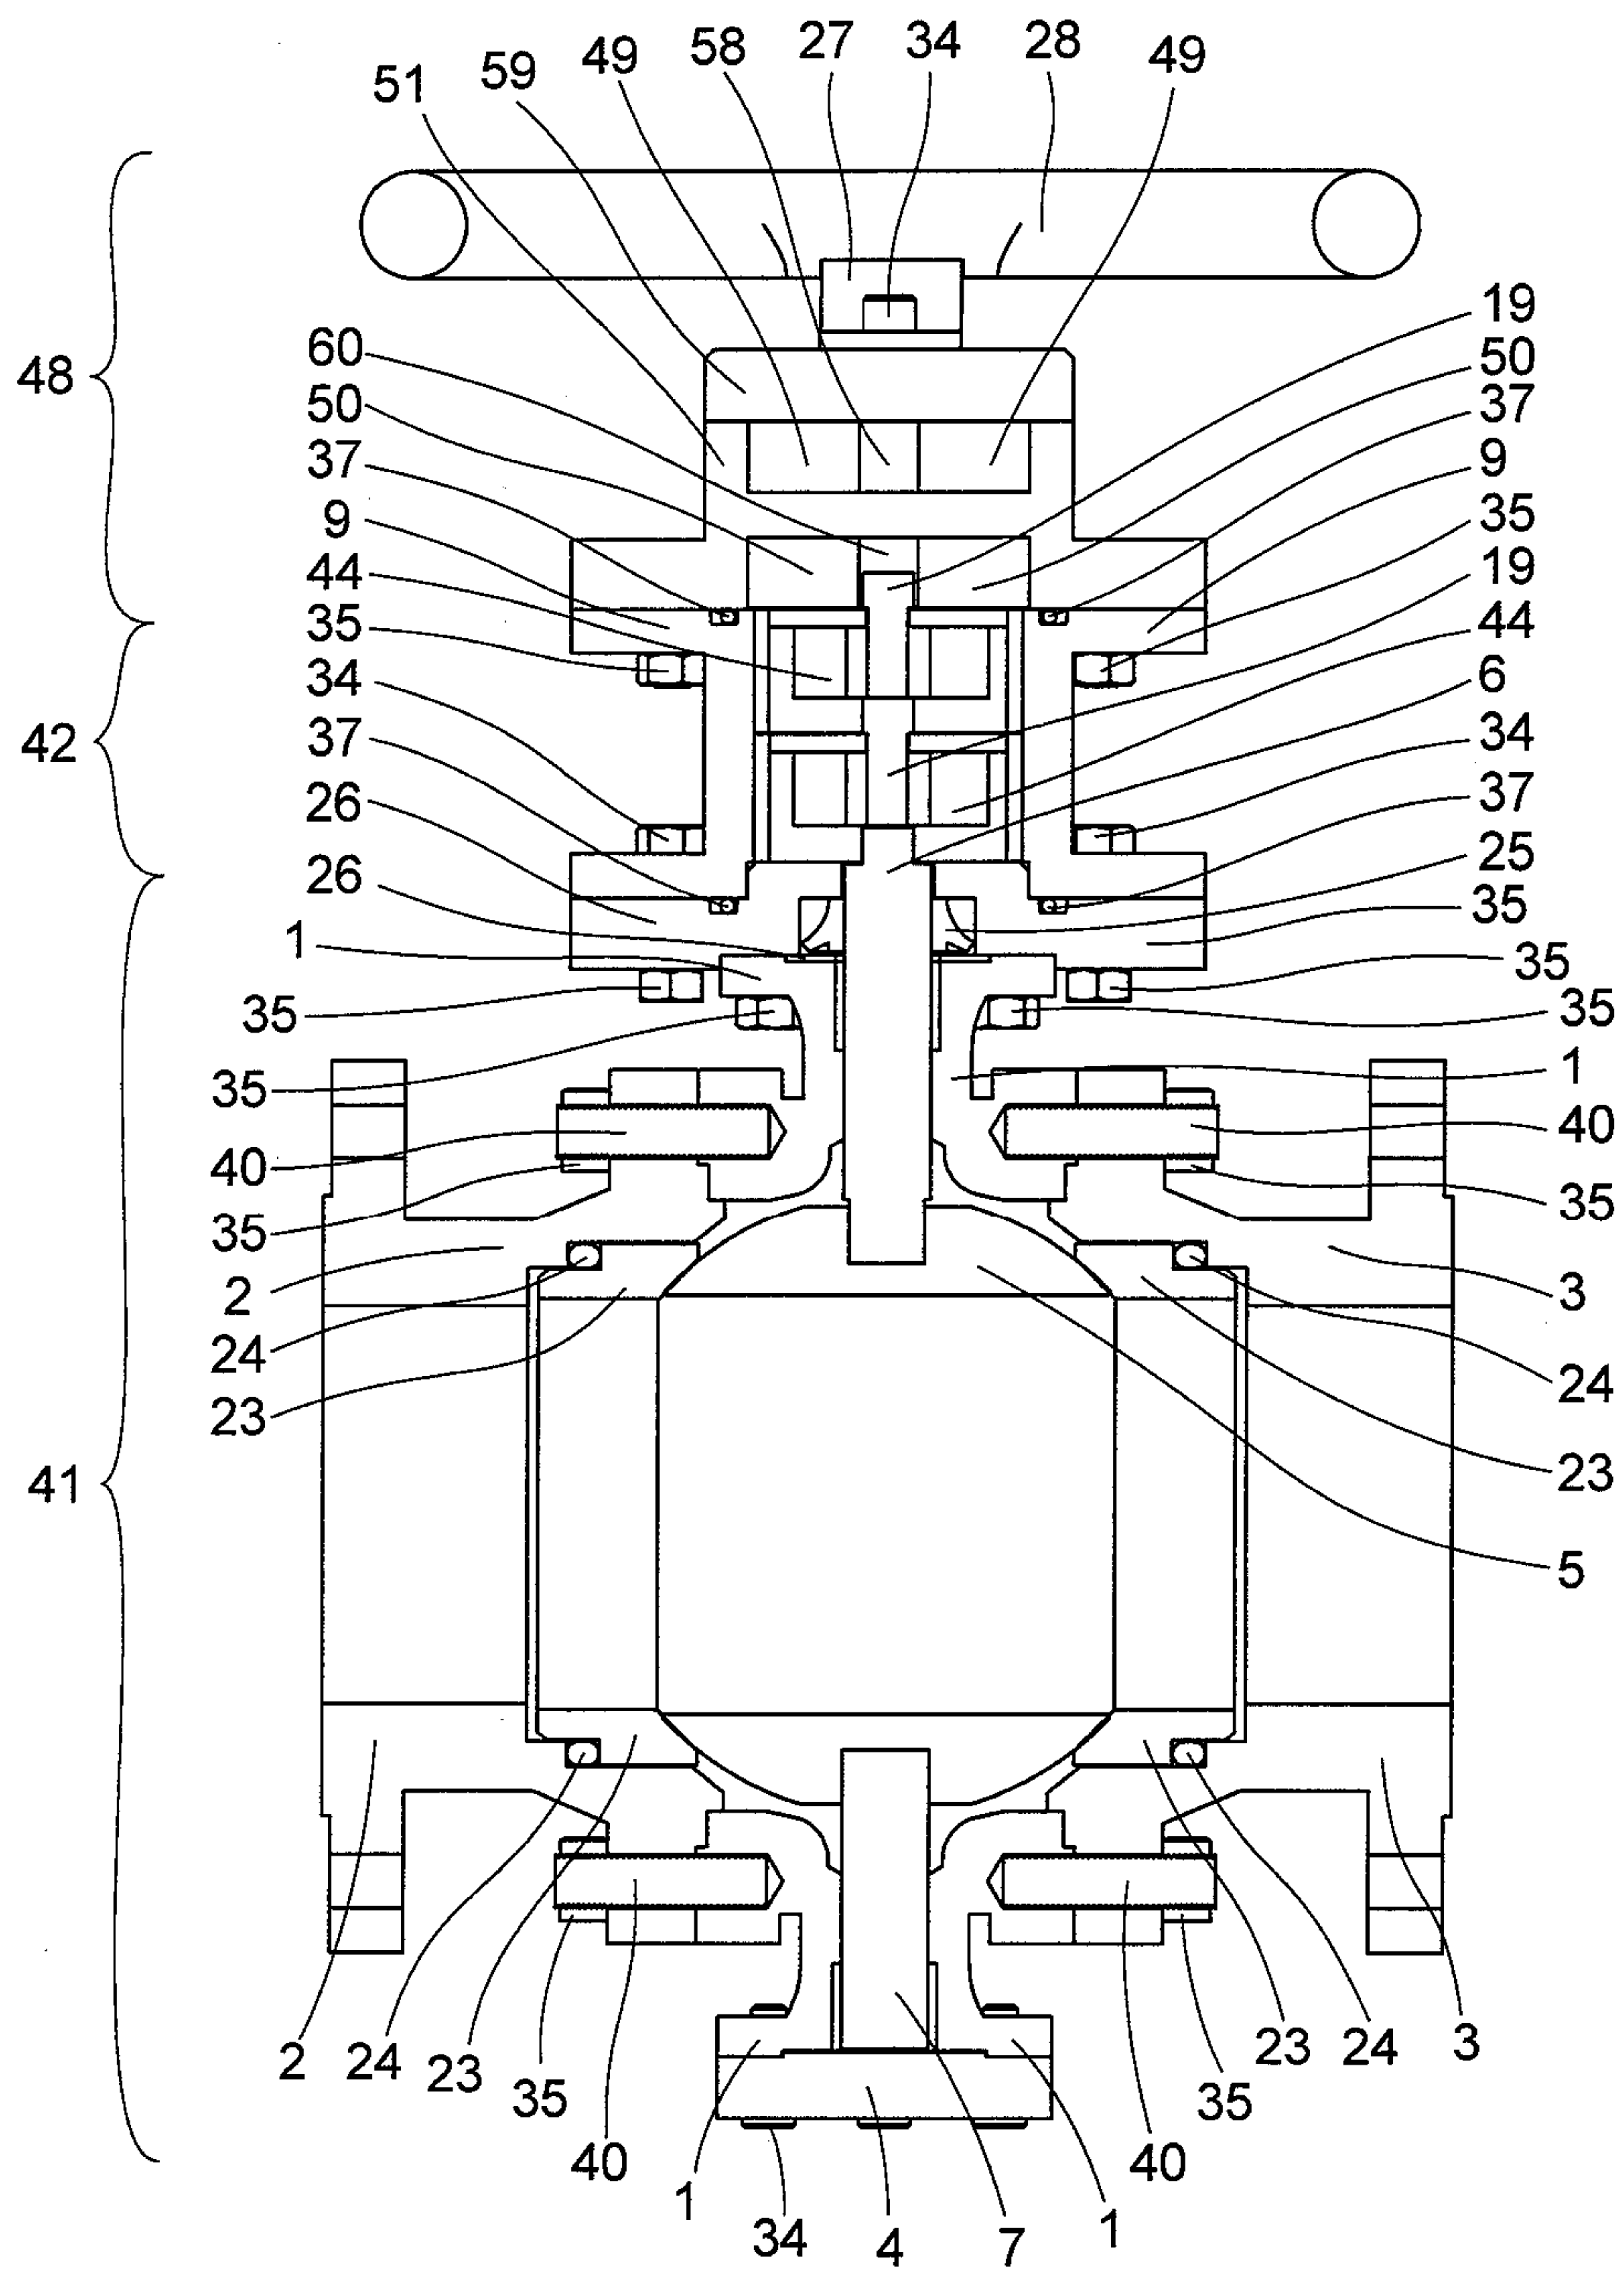


FIG. 27

27/30

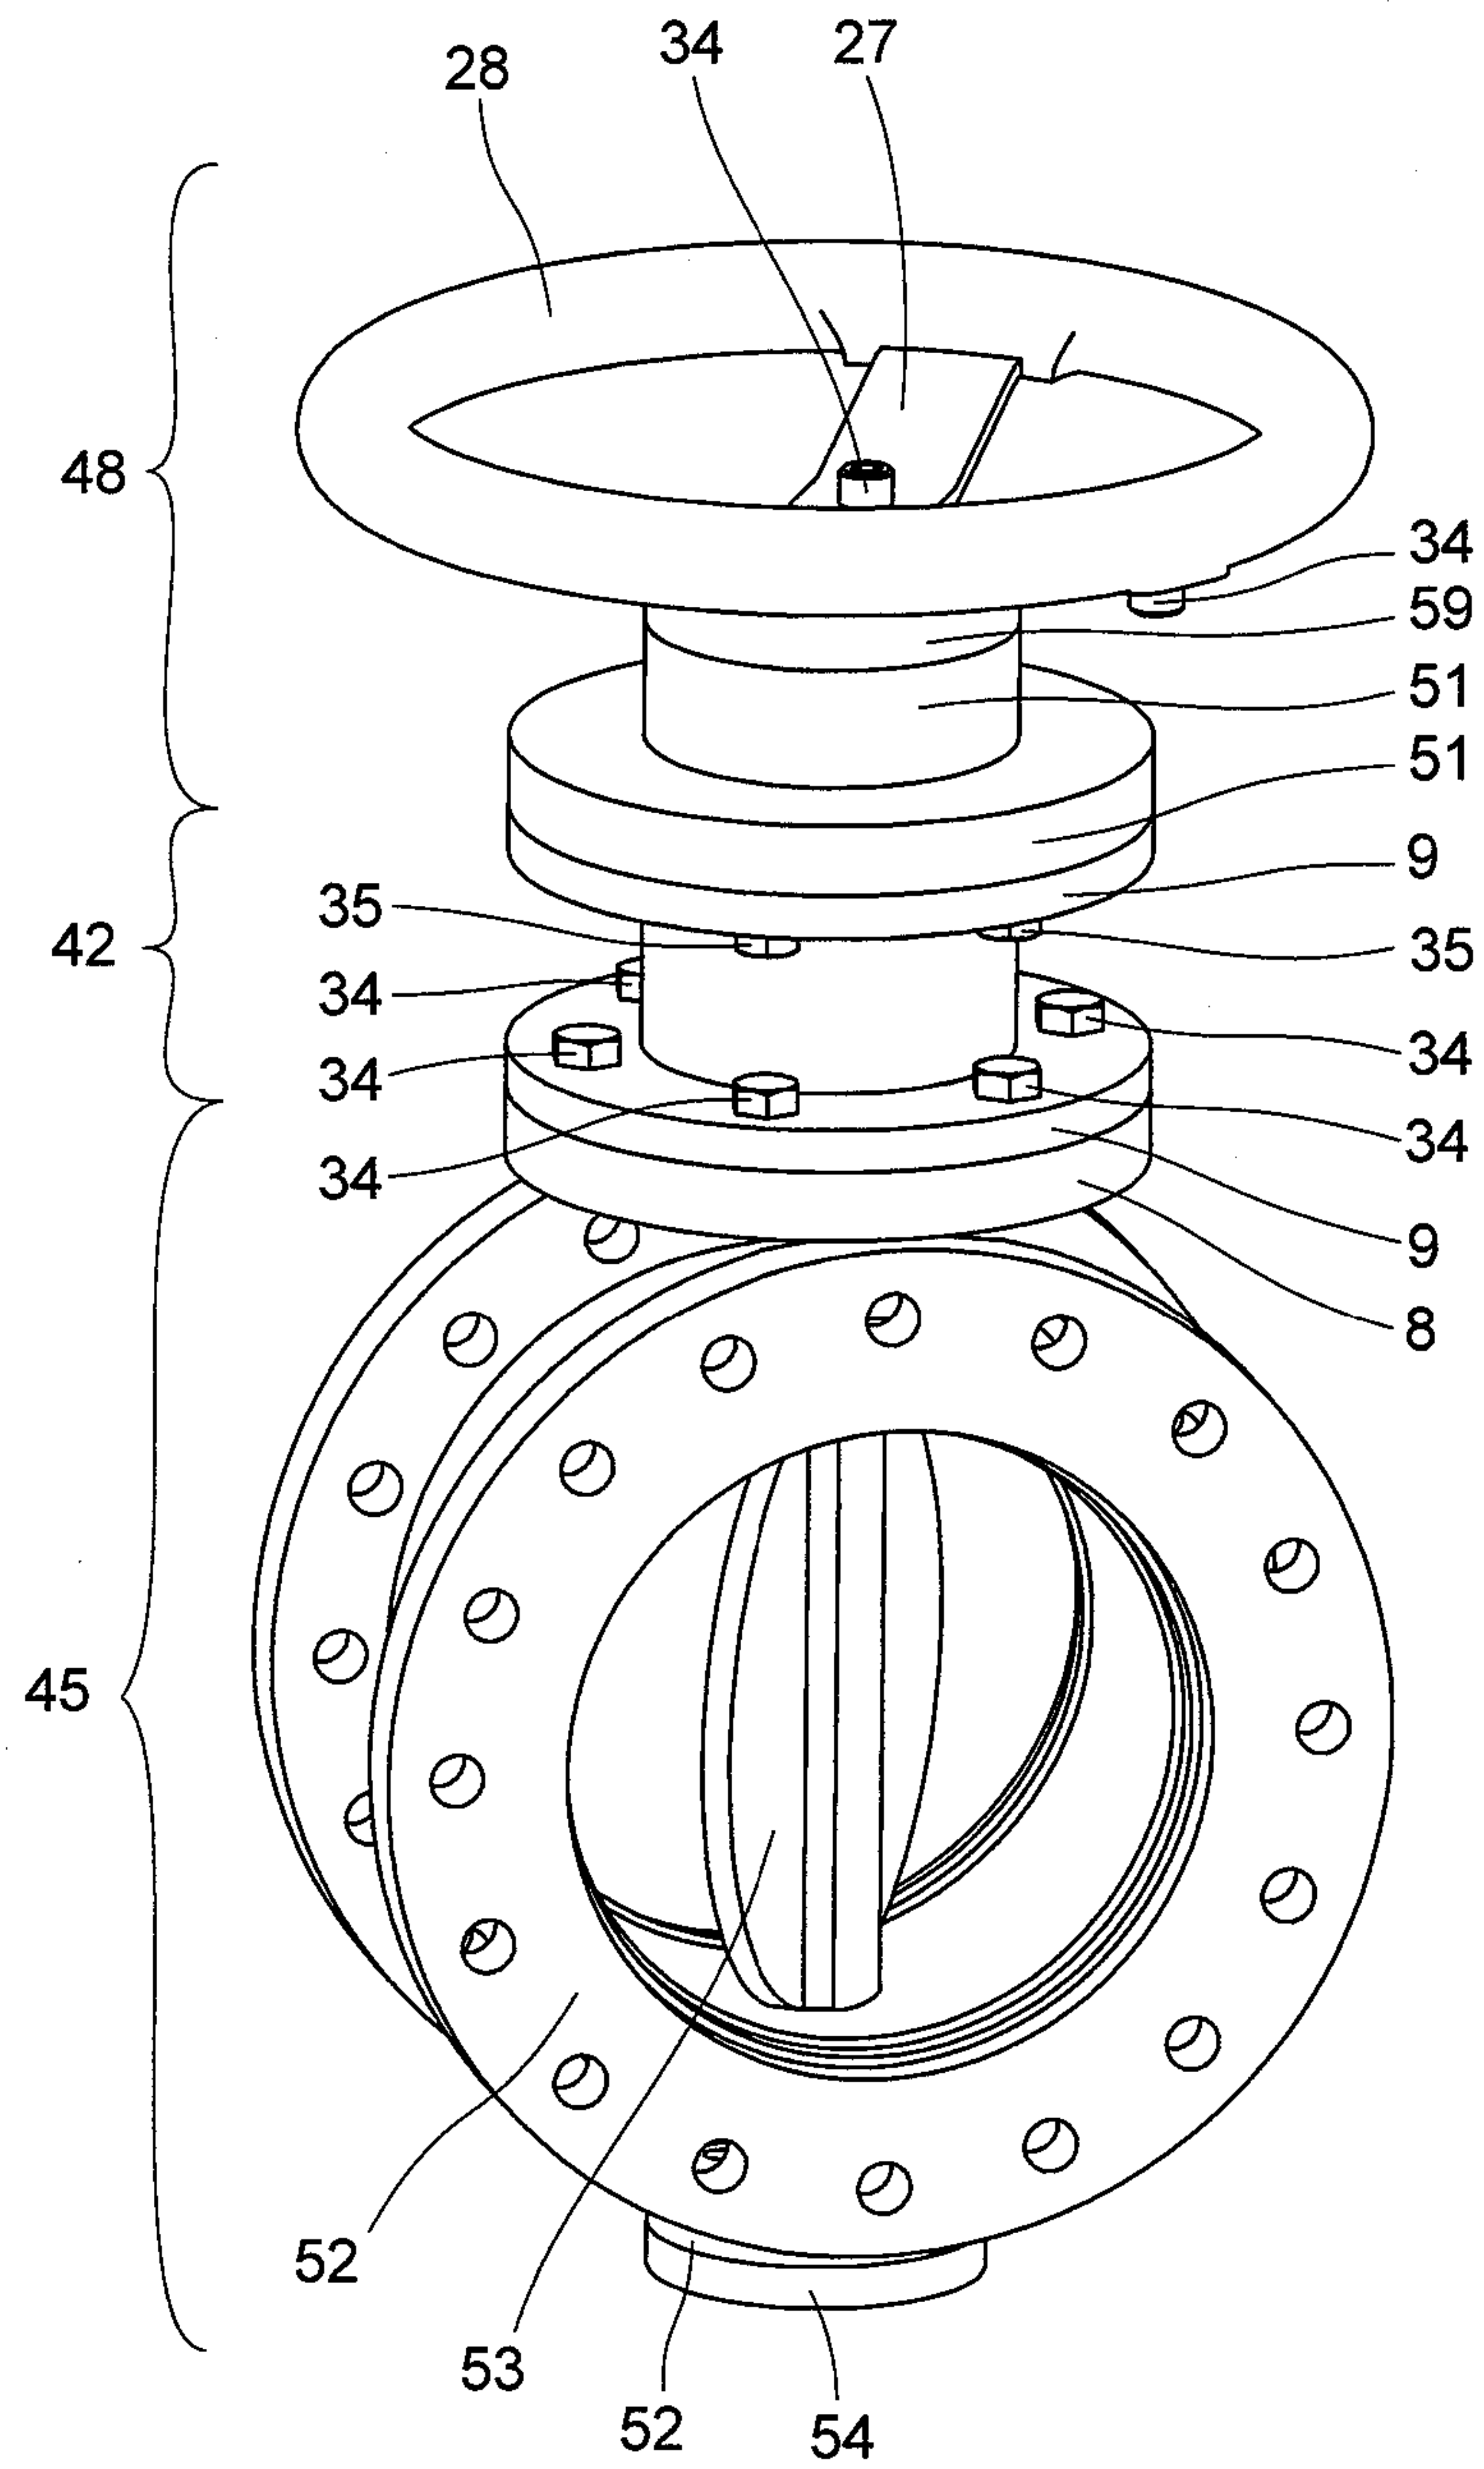


FIG. 28

28/30

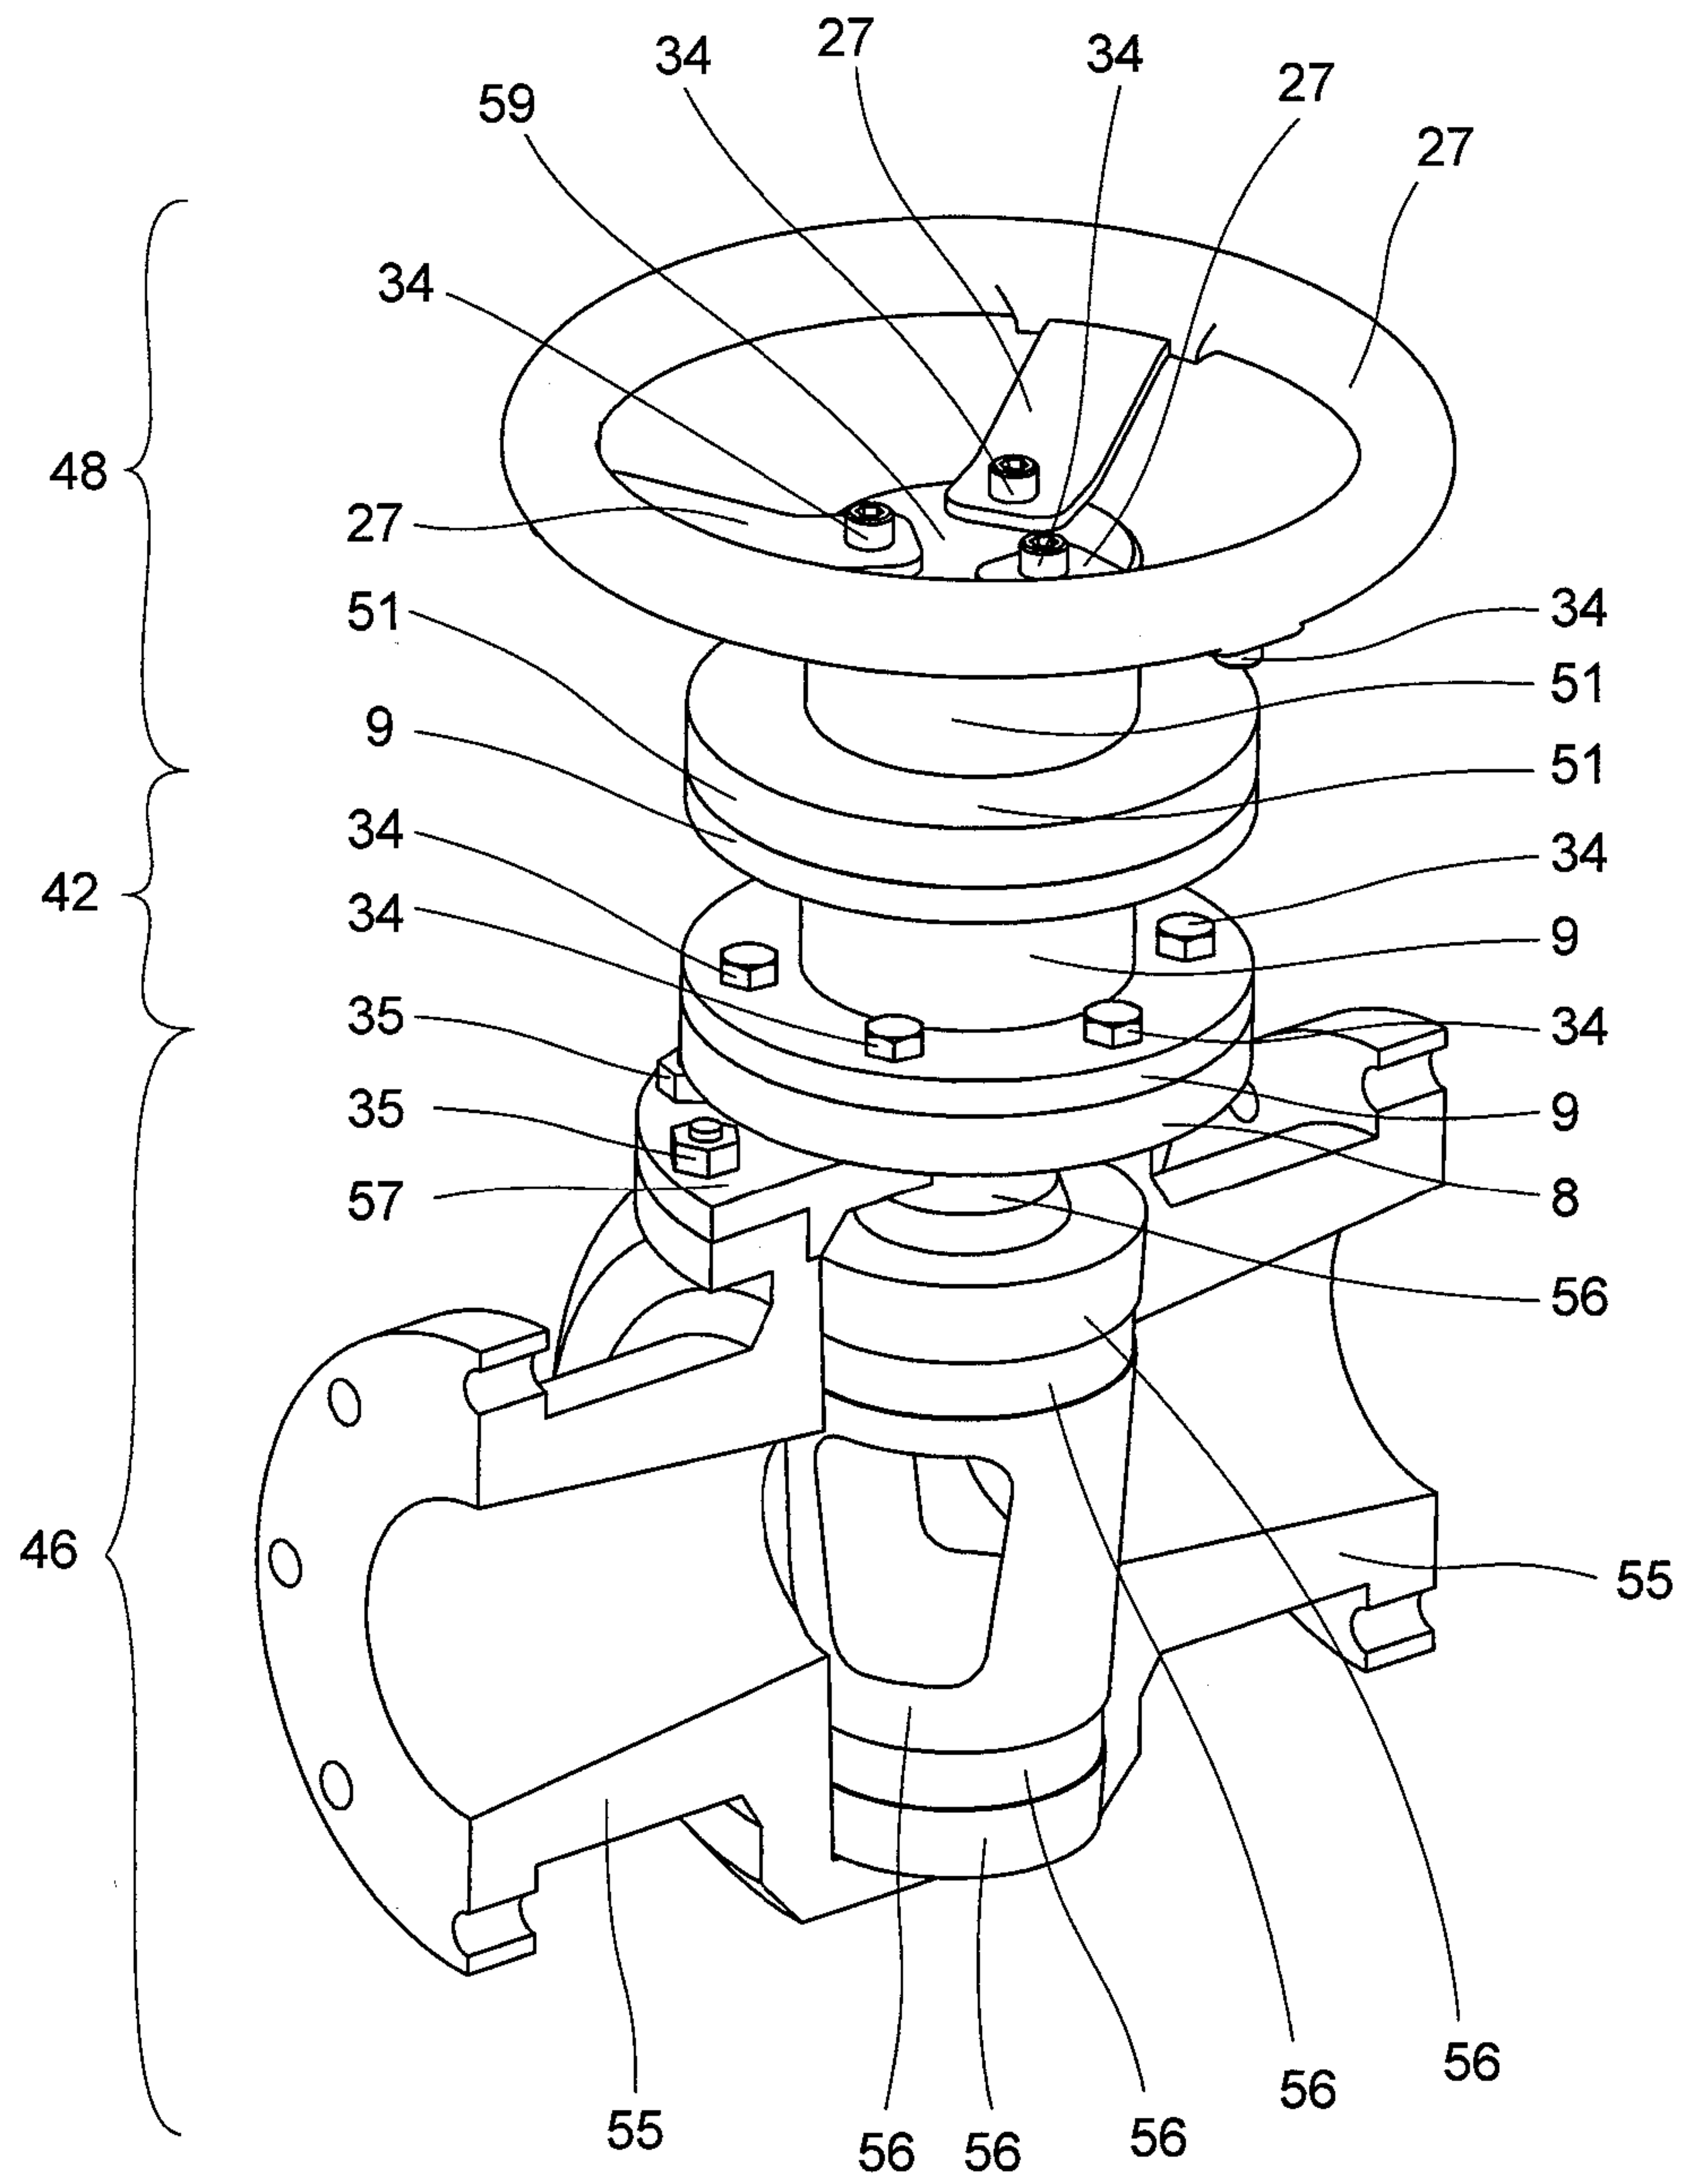


FIG. 29

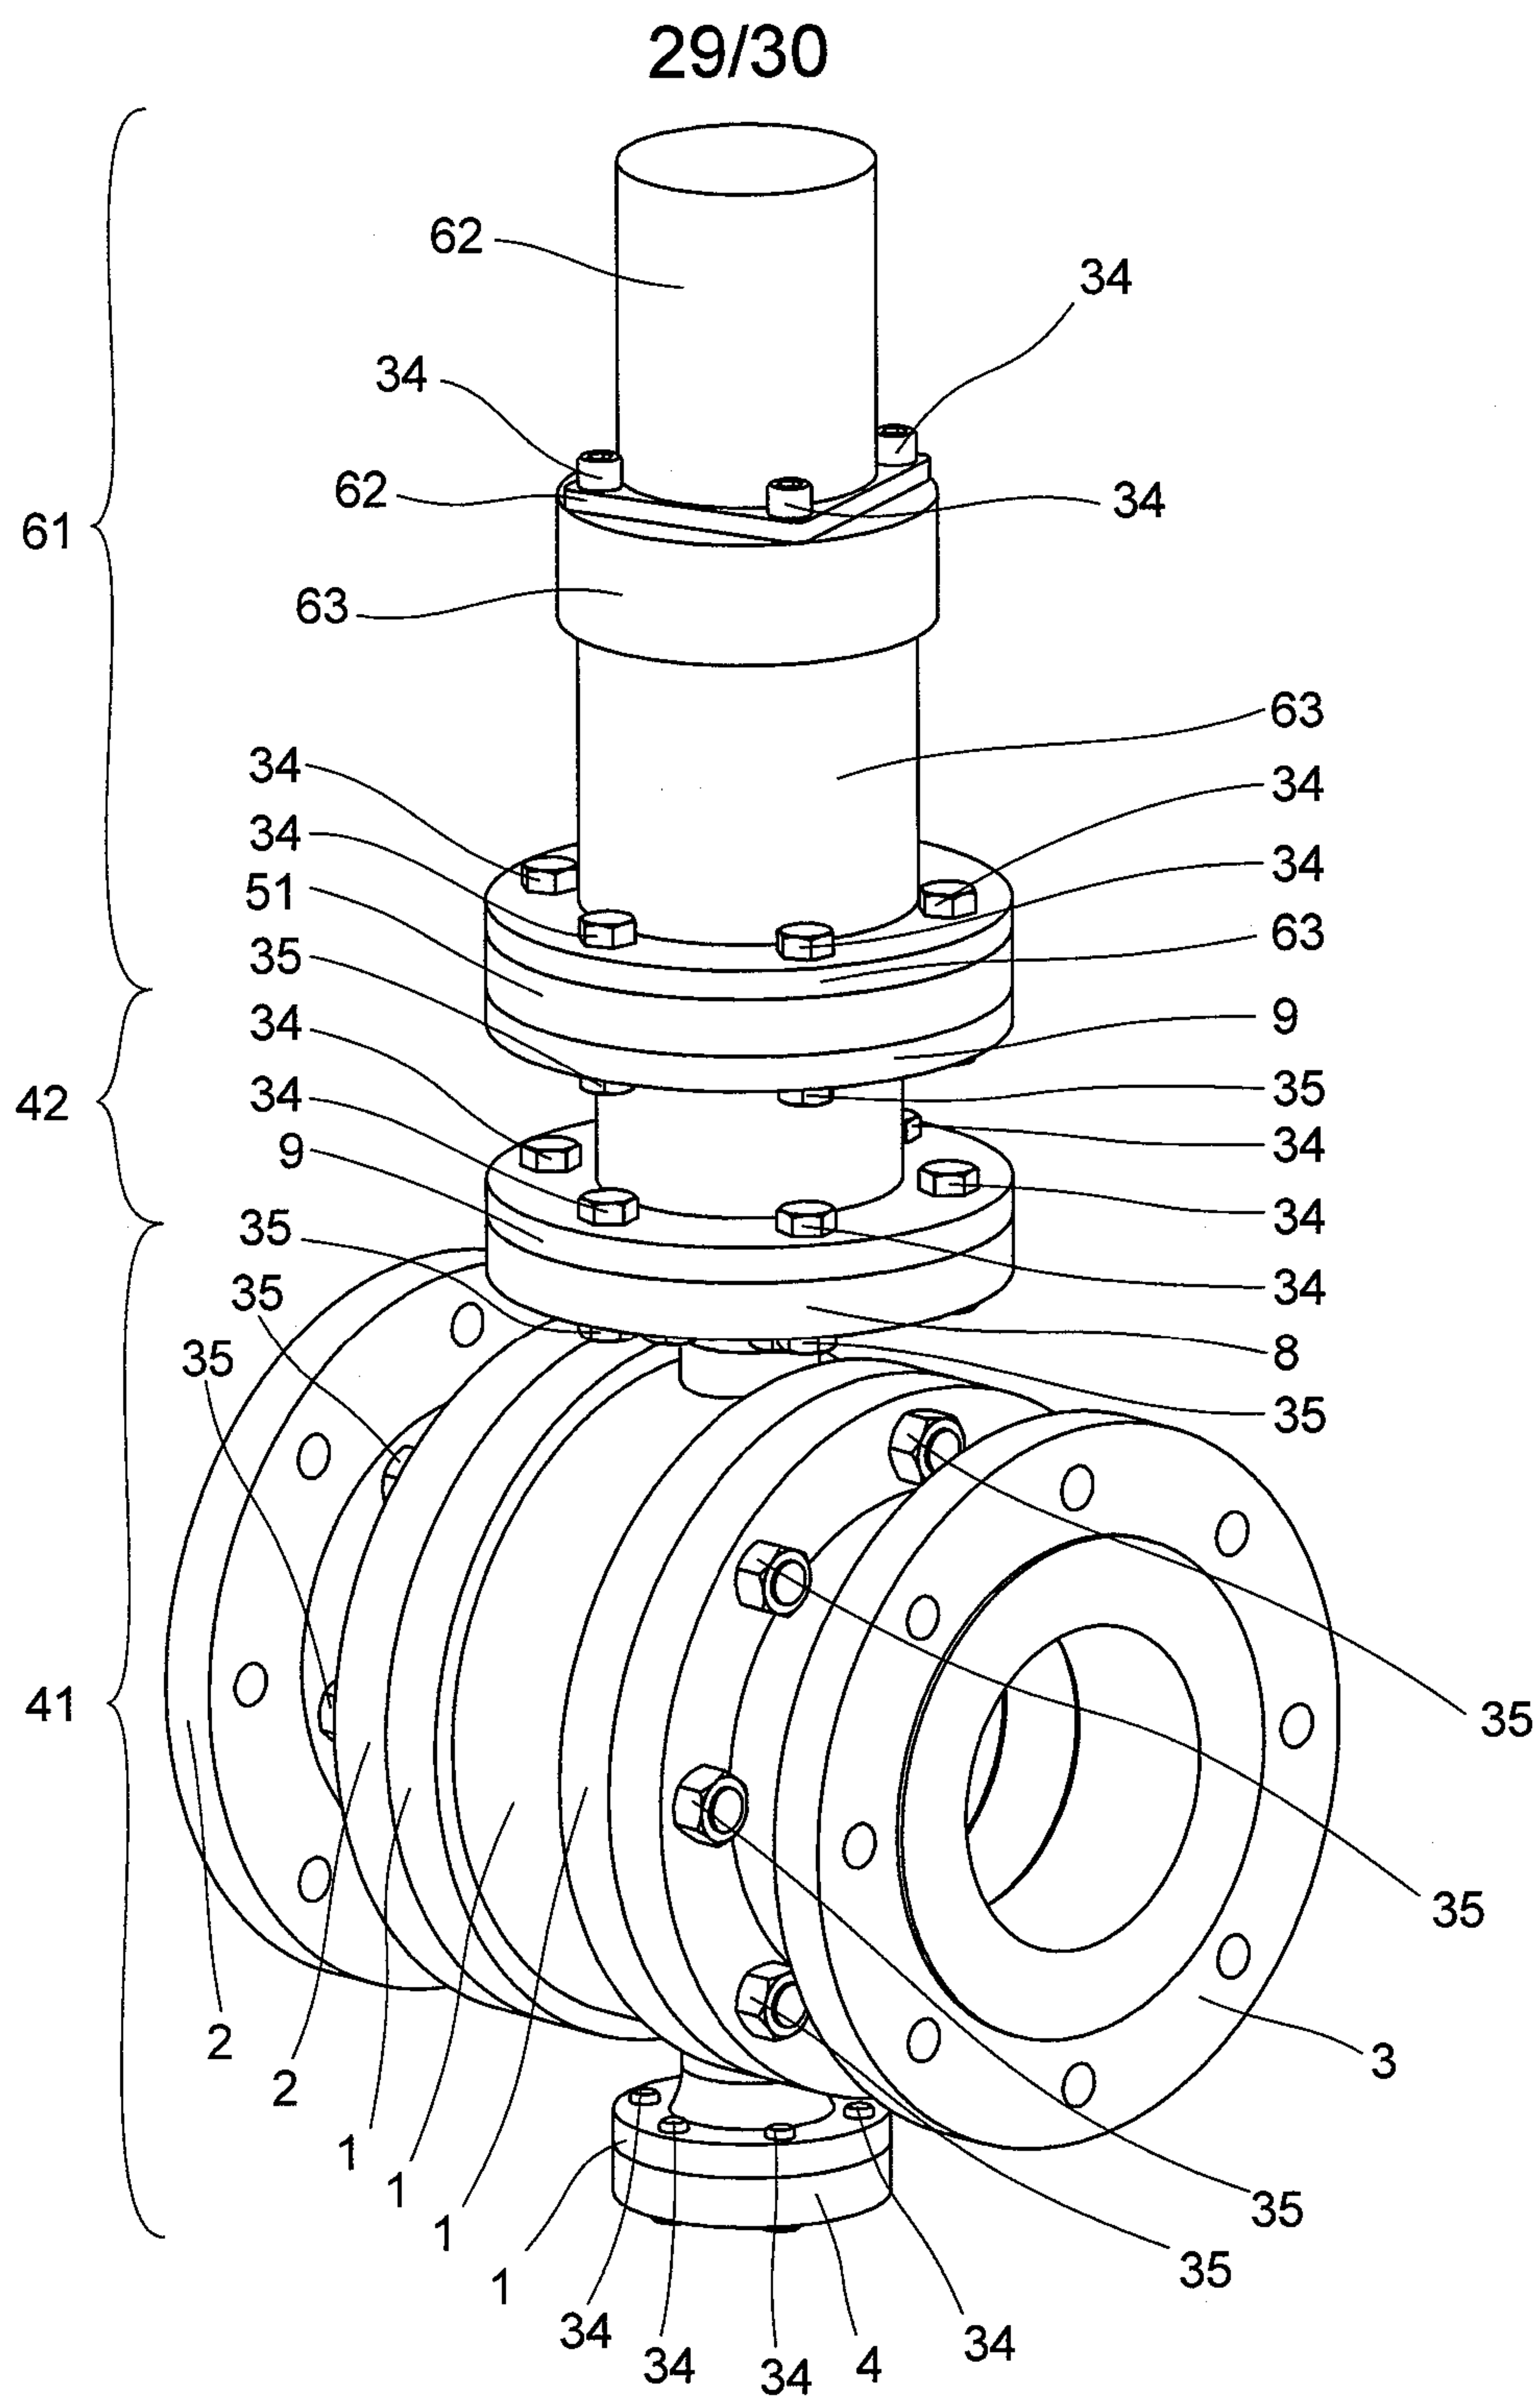


FIG. 30

30/30

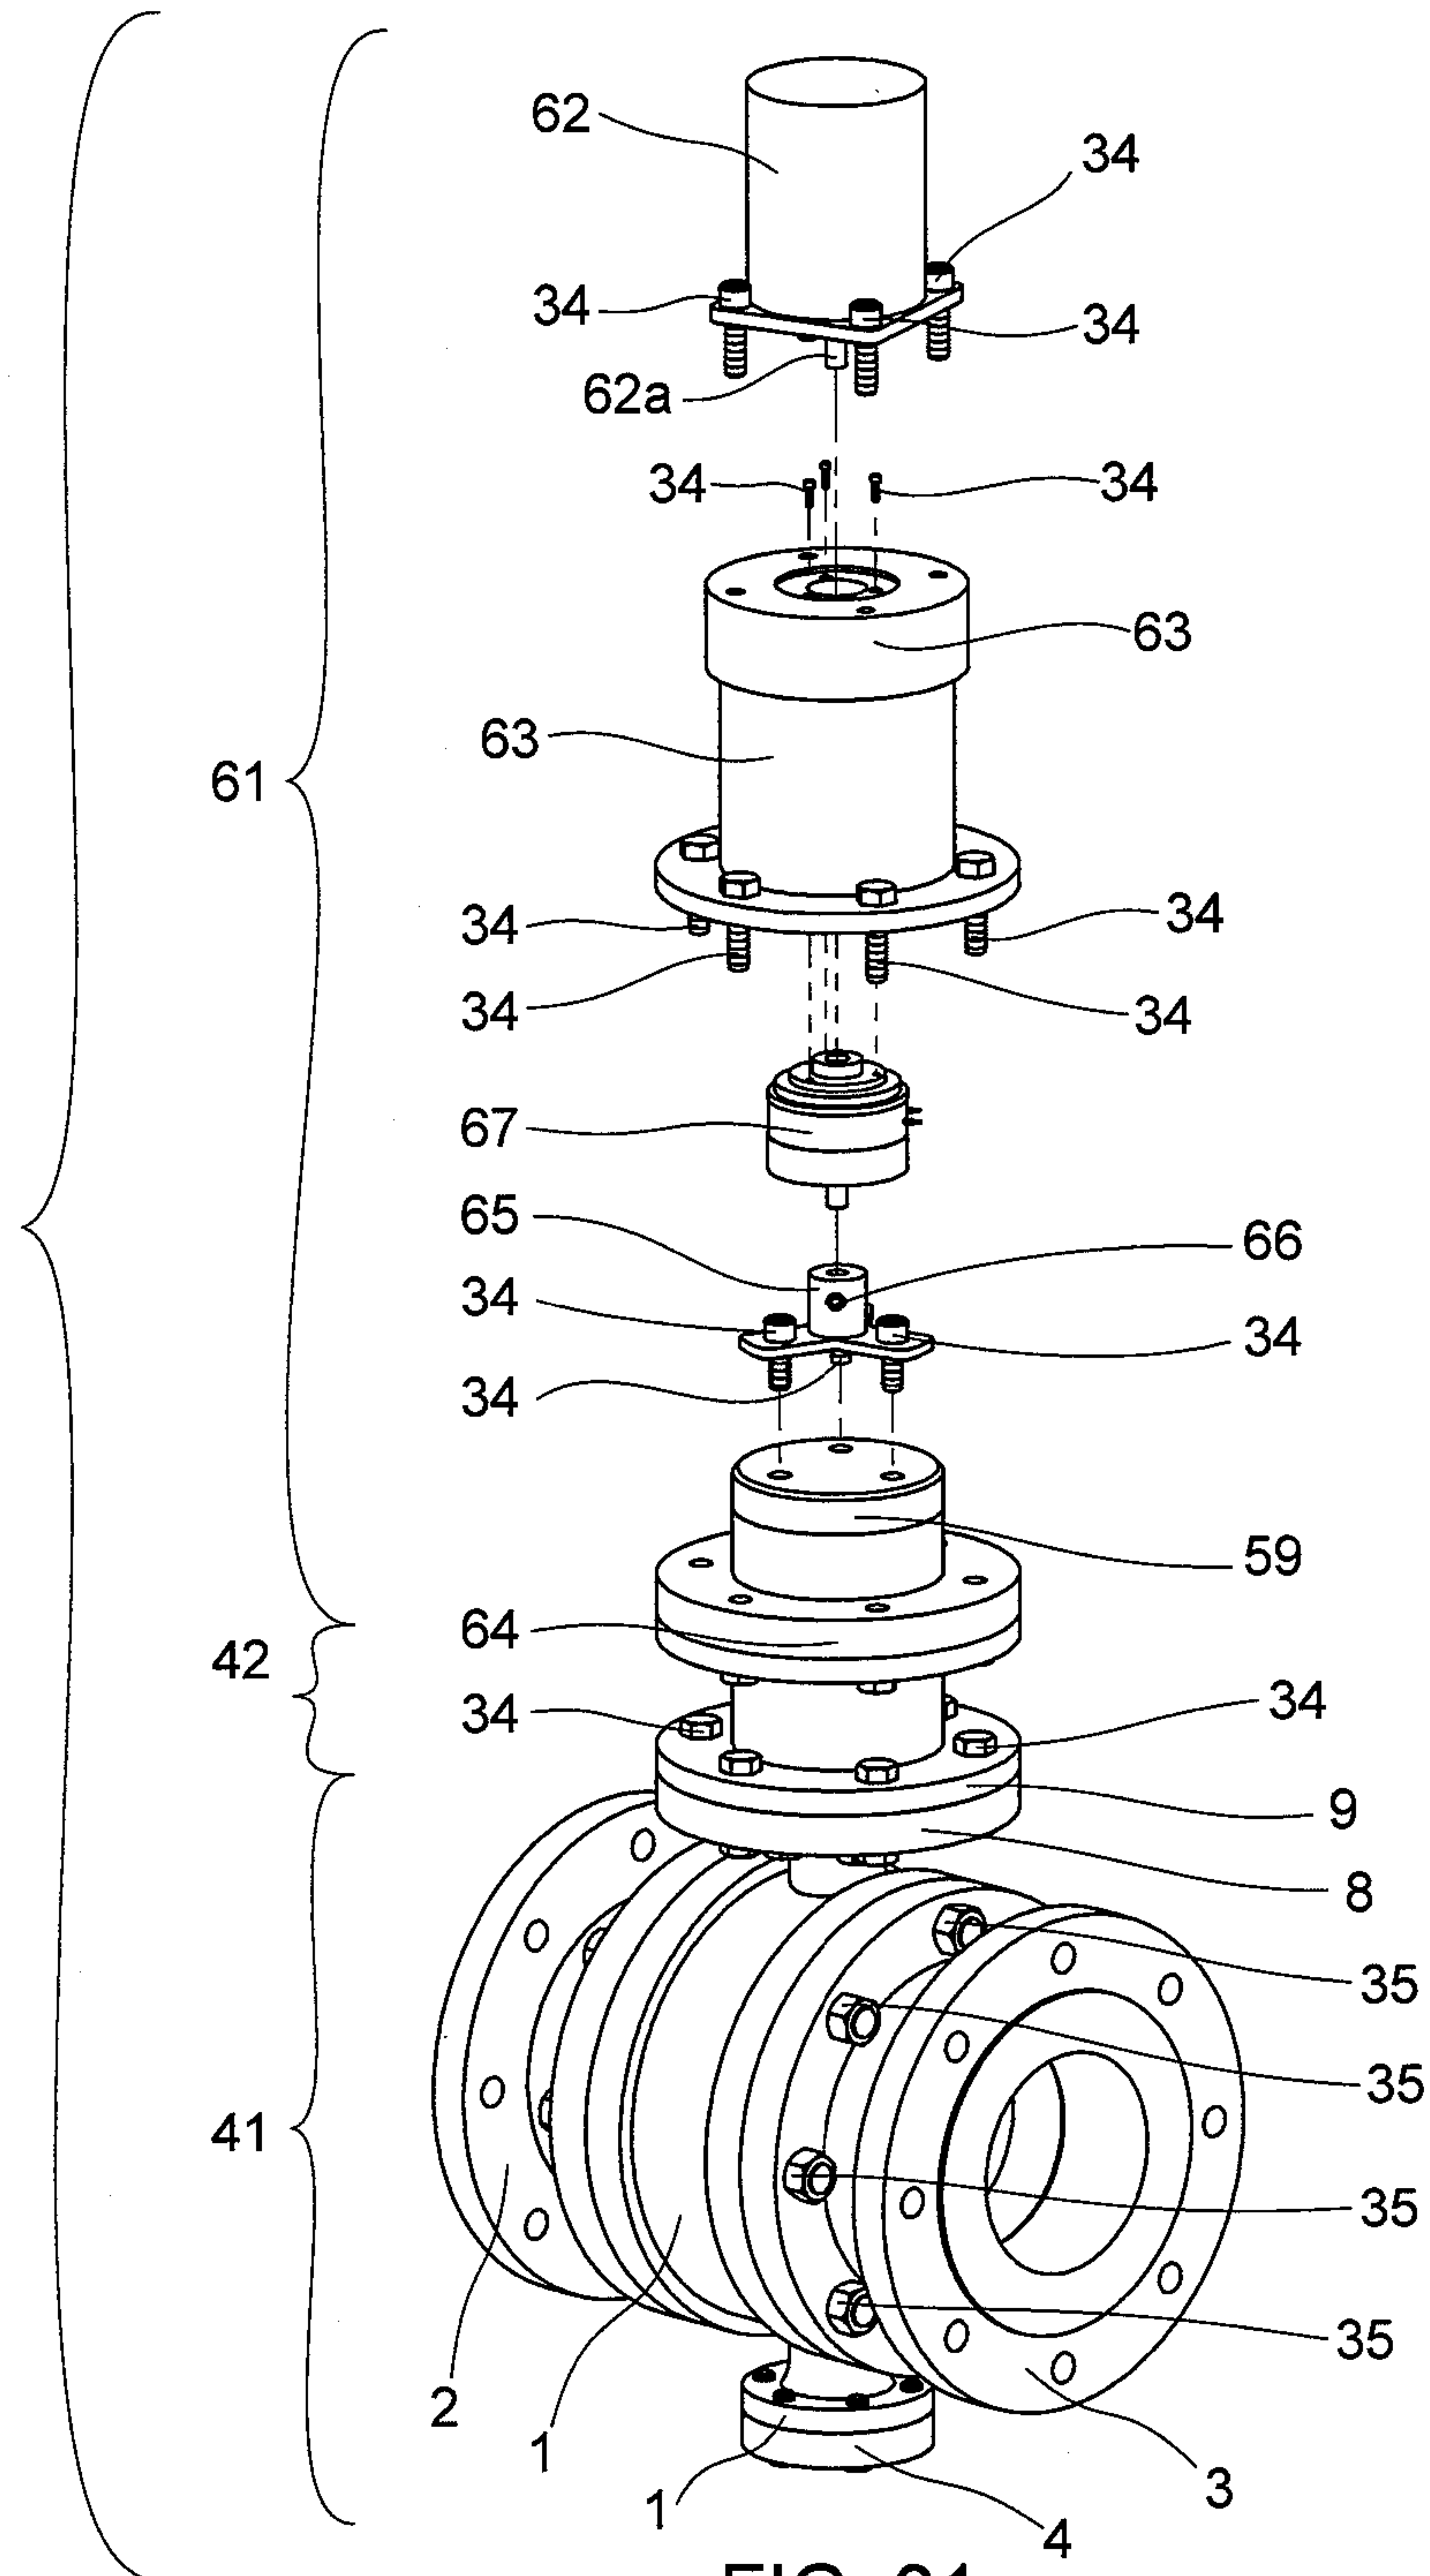


FIG. 31

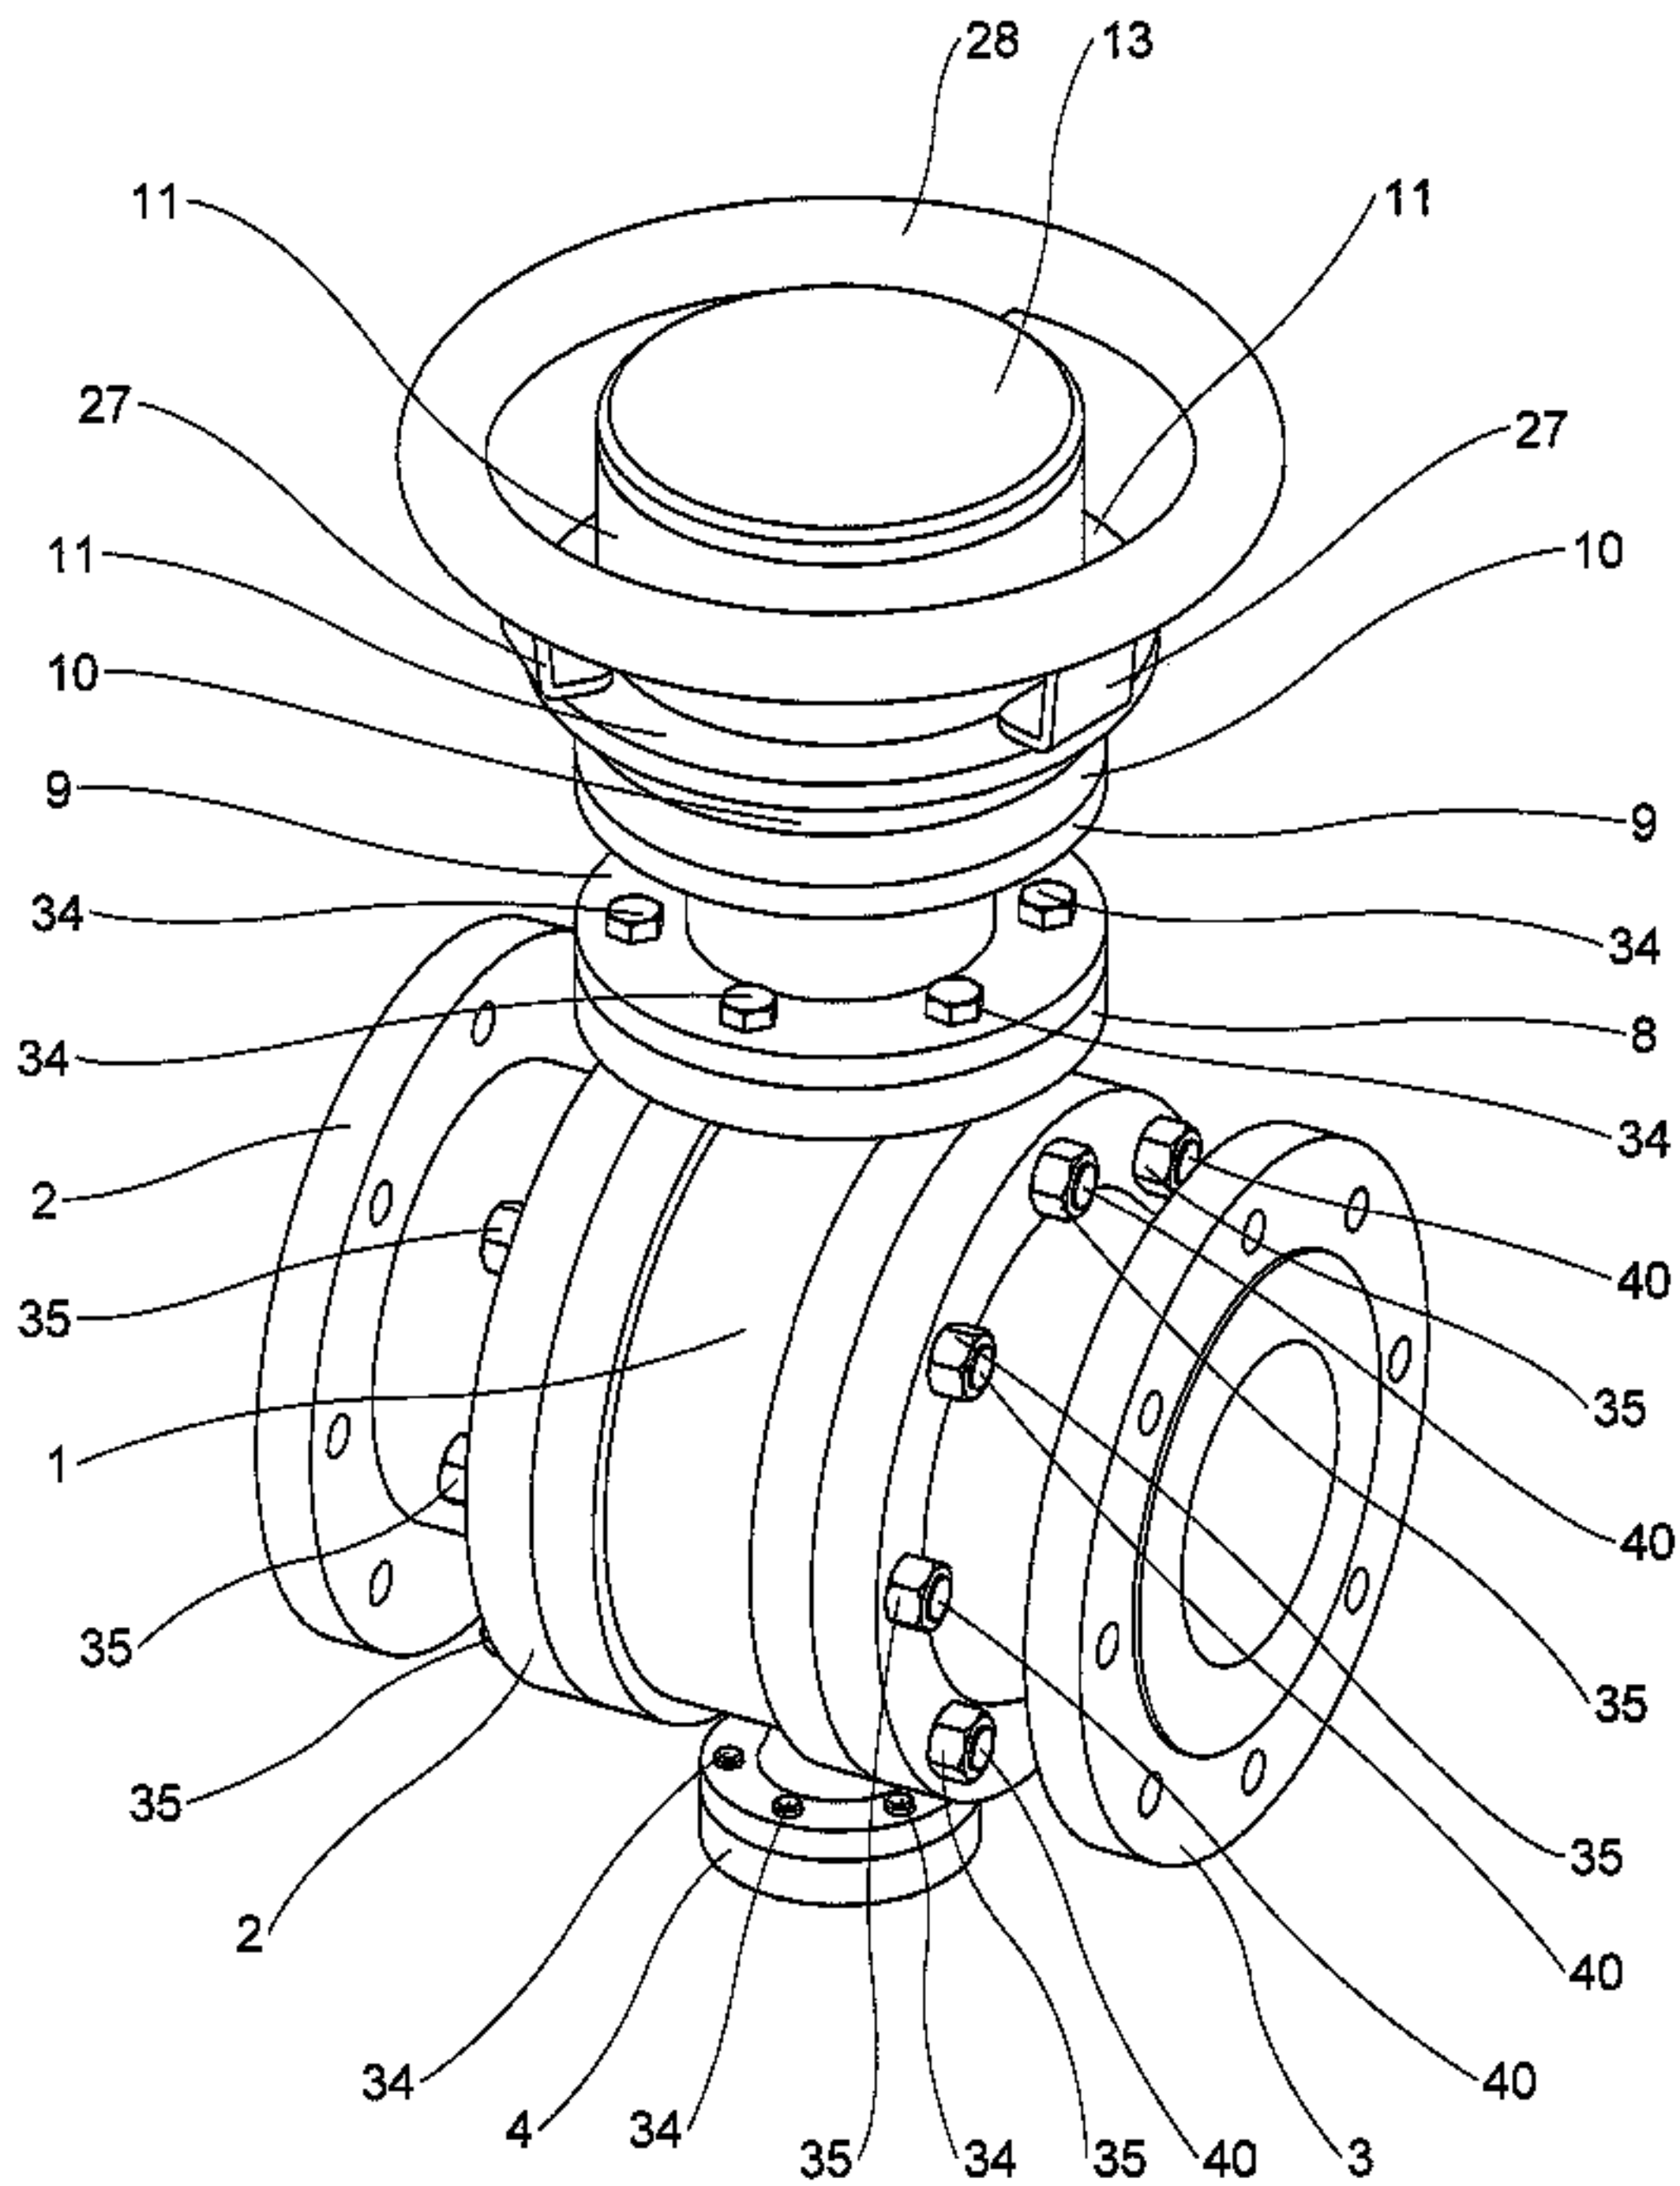


FIG. 1