



- (51) International Patent Classification:
H04W 36/24 (2009.01)
- (21) International Application Number:
PCT/EP2013/074681
- (22) International Filing Date:
26 November 2013 (26.11.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
12306590.6 14 December 2012 (14.12.2012) EP
- (71) Applicant: **ALCATEL LUCENT** [FR/FR]; 3 Rue Octave Gréard, F-75007 Paris (FR).
- (72) Inventor: **HELBERT, Emmanuel**; Alcatel-Lucent Enterprise, 1 rte du Dr Albert Schweitzer, F-67400 Illkirch (FR).
- (74) Agent: **SCIAUX, Edmond**; Alcatel-Lucent International, 32 Avenue Kléber, F-92700 Colombes (FR).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD FOR WIFI CONNECTIVITY LOSS ANTICIPATION

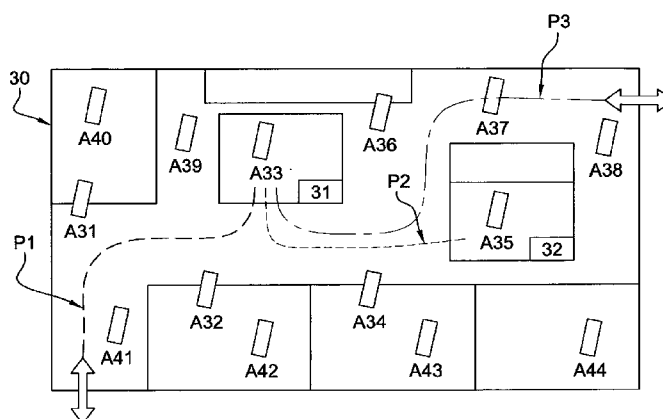


Fig. 3

(57) **Abstract:** A method for anticipating the loss of connectivity between a mobile device and a wireless short-range access point among a plurality of such wireless access points, this method comprising the following steps: - collecting a plurality of paths corresponding to the mobile device movements within the coverage areas of the access points to which the mobile device was successively associated without loss of connectivity, each path comprising a root access point at which a connectivity is originated and a dead-end access point at which the connectivity is lost; - detecting the current access point to which the mobile device is currently associated; - identifying the paths comprising the current access point; - computing the risks of losing the connectivity when following each of the identified paths from the current access point to the root access point or to the dead-end access point of each of the identified paths.

METHOD FOR WIFI CONNECTIVITY LOSS ANTICIPATION

FIELD OF THE INVENTION

The present invention relates to short Wireless Local Area Network
5 (WLAN) connectivity.

BACKGROUND OF THE INVENTION

WiFi (for Wireless Eidelity also referred to as IEEE 802.11) is now fully integrated in the communication landscape and is becoming the dominant Wireless Local Area Networking (WLAN) standard. Developed in different
10 versions (i.e. 802.11a/b/g/n) offering coverage up to hundreds of meters with a theoretical throughput up to about 50 Mbps, WiFi networks are widely deployed by means of numerous WiFi Access Points (AP) scattered across different environments including business, public and residential environments.

15 While roaming within the range of a WiFi access point, a mobile device equipped with a WiFi interface may remain constantly connected, through this access point, to wide-area networks (such as Internet or Intranet) for different communication services including delay-constrained ones (such as voice-over-IP, IPTV, or streaming).

20 However, as soon as the mobile device leaves the coverage of this WiFi access point, an interruption occurs, causing the loss of the WiFi network connection. Therefore, handover techniques for maintaining seamless connections during mobility are proposed so that, while moving, WiFi users do not experience substantial interruption in their ongoing communications
25 via WiFi access points.

Nevertheless, although different solutions have been proposed to improve the handover process between WiFi access points, the handover triggering is often based on radio strength measurements (such as Signal to Interference and Noise Ratio SINR, or Received Signal Strength RSS). In

fact, when the radio strength level becomes lower than a predefined threshold, the mobile station may either roam to another WiFi access point or switch the current WiFi connection(s) to another network offering a better connectivity (LTE for instance).

- 5 Such solutions lack robustness because radio strength measurements are not precise enough and generally depend on hardware platform. Moreover, radio strength level may decline quickly due to attenuation and fading (notably, because of multi-path propagation) with the risk for the mobile station to not having enough time to move current WiFi connection(s) on
10 another radio network without interruption thereof.

One object of the present invention is to propose a method and algorithm to anticipate WiFi connectivity loss between a mobile station and a WiFi infrastructure in order to make all necessary actions to save or move
15 existing network streams to another network that proposes a better connectivity.

Another object of the present invention is to provide a method for intra-WiFi access points handover for a seamless mobility.

Another object of the present invention is to provide an efficient trigger for intra-WiFi handover.

- 20 Another object of the present invention is to propose a metric for intra-WiFi access points handover that provides gains in term of delays and system overall throughput.

SUMMARY OF THE INVENTION

- Various embodiments are directed to addressing the effects of one or more
25 of the problems set forth above. The following presents a simplified summary of embodiments in order to provide a basic understanding of some aspects of the various embodiments. This summary is not an exhaustive overview of these various embodiments. It is not intended to identify key of critical elements or to delineate the scope of these various
30 embodiments. Its sole purpose is to present some concepts in a simplified

form as a prelude to the more detailed description that is discussed later.

Various embodiments relate to methods for anticipating the loss of connectivity between a mobile device and a wireless short-range access point among a plurality of such wireless access points, said methods
5 comprising the following steps:

- 10 - collecting the identifiers of access points to which the mobile device was successively associated without loss of connectivity and the duration of each of these associations so that reproducing a plurality of paths corresponding to the mobile device movements within the coverage areas of the said access points to which the said mobile device was successively associated without loss of connectivity, each path comprising a root access point at which a connectivity is originated and a dead-end access point at which the said connectivity is lost;
- 15 - detecting the current access point to which the mobile device is currently associated;
- identifying the paths comprising the said current access point;
- computing the risks of losing the connectivity when following each of the said identified paths from the said current access point to the root access point or to the dead-end access point of each of the said identified paths, the risk of losing connectivity when following a path from a first access point to a second access point being the inverse of the sum of the collected durations of association corresponding to the access points comprised in the said path from the said first
20 access point to the said second access point.

In accordance with a broad aspect, the above methods further comprise

- an identification step of at least an application in the mobile device using the connectivity provided by the access point to which the said mobile device is currently associated;
- 30 - a determining step of a threshold value above which, for the identified application, the connectivity is considered lost;
- when a computed risk is greater than the determined threshold

value, a triggering step of a handover of the identified application.

In accordance with another broad aspect, the threshold value is the time required to handover the connection used by the identified application to another wireless short-range access point.

In accordance with another broad aspect, the threshold value is the time required to handover the connection used by the identified application to a long-range communication network.

Various embodiments relate to systems for anticipating the loss of connectivity between a mobile device and a wireless short-range access point among a plurality of such wireless access points, said system comprising:

- means for collecting the identifiers of access points to which the mobile device was successively associated without loss of connectivity and the duration of each of these associations so that reproducing a plurality of paths corresponding to the mobile device movements within the coverage areas of the said access points to which the said mobile device was successively associated without loss of connectivity, each path comprising a root access point at which a connectivity is originated and a dead-end access point at which the said connectivity is lost;
- means for detecting the current access point to which the mobile device is currently associated;
- means for identifying the paths comprising the said current access point;
- means for computing the risks of losing the connectivity when following each of the said identified paths from the said current access point to the root access point or to the dead-end access point of each of the said identified paths, the risk of losing connectivity when following a path from a first access point to a second access point being the inverse of the sum of the collected durations of association corresponding to the access points

comprised in the said path from the said first access point to the said second access point;

In accordance with a broad aspect, the above systems further include

- 5 - means for identifying at least an application in the mobile device using the connectivity provided by the access point to which the said mobile device is currently associated;
- means for determining a threshold value above which, for the identified application, the connectivity is considered lost;
- 10 - when a computed risk is greater than the determined threshold value, means for triggering a handover of the identified application.

In accordance with another broad aspect, the paths are obtained from a site map.

In accordance with another broad aspect, the wireless short-range access point is a WiFi access point.

- 15 Various embodiments further relate to a computer program product for performing the above methods.

While the various embodiments are susceptible to various modification and alternative forms, specific embodiments thereof have been shown by way of example in the drawings. It should be understood, however, that the
20 description herein of specific embodiments is not intended to limit the various embodiments to the particular forms disclosed.

It may of course be appreciated that in the development of any such actual embodiments, implementation-specific decisions should be made to achieve the developer's specific goal, such as compliance with system-
25 related and business-related constraints. It will be appreciated that such a development effort might be time consuming but may nevertheless be a routine understanding for those of ordinary skill in the art having the benefit of this disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects, advantages and other features of the present invention will become more apparent from the following disclosure and claims. The following non-restrictive description of preferred embodiments is given for the purpose of exemplification only with reference to the accompanying drawing in which

- FIG.1 is a schematic diagram illustrating an environment for deploying various embodiments;
- FIG.2 is a schematic diagram illustrating functional components for handover triggering according to various embodiment;
- FIG.3 is a schematic diagram illustrating an implementation of various embodiments in a representative environment.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

With reference to figure 1, there is shown a plurality of WiFi access points **A1-A10** deployed in an environment **10**. These WiFi access points **A1-A10** may be any access nodes for residential or business local area and/or public or commercial hotspots connectivity.

As illustrative examples of the environment **10**, one can mention a company, a university, a hotel, an airport, a shopping mall, a downtown location, a pedestrian street, a cultural center, a district, or more generally any area or building that may be covered, at least partially, by a plurality of WiFi access points **A1-A10**.

A user **1** provided with a WiFi capable mobile device **2** may benefit, in the environment **10**, from different communication services including both disconnection-tolerant and disconnection-sensitive applications such as video streaming, Instant messaging, Web browsing, ftp, messaging (Mail), MMoIP (Multimedia over IP such as voice, data and video), uploading/downloading files.

By "mobile device" is meant here any user equipment provided with a WiFi interface and a WiFi connectivity manager permitting to automatically

connect this user equipment, through the WiFi interface, to a WiFi access point **A1-A10**. A laptop computer, a smartphone, a mobile telephone, or a Personal Digital Assistant (PDA) are examples of such mobile device **2**.

When the user **1** moves in the environment **10** while maintaining at least an
5 active connection through the WiFi access points **A1-A10**, this connection is handed off between the WiFi access points **A1-A10** that the user **1** moves through their respective coverage areas. It results in that, while moving in the environment **10**, a "path" corresponding to the user movement within the coverage area of the WiFi access points **A1-A10** is
10 built of nodes representing the WiFi access points to which the user has been associated (i.e. has connected thereto). These paths cross each other at cross-road nodes.

For example, if the user **1** moves successively close to the WiFi access points **A10, A9, A7, A6** and through which he/she had, respectively,
15 maintained a Web browsing service (or simply having an established WiFi connectivity without necessarily being used by an application), then a path **A10-A9-A7-A6** corresponding to the user movement in the environment **10** is built. These access points **A10, A9, A7, A6** may be manually or automatically selected for the connection.

20 The term "move" is to be understood broadly to include any change, whatever continuous or discrete in time, in location of the user **1** in the environment **10** such as "walking from the railway station to the office, working in the office, going for lunch in a restaurant close to the office, take the elevator to the third floor, going back to the railway station".

25 It is to be noted that, some of the WiFi access points **A1-A10** may be situated next to a coverage hole or at the border of the environment **10** (such as next to the entrance/exit of the environment **10**) so that they correspond to "dead-end" access points in paths that a user can follow within the environment **10**. Whereas, other access points **A1-A10**
30 correspond to "safe places" (from a connectivity point of view) where it has been detected that the user **1** stays long times with no risk of WiFi connectivity loss (such as, at home or in office).

Accordingly, the identifiers of access points **A1-A10** to which the mobile device **2** was successively associated without loss of connectivity and the duration of each of these associations are collected so that reproducing a plurality of paths corresponding to the mobile device **2** movements within the coverage areas of the access points **A1-A10** to which the mobile device **2** was successively associated without loss of connectivity, each path comprising a root access point at which a connectivity is originated and a dead-end access point at which this connectivity is lost. Thus, paths followed by the user **1** within the environment **10** and the durations of association of the mobile device **2** to each of the nodes (i.e. access points) of these paths are collected and registered.

The topology of the previously followed paths (i.e. collected paths) by the user **1** in the environment **10** may be

- either automatically and progressively built and stored by the WiFi connectivity manager that detects WiFi access point **A1-A10** connection;
- downloaded from a server; or even
- configured manually by the user.

Advantageously, if the paths topology is automatically built by the mobile device **2**, these paths are consistent with the mobile device radio performance and to the user movements.

Further, while the user is moving in the environment **10**, the WiFi connectivity manager is configured to continually or intermittently examines the paths followed by the user **1** and the type of ongoing network streams used by the applications running on the mobile device **2** so as to decide whether to trigger a handover procedure, toward another WiFi access point **A1-A10** (or, alternatively, toward another radio access networks such as 3G or 4G wireless networks), before starting the loss of at least an ongoing network stream.

Then, at each node of a current path (in other words, at each WiFi access point **A1-A10** to which the mobile device **2** is currently associated, this WiFi access point may be the first, an intermediate, or the last node of an

ongoing path), the WiFi connectivity manager is configured to update the paths if a new WiFi access point **A1-A10** is detected or to estimates the path that has the best probability to be followed.

To that end, the current access point to which the mobile device **2** is currently associated is detected and the paths that comprise the current access point are identified from the collected ones. Then, the risks of losing the connectivity when following each of the identified paths from the current access point to the root access point or to the dead-end access point of each of the identified paths, are computed. The risk of losing connectivity when following a path from a first access point to a second access point is the inverse of the sum of the collected durations of association corresponding to the access points comprised in this path from the first access point to the second access point.

In other words, at each node of the current path being followed by the user **1** while moving in the environment **10**, the WiFi connectivity manager calculates a risk of the current connectivity to be lost. This risk depends on the delay necessary to go from the current WiFi access point to which the mobile device **2** is associated to the root WiFi access point or the dead-end WiFi access points of each collected path comprising the current WiFi access node (i.e. the last and first WiFi access points in previously followed path by the user **1** where a connectivity is originated or a connectivity loss is occurred). This delay, given by the sum of association durations, may be calculated based on the distance between the WiFi access points (i.e. the nodes) in the path divided by the user moving speed which could be evaluated with RSSI variation. Moreover, this delay may be calculated using means of delays measured during previous paths. For example, the delay necessary to go from the access point **A1** to the access point **A2** may be the arithmetic mean of

- the delay to go from the access point **A1** to the access point **A2**; and
- the delay to go from the access point **A2** to the access point **A1** (i.e. the reverse path).

The risk is a dynamic value which estimates the probability to lose an established WiFi connection between the mobile device 2 and a WiFi access point A1-A10. This risk is calculated for each current path and depends on the current user location and speed. The value is dynamic and is calculated at each new WiFi access point association.

In one embodiment, the computed instantaneous risk is weighted by predefined external parameters which may depend on the hour in the day, the day in the week (for example, public holiday or not).

After each calculation, the risk of each path, from the current user location and speed, is compared to a threshold value. If the risk becomes greater or equal to this threshold, a handover of ongoing network stream(s) is to be triggered. This threshold is dynamic and depends on the applications currently utilizing the WiFi connection. This threshold is calculated based on the time necessary to handle properly these applications in case of connectivity loss and the influence of connectivity loss on these applications (i.e. whether WiFi disconnection-tolerant application or not).

In one embodiment, if no real time communication application is running, the threshold is infinite. This is the case, for instance, of browsing applications. Whereas, if the applications which are running are real time applications such as voice or video communication, this threshold may correspond to the time necessary to transfer the session over another radio connection if available (such as a data cellular network) or to end properly the sessions (redirection over a voice/video messaging system for instance).

If the applications which are running are not deeply impacted by the temporary network connectivity loss, the threshold could be estimated as the delay necessary to re-establish the session plus the delay during which the user accepts that the service is unavailable. For instance, the threshold for "Instant Messaging" application could be a tenth of seconds.

When the calculated risk becomes greater than a threshold, the WiFi connectivity manager anticipates WiFi connectivity loss by taking adequate decisions. These decisions could be:

- warn the user;
- trigger an handover procedure: switch current media-streams on another and safer radio connectivity so that they will not be lost;
- stop, postpone or hibernate applications which could be damaged by this connectivity loss.

Accordingly, a current value of the threshold is estimated by detecting the active applications and their ongoing network streams to which the corresponding current threshold value is to be applied. For each active application or for each ongoing network stream (an application may have more than one network stream such as an Instant Messaging application: text, audio and video), the threshold corresponds to the inverse of the handover delay which would impair the application. For example, if the handover of Web browsing service between a WiFi access point and a cellular network lasts less than 5 seconds ($D_{\text{browsing_Handover}} = 5$), then the threshold would be $T_{\text{browsing}} = 1/5$. More generally, one can have:

- $D_{\text{MMoIP_Handover}} = 1$ second, then the threshold for Multimedia over IP applications T_{MMoIP} is equal to 1;
- $D_{\text{video_Streaming_Handover}} = 2$ seconds, then the threshold for video streaming application $T_{\text{video_Streaming}}$ is equal to 0,5. This value may depend on the buffer length;
- $D_{\text{chat_Handover}} = 5$ seconds, then the threshold for chat applications T_{chat} is equal to 0,2;
- $D_{\text{mail_Handover}} = 10$ seconds, then the threshold for mail applications T_{mail} is equal to 0,1.

In one embodiment, the application thresholds are computed based on default values and/or on measurements made during real handovers. The default values correspond to general user experience.

Figure 2 depicts an illustrative embodiment of the WiFi connectivity manager 30. In fact, the WiFi connectivity manager 30 is configured to anticipate the WiFi connectivity loss and subsequently trigger the

handover toward another WiFi access point or another communication network. To that end, the WiFi connectivity manager **30** comprises

- a threshold estimator **22** in charge of estimating a threshold above which a handover should be triggered, threshold calculation being based on current active streams. The detection of these active streams may be done at network level identifying active socket, or at the mobile device level by means of an API used by the applications to indicate active streams. Alternatively, the threshold estimator uses the mobile device OS framework facility to detect active streams, or uses QoS marker in streams to identify their real-time dependency and accordingly determines corresponding threshold values;
- a risk calculator **24** in charge to calculate in real time the risk of losing the WiFi connectivity;
- a handover decision maker **23** configured to compare the calculated risk to the currently estimated threshold, and subsequently take the adequate decision. Once the computed risk is greater than the estimated threshold, the handover decision maker **23** trigger the handover management module **28** for executing the handover toward a WiFi access point via the WiFi layer **26** or toward a cellular mobile communication network via the cellular PHY/MAC layer **27** ;
- a path detector **25** in charge of collecting and detecting, through the WiFi layers **26**, the paths that the user is following.

Of course, the above described WiFi connectivity manager **30** may include others interfaces with different modules of the mobile device.

In one embodiment, the path detector **25** is fed with paths provided by the user and/or downloaded from site maps.

In one embodiment, the threshold estimator **22** embeds an API (Application programming Interface) to detect ongoing network streams (such as an uploading/downloading, a web browsing, or a video streaming) via the WiFi connectivity. Then, a threshold value per active application or more generally per ongoing network stream **211-213** (for example, MMoIP, Chat,

video streaming, browsing, mail, social networks). It is to be noted that the threshold estimator **22** may further offer the user the ability to specify the threshold values.

With reference now to figure 3, an illustrative embodiment of the above disclosure is presented for teaching how the risk and threshold could be
5 calculated and how disconnection-sensitive applications can be handled.

In the example of figure 3, the environment is a building **30** comprising a plurality of WiFi access point **A31-A44**.

A user enters the building **30** and walks along the path **P1** (the dashed
10 line) to his office **31** where he starts working: his mobile device is automatically associated to **A41** as soon as it is under the radio coverage of **A41**. The WiFi connectivity manager records a new path **P1** starting with root access point **A41** (changing the mobile device from a disconnected state to a connected state). This WiFi access point **A41** is identified in the
15 path **P1** with its BSSID (Basic Service Set ID). Subsequently, a timer is armed as soon as the WiFi connectivity is established for measuring the duration of this association. The user walks to his office **31**. The mobile device maintains a WiFi connection, successively, through the access points **A31**, **A32** and **A33** according to handover known process. When the
20 smartphone loses **A41** association to establish a better connectivity through **A31**, **A31** is appended to the path initialized above with **A41** association. The timer is stopped and the value **D1_31** corresponding to the delay necessary to reach **A31** is stored within the path (i.e. the association duration to **A41**). The WiFi connectivity manager knows now
25 that it takes around **D1_31** to go from **A41** to **A31** when taking path **P1**. When the user is in his office **31**, the path **P1** is made of **A41-A31-A32-A33** with delays [**D1_31**, **D1_32**, **D1_33**].

After having checked his e-mail during a certain time period (for example, 1 hour or two), the user goes from his office **31** to a meeting room **32**. This
30 creates the path **P2** (the dotted line) made of access points **A33-A34-A35** with delays [**D2_34**, **D2_35**]. As the time period of connection to the WiFi access point **A33** is quite long (i.e. several hours), **A33** is considered as a

"safe place". The reverse path **P2r** (namely, from the meeting room **32** to the office **31**) is automatically created. **P2r** is **A35-A34-A33** with corresponding delays [**D2_35**, **D2_34**].

The path **P2** (respectively, **P2r**) may be the continuity of the path **P1** (respectively, **P2**) resulting in a single path, or a new path originated from the "safe place" covered by **A33** (respectively, **A35**).

For instance, after a 2 hours meeting, the user comes back to his office **31**. This does not create a new path as the access points which ensure WiFi connectivity between the meeting room **32** and the office **31** are the same **A35-A34-A33**. The delay between **A34** and **A33** is used to update **D2_34** as this new value corresponds really to the time necessary to walk from **A34** to **A33** whereas the first value corresponded to the time elapsed between the moment at which the user arrived in his office **31** and the moment at which he left his office **31**. For the same reason, the delay **D2_35** measured at step2 is updated with the new value which corresponds roughly to the meeting duration. But this long value indicates that **A35** may be considered as a "safe place".

The user leaves the building **30**, to go for lunch, through the exit under the WiFi access point **A38** radio coverage (the dashed-and-dotted line). This creates a new path **P3 A33-A34-A35-A36-A37-A38** with the corresponding delays [**D3_34**, **D3_35**, **D3_36**, **D3_37**, **D3_38**, **D3_38loss**]. The new delay **D3_35** measured between **A34** and **A35** (i.e. the association duration to **A34**) is compared with **D2_35** and both paths are updated with mean delay if the new value is neither significantly lower nor greater than the previous one. **D3_34** is the delay measured in path **P2**, namely **D2_34**. The last delay **D3_38loss** is the delay measured between the time at which the mobile device associated to the dead-end access point **A38** and the time at which the WiFi connection is lost. The reverse path **P3r** is automatically created:

P3r=A38-A37-A36-A35-A34-A33 with delays

[**D3_38**,**D3_37**,**D3_36**,**D3_35**,**D3_34**]. When the WiFi connectivity with **A38** is lost, this access point is considered as a dead-end access point. The time of the day at which this connectivity is lost (namely, the duration of

the association to **A38**) is registered by the WiFi connectivity manager. This may be used to weight the risk based on user habits.

The user comes back from lunch. He enters the building **30** through the same door and walks along path **P3** to his office **31**. Delays between **A38** and **A37**, **A37** and **A36**, **A36** and **A35**, **A35** and **A34**, **A34** and **A33** are updated according to the same algorithm as above: If the new value is significantly greater than the previous one, it is not taken into account. If the new value is significantly lower than the previous one, it replaces it. Otherwise, the new value is the mean of the previous one and the current one.

As illustrative example of the risk computation, the user is in communication with a client but has to go to the railway station to catch a train. At the very beginning of this use case, the user is sat in his office **31**. The call is a video session and has been established in SIP over the WiFi connection offered by the WiFi access point **A33**.

At that time there are 3 paths **P1r** (reverse path of **P1**), **P2**, and **P3** that the user can follow.

In one embodiment, the risk for each of these paths is calculated as follows:

- the risk **R1r** when following **P1r** is given by $1/(D1_41loss + D1_33 + D1_32 + D1_31)$. **D1_41loss** is null in this case as it is not yet experienced connectivity loss when connected to **A41**. Here, **D1_31** includes **D1_41loss**;
- the risk **R2** when following **P2** is null as there is no dead-end access point at the end of **P2**. Then **R2** is equal to 0;
- the risk **R3** when following **P3** is given by $1/(D3_38loss + D3_37 + D3_36 + D3_35 + D3_34)$.

These three values are compared to a threshold which is calculated based on current running connection-based application **211-213**. Accordingly, these thresholds take into account the characteristics of the ongoing streams. In fact, the QoS required for each stream has an impact on

handover threshold. Real-time streams require early and quick handover to avoid data loss while other streams such as browsing are disconnection-tolerant. For instance, the threshold T may be approximate to $1/D_video_Handover$ where $D_video_Handover$ is the delay necessary to switch the current video session from the WiFi network to the cellular data network ($D_video_Handover$ is about 1 second for instance).

In one embodiment, initial values or default values of these thresholds per application type are chosen so that all risks are below these initial threshold values.

At first step, when the user moves toward the building exit and the mobile device is associated to the WiFi access point **A32**, an instantaneous path $P_i = A3 - A2$ and an associated delay D_{i_32} representing the speed at which the user is moving are created. As this instantaneous path P_i is only comprised in $P1r$ among all history paths (i.e. $P1$, $P1r$, $P2$, $P2r$, $P3$, $P3r$), then this path $P1r$ is the most probable to be followed.

At second step, the new risk is now $R1r = 1/(D1_41loss + D1_32 + D1_31)$ and is compared to the threshold T relative to the ongoing network stream (for example, the stream of a video). T has not changed as the video call is still running on the mobile device. The measured D_{i_31} may be compared with $D1_32$ to estimate if the user is moving faster or slower than the mean values previously calculated, improving by the way the accuracy of the risk $R1r$.

At third step, the mobile device is associated to WiFi access point **A31**. According to path $P1$ topology, there is only one access point left before the WiFi connectivity is lost. The risk, when associated to the access point **A31**, is $R1r = 1/(D1_41loss + D1_31)$ which grows rapidly. Consequently, when the mobile device is associated to WiFi access point **A31**, the WiFi connectivity manager starts a timer which measures the delay D_{i_a} since this association. The risk is now calculated according to the following formula: $R1r = 1/(D1_41loss + (D1_31 - D_{i_a}))$.

At fourth step, when the current risk becomes greater or equal to the threshold T , the WiFi connectivity manager triggers a handover of the

disconnection-sensitive application **211-213** (such as a video call) over a cellular data network. This may happen either while the terminal is still connected through the WiFi access point **A31** or when connected to the dead-end WiFi access point **A41** (when associated to **A41**, **R1r** is first
5 calculated using formula of the third step and a timer is started at **A41** association to measure **D1_41loss** for **P1r** calculation update).

Alternatively, the risk levels may be configured by the user, depending on locations within the environment.

10 In one embodiment, the information related to the mobile device movements within the environment **10** is correlated to location based and "movement-based" applications and not only handover. A "movement based" application is an application which does not only rely on the user location but also on the direction is walking in and the speed he uses for that.

15 Advantageously, the above-described method and system enable secured determination of triggering point for handover, preventing any multimedia communication loss (i.e. triggering handover of multimedia streams before losing these streams) and ensuring multimedia sessions continuity (being of particular interest to multimedia application providers). Further, the
20 proposed system ensures accurate handover decisions as it takes into account the characteristics of ongoing applications (disconnections-sensitive or -tolerant).

It is to be noted that the above described method and system may be applied for any other wireless LAN standard, in the same way as for the
25 WiFi.

CLAIMS

1. A method for anticipating the loss of connectivity between a mobile device and a wireless short-range access point (A31-A44) among a plurality of such wireless access points (A31-A44), said method comprising
5 the following steps:

- collecting the identifiers of access points (A31-A44) to which the mobile device was successively associated without loss of connectivity and the duration of each of these associations so that reproducing a plurality of paths corresponding to the mobile device
10 movements within the coverage areas of the said access points to which the said mobile device was successively associated without loss of connectivity, each path comprising a root access point at which a connectivity is originated and a dead-end access point at which the said connectivity is lost;
- detecting the current access point to which the mobile device is
15 currently associated;
- identifying the paths comprising the said current access point;
- computing the risks of losing the connectivity when following each of the said identified paths from the said current access point to the
20 root access point or to the dead-end access point of each of the said identified paths, the risk of losing connectivity when following a path from a first access point to a second access point being the inverse of the sum of the collected durations of association corresponding to the access points comprised in the said path from the said first
25 access point to the said second access point.

2. The method of claim 1 wherein it further comprises

- a step of identification of at least an application in the mobile device using the connectivity provided by the access point to which the said mobile device is currently associated;
- 30 - a step of determining of a threshold value above which, for the identified application, the connectivity is considered lost;
- when a computed risk is greater than the determined threshold

value, a step of triggering of a handover of the identified application.

3. The method of claim 2, wherein the threshold value is the time required to handover the connection used by the identified application to another wireless short-range access point.

5 4. The method of claim 2, wherein the threshold value is the time required to handover the connection used by the identified application to a long-range communication network.

5. The method of any of claim 1 to 4, wherein the computed risk is weighted by predefined parameters.

10 6. A system for anticipating the loss of connectivity between a mobile device and a wireless short-range access point (A31-A44) among a plurality of such wireless access points (A31-A44), said system comprising:

- 15 - means for collecting the identifiers of access points (A31-A44) to which the mobile device was successively associated without loss of connectivity and the duration of each of these associations so that reproducing a plurality of paths corresponding to the mobile device movements within the coverage areas of the said access points to which the said mobile device was successively associated without
- 20 loss of connectivity, each path comprising a root access point at which a connectivity is originated and a dead-end access point at which the said connectivity is lost;
- means for detecting the current access point to which the mobile device is currently associated;
- 25 - means for identifying the paths comprising the said current access point;
- means for computing the risks of losing the connectivity when following each of the said identified paths from the said current access point to the root access point or to the dead-end access
- 30 point of each of the said identified paths, the risk of losing connectivity when following a path from a first access point to a second access point being the inverse of the sum of the collected durations of association corresponding to the access points comprised in the said path from the said first access point to the

said second access point.

7. The system of claim 6, wherein it further comprises

- 5 - means for identifying at least an application in the mobile device using the connectivity provided by the access point to which the said mobile device is currently associated;
- means for determining a threshold value above which, for the identified application, the connectivity is considered lost;
- when a computed risk is greater than the determined threshold value, means for triggering a handover of the identified application.

10 8. The system of claim 7 wherein the identified application is a disconnection-sensitive application.

 9. The system of claims 6 or 7, wherein the paths are obtained from a site map.

15 10. The system of any of claims 6 to 8, wherein the wireless short-range access point is a WiFi access point.

 11. Computer program implemented on a processing unit of a computer, said program including code sections for performing instructions corresponding to the steps of a method according to any of claims 1-5.

1/2

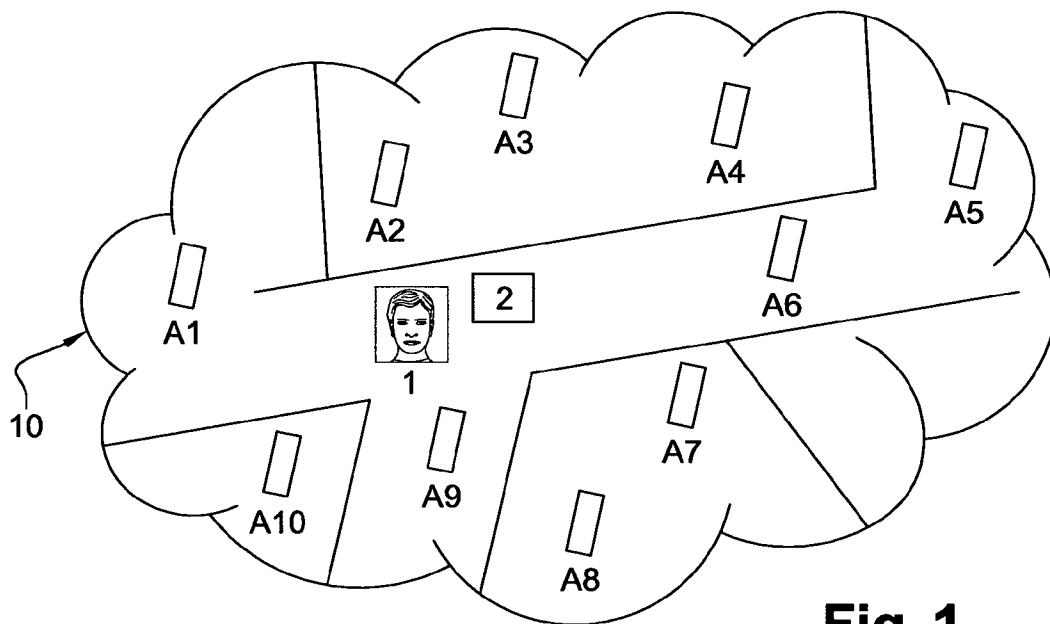


Fig. 1

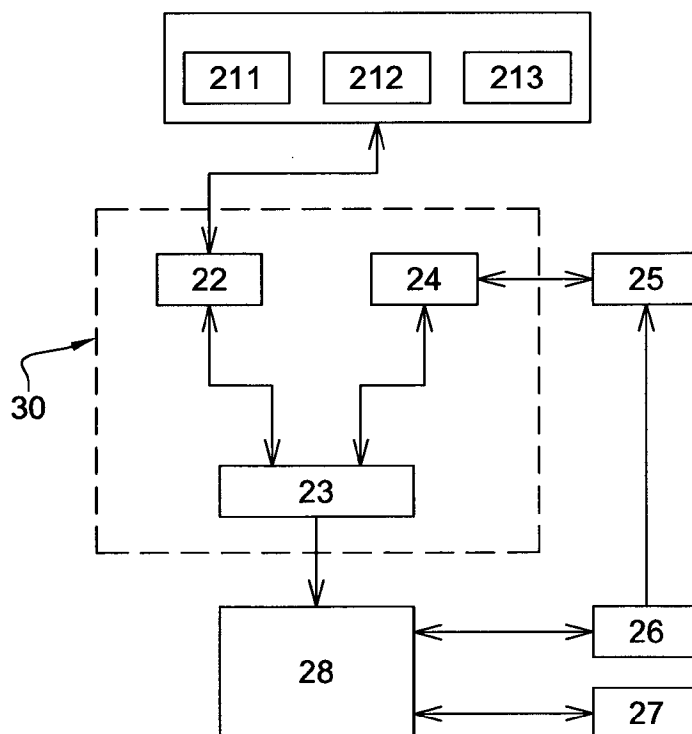


Fig. 2

2 / 2

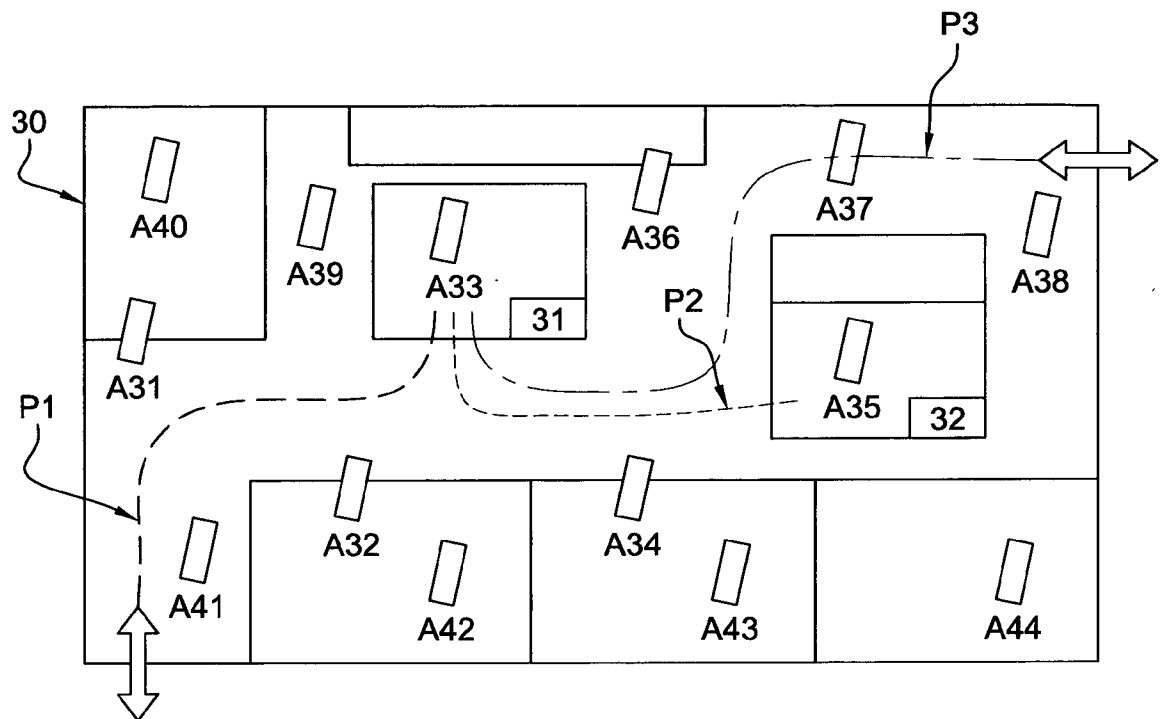


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2013/074681

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04W36/24

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005/255856 A1 (GRIFFIN SHAWN [CA] ET AL) 17 November 2005 (2005-11-17) paragraphs [0002], [0003], [0005], [0012], [0014] - [0016], [0025], [0031], [0036] - [0038], [0042] -----	1-11
A	WO 01/58182 A2 (ERICSSON INC [US]) 9 August 2001 (2001-08-09) abstract page 1, lines 5-8 page 4, lines 11-17 page 5, line 13 - page 6, line 2 page 7, line 15 - page 8, line 4 page 12, lines 12-24 page 18, line 1 - page 19, line 7 ----- -/-	1-11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 January 2014

Date of mailing of the international search report

15/01/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Manuel, Grégory

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/074681

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 385 454 B1 (BAHL PARAMVIR [US] ET AL) 7 May 2002 (2002-05-07) the whole document -----	1-11
A	US 2009/156210 A1 (PONCE DE LEON LORENZO A [US] ET AL PONCE DE LEON LORENZO [US] ET AL) 18 June 2009 (2009-06-18) abstract paragraphs [0001], [0002], [0012], [0013], [0023] - [0027], [0030] - [0032] -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/074681

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005255856 A1	17-11-2005	EP 1598985 A1	23-11-2005
		US 2005255856 A1	17-11-2005

WO 0158182 A2	09-08-2001	AU 2932901 A	14-08-2001
		EP 1266536 A2	18-12-2002
		US 6711408 B1	23-03-2004
		WO 0158182 A2	09-08-2001

US 6385454 B1	07-05-2002	NONE	

US 2009156210 A1	18-06-2009	US 2009156210 A1	18-06-2009
		US 2012135735 A1	31-05-2012
		WO 2009079316 A1	25-06-2009
