

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 July 2002 (18.07.2002)

PCT

(10) International Publication Number
WO 02/056611 A2

- (51) International Patent Classification⁷: **H04Q 7/00**
- (21) International Application Number: PCT/SE02/00022
- (22) International Filing Date: 9 January 2002 (09.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/757,717 10 January 2001 (10.01.2001) US
- (71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (publ)** [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventors: **ROCHA AVALOS, Roberto**; Jose Guadalupe Posada 215, Col. Alpes Norte, Saltillo, Coahuila, C.P. 25270 (MX). **MONSIVAIS DE VALLE, Hector**; Europa 305, Col. Virreyes Residential, Saltillo, Coahuila, C.P. 25230 (MX).
- (74) Agent: **ERICSSON CANADA INC.**; LMC/UP IPR Section, 8400 Decarie Boulevard, Montreal, QC H4P 2N2 (CA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



WO 02/056611 A2

(54) Title: METHOD FOR SHORT MESSAGE SERVICE FORWARDING DELIVERY

(57) Abstract: A discrete message is forwarded from an initial destination to a forwarding destination a network. Activation is requested of a forwarding feature. A discrete message is sent to the initial destination and a determination is made that the forwarding feature is activated. The initial destination is associated with a user profile, wherein the network includes a Switching Center (SC) and a Location Register (LR). When activation of a forwarding feature is requested, the forwarding feature is marked as activated in the user profile and the forwarding destination is stored. The user profile is downloaded from the LR to the SC, the forwarding destination is provided, and the discrete message is sent to the forwarding destination.

METHOD FOR SHORT MESSAGE SERVICE FORWARDING DELIVERY

5

BACKGROUND OF THE INVENTION**Technical Field**

This invention relates generally to messaging systems and methods.

10 More particularly, the invention relates to Short Message Service (SMS) delivery services conducted within a telecommunications network.

History of Related Art

The Short Message Service (SMS) provides the ability to send and
15 receive short messages of up to 160 characters using a mobile phone. SMS was conceived as part of the Global System for Mobile communications (GSM) digital standard. SMS is typically used to communicate information when voice or audio is not the best medium. For example, when relating a phone number or other numerical information to another party, it is easier to send the number as a character message,
20 where it can be extracted and stored in memory, rather than attempting to verbally relay the number, memorize it, and re-key it into a phone or other communications device for storage. Thus, SMS is a useful service for communicating non-audio information in many situations.

There are certain occasions when the intended recipient of SMS
25 messages is unable to receive them. For example, when the intended destination telephone is busy, or unavailable (i.e., not responding due to being located outside the service zone, or being turned off). When these situations arise, the intended recipient

must rely on a Message Center (MC) to deliver the messages at some later time. However, there is no guarantee that the MC will ultimately deliver the message to the intended recipient if his telephone is busy or unavailable. Further, there are times when the intended SMS recipient is waiting for a particular call, or otherwise occupied, and
5 does not wish to receive any SMS messages. It is during these times that forwarding SMS messages to some guaranteed deliverable, alternative destination, would be desirable.

Thus, what is needed is a method of delivering SMS messages to the intended recipient even when the recipient's telephone is busy or unavailable. Further,
10 such a method should provide the ability to deliver messages to an alternative destination. The method would be most useful if the message forwarding could be made contingent on instructions by the recipient, such as forwarding the message unconditionally, forwarding the message when the recipient telephone is busy, or forwarding the message when the recipient telephone does not respond. Finally, the
15 method would also be most useful if the forwarding destination could also be selected, such as an alternate mobile telephone, a node, an e-mail address on a computer network, etc.

SUMMARY OF THE INVENTION

20 The invention provides a method for forwarding discrete messages, such as SMS messages, from an initial destination (e.g., a cellular telephone) to a forwarding destination (e.g., an alternate cellular telephone, or a network address such as IP address or e-mail address). The method allows the intended recipient to specify the forwarding

destination, and whether message forwarding will occur unconditionally, only when the recipient is busy, or only when the recipient telephone does not respond.

In its simplest form, the method includes the steps of activating a forwarding feature, sending a discrete message to the initial destination, and
5 determining that the forwarding feature is activated. Of course, if it can not be determined that the forwarding feature has been activated, then the method terminates.

If the forwarding feature has indeed been activated, then the method may also include the steps of providing the forwarding destination, and sending the discrete message to the forwarding destination. These steps are used when the forwarding
10 feature has been unconditionally activated.

If the forwarding feature is to be activated only when the initial destination is busy, then the forwarding destination will be provided, and the discrete message will be forwarded when the initial destination is busy. Similarly, if the forwarding feature has been requested for activation only when the initial destination is
15 not responding, then the forwarding destination will be provided and the discrete message will be sent to the forwarding destination when the initial destination is not responding.

The forwarding destination may be an alternate telephone number, a network address, or any other destination which can be specified within a network data
20 message. Activation of a forwarding feature can be requested by the intended recipient, the service provider, or triggered by REGISTRATIONNOTIFICATION/QUALIFICATIONREQUEST messages within American National Standards Institute - 41 (ANSI-41) network protocol operations.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the structure and operation of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings, wherein:

5 Figs. 1A, 1B and 1C are network operational diagrams illustrating activation of the forwarding feature;

Fig. 2 is a network operational diagram illustrating the method of the present invention wherein the forwarding feature is activated unconditionally;

10 Fig. 3 is a network operational diagram illustrating the method of the present invention when the forwarding destination is the Internet;

Fig. 4 is a network operational diagram illustrating the method of the present invention when the forwarding feature is activated when the initial destination is busy;

15 Fig. 5 is a network operational diagram illustrating the method of the present invention when the forwarding feature is activated when the initial destination is not responding; and

Figs. 6A, 6B, and 6C are network operational diagrams illustrating the method of the present invention when message forwarding does not occur.

DETAILED DESCRIPTION OF PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

The invention provides a method to forward discrete messages, upon
5 request, from an intended recipient, or initial destination, to a selected forwarding
destination. The intended recipient, typically operating a mobile cellular telephone,
may select not only the forwarding destination, but may also select the conditions under
which messages are forwarded: unconditionally, when his phone is busy, or when his
10 phone is non-responsive (i.e., turned off, out of the service area, MS unknown, the MS
has not subscribed to SMS, the addresses MS is unknown, or the SMS TeleserviceID is
invalid).

Turning now to Figs. 1A, 1B, and 1C, a network diagram illustrating
activation of the forwarding feature can be seen. In Fig. 1A, the network **10** includes a
Mobile Station (MS) **20**, a Mobile Switching Center/Visitor Location Register
15 (MSC/VLR) **30**, and a Home Location Register (HLR) **40**. In this scenario, wherein the
subscriber operating the MS **20** requests activation of the forwarding feature, an
activation feature code, along with the forwarding destination, is entered by the
subscriber, typically using the keypad of a cellular telephone, and sent to the MSC/VLR
30 in step **50**. If the network **10** is an ANSI-41 compliant network, as shown in Fig. 1A,
20 then a FEATUREREQUEST message is sent from the MSC/VLR **30** to the HLR **40**,
requesting that the user profile for the MS **20** be updated to indicate that the forwarding
feature has been activated in step **60**. After the profile has been updated, a
featurerequest response message is sent from the HLR **40** to the MSC/VLR **30** in step
70, and typically, a confirmation message, indicating that the activation was successful,
25 is sent from the MSC/VLR **30** to the MS **20** in step **80**. The confirmation message may

take the form of a message displayed on the MS **20** display, or an announcement to the subscriber. The confirmation message is typically followed by a QUALIFICATIONDIRECTIVE message from the HLR **40** to the MSC/VLR **30** in step **90**, to update the profile information within the MSC/VLR **30** (to indicate that the forwarding feature is activated). To close the transaction, a qualificationdirective response message is returned from the MSC/VLR **30** to the HLR **40** in step **100**. At this time, the HLR **40** will mark the forwarding feature as active in the user's profile, and store the forwarding destination address **45** (shown as FN# in Fig. 1A which can be a telephone number, an IP address or e-mail address).

10 If the forwarding destination is not SMS capable, or is not a valid destination, then the user profile may be updated, prompting unsuccessful forwarding of the message, until such time as the forwarding destination becomes SMS capable. Alternatively, the user profile may not be updated, and notification of the unsuccessful profile update will be sent to the user (not shown).

15 Turning now to Fig. 1B, a network operational diagram illustrating activation of the forwarding feature upon registration can be seen. In this case, when the MS **20** attempts to register with the MSC/VLR **30**, by way of autonomous registration in step **110**, for example, the MSC/VLR **30** sends a REGISTRATIONNOTIFICATION message from the MSC/VLR **30** to the HLR **40** in step **120**, and the HLR **40** responds with a registrationnotification response, including the user profile, and an indication that the forwarding feature is activated in step **130**. At this time, the MSC/VLR **30** is now "aware" that the forwarding feature has been activated for the MS **20**. A similar operation occurs when an MSC/VLR in a network requests validation of an MS, such that a QUALIFICATIONREQUEST message is sent

from the MSC/VLR 30 to the HLR 40 in step 140, and the qualificationrequest response includes the profile, with an indication that the forwarding feature is active, in step 150 (see Fig. 1C). It should be noted that in all the operations illustrated in Figs. 1A, 1B, and 1C, the type of activation for the forwarding feature depends on either the feature code (for a subscriber activation request), the command from an operator, or the type of activation indicated in the user profile. Thus, for example, a subscriber may request unconditional activation, activation when busy, or activation when not responding, using different feature code combinations.

The forwarding feature may also be activated by command of the service provider operator, as shown in Fig. 1A. Here, a command can be issued by the operator in step 105 to the HLR 40, which directs the HLR 40 to send a QUALIFICATIONDIRECTIVE message, including profile information indicating that the forwarding feature has been activated in the user profile in step 90, which provokes a qualificationdirective response, confirming update of the user profile in the MSC/VLR 30, in step 100. If the requested forwarding destination is not SMS capable, or a valid destination, the user profile will not be updated, and notification of the unsuccessful profile update will be sent to the user (not shown).

A network operational diagram, illustrating the method of the present invention wherein a discrete message, in the form of an SMS message, is forwarded unconditionally to a mobile station, is shown in Fig. 2. Here, the originator of the message, Short Message Entity (SME) 15 sends a short message to Mobile Identification Number B (MINB), which is served by the Message Center (MC) 17 and the HLR 19. In this case, MINB represents the initial destination.

The message is sent using an SMS Delivery Point-To-Point (SMSDPTP) Invoke operation, which includes the short message itself, the SMS original, or initial destination address (which is the MC for MINB), the SMS original originating address, which is the address for the SME 15, and the initial destination, or MINB. The SMSDPTP Invoke message is sent from the SME 15 to the MC 17 in step 160. A smsdptp response is returned from the MC 17 to the SME 15 to acknowledge receipt of the original SMSDPTP message. In step 180, the MC 17 sends a request to the HLR 19 to provide the address of the MINB in step 180. This request from the MC 17 to the HLR 19 takes the form of an SMSREQUEST, which contains the MINB. The HLR checks to determine that the forwarding feature is activated by referring to the subscriber profile associated with the MINB in step 185. In the response (step 190), the MC 17 receives the information that the forwarding feature is unconditionally activated (i.e., the redirection indication equals SFU), and that the forwarding destination is the Mobile Identification Number (MIN) associated with a user "C", or MINC.

In this scenario, the method includes the steps of providing the forwarding destination, and sending the discrete message, in the form of an SMS message, to the forwarding destination. Thus, the SMSREQUEST, containing the MINC is sent back to the HLR 19 (in step 200), assuming that the HLR 19 serves both user "B" and user "C". The response, received in step 210, includes the SMSADDRESS, which points to MSC/VLR1 21.

The message is now rerouted, using the SMSDPTP operation, to mobile station "C" in step 220. At this time, the MIN is that of the entity serving MS "C" (i.e., MS-C) 23, the SMS redirect destination address is that for MS "B" (not shown), and the SMS original originating address is that for entity "A" (e.g. MS "A", not shown), served

by SME-A **15**. The final destination address is that for MS-C **23** and the SMS Bearer Data is the message itself. The short message is delivered to the MS-C **23** in step **230**, and receipt of the message is acknowledged in step **240** by the MS-C **23** to the MSC/VLR1 **21**. The transaction is closed with an smsdptp response in step **250**, from
5 the MSC/VLR1 **21** to the MC **17**.

Fig. 3 illustrates a network operational diagram wherein the short message is forwarded unconditionally to the Internet. In this case, the message originator **15**, which might be a node or MSC/VLR for entity "A" (e.g., a mobile cellular telephone), sends an SMSDPTP message to the MC **17** in step **241**. An
10 smsdptp response is returned from the MC **17** to the message originator **15** in step **242**. Again, an SMSREQUEST, including the MINB is sent from the MC **17** to the HLR **19** for entity "B", which may be another mobile cellular telephone. This request for the address of MINB occurs in step **243**. The HLR **19** checks to determine whether the forwarding feature has been activated in step **244**. Upon determining that the
15 forwarding feature has been activated unconditionally, the forwarding destination, which in this case is an Internet address, is returned in the smsrequest response in step **245**. It is important to note that in this instance, as well as in that illustrated in Fig. 2, the forwarding feature has been activated unconditionally, and therefore, whether the intended recipient (i.e., entity "B") is busy or not responding does not matter. All
20 discrete messages will be forwarded, regardless of the status of the intended recipient. Thus, a new SMSDPTP message is sent from the MC **17** to the Internet, containing the forwarding destination address in the form of an Internet Address or E-mail Address **25**, in step **246**. The smsdptp response, used to close the transaction, is returned from the Internet **25** to the MC **17** in step **247**.

Turning now to Fig. 4, a network operational diagram illustrating the method of the present invention wherein the forwarding feature is activated when the initial destination is busy. Thus, the initial destination (i.e., MINB, or entity "B") toward which the discrete message is directed has previously requested activation of the forwarding feature when the initial destination is busy, and provided a forwarding destination to the HLR 19.

When the message originator 15, such as a MSC/VLR serving entity "A" sends an SMSDPTP message in step 260, the message is acknowledged by an smsdptp response in step 270. The SMSDPTP message contains the SMS message itself, the initial destination address (i.e., the MC 17 for MINB), and the SMS originating entity address (i.e., the address for entity "A"), along with MINB itself.

The MC 17 then responds by sending an SMSREQUEST message containing the MINB in step 280 to the HLR 19. The smsrequest response, containing the SMSADDRESS for MINB is returned by the HLR 19 to the MC 17 in step 290.

After receiving the SMSADDRESS, the MC 17 requests delivery of the SMS message by MSC/VLR1 21 (which serves the initial destination, MS-B 27) using an SMSDPTP message in step 300. Delivery is attempted in step 310, and fails because the request is acknowledged with an indication that the MS-B 27 is busy in step 320. The MSC/VLR1 21 then checks to determine that the forwarding feature has been activated in step 325, and since the forwarding feature is indeed activated when the initial destination is busy, the MSC/VLR 21 sends the forwarding information, directing the MC 17 to reroute the SMS message using an smsdptp response in step 330. An SMSREQUEST message in step 335 is used to request the forwarding destination from

the HLR 19, and the SMSREQUEST response, including MINC, is returned to the MC 17 in step 340.

The MC 17 then sends a new SMSREQUEST containing the MIN C to the HLR 19, requesting the SMSADDRESS for MS-C 23 in step 350, in this case the
5 SMSADDRESS for entity "C", or MS-C 23 is returned in the smsrequest response in step 360.

Once the MC 17 receives the forwarding address for MS-C 23, the MC 17 requests that the discrete message be forwarded to MS-C 23 using an SMSDPTP message in step 370. The message is delivered in step 380, and delivery/receipt is
10 acknowledged in step 390. The transaction is closed using an smsdptp response in step 400. A similar process is illustrated in Fig. 5, which shows a network operational diagram of the method wherein the forwarding feature has been activated when the initial destination is not responding. In this case, the forwarding feature has been activated for MS-B 27 such that messages are forwarded to the alternative destination,
15 MS-C 23, when the status of the MS-B 27 is "not responding" (i.e., turned off, out of the service area, MS unknown, the MS has not subscribed to SMS, the addresses MS is unknown, the SMS TeleserviceID is invalid).

In this case, steps 260-310 are identical to those described for Fig. 4. That is, a short message is originated and sent to the MC 17, the SMSADDRESS for
20 MS-B 27 is requested and received by the MC 17, and a request to deliver the message, and an attempt to deliver the message, are made in steps 300 and 310. However, in this case, instead of the MS-B 27 being busy, it is not responding, and therefore, no acknowledgment is received by the MSC/VLR1 21 from the MS-B 27. After an acknowledgment time-out occurs, the MSC/VLR1 21 checks to determine if the

forwarding feature has been activated, and if so, whether the forwarding feature has been activated when the initial destination is not responding in step **460**. In this case, the forwarding feature has indeed been activated, and is activated when the initial destination is not responding.

5 Thus, the smsdptp response is sent from the MSC/VLR1 **21** to the MC **17**, directing the MC **17** to reroute the SMS message in step **470**. Steps **335-400** are the same as those described for Fig. 4. That is, a new request for the identity and address of the forwarding destination is made by the MC **17**, and after the SMSADDRESS for MS-C **23** is received by the MC **17**, a request for delivery of the message is made to the
10 MSC/VLR **21**. The message is then delivered, acknowledged, and the transaction is closed in steps **380-400**.

Figs. 6A, 6B, and 6C are network operational diagrams illustrating the method of the invention as it operates when the discrete message should not be forwarded (e.g., the SMS message is a programming message specific to the intended
15 recipient), or it is impossible to deliver the discrete message (e.g., the forwarding destination is invalid). Figs. 6A and 6B illustrate the circumstances wherein the discrete message is a programming message specific to MS-B **27**. In Fig. 6A, the MC **17** sends an SMSREQUEST message directed toward MS-B **27** in step **560**, in order to determine the forwarding destination address of MS-B **27**. The smsrequest response containing
20 the SMSADDRESS for MS-B **27** is returned by the HLR **19** to the MC **17** in step **570**. Then, the MC **17** requests the MSC/VLR **121** to deliver the message to MS-B **27** using an SMSPTP message in step **580** containing the SMS Teleservice Indicator parameter, which indicates that the SMS message is a programming message specific to the intended recipient. Delivery is attempted in step **590**, however, the MS-B **27** is not

responding, or busy. Thus, the delivery attempt is acknowledged in step **600** to the MSC/VLR1 **21** by the MS-B **27**.

At this point, the MSC/VLR **21** checks to determine if the forwarding feature is activated when the initial destination is not responding or busy. Since this is indeed the case, and delivery of the SMS message (which is a programming message) is not appropriate, the smsdptp response indicates the condition of the MS-B **27** as not responding or busy in step **610**, and the programming message is not forwarded. Thus, in this case, the delivery of the programming message occurs by way of conventional methods, well known to those skilled in the art.

10 The scenario depicted in Fig. 6B is similar to that shown in Fig. 6A, except that the forwarding feature is activated unconditionally. In this case, the MC **17** requests the address for MS-B **27** from the HLR **19** by sending a SMSREQ message **620** containing the SMS Teleservice Indicator parameter, which indicates that the SMS message is a programming message specific to the intended recipient. Since the DMFF is activated unconditionally and the SMS is a programming message; then it would not be appropriate to forward a programming message intended for the MS-B **27**, the smsrequest response returned in step **630** contains the SMSADDRESS for MS-B **27**. Thus, the message, which is a programming message intended for the initial destination, is not forwarded. Message delivery is again accomplished using conventional methods well known to those skilled in the art.

20 Turning now to Fig. 6C, the method of the invention is illustrated when forwarding is not possible because the forwarding destination is invalid, or not SMS capable. In this instance, the originating entity sends the SMS message by way of the MC **17** in step **640**, to MS-B **27**. After acknowledging receipt of the message with the

smsdptp response in step 650, the MC 17 sends a request to the HLR 19 for the address of MS-B 27 in step 660. Since the forwarding feature is activated (in this case, unconditionally, as determined in step 665), then the forwarding destination is returned by the HLR 19, along with an indication of the activation type, in the smsrequest
5 response of step 670. The MC 17 then submits an SMSREQUEST message, requesting the address of the forwarding destination (MS-C 23, which is not SMS-capable in this scenario) in step 680. Since MS-C 23 is not SMS-capable, the smsrequest response returned in steps 690, normally containing the SMSAccessDeniedReason, informs the MC 17 that the forwarding destination is invalid.

10 Although the invention has been described with reference to specific embodiments, this description is not meant to be construed in a limited sense. The various modifications of the disclosed embodiments, as well as alternative embodiments of the invention, will become apparent to persons skilled in the art upon reference to the description of the invention. It is, therefore, contemplated that the appended claims will
15 cover such modifications that fall within the scope of the invention, or their equivalents.

CLAIMS

What is claimed is:

1. A method for forwarding a discrete data message from an initial destination to a forwarding destination within a network, comprising the steps of:
sending the discrete message to the initial destination; and
determining that a user at the initial destination desires for the message to be forwarded to a user specified forwarding destination.
2. The method of Claim 1, further including the step of:
requesting activation of a forwarding feature.
3. The method of Claim 1, further including the step of:
forwarding the discrete message on to the specified forwarding destination.
4. The method of Claim 1, further including the step of:
validating the discrete message as a valid message for the forwarding destination.

5. The method of Claim 1, wherein the initial destination is associated with a user profile, wherein the network includes a Switching Center (SC) and a Location Register (LR), and further including the step of requesting activation of the forwarding feature further comprises the steps of:

 sending an activation feature code and the forwarding destination from the initial destination to the SC;

 sending a message requesting activation of the forwarding feature and the forwarding destination from the SC to the LR; and

 updating the user profile in the LR to indicate the forwarding feature is activated.

6. The method of Claim 5, further including the step of:

 validating the forwarding destination as a valid destination for delivering a discrete message.

7. The method of Claim 5, further including the step of sending a confirmation message from the SC to the initial destination, wherein the confirmation message indicates the forwarding feature is activated.

8. The method of Claim 1, wherein the initial destination is associated with a user profile, wherein the network includes a Switching Center (SC) and a Location Register (LR), and wherein the step of requesting activation of a forwarding feature further comprising the steps of:

marking the forwarding feature as activated in the user profile; and
storing the forwarding destination.

9. The method of Claim 8, further including the step of:

validating the forwarding destination as a valid destination for delivering a discrete message.

10. The method of Claim 8, further including the step of:

downloading the user profile from the LR to the SC.

11. The method of Claim 1, wherein the discrete message is a Short Message Service (SMS) message.

12. The method of Claim 1, wherein the forwarding destination is a telephone number.

13. The method of Claim 1, wherein the forwarding destination is a network address.

14. The method of Claim 1, wherein the network includes a Message Center (MC), and wherein the step of sending the discrete message to the initial destination further comprises the step of sending a SMS Delivery Point-To-Point Invoke message including the initial destination to the MC.

15. The method of Claim 1, further comprising the steps of:
providing the forwarding destination; and
sending the discrete message to the forwarding destination.

16. The method of Claim 1, wherein the step of determining that the forwarding feature is activated further includes the step of:

determining that the forwarding feature is unconditionally activated.

17. The method of Claim 16, further comprising the steps of:
providing the forwarding destination; and
sending the discrete message to the forwarding destination.

18. The method of Claim 1, wherein the step of determining that the forwarding feature is activated further includes the step of:

determining that the forwarding feature is activated when the initial destination is busy.

19. The method of Claim 18, further comprising the steps of:
providing the forwarding destination; and
sending the discrete message to the forwarding destination.
20. The method of Claim 1, wherein the step of determining that the forwarding feature is activated further includes the step of:
determining that the forwarding feature is activated when the initial destination is not responding.
21. The method of Claim 20, further comprising the steps of:
providing the forwarding destination; and
sending the discrete message to the forwarding destination.
22. A method for forwarding a discrete data message from an initial destination to a forwarding destination within a network, comprising the steps of:
sending the discrete message to the initial destination wherein the discrete message is a Short Message Service (SMS) message; and
determining that a user at the initial destination desires for the message to be forwarded to a user specified forwarding destination.
23. The method of Claim 22, further comprising the step of:
requesting activation of a forwarding feature.

24. The method of Claim 22, further comprising the step of:
forwarding the discrete message on to the specified forwarding destination.

25. The method of Claim 22, further comprising the step of:
validating the discrete message as a valid message for the forwarding destination.

26. The method of Claim 22, further comprising the steps of:
providing the forwarding destination;
sending the discrete message to the forwarding destination, wherein the initial destination is associated with a user profile, wherein the network includes a Switching Center [SC] and a Location Register (LR), and wherein the step of requesting activation of a forwarding feature further comprises the steps of:

 sending an activation feature code and the forwarding destination from the initial destination to the SC;

 sending a message requesting activation of the forwarding feature and the forwarding destination from the SC to the LR; and

 updating the user profile in the LR to indicate the forwarding feature is activated.

27. The method of Claim 26, further including the step of:
validating the forwarding destination as a valid destination for delivering a discrete message.

28. The method of Claim 22, further comprising the steps of:
providing the forwarding destination;

sending the discrete message to the forwarding destination, wherein the initial destination is associated with a user profile, wherein the network includes a Switching Center (SC) and a Location Register (LR), and wherein the step of requesting activation of a forwarding feature further comprising the steps of:

marking the forwarding feature as activated in the user profile; and
storing the forwarding destination.

29. The method of Claim 28, further including the step of:

validating the forwarding destination as a valid destination for delivering a discrete message.

30. A method for forwarding a discrete data message from an initial destination to a forwarding destination within a network, comprising the steps of:

requesting activation of a forwarding feature;

sending the discrete message to the initial destination;

determining that a user at the initial destination desires for the message to be forwarded to a user specified forwarding destination, wherein the initial destination is associated with a user profile, wherein the network includes a Switching Center (SC) and a Location Register (LR), and wherein the step of requesting activation of a forwarding feature further comprising the steps of:

marking the forwarding feature as activated in the user profile;

storing the forwarding destination;

downloading the user profile from the LR to the SC;

providing the forwarding destination; and

forwarding the discrete message on to the specified forwarding destination.

31. The method of Claim 30, further including the step of:

validating the forwarding destination as a valid destination for delivering a discrete message.

Feature Activation (Subscriber Procedure) and Command (90, 100, 105)

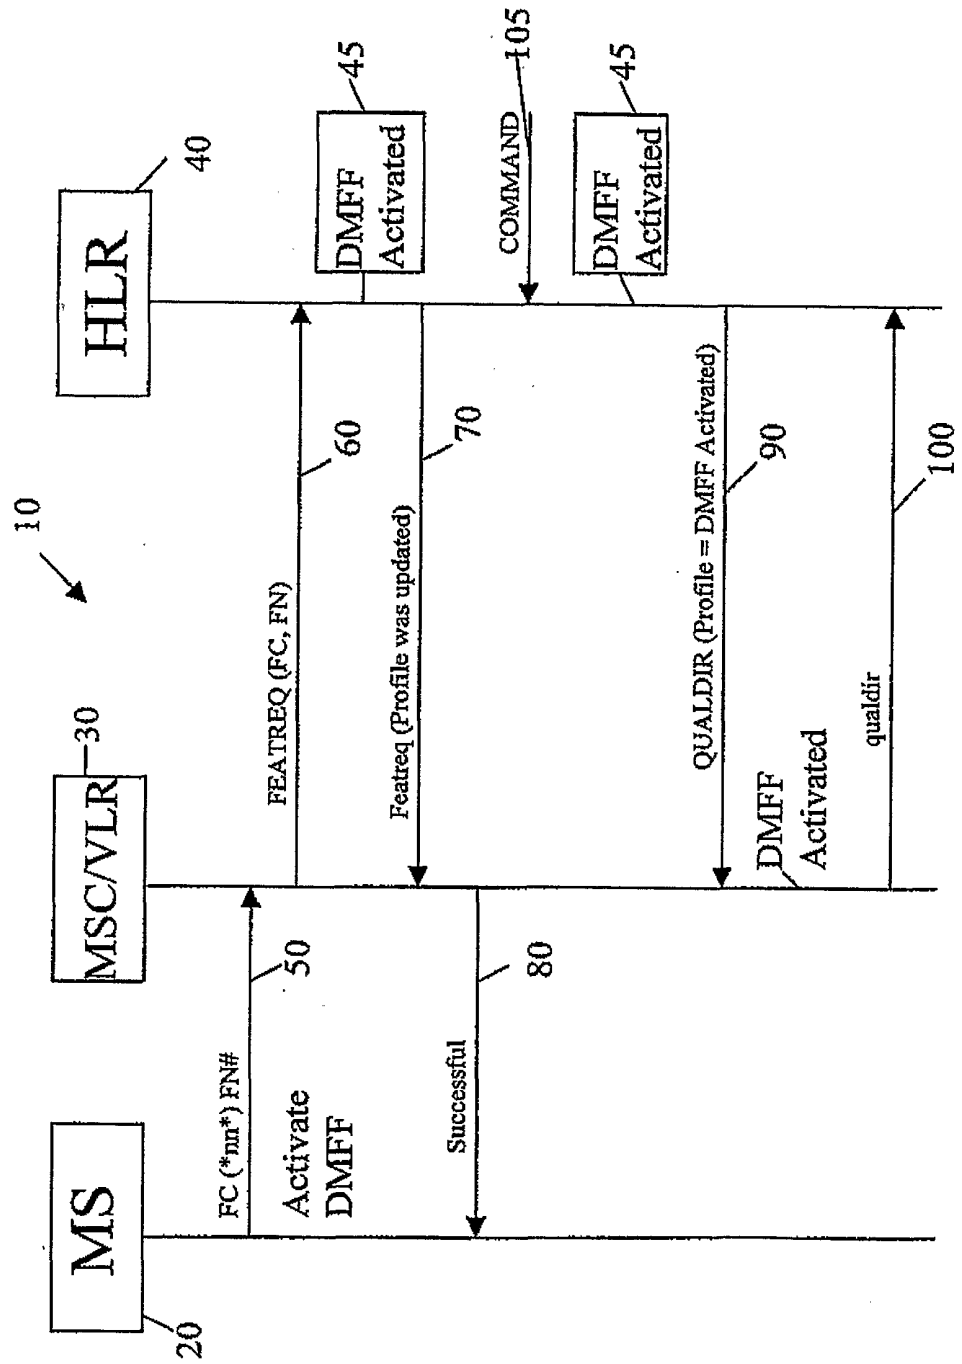


Figure 1A

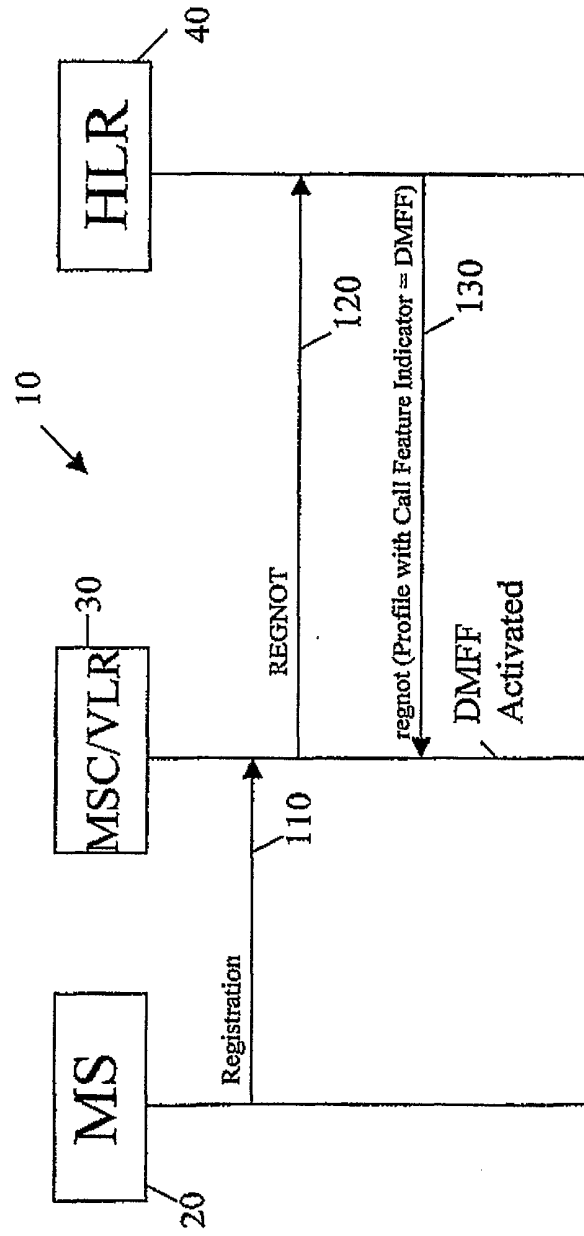


Figure 1B

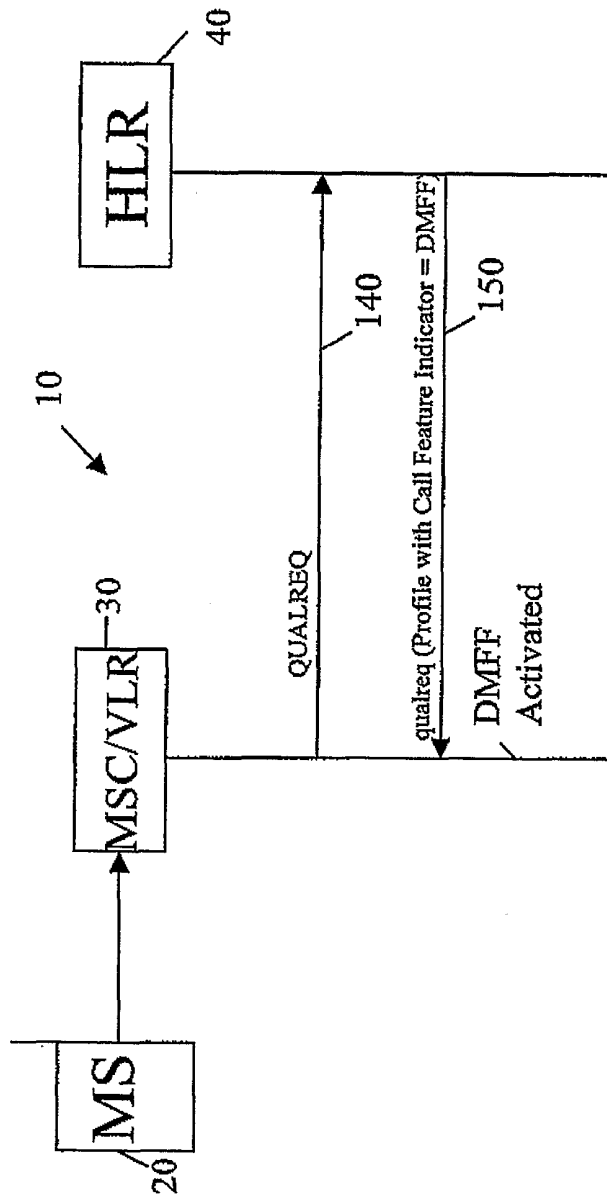


Figure 1C

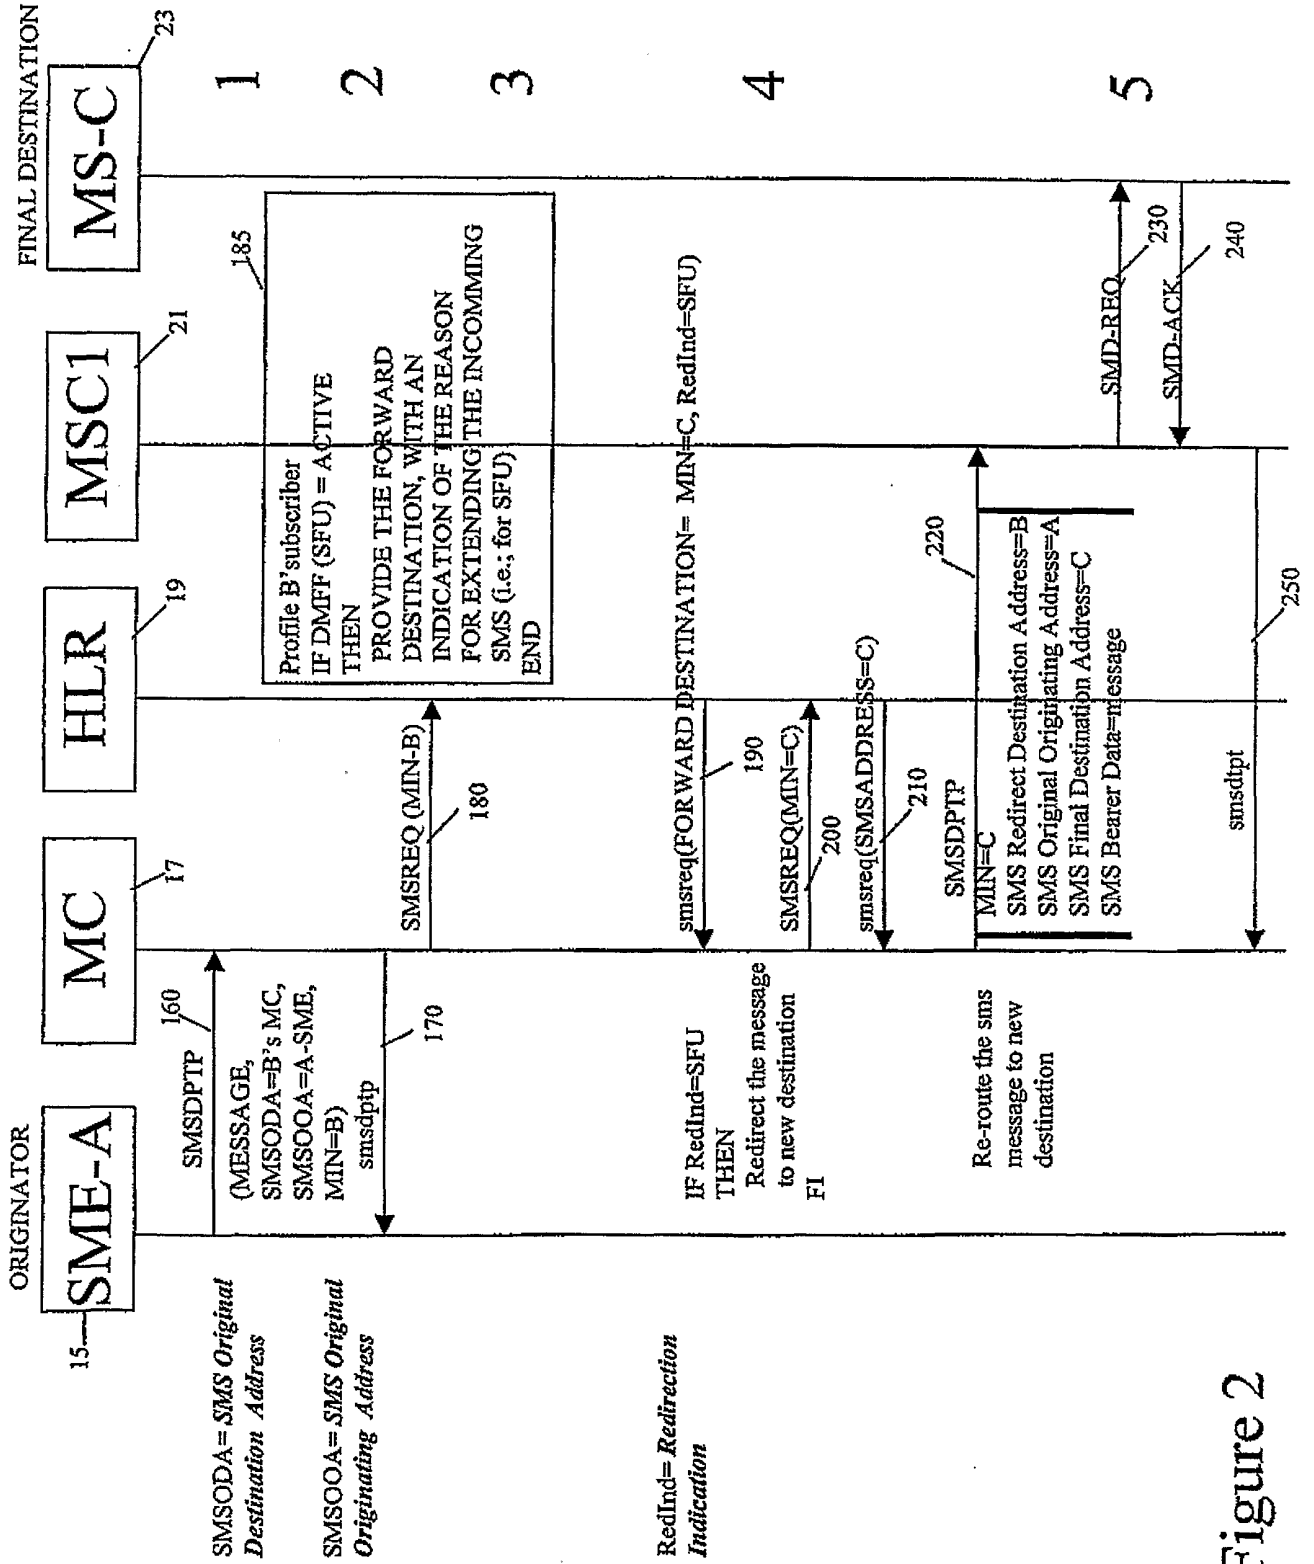


Figure 2

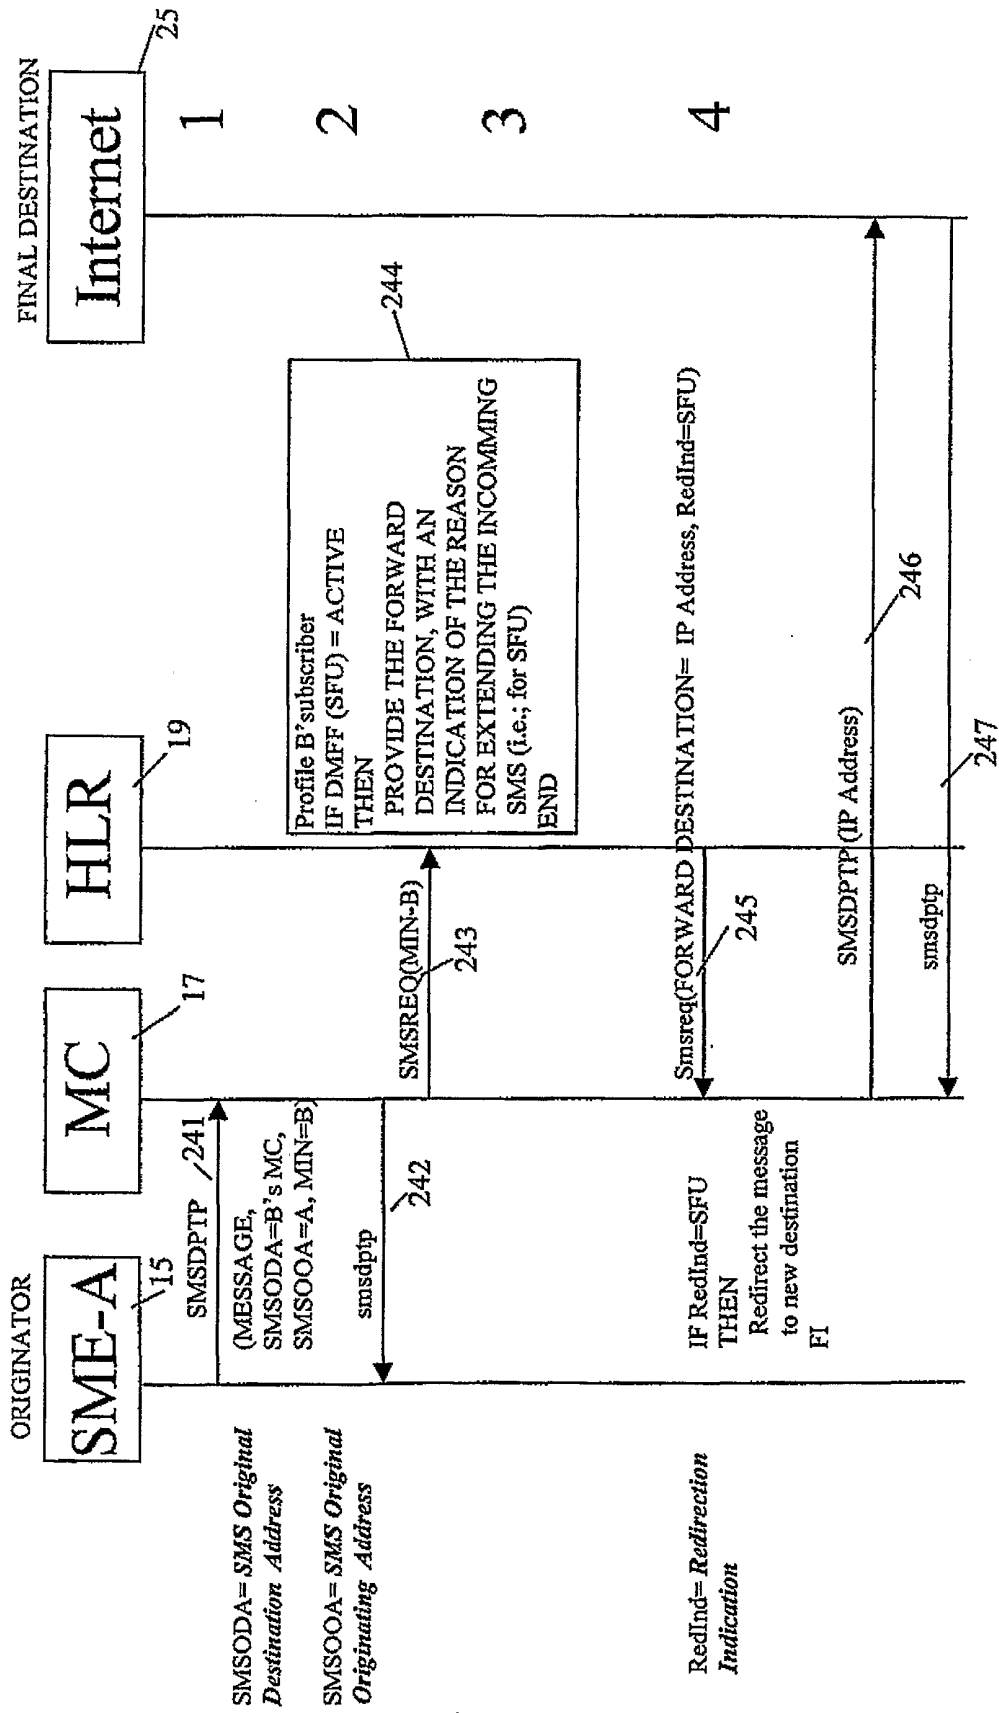


Figure 3

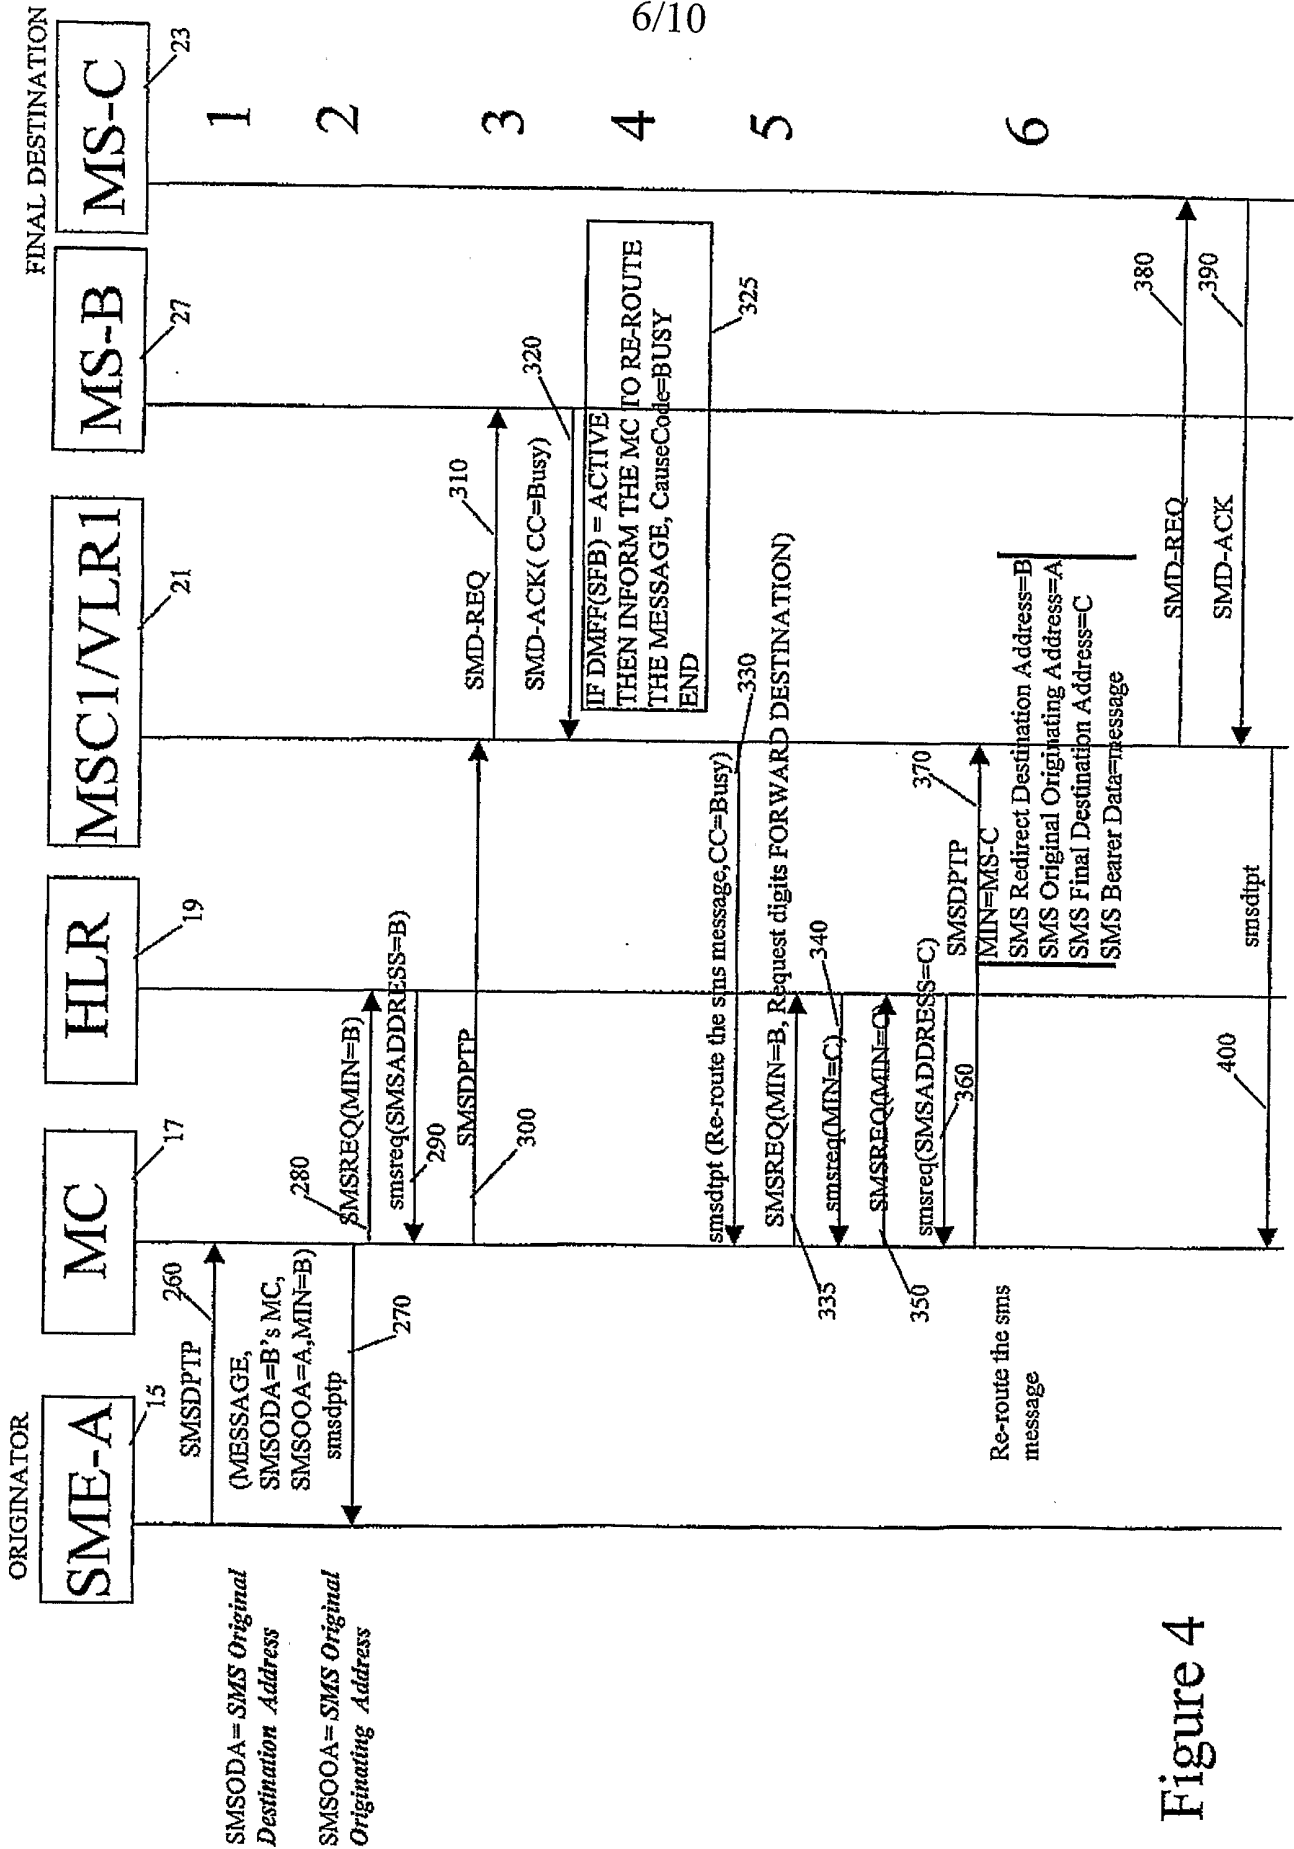


Figure 4

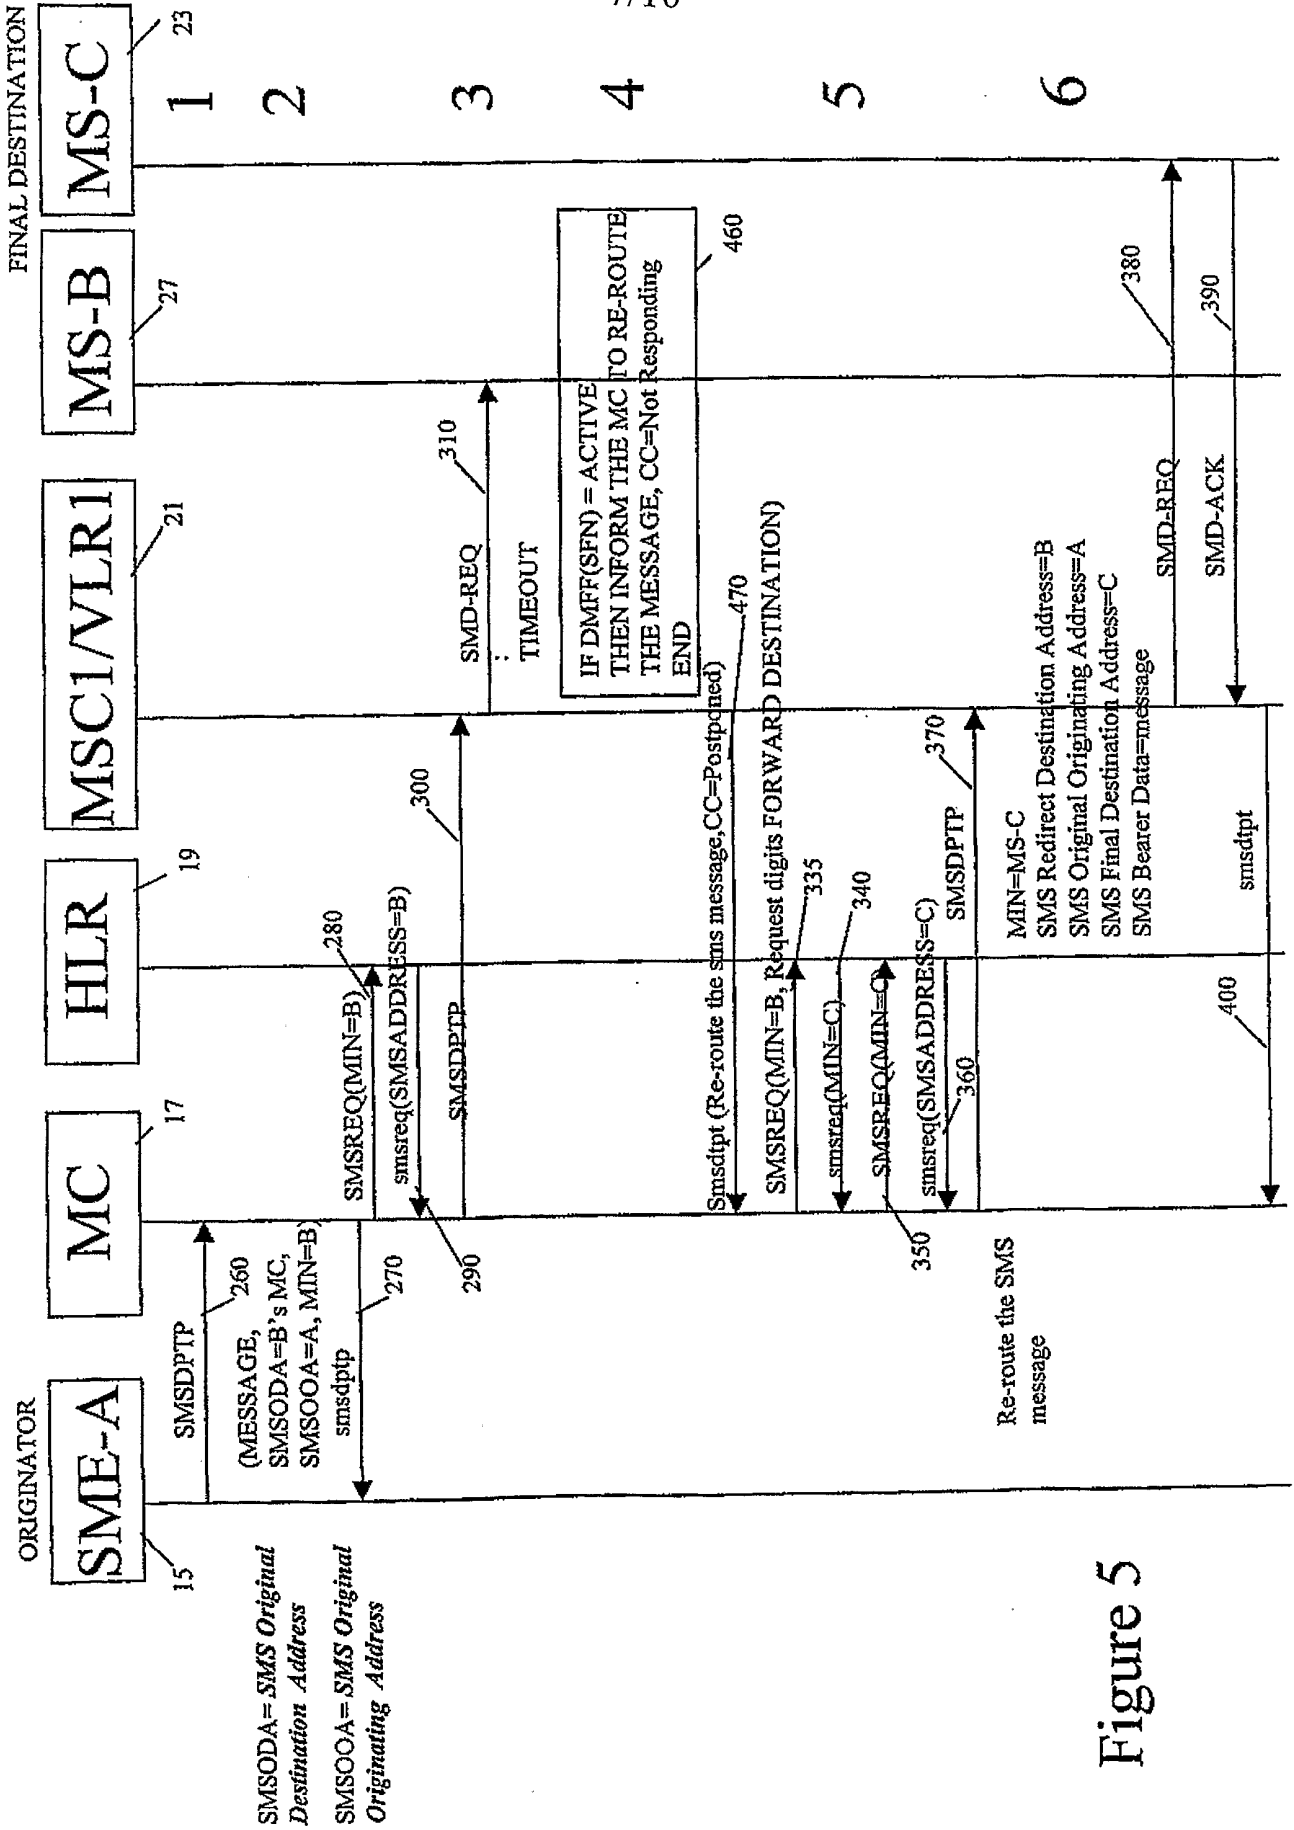


Figure 5

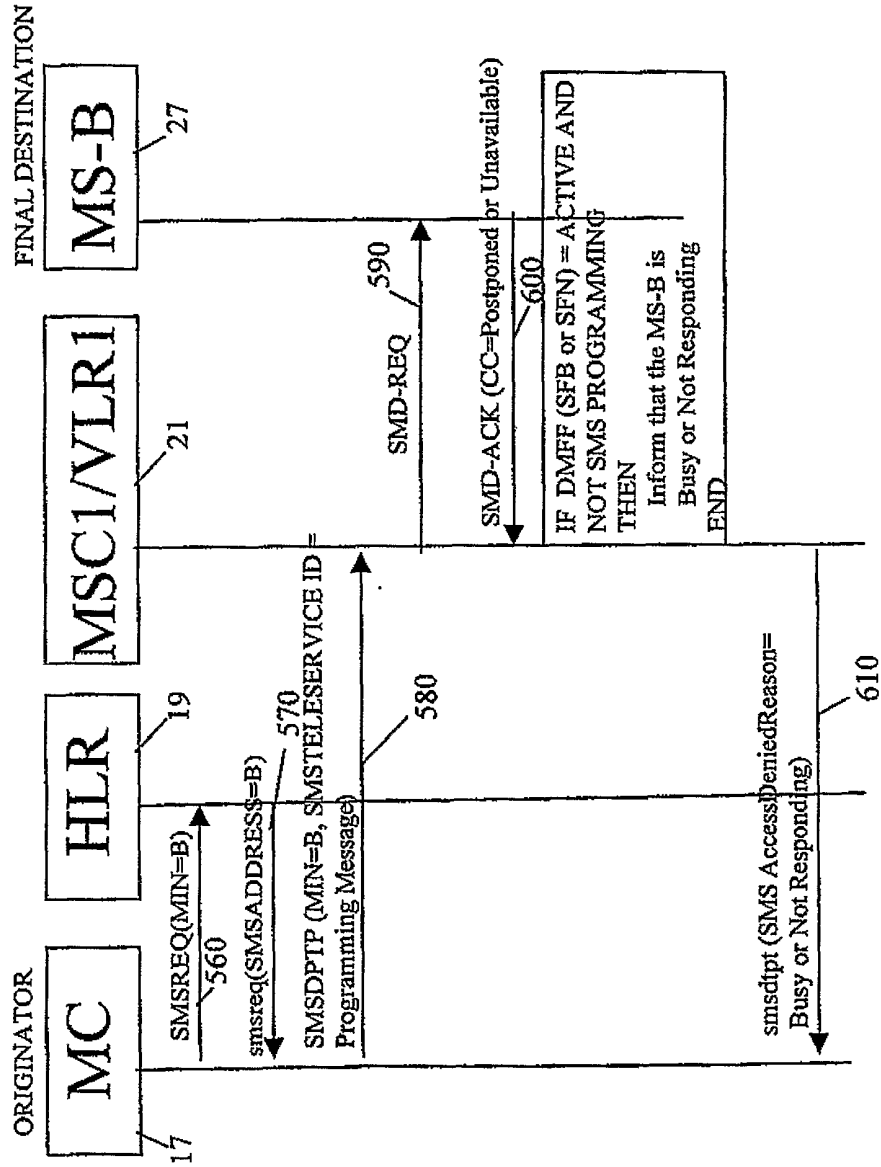


Figure 6A

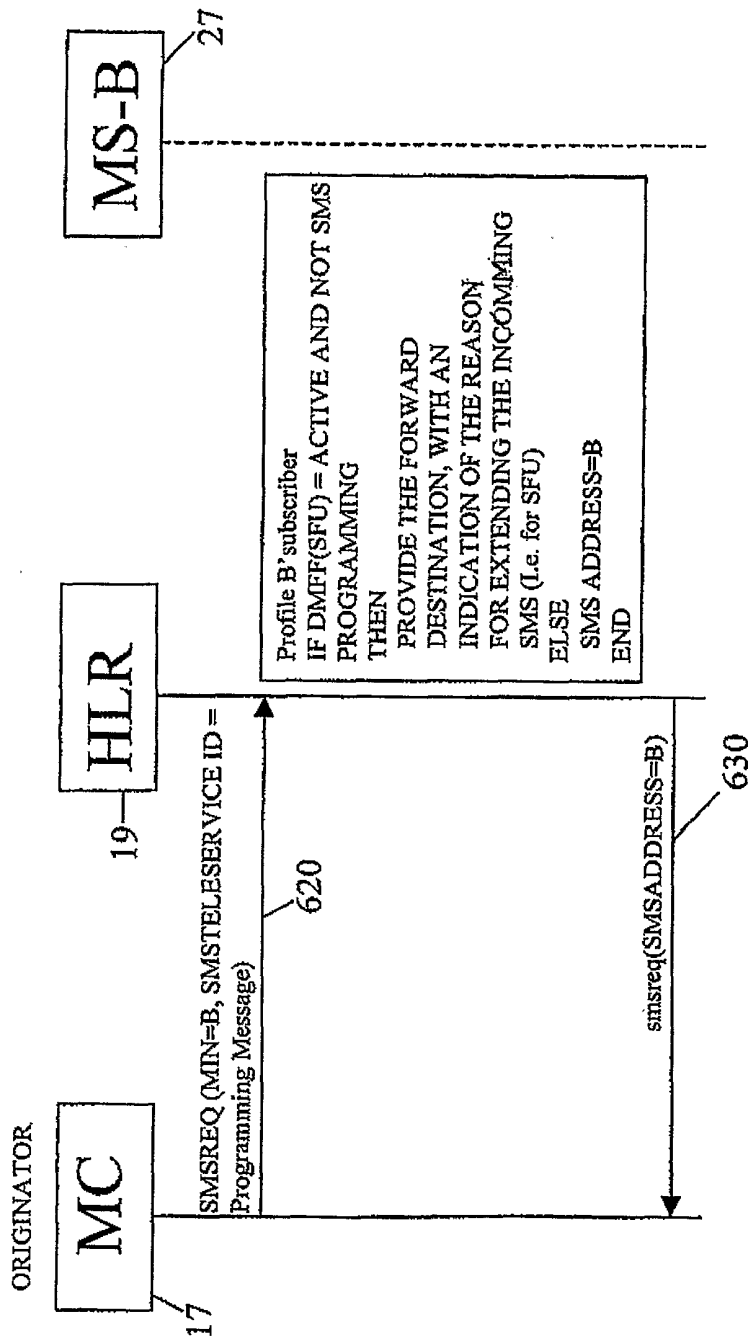


Figure 6B

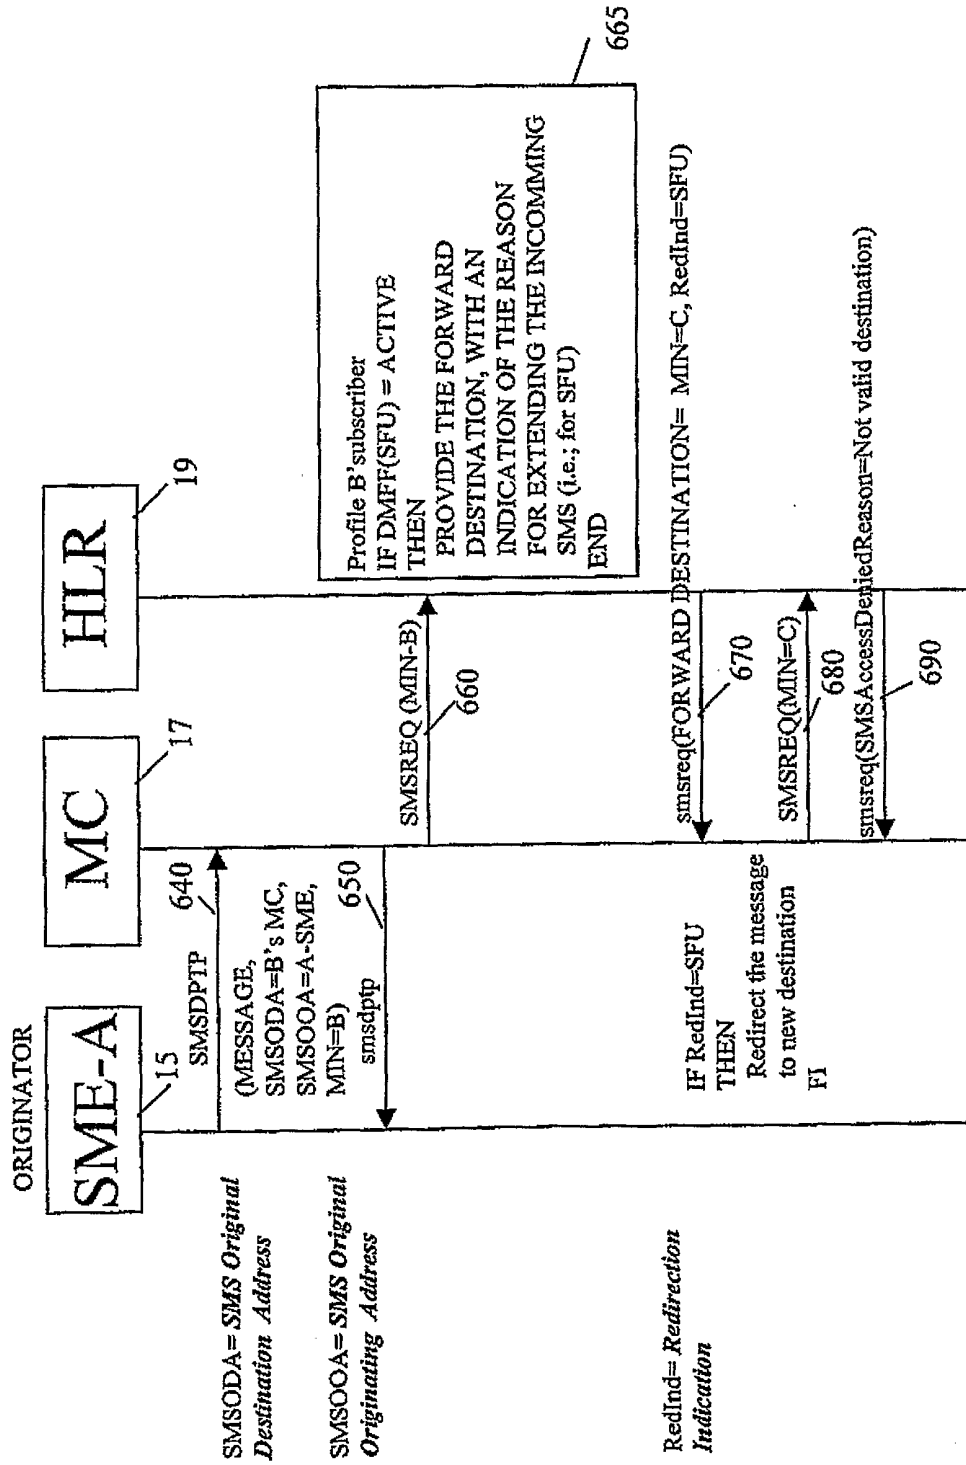


Figure 6C