



US008056379B2

(12) **United States Patent**  
**Dickhans et al.**

(10) **Patent No.:** **US 8,056,379 B2**  
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **LOCK CYLINDER WITH OFFSET PIN**

(75) Inventors: **William J. Dickhans**, Colorado Springs, CO (US); **Paul O. Gardner**, Colorado Springs, CO (US); **Misty G. Jackson**, Colorado Springs, CO (US)

(73) Assignee: **Schlage Lock Company**, Carmel, IN (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/619,774**

(22) Filed: **Jan. 4, 2007**

(65) **Prior Publication Data**

US 2008/0163657 A1 Jul. 10, 2008

(51) **Int. Cl.**  
**E05B 27/06** (2006.01)

(52) **U.S. Cl.** ..... **70/493**; 70/371; 70/421

(58) **Field of Classification Search** ..... 70/358,  
70/493-496, 420, 453, 375, 347, 346, 356,  
70/DIG. 15

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2,087,554 A	7/1937	Schoorel	
3,059,462 A *	10/1962	Check	70/384
3,099,151 A *	7/1963	Schlage	70/383
3,431,757 A	3/1969	Hori	
3,479,849 A *	11/1969	Check	70/495
3,590,615 A *	7/1971	Schultz	70/421
4,196,604 A	4/1980	Vorob	
4,221,121 A *	9/1980	Tietz	70/358

4,222,252 A *	9/1980	Tietz	70/495
4,580,425 A	4/1986	Smith	
4,875,352 A	10/1989	Smallegan et al.	
5,079,936 A	1/1992	Stefanek	
5,088,306 A *	2/1992	Field	70/375
5,138,856 A	8/1992	Chyun	
5,375,444 A *	12/1994	Smith	70/495
5,475,998 A *	12/1995	Raskevicius et al.	70/495
5,893,285 A *	4/1999	Athanassiou	70/493
5,894,750 A	4/1999	Liaw	
5,966,971 A	10/1999	Keller	
6,477,876 B1	11/2002	Kim	
6,601,419 B2	8/2003	Huang et al.	
7,114,357 B2	10/2006	Armstrong et al.	
2003/0037579 A1 *	2/2003	Wu	70/358

(Continued)

**FOREIGN PATENT DOCUMENTS**

DE 10333211 A1 3/2005

(Continued)


*Primary Examiner* — Kristina Fulton

(74) *Attorney, Agent, or Firm* — Michael Best & Friedrich LLP

(57) **ABSTRACT**

A lock cylinder that includes a housing and a plug. The housing includes a wall that defines a hollow portion and a pin portion that defines a first pin chamber that is configured to receive a first pin. The plug includes a body rotatably housed within the hollow portion of the housing. A key slot is defined in the body in part by a pin resting surface **90**, and a second pin chamber is disposed in communication with the key slot. A second pin is disposed within the second pin chamber and is configured to engage the pin resting surface **90**. An engagement member is disposed within the body as a separate piece, and engaged with the second pin to space the second pin a distance from the pin resting surface **90** in the absence of a key in the slot.

**65 Claims, 20 Drawing Sheets**

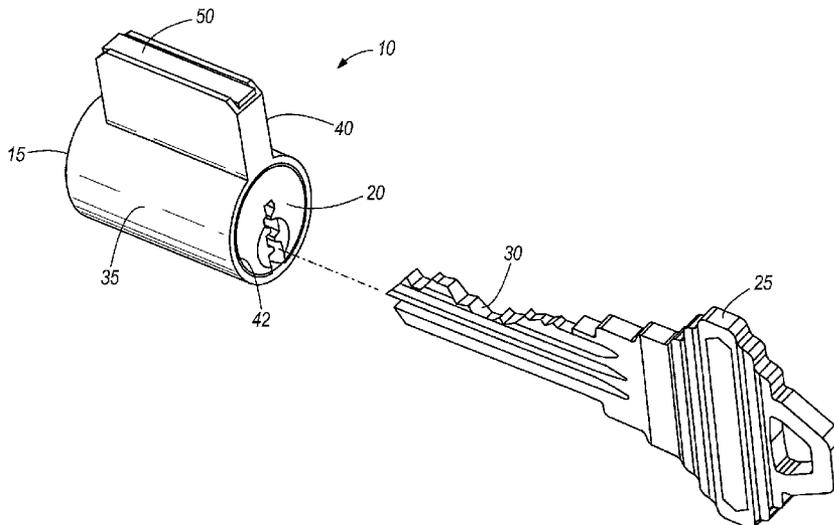

# US 8,056,379 B2

Page 2

---

## U.S. PATENT DOCUMENTS

2004/0172995	A1	9/2004	Haggstrom
2005/0172688	A1	8/2005	Widen
2005/0235714	A1	10/2005	Lindstrom
2006/0096345	A1	5/2006	Chen
2006/0144104	A1	7/2006	Chang

## FOREIGN PATENT DOCUMENTS

DE	102005001085	*	7/2006
DE	102005001085	A1	7/2006
EP	1418294	A2	5/2004
WO	2004/029390	A1	4/2004

\* cited by examiner

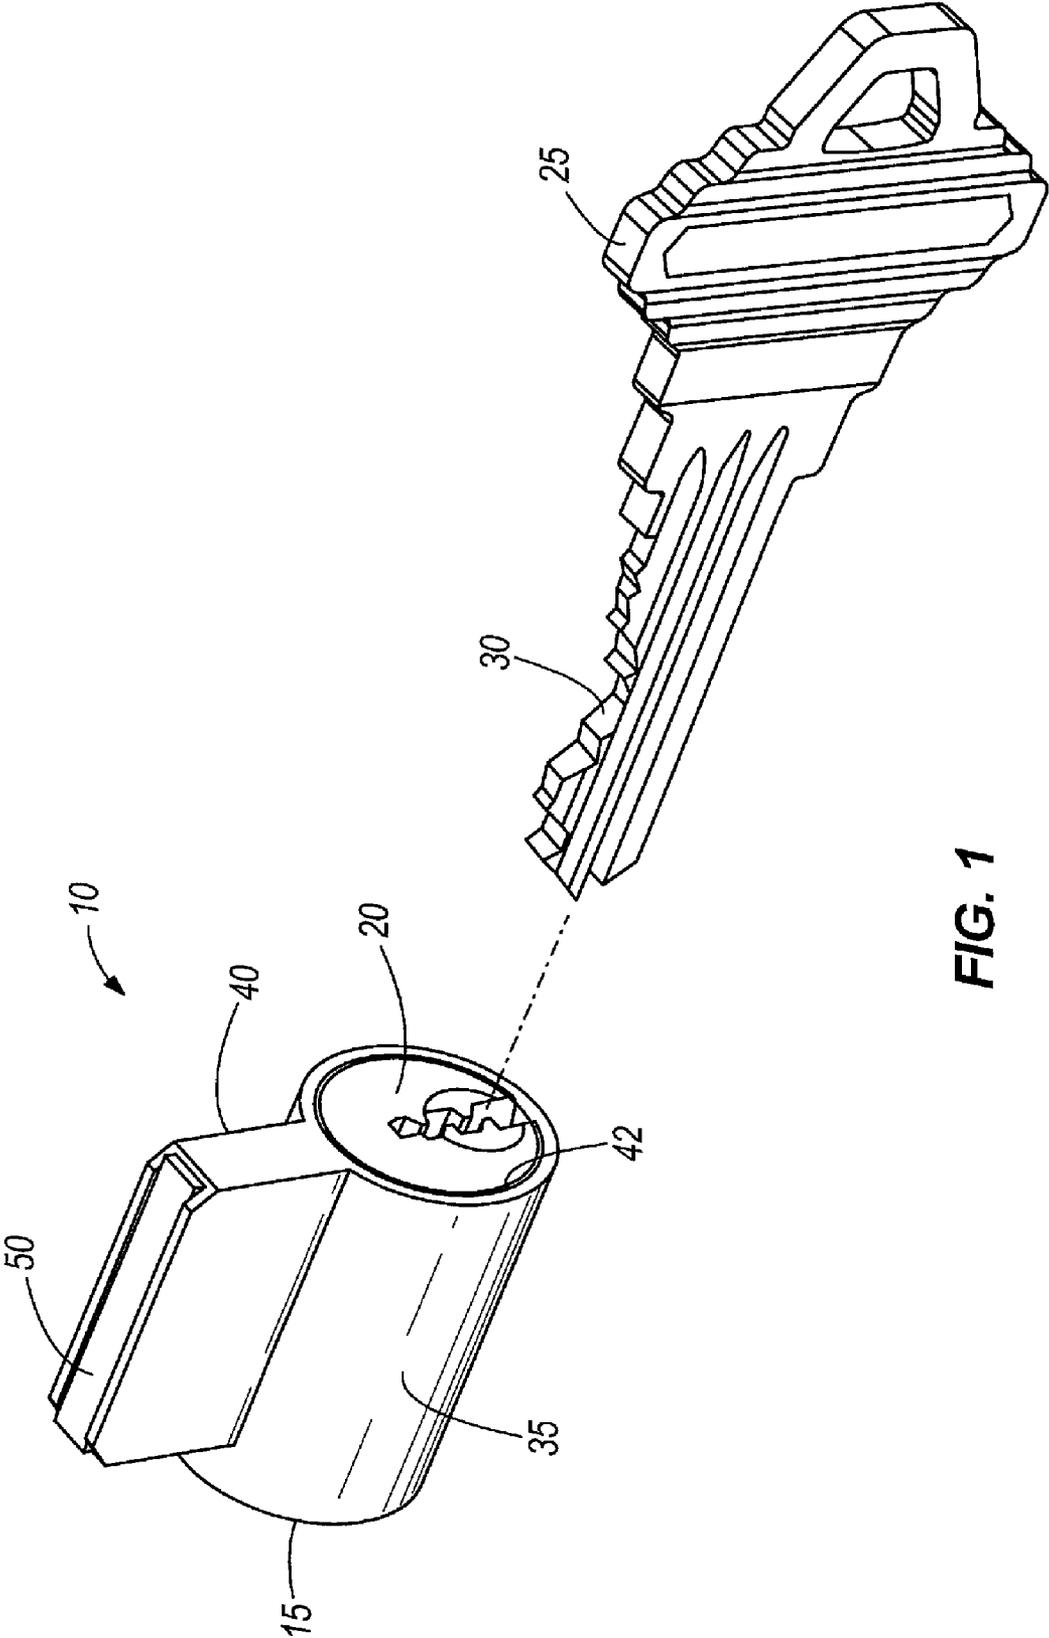
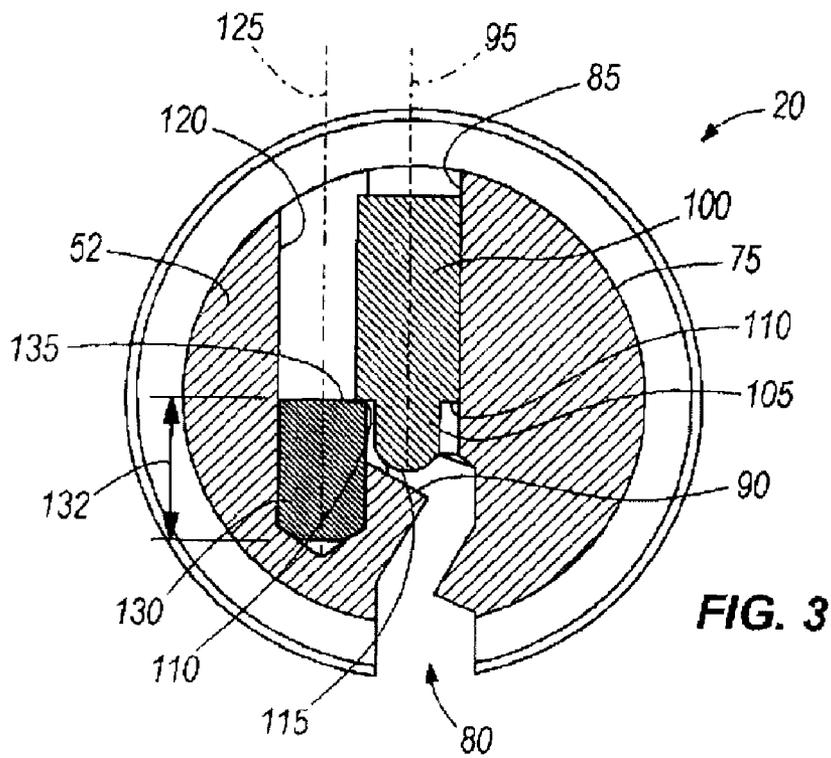
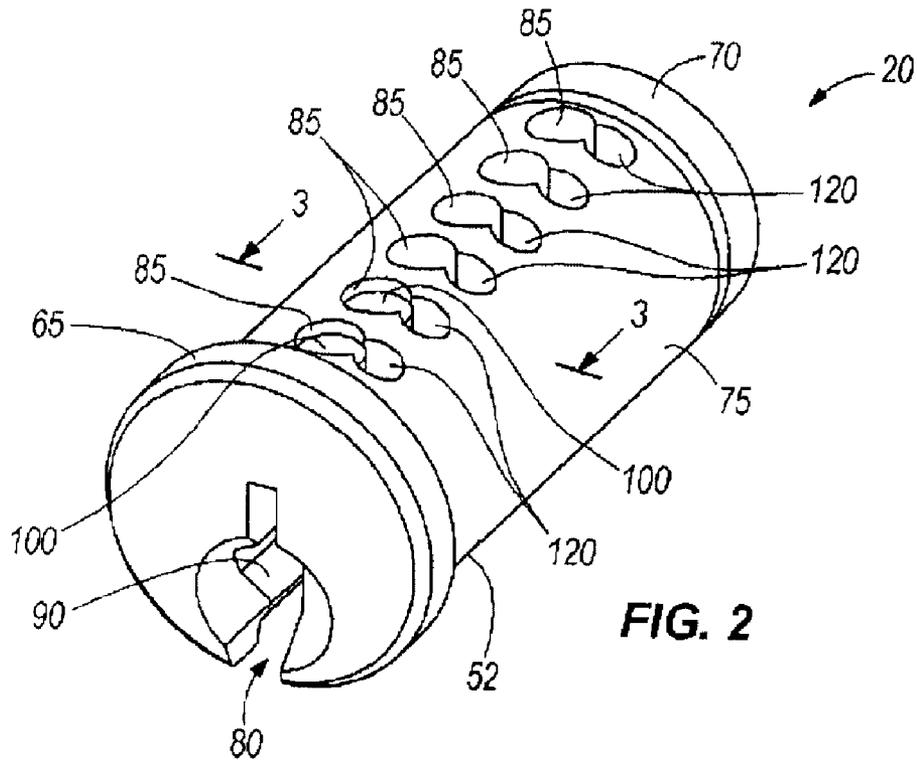
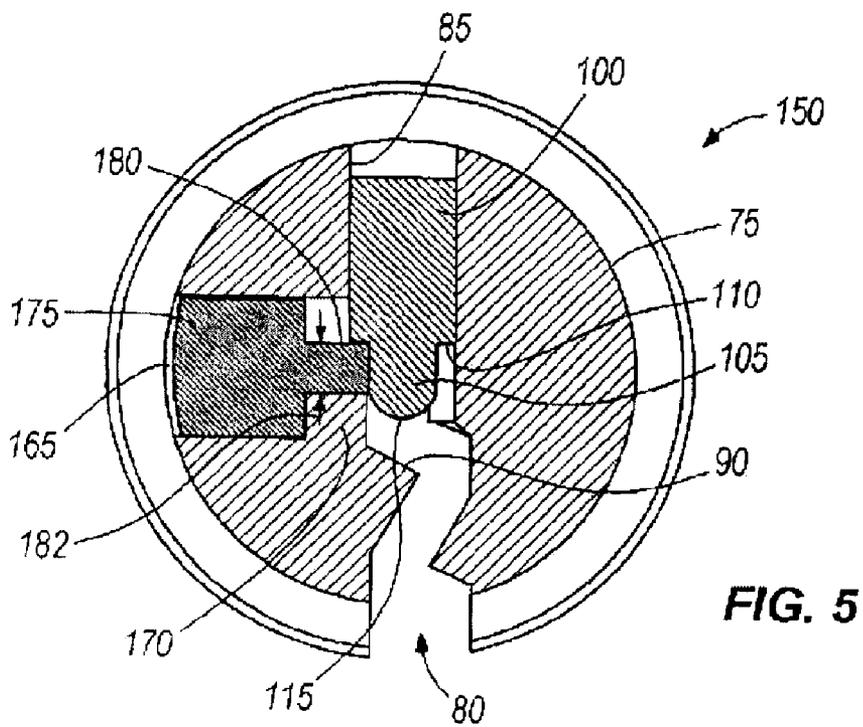
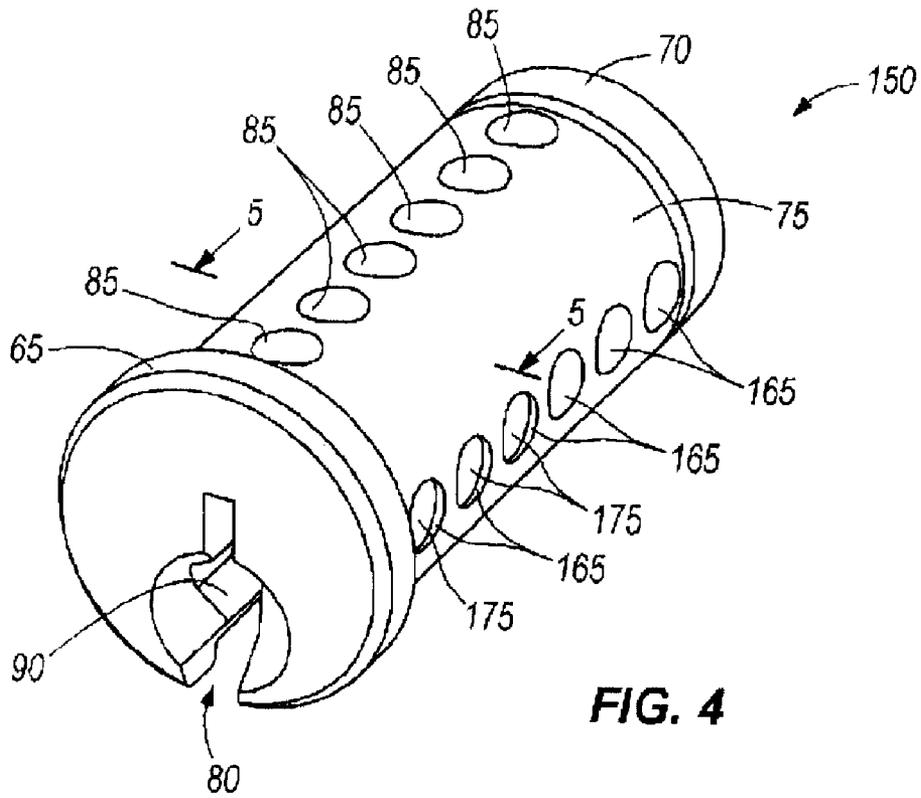


FIG. 1





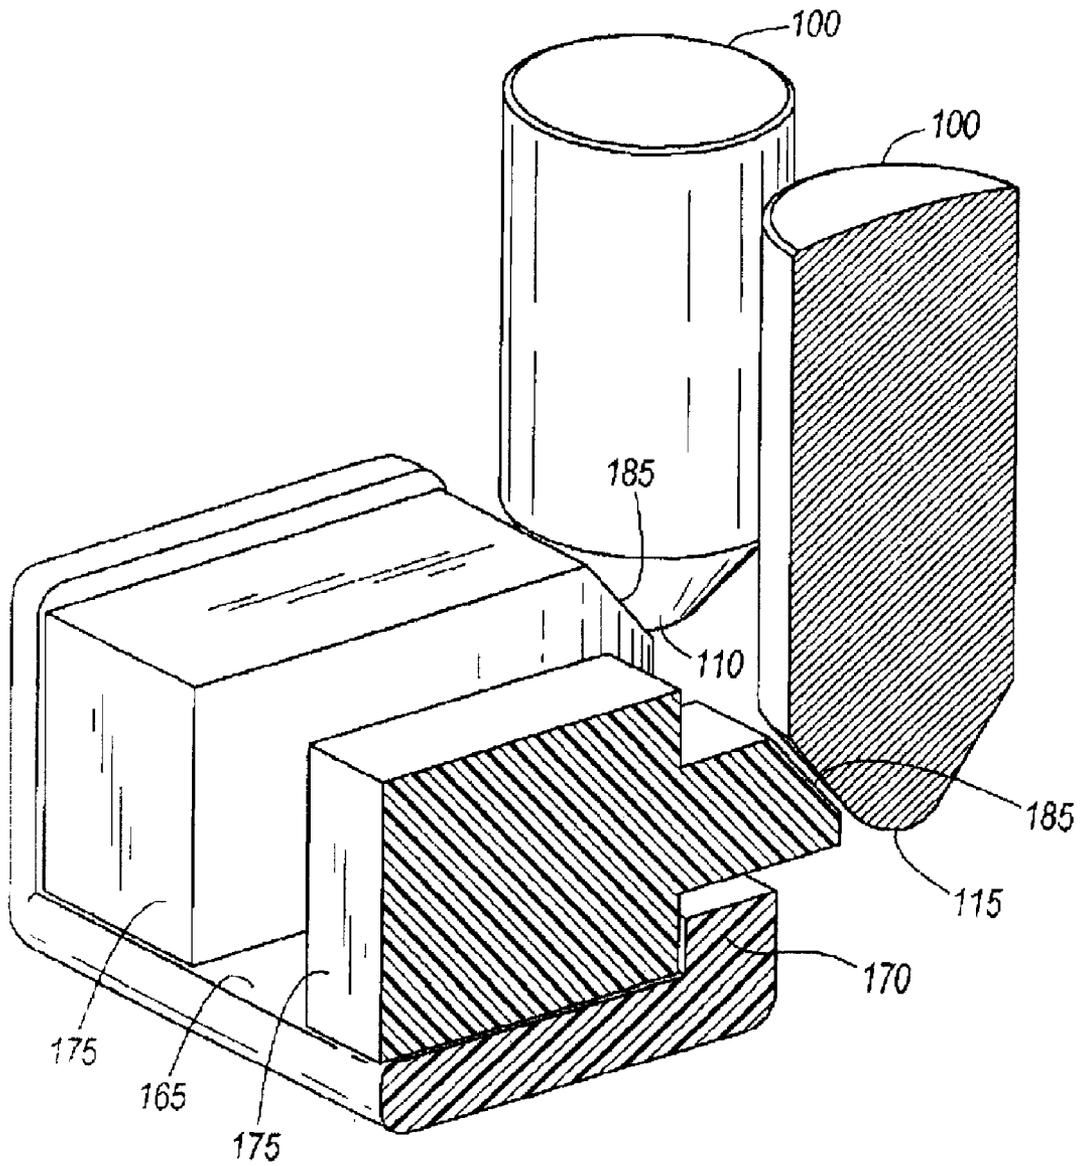


FIG. 6

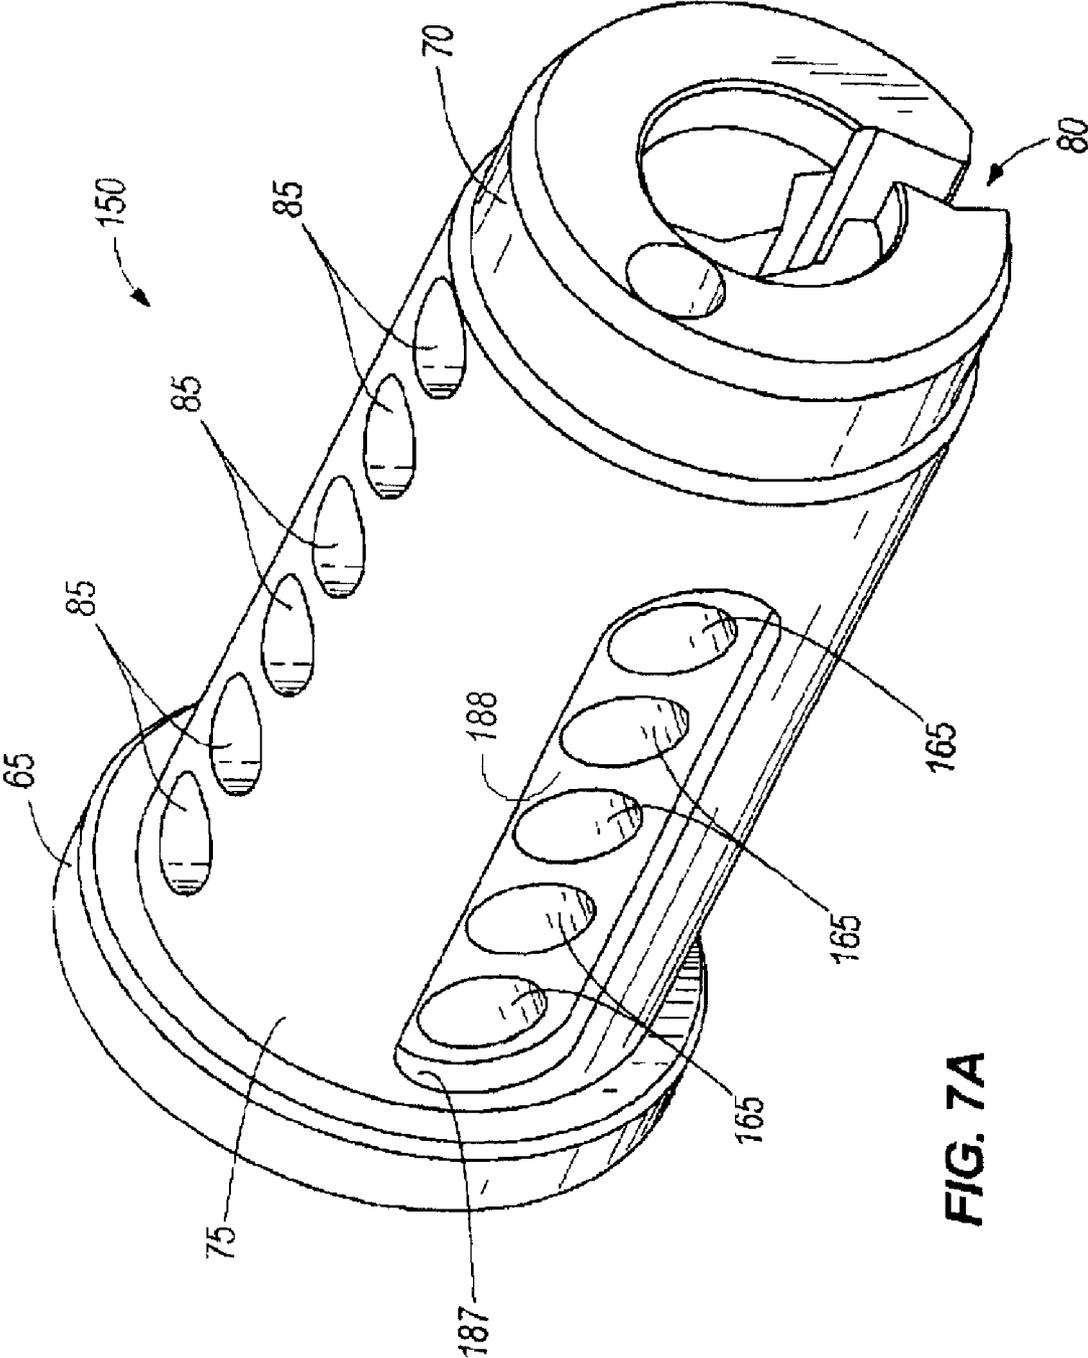


FIG. 7A

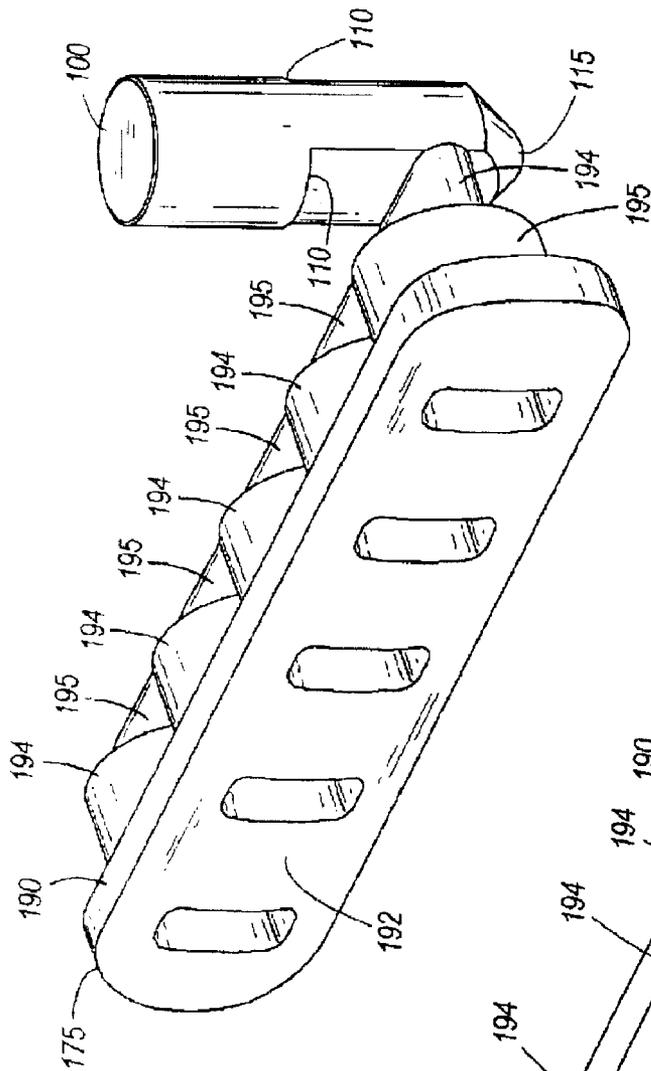


FIG. 7C

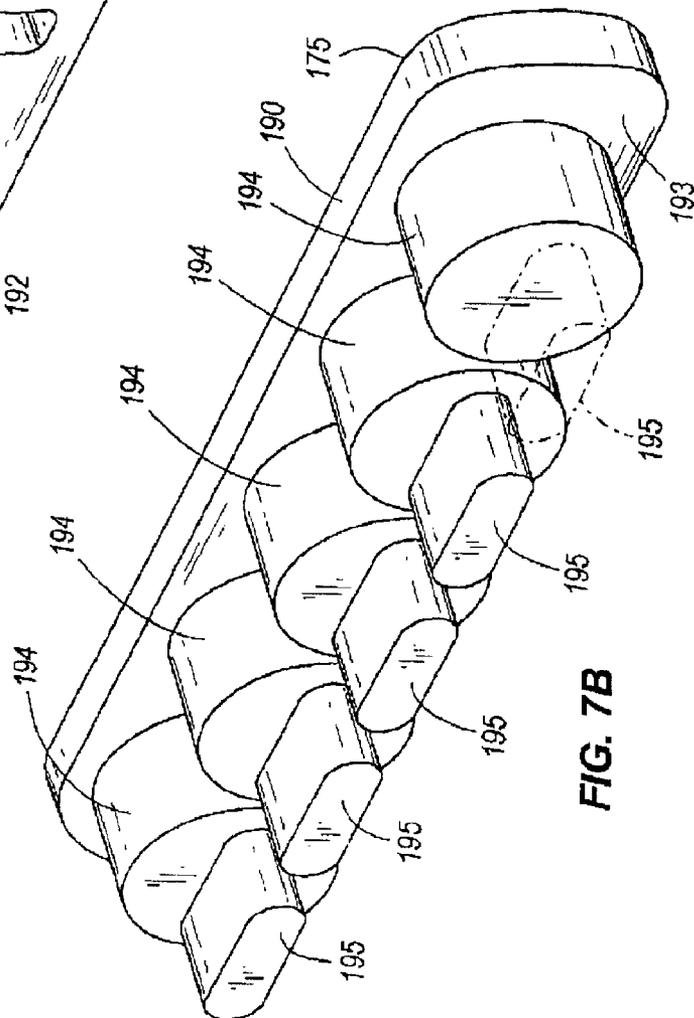
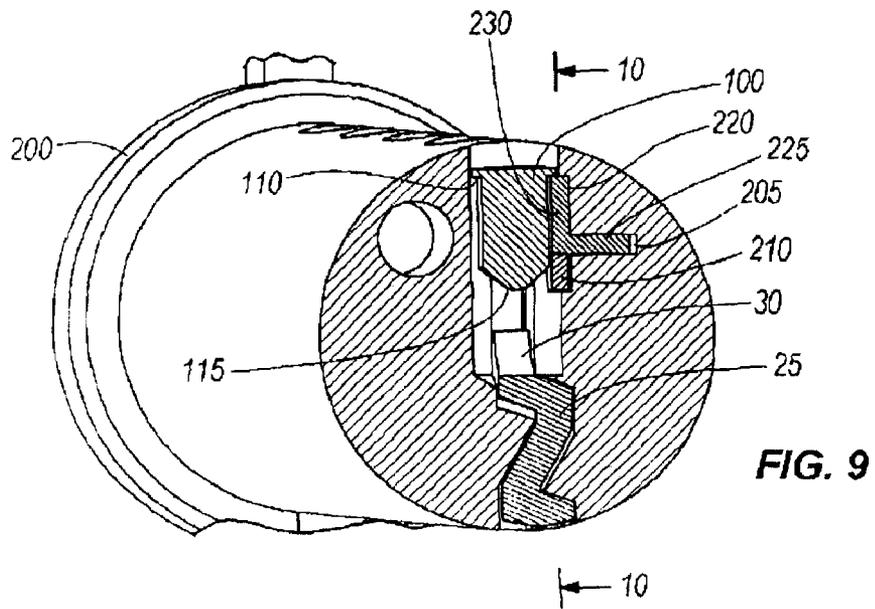
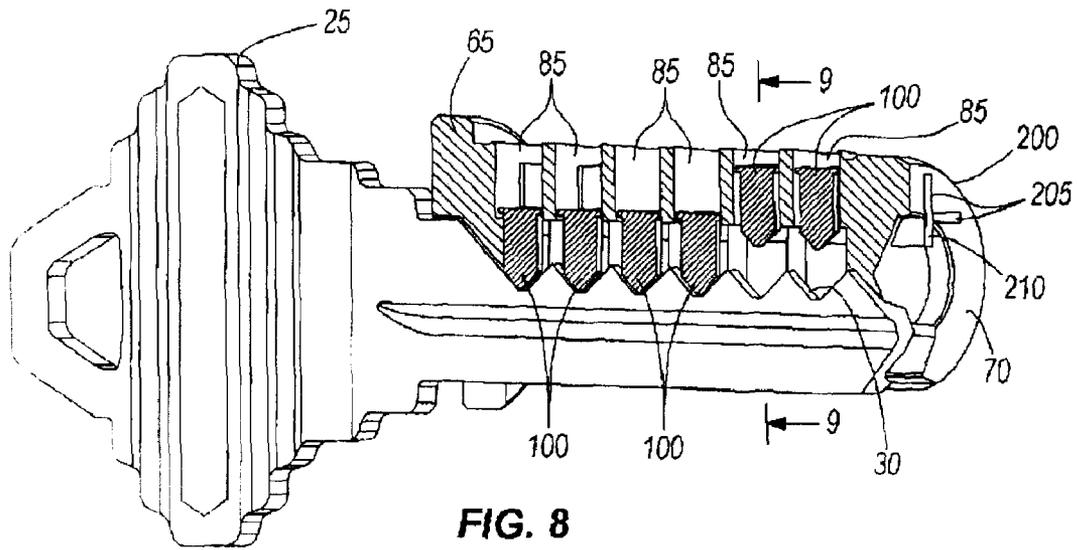


FIG. 7B



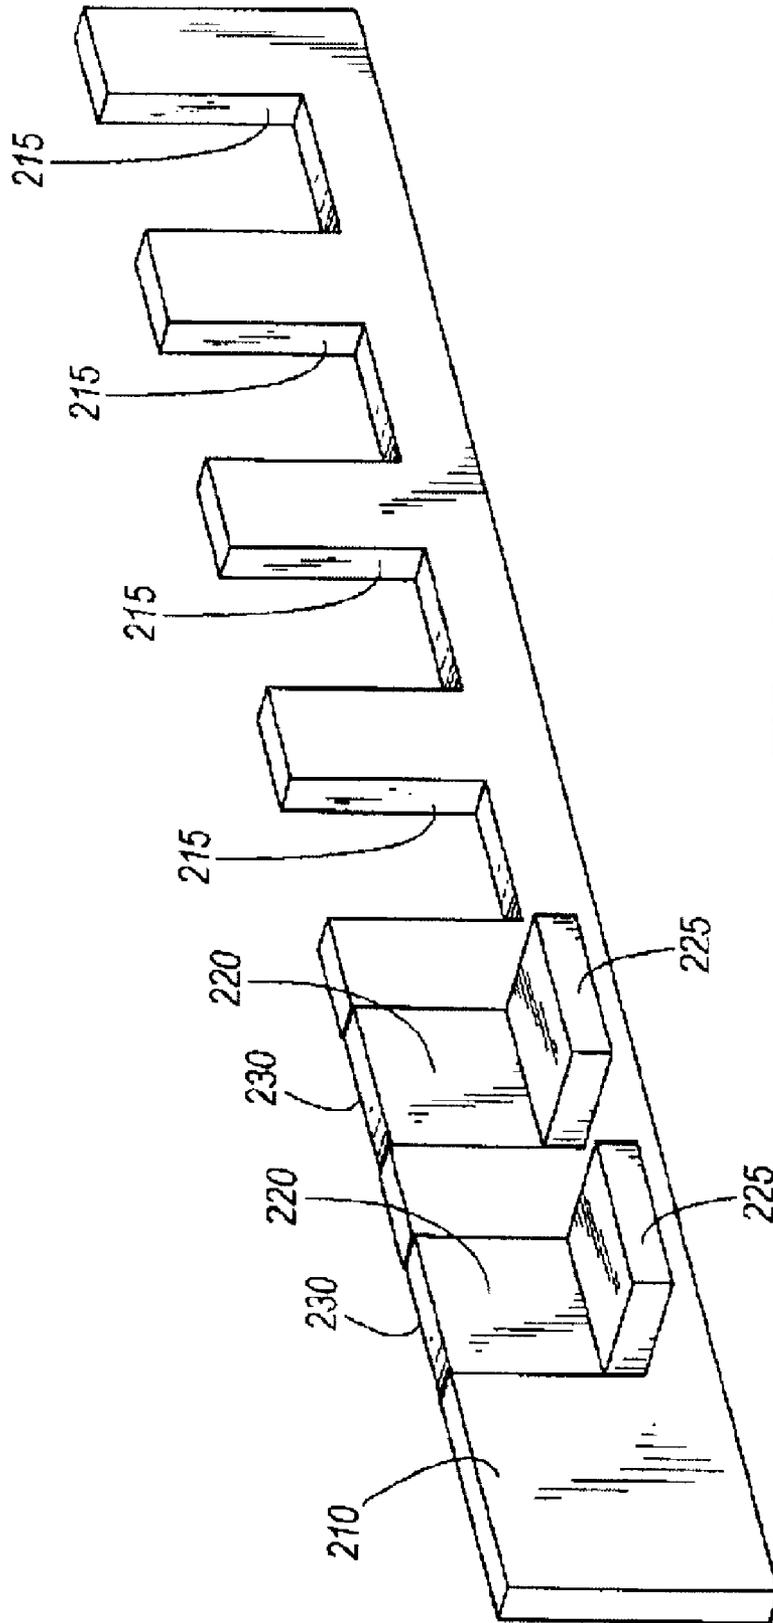


FIG. 10A

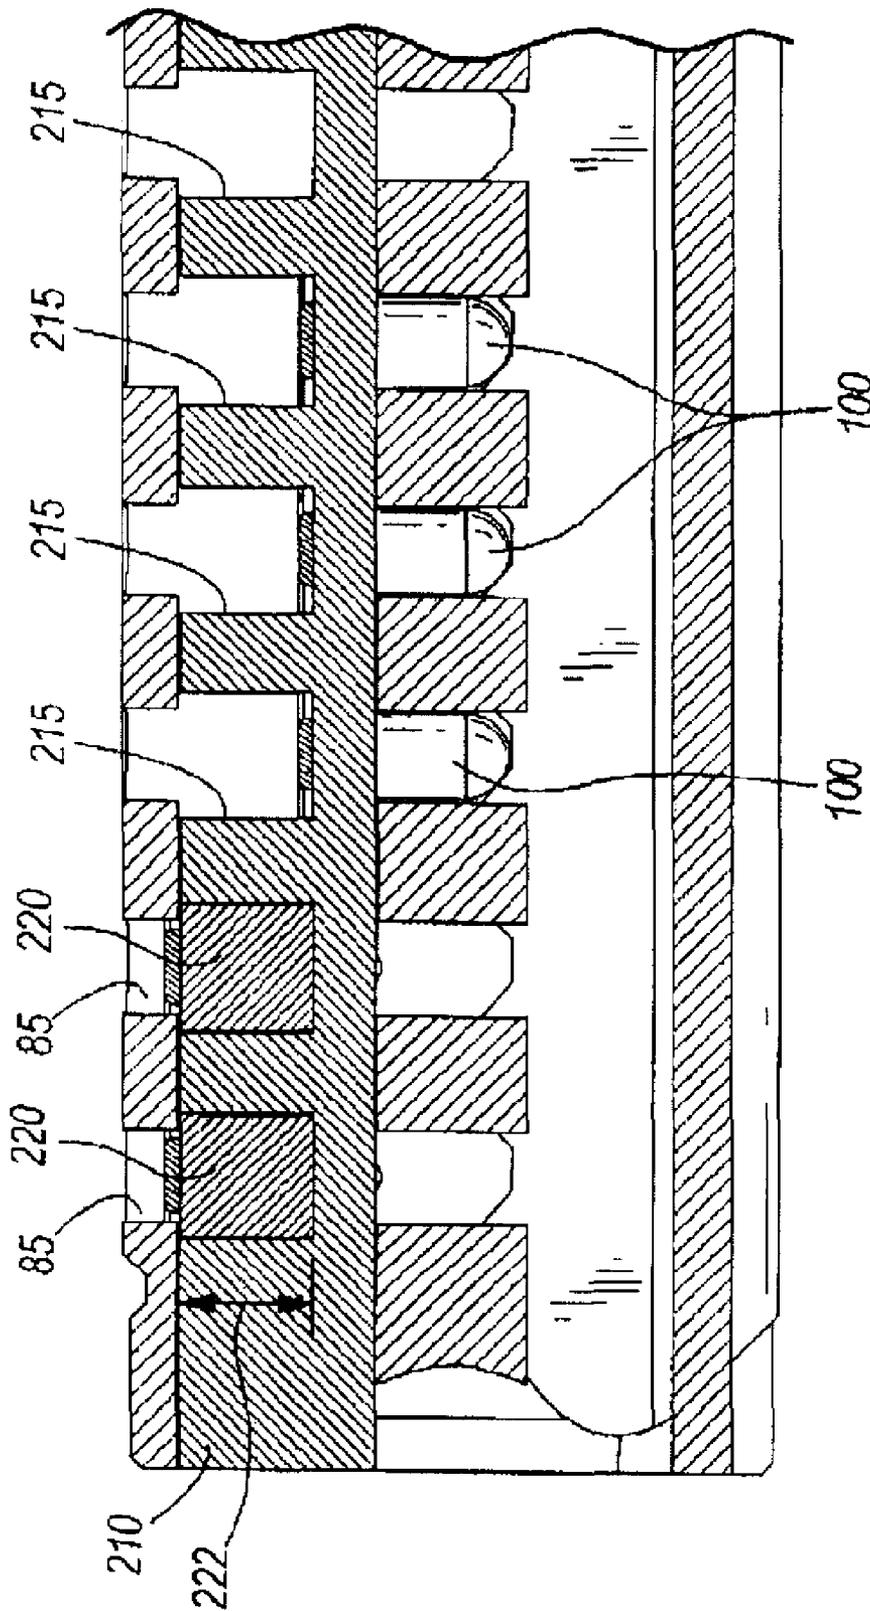


FIG. 10B

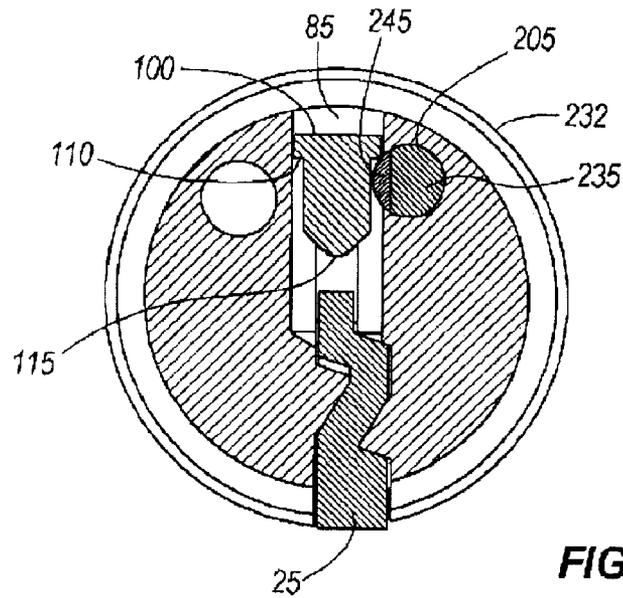


FIG. 11

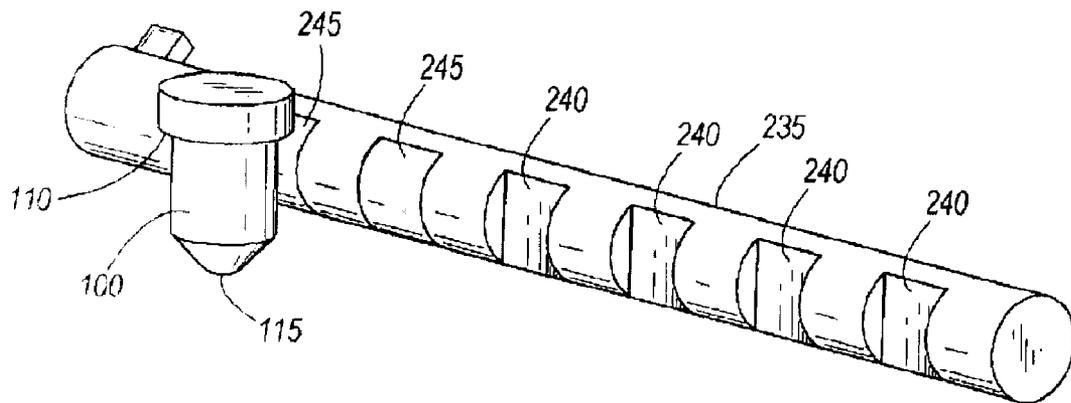


FIG. 12

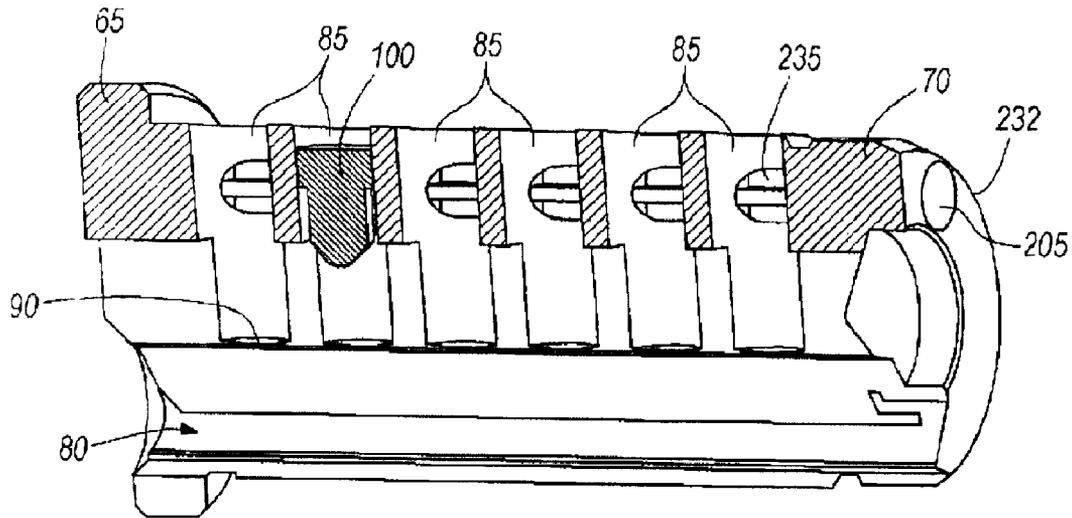


FIG. 13

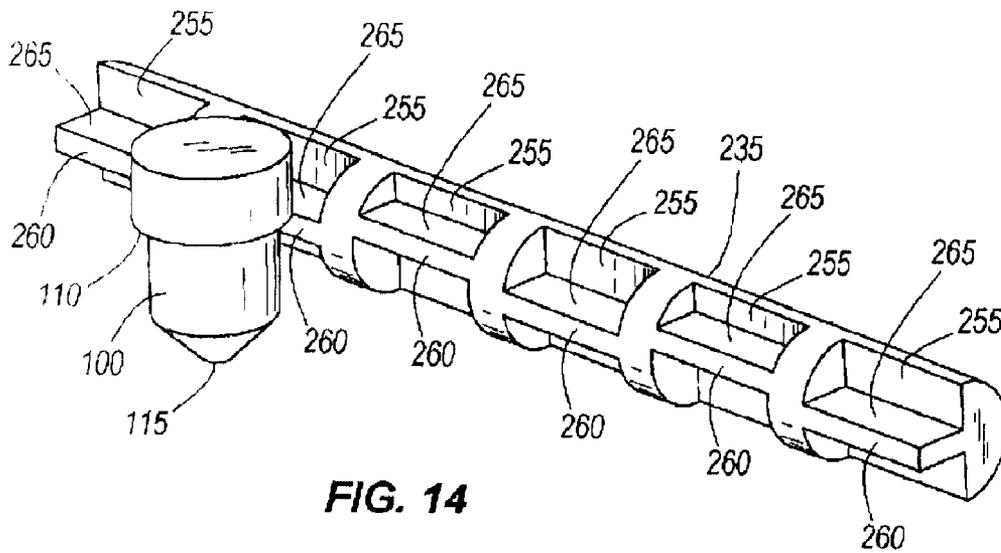


FIG. 14

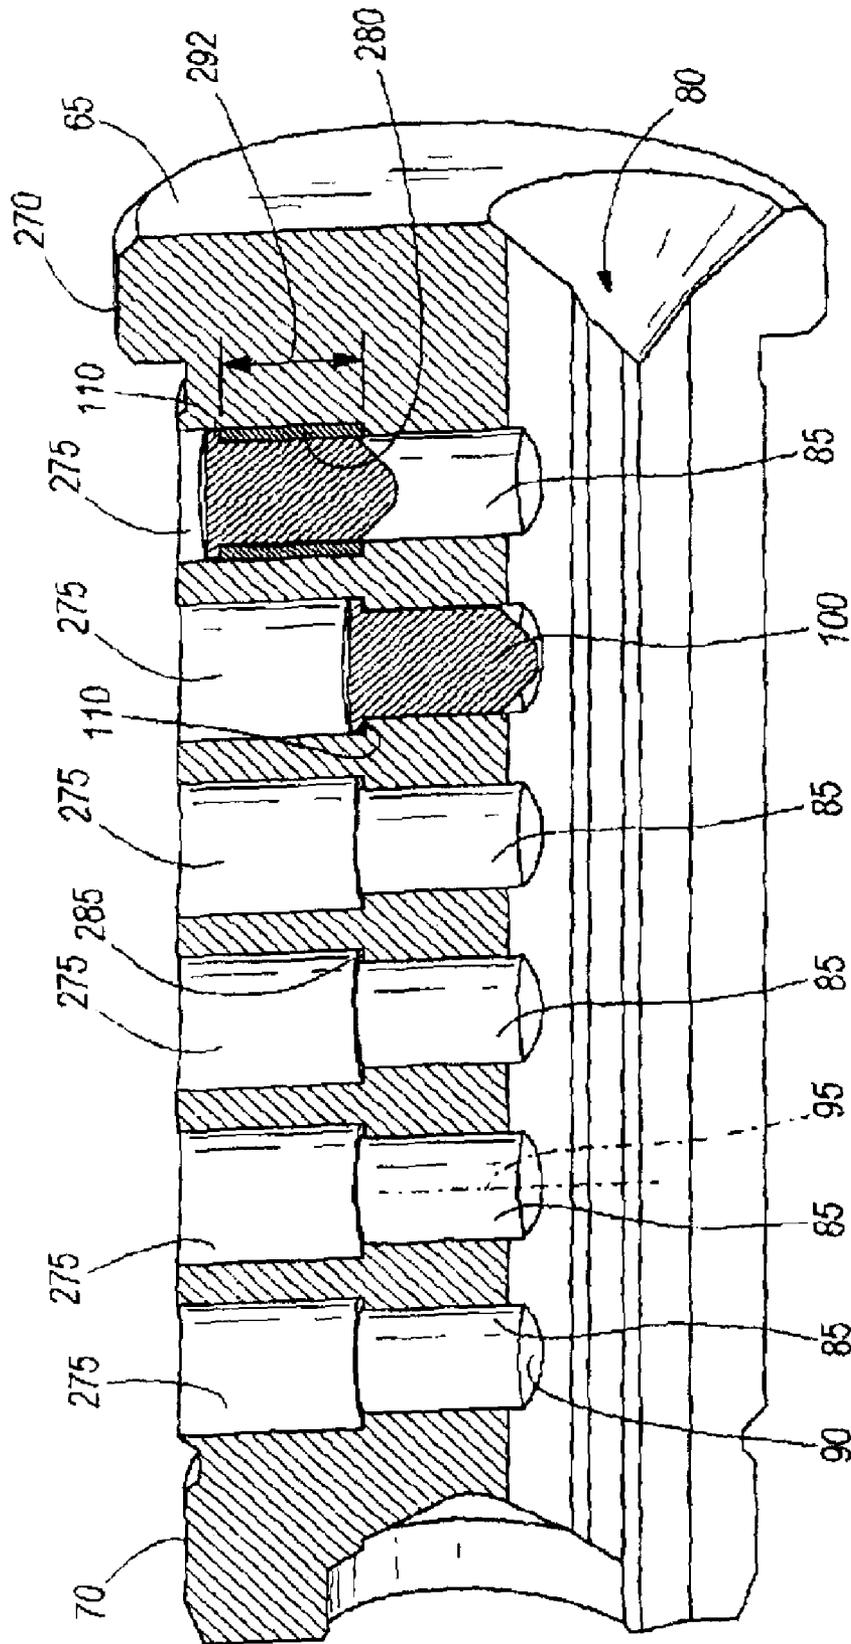


FIG. 15

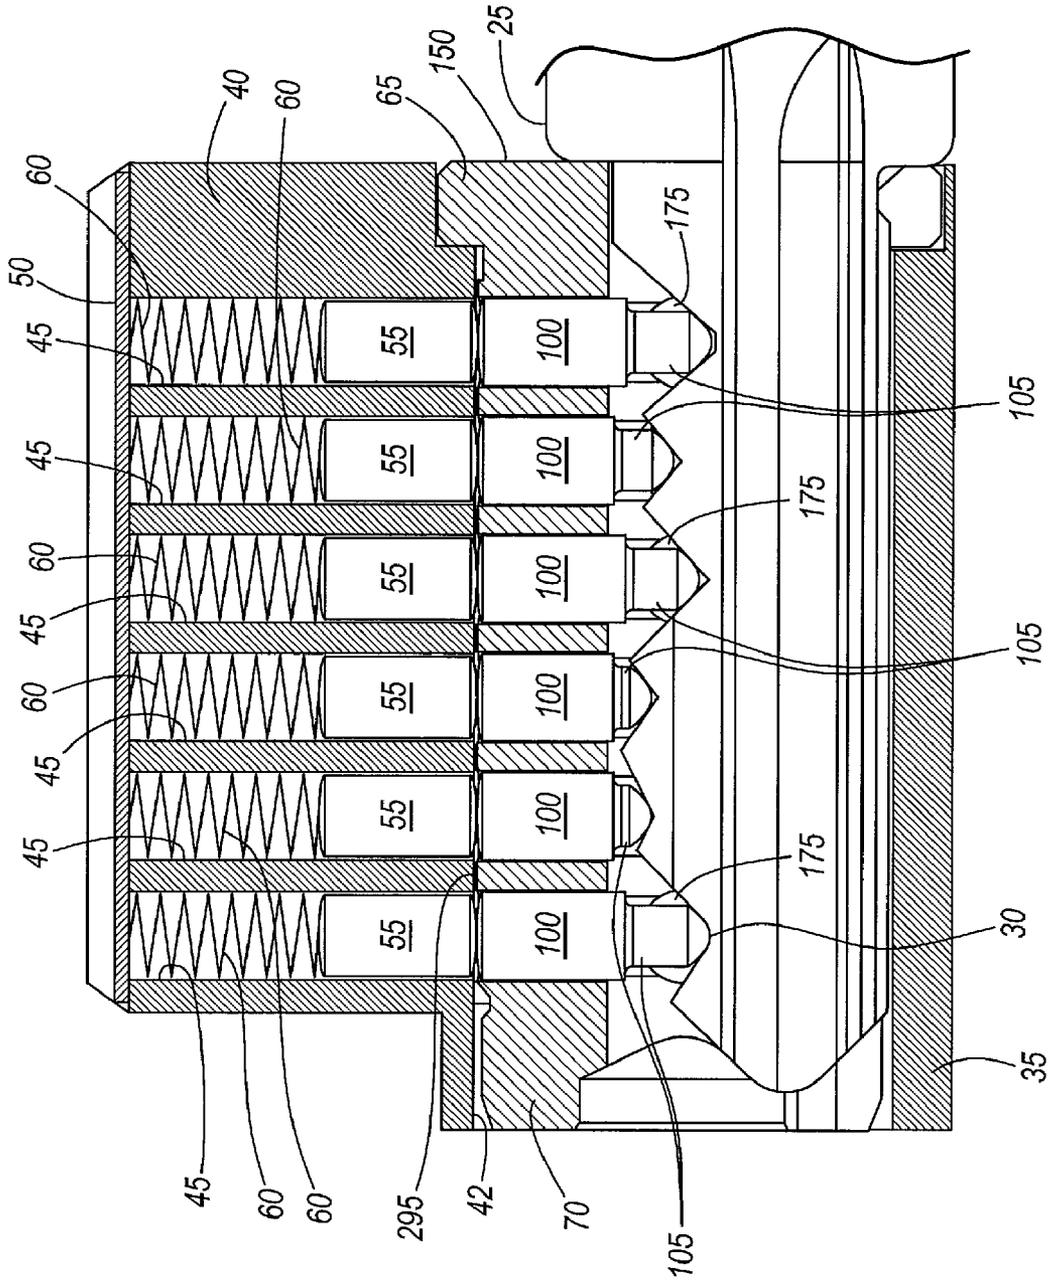


FIG. 16



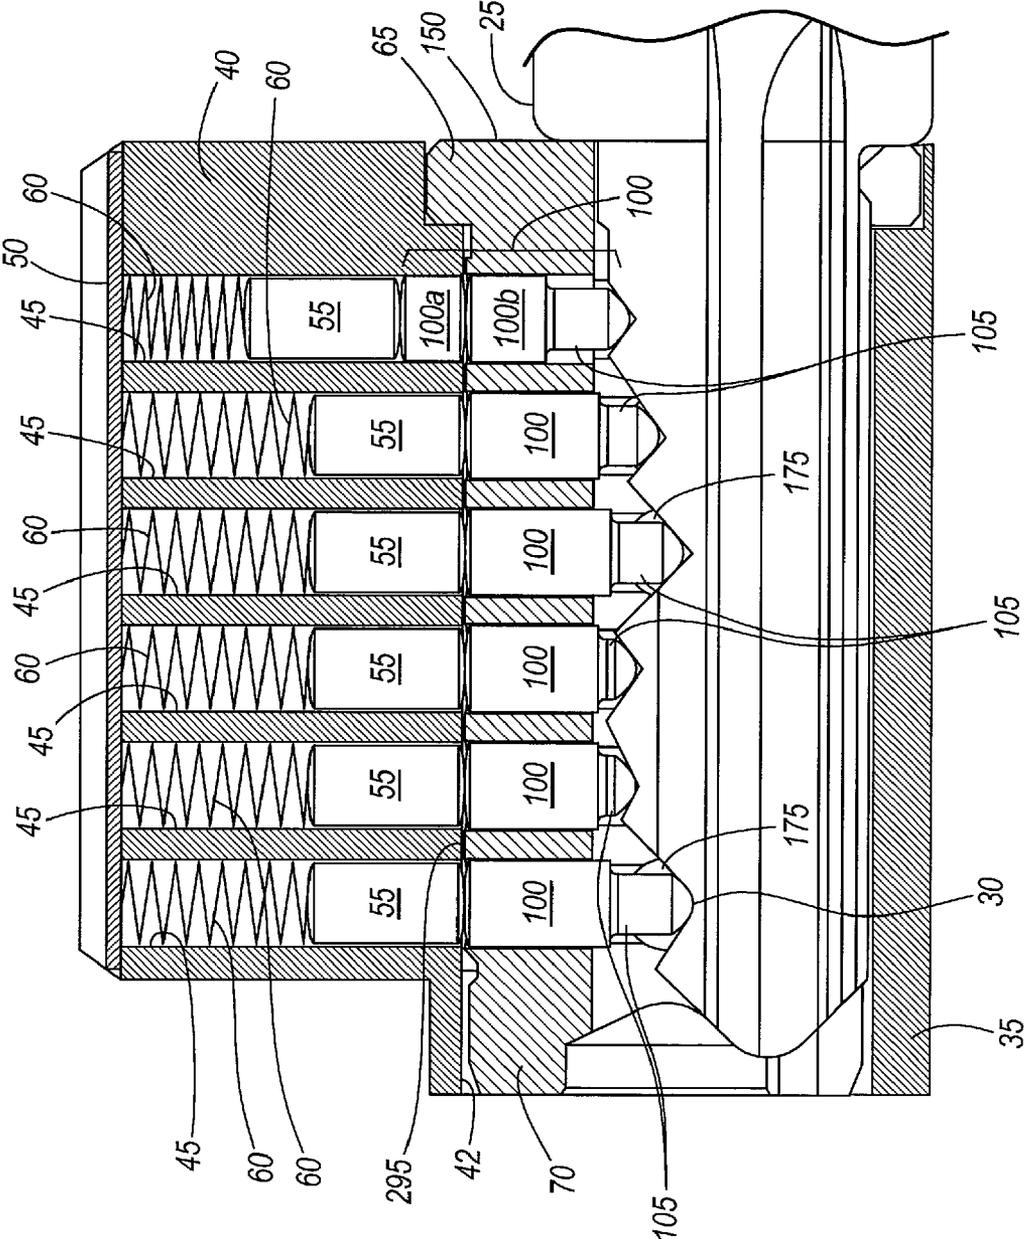


FIG. 18

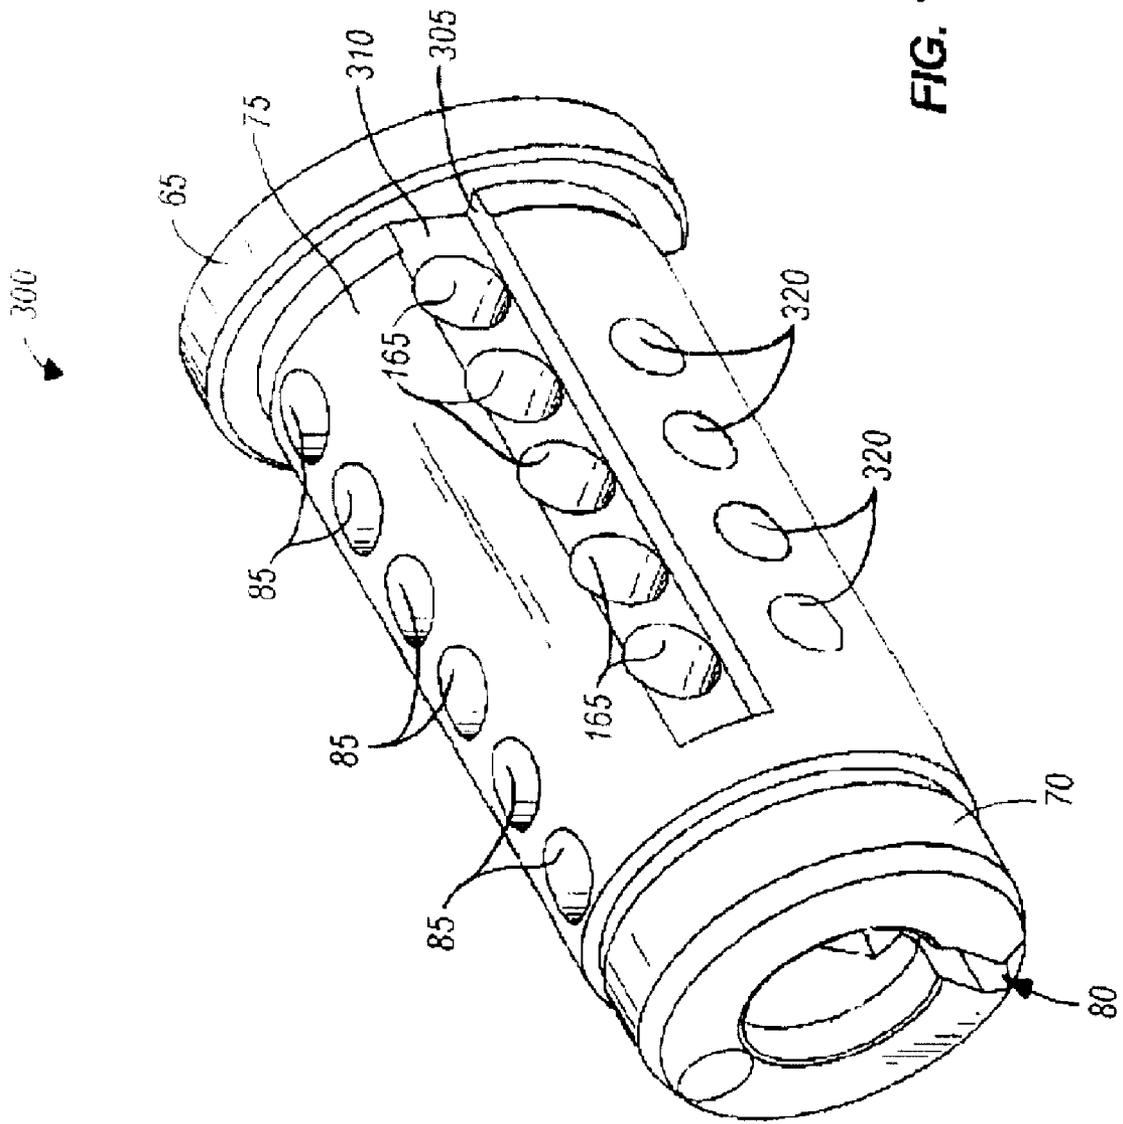


FIG. 19

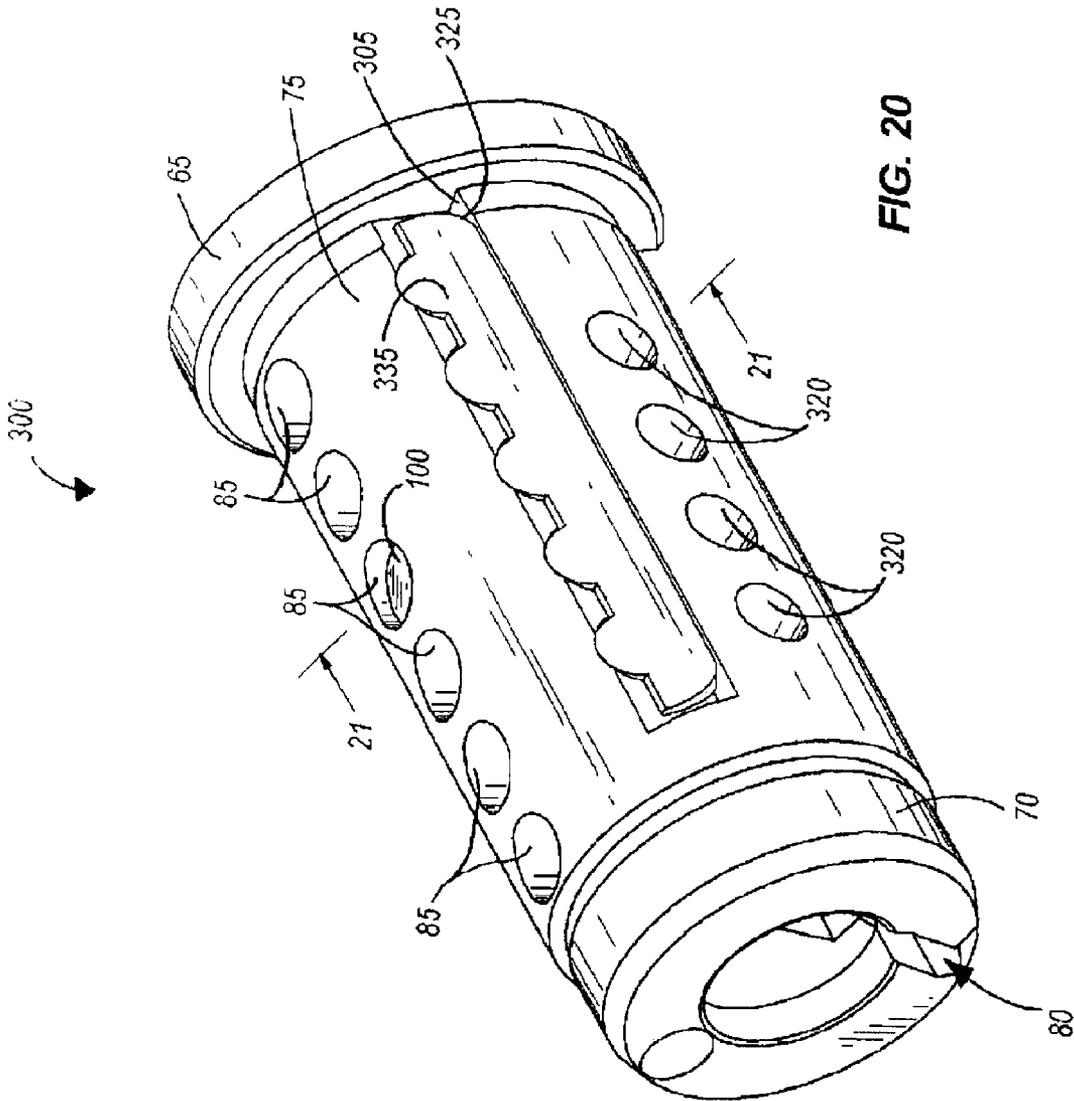


FIG. 20

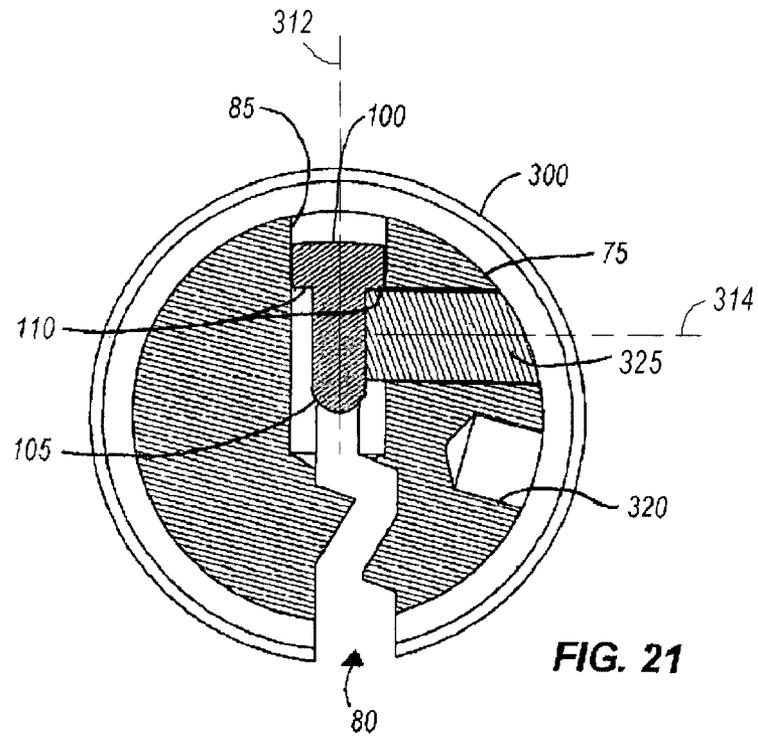


FIG. 21

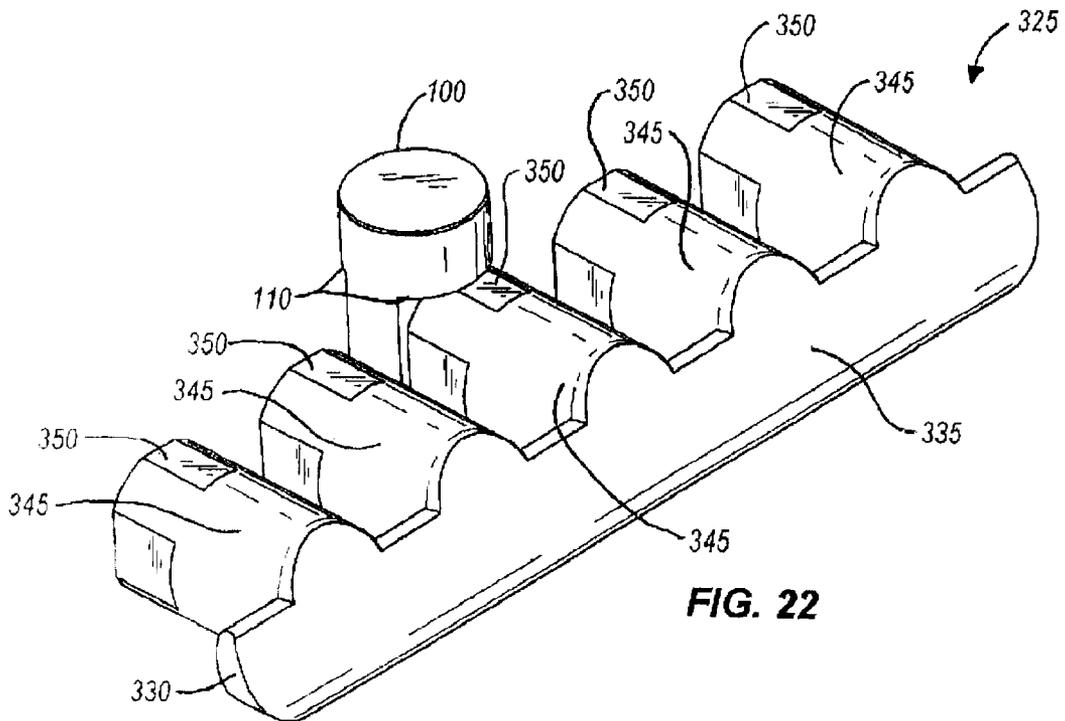


FIG. 22

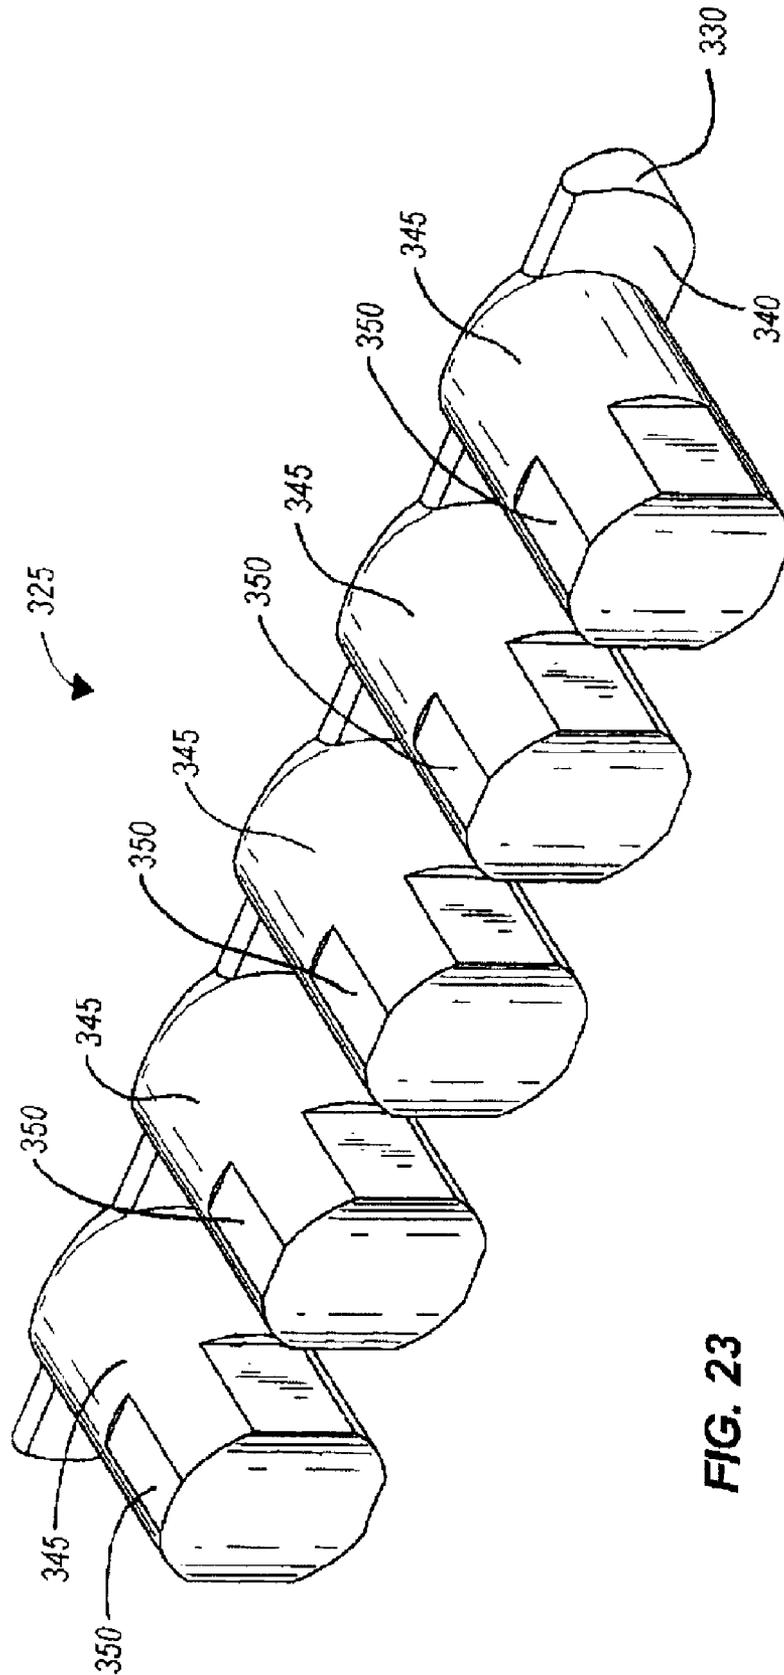
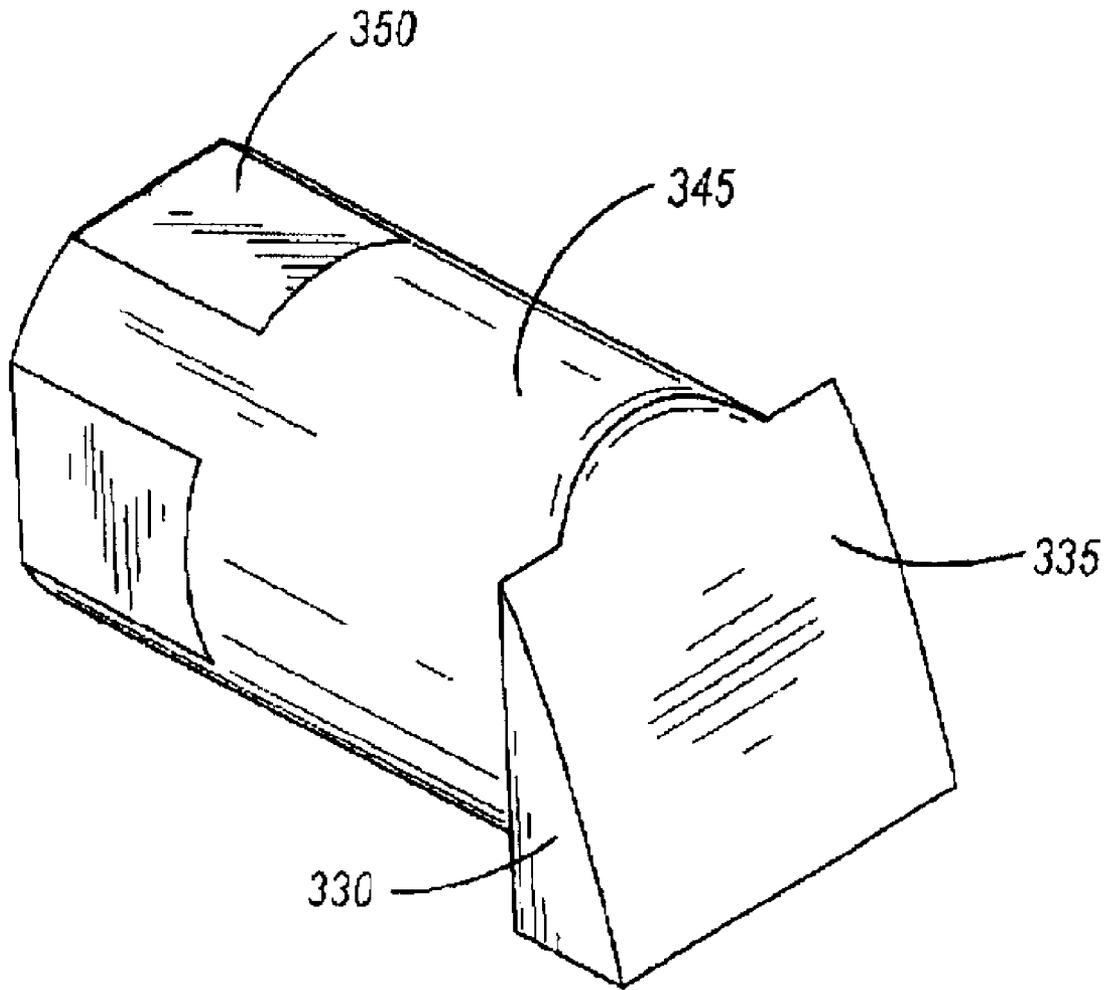


FIG. 23



**FIG. 24**

## LOCK CYLINDER WITH OFFSET PIN

## BACKGROUND

The present invention relates to a lock cylinder. More particularly, the present invention relates to a lock cylinder that is mounted in a door and that includes a housing and a plug.

Generally, lock cylinders include a housing and a plug that define respective pin chambers to receive pin pairs. The pin pairs include outer pins substantially disposed within the housing and inner pins disposed within the plug. Springs are often used to bias the pin pairs toward a key slot defined in the plug. More specifically, the springs are engaged with the outer pins, which in turn engage the inner pins and force the inner pins into the key slot. In the absence of a correct or proper key, the outer pins are partially disposed in the plug and block rotation of the plug within the housing.

The plug is rotatable relative to the housing in most conventional lock cylinders. A shear line is defined where the plug and the housing come together. When a proper key is inserted into the key slot, the inner pins are moved and, as a result, move the respective outer pins. The ends where the inner pins and the outer pins contact each other are aligned with the shear line upon insertion of the proper key, and allow the plug to be turned to a locked or unlocked position. In other words, the proper key will move the inner and outer pins such that the outer pins are disposed completely in the housing, and the inner pins are disposed completely in the plug.

In some lock cylinders, the inner pins engage a surface defined by the key slot such that the portions of the inner pins that are engaged by a key are at the same plane (i.e., extend the same distance into the key slot). Inner pins positioned along the same plane within the key slot may provide easy access to each pin in the lock cylinder. As such, it may be possible to unlock the lock cylinder without using a proper key.

When re-keying a lock cylinder using a typical lock cylinder design, appropriate inner pins must be replaced so that a new key can be used to operate the lockset. The process usually employs special tools and requires maintaining an inventory so that the inner pins can be exchanged with new inner pins. These inner pins are relatively small, and can become lost during the re-keying process.

## SUMMARY

In one embodiment, the invention provides a lock cylinder for a door that includes a housing and a plug. The housing includes a wall that defines a hollow portion, and a pin portion that defines a first pin chamber that is configured to receive a first pin. The plug includes a body rotatably housed within the hollow portion of the housing. A key slot is defined in the body in part by a pin resting surface, and a second pin chamber is disposed in the body and in communication with the key slot. A second pin is disposed within the second pin chamber and is configured to engage the pin resting surface. An engagement member is disposed within the body as a separate piece, and engaged with the second pin to space the second pin a distance from the pin resting surface in the absence of a key in the slot.

In another embodiment, the invention provides a lock cylinder for a door that includes a housing and a plug. The housing includes a wall that defines a hollow portion, and a pin portion that defines at least two outer pin chambers. Each of the outer pin chambers is configured to receive a respective outer pin. The plug includes a body that is rotatably housed within the hollow portion of the housing. A key slot is disposed at least partially through the body, and is defined in part

by a pin resting surface. The plug further includes at least two inner pin chambers disposed within the body and in communication with the key slot. Each of the inner pin chambers is configured to selectively align with a respective one of the outer pin chambers. An inner pin is disposed in each of the inner pin chambers, and each inner pin extends partially into the key slot. Each inner pin is configured to be engaged by a key inserted into the key slot. An engagement member disposed within the body as a separate piece, and is engaged with at least one of the inner pins such that the inner pins extend different distances into the key slot in the absence of a key in the slot.

In yet another embodiment, the invention provides a method of re-keying a lock cylinder. The method includes providing a housing including outer pins, a plug rotatably engaged within the housing and having a key slot and inner pins configured to align with the outer pins, and an engagement member inserted into the plug as a separate piece such that the engagement member engages one or more originally engaged inner pins to space each of the engaged inner pins a distance from a pin resting surface defined by the key slot. The method further includes modifying the engagement member, and inserting the modified engagement member into the plug. Insertion of the modified engagement member into the plug engages one or more newly engaged inner pins different from the originally engaged inner pins to space each of the newly engaged inner pins a distance from the pin resting surface.

In yet another embodiment, the invention provides a method of manufacturing a lock cylinder. The method includes providing a housing including outer pins, and a plug rotatably engaged within the housing. The plug includes a key slot and inner pins that are configured to align with the outer pins. The method also includes providing an engagement member that can be inserted into the plug as a separate piece, and that can be selectively provided with a respective engagement portion for each of the outer pins. The engagement member is provided with a selected set of engagement portions. The method further includes inserting the engagement member into the plug so that the selected engagement portions engage the respective inner pins, and spacing each of the engaged inner pins a distance from a pin resting surface defined by the key slot.

Other aspects of the invention will become apparent by consideration of the detailed description and accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a lock cylinder and a key.

FIG. 2 is a perspective view of a plug for the lock cylinder of FIG. 1.

FIG. 3 is a cross-section view of the plug of FIG. 2 taken along line 3-3, and includes an engagement member.

FIG. 4 is a perspective view of another embodiment of a plug for the lock cylinder of FIG. 1.

FIG. 5 is a cross-section view of the plug of FIG. 4 taken along line 5-5, and includes an engagement member.

FIG. 6 is a perspective view of alternative pins and engagement members.

FIG. 7A is a perspective view of an alternative of the plug of FIG. 4.

FIG. 7B is a perspective view of an alternative engagement member for the plug of FIG. 7A.

FIG. 7C is another perspective view of the alternative engagement member for the plug of FIG. 7A.

FIG. 8 is a perspective sectional view of another plug for the lock cylinder of FIG. 1.

FIG. 9 is a perspective sectional view of a portion of the plug of FIG. 8 taken along line 9-9 that includes an engagement member.

FIG. 10A is a perspective view of the engagement member of FIG. 9.

FIG. 10B is a section view of the plug of FIG. 9 taken along line 10-10.

FIG. 11 is a section view of another plug for the lock cylinder of FIG. 1 that includes an engagement member.

FIG. 12 is a perspective view of the engagement member of FIG. 11.

FIG. 13 is a perspective view of another plug for the lock cylinder of FIG. 1 that includes an engagement member.

FIG. 14 is a perspective view of the engagement member of FIG. 13.

FIG. 15 is a perspective view of another plug for the lock cylinder of FIG. 1 that includes an engagement member.

FIG. 16 is a section view of the lock cylinder of FIG. 1 that includes a correct key inserted into the lock cylinder.

FIG. 17 is a section view of the lock cylinder of FIG. 1 that includes an incorrect key inserted into the lock cylinder.

FIG. 18 is a section view of an alternative lock cylinder.

FIG. 19 is a perspective view of an alternative of the plug of FIG. 7A.

FIG. 20 is a perspective view of the plug of FIG. 19 that includes an alternative engagement member.

FIG. 21 is section view of the plug of FIG. 20, taken along line 21-21.

FIG. 22 is a perspective view of the alternative engagement member for the plug of FIG. 19.

FIG. 23 is another perspective view of the alternative engagement member for the plug of FIG. 19.

FIG. 24 is a perspective view of an alternative engagement member for the plug of FIG. 19.

### DETAILED DESCRIPTION

Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. The use of "including," "comprising," or "having" and variations thereof herein is meant to encompass the items listed thereafter and equivalents thereof as well as additional items. Unless specified or limited otherwise, the terms "mounted," "connected," "supported," and "coupled" and variations thereof are used broadly and encompass both direct and indirect mountings, connections, supports, and couplings. Further, "connected" and "coupled" are not restricted to physical or mechanical connections or couplings.

FIG. 1 shows a lock cylinder 10 for use with structures (e.g., door, access panel, portable locks, etc.) that may be locked and unlocked. Hereinafter, the term "door" shall be used to represent all such lockable structures and shall not be construed to limit the invention's application solely to doors. The lock cylinder 10 includes a housing 15 and a plug 20 configured to be selectively rotatable within the housing 15 using a key 25 that has pin engaging portions 30. The housing 15 includes a wall 35 and a pin portion 40. The wall 35 is substantially cylindrical and defines a hollow portion 42 that

is configured to receive the plug 20. The housing 15 is typically fixed relative to the door, and the plug 20 is movable relative to the housing 15 between a locked position and an unlocked position. The plug is typically connected to a driver bar (not shown) or other structure for moving a latch relative to the door to lock or unlock the door. Such arrangements are well known in the art.

As shown in FIGS. 1, 16, and 17, the pin portion 40 extends above the wall 35 and includes first or outer pin chambers 45. The outer pin chambers 45 are accessible through a removable member 50 adjacent the outer end of the pin portion 40. In the illustrated construction, the pin portion 40 includes six outer pin chambers 45, but fewer or more outer pin chambers 45 are within the scope of the invention.

FIGS. 2 and 3 show that the plug 20 includes a body 52 rotatable relative to the hollow portion 42 of the housing 15 (FIG. 1). The body 52 is defined by a first end portion 65, a second portion 70, and an outer surface 75. The first end portion 65 is accessible from the front of the lock cylinder 10. The second end portion 70 is accessible from the rear of the lock cylinder 10.

The plug 20 includes a key slot 80 and second or inner pin chambers 85. The key slot 80 extends longitudinally through the body 52 from the first end portion 65 toward the second end portion 70, and is further accessible from adjacent the first end portion 65. The key slot 80 is defined in part by a pin resting surface 90 that extends a substantial length of the key slot 80.

FIGS. 3 and 16 show that the inner pin chambers 85 extend from the outer surface 75 of the body 52 toward the key slot 80 substantially transverse to the key slot 80. Each of the inner pin chambers 85 defines a first axis 95. The inner pin chambers 85 are in communication with the key slot 80, and are further selectively aligned with respective outer pin chambers 45 upon insertion of the plug 20 into the housing 15. Thus, FIG. 2 shows that the plug 20 includes six inner pin chambers 85. While the inner and outer pin chambers are shown as substantially cylindrical chambers, they can have other shapes (e.g., rectangular, etc.) that are within the scope of the invention.

FIGS. 16 and 17 show that the pin portion 40 further includes a respective first or outer pin 55 disposed within each of the outer pin chambers 45. The outer pins 55 are configured to move in a first or inward direction (downward in FIG. 16) into the plug 20, and in a second or outward direction (upward in FIG. 16) away from the plug 20. The outer pins 55 extend partially into the respective inner chambers 85, as shown in FIG. 17, when the plug is in the locked position and a proper key is not inserted into the slot 80. The pin portion 40 further includes springs 60 to bias the outer pins 55 inward. In other embodiments, the outer pins 55 may tend to move inward without the springs 60. In some embodiments, the outer pins 55 can move inward without engagement by springs 60 due to orientation of the pin portion 40 above the plug 20 (i.e., inward movement is assisted by gravity).

FIGS. 16 and 17 show that a respective second or inner pin 100 is disposed within each of the inner pin chambers 85. Each inner pin 100 can have a length that is the same as or different from the length of the other inner pins 100. Each of the inner pins 100 is selectively engaged with the respective outer pin 55, and includes an end portion 105 that extends into the key slot 80. Generally, the quantity of inner pins 100 will be the same as the quantity of outer pins 55. The end portion 105 is defined by a protrusion that is configured to engage the pin resting surface 90 in the absence of the key 25 in the key slot 80. As shown in FIG. 3, the end portion 105 includes a diameter that is smaller than the diameter of the remaining

5

portion of the inner pin **110**. The illustrated end portion **105** is defined by a cylindrical protrusion with a semispherical end. In other embodiments, the end portion **105** may be defined by a protrusion that has other shapes (e.g., tapered cone). The end portion **105** of each inner pin **100** has a length that can be the same as or different from the length of the remaining end portions **105** of the remaining inner pins **100**.

In the illustrated construction, the pin portion **40** includes six outer pins **55** and six inner pins **100**. However more or fewer outer pins **55** and inner pins **100** may be possible and are within the scope of the invention. For example, commercial applications of the plug **20** usually include six outer and inner pins **55**, **100**, respectively, in accordance with established industry practices. However, residential applications of the plug **20** usually have settled on five outer and inner pins **55**, **100**, respectively. In these residential applications, the plug **20** may include five outer pins **55** and inner pins **100** in five corresponding outer and inner pin chambers **45**, **85**, even though the plug **20** may have six or more outer and inner pin chambers **45**, **85**. The remaining outer and inner pin chambers **45**, **85** may be unused in residential applications. The invention described herein incorporates both commercial and residential applications of the lock cylinder **10**, and should not be limited to only one such application.

The end portion **105** includes a shoulder **110** and a key engagement portion **115**. The shoulder **110** at least partially extends around the perimeter of the end portion **105**. The shoulder **110** illustrated in FIG. 3 defines a planar surface formed, for example, by a turning process applied to the inner pins **100**. In some embodiments, the shoulder **110** may be a curved surface that extends around the entire perimeter of the end portion **105** (FIG. 6). In other embodiments, the shoulder **110** may be defined on one side or more sides of the pin **100** (FIG. 7C). On the pin **100** shown in FIG. 7C, the shoulder **110** extends around only a portion of the perimeter of the end portion **105**.

The key engagement portion **115** partially extends into the key slot **80** and is configured to be selectively engaged by the key **25** after insertion of the key **25** into the key slot **80**. In some embodiments, the key engagement portion **115** may also engage the pin resting surface **90** in the absence of the key **25** in the key slot **80**. In other embodiments, portions of the end portion **105** other than the key engagement portion **115** may engage the pin resting surface **90** in the absence of the key **25** in the key slot **80**.

In the embodiment of the invention illustrated in FIGS. 2 and 3, the plug **20** further includes openings or bores or passageways **120** extending substantially into the body **52** without passing entirely through the body **52**. Each of the passageways **120** defines a second axis **125** that is substantially parallel to and offset from the first axis **95**. Each passageway **120** is in communication with one of the inner pin chambers **85** such that a portion of each passageway **120** overlaps a portion of each inner pin chamber **85**. The passageway **120** shown in FIG. 3 is a vertical passageway. Each passageway **120** is preferably a blind bore and is not in direct communication with the key slot **80**. The illustrated plug **20** includes six passageways **120** (e.g., one passageway **120** for each of the inner pin chambers **85**). In some constructions (e.g., for residential applications), the plug **20** may include five or fewer passageways **120**. In other constructions, the plug **20** may include more than six passageways **120**. While the illustrated openings are cylindrical, they can have other shapes.

In the embodiment of the invention illustrated in FIG. 3, an engagement member **130** defined by a length **132** is disposed in one of the passageways **120** to engage with the inner pin

6

**100**. The engagement member **130** is a separate piece that can be inserted and removed from the passageway **120**. In the illustrated construction, the engagement member **130** rests against the blind end of the passageway **120** and includes an outer end or engagement portion **135** that engages the shoulder **110** of the inner pin **100** to limit inward movement of the inner pin **100**. Other engagement members **130** can be positioned in one or more of the other passageways **120** to engage the respective inner pins **100**.

FIGS. 4 and 5 show another embodiment of the invention that has a plug **150** for use with the lock cylinder **10**. Except as described below, the plug **150** is the same as the plug **20**, and common elements are given the same reference numerals. The plug **150** includes bores or passageways **165** that extend into the plug **150** substantially transverse to the inner pin chambers **85**, and further extend into the plug **150** substantially transverse to the key slot **80** from a side of the plug **150**. As shown in FIG. 5, the passageway **165** extends horizontally into the plug **150**. A stop member or protrusion **170** may be disposed adjacent an inner end of each of the passageways **165**. In some constructions, the stop member **170** may be formed by a machining or milling process. In other constructions, the stop member **170** may be formed by a casting process.

FIG. 5 shows an alternative engagement member **175** that is disposed in one of the passageways **165**. FIG. 4 shows three engagement members **175** disposed in respective passageways **165**. Other constructions of the plug **150** may include fewer or more than three engagement members **175**. The engagement member **175** is a separate piece that can be inserted and removed from the passageway **165**.

FIG. 5 shows the engagement member **175** positioned within one of the passageways **165** such that inward movement of the engagement member **175** toward the inner pin chamber **85** is limited by the stop member **170**. The engagement member **175** is further positioned within one of the passageways **165** such that outward movement of the engagement member **175** is inhibited by the wall **35** of the housing **15**. In other words, the engagement member **175** is substantially immovable inward due to engagement of the engagement member **175** with the stop member **170**, and is further substantially immovable outward after rotatable engagement of the plug **150** with the housing **15**.

The engagement member **175** includes an engagement portion **180** disposed adjacent the inner end of the engagement member **175**. The engagement portion **180** may be a protrusion that has a diameter or thickness **182**. The engagement member **175** is engaged with one of the inner pins **100** such that the respective engagement portion **180** engages the shoulder **110** of the engaged inner pin **100**. In some embodiments, the engagement member **175** may include an angular engagement portion **185** (FIG. 6) that is engaged with the curved shoulder **110** of one of the inner pins **100**. FIG. 6 illustrates two possible constructions of the engagement member **175**, with each construction defining a rectangular engagement member **175** that includes the angular engagement portion **185**.

Another embodiment of the invention is illustrated in FIGS. 7A-7C. In this embodiment, as shown in FIG. 7A, the plug **150** includes passageways **165** extending inward from a recessed portion **187** that is partially defined by a recessed surface **188** spaced inwardly from the outer surface **75**. The passageways **165** extend inward approximately through the middle of the plug **150** along a horizontal diameter of a circular cross-section of the plug **150**. The illustrated plug **150** includes six inner pin chambers **85** and five passageways **165** (e.g., for residential applications). In some constructions,

the plug 150 may include six or more passageways 165 (e.g., one passageway 165 for each of the inner pin chambers 85, such as used in commercial applications). In other constructions, the plug 150 may include fewer than five passageways 165.

FIGS. 7B and 7C show the engagement member 175 has a unitary body that is configured to insert into the passageways 165 to engage with one or more inner pins 100. Each inner pin 100 (one shown) includes shoulders 110 disposed on both sides of the inner pin 100. The engagement member 175 includes a lip 190, an outer surface 192, an inner surface 193, cylindrical portions 194, and engagement portions 195. Upon insertion of the engagement member 175 into the plug 150, the lip 190 is engaged with the recessed portion 187, and the cylindrical portions 194 extend into respective passageways 165. As shown in FIG. 7C, the outer surface 192 defines a curvature that corresponds to the curvature of the outer surface 75. When the engagement member 175 is positioned within the recessed portion 187, the inner surface 193 (FIG. 7B) is engaged with the recessed surface 188, and the outer surface 192 forms a portion of the outer surface 75 of the plug 150. In other words, in the illustrated construction, the outer surface 192 defines a portion of the same cylinder defined by the outer surface 75. The alignment of the outer surface 75 of the plug 150 with the outer surface 192 of the engagement member 175 permits unimpeded rotation of the plug 150 within the housing 15.

With regard to FIGS. 7B and 7C, the engagement member 175 includes one cylindrical portion 194 for each engagement portion 195. Each engagement portion 195 is engaged with the shoulder 110 of the corresponding inner pin 100, if an inner pin 100 is located in the respective inner pin chamber 85. As shown in FIG. 7B, the engagement member 175 may include separable engagement portions 195 such that one or more engagement portions 195 can be separated from the unitary body without separation of other engagement portions 195.

The illustrated engagement member 175 in FIGS. 7B and 7C includes five cylindrical portions 194 and five engagement portions 195, corresponding to the five passageways 165 disposed in the plug 150 (FIG. 7A). In some embodiments, the engagement member 175 may include more or fewer than five cylindrical portions 194 and five engagement portions 195, the quantity of cylindrical portions 194 and engagement portions 195 corresponding to the quantity of engageable inner pins 100. In other embodiments, the engagement member 175 may be provided with fewer engagement portions 195 than available inner pins 100 (e.g., four engagement portions 195 for a plug that includes five inner pins 100). As discussed below, the inner pins 100 not engaged by engagement portions 195 can be master key pins that allow more than one key with different arrangements of the pin engaging portions 30 to lock and unlock the lock cylinder 10.

In some constructions, the engagement member 175 may be dividable into separate engagement members 175 that each include one or more cylindrical portions 194 and one or more engagement portions 195 configured to insert into one or more of the passageways 165. For example, each engagement member is defined by one cylindrical portion 194 and one engagement portion 195 that can be inserted into a single passageway 165. In these constructions, the separate engagement members 175 are each removable so that one or more of the inner pins 100 may be engaged by the respective engagement portions 195 without affecting the engagement of the other inner pins 100. Dummy pins (not shown) may be inserted into any passageways 165 that do not include engagement members 175 with engagement portions 195 to

limit accumulation of debris within the used passageways 165. The dividable engagement member 175 also allows one or more of the inner pins 100 to be defined as master key pins without affecting the engagement of other inner pins 100.

FIGS. 8-10 show another embodiment of the invention that has a plug 200 for use with the lock cylinder 10. Except as described below, the plug 200 is the same as the plug 20, and common elements are given the same reference numerals. The plug 200 includes an opening or aperture or passageway 205 that is disposed substantially parallel to the key slot 80 and transverse to the inner pin chambers 85. The passageway 205 is accessible from the second end portion 70, and extends from the second end portion 70 toward the first end portion 65 and is in communication with each of the inner pin chambers 85.

FIGS. 8 and 9 show the passageway 205 is T-shaped in cross-section and has a vertical leg and a horizontal leg. The passageway 205 receives an engagement member 210. The engagement member 210 slides into the passageway 205 and is in communication with the inner pin chambers 85.

FIGS. 10A and 10B show that the engagement member 210 includes an elongated body forming a rectangular solid, the body having therein notches or recesses 215 extending downward from the upper edge of the body. Each recess 215 is spaced along the engagement member 210 to align with a corresponding inner pin chamber 85 when the engagement member 210 is inserted into the plug 200. The engagement member 210 also includes one or more engagement portions 220 (two shown) seated in respective notches 215. The recesses 215 thus define cradles that partially support the engagement portions 220.

Each engagement portion 220 has an "L"-shaped body that includes a horizontal first portion 225 and a vertical second portion 230. With regard to FIG. 9, the horizontal portion 225 extends into the horizontal leg of the passageway 205. The vertical portion 230 of each engagement portion 220 fills the respective recess 215. The vertical portion is defined by a length 222 that substantially corresponds to the depth of the recess 215. The upper end of the vertical portion 230 is engageable with the shoulder 110 of the respective pin 100. FIG. 10A shows the engagement member 210 with two engagement portions 220. Other constructions of the engagement member 210 may include one or more than two engagement portions 220.

FIGS. 11 and 12 show another embodiment of the invention that has a plug 232 for use with the lock cylinder 10. In the plug 232, the passageway 205 is a substantially cylindrical hole. An engagement member 235 is disposed in the cylindrical passageway 205. The engagement member 235 is in communication with the inner pin chambers 85 and is defined by a cylindrical body. The engagement member 235 includes recesses 240 and engagement portions 245 (one shown) selectively positioned in the recesses 240. The recesses 240 are spaced along the engagement member 235 to substantially align with respective inner pin chambers 85 when the engagement member 235 is inserted into the plug 200. In FIG. 12, the engagement portion 245 is located in the left-most recess 240.

The engagement portion 245 is a crescent-shaped body that is fixed in one of the recesses 240 to engage with the respective inner pin 100. In some constructions of the engagement member 235, the engagement portion 245 can be removably adhered in the recess 240 using epoxy or other similar adhesive. In other constructions, the engagement portion 245 can be permanently fixed in one of the recesses 240.

FIGS. 13 and 14 show an alternative engagement member 235 for use with the plug 232. The engagement member 235

includes recesses 255 and engagement portions 260 positioned in the recesses 255. Like the recesses 240, the recesses 255 are spaced along the engagement member 235 to substantially align with the inner pin chambers 85 when the engagement member 235 is inserted into the plug 200. For purposes of clarity, FIG. 13 only shows one inner pin 100 engaged by one engagement portion 260. Each engagement portion 260 is defined by a protrusion that extends outward from one recess 255, and that includes a planar surface 265 configured to engage with the shoulder 110 of the corresponding inner pin 100. The engagement portions 260 may be configured such that the planar surface 265 of one or more of the engagement portions 260 defines a plane that is different from a plane defined by the other planar surfaces 265. In other words, each surface 265 can be higher or lower than the other surfaces 265. For example, FIG. 14 shows two planar surfaces 265 (i.e., the second and fourth planar surfaces 265 from the right) that are higher than the other planar surfaces 265.

Similar to the engagement portions 245 of FIG. 12, the engagement portions 260 may be removably coupled to the engagement member 235. Preferably, the engagement member 235 and all engagement portions 260 are formed as a unitary body, with the engagement portions 260 being removable from the recesses 255. FIG. 14 shows engagement portions 260 in each of the six recesses 255. Generally, one or more engagement portions 260 may be removed from the recesses 255 such that the engagement portions 260 are positioned in five or fewer recesses 255.

FIG. 15 shows another embodiment of the invention that has yet another plug 270 for use with the lock cylinder 10. Except as described below, the plug 270 is the same as the plug 20, and common elements are given the same reference numerals. In the plug 270, each of the inner pin chambers 85 has a respective counter bore 275 that defines a surface or shoulder 285. More specifically, the counter bores 275 have a diameter that is larger than the diameter of the inner pin chambers 85 such that the bores 275 are concentric with respect to the inner pin chambers 85. The depth of each counter bore in the plug 270 may be the same or different for each inner pin chamber 85.

The plug 270 includes at least one engagement member 280 (one shown) disposed in a respective bore 275. The engagement member 280 is a hollow cylindrical body that has a length 292. The inner pins 100 are configured to extend partially through the hollow engagement members 280 after insertion of the engagement members 280 into one or more of the bores 275. The upper end of the engagement member 280 is engaged with the shoulder 110 of the inner pin 100, and the lower end of the engagement member 280 is engaged with the shoulder or surface 285 to limit inward movement of the inner pin 100 toward the key slot 80. The engagement members 280 are removably disposed in the passageways 275. In other constructions of the plug 270, the engagement members 280 may be permanently attached in the passageways 275. In other embodiments, the engagement members 280 can be eliminated and the shoulders 110 of the inner pins 100 can directly engage the shoulders 285, which can be higher than shown in FIG. 15 if necessary.

Another embodiment of the invention is illustrated in FIGS. 19-24. This embodiment includes a plug 300 for use with the lock cylinder 10. Except as described below, the plug 300 is similar to the plug 150 described with regard to FIG. 7A, and common elements are given the same reference numerals. The inner pin chambers 85 have a longitudinal axis 312, and the passageways 165 have a central axis 314 that is generally perpendicular to the longitudinal axis 312. In the plug 300, the passageways 165 extend inward from a recessed

portion 305 that is partially defined by a substantially planar recessed surface 310. The recessed surface 310 defines a chord of the surface 75 and has therein openings to the passageways 165.

Unlike the passageways 165 and the recessed portion 187 illustrated in FIG. 7A, the passageways 165 and the recessed portion 305 shown in FIG. 19 extend inward from the outer surface 75 through the upper portion of the plug (i.e., above a horizontal diameter of a circular cross-section of the plug 300). The illustrated plug 300 includes six inner pin chambers 85 and five passageways 165 (e.g., for residential applications). In other constructions, the plug 300 may include more than or fewer than five passageways 165.

FIGS. 19-21 show that the plug 300 includes bores 320 for use with residential applications to allow construction keying of the lock cylinder 10. The bores 320 extend radially, like the inner pin chambers 85, but extend angularly upward toward the key slot 80 from below the horizontal diameter of the plug 300. The bores 320, like the inner pin chambers 85, are aligned along a plane passing through a longitudinal axis of the cylinder defined by the surface 75. The illustrated plug 300 has four bores 320, which are aligned circumferentially with four of the inner pin chamber 85, so that the bores 320 will become aligned with four of the outer pin chambers 45 if the plug 300 is rotated to the correct position.

In some constructions, residential keying devices utilize ball bearings (not shown) in the inner pin chambers 85 to allow one or more construction keys and residential keys (not shown) to lock and unlock the plug 300. The ball bearings are located between the inner and outer pins 55, 100. With a construction key, the shear line is between the ball bearings and the outer pins 55 such that the ball bearings remain in the inner pin chambers 85 when the plug 300 is rotated. With a residential key, the shear line is between the inner pins 100 and the ball bearings, so that the ball bearings are in the outer pin chambers when the plug 300 is rotated. The first time that a residential key is used and the plug 300 is rotated, the ball bearings fall into the bores 320 when the plug 300 has been rotated to the position in which the bores 320 become aligned with the outer pin chambers 45. Thereafter, the ball bearings remain in the bores 320 and only the residential key can be used to lock and unlock the plug 300.

FIGS. 20-24 show an alternative engagement member 325 that has a unitary body insertable into the plug 300 and configured to engage one or more inner pins 100 when the engagement member 325 is engaged with the recessed portion 305. Similar to the engagement member 175 described with regard to FIGS. 7B and 7C, the engagement member 325 includes a lip 330, an outer surface 335, an inner surface 340, cylindrical portions 345, and engagement portions 350. Upon insertion of the engagement member 325 into the plug 300, the lip 330 is disposed in the recessed portion 305, and the cylindrical portions 345 and the engagement portions 350 extend into respective passageways 165. The outer surface 335 defines a curvature that corresponds to the curvature of the outer surface 75 of the plug 300 when the engagement member 325 is inserted into the plug 300. In other words, the outer surface 335 defines the same cylinder as defined by the outer surface 75. The inner surface 340 is substantially planar and is engaged with the recessed surface 310 when the engagement member 325 is positioned within the recessed portion 305. The cylindrical portions 345 are engaged with the passageways 165 and the engagement portions 350 are engaged with respective inner pins 100 when the engagement member 325 is inserted into the plug 300.

As illustrated in FIG. 22, each engagement portion 350 is engaged with the shoulder 110 of the corresponding inner pin

100, if an inner pin 100 is located in the respective inner pin chamber 85. FIG. 24 shows that the engagement member 325 can be separate bodies such that each body includes one cylindrical portion 345 and one engagement portion 350. The engagement member 325 can be split into separate bodies, or formed as separate pieces. Dummy pins (not shown) can be inserted into any passageways 165 that do not include the separated engagement members 325 to limit accumulation of debris within the passageways 165. The dividable engagement member 325 also allows one or more of the inner pins 100 to be defined as master key pins without affecting the engagement of other inner pins 100.

FIGS. 16 and 17 show lock cylinder 10 with the key 25 inserted into the key slot 80 of the plug 150. While the lock cylinder 10 discussed with regard to FIGS. 16 and 17 incorporate the plug 150, the scope of the invention considers that any of the plugs 20, 200, 232, 270 may be substituted in place of the plug 150. FIG. 16 shows a correct or proper key 25 inserted into the plus 150 of the lock cylinder 10. The pin engaging portions 30 of the proper key 25 are engaged with each of the inner pins 100 to move the outer pins 55 to a shear line 295 defined by the outer surface 75 of the plug 150 and the wall 35 of the housing 15. Once the outer pins 55 are moved to the shear line 295, the plug 150 can be rotated between locked and unlocked positions.

FIG. 17 shows an incorrect or improper key 25 inserted into the plug 150 of the lock cylinder 10. The pin engaging portions 30 of the key 25 illustrated in FIG. 17 are cut to the deepest cuts possible for the key 25. The springs 60 bias the outer pins 55 and the inner pins 100 inward such that the outer pins 55 partially extend into the inner pin chambers 85. The inner pins 100 are spaced different distances from the pin resting surface 90 due to engagement of at least some of the inner pins 100 by the engagement members 175. As such, some of the pin engagement portions 30 of the improper key 25 are not engaged with the inner pins 100, and the key 25 cannot be used to move the plug 150 between the locked and unlocked positions. For example, FIG. 17 shows one inner pin 100 spaced from the pin resting surface 90 such that no portion of the improper key 25 comes into contact with the end portion 105 when the improper key 25 is inserted into the plug 150. The inner pins 100 spaced different distances from the pin resting surface 90 inhibit "bumping" or moving the outer pins 55 toward the shear line by engaging the inner pins 100 with the improper key 25.

The inner pins 100 not engaged by the engagement members 175 can be master key pins that allow more than one key (i.e., a master key and a non-master key) with different arrangements of the pin engaging portions 30 to lock and unlock the lock cylinder 10. FIG. 18 shows the lock cylinder 10 with the right-most inner pin 100 as a master key pin. The master key pin 100 includes a first pin element 100a and a second pin element 100b that is separate from the first pin element 100a. In some constructions, the master key pin 100 may be divided into three or more pin elements. One of the first and second pin elements 100a, 100b aligns with the shear line 295 upon insertion of a correct key into the key slot 80.

FIG. 18 shows the key 25 that is a master key (i.e., a correct key) inserted into the key slot 80. In other constructions, the key 25 shown in FIG. 18 may be a non-master key. The master key defines a first arrangement of the outer and inner pins 55, 100 that unlocks the plug 150. The non-master key defines a second arrangement of the outer and inner pins 55, 100 that is different from the first arrangement, and that also unlocks the plug 150. As shown in FIG. 18, the first arrangement is defined by the outer pins 55 and the first pin element 100a completely outside the plug 150, and the remaining inner pins

100 and the second pin element 100b completely inside the plug 150. In other words, the space between the first pin element 100a and the second pin element 100b partially aligns with the shear line 295 upon insertion of the master key 25 into the key slot 80.

The second arrangement (not shown) is defined by the outer pins 55 completely outside the plug 150, and the inner pins 100, including the first and second pin elements 100a, 100b completely inside the plug 150. In other words, the space between one of the outer pins 55 and the first pin element 100a partially aligns with the shear line 295 upon insertion of a non-master key into the key slot 80. The first and second arrangements allow the plug 150 to be moved between the locked and unlocked positions using more than one correct key 25 with different pin engaging portions 30.

With regard to FIGS. 2 and 3, the engagement members 130 engage some of the inner pins 100 in the plug 20 to space the engaged inner pins 100 a non-zero distance from the pin resting surface 90 in the absence of the key 25 in the key slot 80. The engagement members 130 are not directly engaged by the key 25 when the key 25 is inserted into the key slot 80 (FIGS. 16-18). The inner pins 100 not engaged by the engagement members 130 are engaged with the pin resting surface 90. As such, the engaged inner pins 100 and the non-engaged inner pins 100 define a lock arrangement of the plug 20 that is dependent on which inner pins 100 are engaged by the engagement members 130.

The lengths 132 of one or more of the engagement members 130 can be the same or different as the remaining engagement members 130, and affects the distance that the engaged inner pins 100 are spaced from the pin resting surface 90. Relatively long engagement members 130 space the respective inner pins 100 a relatively large distance, while relatively short engagement members 130 space the respective inner pins 100 a relatively small distance. In other words, the distance that one of the engaged inner pins 100 is spaced from the pin resting surface 90 can be the same or different from the distance that another of the engaged inner pins 100 is spaced from the pin resting surface 90. When the inner pins 100 are engaged by the engagement members 130, the key engagement portions 115 of the engaged inner pins 100 do not engage the pin resting surface 90.

Due to the presence of one or more engagement members 130, the inner pins 100 of the plug 20 extend different distances into the key slot 80 in the absence of the key 25 in the key slot 80. More specifically, the inner pins 100 that are engaged by the engagement members 130 extend into the key slot 80 respective first distances without engagement with the pin resting surface 90. The inner pins 100 that are not engaged by the engagement members 130 extend into the key slot 80 a second distance and engage the pin resting surface 90. The respective first distances that the engaged inner pins 100 extend into the key slot 80 depends on the length 132 of the respective engagement members 130, and also depends on the length of the end portions 105. As such, the respective first distance that each of the inner pins 100 extends into the key slot 80 can be the same or different for each inner pin 100. The second distance that the inner pins 100 extend into the key slot 80 is the same distance (i.e., the distance from the opening in the key slot 80 to the pin resting surface 90) for each non-engaged inner pin 100. In general, the engagement members 130 are pins that can be inserted and removed from the passageways 120 to change the spacing of one or more of the inner pins 100 from the pin resting surface 90, and to change the distance that the inner pins 100 extend into the key slot 80.

Except as described below, operation and modification of the plugs 150, 200, 232, 270 and the engagement members

175, 210, 235, 280 are similar to the operation and modification of the plug 20 and the engagement members 130 described with regard to FIGS. 2 and 3. Generally, the engagement members 130 are insertable into the plug 20 and provided in a particular arrangement or selected set to engage corresponding inner pins 100. The selected set of engagement members 130 is defined by the desired locking characteristics of the lock cylinder 10. For example, if only one inner pin 100 is desired to be spaced from the pin resting surface 90 (e.g., the other inner pins 100 are master key pins), then only one engagement member 130 is provided to space the respective inner pin 100 a distance from the pin resting surface 90. If additional inner pins 100 are desired to be spaced a distance from the pin resting surface 90, additional corresponding engagement members 130 can be inserted into the plug 20.

The inner pins 100 are inserted into the plug 20 after the engagement member 130 is inserted into the plug 20. Engagement of the inner pins 100 with the selected engagement members 130 space the inner pins 100 a distance from the pin resting surface 90 according to the desired arrangement. The inner pins 100 are inserted into the plug through the pin portion 40 in the housing 15. The outer pins 55 are inserted into the housing 15 through the pin portion 40 after insertion of the inner pins 100. The outer pins 55 generally contact the inner pins 100 and can be biased toward the inner pins 100 using the springs 60.

The particular set of engagement members 130 can be varied depending on the desired locking characteristics of the lock cylinder 10. Modification of the selected set of engagement members 130 provided in the plug 20 may re-key the plug from a first lock arrangement to a second lock arrangement. More specifically, modification of the engagement members 130 may change the inner pins 100 that are defined as master key pins. As such, a new master key and/or a new non-master key that is different from the original master key and/or non-master key can be used to unlock the lock cylinder 10.

Modification of the engagement member 130 can include repositioning the engagement member 130 in the plug 20, removing the engagement member 130 from the plug 20, adding an additional engagement member 130 to the plug 20, replacing the engagement member 130 in the plug 20 with a different engagement member 130, and a combination of two or more of these processes (e.g., removal and addition of one or more engagement members 130).

Repositioning an engagement member 130 includes moving the engagement member 130 from a first passageway 120 in the plug 20 to a second passageway 120 (i.e., the engagement member 130 is removed from the first passageway 120 and inserted into the second passageway 120). As a result, the originally engaged inner pin 100 in communication with the first passageway 120 is no longer engaged by the engagement member 130. Instead, the originally engaged inner pin 100 is engaged with the pin resting surface 90. The inner pin 100 in communication with the second passageway 120 is engaged by the repositioned engagement member 130, and is no longer engaged with the pin resting surface 90.

Modification facilitated by removal of undesired engagement members 130 from the plus 20 allows the originally engaged inner pins 100 to engage the pin resting surface 90. Addition of one or more desired engagement members 130 to the plug 20 spaces one or more previously non-engaged inner pins 100 a non-zero distance from the pin resting surface 90. Modification of an engagement member 130 by replacement of a first engagement member 130 with a second engagement member 130 that has a different length than the first engagement member 130 also changes the distance that the engaged

inner pin 100 is spaced from the pin resting surface 90, and thus the lock arrangement of the plug 20.

As described above, the engagement members 130 originally positioned in the plug 20 define a first lock arrangement that may be altered by modification of one or more engagement members 130. When one or more of the original engagement members 130 are modified, the plug 20 can be defined by a second lock arrangement that may be different from the first lock arrangement. Modification of one or more of the engagement members 130 provides many different arrangements of the inner pins 100 within the plug 20 based on the distance that the inner pins 100 are spaced from the pin resting surface 90 and the distance that the inner pins 100 extend into the key slot 80.

FIGS. 4 and 5 show the engagement members 175 engaged with some of the inner pins 100 of the plug 150 to space the inner pins 100 at least one non-zero distance from the pin resting surface 90. The non-engaged inner pins 100 engage the pin resting surface 90. The distance that the engaged inner pins 100 are spaced from the pin resting surface 90 is dependent on the diameter or thickness 182 of the engagement portions 180, and further is dependent on the length of the end portions 105 of the inner pins 100. The engagement members 175 may have engagement portions 180 that are defined by the same or different diameters 182 that affect the distance that the inner pins 100 are spaced from the pin resting surface 90. Relatively large diameter engagement portions 180 space the respective inner pins 100 a relatively large distance from the pin resting surface 90. Relatively small diameter engagement portions 180 space the respective inner pins 100 a relatively small distance from the pin resting surface 90.

Due to the presence of at least one engagement member 175 in the plug 150, the inner pins 100 of the plug 150 extend different distances into the key slot 80 in the absence of the key 25 in the key slot 80. Similar to the distance that the engaged inner pins 100 are spaced from the pin resting surface 90, the distance that the engaged inner pins 100 extend into the key slot 80 is dependent on the diameter 182 of the respective engagement portions 180 and on the length of the end portions 105. As such, the respective distance that each of the inner pins 100 extends into the key slot 80 may be the same or different as the distance that the remaining pins 100 extend into the key slot 80.

With regard to FIGS. 7A, 7B, and 7C, the illustrated engagement member 175 can be positioned in the recessed portion 187 to engage one or more inner pins 100. As discussed above, the engagement portions 195 are separately removable such that one or more of the inner pins 100 may not be engaged by a respective engagement portion 195. The distance that the engaged inner pins 100 are spaced from the pin resting surface 90 is dependent on the thickness of the engagement portions 187, and further is dependent on the length of the end portions 105 of the inner pins 100. The thickness of each engagement portion 195 may be altered to space the respective inner pin a non-zero distance from the pin resting surface 90 that is different from the non-zero distance other inner pins 100 may be spaced from the pin resting surface 90.

Due to the presence of at least one engagement portion 195, the inner pins 100 of the plus 150 extend different distances into the key slot 80 in the absence of the key 25 in the key slot 80. Similar to the distance that the engaged inner pins 100 are spaced from the pin resting surface 90, the distance that the engaged inner pins 100 extend into the key slot 80 is dependent on the thickness of the respective engagement portions 195 and on the length of the end portions 105. As such, the respective distance that each of the inner pins 100 extends into

15

the key slot **80** may be the same or different as the distance that the other inner pins **100** extend into the key slot **80**.

Generally, the engagement members **175** illustrated in FIGS. **4-6** include pins that can be inserted and removed from the passageways **165**, and that can be modified similar to the modification described with regard to FIGS. **2** and **3** (e.g., repositioned, removed, added, and any combination thereof). The engagement member **175** discussed with regard to FIG. **7B** includes the cylindrical portions **194** that function similarly to the pins defined by the engagement members **175** discussed with regard to FIGS. **4-6**, except that the engagement member **175** shown in FIG. **7B** includes engagement portions **195** that can be modified (e.g., repositioned, removed, added) in addition to modification of the engagement member **175**. As such, any combination of repositioning, removal, and addition of the engagement members **175** is possible and within the scope of the invention. Similarly, any combination of repositioning, removal, and addition of the engagement portions **195** is possible and within the scope of the invention.

With regard to FIGS. **8-10**, the illustrated engagement member **210** is inserted into the passageway **205** of the plug **200** with two engagement portions **220** to engage two of the inner pins **100**. The engaged inner pins **100** can be spaced the same or different distances from the pin resting surface **90**, and is dependent on the length **222** of the second portions **230** and the length of the end portions **105** of the engaged inner pins **100**. Similarly, the inner pins **100** extend different distances into the key slot **80** due to engagement of one or more engagement portions **220** with corresponding inner pins **100**.

The engagement member **210** is provided in the plug **200** with a selected set of engagement portions **220**, and may be provided with as few as one engagement portion **220**, or as many engagement portions **220** as the quantity of inner pins **100** provided in the plug **200**. The engagement member **210** that includes the selected set of engagement portions **220** is inserted into the plug **200** so that the selected engagement portions **220** engage the respective inner pins **100**. Once the engagement member **210** is inserted into the plug **200**, the inner pins **100** and the outer pins **55** can be inserted into the plug **200** and the housing **15**, respectively.

The engagement member **210** is removable from the passageway **205**, and may be modified to re-key the plug **200**. Modification of the engagement member **210** includes one or more of removing, adding, and repositioning one or more undesired engagement portions **220** on the engagement member **210** after removal of the engagement member **210** from the plug **200**. Modification of one or more of the engagement portions **220** can change the quantity of inner pins **100** that are engaged by the engagement member **210**. For example, removal of one or more engagement portions **220** from the engagement member **210** cause one or more previously spaced inner pins **100** to engage with the pin resting surface **90**. Addition of one or more engagement portions **220** to the engagement member **210** cause one or more inner pins **100** originally engaged with the pin resting surface **90** to be spaced a non-zero distance from the pin resting surface **90**.

The engagement member **210** can also be modified by removing one or more undesired engagement portions **220** and adding one or more desired engagement portions **220**. In some embodiments, the engagement member **210** is removed prior to removing undesired engagement portions **220** and adding desired engagement portions **220**. As such, any combination of removal and addition of engagement portions **220** is consistent with the invention and considered herein. The desired engagement portions **220** can be added to the engage-

16

ment member **210** in the same or different recesses **215** that previously received the undesired engagement portions **220**.

The engagement member **210** also can be modified by repositioning one or more engagement portions **220** on the engagement member **210**. Repositioning the engagement portions **220** can space one or more previously non-engaged inner pins **100** from the pin resting surface **90**, and/or cause one or more previously spaced inner pins **100** to engage the pin resting surface **90**. Repositioning the engagement portions **220** includes removing the engagement member **210** from the plug **200**, and moving at least one engagement portion **220** that engages an originally engaged inner pin **100** from a first recess **215** on the engagement member **210** to a second recess **215** that is different from the first recess **215**. Once one or more engagement portions **220** are moved to new positions on the engagement member **210**, the engagement member **210** is re-inserted into the plug **200**. Any combination of removal, addition, and repositioning of engagement portions **220** on the engagement member **210** is possible, and is only limited by the quantity of inner pins **100**. As such, numerous lock arrangements of the plug **200** are possible using the engagement member **210**.

Re-keying the plug **200** and modification of the engagement member also includes replacement of the original engagement member **210** with another (i.e., second) engagement member **210**. The first lock arrangement defined by the original engagement member **210** includes originally engaged inner pins **100** that are spaced a distance from the pin resting surface **90**. The second lock arrangement defined by the second engagement member **210** includes at least one newly engaged inner pin **100** that is different from the originally engaged inner pins **100**. The inner pins **100** engaged by the second engagement member **210**, including the at least one newly engaged inner pin **100**, are spaced a distance from the pin resting surface **90**. The remaining non-engaged inner pins **100** are engaged with the pin resting surface **90**.

The operation and modification of the plug **232** and the engagement member **235** illustrated in FIGS. **11-14** is similar to the operation and modification of the plug **200** and the engagement member **210** described with regard to FIGS. **8-10**. As such, the operation and modification of the plug **232** and the engagement member **235** will not be discussed herein.

With regard to FIG. **15**, the illustrated plug **270** includes one engagement member **280** inserted into one bore **275**. Except as described below, operation and modification of the plug **270** and the engagement members **280** are similar to the operation and modification of the plug **20** and the engagement member **130** described with regard to FIGS. **2** and **3**. The engaged inner pins **100** can be spaced the same or different distances from the pin resting surface **90**, and the distance is dependent on the length of the end portions **105** of the engaged inner pins **100** and the length **292** of the engagement member **280**.

The operation and modification of the plug **300** and the engagement member **325** illustrated in FIGS. **19-24** is similar to the operation and modification of the plug **150** and the engagement member **175** described with regard to FIGS. **7A**, **7B**, and **7C**. As such, the operation and modification of the plug **300** and the engagement member **325** will not be discussed herein.

Generally, engagement of the engagement members **130**, **175**, **210**, **235**, **280** with the originally-engaged inner pins **100** defines a first lock arrangement of the respective plug **20**, **150**, **200**, **270**. When the engagement members **130**, **175**, **210**, **235**, **280** are modified, the respective plug **20**, **150**, **200**, **270** is defined by a second lock arrangement that is different from the first lock arrangement. Modification of the engagement

17

members **130, 175, 210, 235, 280** provides may different arrangements of the inner pins **100** with respect to the pin resting surface **90**, and with respect to the distance that the inner pins **100** extend into the key slot **80**. The first lock arrangement may be used during construction by contractors or others requiring access using a first key. The second lock arrangement may be used after construction by an owner or other similarly situated person that requires access using a second key that is different from the first key. Spacing one or more of the inner pins **100** from the pin resting surface (i.e., extending the inner pins **100** different distances into the key slot) limits undesired access using an improper key (e.g., the first key) because only some of the key engagement portions **115** are engageable by the pin engaging portions **30** of the improper key.

In some constructions, the engagement members **130, 175, 210, 235, 280** are formed from a polycarbonate or thermoplastic material. In other constructions, the engagement members **130, 175, 210, 235, 280** can be formed from a nylon or resilient synthetic polymer material. In still other constructions, the engagement members **130, 175, 210, 235, 280** can be formed from a metal material (e.g., steel, aluminum, etc.).

Various features and advantages of the invention are set forth in the following claims.

What is claimed is:

1. A lock cylinder comprising:
  - a housing including a wall defining a hollow portion, and a pin portion defining a first pin chamber configured to receive a first pin;
  - a plug including a body rotatably housed within the hollow portion of the housing, the housing and the plug cooperatively defining a shear line;
  - a key slot disposed at least partially through the body, the key slot defined in part by a pin resting surface;
  - a second pin chamber disposed within the body and in communication with the key slot, the second pin chamber configured to selectively align with the first pin chamber;
  - a second pin disposed within the second pin chamber and including an outward end and an inward end, the second pin extending partially into the key slot and configured to engage the pin resting surface; and
  - an engagement member disposed within the body, the engagement member engaged with the second pin such that the second pin is spaced a distance apart from the pin resting surface and the outward end of the second pin is spaced inward from and nearest the shear line in the absence of a key in the key slot, and the engagement member engaged with at least one of the housing and a portion of the plug such that the engagement member is substantially immovable in response to insertion of a key into the key slot.
2. The lock cylinder of claim 1, wherein the second pin further includes a shoulder, and wherein the engagement member is configured to engage with the shoulder.
3. The lock cylinder of claim 2, wherein the shoulder is defined on at least one side of the second pin.
4. The lock cylinder of claim 1, wherein the engagement member includes an engagement portion, and wherein variation of a characteristic of the engagement portion is configured to vary the distance from the second pin to the pin resting surface.
5. The lock cylinder of claim 4, wherein the characteristic of the engagement portion configured to be varied includes at least one of a diameter, length, and thickness.

18

6. The lock cylinder of claim 1, wherein the engagement member includes an engagement portion, and wherein the second pin is at least partially engaged by the engagement portion.

7. The lock cylinder of claim 1, wherein the engagement member is disposed within a bore of the plug, and wherein the bore is in communication with the second pin chamber.

8. The lock cylinder of claim 7, wherein the bore is disposed substantially transverse to the second pin chamber.

9. The lock cylinder of claim 8, wherein the bore is further disposed substantially transverse to the key slot.

10. The lock cylinder of claim 8, wherein the bore is further disposed substantially parallel to the key slot.

11. The lock cylinder of claim 7, wherein the plug further includes a first end portion and a second end portion defining an access to the key slot, and wherein the bore extends from the second end portion toward the first end portion.

12. The lock cylinder of claim 11, wherein the bore is accessible from the first end portion.

13. The lock cylinder of claim 7, wherein the bore is accessible from adjacent a side of the plug orthogonal to the key slot.

14. The lock cylinder of claim 7, wherein the second pin chamber defines a first axis and the bore defines a second axis, and wherein the second axis is aligned with the first axis.

15. The lock cylinder of claim 7, wherein the second pin chamber defines a first axis and the bore defines a second axis, and wherein the second axis is aligned with and offset from the first axis.

16. The lock cylinder of claim 1, wherein the engagement member is a separate piece removably disposed within the body.

17. The lock cylinder of claim 1, wherein the plug further includes a stop member disposed within the body, and wherein the stop member is configured to render the engagement member substantially immovable in a first direction toward the secondary pin chamber.

18. The lock cylinder of claim 17, wherein the wall is configured to render the engagement member substantially immovable in a second direction opposite the first direction after rotatable engagement of the body with the housing.

19. The lock cylinder of claim 1, wherein the engagement member is configured to engage the second pin to limit movement of the second pin into the key slot.

20. The lock cylinder of claim 1, wherein the engagement member is configured not to be engaged by a key inserted into the key slot.

21. The lock cylinder of claim 1, wherein the engagement member includes a substantially cylindrical wall defining a hollow portion, and wherein the second pin is engaged by the wall and configured to extend substantially through the hollow portion.

22. The lock cylinder of claim 1, wherein the engagement member is defined by a counter bore of the first pin chamber having an engagement surface, and wherein the engagement surface is engaged with the first pin.

23. A lock cylinder comprising:
 

- a housing including a wall defining a hollow portion, and a pin portion defining at least two outer pin chambers, each of the outer pin chambers configured to receive a respective outer pin;
- a plug including a body rotatably housed within the hollow portion of the housing, the housing and the plug cooperatively defining a shear line;
- a key slot disposed at least partially through the body; at least two inner pin chambers disposed within the body and in communication with the key slot, each of the inner

19

pin chambers configured to selectively align with a respective one of the outer pin chambers;  
 an inner pin disposed within each of the inner pin chambers, each of the inner pins including an outward end and an inward end, and each of the inner pins extending partially into the key slot and configured to be engaged by a key inserted into the key slot; and  
 an engagement member disposed within the body, the engagement member engaged with at least one of the inner pins such that the inner pins extend different distances into the key slot and the outward ends of the inner pins engaged by the engagement member are spaced inward from and nearest the shear line in the absence of a key in the key slot, and the engagement member engaged with at least one of the housing and a portion of the plug such that the engagement member is substantially immovable in response to insertion of a key into the key slot.

24. The lock cylinder of claim 23, wherein the engagement member is configured to space at least one of the inner pins a distance from a pin resting surface defined by the key slot.

25. The lock cylinder of claim 23, wherein the inner pins not engaged by the engagement member are engaged with a pin resting surface defined by the key slot.

26. The lock cylinder of claim 23, wherein each of the inner pins further includes a shoulder, and wherein the engagement member is configured to engage with the shoulder.

27. The lock cylinder of claim 23, wherein the engagement member is disposed within a bore of the plug, and wherein the bore is in communication with the inner pin chambers.

28. The lock cylinder of claim 27, wherein the bore is disposed substantially transverse to the inner pin chambers.

29. The lock cylinder of claim 28, wherein the bore is further disposed substantially transverse to the key slot.

30. The lock cylinder of claim 28, wherein the bore is further disposed substantially parallel to the key slot.

31. The lock cylinder of claim 27, wherein the plug further includes a first end portion and a second end portion defining an access to the key slot, and wherein the bore extends from the second end portion toward the first end portion.

32. The lock cylinder of claim 31, wherein the bore is accessible from the first end portion.

33. The lock cylinder of claim 27, wherein the bore is accessible from adjacent a side of the plug orthogonal to the key slot.

34. The lock cylinder of claim 23, wherein the plug further includes a stop member disposed within the body, and wherein the stop member is configured to render the engagement member substantially immovable in a first direction toward the secondary pin chamber.

35. The lock cylinder of claim 34, wherein the wall is configured to render the engagement member substantially immovable in a second direction opposite the first direction after rotatable engagement of the body with the housing.

36. The lock cylinder of claim 23, wherein the inner pin chambers define a first axis and the bore defines a second axis, and wherein the second axis is aligned with the first axis.

37. The lock cylinder of claim 23, wherein the inner pin chambers define a first axis and the bore defines a second axis, and wherein the second axis is aligned with and offset from the first axis.

38. The lock cylinder of claim 23, wherein the engagement member is configured to engage at least one of the inner pins to limit movement of the inner pins into the key slot.

39. The lock cylinder of claim 23, wherein the engagement member is configured not to be engaged by the key in the key slot.

20

40. The lock cylinder of claim 23, wherein one of the inner pins engaged by the engagement member extends a first distance into the key slot, and wherein another of the inner pins engaged by the engagement member extends a second distance into the key slot.

41. The lock cylinder of claim 40, wherein the second distance is different from the first distance.

42. The lock cylinder of claim 23, wherein the inner pins engaged by the engagement member are spaced at least one distance from a pin resting surface defined by the key slot, and wherein the inner pins not engaged by the engagement member are engaged with the pin resting surface.

43. The lock cylinder of claim 23, wherein the inner pins engaged by the engagement member extend different distances into the key slot.

44. The lock cylinder of claim 43, wherein the inner pins of the inner pins not engaged by the engagement member are engaged with a pin resting surface defined by the key slot.

45. The lock cylinder of claim 23, wherein the engagement member includes at least one engagement portion, and wherein the at least one engagement portion is configured to be variable to change the distance that the inner pins engaged by the engagement member extend into the key slot.

46. The lock cylinder of claim 45, wherein the at least one engagement portion includes at least one of a length, diameter, and a thickness configured to be variable.

47. The lock cylinder of claim 23, wherein the engagement member is a separate piece removably disposed within the body.

48. The lock cylinder of claim 23, wherein the key is an incorrect key unable to unlock the lock cylinder, and wherein at least one of the inner pins engaged by the engagement member is configured not to be engaged by the incorrect key.

49. The lock cylinder of claim 23, wherein the engagement member is defined by a counter bore of the inner pin chamber having an engagement surface, and wherein the engagement surface is engaged with the inner pin.

50. A lock cylinder comprising:

a housing including a generally cylindrical inner surface defining a cylindrical cavity, and an outer pin chamber configured to receive an outer pin;

a plug rotatably housed within the cavity, the plug having a generally cylindrical outer surface defining a cylinder, the housing and the plug cooperatively defining a shear line; a key slot disposed at least partially through the plug, the key slot defined in part by a pin resting surface; an inner pin chamber disposed in the plug and in communication with the key slot, the inner pin chamber configured to selectively align with the outer pin chamber;

an inner pin disposed within the inner pin chamber, the inner pin including an outward end and an inward end, the inner pin extending partially into the key slot and configured to engage the pin resting surface;

a bore in the plug and extending between the outer surface and the inner pin chamber; and

an engagement member disposed within the bore, the engagement member engaging the inner pin such that the inner pin is spaced a distance apart from the pin resting surface and the outward end of the second pin is spaced inward from and nearest the shear line in the absence of a key in the key slot, the engagement member engaged with at least one of the housing and a portion of the plug such that the engagement member is substantially immovable in response to insertion of a key into the key slot, and the engagement member having an outer surface defining a portion of the cylinder defined by the outer surface of the plug.

21

51. The lock cylinder of claim 50, wherein the outer surface of the plug includes a recessed portion at least partially surrounding the bore, and wherein the engagement member has a lip disposed in the recessed portion.

52. The lock cylinder of claim 51, wherein the lip fills the recessed portion.

53. The lock cylinder of claim 51, wherein the recessed portion is partially defined by a recessed surface spaced inwardly from the outer surface of the plug, and wherein the bore extends inwardly from the recessed surface.

54. The lock cylinder of claim 53, wherein the bore is a generally cylindrical bore.

55. The lock cylinder of claim 54, wherein the engagement member includes a cylindrical portion and an engagement portion, wherein the cylindrical portion extends into the bore, and wherein the engagement portion engages the inner pin.

56. The lock cylinder of claim 55, wherein the engagement portion is removably attached to the cylindrical portion.

57. The lock cylinder of claim 54, wherein the inner pin chamber has a longitudinal axis, and wherein the bore has a central axis generally perpendicular to the longitudinal axis.

58. The lock cylinder of claim 50, wherein the engagement member is removably disposed in the bore, and wherein the engagement member is configured to be modified to change the distance that the engaged inner pin is spaced from the pin resting surface.

59. The lock cylinder of claim 50, wherein the inner pin includes a shoulder, and wherein the engagement member engages the shoulder.

60. The lock cylinder of claim 50, wherein the plug includes a second inner pin chamber in communication with the key slot, wherein the lock cylinder also includes a second

22

inner pin disposed within the second inner pin chamber, and a second bore in the plug and extending between the outer surface and the second inner pin chamber, and wherein the engagement member also extends into the second bore, the engagement member engaging the second inner pin to space the second inner pin a distance from the pin resting surface in the absence of a key in the key slot.

61. The lock cylinder of claim 1, wherein the engagement member is engaged with both the housing and the portion of the plug such that the engagement member is substantially immovable in response to insertion of a key into the key slot.

62. The lock cylinder of claim 23, wherein the engagement member is engaged with both the housing and the portion of the plug such that the engagement member is substantially immovable in response to insertion of a key into the key slot.

63. The lock cylinder of claim 50, wherein the engagement member is engaged with both the housing and the portion of the plug such that the engagement member is substantially immovable in response to insertion of a key into the key slot.

64. The lock cylinder of claim 50, wherein the plug further includes a stop member disposed within the body, and wherein the stop member is configured to render the engagement member substantially immovable in a first direction toward the secondary pin chamber.

65. The lock cylinder of claim 64, wherein the housing further includes a wall defining the inner surface, and wherein the wall is configured to render the engagement member substantially immovable in a second direction opposite the first direction after rotatable engagement of the body with the housing.

\* \* \* \* \*