



- (51) **International Patent Classification:**
E21B 47/00 (2006.01) *G01V 3/38* (2006.01)
G01V 3/18 (2006.01)
- (21) **International Application Number:**
PCT/US2016/014679
- (22) **International Filing Date:**
25 January 2016 (25.01.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032-3219 (US).
- (72) **Inventors:** HOU, Junsheng; 2621 Coral Haven Court, Kingwood, Texas 77345 (US). MEKIC, Natasa; 6310 Quiet Pointe Drive, Spring, Texas 77389 (US). QUIREIN, John Andrew; 109 Skyline Road, Georgetown, Texas 78628 (US).
- (74) **Agents:** TIDWELL, Mark et al.; Haynes and Boone, LLP, 2323 Victory Avenue, Suite 700, Dallas, Texas 75219 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

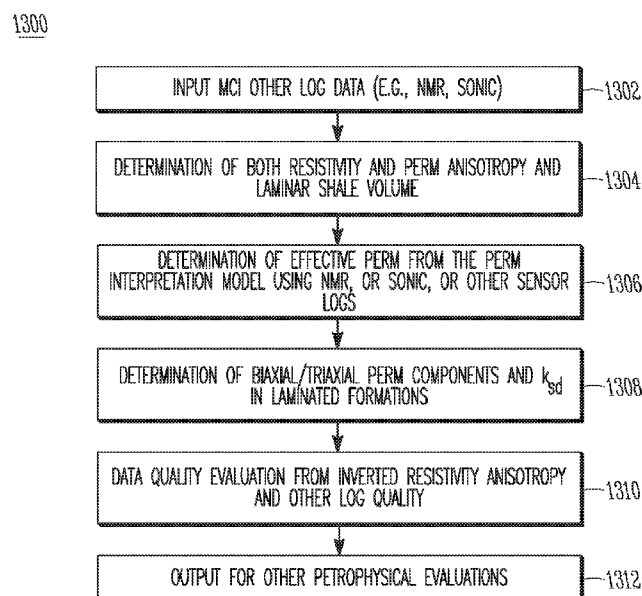
(54) **Title:** PERMEABILITY ANISOTROPY ASSESSMENT IN SUBSURFACE ANISOTROPIC FORMATIONS

FIG. 13

(57) **Abstract:** Example embodiments are described for a method and system for logging data processing in determining permeability anisotropy effects. A permeability anisotropy model is used to derive a relationship between formation permeability anisotropy and resistivity anisotropy in both TI and BA formations. Implementations can provide the permeability anisotropy plus the true reservoir (or sand) permeability by using an integrated interpretation of the MCI resistivity anisotropy measurements with conventional permeability logs from other sensors (e.g., NMR or sonic). Biaxial and triaxial permeability components of the permeability anisotropy tensor can be determined for application to synthetic and field log interpretations.

WO 2017/131608 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

PERMEABILITY ANISOTROPY ASSESSMENT IN SUBSURFACE ANISOTROPIC FORMATIONS**BACKGROUND**

[0001] Modern operations for the exploration and production of oil and gas rely on access to a variety of information regarding subsurface geological parameters and conditions. Such information typically includes characteristics of Earth formations traversed by a borehole, as well as data relating to the size and mud of the borehole itself. The collection of information relating to subsurface conditions, which is commonly referred to as “logging,” can be performed by several methods, including wireline logging and logging while drilling (LWD).

[0002] In wireline logging, a sonde is lowered into the borehole after some or all of the well has been drilled. The sonde hangs at the end of a wireline cable that provides mechanical support to the sonde and also provides an electrical connection between the sonde and electrical equipment located at the surface. In accordance with existing logging techniques, various parameters of the Earth’s formations are measured and correlated with the position of the sonde in the borehole as the sonde is pulled uphole. In LWD, a drilling assembly includes sensing instruments that measure various parameters as the formation is penetrated, thereby enabling measurement of the formation during the drilling operation.

[0003] Among the available wireline and LWD tools are a variety of logging tools including devices configured for taking multicomponent induction (MCI), nuclear magnetic resonance (NMR), and multipole sonic logging (MSL) measurements. Formation permeability can be characterized using such measurements. Current models can be used for the determination of permeability in isotropic formations. However, formation permeability can exhibit anisotropy in anisotropic formations, and is often dependent upon the measuring direction of logging tools.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] Some embodiments are illustrated by way of example and not limitation in the figures of the accompanying drawings in which:

[0005] FIG. 1 is a schematic view of a system for capturing subsurface measurement data in a logging while drilling operation, according to one or more example embodiments.

[0006] FIG. 2 is a schematic view of a system for capturing subsurface measurement data in a wireline logging operation, according to one or more example embodiments.

[0007] FIG. 3 is a schematic view of a coiled tubing logging system for capturing subsurface measurement data, according to one or more example embodiments.

[0008] FIG. 4 is a pair of plot diagrams illustrating simulated results for permeability components, k_h and k_v , and anisotropic ratio k_{hv} as a function of the resistivity anisotropy ratio, according to one or more example embodiments.

[0009] FIG. 5 is a diagram of a multi-component permeability model, according to one or more example embodiments.

[0010] FIG. 6 is a diagram illustrating a bimodal permeability model consisting of isotropic sand and transversely isotropic shale, according to one or more example embodiments.

[0011] FIG. 7 is a plot diagram of an example graphical solution for sand permeability k_{sd} and laminar shale volume V_{lam} in laminar formations, according to one or more example embodiments.

[0012] FIG. 8 is plot diagram of another example graphical solution for sand permeability k_{sd} and laminar shale volume V_{lam} in laminar formations, according to one or more example embodiments.

[0013] FIG. 9 is a pair of plots illustrating horizontal and vertical permeability, k_h and k_v , effective permeability k_e , and anisotropic ratio $k_{hv} = k_h/k_v$ as a function of laminar shale volume V_{lam} , according to one or more example embodiments.

[0014] FIG. 10 is a plot diagram illustrating a graphical solutions for k_{sd} and k_{sh} to at a laminar shale volume of $V_{lam} = 20\%$, according to one or more example embodiments.

[0015] FIG. 11 is a plot diagram illustrating simulated results for permeability anisotropy ratio k_{hv} as a function of resistivity anisotropy ratio R_{vh} , according to one or more example embodiments.

[0016] FIG. 12 is a pair of plot diagrams illustrating simulated results for triaxial permeability components, k_x , k_y , and k_z , as a function of the resistivity anisotropy ratio, R_{xy} , according to one or more example embodiments.

[0017] FIG. 13 is flow chart illustrating a method for evaluation of formation permeability anisotropy, according to one or more example embodiments.

[0018] FIG. 14 is a set of plots that provides a synthetic data set without errors for predicting the permeability anisotropy ratio (k_{hv}) and the horizontal / vertical permeability components (k_h and k_v), according to one or more example embodiments.

[0019] FIG. 15 is a set of plots that provides a synthetic data set with a maximum random error of $\pm 20\%$ for predicting the permeability anisotropy ratio (k_{hv}) and the horizontal / vertical permeability components (k_h and k_v), according to one or more example embodiments.

[0020] FIG. 16 is a cross plot for k_h vs k_v vs V_{lam} , according to one or more example embodiments.

[0021] FIG. 17 is a schematic block diagram of a system for permeability determination, according to one or more example embodiments.

[0022] FIG. 18 is a diagrammatic representation of a machine in the example form of a computer system within which a set of instructions for causing the machine to perform a method for permeability determination may be executed, according to one or more example embodiments.

DETAILED DESCRIPTION

[0023] The following detailed description refers to the accompanying drawings that depict various details of examples selected to show how aspects of this disclosure may be practiced. The discussion addresses various examples of the disclosed subject matter at least partially in reference to these drawings, and describes the depicted embodiments in sufficient detail to enable those skilled in the art to practice the subject matter disclosed herein. Many other embodiments may be utilized for practicing the disclosed subject matter other than the illustrative examples discussed herein, and structural and operational changes in addition to the alternatives specifically discussed herein may be made without departing from the scope of the disclosed subject matter.

Introduction

[0024] Subsurface formations can exhibit the ability to allow formations fluids (e.g., oil, water, or gas) or multi-phase fluids to pass through it, referred to as formation permeability. Formation permeability is an important parameter in formation evaluation and reservoir characterization. For example, permeability information can be utilized for reservoir simulation, enhanced oil recovery, well completion design, and field exploitation / development strategies. Unlike isotropic petro-physical parameters such as porosity and saturation, formation permeability can be anisotropic in, for example, three common types of subsurface formations (e.g., laminated sand-shale sequences, sands with different grain sizes, and sand with thin resistive/conductive streaks). Thus, permeability is often strongly dependent on the measuring direction in the anisotropic formations.

[0025] Various interpretation models for deriving formation permeability from logging data (e.g., multicomponent induction [MCI], nuclear magnetic resonance [NMR], and multipole sonic logging [MSL]) have been developed. However, such models can typically only be used for determining permeability in isotropic formations. Current logging tools and their measuring data can only be used for determination of scalar or isotropic permeability; however, these conventional log-derived permeabilities cannot deliver permeability anisotropy and its components (such as horizontal and vertical permeability). Accurate

determination of permeability that accounts for anisotropy can enhance formation evaluation and reservoir characterization.

[0026] Permeability can be determined using a permeability anisotropy model that is based at least in part on relationship between formation permeability and resistivity in transversely isotropic (TI) and biaxially anisotropic (BA) formations. In MCI logging, formation resistivity (or conductivity, which is inversely related to resistivity) shows azimuthal anisotropy of horizontal resistivity in the bedding plane of formations. Unless the text or context clearly indicates otherwise, “horizontal” or “transverse” means a direction or plane substantially coinciding with a bedding plane of the relevant formation, and “vertical” means a direction of plane substantially orthogonal to the bedding plane of the relevant formation.

[0027] Processing of MCI logging data may be performed based at least in part on BA parameterization, resulting in more accurate description of complex anisotropic formations than is the case based on TI models. The TI formation model is a model that represents simulated formation resistivity characteristics accounting for transverse formation isotropy to resistivity. The TI model can account for resistivity differences between orthogonal axes lying in a formation or bedding plane (e.g., the horizontal or transverse plane) and an axis perpendicular to the formation or bedding plane (e.g., the vertical axis). Thus, the TI model accounts for anisotropy between the vertical axis and the horizontal plane, but assumes isotropy between different axes in the horizontal plane. The BA model additionally accounts for anisotropy between orthogonal axes in the transverse plane.

[0028] One or more example embodiments described below provide a method and system for logging data processing in determining permeability anisotropy. The description of example embodiments that follow describe using the permeability anisotropy model to derive a relationship between formation permeability anisotropy and resistivity anisotropy in both TI and BA formations. As is known, MCI tools are capable of measuring resistivity anisotropy in formations. An effective permeability or a permeability component can be used to calibrate conventional log-derived permeabilities (e.g., that only account for scalar or isotropic permeability) for calculating the other permeability components. The limited

vertical resolution of logging tools are sometimes unable to capture the reservoir (or sand) permeability in laminar formations. Thus, in some embodiments, the sand permeability is determined from calculating horizontal and vertical permeability components based on a multi-modal permeability model, as discussed further below.

[0029] Implementations of the disclosed example embodiments can provide the permeability anisotropy by using an integrated interpretation of the MCI resistivity anisotropy measurements with conventional permeability logs from other sensors (e.g., resistivity, NMR, or sonic). Thus, biaxial (for TI formations) or triaxial (for BA formations) permeability components of the permeability anisotropy tensor can be determined and applied to field log interpretations.

Example Measurement Environments

[0030] FIG. 1 is a schematic illustration of an example logging while drilling (LWD) environment. A drilling platform 102 is equipped with a derrick 104 that supports a hoist 106 for raising and lowering a drill string 108. The hoist 106 suspends a top drive 110 suitable for rotating the drill string 108 and lowering the drill string 108 through the well head 112. Connected to the lower end of the drill string 108 is a drill bit 114. As the drill bit 114 rotates, it creates a borehole 116 that passes through various formations 118. A pump 120 circulates drilling fluid through a supply pipe 122 to top drive 110, down through the interior of drill string 108, through orifices in drill bit 114, back to the surface via an annulus around drill string 108, and into a retention pit 124. The drilling fluid transports cuttings from the borehole 116 into the pit 124 and aids in maintaining the integrity of the borehole 116. Various materials can be used for drilling fluid, including a salt-water based conductive mud.

[0031] An assembly of LWD tools 126 is integrated into a bottom-hole assembly (BHA) near the bit 114. As the bit 114 extends the borehole 116 through the formations 118, LWD tools 126 collect measurements relating to various formation properties as well as the tool orientation and various other drilling conditions. The LWD tools 126 may take the form of a drill collar, i.e., a thick-walled tubular that provides weight and rigidity to aid the drilling

process. In various example embodiments, the LWD tools 126 include a multi-array triaxial induction tool to measure formation resistivity and deliver MCI measurement data (also referred to as “log data”), such as described further herein. Further, the LWD tools 126 can include a NMR and / or a sonic logging tool to measure and deliver logging data. A telemetry sub 128 may be included to transfer images and measurement data to a surface receiver 200 and to receive commands from the surface. In some embodiments, the telemetry sub 128 does not communicate with the surface, but rather stores logging data for later retrieval at the surface when the logging assembly is recovered.

[0032] At various times during (or after) the drilling process, the drill string 108 may be removed from the borehole 116 as shown in FIG. 2. Once the drill string 108 has been removed, logging operations can be conducted using a wireline logging sonde 234, i.e., a probe suspended by a cable 242 having conductors for conducting power to the sonde 234, and for transmitting telemetry data from the sonde 234 to the surface. The example wireline logging sonde 234 may have pads and/or centralizing springs to maintain the sonde 234 near the central axis of the borehole 116 as sonde 234 is pulled uphole. The logging sonde 234 can include a variety of sensors including a multi-array triaxial induction tool for measuring formation resistivity and providing MCI measurement data. Further, the logging sonde 234 can include a NMR and / or sonic logging tool for measuring and providing measurement data. A logging facility 244 collects measurements from the logging sonde 234, and includes a computer system 245 for processing and storing the measurements gathered by the sensors.

[0033] Yet a further alternative logging technique is schematically illustrated in FIG. 3, which shows an example embodiment of a coiled tubing logging system 300. In system 300, coiled tubing 354 is pulled from a spool 352 by a tubing injector 356 and injected through a packer 358 and a blowout preventer 360 into the borehole 116. In the borehole 116, a supervisory sub 364 and one or more logging tools 365 are coupled to the coiled tubing 354 and configured to communicate to a surface computer system 366 via information conduits or other telemetry channels. An uphole interface 367 may be provided to exchange communications with the supervisory sub 364 and receive data to be conveyed to the surface computer system 366.

[0034] Surface computer system 366 is configured to communicate with supervisory sub 364 to set logging parameters and collect logging information from the one or more logging tools 365. Surface computer system 366 is configured by software (shown in FIG. 3 as being stored on example embodiments of removable storage media 372) to monitor and control downhole instruments 364, 365. The surface computer system 366 may be a computer system such as that described further herein.

Forward Models and Their Libraries

[0035] Forward modeling includes a numerical solution of Maxwell's equation in a mathematical boundary value problem, where the relevant formation or model specifies boundaries and shapes of regions of different resistivity. Processes for deriving formation parameters from a set of given field logs is known as inverse modeling, and typically comprises iteratively adjusting selected formation parameters in one or more layers of a formation model, and repeating forward modeling (e.g., by and the calculation or with reference to pre-calculated library data), until the observed field logs are satisfactorily replicated, e.g. until a set of variable borehole-formation parameters is found for a best fit with the observed log data based on the applicable formation model.

[0036] Some of the example processing schemes disclosed herein are based at least in part on a biaxial anisotropy (BA) model (otherwise known as orthorhombic anisotropy) and / or a transversely isotropic (TI) model. The TI model can account for resistivity differences between, on the one hand, orthogonal axes lying in a formation or bedding plane (sometimes referred to as the horizontal or transverse plane), and, on the other hand, an axis perpendicular to the formation or bedding plane (sometimes referred to as the vertical axis). The TI model thus can account for anisotropy between the "vertical" axis and the "horizontal" plane, but assumes isotropy between different axes in the "horizontal" or transverse plane. For this reason, the TI model is also referred to being TI anisotropic.

[0037] The BA model additionally accounts for anisotropy between orthogonal axes in the transverse plane, and is therefore also referred to as accounting for triaxial anisotropy. Note

that, unless otherwise specified, “biaxial anisotropy” and its derivations refer to transverse biaxial anisotropy. Consistent with this terminology, a TI model does not account for biaxial anisotropy, even though it accounts for anisotropy between two axes (e.g., between the horizontal plane and the vertical axis).

[0038] We describe formation resistivity/conductivity of BA anisotropy in the formation’s principal coordinate system. This system is chosen so that the x- or y-axis direction coincides with a conductivity tensor’s principal axis having the largest conductivity (or smallest resistivity) component in the bedding plane; the z axis is parallel to the conductivity principal axis having the smallest conductivity component. In this principal axis coordinate system, the formation conductivity can be expressed as a diagonal tensor:

$$\overline{\overline{\sigma}}_t = \text{diag}(C_x, C_y, C_z). \quad (1)$$

where $\overline{\overline{\sigma}}$ is the formation conductivity tensor, its elements C_x and C_y are the two conductivities in the two principal-axis (e.g., x- and y-axes) in the bedding plane, and C_z is the conductivity in the principal-axis direction perpendicular to the bedding plane.

[0039] If equation (1) is expressed in resistivity terms, the formation resistivity can be expressed as the following diagonal tensor:

$$\overline{\overline{R}}_t = \text{diag}(R_x, R_y, R_z), \quad (2)$$

where $\overline{\overline{R}}_t$ is the formation resistivity tensors, and its elements R_x , R_y , and R_z are the triaxial resistivity components in the three principal-axis directions (xf, yf, and zf), respectively. It is noted that in a TI formation, resistivity can be represented as a diagonal tensor that is only described using two resistivity components: R_h (wherein $R_h = R_x = R_y$) and R_v (wherein $R_v = R_z$) in the principal axis system (e.g., x-y-z coordinate system), however, the resistivity tensor of the BA model is best described using the triaxial resistivity components: R_x , R_y , and R_z .

Based on equations (1) and (2), one can derive the relations among resistivity and conductivity components $R_x = 1/C_x$, $R_y = 1/C_y$, and $R_z = 1/C_z$. If $R_x = R_y = R_z$, then the formation resistivity is isotropic. If only $R_x = R_y \neq R_z$, then the formation resistivity is transversely

isotropic; therefore, only one resistivity component is necessary in the bedding plane. In this case, both R_x and R_y are usually called horizontal resistivity and are often denoted as R_h ($= R_x = R_y$); and, R_z is called the vertical resistivity and is usually denoted as R_v . If $R_x \neq R_y \neq R_z$, the formation resistivity is of BA anisotropy. It can be seen that the isotropy and transverse isotropy are only two special cases of the biaxial anisotropy. For the practical applications, different ratio notations are used. For example, ratios $R_{xy} = R_x/R_y$, or $R_{zx} = R_z/R_x$ and $R_{zy} = R_z/R_y$.

Permeability Model in Anisotropic Formations

[0040] As discussed herein, when permeability is anisotropic, a permeability tensor (as opposed to a scalar) is used for expressing the formation permeability. Pressure in formations can be applied in three directions, and for each direction, the permeability can be measured (via Darcy's law that describes the flow of a fluid through a porous medium) in three directions, thus leading to a 3 by 3 tensor. In a three-dimensional (3D) coordinate system, the tensor is realized using a 3 by 3 matrix being both symmetric and positive definite, and can be represented using the following equation:

$$\mathbf{K} = \begin{pmatrix} k_{xx} & k_{xy} & k_{xz} \\ k_{xy} & k_{yy} & k_{yz} \\ k_{xz} & k_{yz} & k_{zz} \end{pmatrix} = (k_{ij})_{3 \times 3}. \quad (3)$$

[0041] In equation (3), $\mathbf{K}$ is the true formation permeability tensor, i denotes the pressure direction, and j is the permeability measurement direction. Therefore, component k_{ij} represents the j -th directional permeability component at the i -th pressure direction. This permeability tensor $\mathbf{K}$ is diagonalizable (as it is both symmetric and positive definite). The eigenvectors will yield the principal directions of flow, representing the directions where flow is parallel to the pressure drop, and the three eigenvalues represent the three principal permeability components.

[0042] In the 3D principal coordinate system, the permeability tensor $\mathbf{K}$ is expressed as a diagonal tensor after the matrix diagonalization, which is equivalent to finding the matrix's eigenvalues, and can be represented using the following equation:

$$\mathbf{K} = \text{diag}(k_x, k_y, k_z) \quad (4)$$

[0043] In equation (4), k_x and k_y are the two permeability components in the two principal axis (X and Y) directions of the bedding plane, and k_z is the permeability component in the Z principal axis direction perpendicular to the bedding plane. Following the formation resistivity descriptions, the formation permeability is isotropic if $k_x = k_y = k_z$. If $k_x = k_y \neq k_z$, then the permeability is transversely isotropic. In the TI formation, only two components are needed for describing the formation permeability anisotropy. In the bedding plane, the permeability component can be denoted as $k_x = k_y = k_h$ and is referred to as the horizontal permeability. For the Z-directional component, k_z , can be denoted as $k_z = k_v$ and is referred to as the vertical permeability. Thus, the permeability tensor can also be represented using the equation: $\mathbf{K} = \text{diag}(k_h, k_h, k_v)$. When $k_x \neq k_y \neq k_z$, the permeability is of biaxial anisotropy (BA).

[0044] In electrically anisotropic formations, the resistivity anisotropy can be obtained from the 3D induction resistivity logs, such as MCI logs. If formations are both permeability and resistivity anisotropic, the permeability anisotropy can be evaluated from the resistivity anisotropy. It is assumed that the pore space is represented as a bundle of independent and tortuous tubes of different radii in isotropic formations. If the flow rate is low enough that it is laminar and not turbulent, then the permeability scalar can be determined by using the following Kozeny-Carman equation:

$$k = A \cdot \frac{d^2}{4F} = A \cdot d^2 \cdot \frac{I \cdot R_w}{4R_t} \quad (5)$$

where k represents the permeability in an isotropic formation, A represents a shape factor for the pore tubes with a diameter of d , and F represents the formation factor.

[0045] The formation factor can be represented using the following equation:

$$F = \frac{R_o}{R_w} = \frac{R_t}{I \cdot R_w}, \quad (6)$$

where R_o represents the 100% water-bearing formation resistivity, R_w represents the formation water resistivity, R_t represents the true formation resistivity, and I represents the resistivity index.

[0046] The resistivity index can be represented using the following equation:

$$I = \frac{R_t}{R_o} \quad (7)$$

[0047] In TI anisotropic formations, the permeability, formation factor, and resistivity (or conductivity) index are not scalars. Instead, the permeability, formation factor, and resistivity (or conductivity) index are represented using tensors, namely: $\mathbf{K}$, $\mathbf{F}$, and $\mathbf{I}$, respectively. $\mathbf{F}$ and $\mathbf{I}$ can be represented using the following two diagonal tensor equations:

$$\mathbf{F} = \text{diag}(F_h, F_h, F_v) \quad (8)$$

$$\mathbf{I} = \text{diag}(I_h, I_h, I_v) \quad (9)$$

[0048] A generalization of all the values to anisotropic formation yields the tensor expressions. For example, the following equations represent permeability scalars in TI formations:

$$k_h = A_h \cdot d_h^2 \cdot \frac{1}{4F_h} = A_h \cdot d_h^2 \cdot \frac{I_h \cdot R_w}{4R_h} \quad (10)$$

$$k_v = A_v \cdot d_v^2 \cdot \frac{1}{4F_v} = A_v \cdot d_v^2 \cdot \frac{I_v \cdot R_w}{4R_v} \quad (11)$$

where F_h and F_v represent the formation factor components measured along the horizontal and vertical direction, respectively, which can be represented by $F_h = \frac{R_h}{I_h \cdot R_w}$ and $F_v = \frac{R_v}{I_v \cdot R_w}$. The two components of the resistivity index tensor, $\mathbf{I}$, can be represented by $I_h = \frac{R_h}{R_o}$ and $I_v = \frac{R_v}{R_o}$, where R_h and R_v represent the formation horizontal and vertical resistivity, respectively.

Relationship between Permeability Anisotropy and Resistivity Anisotropy

[0049] In TI permeability-anisotropic formations, the relationship between permeability and formation resistivity factor obtained along two perpendicular principal-axis directions can be represented using the following equation:

$$\frac{k_h}{k_v} = \frac{A_h \cdot d_h^2}{A_v \cdot d_v^2} \cdot \left(\frac{F_v}{F_h} \right) \quad (12)$$

[0050] Alternatively, the relationship between permeability and anisotropy and resistivity (or conductivity) anisotropy can be represented using the following equation:

$$\frac{k_h}{k_v} = \frac{A_h \cdot d_h^2}{A_v \cdot d_v^2} \frac{I_h}{I_v} \cdot \left(\frac{R_v}{R_h} \right) = \frac{A_h \cdot d_h^2}{A_v \cdot d_v^2} \frac{I_h}{I_v} \cdot \left(\frac{C_h}{C_v} \right) = C_{RP} \cdot \left(\frac{R_v}{R_h} \right) \quad (13)$$

where $C_{RP} = \frac{A_h \cdot d_h^2}{A_v \cdot d_v^2} \frac{I_h}{I_v}$, with C_h and C_v representing the horizontal and vertical conductivity,

respectively. A resistivity (or conductivity) anisotropy ratio can be defined as: $R_{vh} = \frac{R_v}{R_h} =$

$\frac{C_h}{C_v} = C_{vh}$, and a permeability anisotropy ratio k_{hv} can be defined as: $k_{hv} = \frac{k_h}{k_v}$.

[0051] This permeability-resistivity anisotropy relationship shows that the permeability anisotropy can be evaluated based on resistivity anisotropy measurements (such as from MCI logs) and the pore shape / diameter. A simplified relationship between the permeability and resistivity anisotropy of equation (13) can be determined if it is assumed that $A_h I_h = A_v I_v$, and can be represented using the following equation:

$$\frac{k_h}{k_v} = \frac{d_h^2}{d_v^2} \cdot \left(\frac{R_v}{R_h} \right), \text{ or } k_{hv} = C_{RP} \cdot R_{vh}, \text{ or } R_{vh} = \frac{1}{C_{RP}} \cdot k_{hv} \quad (14)$$

[0052] Further, if it is assumed that $C_{RP} = \frac{d_h^2}{d_v^2} = 1$, then equation (14) can further be reduced and represented using the following equation:

$$\frac{k_h}{k_v} = \left(\frac{R_v}{R_h} \right) \quad (15)$$

From equation (15), the permeability anisotropy can be estimated if the resistivity anisotropy is known, such as from MCI log inversion processing.

Determination of Permeability Tensor Components in TI Formations

[0053] An effective (or geometric mean) permeability as measured by a conventional formation logging tool can be represented using the following equation in TI formations:

$$k_e = \sqrt[3]{k_h^2 \cdot k_v} \quad (16)$$

[0054] The effective permeability, k_e , should fall between k_h and k_v . It is noted that $k_h = k_v = k_e$ for isotropic media. For core measurements, it is possible to measure one permeability component or multi-component permeability, such as k_h or k_v or both components. In one case, if it is assumed that the log-derived permeabilities (e.g., using resistivity logs, sonic and/or NMR) are calibrated by k_e , then they are approximately equal to this effective permeability, k_e . In another case, if it is assumed that the log-derived permeabilities are calibrated by k_h or k_v , then they are approximately equal to the horizontal or vertical permeability, k_h or k_v .

[0055] For example, if it is assumed that the resistivity anisotropy can be obtained from the MCI resistivity measurements, then the horizontal and vertical permeabilities are determined from equations (15) and (16) if the log-derived permeabilities are equal to this effective permeability, k_e . Thus, the following equations can be used for determining k_h and k_v :

$$k_h = k_e \cdot \sqrt[3]{k_{hv}} = k_e \cdot \sqrt[3]{R_{vh}} \quad (17)$$

$$k_v = \frac{k_e}{k_{hv}^{2/3}} = \frac{k_e}{R_{vh}^{2/3}} \quad (18)$$

[0056] FIG. 4 is a pair of plot diagrams illustrating simulated results for permeability components, k_h and k_v , and anisotropic ratio k_{hv} as a function of the resistivity anisotropy ratio, R_{vh} using equations (17) and (18). The effective permeability is not equal to the horizontal and vertical permeabilities if $R_{vh} > 1$. Both k_h and k_v are two log-linear

functions of R_{vh} . In the left plot, the effective permeability is 50 md. In the right plot, the effective permeability is 500 md. Therefore, after k_h and k_v are available, the permeability tensor $\mathbf{K} = \text{diag}(k_h, k_h, k_v)$ can be determined.

True Permeability Determination in Laminar Reservoirs

[0057] It is known that the laminations in laminar reservoirs are often much thinner than a logging tool's vertical resolution. Therefore, the log-derived permeabilities can be represented as weighted averages of true reservoir permeability and shale permeability. FIG. 5 is a diagram of a multi-component permeability model consisting of M-number types of isotropic sands and one TI shale. In the model, $k_{sd}^{(i)}$ is the i-th type true or sand permeability, and k_{sh}^h and k_{sh}^v represent the horizontal and vertical permeabilities of the pure shale formation. According to the multi-component permeability model, the following equations can be used for determination of true reservoir permeability in a laminar formation, such as sand-shale formations:

[0058] For permeability in a direction parallel (e.g., horizontal) to the bedding plane, the horizontal permeability can be represented using the following equation:

$$k_h = \sum_{i=1}^M \left(V_{sd}^{(i)} \cdot k_{sd}^{(i)} \right) + k_{sh}^h \cdot \sum_{i=1}^M V_{lam}^{(i)} = \sum_{i=1}^M \left(V_{sd}^{(i)} \cdot k_{sd}^{(i)} \right) + k_{sh}^h \cdot V_{lam} \quad (19)$$

[0059] For permeability in a direction perpendicular (e.g., vertical) to the bedding plane, the vertical permeability can be represented using the following equation:

$$\frac{1}{k_v} = \sum_{i=1}^M \left(\frac{V_{sd}^{(i)}}{k_{sd}^{(i)}} \right) + \frac{\sum_{i=1}^M V_{lam}^{(i)}}{k_{sh}^v} = \sum_{i=1}^M \left(\frac{V_{sd}^{(i)}}{k_{sd}^{(i)}} \right) + \frac{V_{lam}}{k_{sh}^v} \quad (20)$$

[0060] In equations (19) and (20), it is assumed that all sands are isotropic and the shale is TI anisotropic. M represents the total number of the sand types. k_{sh}^h and k_{sh}^v represent the horizontal and vertical permeabilities of the pure shale formation, respectively. $V_{lam} = \sum_{i=1}^M V_{lam}^{(i)}$ represents the total laminated shale volume fraction, $V_{sd}^{(i)}$ represents the

volume percentage for the i-th type sand or reservoir, $k_{sd}^{(i)}$ represents the i-th type sand permeability, and $\sum_{i=1}^M (V_{sd}^{(i)}) + V_{lam} = 1$.

[0061] If it is assumed that $M = 1$ or $k_{sd}^{(1)} = k_{sd}^{(2)} = \dots = k_{sd}^{(M)} = k_{sd}$, the above equations can be reduced to a bimodal permeability model for determination of reservoir permeability. FIG. 6 is a diagram illustrating a bimodal permeability model consisting of isotropic sand and TI shale. Here, k_{sd} is the true sand (or reservoir) permeability, and k_{sh}^h and k_{sh}^v are the horizontal and vertical permeabilities of the pure shale formation. As illustrated, a multi-layer model can be reduced to an equivalent two-layer bimodal model.

[0062] The horizontal permeability component can be represented using the following reduced equation: $k_h = (1 - V_{lam}) \cdot k_{sd} + V_{lam} \cdot k_{sh}^h$ (21)

[0063] The vertical permeability component can be represented using the following reduced equation: $\frac{1}{k_v} = \frac{(1-V_{lam})}{k_{sd}} + \frac{V_{lam}}{k_{sh}^v}$, or $k_v = \frac{1}{\frac{(1-V_{lam})}{k_{sd}} + \frac{V_{lam}}{k_{sh}^v}}$ (22)

[0064] In equations (21) and (22), if k_h , k_v , k_{sh}^h and k_{sh}^v are known, then the sand permeability k_{sd} and V_{lam} can be solved. For example, the graphical solution of sand permeability k_{sd} and laminar shale volume V_{lam} to equations (21) and (22) for laminar shale at $k_{sh}^h = 10$ md and $k_{sh}^v = 10$ md are shown in FIG. 7. In FIG. 7, the dashed-line contours correspond to values of constant V_{lam} , and the solid-line contours represent values of constant k_{sd} . Similarly, FIG. 8 illustrates a graphical solution for $k_{sh}^h = 10$ md and $k_{sh}^v = 5$ md. In FIG. 8, the dashed-line contours correspond to values of constant V_{lam} , and the solid-line contours represent values of constant k_{sd} .

[0065] However, if it is assumed that both sand and shale are isotropic (e.g., $k_{sh}^h = k_{sh}^v = k_{sh}$), equations (21) and (22) can be expressed using the following equations:

$$k_h = (1 - V_{lam}) \cdot k_{sd} + V_{lam} \cdot k_{sh} \quad (23)$$

$$\frac{1}{k_v} = \frac{(1-V_{lam})}{k_{sd}} + \frac{V_{lam}}{k_{sh}}, \text{ or } k_v = \frac{1}{\frac{(1-V_{lam})}{k_{sd}} + \frac{V_{lam}}{k_{sh}}} \quad (24)$$

[0066] However, even though it is assumed that both the sand and shale are isotropic, the macro anisotropy of formation permeability can be observed. For example, FIG. 9 is a pair of plots illustrating horizontal and vertical permeability, k_h and k_v , effective permeability k_e , and anisotropic ratio $k_{hv} = k_h/k_v$ as a function of laminar shale volume V_{lam} . If $V_{lam} \neq 0$, k_{sd} and k_{sh} represent the sandstone and shale permeability, respectively. If it is assumed that the two permeability components, k_h , k_v , and laminar shale volume V_{lam} are known, then k_{sd} and k_{sh} can be resolved from equations (23) and (24). After the lamination effects on the measured/calculated permeabilities, k_h , k_v , are corrected, the more accurate permeability k_{sd} for sand can be obtained. In FIG. 9, the sandstone permeability $k_{sd} = 100$ md and $k_{sh}^h = 10$ md. The left plot has shale permeability $k_{sh}^v = 1$ or the shale is isotropic. The right plot has shale permeability $k_{sh}^v = 5$ or the shale is TI anisotropic. These plots show that the k_{hv} approaches the maximum value at approximately 50% shale by volume. FIG. 10 is a plot diagram illustrating a graphical solutions for k_{sd} and k_{sh} to Equations (23) and (24) at a laminar shale volume of $V_{lam} = 20\%$. In FIG. 10, the solid-line contours correspond to values of constant k_{sh} , and the dashed-line contours represent values of constant k_{sd} .

[0067] Using equations (23) and (24), the permeability anisotropy ratio $k_{hv} = \frac{k_h}{k_v}$ can be represented using the following equation:

$$\begin{aligned} k_{hv} = \frac{k_h}{k_v} &= [(1 - V_{lam}) \cdot k_{sd} + V_{lam} \cdot k_{sh}] \frac{(1 - V_{lam})}{k_{sd}} + \frac{V_{lam}}{k_{sh}} \\ &= 1 + V_{lam}(1 - V_{lam}) \cdot \left[\frac{k_{sd}}{k_{sh}} + \frac{k_{sh}}{k_{sd}} - 2 \right] \end{aligned} \quad (25)$$

[0068] Further, the following equations can be used for calculating R_h and R_v :

$$\frac{1}{R_h} = \frac{(1 - V_{lam})}{R_{sd}} + \frac{V_{lam}}{R_{sh}^h} \quad (26)$$

$$R_v = (1 - V_{lam}) \cdot R_{sd} + V_{lam} \cdot R_{sh}^v \quad (27)$$

[0069] If $R_{sh}^h = R_{sh}^v = R_{sh}$, the following resistivity anisotropy ratio occurs:

$$R_{vh} = \frac{R_v}{R_h} = 1 + V_{lam}(1 - V_{lam}) \cdot \left[\frac{R_{sd}}{R_{sh}} + \frac{R_{sh}}{R_{sd}} - 2 \right] \quad (28)$$

[0070] From the above, it can be observed that: if $\frac{k_{sd}}{k_{sh}} = \frac{R_{sd}}{R_{sh}}$, then $k_{hv} = R_{vh}$ (or $C_{RP} = 1$). Otherwise, $k_{hv} = C_{RP} \cdot R_{vh}$, and C_{RP} is a non-linear function of V_{lam} , $\frac{k_{sd}}{k_{sh}}$, and $\frac{R_{sd}}{R_{sh}}$, and can be represented using the following equation:

$$C_{RP} = \frac{1 + V_{lam}(1 - V_{lam}) \cdot \left[\frac{k_{sd}}{k_{sh}} + \frac{k_{sh}}{k_{sd}} - 2 \right]}{1 + V_{lam}(1 - V_{lam}) \cdot \left[\frac{R_{sd}}{R_{sh}} + \frac{R_{sh}}{R_{sd}} - 2 \right]} \quad (29)$$

[0071] Once all of V_{lam} , $\frac{k_{sd}}{k_{sh}}$, and $\frac{R_{sd}}{R_{sh}}$ are known, equation (29) can be used to estimate C_{RP} . FIG. 11 is a plot diagram illustrating simulated results for permeability anisotropy ratio k_{hv} as a function of resistivity anisotropy ratio R_{vh} using equations (25) and (28). In FIG. 11, $\frac{k_{sd}}{k_{sh}} = 100$, the dashed lines above the solid line have values of: $\frac{R_{sd}}{R_{sh}} = 1, 5, 10, 20$, and 50 from left to right; blue solid line has a value of: $\frac{R_{sd}}{R_{sh}} = 100$; the dashed lines below the solid line have values of: $\frac{R_{sd}}{R_{sh}} = 200, 300, 500$, and 1000 from left to right; and $V_{lam} = 0 - 0.8$. FIG. 11 provides a graphical solution to C_{RP} , and illustrates a log-linear correlation between k_{hv} and R_{vh} if both ratios are less than 10, or C_{RP} is not sensitive to V_{lam} .

Permeability Anisotropy Determination in BA Formations

[0072] Equations similar to those previously discussed with regard to equations (15) and (16) for TI formations can be inferred for BA formations and represented using the following equations:

$$k_{xz} = \frac{k_x}{k_z} = \left(\frac{R_z}{R_x} \right) = R_{zx} \quad (30)$$

$$k_{yz} = \frac{k_y}{k_z} = \left(\frac{R_z}{R_y} \right) = R_{zy} \quad (31)$$

$$k_{yx} = \frac{k_y}{k_x} = \left(\frac{R_x}{R_y} \right) = R_{xy} \quad (32)$$

$$k_e^{BA} = \sqrt[3]{k_x \cdot k_y \cdot k_z} \quad (33)$$

where $R_{zy} = R_{zx} \cdot R_{xy}$. Once the triaxial resistivity components (R_x , R_y , and R_z) and the effective permeability k_e^{BA} or one permeability component such as k_x are available, then the tri-axial permeability components (k_x , k_y , and k_z) and permeability anisotropy (e.g., $\frac{k_x}{k_y}$, and $\frac{k_y}{k_z}$) can be obtained.

[0073] For example, if k_e^{BA} and the resistivity anisotropy ratios are known, then equation (33) can be solved for the following:

$$k_x = k_e^{BA} \cdot \left(\frac{R_{zx}}{R_{xy}} \right)^{1/3} \quad (34)$$

$$k_y = k_e^{BA} \cdot (R_{xy} \cdot R_{zy})^{1/3} \quad (35)$$

$$k_z = \frac{k_e^{BA}}{(R_{xy} \cdot R_{zy})^{1/3}} \quad (36)$$

[0074] FIG. 12 is a pair of plot diagrams illustrating simulated results for triaxial permeability components, k_x , k_y , and k_z , as a function of the resistivity anisotropy ratio, R_{xy} , by using equations (34) – (36). In FIG. 12, $R_{zy} = 6$, and two effective permeability plots are displayed. As illustrated, k_x , k_y , and k_z , are three log-linear functions of horizontal resistivity anisotropy ratio, R_{xy} . The left plot diagram has effective permeability $k_e = 50$ md and the right plot diagram has effective permeability $k_e = 500$ md. It is noted that the plot diagrams of FIG. 12 (e.g., for a biaxial anisotropic formation) is similar to those of FIG. 4 (e.g., for a TI anisotropic formation).

Workflow for Prediction of Permeability Anisotropy

[0075] FIG. 13 is a flow chart illustrating a method 1300 comprising multi-level data processing based on multiple forward models with BA and TI anisotropies. The method 1300 provides for evaluation of formation permeability anisotropy using an integration of MCI log data with other sensor logs (e.g., NMR, sonic, or other logging tools).

[0076] At operation 1402, MCI measurement data captured by a triaxial MCI tool in a borehole extending through a subsurface geological formations is inputted after calibration, temperature correction and other preprocessing. This preprocessing does not include skin-effect correction. The MCI data may be multi-frequency data, and may be taken at multiple spacings. In some embodiments, the MCI measurement data can be single-frequency measurements for the respective arrays of the tool. Further, other log data captured by, for example, sonic or NMR logging tools are also inputted.

[0077] At operation 1304, inversion processing is applied to MCI measurement data to produce inverted parameters to be used for permeability evaluation. For example, a TI-based inversion can be applied to produce the inverted TI parameters of R_h and R_v . Further, a BA-based inversion can be applied to produce the inverted BA parameters of R_x , R_y , and R_z . Each of these TI- and BA-based inversion processings can be based on various formation models, including, but not limited to: radially one-dimensional (R1D) and zero-dimensional (0D) models. The inverted parameters can be used for the determination of, for example, the resistivity anisotropy (R_{vh}). The permeability anisotropy ratio (k_{hv}) can be determined from the resistivity anisotropy using, for example, equations (12) – (15) as discussed above. Operation 1304 can further include determining the laminar shale volume V_{lam} .

[0078] At operation 1306, the effective permeability k_e (or a permeability component) can be determined using conventional log-derived permeabilities (e.g., using NMR, sonic, or resistivity logs). At operation 1308, permeability components can be determined using resistivity anisotropy data obtained from MCI resistivity measurement data and the effective permeability k_e from conventional permeability logs. In one embodiment, equations (17) – (18) as discussed above can be used for determining the permeability components, k_h and k_v , in TI formations. The permeability components can be used to solve equations (19) – (20) as

discussed above for recovering the horizontal and vertical permeabilities k_{sh}^h and k_{sh}^v of a pure shale formation. With a known laminar shale volume V_{lam} , equations (21) and (22) as discussed above can be solved to obtain the sand permeability k_{sd} in laminated formations.

[0079] In other embodiments, resistivity and conventional permeability log data can be used for determining the permeability components in BA formations. The tri-axial resistivity components (R_x , R_y , and R_z) and the effective permeability (or a permeability component), from the previous operations, can be used to determine the tri-axial permeability components (k_x , k_y , and k_z) and permeability anisotropy (e.g., $\frac{k_x}{k_y}$, and $\frac{k_y}{k_z}$) using, for example, equations (34) – (36) as discussed above.

[0080] Once the above data is determined, equation (29) as discussed above can be used to estimate the C_{RP} coefficient. In some embodiments, The resulting data, the calculated k_h and k_v or k_x , k_y , and k_z , and k_{sd} (and k_{sh}) can be evaluated for data quality at operation 1310 before output for use in formation evaluation at 1312.

[0081] Benefits of the described methods and systems for permeability anisotropy assessment using both MCI data and conventional permeability logs include more accurate reservoir assessment, fracture detection, and oil development / production.

Workflow Validation

[0082] FIG. 14 is a set of plots that provides a synthetic data set without errors for predicting the permeability anisotropy ratio (k_{hv}) and the horizontal and vertical permeability components (k_h and k_v) from an integrated interpretation of V_{lam} , R_v/R_h , and the effective permeability (k_e).

[0083] Track 1, the plot illustrated furthest to the left of FIG. 14, illustrates simulated horizontal and vertical resistivity (R_h and R_v having units of ohm-m) over a range of depths. The resistivity anisotropy (R_{vh}) is also illustrated in Track 1. R_h and R_v are calculated using equations (26) and (27), as discussed above, for a given $R_{sd} = 10$ ohm-m, $R_{sh}^h = R_{sh}^v = 2$ ohm-

m, and the known laminar shale volume log V_{lam} is plotted in the adjacent Track 2. The laminar shale volume log V_{lam} is simulated using the below equation:

$$V_{lam}(z, AA, BB) = AA - BB \cdot \sum_{i=1}^{N_{sh}} a_i \cdot g_i(z, b_i, c_i), \quad (37)$$

where z represents the logging depth (in units of feet), $AA = 0.95$, $BB = 0.85$, and $N_{sh} = 7$.

[0084] $g_i(z, b_i, c_i)$ represents multiple, modified Gaussian functions, which can be expressed using the below equation:

$$g_i(z, b_i, c_i) = e^{-\frac{1}{2} \left(\frac{z-b_i}{c_i} \right)^2}, \quad i = 1, 2, \dots, N_{sh} \quad (38)$$

where $a_i = 1$, $b_i = -70, -50, -25, 0, 25, 50, 70$, and $c_i = 5, 5, 10, 5, 10, 5, 5$.

[0085] Track 3 illustrates simulated horizontal / vertical permeability (k_h / k_v), effective permeability (k_e), and the permeability anisotropy ratio ($k_{hv} = k_h/k_v$) as determined by equations (23), (24), and (18) with a given $k_{sd} = 100$ md and $k_{sh}^h = k_{sh}^v = 20$ md, and further with the known V_{lam} from Track 2. Track 4 illustrates the predicted horizontal / vertical permeability (k_h / k_v), sand permeability (k_{sd}), and the permeability anisotropy ratio ($k_{hv} = k_h/k_v$) using the workflow described in FIG. 13.

[0086] Due to the permeability macro-anisotropy caused by laminations and the limitation of tool vertical resolution, the effective permeability k_e from conventional logs is not the same as k_h and k_v . Further, it can be seen that all of k_e , k_h and k_v are significantly different from the k_{sd} log for the same lamination reason. However, by comparing Tracks 3 and 4, it can be seen that the predicted k_h & k_v , k_{sd} , and k_{hv} in Track 4 are all identical to their true values in Track 3.

[0087] FIG. 15 is a set of plots that provides a synthetic data set with a maximum random error of $\pm 20\%$ for predicting the permeability anisotropy ratio (k_{hv}) and the horizontal / vertical permeability components (k_h and k_v) from an integrated interpretation of V_{lam} , R_v/R_h , and the effective permeability (k_e). The laminar shale volume log V_{lam} is simulated with random error using the below equation:

$$V_{lam}^{err}(z, AA, BB) = (1 + 0.2 * [2 * randomErr - 1]) * V_{lam}(z, AA, BB) \quad (38)$$

where *randomErr* is a random error generated by computer (e.g., $0.0 \leq \text{randomErr} \leq 1.0$). From the above, it is known that the max error is 20%.

[0088] Track 1, the plot illustrated furthest to the left of FIG. 15, illustrates simulated horizontal and vertical resistivity (R_h and R_v having units of ohm-m) over a range of depths. The resistivity anisotropy (R_{vh}) is also illustrated in Track 1. R_h and R_v are calculated using equations (26) and (27), as discussed above, for a given $R_{sd} = 10$ ohm-m, $R_{sh}^h = R_{sh}^v = 2$ ohm-m, and the known laminar shale volume log V_{lam} is plotted in the adjacent Track 2. Track 3 illustrates simulated horizontal / vertical permeability (k_h / k_v), effective permeability (k_e), and the permeability anisotropy ratio ($k_{hv} = k_h/k_v$) as determined by equations (23), (24), and (18) with a given $k_{sd} = 100$ md and $k_{sh}^h = k_{sh}^v = 20$ md, and further with the known V_{lam} from Track 2. Track 4 illustrates the predicted horizontal / vertical permeability (k_h / k_v), sand permeability (k_{sd}), and the permeability anisotropy ratio ($k_{hv} = k_h/k_v$) using the workflow described in FIG. 13. Even though the data set of FIG. 15 includes error (as opposed to FIG. 14), it can be seen that the predicted permeability data obtained in Track 4 still compares well relative to the true values shown in Track 3.

[0089] Referring now to FIG. 16, a cross plot is illustrated for k_h vs k_v vs V_{lam} for the data set shown in FIG. 15. From the cross-plot the shale permeability k_{sh} can be determined using the highest V_{lam} . It can be observed that the shale is isotropic and has a permeability of $k_{sh} = 20$ md.

Example System

[0090] FIG. 17 is a schematic block diagram of an example system 1700 for estimating subsurface formation and invasion properties, according to an example embodiment. The example system 1700 of FIG. 17 may be configured to perform one or more of the methods described above with reference to FIG. 13. The system 1700 is described in terms of a number of modules for performing the respective operations previously described. As used herein a “module” can be an engine, logic component, or mechanism capable of performing described operations and/or configured or arranged in a certain manner. Modules may constitute either

software modules, with code embodied on a non-transitory machine-readable medium (i.e., such as any conventional storage device, such as volatile or non-volatile memory, disk drives or solid state storage devices (SSDs), etc.), or hardware-implemented modules. In certain example embodiments, one or more computer systems (e.g., a standalone, client, or server computer system) or one or more components of a computer system (e.g., a processor or a group of processors) may be configured by software (e.g., an application or application portion) or firmware (note that software and firmware can generally be used interchangeably herein as is known by a skilled artisan) as a module that operates to perform the described operations.

[0091] In various embodiments, a hardware-implemented module may be implemented mechanically or electronically. A hardware-implemented module is a tangible unit capable of performing certain operations and may be configured or arranged in a certain manner. In example embodiments, one or more computer systems (e.g., a standalone, client, or server computer system) or one or more processors may be configured by software (e.g., an application or application portion) as a hardware-implemented module that operates to perform certain operations as described herein. For example, a hardware-implemented module may include dedicated circuitry or logic that is permanently configured (e.g., within a special-purpose processor, application specific integrated circuit (ASIC), or logic array) to perform the identified operations. A hardware-implemented module may also include programmable logic or circuitry (e.g., as encompassed within a general-purpose processor or other programmable processor) that is temporarily configured by software or firmware to perform some or all of such operations.

[0092] The term "hardware-implemented module" should be understood to encompass a tangible entity, be that an entity that is physically constructed, permanently configured (e.g., hardwired), or temporarily or transitorily configured (e.g., programmed) to operate in a certain manner and/or to perform certain operations described herein. Considering embodiments in which hardware-implemented modules are temporarily configured (e.g., programmed), each of the hardware-implemented modules need not be configured or instantiated at any one instance in time. For example, where the hardware-implemented

modules comprise a general-purpose processor configured using software, the general-purpose processor may be configured as respective different hardware-implemented modules at different times. Software may accordingly configure a processor, for example, to constitute a particular hardware-implemented module at one instance of time and to constitute a different hardware-implemented module at a different instance of time.

[0093] Hardware-implemented modules can provide information to, and receive information from, other hardware-implemented modules. Accordingly, the described hardware-implemented modules may be regarded as being communicatively coupled. Where multiple of such hardware-implemented modules exist contemporaneously, communications may be achieved through signal transmission (e.g., over appropriate circuits and buses) that connect the hardware-implemented modules. In embodiments in which multiple hardware-implemented modules are configured or instantiated at different times, communications between such hardware-implemented modules may be achieved, for example, through the storage and retrieval of information in memory structures to which the multiple hardware-implemented modules have access. For example, one hardware-implemented module may perform an operation and store the output of that operation in a memory device to which it is communicatively coupled. A further hardware-implemented module may then, at a later time, access the memory device to retrieve and process the stored output. Hardware-implemented modules may also initiate communications with input or output devices, and can operate on a resource (e.g., a collection of information).

[0094] Accordingly, the term “module” should be understood to encompass a tangible entity, be that an entity that is physically constructed, permanently configured (e.g., hardwired), non-transitory, or temporarily configured (e.g., programmed) to operate in a certain manner or to perform certain operations described herein. In some embodiments, modules or components may temporarily configured (e.g., programmed); and each of the modules or components need not be configured or instantiated at any one instance in time. For example, where the modules or components include a general-purpose processor configured using software, the general-purpose processor may be configured as respective different modules at different times. Software may accordingly configure the processor to constitute a particular

module at one instance of time and to constitute a different module at a different instance of time.

[0095] Modules can provide information to, and receive information from, other modules. Accordingly, the described modules may be regarded as being communicatively coupled. Where multiples of such modules exist contemporaneously, communications may be achieved through signal transmission (e.g., over appropriate circuits and buses) that connect the modules. In embodiments in which multiple modules are configured or instantiated at different times, communications between such modules may be achieved, for example, through the storage and retrieval of information in memory structures to which the multiple modules have access. For example, one module may perform an operation and store the output of that operation in a memory device to which it is communicatively coupled. A further module may then, at a later time, access the memory device to retrieve and process the stored output. Modules may also initiate communications with input or output devices and can operate on a resource (e.g., a collection of information).

[0096] For purposes of the present description, the modules of FIG. 17 will be described in terms of the algorithms executed in each module, as may be executed by one or more processors, general purpose computer or other mechanism based on instructions stored in hardware in accordance with the description above.

[0097] In this example embodiment, the system 1700 includes a data access module 1704 configured to access MCI and other logging data from an initialization module 1702, such as previously described in paragraph [0076]. An inversion module 1706 is configured to perform inversion in accordance with one or more of the example embodiments discussed with reference to FIG. 13, while a permeability determination module 1708 is configured to determine one or more permeability anisotropy components based on results of the inversion, according to the permeability anisotropy models and/or formulas discussed above. In some embodiments, the inversion module 1706 can be configured to perform the inversion processing in the manner described in paragraph [0077]. In one embodiment, the inversion module 1706 can be configured to calculate inverted TI parameters by performing an iterative

inversion operation on the MCI data using a TI formation model that represents simulated formation resistivity characteristics that account for transverse formation isotropy to resistivity in the manner described in paragraph [0077]. In other embodiments, the can be configured to calculate inverted BA parameters by performing an iterative inversion operation on the MCI data using a BA formation model that represents simulated formation resistivity characteristics that account for transverse biaxial formation anisotropy to resistivity in the manner described in paragraph [0077].

[0098] After inversion processing, the permeability determination module 1708 can perform permeability anisotropy calculations as described in paragraphs [0077]-[0080]. The system 1700 further comprises an output module 1710 configured to deliver the calculated permeability components. The output module 1710 may in some embodiments deliver numerical tables with estimated values for formation resistivity, laminar shale volume, and/or various permeability components and invasion resistivity at multiple different points along a borehole. In other embodiments, a graphical plot that maps the estimated values to the borehole positions may be printed in hard copy, and/or may be displayed on a display screen (e.g., video display unit 1810 as further described below in reference to FIG. 18).

Example Machine Architecture and Machine-Readable Medium

[0099] The various operations of example methods described herein may be performed, at least partially, by one or more processors that are temporarily configured (e.g., by software) or permanently configured to perform the relevant operations. Whether temporarily or permanently configured, such processors may constitute processor-implemented modules that operate to perform one or more operations or functions. The modules referred to herein may, in some example embodiments, comprise processor-implemented modules.

[00100] Similarly, the methods described herein may be at least partially processor-implemented. For example, at least some of the operations of a method may be performed by one or more processors or processor-implemented modules. The performance of certain operations may be distributed among the one or more processors, not only residing within a

single machine, but deployed across a number of machines. In some example embodiments, the processor or processors may be located in a single location (e.g., within a home environment, an office environment or as a server farm), while in other embodiments the processors may be distributed across a number of locations.

[00101] The one or more processors may also operate to support performance of the relevant operations in a "cloud computing" environment or as a "software as a service" (SaaS). For example, at least some of the operations may be performed by a group of computers (as examples of machines including processors), with these operations being accessible via a network (e.g., the Internet) and via one or more appropriate interfaces (e.g., Application Program Interfaces (APIs).)

[00102] FIG. 18 is a diagrammatic representation of a machine in the example form of a computer system 1800 within which a set of instructions 1824 may be executed for causing the machine to perform any one or more of the methodologies discussed herein. For example, the surface computer system 366 (FIG. 3) or any one or more of its components may be provided by the system 1800.

[00103] In alternative embodiments, the machine operates as a standalone device or may be connected (e.g., networked) to other machines. In a networked deployment, the machine may operate in the capacity of a server or a client machine in a server-client network environment, or as a peer machine in a peer-to-peer (or distributed) network environment. The machine may be a server computer, a client computer, a personal computer (PC), a tablet PC, a set-top box (STB), a Personal Digital Assistant (PDA), a cellular telephone, a web appliance, a network router, switch or bridge, or any machine capable of executing a set of instructions (sequential or otherwise) that specify actions to be taken by that machine. Further, while only a single machine is illustrated, the term "machine" shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein.

[00104] The example computer system 1800 includes a processor 1802 (e.g., a central processing unit (CPU) a graphics processing unit (GPU) or both), a main memory 1804 and a

static memory 1806, which communicate with each other via a bus 1808. The computer system 1800 may further include a video display unit 1810 (e.g., a liquid crystal display (LCD) or a cathode ray tube (CRT)). The computer system 1800 also includes an alpha-numeric input device 1812 (e.g., a keyboard), a cursor control device 1814 (e.g., a mouse), a disk drive unit 1816, a signal generation device 1818 (e.g., a microphone/speaker) and a network interface device 1820.

[00105] The disk drive unit 1816 includes a machine-readable or computer-readable storage medium 1822 on which is stored one or more sets of instructions 1824 (e.g., software) embodying any one or more of the methodologies or functions described herein. The instructions 1824 may also reside, completely or at least partially, within the main memory 1804 and/or within the processor 1802 during execution thereof by the computer system 1800, the main memory 1804 and the processor 1802 also constituting non-transitory machine-readable media. The instructions 1824 may further be transmitted or received over a network 1826 via the network interface device 1820.

[00106] While the machine-readable storage medium 1822 is shown in an example embodiment to be a single medium, the term "machine-readable medium" should be taken to include a single medium or multiple media (e.g., a centralized or distributed database and/or associated caches and servers) that store the one or more sets of instructions 1824. The term "machine-readable medium" shall also be taken to include any medium that is capable of storing a set of instructions for execution by the machine and that cause the machine to perform any one or more of the methodologies of this disclosure. The term "machine-readable medium" shall accordingly be taken to include, but not be limited to, solid-state memory devices of all types, as well as optical and magnetic media.

[00107] Although this disclosure has been described with reference to specific example embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader scope of the disclosure. Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense.

[00108] The following numbered examples are illustrative embodiments in accordance with various aspects of the present disclosure.

1. A method of formation evaluation that includes accessing multicomponent induction (MCI) and permeability data captured by measurement tools in a borehole extending through a subsurface formation; determining inverted resistivity parameters by performing an iterative inversion operation on the MCI data; determining a resistivity anisotropy ratio based at least in part on the inverted resistivity parameters and a permeability anisotropy ratio based at least in part on the formation resistivity anisotropy; determining one or more permeability components based at least in part on the permeability data and permeability-resistivity relationship between the resistivity anisotropy ratio and the permeability anisotropy ratio; and generating a visualization of the one or more permeability components for display on a display device.

2. The method of example 1, further including determining inverted transverse isotropy (TI) parameters by performing an iterative inversion operation on the MCI data.

3. The method of either of examples 1 or 2, in which the iterative inversion operation on the MCI data uses a TI formation model that represents simulated formation resistivity characteristics that account for transverse formation isotropy to resistivity.

4. The method of any of examples 1-3, further including determining inverted biaxial isotropy (BA) parameters by performing an iterative inversion operation on the MCI data.

5. The method of any of examples 1-4, in which the iterative inversion operation on the MCI data uses a BA formation model that represents simulated formation resistivity characteristics that account for transverse biaxial formation anisotropy to resistivity.

6. The method of any of examples 1-5, in which determining one or more permeability components further includes determining biaxial permeability components for a TI anisotropic formation.

7. The method of any of examples 1-6, in which determining one or more permeability components further includes determining triaxial permeability components for a BA anisotropic formation.
8. The method of any of examples 1-7, in which determining one or more permeability components further includes determining permeability anisotropy based at least in part on the one or more permeability components.
9. The method of any of examples 1-8, further including determining horizontal and vertical permeabilities of a shale formation.
10. The method of any of examples 1-9, further including determining true sand permeability in a laminated formation.
11. The method of any of examples 1-10, in which the display device displays one or more permeability components at multiple points along the borehole.
12. A system includes a data access module to access multicomponent induction (MCI) and permeability data captured by measurement tools in a borehole extending through a subsurface formation; an inversion module to calculate inverted resistivity parameters by performing an iterative inversion operation based on the MCI data; a permeability determination module to calculate one or more permeability components based at least in part on the permeability data and the inverted resistivity parameters; and a display device for generating a visualization of the one or more permeability components.
13. The system of example 12, in which the inversion module is further configured to calculate inverted transverse isotropy (TI) parameters by performing an iterative inversion operation on the MCI data using a TI formation model that represents simulated formation resistivity characteristics that account for transverse formation isotropy to resistivity.
14. The system of any of the preceding examples, in which the inversion module is further configured to calculate inverted biaxial anisotropy (BA) parameters by performing an iterative inversion operation on the MCI data using a BA formation model that represents simulated formation resistivity characteristics that account for transverse biaxial formation anisotropy to resistivity.

15. The system of any of the preceding examples, in which the permeability determination module is further configured to determine a resistivity anisotropy ratio based at least in part on the inverted resistivity parameters and a permeability anisotropy ratio based at least in part on the formation resistivity anisotropy.

16. The system of any of the preceding examples, in which the permeability determination module determines the one or more permeability components based at least in part on a permeability-resistivity relationship between the resistivity anisotropy ratio and the permeability anisotropy ratio.

17. The system of any of the preceding examples, in which the permeability determination module is further configured to determine sand permeability in a laminated formation.

18. A computer readable storage medium having stored thereon instructions for causing a machine, in response to execution of the instructions by the machine, to perform operations that include accessing multicomponent induction (MCI) and permeability data captured by measurement tools in a borehole extending through a subsurface formation; determining inverted resistivity parameters by performing an iterative inversion operation on the MCI data; determining a resistivity anisotropy ratio based at least in part on the inverted resistivity parameters and a permeability anisotropy ratio based at least in part on the formation resistivity anisotropy; determining one or more permeability components based at least in part on the permeability data and permeability-resistivity relationship between the resistivity anisotropy ratio and the permeability anisotropy ratio; and generating a visualization of the one or more permeability components for display on a display device.

19. The computer readable storage medium of example 18, in which the instructions are executable to further perform operations including determining horizontal and vertical permeabilities of a shale formation using a multi-component permeability model including isotropic sands and transversely isotropic shale.

20. The computer readable storage medium of example 18, in which the instructions are executable to further perform operations including determining sand permeability in a laminated formation using a bimodal permeability model.

[00109] In this description, references to “one embodiment” or “an embodiment,” or to “one example” or “an example,” are not intended necessarily to refer to the same embodiment or example; however, neither are such embodiments mutually exclusive, unless so stated or as will be readily apparent to those of ordinary skill in the art having the benefit of this disclosure. Thus, a variety of combinations and/or integrations of the embodiments and examples described herein may be included, as well as further embodiments and examples as defined within the scope of all claims based on this disclosure, and all legal equivalents of such claims.

[00110] In the foregoing Detailed Description, it can be seen that various features are grouped together in a single embodiment for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, disclosed subject matter lies in less than all features of a single disclosed embodiment. Thus, the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate embodiment.

CLAIMS

What is claimed is:

1. A method of formation evaluation, comprising:

accessing multicomponent induction (MCI) and permeability data captured by measurement tools in a borehole extending through a subsurface formation;

determining inverted resistivity parameters by performing an iterative inversion operation on the MCI data;

determining a resistivity anisotropy ratio based at least in part on the inverted resistivity parameters and a permeability anisotropy ratio based at least in part on the formation resistivity anisotropy;

determining one or more permeability components based at least in part on the permeability data and permeability-resistivity relationship between the resistivity anisotropy ratio and the permeability anisotropy ratio; and

generating a visualization of the one or more permeability components for display on a display device.

2. The method of claim 1, further comprising:

determining inverted transverse isotropy (TI) parameters by performing an iterative inversion operation on the MCI data.

3. The method of claim 2, wherein the iterative inversion operation on the MCI data uses a TI formation model that represents simulated formation resistivity characteristics that account for transverse formation isotropy to resistivity.

4. The method of claim 1, further comprising:

determining inverted biaxial isotropy (BA) parameters by performing an iterative inversion operation on the MCI data.

5. The method of claim 4, wherein the iterative inversion operation on the MCI data uses a BA formation model that represents simulated formation resistivity characteristics that account for transverse biaxial formation anisotropy to resistivity.
6. The method of claim 1, wherein determining one or more permeability components further comprises determining biaxial permeability components for a TI anisotropic formation.
7. The method of claim 1, wherein determining one or more permeability components further comprises determining triaxial permeability components for a BA anisotropic formation.
8. The method of claim 1, wherein determining one or more permeability components further comprises determining permeability anisotropy based at least in part on the one or more permeability components.
9. The method of claim 1, further comprising:
 - determining horizontal and vertical permeabilities of a shale formation.
10. The method of claim 1, further comprising:
 - determining true sand permeability in a laminated formation.
11. The method of claim 1, wherein the display device displays one or more permeability components at multiple points along the borehole.

12. A system comprising:

a data access module to access multicomponent induction (MCI) and permeability data captured by measurement tools in a borehole extending through a subsurface formation;

an inversion module to calculate inverted resistivity parameters by performing an iterative inversion operation based on the MCI data;

a permeability determination module to calculate one or more permeability components based at least in part on the permeability data and the inverted resistivity parameters; and

a display device for generating a visualization of the one or more permeability components.

13. The system of claim 12, wherein the inversion module is further configured to calculate inverted transverse isotropy (TI) parameters by performing an iterative inversion operation on the MCI data using a TI formation model that represents simulated formation resistivity characteristics that account for transverse formation isotropy to resistivity.

14. The system of claim 12, wherein the inversion module is further configured to calculate inverted biaxial anisotropy (BA) parameters by performing an iterative inversion operation on the MCI data using a BA formation model that represents simulated formation resistivity characteristics that account for transverse biaxial formation anisotropy to resistivity.

15. The system of claim 12, wherein the permeability determination module is further configured to determine a resistivity anisotropy ratio based at least in part on the inverted resistivity parameters and a permeability anisotropy ratio based at least in part on the formation resistivity anisotropy.

16. The system of claim 15, wherein the permeability determination module determines the one or more permeability components based at least in part on a permeability-resistivity relationship between the resistivity anisotropy ratio and the permeability anisotropy ratio.

17. The system of claim 12, wherein the permeability determination module is further configured to determine sand permeability in a laminated formation.

18. A computer readable storage medium having stored thereon instructions for causing a machine, in response to execution of the instructions by the machine, to perform operations comprising:

- accessing multicomponent induction (MCI) and permeability data captured by measurement tools in a borehole extending through a subsurface formation;

- determining inverted resistivity parameters by performing an iterative inversion operation on the MCI data;

- determining a resistivity anisotropy ratio based at least in part on the inverted resistivity parameters and a permeability anisotropy ratio based at least in part on the formation resistivity anisotropy;

- determining one or more permeability components based at least in part on the permeability data and permeability-resistivity relationship between the resistivity anisotropy ratio and the permeability anisotropy ratio; and

- generating a visualization of the one or more permeability components for display on a display device.


19. The computer readable storage medium of claim 18, wherein the instructions are executable to further perform operations comprising:

- determining horizontal and vertical permeabilities of a shale formation using a multi-component permeability model comprising isotropic sands and transversely isotropic shale.

20. The computer readable storage medium of claim 18, wherein the instructions are executable to further perform operations comprising:

determining sand permeability in a laminated formation using a bimodal permeability model.

1/16

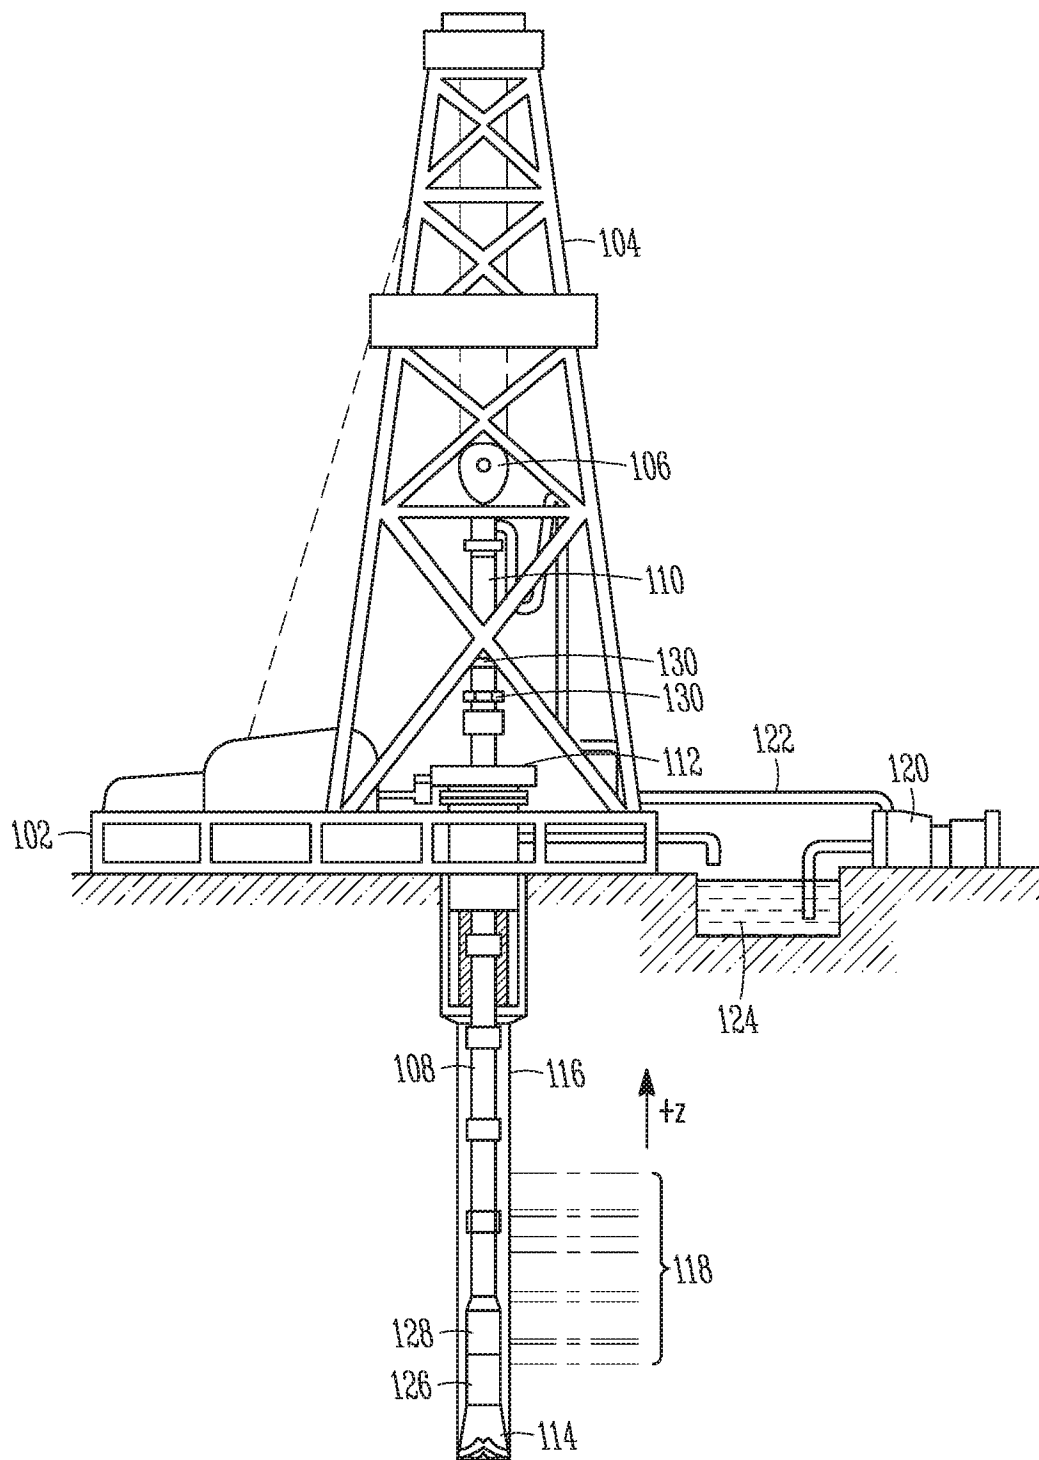**FIG. 1**

2/16

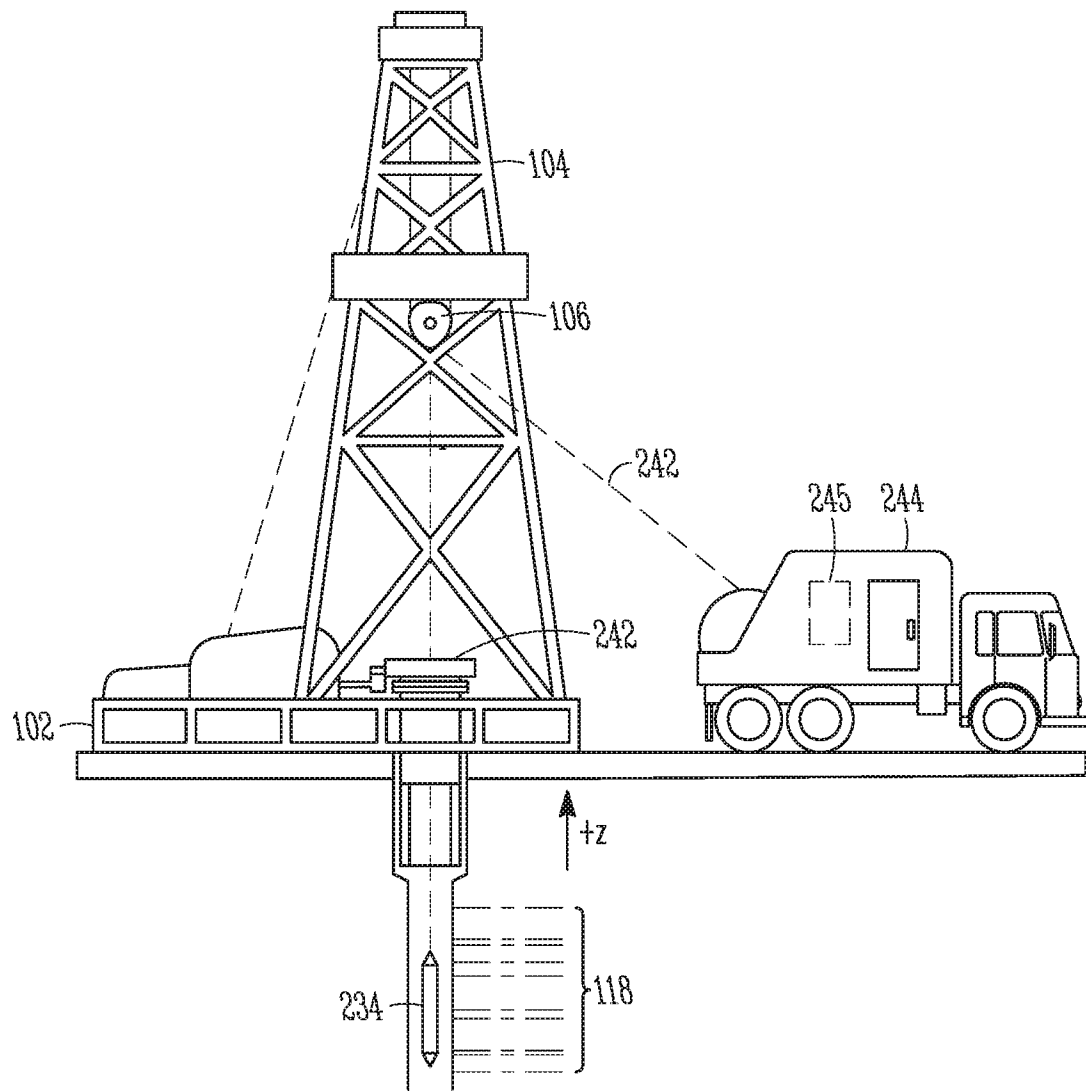


FIG. 2

3/16

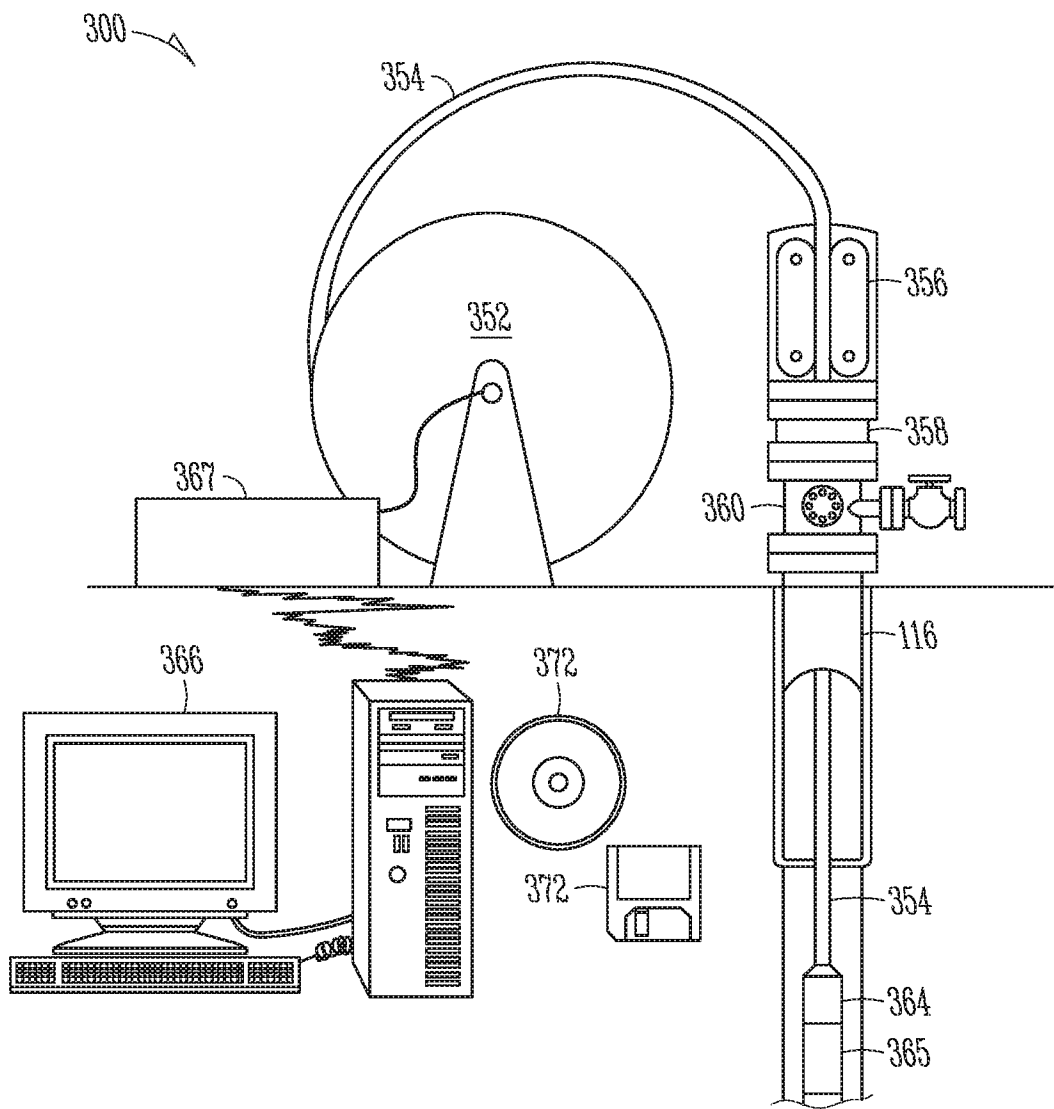


FIG. 3

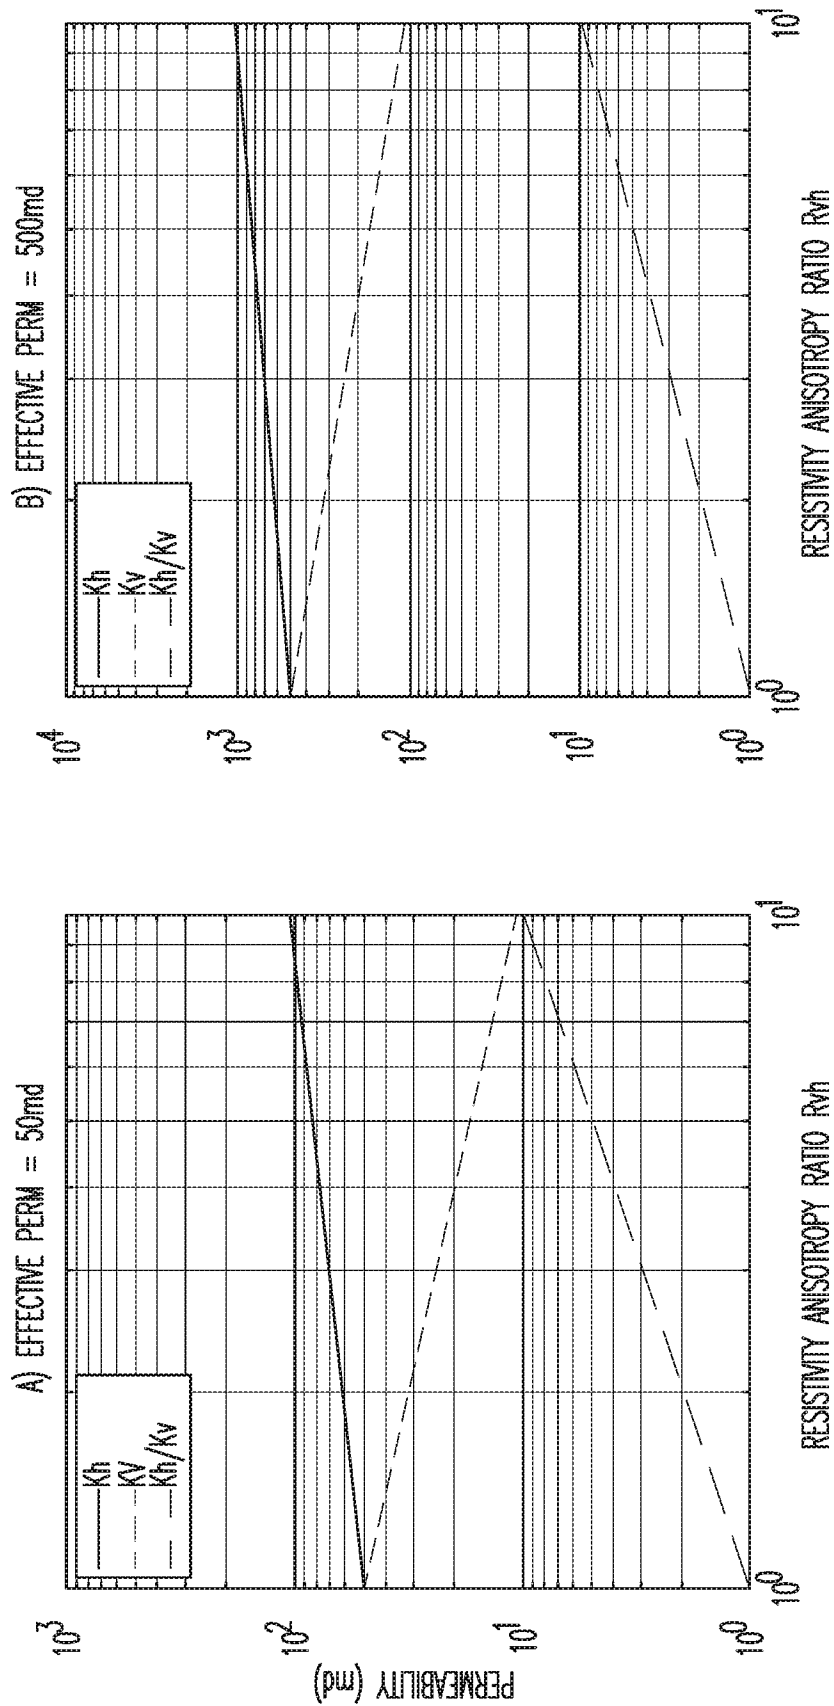


FIG. 4

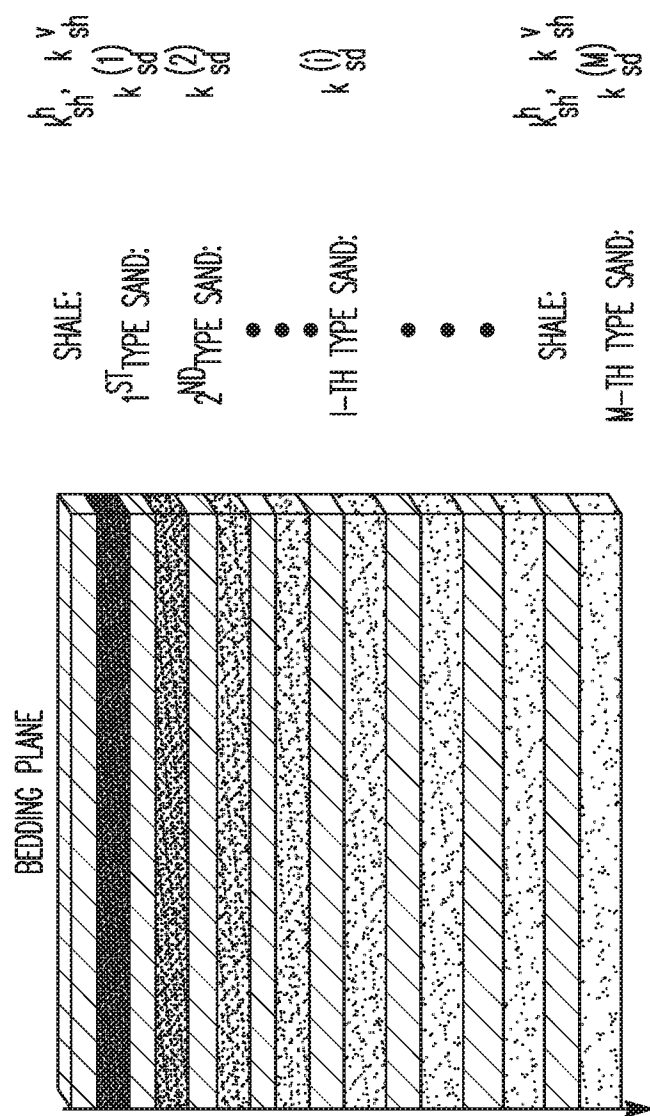


FIG. 5

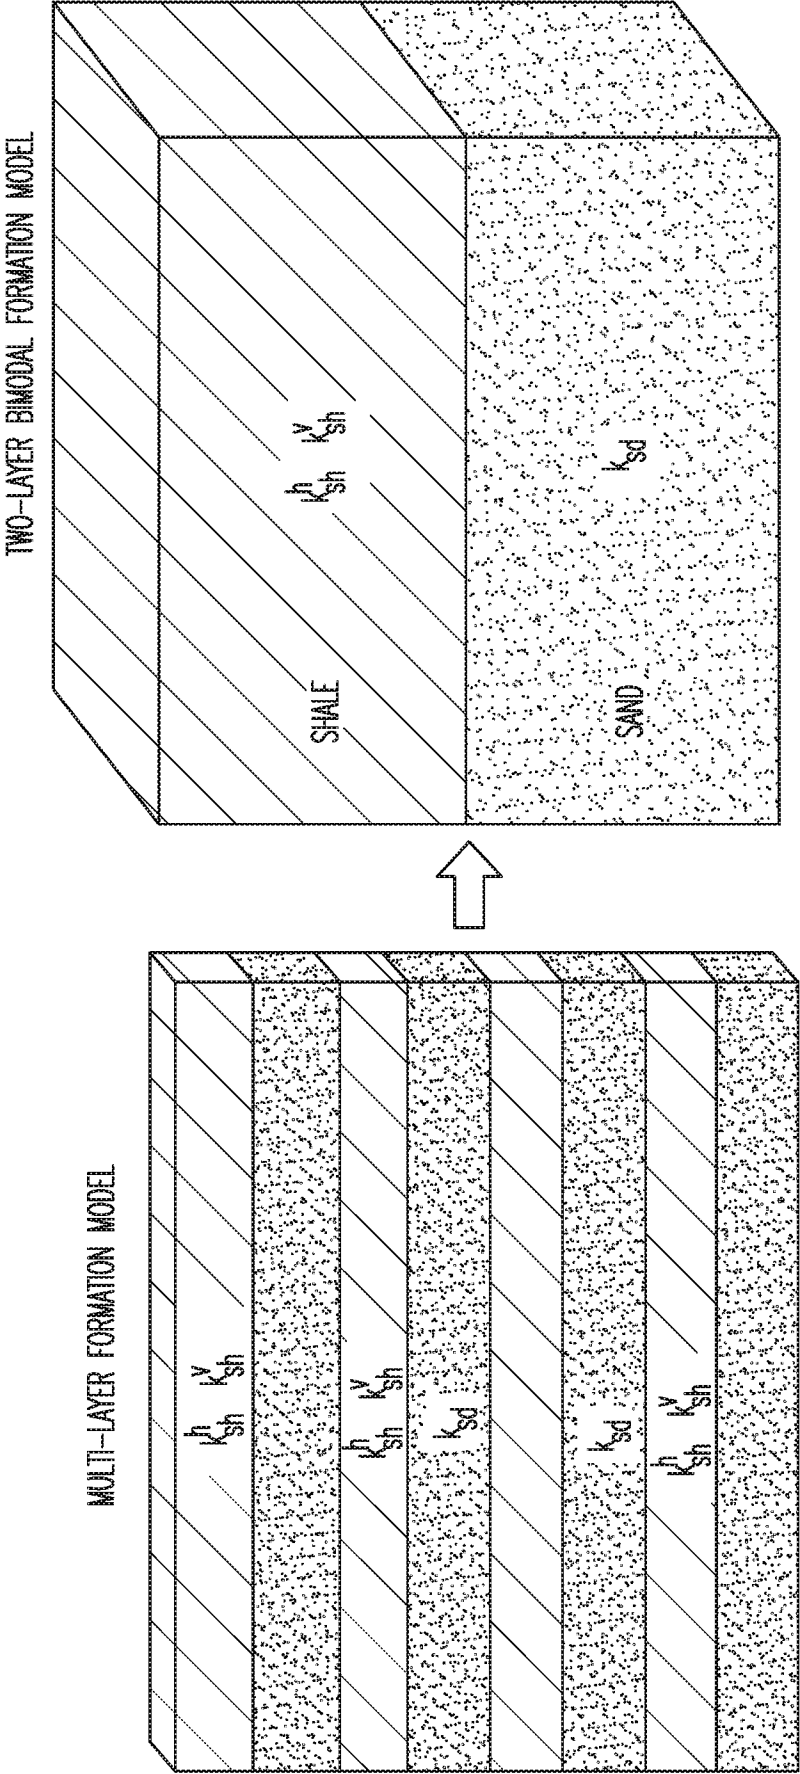


FIG. 6

7/16

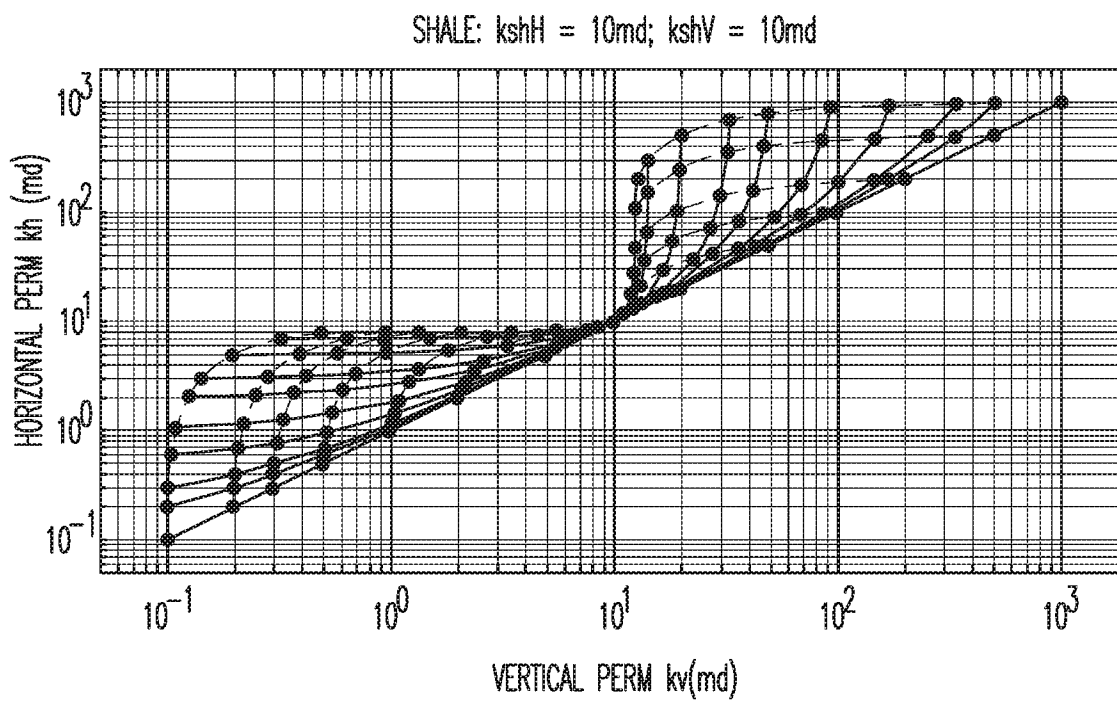


FIG. 7

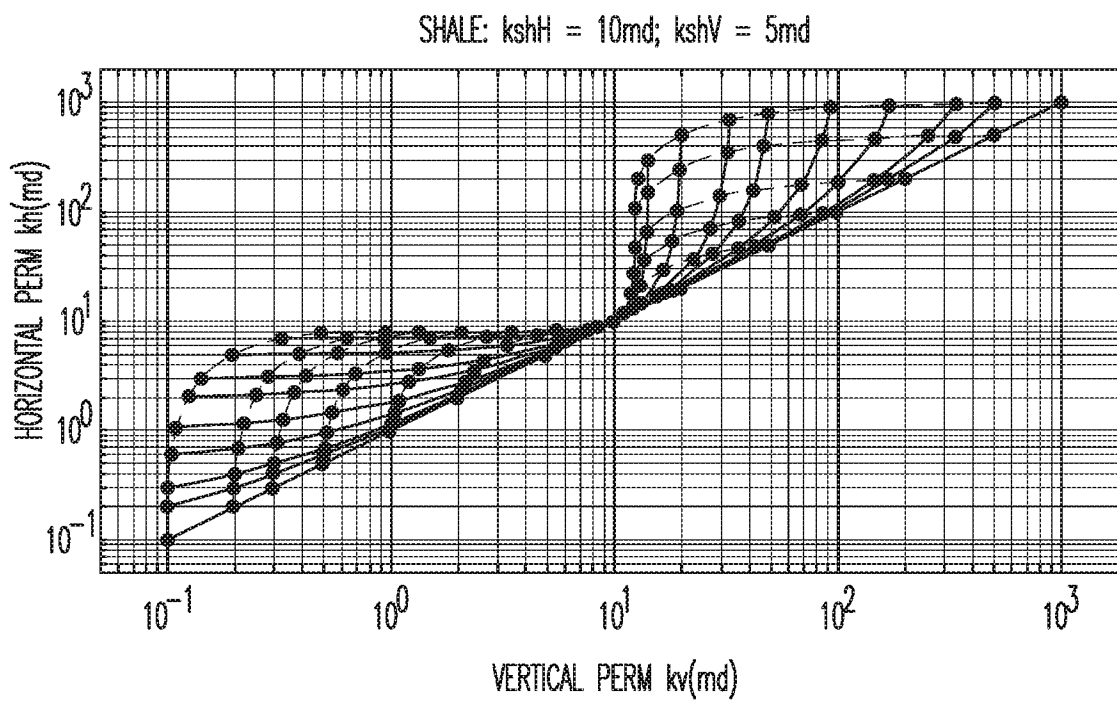


FIG. 8

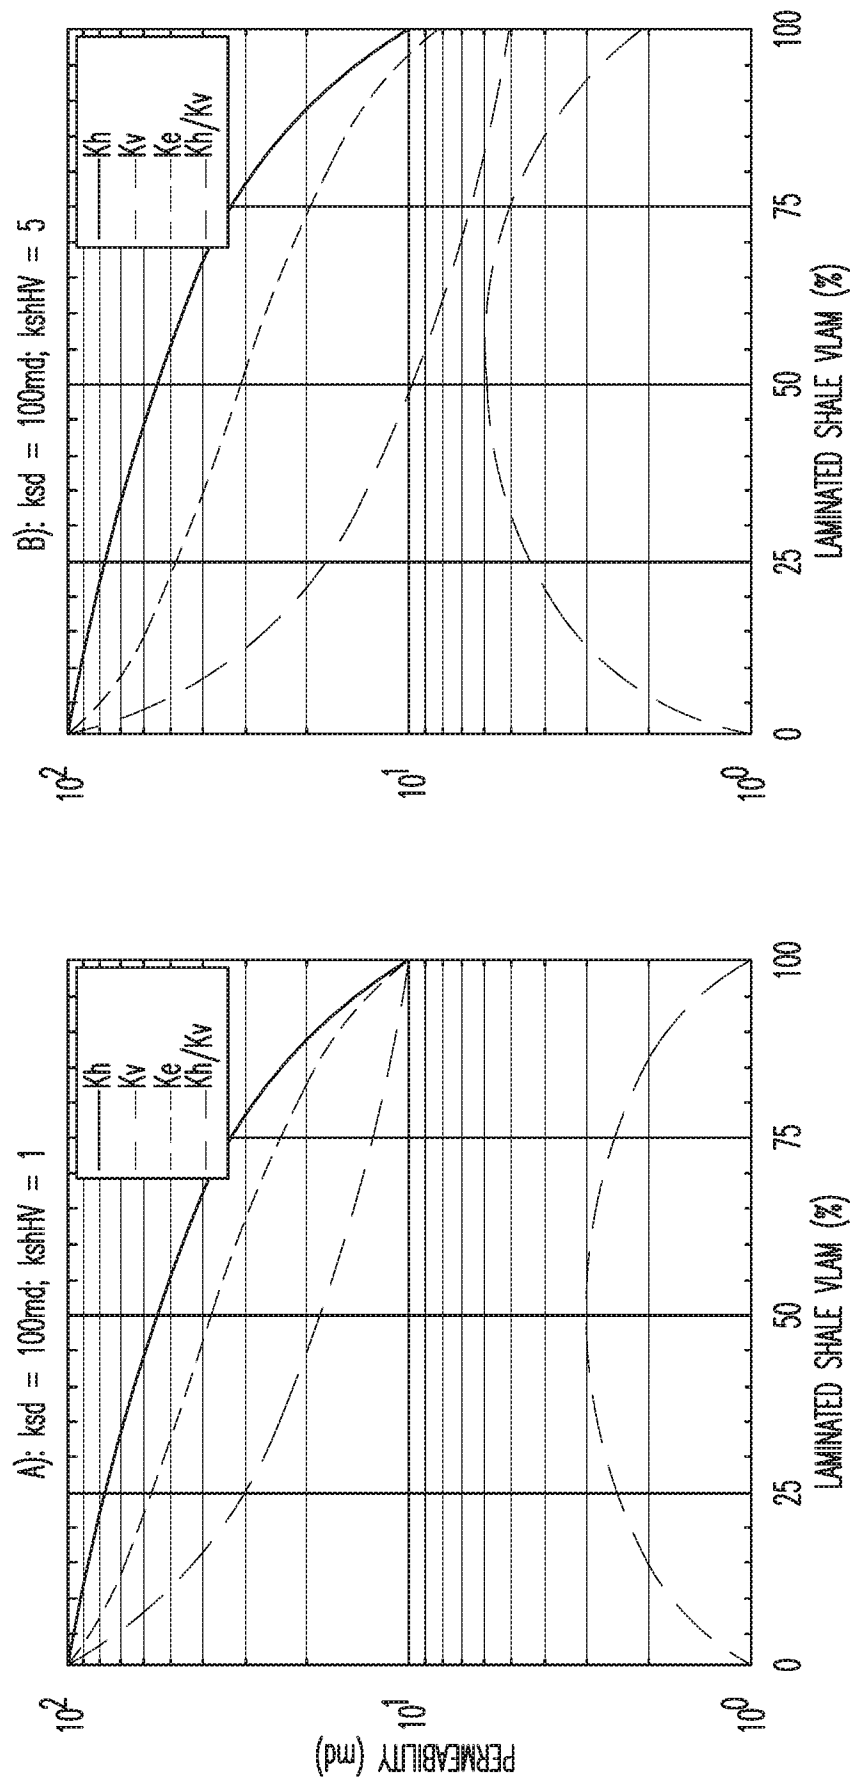
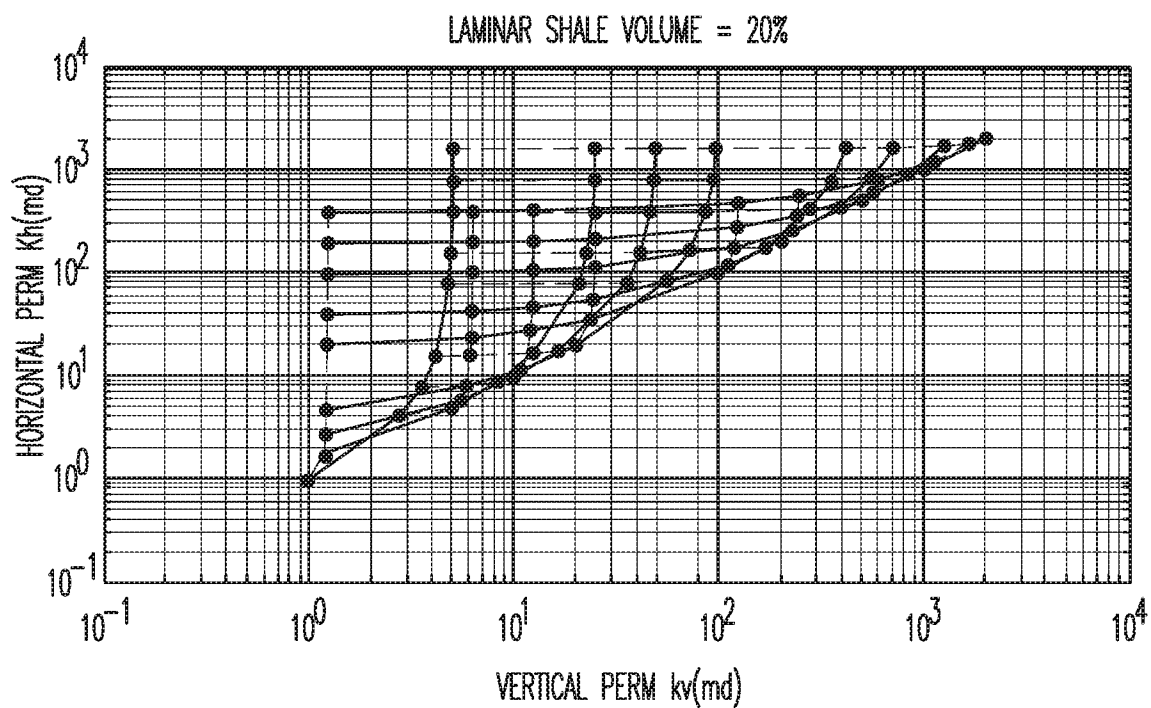
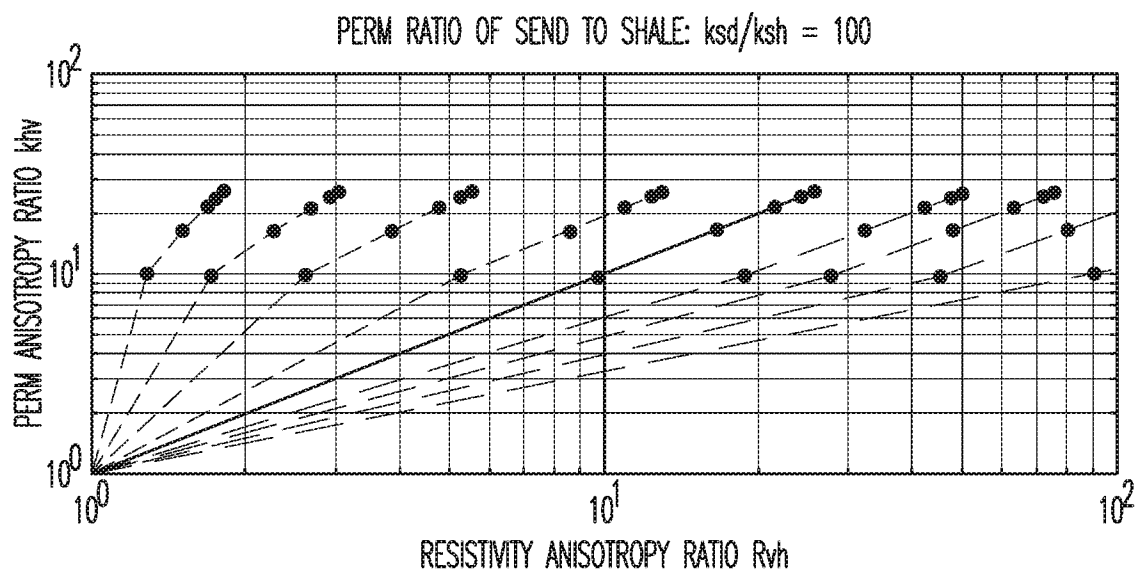


FIG. 9

9/16

**FIG. 10****FIG. 11**

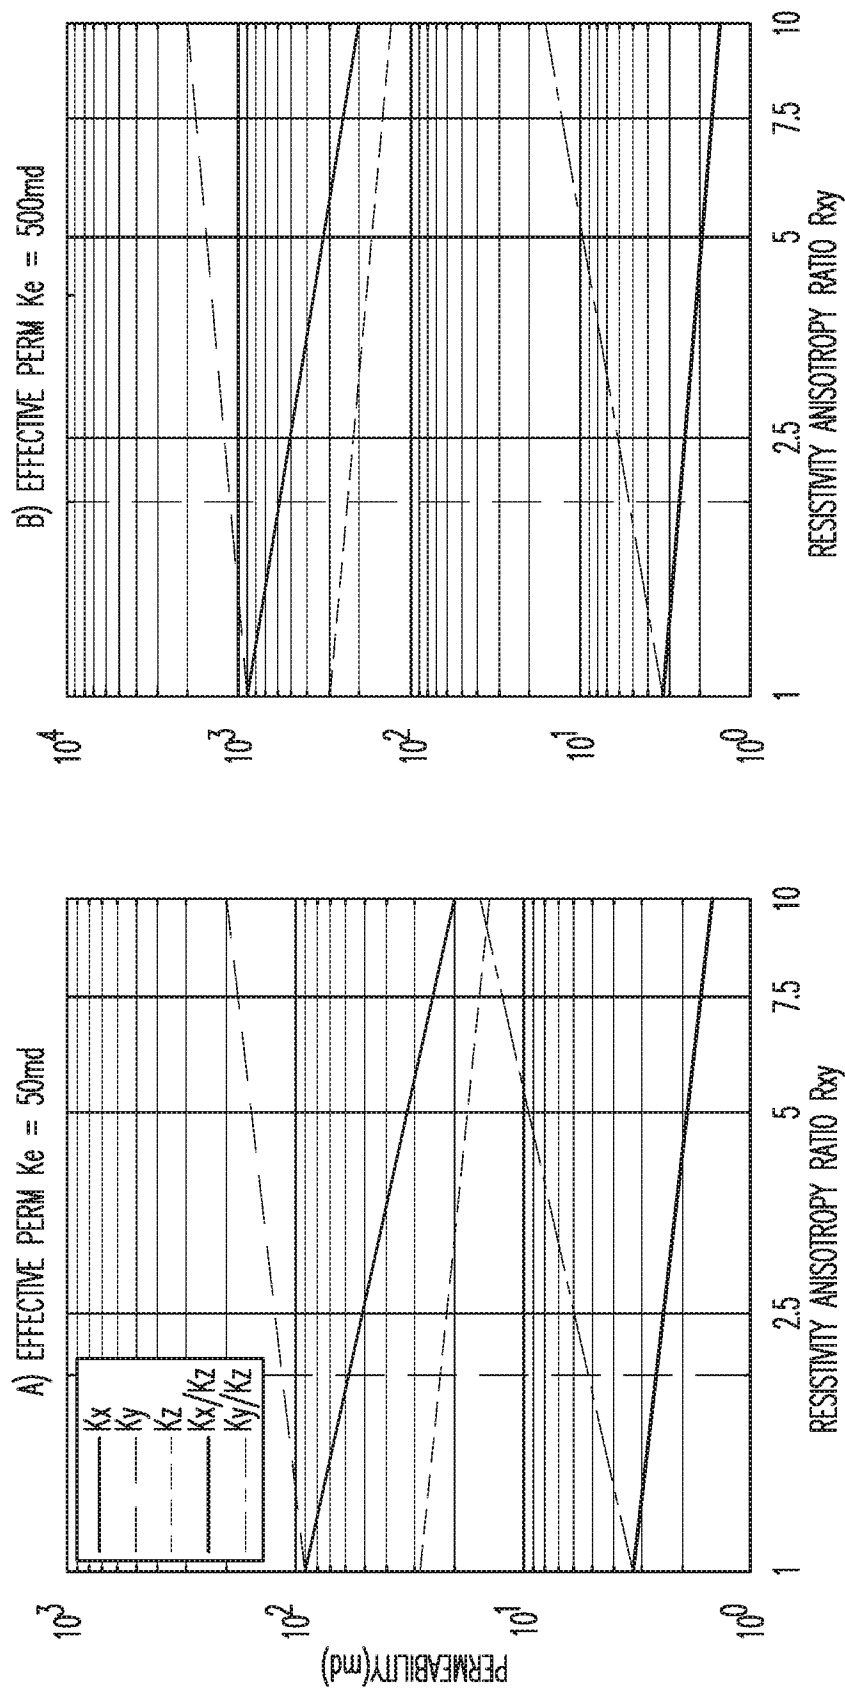
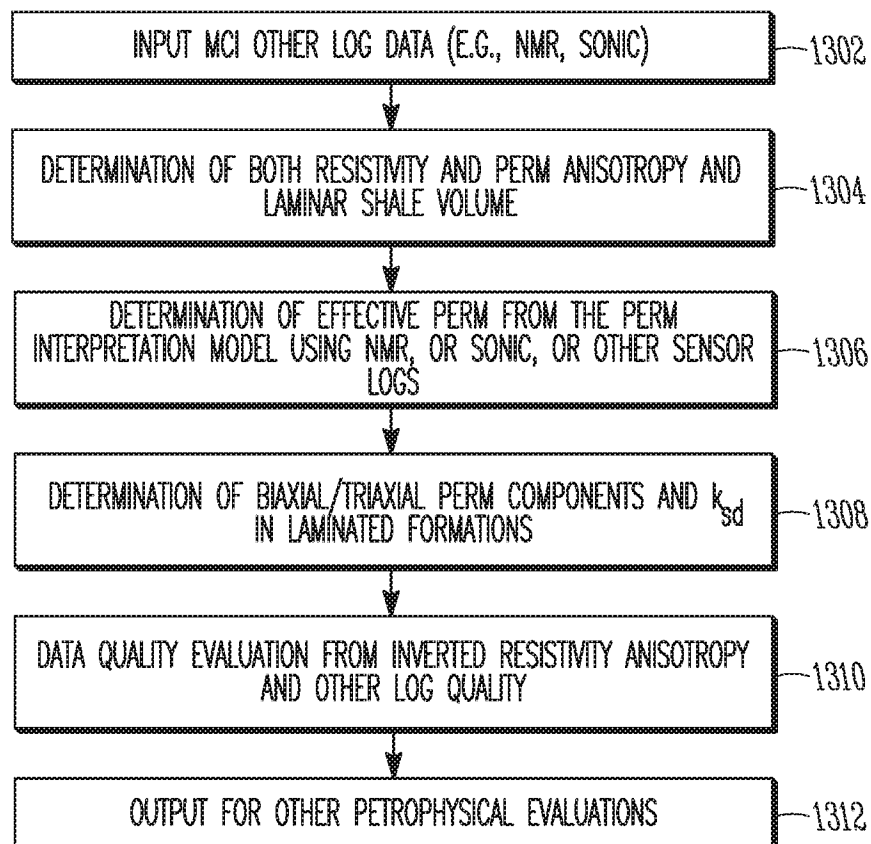


FIG. 12

11/16

1300

**FIG. 13**

12/16

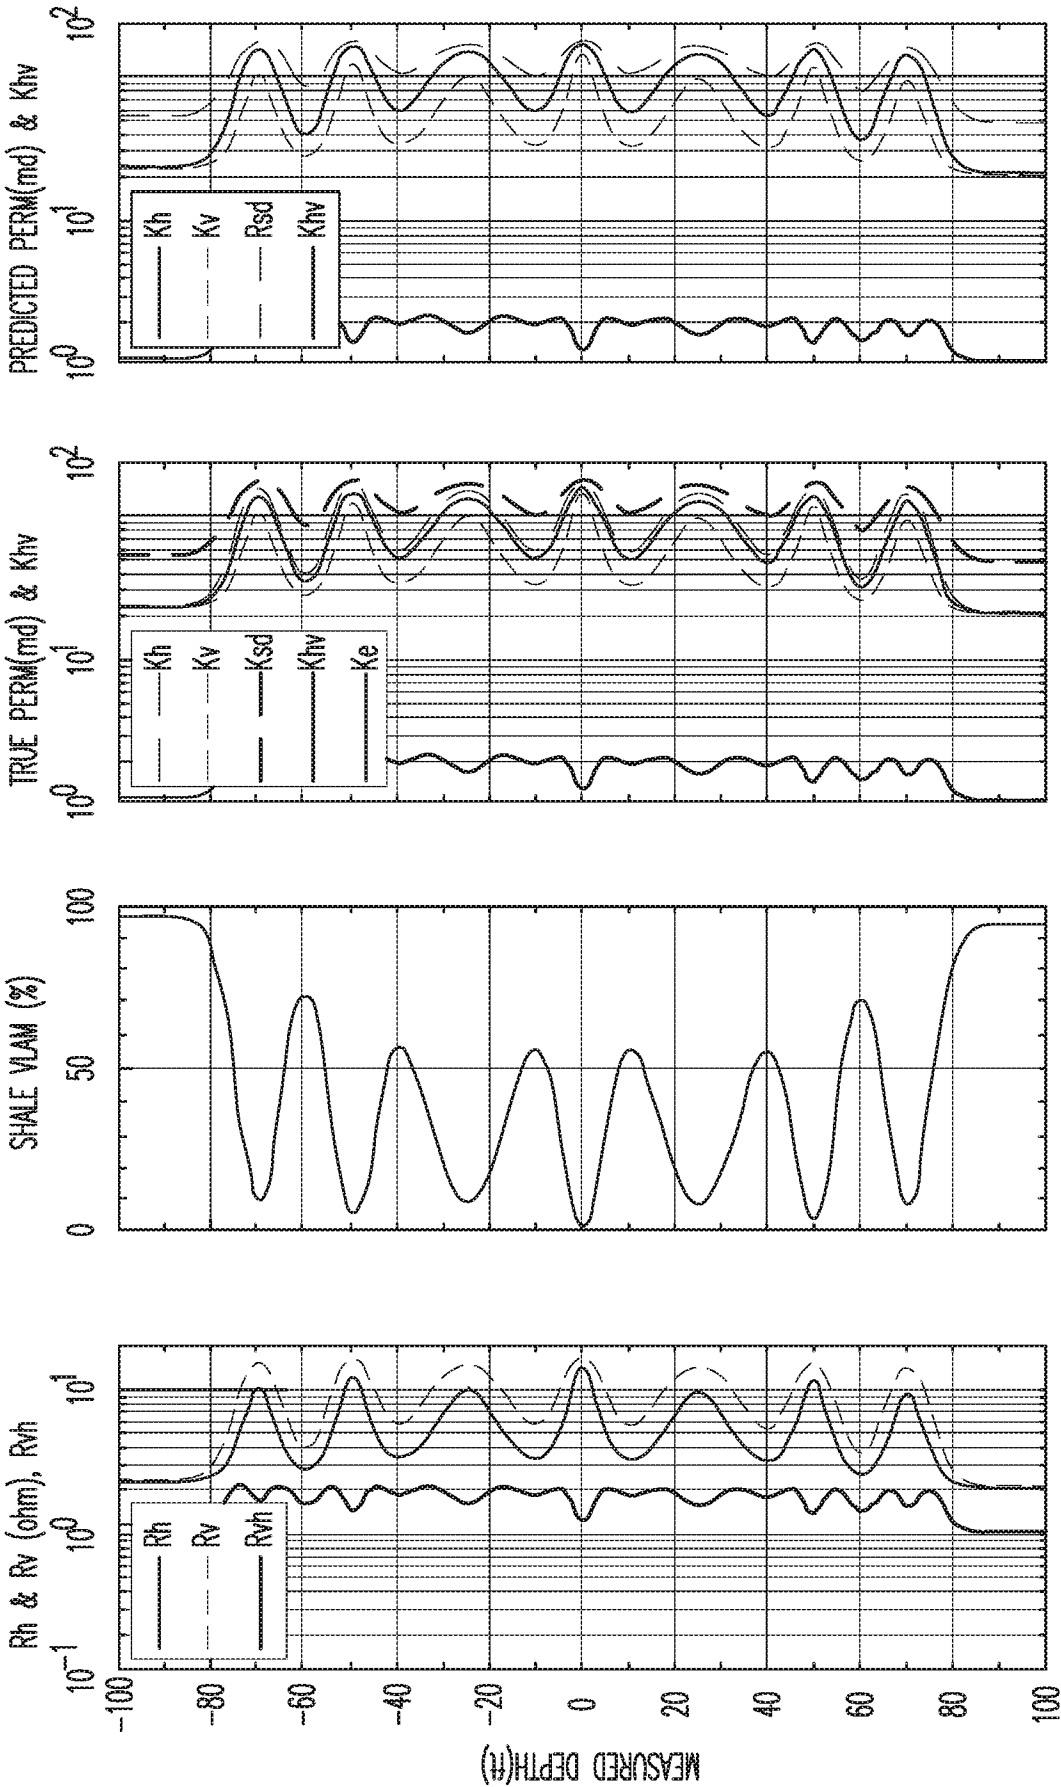


FIG. 14

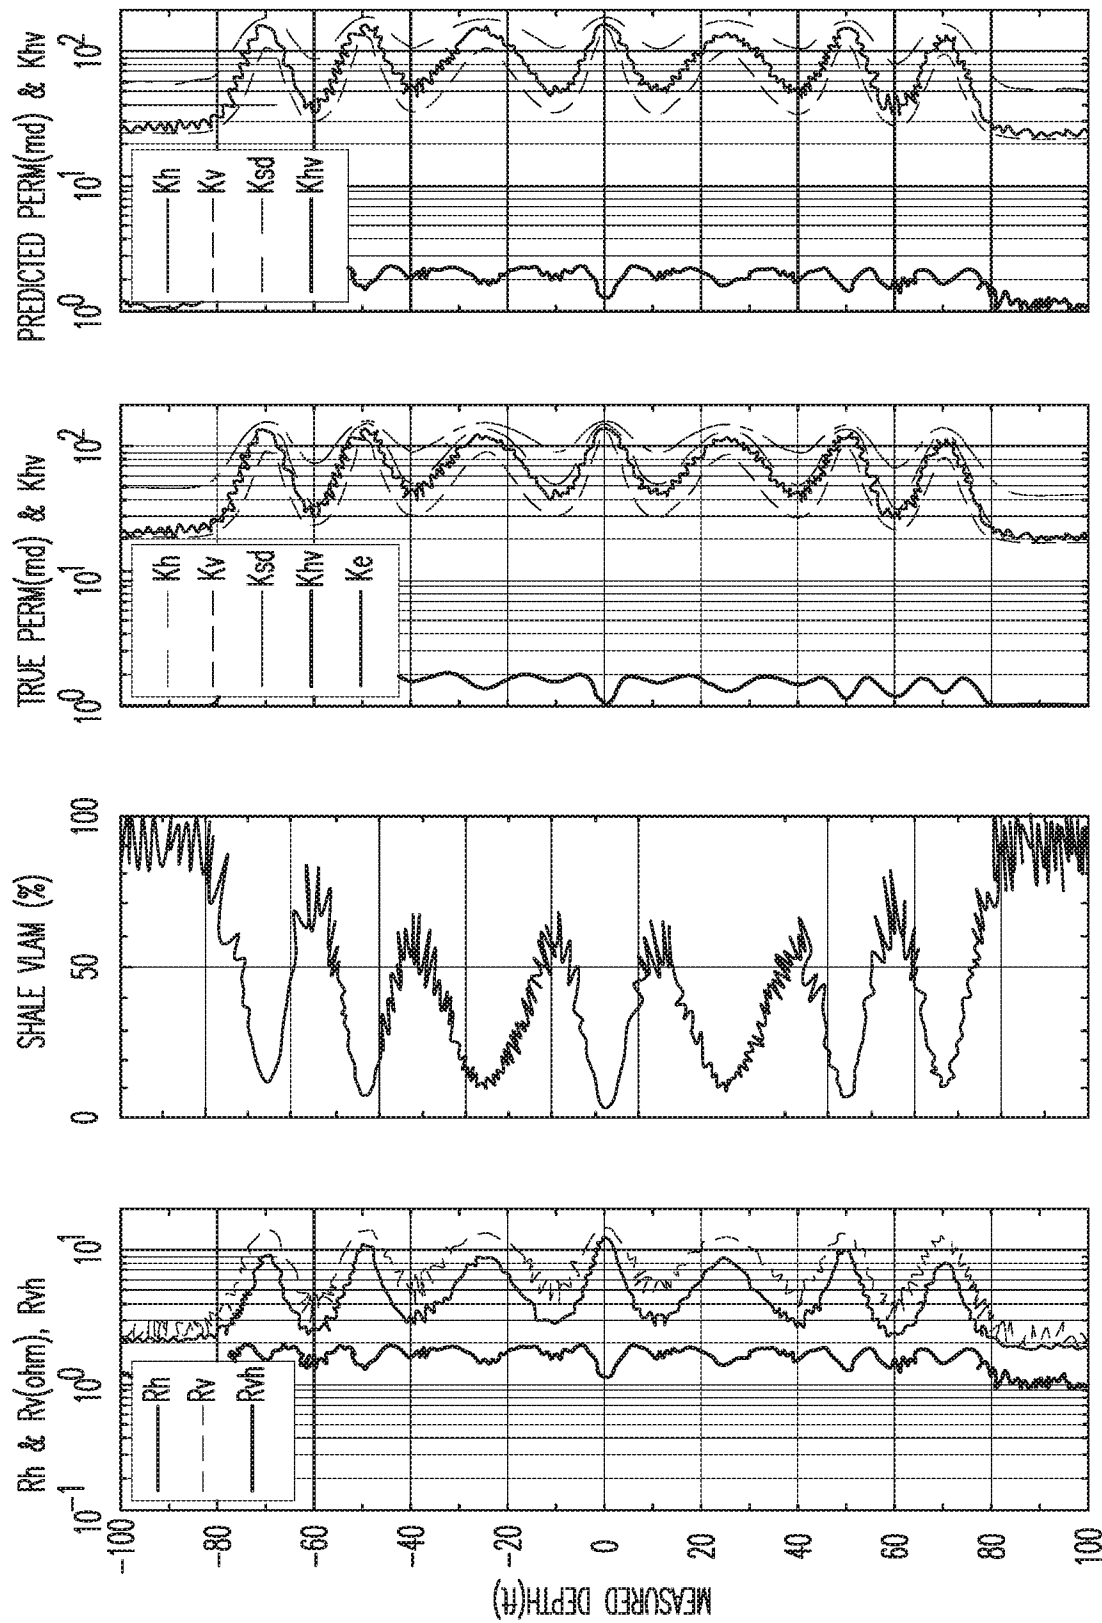


FIG. 15

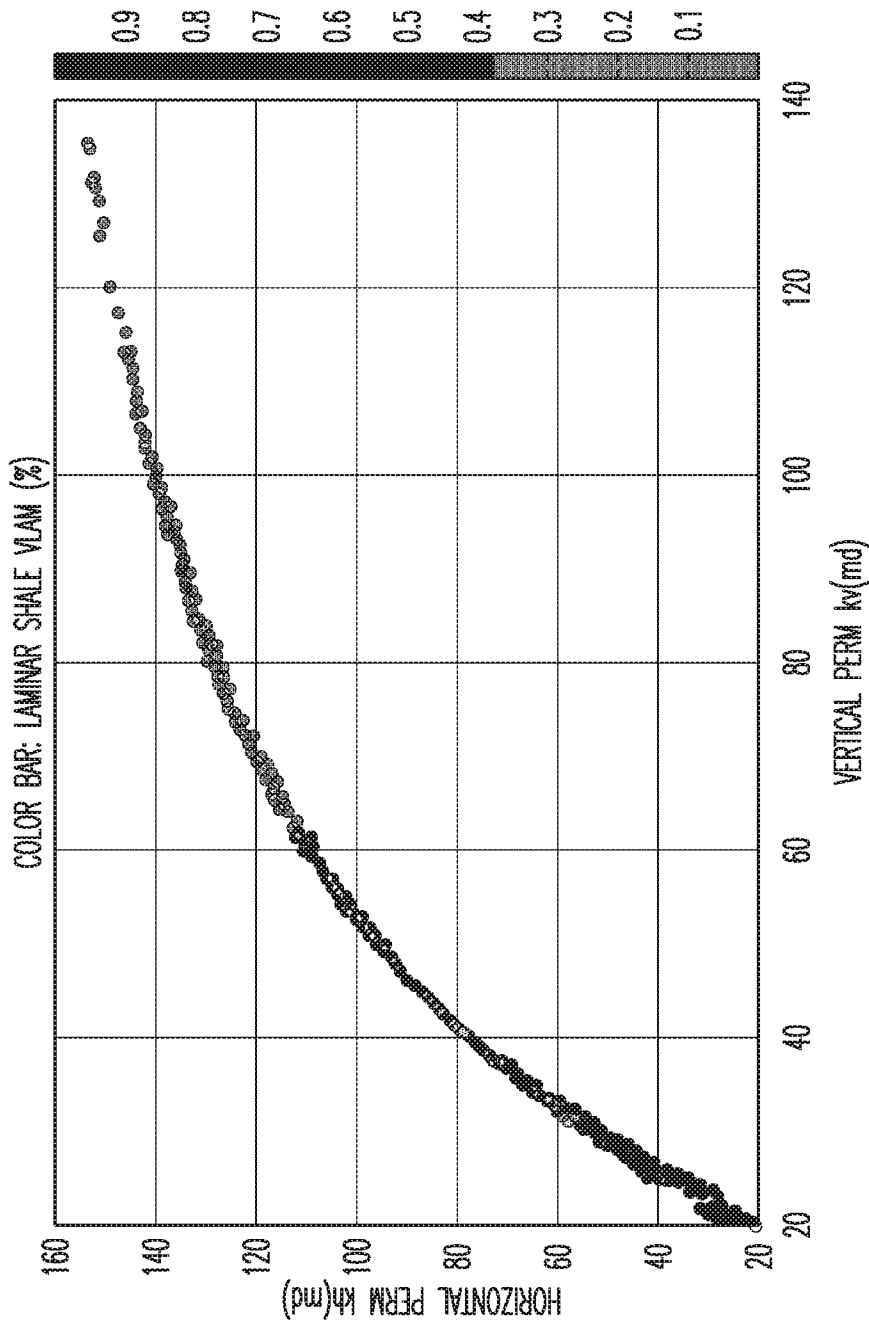


FIG. 16

15/16

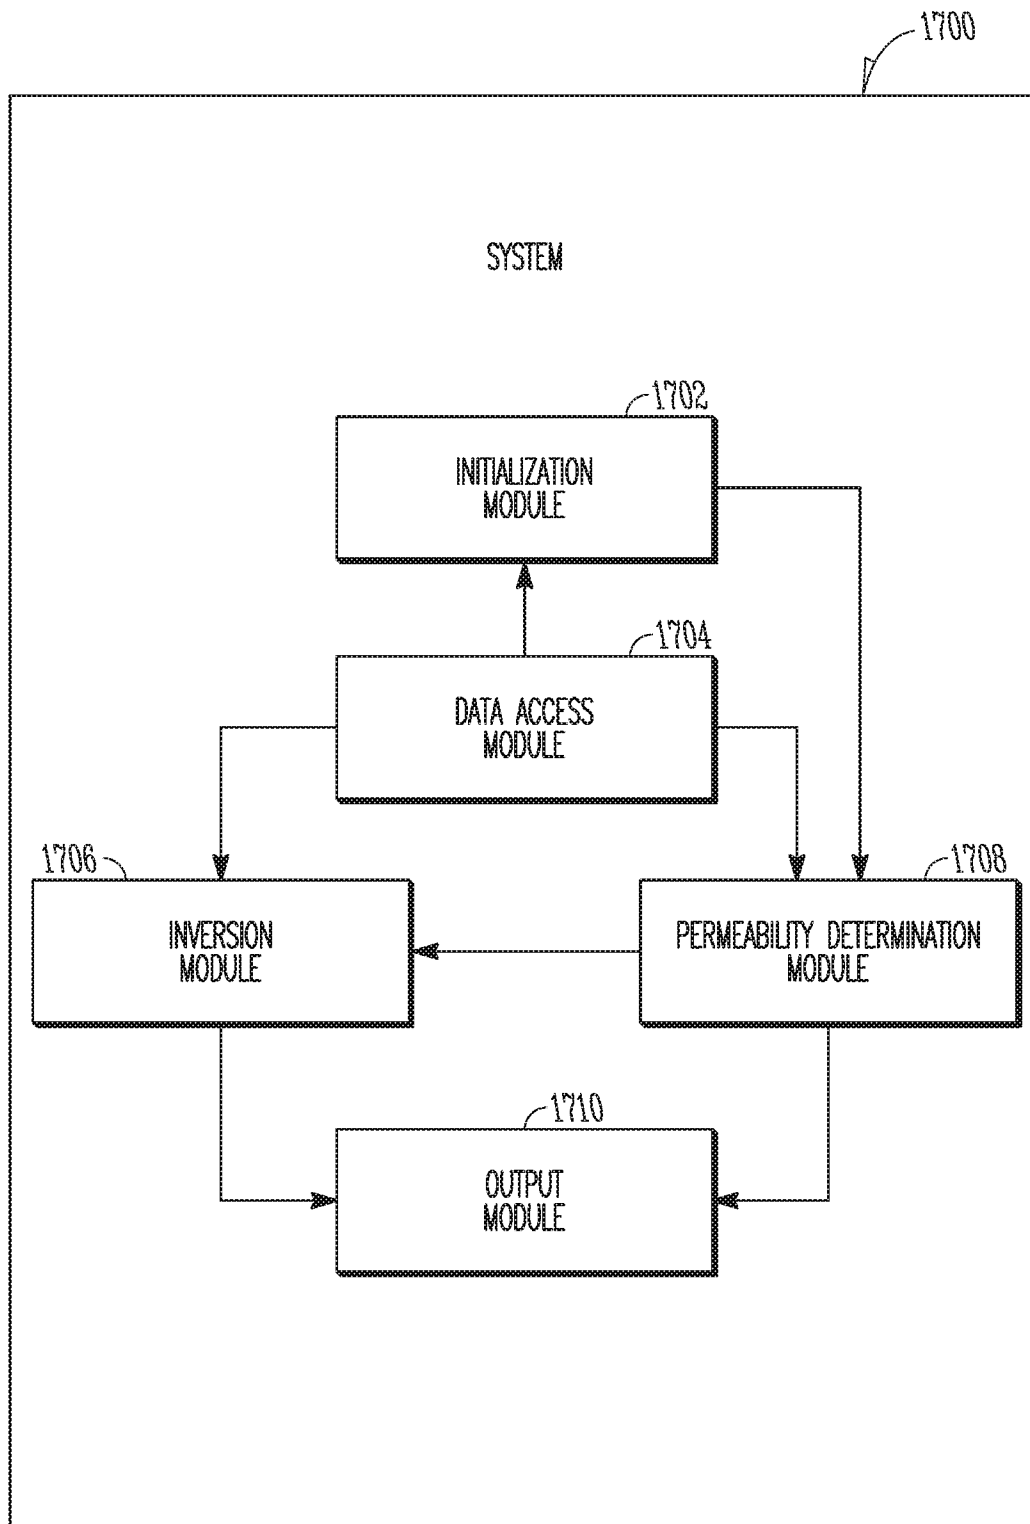


FIG. 17

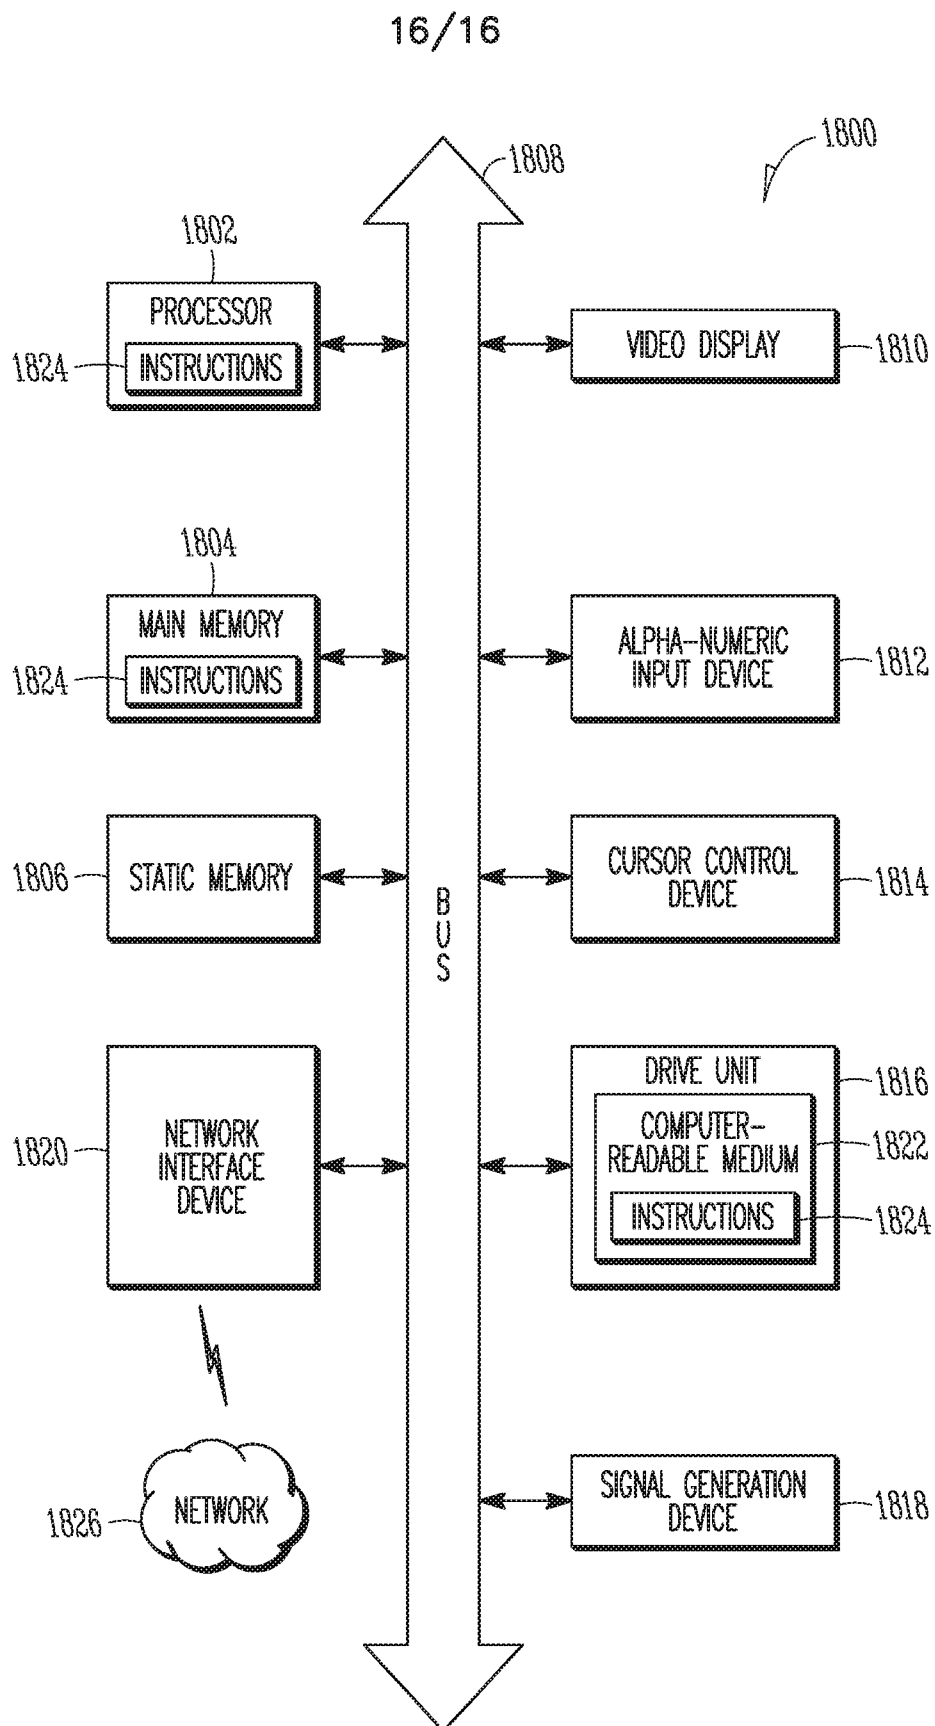


FIG. 18

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/014679**A. CLASSIFICATION OF SUBJECT MATTER****E21B 47/00(2006.01)i, G01V 3/18(2006.01)i, G01V 3/38(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 47/00; E21B 49/00; G01V 3/00; E21B 47/02; G01V 3/10; G06F 9/455; G01V 1/28; F21B 49/00; G01V 1/00; G01V 3/18; G01V 3/38

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: multicomponent induction, inverted resistivity parameter, resistivity anisotropy ratio, permeability anisotropy ratio, and permeability component

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2015-161282 A1 (HALLIBURTON ENERGY SERVICES, INC.) 22 October 2015 See claims 1, 3, 9, 17, 20 and figures 19-20.	12-14, 17
A		1-11, 15-16, 18-20
Y	US 7157915 B2 (SCHOEN et al.) 02 January 2007 See abstract, claims 1-7, and figures 4A-4B.	12-14, 17
A	US 2009-0145600 A1 (WU et al.) 11 June 2009 See abstract, claim 1, and figure 5.	1-20
A	US 5663499 A (SEMMELEBECK et al.) 02 September 1997 See claim 9 and figures 2-5.	1-20
A	WO 2015-051300 A1 (HALLIBURTON ENERGY SERVICES, INC.) 09 April 2015 See claims 1, 4, 12, 20 and figure 12.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 September 2016 (12.09.2016)

Date of mailing of the international search report

12 September 2016 (12.09.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

HAN, JOONG SUB

Telephone No. +82-42-481-3578



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/014679

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015-161282 A1	22/10/2015	None	
US 7157915 B2	02/01/2007	CA 2420908 A1 CA 2420908 C EP 1328829 A1 EP 1328829 A4 NO 20030888 A NO 20030888 D0 US 2002-0101235 A1 US 2004-0140801 A1 US 6686736 B2 WO 02-18977 A1	07/03/2002 15/08/2006 23/07/2003 18/05/2011 24/04/2003 25/02/2003 01/08/2002 22/07/2004 03/02/2004 07/03/2002
US 2009-0145600 A1	11/06/2009	AU 2006-262684 A1 AU 2006-262684 B2 BR PI0611629 A2 CA 2612515 A1 CA 2612515 C EA 010969 B1 EA 200800122 A1 EP 1899748 A1 MX 2007016591 A MY 147558 A NO 20076356 A NO 20076356 B US 7830744 B2 WO 2007-001746 A1	04/01/2007 24/02/2011 31/05/2011 04/01/2007 18/12/2012 30/12/2008 30/06/2008 19/03/2008 04/03/2008 31/12/2012 14/03/2008 14/03/2008 09/11/2010 04/01/2007
US 5663499 A	02/09/1997	None	
WO 2015-051300 A1	09/04/2015	EP 2893136 A1 EP 2893136 A4	15/07/2015 18/11/2015