



(11) **EP 2 128 752 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
02.12.2009 Bulletin 2009/49

(51) Int Cl.:
G06F 3/048 ^(2006.01) **H04M 1/247** ^(2006.01)
H04Q 7/38 ^(0000.00)

(21) Application number: **08702932.8**

(86) International application number:
PCT/JP2008/050051

(22) Date of filing: **08.01.2008**

(87) International publication number:
WO 2008/087871 (24.07.2008 Gazette 2008/30)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

(72) Inventor: **TANAKA, Hideaki**
Tokyo 108-8001 (JP)

(30) Priority: **15.01.2007 JP 2007005552**


(74) Representative: **Glawe, Delfs, Moll**
Patent- und Rechtsanwälte
Postfach 26 01 62
80058 München (DE)

(71) Applicant: **NEC Corporation**
Minato-ku
Tokyo 108-8001 (JP)

(54) **PORTABLE COMMUNICATION TERMINAL, BROWSING METHOD, AND BROWSING PROGRAM**

(57) A browsing method capable of performing mutual switching between in-site browsing and in-screen browsing without making a user aware of the switching is provided. Control means causes superimposed display of a web page and a pointer that moves according to operations on a pointing device 3 and a cross key 4 on a display 2 in the in-screen browsing, and changes a region of the web page to be displayed on the display 2 when the pointer moves outside the region. The control means changes the region of the web page to be displayed on the display 2 according to the operations performed on the pointing device 3 and the cross key 4 in the in-site browsing. Then, the control means causes transition from the in-screen browsing to the in-site browsing, and causes transition from the in-site browsing to the in-screen browsing.

FIG. 1

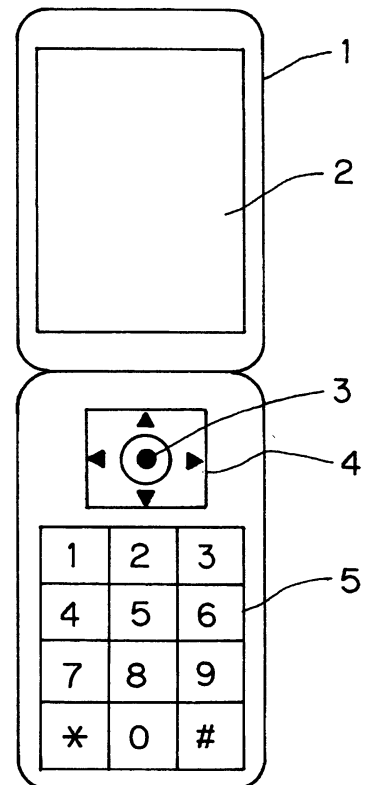

Description

TECHNICAL FIELD

(Reference to Related application)

[0001] This application is based upon and claims the benefit of the priority of Japanese patent application No.2007-005552, filed on January 15, 2007, the disclosure of which is incorporated herein in its entirety by reference thereto.

The present invention relates to a portable communication terminal including display means for displaying an image and a text, a web browsing method, and a web browsing program.

BACKGROUND ART

[0002] Among conventional methods of changing (moving) a region of an image or the like to be displayed on the screen of a cellular phone, there is a method of performing superimposed display of the image or the like and a pointer on the screen of the cellular phone and moving (scrolling) every line of a portion of an image or the like to be displayed on the screen, at a timing when the pointer moves outside the screen (hereinafter described as in-screen browsing).

[0003] Further, there is a method of moving (scrolling) every line of the portion of the image or the like to be displayed on the screen, according to operations performed on a pointing device and a cross key provided at the cellular phone (hereinafter described as in-site browsing).

[0004] Each of Patent Documents 1 and 2 describes a cellular phone including a pointing device.

[Patent Document 1]

[0005]

JP Patent Kokai Publication No. JP-P2004-312476A (paragraphs 0015 to 0047, Fig. 1)

[Patent Document 2]

[0006]

JP Patent Kokai Publication No. JP-P2003-308168A (paragraphs 0011 to 0061, Fig. 1)

DISCLOSURE OF THE INVENTION

PROBLEMS TO BE SOLVED BY THE INVENTION

[0007] The entire disclosure of Patent Documents 1 and 2 described above is incorporated herein by reference thereto.

In the in-screen browsing, an operation of anchoring to

a link is readily performed. However, there is a problem that the region to be displayed cannot be smoothly moved outside the screen. The link is referred to as a scheme that mutually connects web pages, text files, image data, and speech data inside documents. An anchor is an element (tag) set for a hyperlink (simply referred to as the link as well) in an HTML (Hyper Text Markup Language).

[0008] In the in-site browsing, the screen can be smoothly moved when the Neropointer (trade mark) is used, for example. However, there is a problem that a displayed item such as the anchor is difficult to point (select).

[0009] Accordingly, an object of the present invention is to provide a portable communication terminal, a browsing method, and a browsing program capable of mutually performing switching between in-site browsing and in-screen browsing without making a user aware of the switching.

MEANS TO SOLVE THE PROBLEMS

[0010] According to a first aspect of the present invention, there is provided a portable communication terminal including display means for displaying information targeted for browsing (such as a web page) on a screen thereof. The portable communication terminal includes:

instruction means for instructing a region of the information targeted for browsing to be displayed on the display means according to an operation performed by a user; and

control means for causing the region of the information targeted for browsing corresponding to the operation performed on the instruction means to be displayed on the display means. The control means causes, in a first state, superimposed display of the information targeted for browsing and a pointer that moves according to the operation performed on the instruction means on the display means and changes the region of the information targeted for browsing to be displayed on the display means when the pointer moves outside the region. The control means changes, in a second state, the region of the information targeted for browsing to be displayed on the display means according to the operation performed on the instruction means. Further, the control means includes state transition means for causing transition from the first state to the second state and causing transition from the second state to the first state.

[0011] The control means may change the region of the information targeted for browsing to be displayed on the display means when the pointer moves outside the region in the first state. The state transition means may cause transition to the second state when the pointer moves outside the region in the first state.

[0012] The state transition means may cause transition to the first state when the operation performed on

the instruction means is finished in the second state.

[0013] According to a second aspect of the present invention, there is provided a browsing method of displaying information targeted for browsing on a screen of display means according to an operation performed on instruction means by a user. The method includes a control step of displaying on the display means a region of the information targeted for browsing corresponding to the operation performed on the instruction means. In a first state of the control step, superimposed display of the information targeted for browsing and a pointer that moves according to the operation performed on the display means is made on the display means, and the region of the information targeted for browsing to be displayed on the display means is changed when the pointer moves outside the region. In a second state of the control step, the region of the information to be displayed on the display means is changed, according to the operation performed on the instruction means. The method further includes a transition step of changing the region of the information targeted for browsing to be displayed on the display means when the pointer moves outside the region in the first state, thereby causing transition to the second state, and causing transition to the first state when the operation performed on the instruction means is finished in the second state.

[0014] According to a third aspect of the present invention, there is provided a browsing program installed in a portable communication terminal including display means for displaying information targeted for browsing on a screen thereof. The browsing program causes a computer to execute a control process that causes a region of the information targeted for browsing corresponding to an operation performed on instruction means by a user to be displayed on the display means. In a first state of the control process, superimposed display of the information targeted for browsing and a pointer that moves according to the operation performed on the instruction means is made on the display means, and the region of the information targeted for browsing to be displayed on the display means is changed when the pointer moves outside the region. In a second state of the control process, the region of the information targeted for browsing to be displayed on the display means is changed according to the operation performed on the instruction means.

[0015] The program may cause the computer to execute the control process so that when the pointer moves outside the region in the first state, the region of the information to be displayed on the display means is changed, thereby causing transition to the second state, and when the operation performed on the instruction means is finished in the second state, transition to the first state is caused.

[0016] According to a fourth aspect of the present invention, there is provided a portable terminal capable of performing switching when information targeted for browsing that cannot be held in a display region is displayed. The switching is performed between:

a first browsing mode in which, when a pointer operated by a user moves outside the display region, a location of the display region of the information targeted for browsing is moved; and
a second browsing mode in which the location of the display region of the information targeted for browsing is moved according to an operation amount of the user.

[0017] According to a fifth aspect of the present invention, there is provided a browsing program installed in a portable terminal and executed by a computer. When information targeted for browsing and having a size that cannot be held in a display region of the portable terminal is displayed, the browsing program implements a function of performing switching. The switching is performed between:

a first browsing mode in which, when a pointer operated by a user is moved outside the display region, a location of the display region of the information targeted for browsing is moved; and
a second browsing mode in which the display region is moved according to an operation amount of the user.

EFFECT OF THE INVENTION

[0018] According to the present invention, mutual transition between the first state (in-screen browsing) and the second state (in-site browsing) is made. In the first state, the region to be displayed on the display means is changed when the pointer moves outside the region. In the second state, the region to be displayed on the display means is changed according to the operation on the instruction means. In the first state, an operation of readily anchoring to a link can be performed. In the second state, the screen can be smoothly moved.

[0019] The state transition means causes transition to the second state when the pointer moves outside the region in the first state. Further, when the operation performed on the instruction means is finished in the second state, the state transition means causes transition to the first state. Thus, the in-site browsing and the in-screen browsing can be mutually switched, without making the user aware of the switching.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020]

Fig. 1 is an explanatory diagram showing an outward appearance of a cellular phone that displays information targeted for browsing by a browsing method according to the present invention;
Figs. 2A to 2D are explanatory diagrams showing a case where a region to be displayed on a screen is changed (moved) by in-screen browsing;

Figs. 3A to 3D are explanatory diagrams showing a case where the region to be displayed on the screen is changed (moved) by in-site browsing;

Fig. 4 is a flowchart explaining an operation of switching a method of changing (moving) a region to be displayed on the screen;

Figs. 5A to 5D are explanatory diagrams showing an operation of switching the method of changing (moving) the region to be displayed on the screen from the in-screen browsing to the in-site browsing;

Figs. 6A to 6D are explanatory diagrams showing an operation of switching the method of changing (moving) the region to be displayed on the screen from the in-site browsing to the in-screen browsing;

Figs. 7A and 7B are explanatory diagrams showing an operation of anchoring to a link in the in-screen browsing; and

Figs. 8A and 8B are explanatory diagrams showing an operation of anchoring to the link in the in-site browsing.

EXPLANATIONS OF SYMBOLS

[0021]

- 1 cellular phone
- 2 display
- 3 pointing device
- 4 cross key
- 5 dial keys

PREFERRED MODES FOR CARRYING OUT THE INVENTION

[0022] An exemplary embodiment of a browsing method according to the present invention will be described with reference to drawings. Fig. 1 is an explanatory diagram showing an outward appearance of a cellular phone 1 including display means capable of displaying information (such as an image) targeted for browsing by the browsing method according to the present invention. In the following description, a case where a web page is displayed will be used as an example. Accordingly, the browsing method will be referred to as a web browsing method.

[0023] The cellular phone (portable communication terminal) 1 shown in Fig. 1 includes a display (display means) 2, a pointing device 3, a cross key 4, and dial keys 5. Instruction means is implemented by the pointing device 3 and the cross key 4.

[0024] The display 2 is an LCD (Liquid Crystal Display) or the like, for example. The display 2 performs superimposed display of information (web page in this exemplary embodiment) and a pointer according to control of control means (not shown) included in the cellular phone 1. The display 2 is also referred to as a screen.

[0025] The pointing device 3 is a projecting portion (convex portion) provided at the cellular phone 1. The

pointing device 3 instructs movement of a region of the web page to be displayed on the screen or instructs movement of a pointer according to an operation of a user. The cross key 4 is constituted from buttons provided at the cellular phone 1. The cross key 4 instructs movement of the region of the web page to be displayed on the screen or instructs movement of the pointer according to an operation of the user. In the example in Fig. 1, the cross key 4 includes an "up button", a "down button", a "left button", and a "right button".

[0026] Control means (state transition means) causes information (web page in this exemplary embodiment) to be displayed on the screen (display 2) according to operations performed on the pointing device 3 and the cross key 4 by the user. Further, the control means changes a position at which the pointer is displayed according to the operations performed on the pointing device 3 and the cross key 4 by the user. Incidentally, the pointer is a character (such as a symbol in the form of an arrow) that is moved according to the operations performed on the pointing device 3 and the cross key 4 by the user.

[0027] According to the operation of the user, the pointing device 3 is slid or inclined in each direction of a surface of the cellular phone 1 where the pointing device 3 is provided. Then, the control means changes the position at which the pointer is displayed or changes the region of the web page to be displayed on the screen in the direction where the pointing device 3 is slid or inclined.

[0028] The dial keys 5 are buttons for supplying a telephone number or the like of a transmitting destination into the cellular phone 1.

[0029] The cellular phone 1 includes a web browsing program for causing a computer to execute a control process that displays a region of the web page on the display 2 corresponding to the operations performed on the pointing device 3 and the cross key 4. In a first state (in-screen browsing) of the control process, superimposed display of the web page and the pointer that moves according to the operations performed on the pointing device 3 and the cross key 4 is performed on the display 2. When the pointer moves outside the region, the region of the web page to be displayed on the display 2 is changed. In a second state (in-site browsing) of the control process, the region of the web page to be displayed on the display 2 is changed according to the operations performed on the pointing device 3 and the cross key 4.

[0030] Figs. 2A to 2D are explanatory diagrams showing a case where a region to be displayed on the screen is changed (moved) by the in-screen browsing.

[0031] As shown in Fig. 2A, the control means causes superimposed display of information within a predetermined range (within a window display frame) of the web page and the pointer on the window. In the example shown in Fig. 2A, the window display frame is indicated by oblique lines or the like.

[0032] When the user performs the operation that causes the pointing device 3 to slide to the right and depresses the right button included in the cross key 4, the

control means changes the position at which the pointer is displayed to the right, as shown in Fig. 2B.

[0033] When the user performs the operation that causes the pointing device 3 to slide downward and depresses the down button included in the cross key 4, the control means changes the position at which the pointer is displayed to the right, as shown in Fig. 2C.

[0034] Further, when the user performs the operation that causes the pointing device 3 to slide downward and depresses the down button included in the cross key 4 to move the pointer outside the predetermined range (outside the window display frame), the control means moves the region of the web page to be displayed on the screen downwards, as shown in Fig. 2D. That is, the window display frame is moved downward.

[0035] Figs. 3A to 3D are explanatory diagrams showing a case where the region to be displayed on the screen is changed (moved) by the in-site browsing.

[0036] As shown in Fig. 3A, the control means causes the information of the web page in the predetermined range (within the window display frame) to be displayed on the screen, as shown in Fig. 3A.

[0037] When the user performs the operation that causes the pointing device 3 to slide to the right and depresses the right button included in the cross key 4, the control means moves the region of the web page to be displayed on the screen to the right, as shown in Fig. 3B. That is, the window display frame is moved to the right.

[0038] When the user performs the operation that causes the pointing device 3 to slide downward or depresses the down button included in the cross key 4, the control means moves the region of the web page to be displayed on the screen downward, as shown in Fig. 3C. That is, the window display frame is moved downward.

[0039] Further, when the user performs the operation that causes the pointing device 3 to slide to the right or depresses the right button included in the cross key 4, the control means moves the region of the web page to be displayed on the screen to the right, as shown in Fig. 3D. That is, the window display frame is moved to the right.

[0040] Fig. 4 is a flowchart explaining an operation of switching a method of changing (moving) a region to be displayed on the screen.

Figs. 5A to 5D are an explanatory diagrams showing the operation of switching the method of changing (moving) the region to be displayed on the screen from the in-screen browsing to the in-site browsing. Figs. 6A to 6D are an explanatory diagrams showing the operation of switching the method of changing (moving) the region to be displayed on the screen from the in-site browsing to the in-screen browsing.

[0041] When the user performs the predetermined operations on the pointing device 3, cross key 4, dial keys 5, and the like for displaying the web page on the screen by the in-screen browsing (Y in step S101), the control means causes superimposed display of the information within the predetermined range (within the window display frame) on the web page and the pointer on the screen, as shown in Fig. 5A.

play frame) on the web page and the pointer on the screen, as shown in Fig. 5A.

[0042] When the user performs the operation that causes the pointing device 3 to slide to the right and depresses the right button included in the cross key 4 (Y in step S102), the control means moves the position where the pointer is displayed to the right, as shown in Fig. 5B (in step S104). When the user performs predetermined operations on the pointing device 3, cross key 4, dial keys 5, and the like for finishing display of the web page (Y in step S103), the control means finishes display of the web page.

[0043] When the pointer is moved outside the predetermined range (outside the window display frame) by performing the operation that causes the pointing device 3 to slide to the right and depressing the right button included in the cross key 4 by the user (Y in step S105), the control means performs switching from the in-screen browsing to the in-site browsing, as shown in Fig. 5C. Then, the control means moves the region of the web page to be displayed on the screen to the right, and causes superimposed display of an omni-directional pointer on the center of a window (in step S106). The omni-directional pointer is a pointer indicating the center of the window.

[0044] Further, when the user performs the operation that causes the pointing device 3 to slide to the lower right and depresses the right button and the down button included in the cross key 4 (Y in step S107), the control means moves the region of the web page to be displayed on the screen to the lower right, as shown in Fig. 5D (in step S109). When the user performs predetermined operations on the pointing device 3, cross key 4, dial keys 5, and the like for finishing display of the web page (Y in step S108), the control means finishes display of the web page.

[0045] When the user further performs the operation on the pointing device 3 and depresses one of the buttons included in the cross key 4 (N in step S110, Y in step S107, or N in step S108), the control means continues the in-site browsing, and moves the region of the web page to be displayed on the screen, as shown in Fig. 6A (in step S109).

[0046] When the operation on the pointing device 3 and depression of the button included in the cross key 4 are finished by the user (Y in step S110), the control means finishes superimposed display of the omni-directional pointer, as shown in Fig. 6B. Then, when the user performs the operation that causes the pointing device 3 to slide downward and depresses the down button included in the cross key 4, the control means performs switching from the in-site browsing to the in-screen browsing, and performs superimposed display of the pointer, as shown in Fig. 6C (in step S111).

[0047] Further, when the user performs the operation that causes the pointing device 3 to slide to the right and depresses the right button included in the cross key 4 (Y in step S102 and N in step S103), the control means

changes the position at which the pointer is displayed to the right, as shown in Fig. 6D (in step S104).

[0048] Next, an anchoring operation in each browsing will be described. Figs. 7A and 7B are an explanatory diagrams showing an operation of anchoring to a link in the in-screen browsing. As shown in Fig. 7A, the control means causes superimposed display of the information within the predetermined range (within the window display frame) of the web page and the pointer on the screen, thereby changing display of the link in the vicinity of the pointer on the web page. In the example shown in Fig. 7A, "600 type" is displayed in boldface type.

[0049] Then, when the user performs the operation that causes the pointing device 3 to slide to the lower left and depresses the left button and the down button included in the cross key 4, the control means changes the position at which the pointer is displayed to the right, thereby changing display of the link in the vicinity of the pointer on the web page, as shown in Fig. 7B. In the example in Fig. 7B, "900 type" is displayed in boldface type.

[0050] When a selecting operation such as depression of the pointing device 3 is performed by the user with link display changed, the control means performs an operation corresponding to content connected by the link. Specifically, the control means causes displays of another web page on the screen, for example. In this exemplary embodiment, change of link display is referred to as execution of the anchoring operation.

[0051] Figs. 8A and 8B are explanatory diagrams showing an operation of anchoring to the link in the in-site browsing. As shown in Fig. 8A, the control means causes superimposed display of information within a predetermined range (within the window display frame) of the web page and the omni-directional pointer on the screen, thereby changing display of the link in the vicinity of the omni-pointer on the web page. In the example shown in Fig. 8A, "600 type" is displayed in bold face type. Incidentally, the omni-directional pointer is displayed in the center of the window.

[0052] Then, when the user performs the operation that causes the pointing device 3 to slide to the lower left and depresses the left button and the down button included in the cross key 4, the control means moves the region of the web page to be displayed on the screen to the lower right, thereby changing display of the link in the vicinity of the omni-directional pointer on the web page, as shown in Fig. 8B. In the example in Fig. 8B, "900 type" is displayed in boldface type. The control means constantly performs superimposed display of the omni-directional pointer in the center of the window.

[0053] In this exemplary embodiment, switching between the in-screen browsing and the in-site browsing is performed. Thus, in the in-screen browsing, the operation of anchoring to a link can be readily performed. In the in-site browsing, the screen can be smoothly moved.

[0054] When the pointer is moved outside the region in the in-screen browsing, transition to the in-site brows-

ing is made. Then, when the operations performed by the user are finished in the in-site browsing, transition to the in-screen browsing is made. Thus, the in-site browsing and the in-screen browsing can be mutually switched without making the user aware of the switching.

[0055] In this exemplary embodiment, the web page is used as an example of the information targeted for browsing. The present invention may also be applied to a case where information other than the web page is targeted. Also when an image obtained by image pickup means, a file received through a communication network or received through detachable storage means (such as a PDF format file or a text file), a received mail, a transmitted mail, or the like is displayed on the display 2, for example, the present invention can be applied.

Modifications and adjustments of the exemplary embodiment and embodiments are possible within the scope of the overall disclosure (including claims) of the present invention, and based on the basic technical concept of the invention. Various combinations and selections of various disclosed elements are possible within the scope of the claims of the present invention.

INDUSTRIAL APPLICABILITY

[0056] The present invention can be applied to a cellular phone and a PHS (Personal Handy phone System) that display a web page. The present invention can also be applied to a portable audio device, a portable game device, an electronic dictionary, a portable TV terminal, and the like that include a function of displaying a web page. A common point among these devices is that information to be browsed having a size that cannot be held in a display region is often displayed due to their portability. It goes without saying that the present invention can also be applied to devices other than those described above.

Claims

1. A portable communication terminal including display means for displaying information targeted for browsing on a screen thereof, comprising:

instruction means for instructing a region of the information to be displayed on the display means according to an operation performed by a user; and

control means for causing the region of the information corresponding to the operation performed on the instruction means to be displayed on the display means,

wherein

the control means causes, in a first state, superimposed display of the information and a pointer that moves according to the operation performed on the instruction means on the display

- means and changes the region of the information to be displayed on the display means when the pointer moves outside the region, and changes, in a second state, the region of the information to be displayed on the display means according to the operation performed on the instruction means; and the control means includes state transition means for causing transition from the first state to the second state and causing transition from the second state to the first state.
2. The portable communication terminal according to claim 1, wherein the control means changes the region of the information targeted for browsing to be displayed on the display means when the pointer moves outside the region in the first state; and the state transition means causes transition to the second state when the pointer moves outside the region in the first state.
 3. The portable communication terminal according to claim 1 or 2, wherein the state transition means causes transition to the first state when the operation performed on the instruction means is finished in the second state.
 4. The portable communication terminal according to any one of claims 1 to 3, wherein the information targeted for browsing is a web page.
 5. A browsing method of displaying information targeted for browsing on a screen of display means according to an operation performed on instruction means by a user, comprising:

a control step of displaying on the display means a region of the information corresponding to the operation performed on the instruction means, wherein, in a first state, superimposed display of the information and a pointer that moves according to the operation performed on the display means is made on the display means and the region of the information to be displayed on the display means is changed when the pointer moves outside the region, and in a second state, the region of the information to be displayed on the display means is changed, according to the operation performed on the instruction means; and a transition step of changing the region of the information to be displayed on the display means when the pointer moves outside the region in the first state, thereby causing transition to the second state, and causing transition to the first state when the operation performed on
 - the instruction means is finished in the second state.
 6. A browsing program installed in a portable communication terminal including display means for displaying information targeted for browsing on a screen thereof, the browsing program being for causing a computer to execute a control process that causes a region of the information corresponding to an operation performed on instruction means by a user to be displayed on the display means, in a first state of the control process, superimposed display of the information and a pointer that moves according to the operation performed on the instruction means being made on the display means, and the region of the information to be displayed on the display means being changed when the pointer moves outside the region; and in a second state of the control process, the region of the information to be displayed on the display means being changed according to the operation performed on the instruction means.
 7. The browsing program according to claim 6, which causes the computer to execute the control process so that when the pointer moves outside the region in the first state, the region of the information targeted for browsing to be displayed on the display means is changed, thereby causing transition to the second state, and when the operation performed on the instruction means is finished in the second state, transition to the first state is caused.
 8. A portable terminal capable of performing switching when information targeted for browsing that cannot be held in a display region is displayed, the switching being performed between:

a first browsing mode in which, when a pointer operated by a user moves outside the display region, a location of the display region of the information targeted for browsing is moved; and a second browsing mode in which the location of the display region of the information targeted for browsing is moved according to an operation amount of the user.
 9. The portable terminal according to claim 8, wherein when the pointer moves outside the display region in the first browsing mode, the display region is moved and transition to the second browsing mode is made.
 10. The portable terminal according to claim 8 or 9, wherein when a pointer operation is finished in the second browsing mode, transition to the first browsing mode is made.

11. A browsing program installed in a portable terminal and executed by a computer, the browsing program implementing a function of performing switching when information targeted for browsing and having a size that cannot be held in a display region of the portable terminal is displayed, the switching is performed between: 5

a first browsing mode in which, when a pointer operated by a user is moved outside the display region, a location of the display region of the information targeted for browsing is moved; and 10
a second browsing mode in which the display region is moved according to an operation amount of the user. 15

20

25

30

35

40

45

50

55

FIG. 1

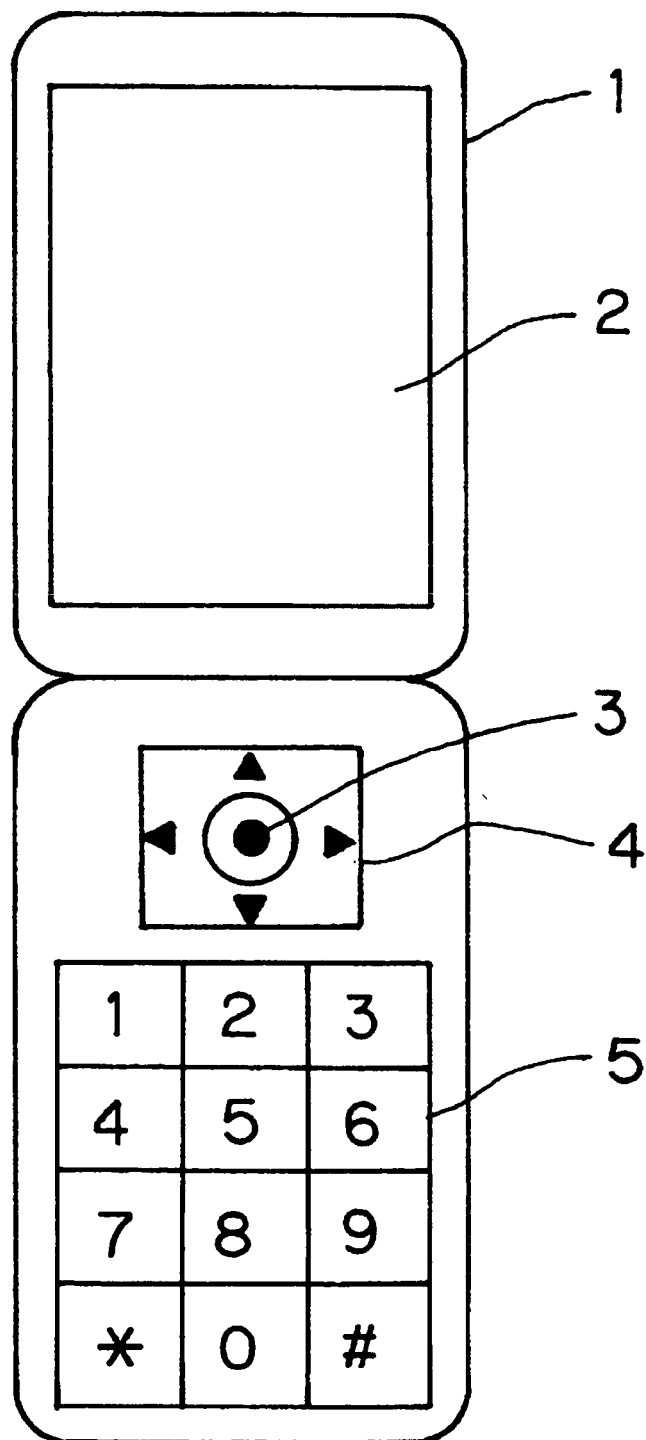


FIG. 2A

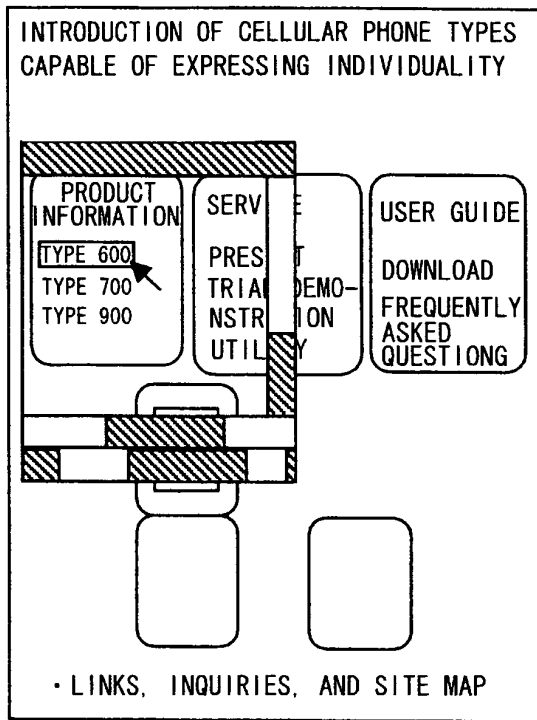


FIG. 2B

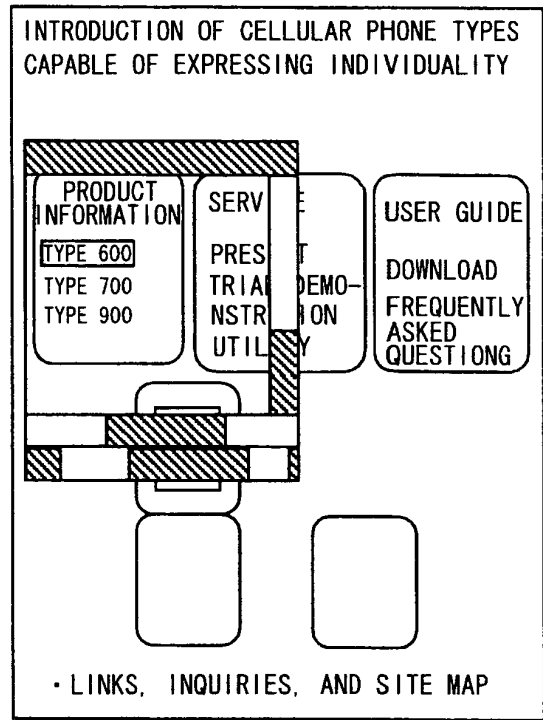


FIG. 2C

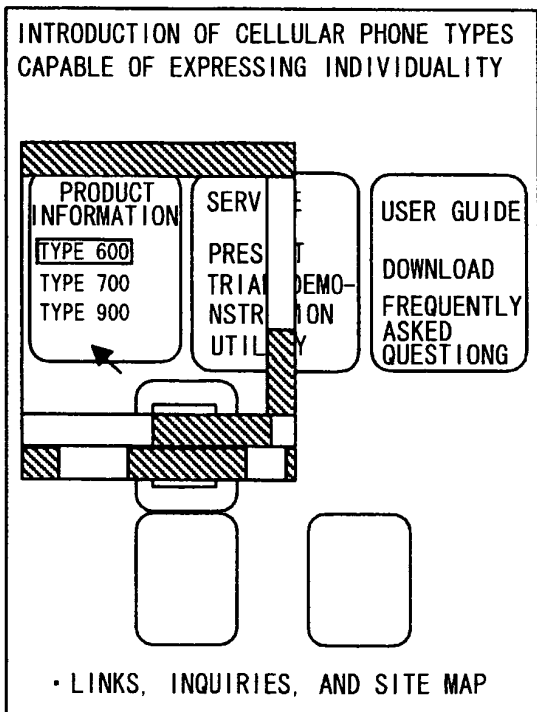


FIG. 2D

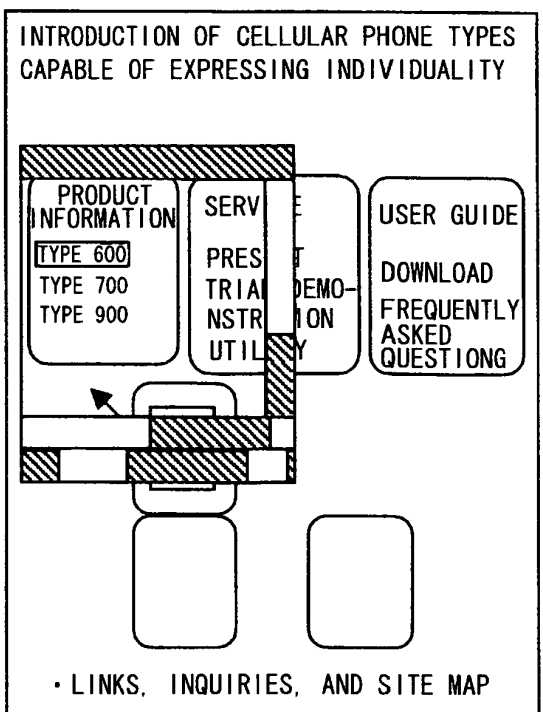


FIG. 3A

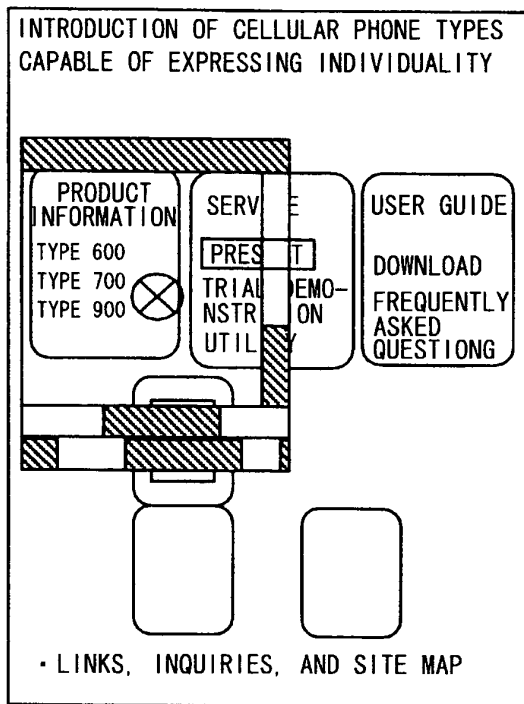


FIG. 3B

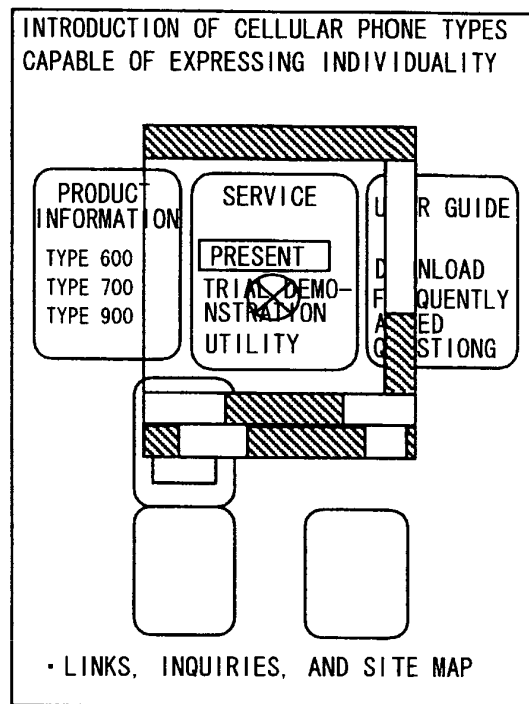


FIG. 3C

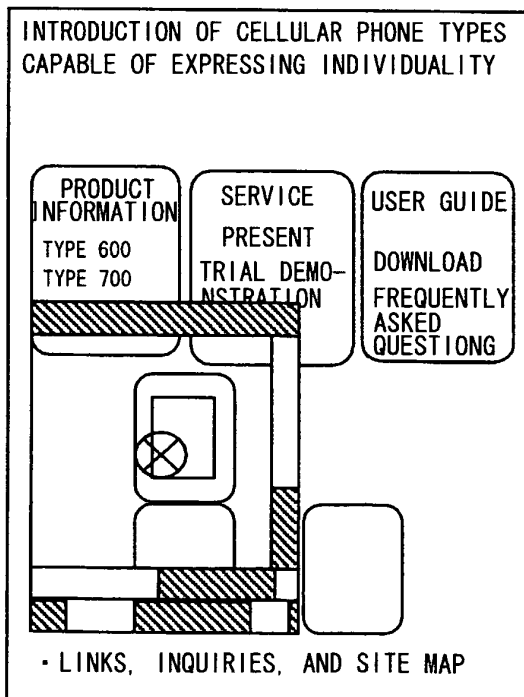


FIG. 3D

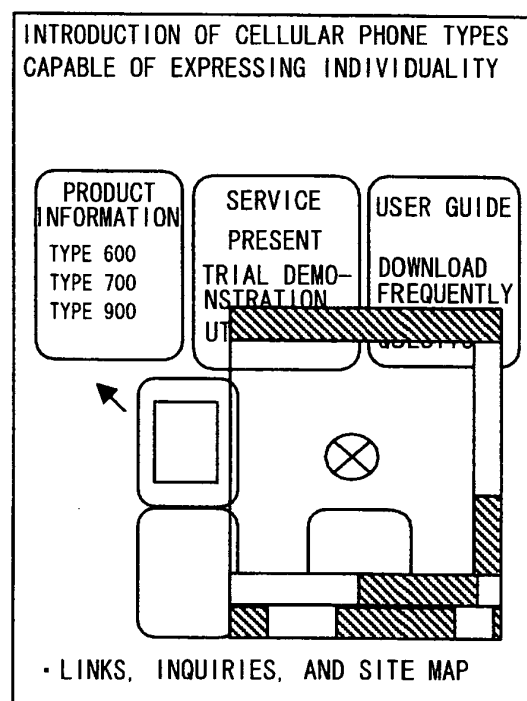


FIG. 4

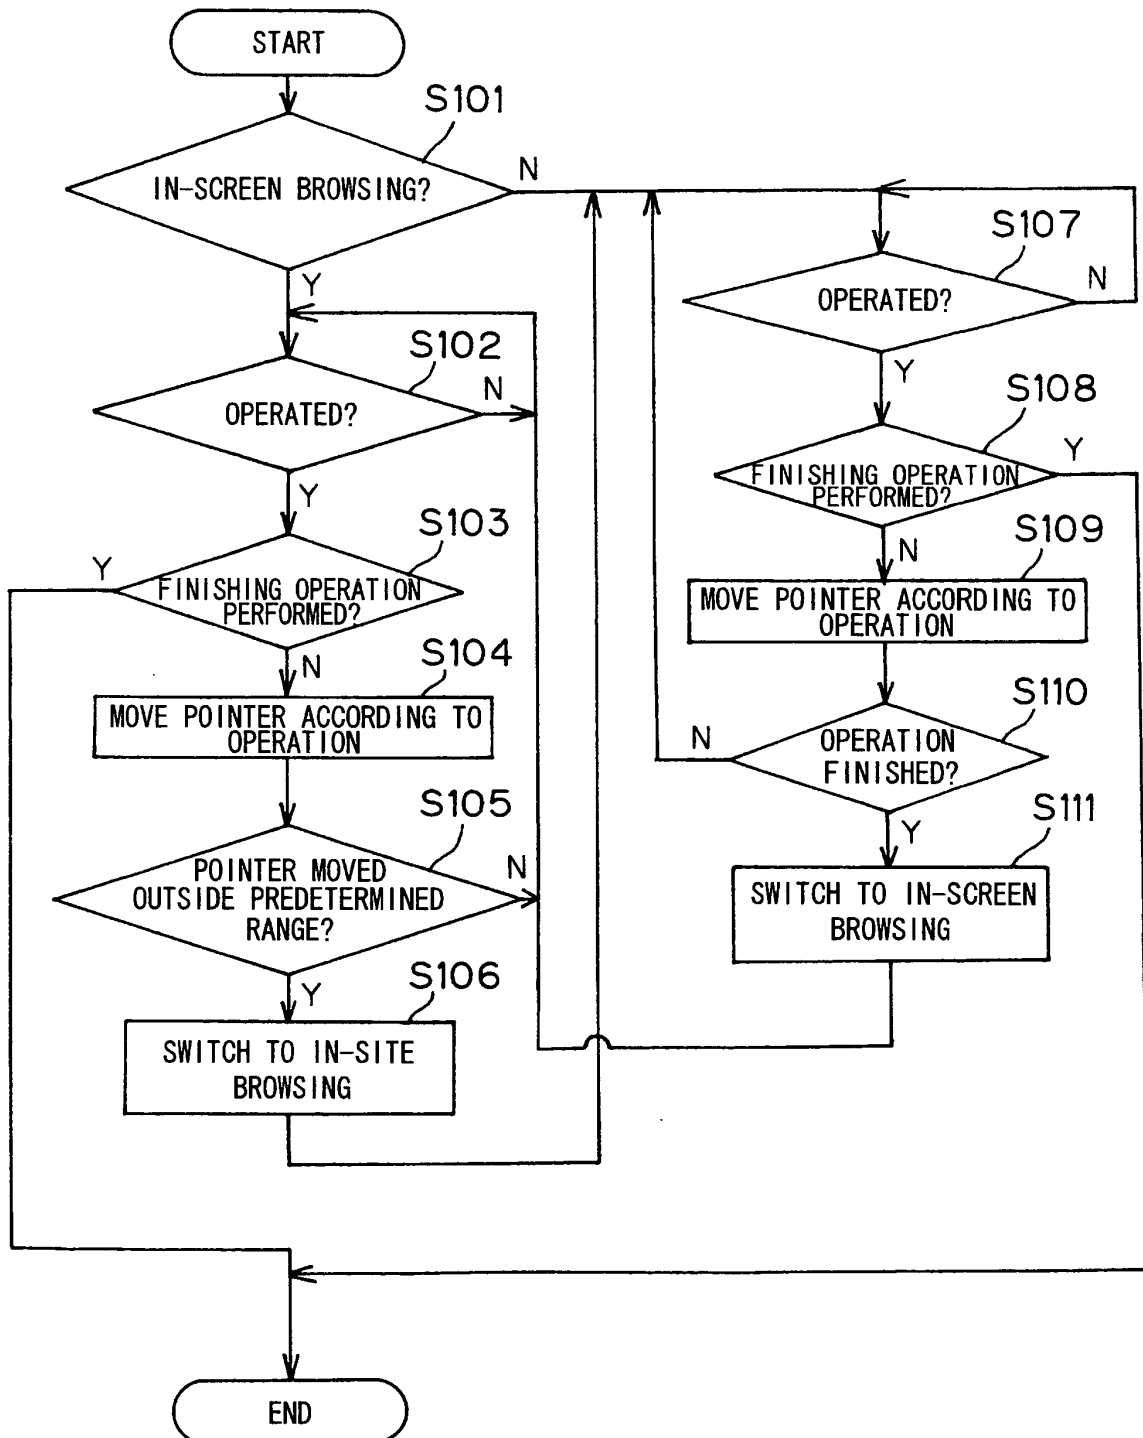


FIG. 5A

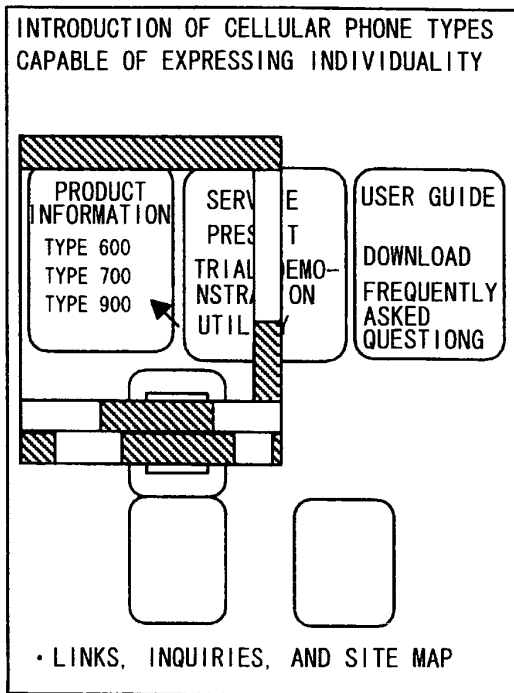


FIG. 5B

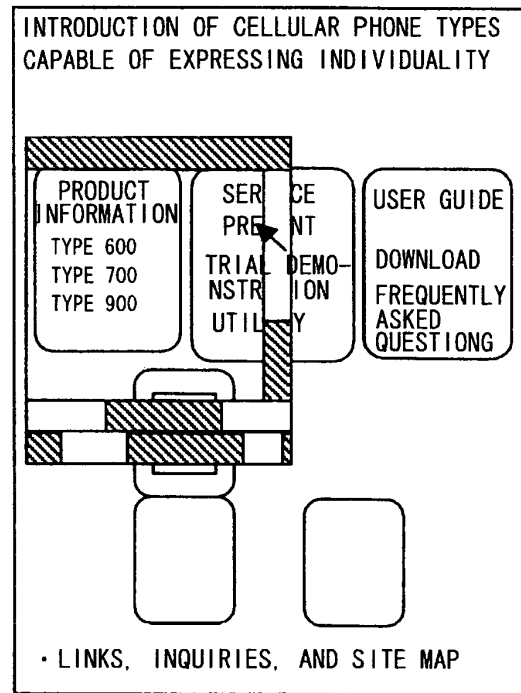


FIG. 5C

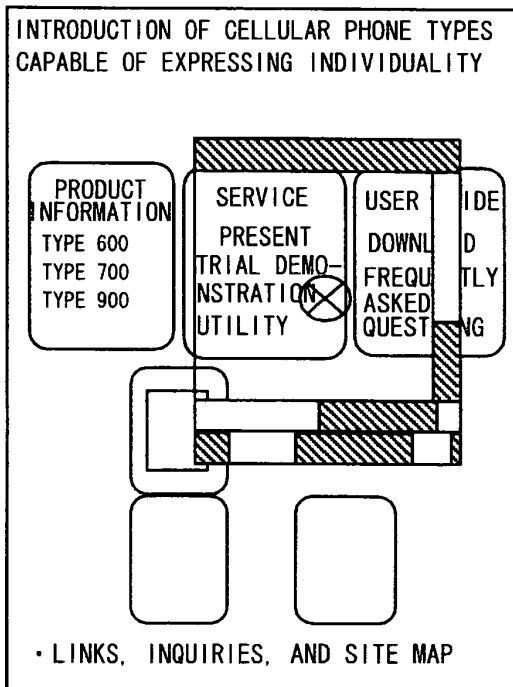


FIG. 5D

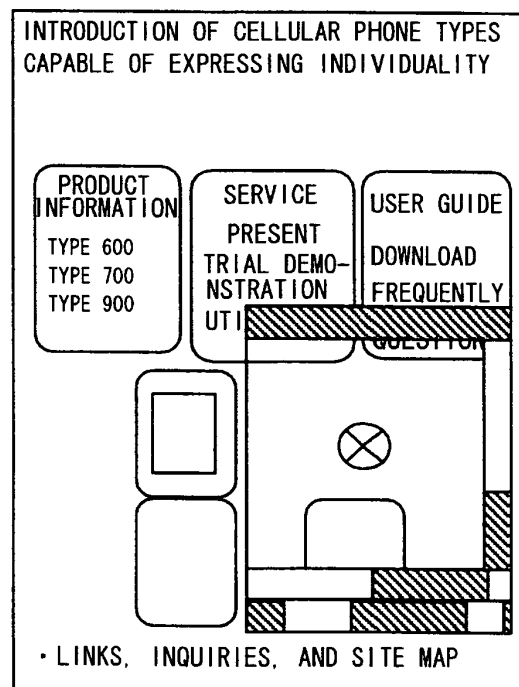


FIG. 6A

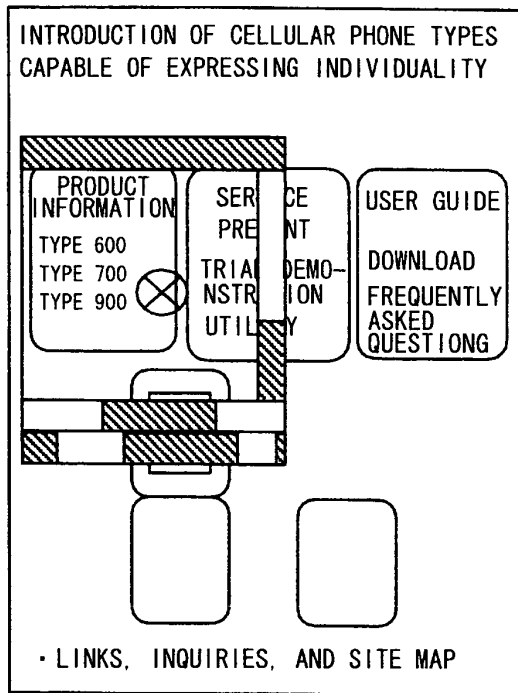


FIG. 6B

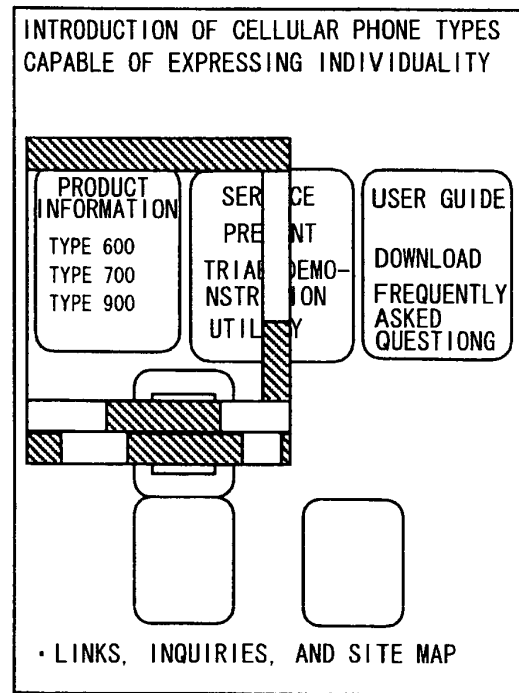


FIG. 6C

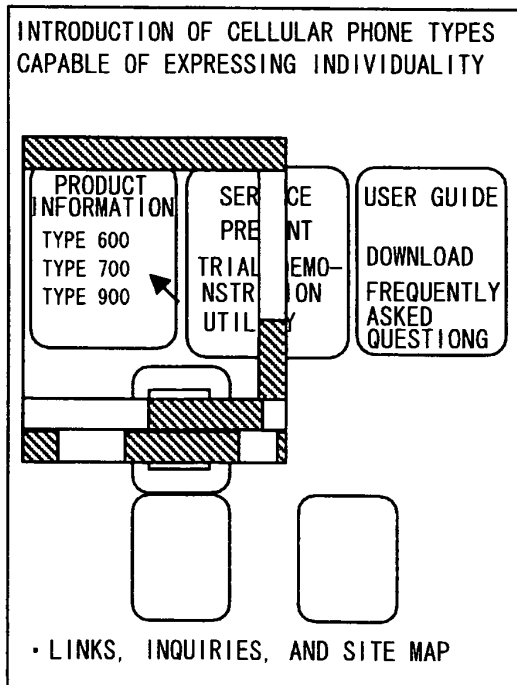


FIG. 6D

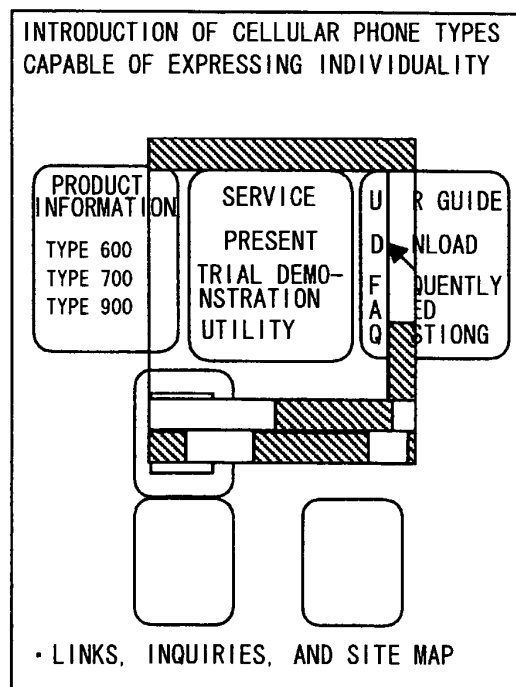


FIG.7A

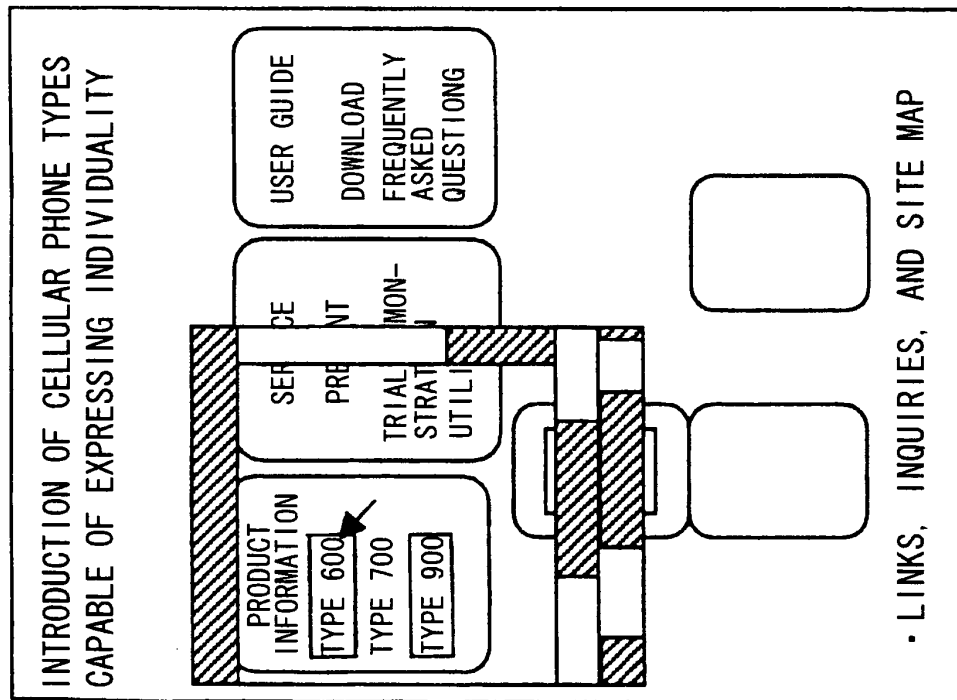


FIG. 7B

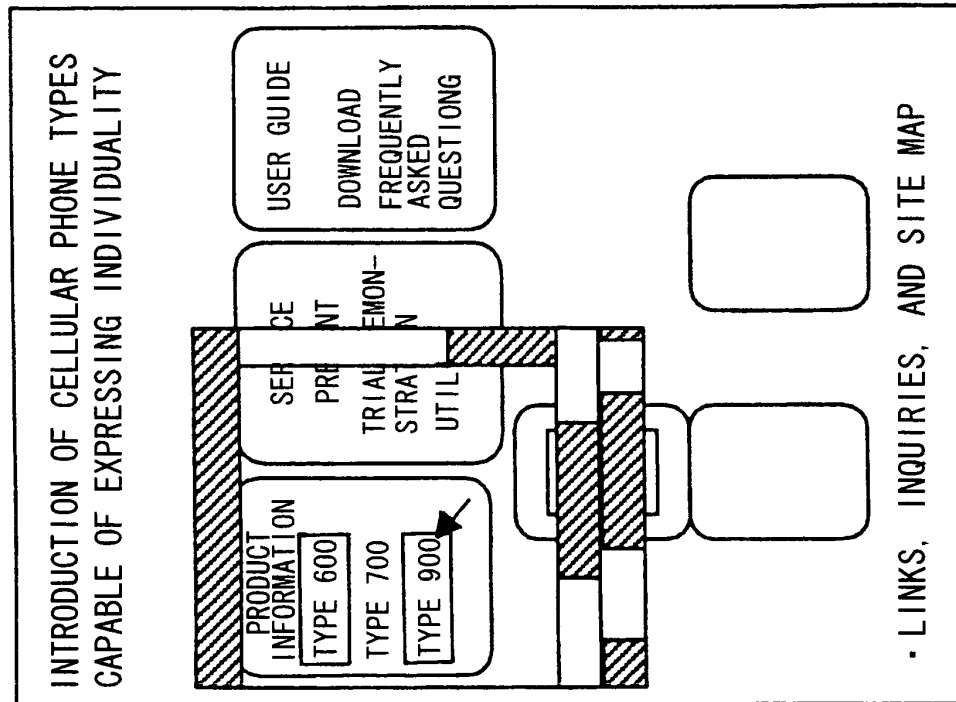


FIG8A


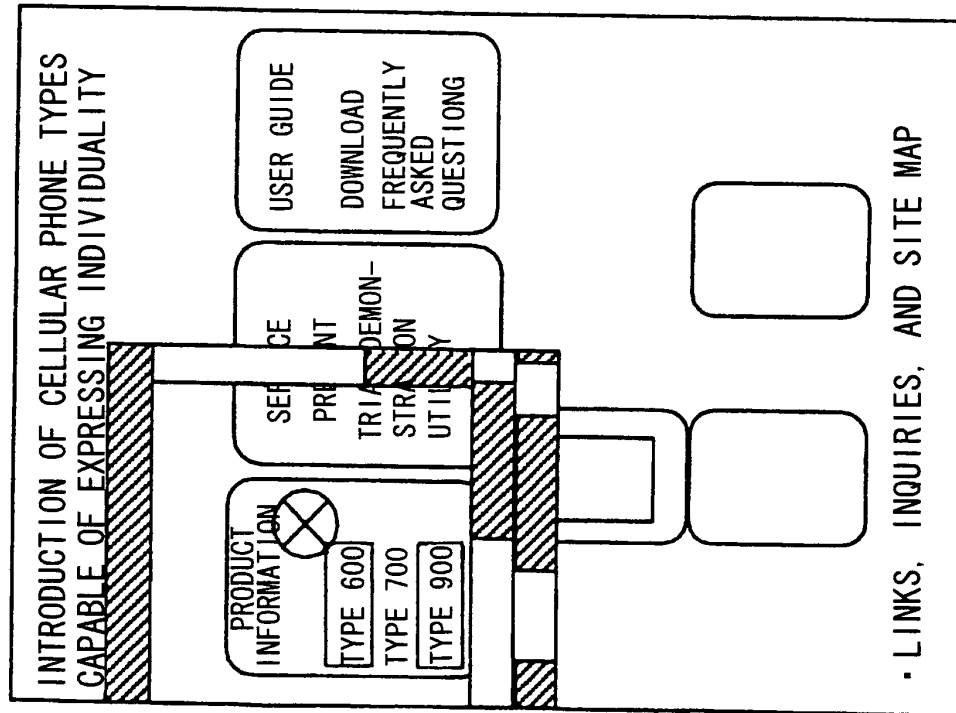


FIG. 8B

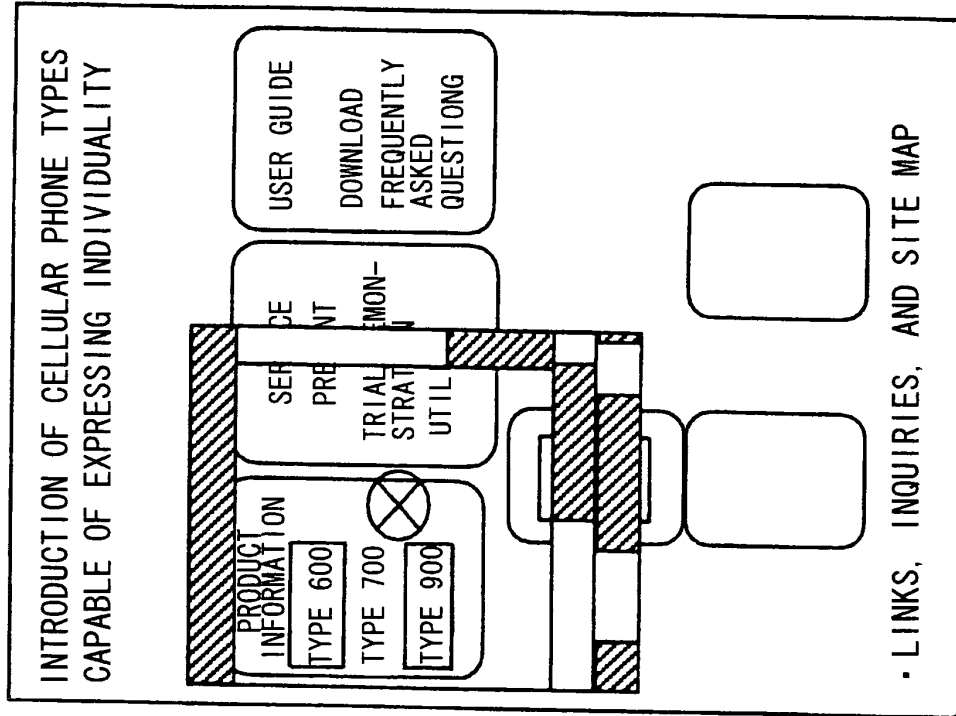

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/050051

A. CLASSIFICATION OF SUBJECT MATTER G06F3/048(2006.01)i, H04M1/247(2006.01)i, H04Q7/38(2006.01)i According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G06F3/048, H04M1/247, H04Q7/38 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2008 Kokai Jitsuyo Shinan Koho 1971-2008 Toroku Jitsuyo Shinan Koho 1994-2008 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 5-134653 A (Matsushita Electric Industrial Co., Ltd.), 28 May, 1993 (28.05.93), Par. Nos. [0016] to [0018]; Figs. 5 to 7 (Family: none)	1-11
Y	JP 2004-086744 A (Tomokazu SHIOYA), 18 March, 2004 (18.03.04), Par. Nos. [0030] to [0038], [0050]; Figs. 3 to 6 (Family: none)	1-11
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 24 January, 2008 (24.01.08)		Date of mailing of the international search report 05 February, 2008 (05.02.08)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (April 2007)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2007005552 A [0001]
- JP P2004312476 A [0006]
- JP P2003308168 A [0007]