United States Patent [19]

Zinn

[11] **3,841,043**

[45] **Oct. 15, 1974**

[54] WALL CONSTRUCTION

[76] Inventor: **Daniel L. Zinn,** 2545 Beaufait, Detroit, Mich. 48207

[22] Filed: **July 25, 1973**

[21] Appl. No.: **382,604**

Related U.S. Application Data

[62] Division of Ser. No. 257,943, May 30, 1972, abandoned, which is a division of Ser. No. 74,022, Sept. 21, 1970, abandoned.

[52] **U.S. Cl.** **52/243,** 52/346, 52/481

[51] **Int. Cl.** **E04b 1/74**

[58] **Field of Search** 52/243, 346, 364, 481, 52/241, 242

[56] **References Cited**

UNITED STATES PATENTS

1,826,114	10/1931	Young	52/615
1,963,416	6/1934	Minshall	52/720
2,056,328	10/1936	Price	52/243
3,058,551	10/1962	Martin	52/48 X
3,238,677	3/1966	Soubier	52/599 X
3,333,390	8/1967	Banning	52/732
3,525,189	8/1970	Nelsson	52/378


Primary Examiner—Price C. Faw, Jr.

Attorney, Agent, or Firm—Cullen, Settle, Sloman & Cantor

[57] **ABSTRACT**

A sound attenuating wall employing studs and panels, wherein the studs mounted in a line have alternately reversed flanges of greater and lesser resiliency, and the panels have their edges at and fixed to the less resilient flanges and their centers at the more resilient flanges.

5 Claims, 8 Drawing Figures

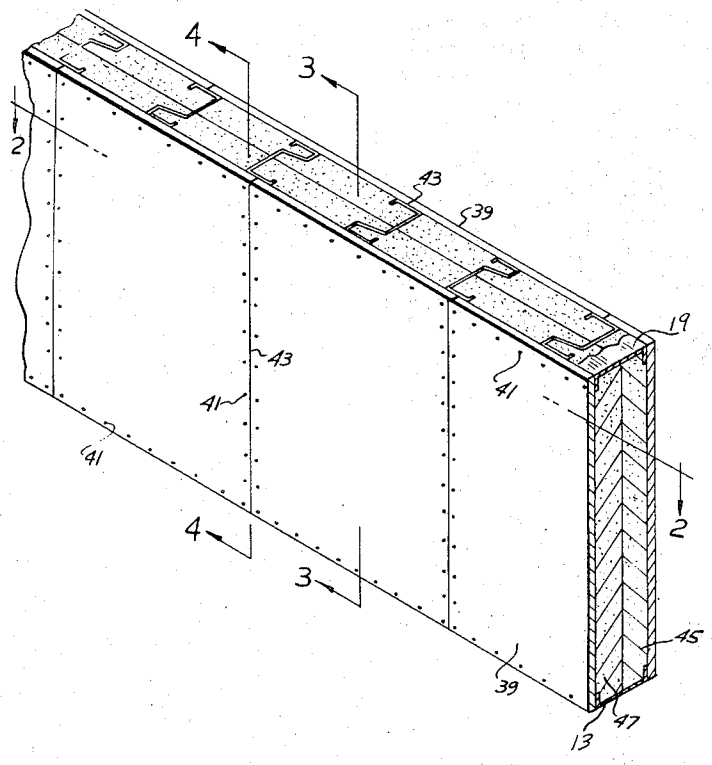

PATENTED OCT 15 1974

3,841,043

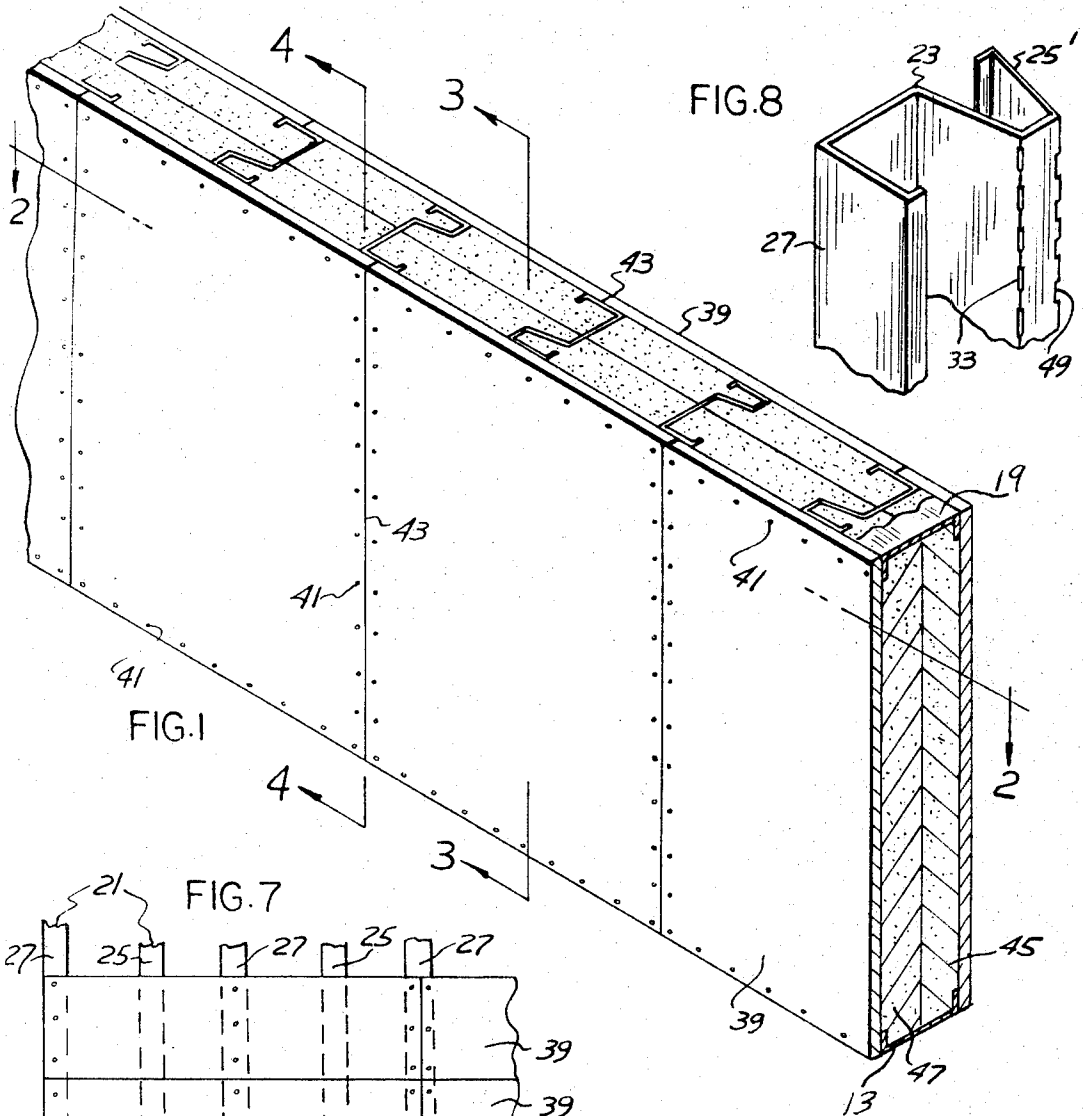


FIG.1

FIG.8

FIG.7

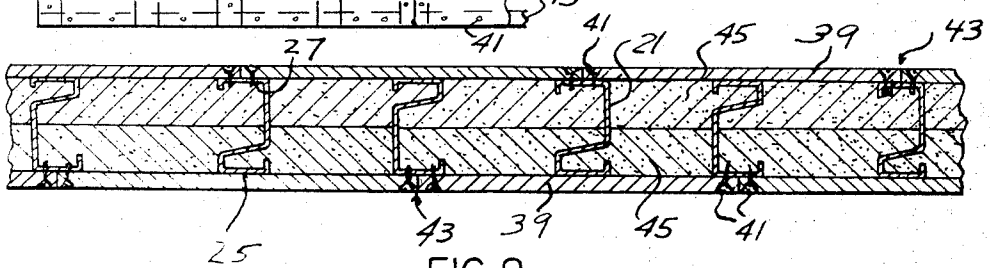


FIG.2

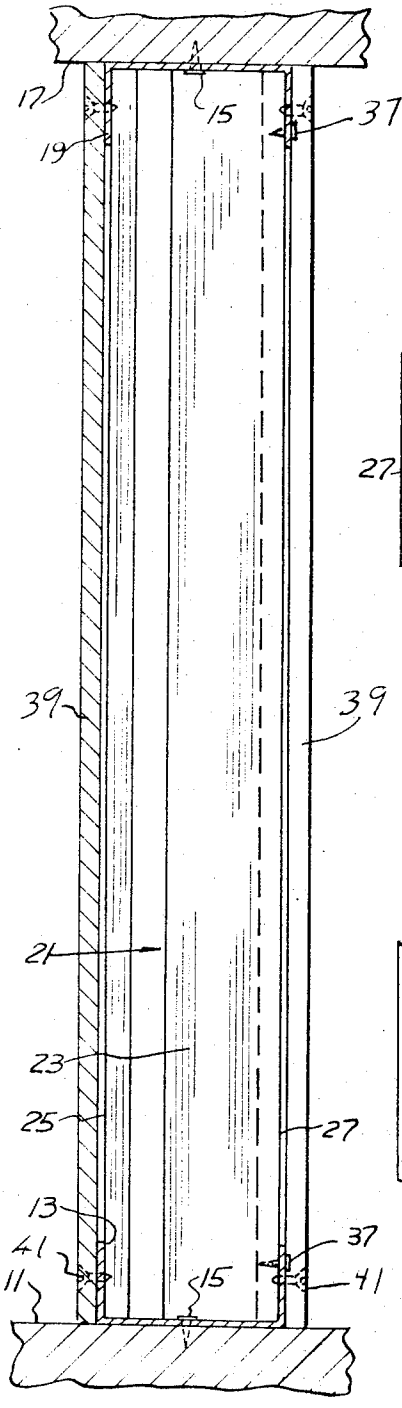


FIG. 3

FIG. 5

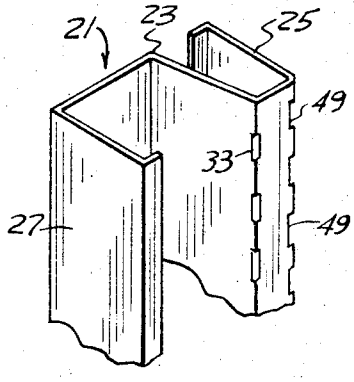
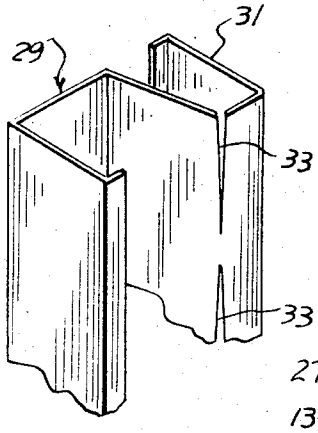


FIG. 6



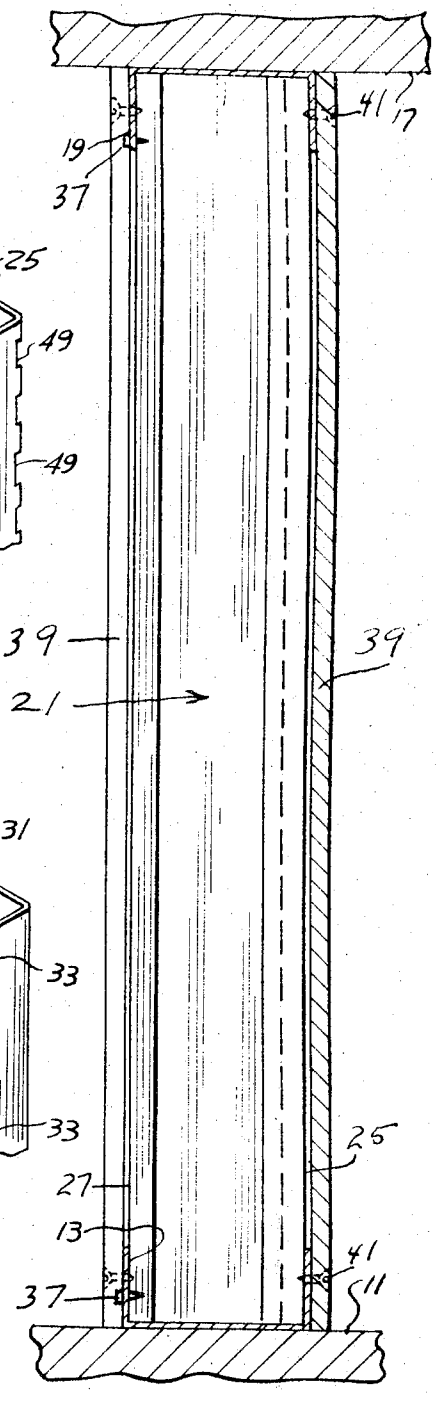


FIG. 4

WALL CONSTRUCTION

CROSS REFERENCE

This application is a divisional of my copending application Ser. No. 257,943 of May 30, 1972, now abandoned, which was a division of and copending with application Ser. No. 74,022, of Sept. 21, 1970, now abandoned.

In the wall of the invention, double side or double flange studs are mounted in a line, with each mounted stud having one side or flange of greater resilience than the other. The studs are alternately reversed so that on each side of the line of studs, the less resilient flanges are alternated with the more resilient flanges. In each adjacent pair of studs, on a single wall side, one flange is of greater resilience than the other.

When a panel is mounted to span at least three studs, the panel edges are at and fixed to the less resilient flanges of the two outer studs of such three studs; and the panel centers or inner portions are adjacent the more resilient flange of the central stud of such three studs.

THE PREFERRED EMBODIMENTS

Preferred embodiments are shown in the appended drawings, to be understood on reference to this specification.

IN THESE DRAWINGS

FIG. **1** is a fragmentary perspective view of a portion of the present sound attenuation wall.

FIG. **2** is a fragmentary section taken in the direction of arrows 2—2 of FIG. **1.**

FIG. **3** is a fragmentary section taken in the direction of arrows 3—3 of FIG. **1.**

FIG. **4** is a fragmentary section taken in the direction of arrows 4—4 of FIG. **1.**

FIG. **5** is a fragmentary perspective view of the present improved stud construction.

FIG. **6** is a similar view of a modification.

FIG. **7** is a fragmentary elevational view with the partitions extending longitudinally.

FIG. **8** is similar to FIG. **5** showing a modified stud.

DETAILED DESCRIPTION OF THE EMBODIMENTS SHOWN IN THE DRAWINGS

A sound attenuation wall is shown in FIG. **1,** and as indicated in FIGS. **3** and **4** is adapted for use between fixed structures, such as a building floor **11** and ceiling **17.**

Channels **13** and **19** are mounted upon said floor and ceiling and are secured by fasteners **15.**

THE STUDS

A line or series of longitudinally spaced studs **21** is interposed between and projects into channels **13** and **19** and is suitably anchored thereto with each stud, as formed and mounted, having a first more resilient side **25** and a second less resilient side **27,** and a web **23.**

Studs **21** as best shown in FIG. **2** are alternately arranged so that the first and second flanges **25–27** of adjacent studs are alternately reversed.

The second, less resilient flanges **27** of the studs are anchored to the channels as by fasteners **37.** The first or more resilient flanges **25** are not anchored to the channels.

THE PANELS

Wallboard panels **39** applied to opposite sides of the respective studs with the wallboards on each side being in alignment and in engagement with each other at their edges throughout the length of the wall such as is shown fragmentarily in FIG. **1** and in FIG. **2.**

Wallboards on each side are in engagement along the registry line **43,** FIG. **1** which corresponds to the central portion of the particular second flange **27** to which the wallboards at the respective edges are fixed by fasteners **41.**

Each wallboard spans at least three studs with the outer edges of each wallboard fixed to the corresponding second flange **27** of the outer of said three studs as by a series of fasteners **41.** In the modification shown in FIG. **7,** the wallboards extend longitudinally and span more than three studs.

The central or inner portion of each wallboard **39** throughout its height is adjacent the corresponding resilient first flange **25.** In FIG. **7,** central portions of the wallboards loosely bear against adjacent resilient first flanges.

It is noted particularly with respect to FIGS. **1** and **2** that the wallboards **39** upon opposite sides of the partition at their respective meeting edges **43** are staggered or offset. Thus the meeting line **43** between a pair of wallboards on one side of the wall is in registry with corresponding central or intermediate portion of an opposed wallboard. The wallboards upon opposite sides of the wall are staggered whereby the wallboard on one side of the wall spans three adjacent studs and the opposing but staggered wallboard on the opposite side of the partition spans two of the said three studs.

By this construction the outer upright edges of each wallboard are fixedly secured to the second flange **27** of the corresponding stud whereas the upright central portion of each wallboard yieldingly bears against the corresponding resilient first flange **25** of the intermediate stud.

Thus, the individual wallboards affixed at their upright edges yieldably bear against the respective central stud and are adapted to flex inwardly and outwardly in the functioning of the present sound attenuation panel. The wallboards along their top and bottom edges are fixedly secured to the floor and ceiling channels by fasteners **41.** Likewise in FIG. **7,** the longitudinal edge of some wallboards bears against and is affixed to channels **13** or **19.**

Suitable sound absorbing pads or blankets **45,** of which a pair are shown, FIGS. **1** and **2,** are interposed in compression between the assembled opposed wallboards **39** and have a very definite function in the final operation of the present sound attenuating panel. While the present panel as constructed is effective as a sound attenuation panel even without the sound absorbing pads interposed, an improved sound attenuation panel is provided when said pads are provided.

It has been found in operation that any inward flexing of the corresponding wallboards due to the transmission of sound vibrations therethrough causes a frictional rubbing action of the wallboard with respect to the sound absorbing pad. This rubbing action transforms sound energy to heat, thus, dissipating the sound and provides an improved sound attentuation wall partition. The compressed pads also dampen vibrations.

Glass fiber strips are shown in the illustrative embodiment, nine feet long for example, and thus extend between the floor and ceiling and are interposed in compression between the wallboards when assembled.

The resilient backing of each wallboard throughout its height is achieved by the yieldable first flanges **25** providing a yielding relationship between the wallboard and the supporting stud.

REPRISE

The broader aspect of this invention is that the studs when formed and mounted, have first and second flanges of different resiliency. One method of accomplishing this result is to secure only one flange of a stud to the channels. Thus the stud as mounted, provides the desired result.

Alternately, the stud as formed but prior to mounting may have flanges of different resiliency (in which case anchoring only one flange to the channels is optional).

One such stud **29** is fragmentarily shown in FIG. **6.** The corresponding resilient first flange **31** is provided additional resiliency by a series of aligned spaced slits **33** formed in the stud web.

In FIG. **5** the resilient first flange **25** is given additional flexibility by the use of more slits. Longitudinally spaced slits **33** correspond to those of FIG. **6.** Further longitudinally spaced slits **49** are formed at the one longitudinal edge of flange **25.** Slits **49** are alternately arranged and staggered with respect to slits **33.**

FIG. **8** is yet another modification of the stud in that the resilient first flange **25'** is initially before assembly non-parallel to second flange **27.** Flange **25'** extends outwardly at an acute angle to flange **27** in the range of 5°–20° for illustration.

Upon assembly of the wallboards such as in FIGS. **1** and **2,** the resilient first flanges **25'** shown in FIG. **8** are then in compression and substantially parallel to flanges **25.** Resilient first flange **25'** has been rendered more flexible and resilient due to the double series of staggered slots **33** and **49.**

CONCLUSION

While presently preferred embodiments of the invention have been disclosed, supra, the inventive concepts hereof are not limited to such preferred embodiments but are those defined in the claims which follow.

I claim:

1. In a sound attenuating wall between parallel fixed structures of a building, the improvements comprising:

a series of formed elongated spaced building wall studs of the web and double flange type between and anchored at their ends to said building structures, with each stud when formed and anchored in line having a more resilient flange and a less resilient flange;

with the studs being arranged in reversed alternation so that the more resilient flanges of spaced adjacent studs face in opposite directions and equally the less resilient flanges of spaced adjacent studs face in opposite directions;

in combination with wall panels on one side of the line of studs arranged so that edge portions are adjacent each other and adjacent the less resilient flanges of such side and are affixed to such less resilient flanges;

and central portions of such panels are adjacent the more resilient flanges of such one side.

2. In a sound attenuating wall between parallel fixed structures of a building, the improvements comprising:

a series of formed elongated spaced building wall studs of the web and double flange type between and anchored at their ends to said building structures, with each stud when formed and anchored in line having a more resilient flange and a less resilient flange;

with the studs being arranged in reversed alternation so that the more resilient flanges of spaced adjacent studs face in opposite directions and equally the less resilient flanges of spaced adjacent studs face in opposite directions;

with the studs being so formed and mounted that in the mounted line of studs there are flanges which have greater resiliency and flanges which have lesser resiliency;

in combination with wall panels on one side of the line of studs offset with respect to wall panels on the opposite side so that central portions on one side are opposite edges of the opposing panels;

and the edges of panels on one side are opposite central portions of panels on the other side;

with the edges of the panels on one side being affixed to the less resilient flanges on such side;

and with the central portions of the panels on one side being adjacent the more resilient flanges on such side.

3. A wall construction according to claim **2,** wherein the flanges as formed are initially equal in resiliency, with the studs being so anchored that these flanges retain substantially their original resiliency without substantial impairment.

4. A wall construction according to claim **2,** wherein the flanges are initially equal in resiliency with the ends of the more resilient flanges being so free of the fixed structures as to retain substantially their original resilience without substantial impairment, whereas the less resilient flanges are so anchored at their ends to the fixed structures so as to lose substantial portions of their original resilience.

5. A wall construction according to claim **2,** wherein the greater resilience flanges are initially formed to be of greater resilience than the less resilient flanges, and are free of the fixed structures so as to retain their resilience without substantial impairment when the studs are anchored by anchoring the ends of the less resilient flanges to such fixed structure.

* * * * *