Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2455011 C 2011/04/05

(11)(21) 2 455 011

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(22) Date de dépôt/Filing Date: 2004/01/09

(41) Mise à la disp. pub./Open to Public Insp.: 2005/07/09

(45) Date de délivrance/Issue Date: 2011/04/05


(51) Cl.Int./Int.Cl. *C10C 3/00* (2006.01),
B01F 13/02 (2006.01), *B03B 9/02* (2006.01),
C10G 1/04 (2006.01)

(72) Inventeurs/Inventors:
GASTON, LES, CA;
MADGE, DONALD NORMAN, CA;
STRAND, WILLIAM LESTER, CA;
NOBLE, IAN, CA;
GARNER, WILLIAM NICHOLAS, CA;
LAM, MIKE, CA

(73) Propriétaire/Owner:
SUNCOR ENERGY INC., CA

(74) Agent: SMART & BIGGAR

(54) Titre : TRAITEMENT DE MOUSSE BITUMINEUSE PAR INJECTION DE VAPEUR EN LIGNE
(54) Title: BITUMINOUS FROTH INLINE STEAM INJECTION PROCESSING

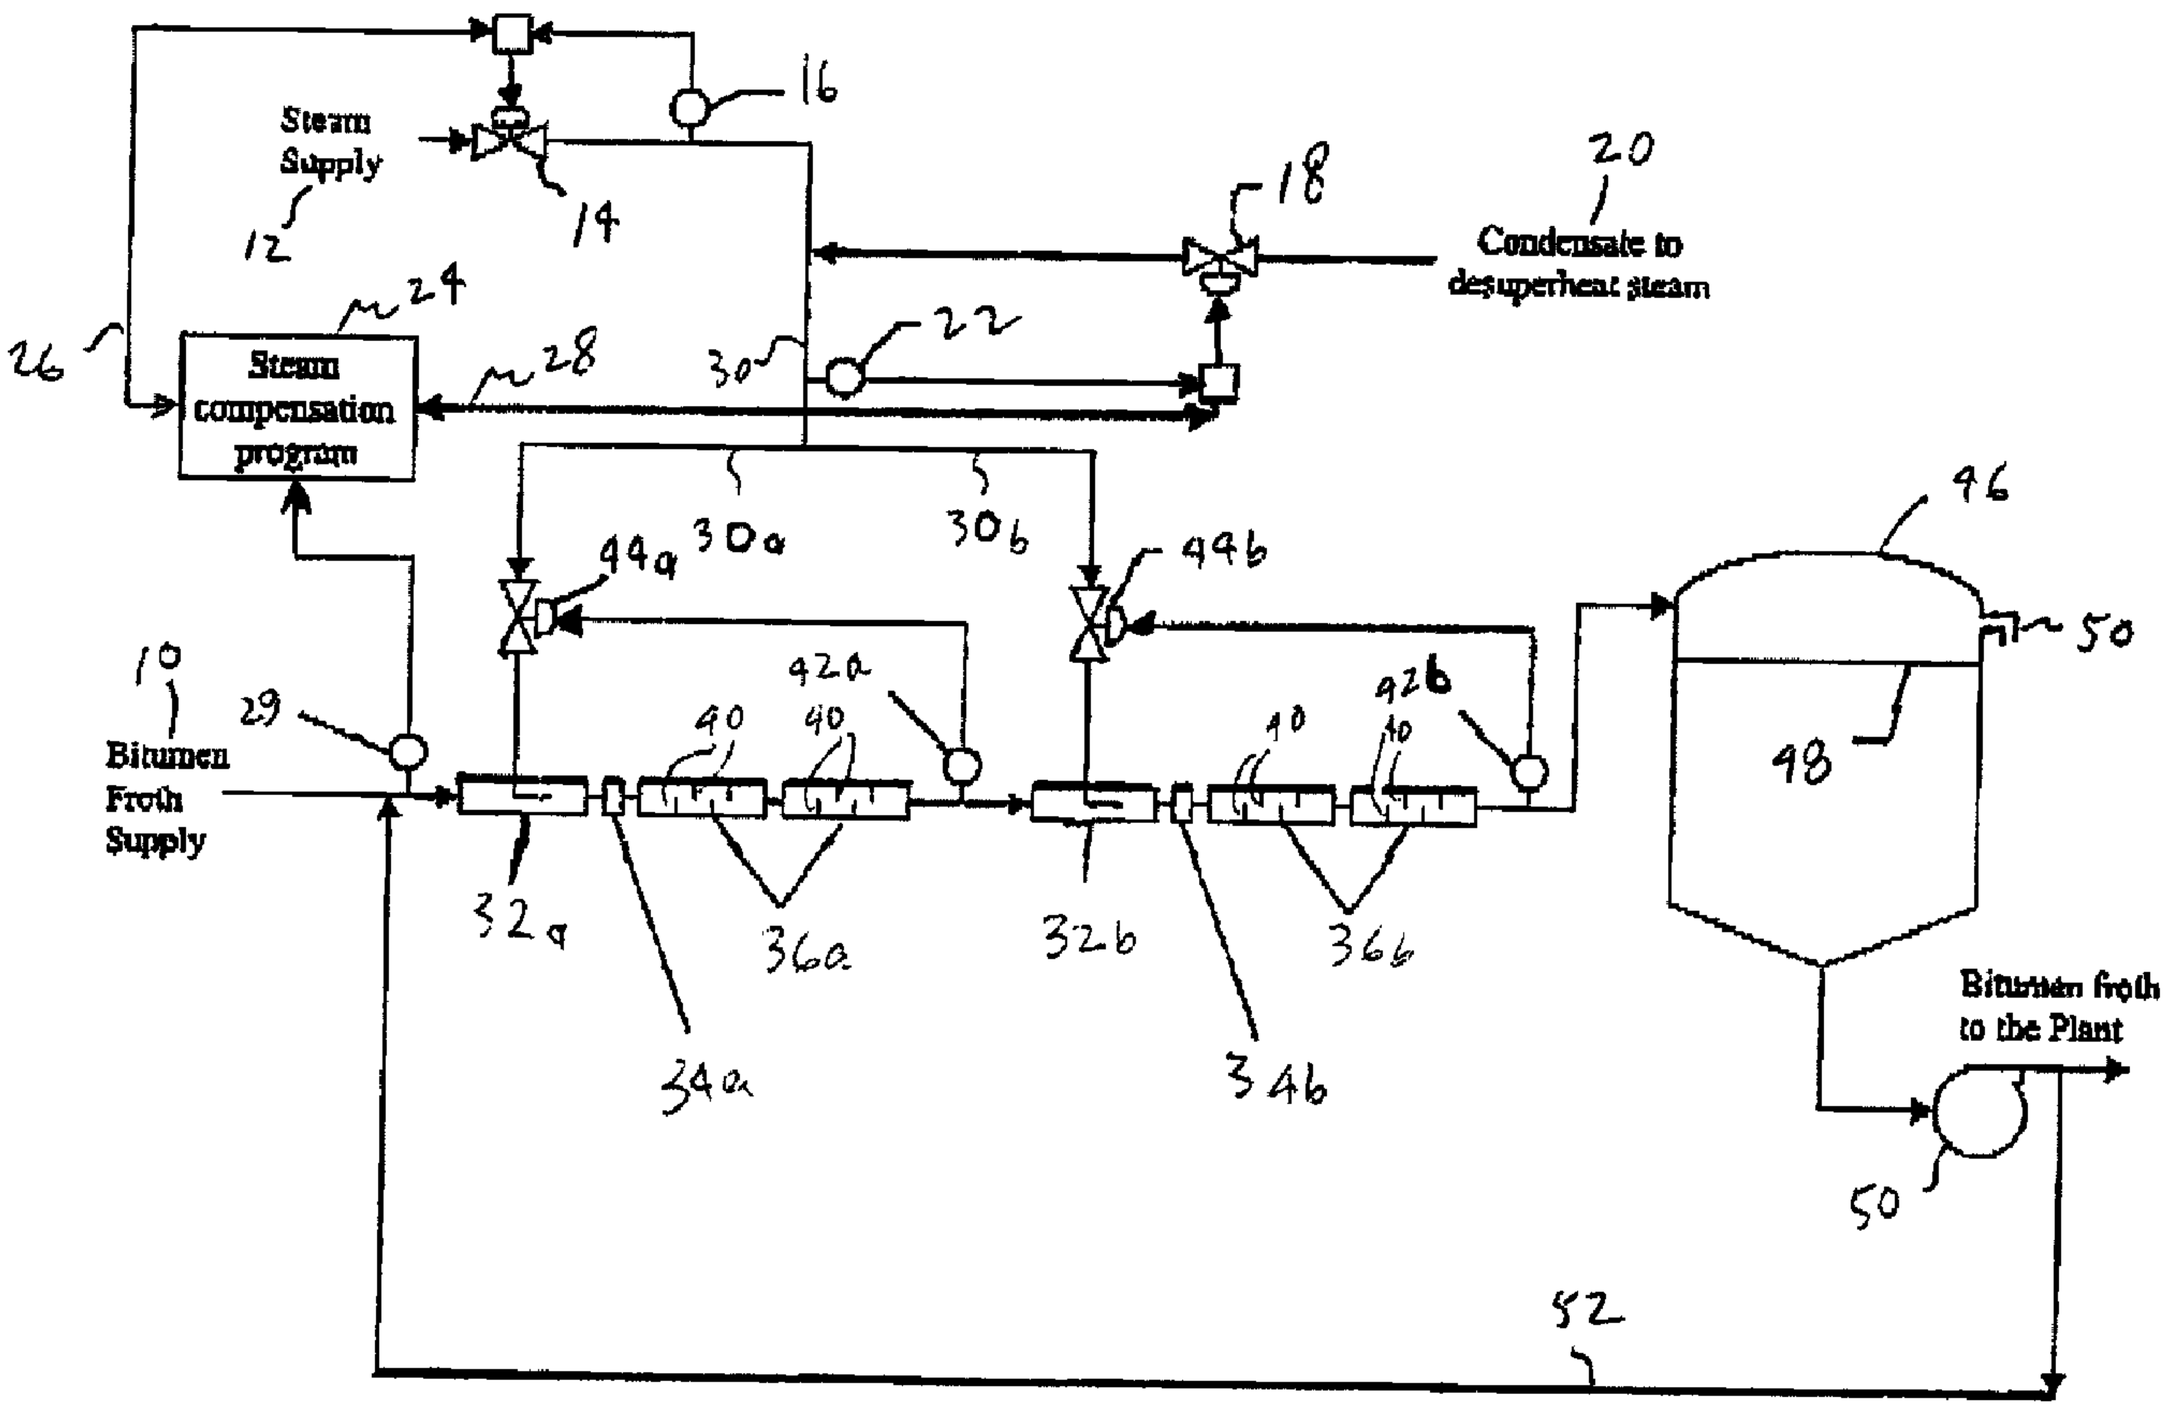

(57) Abrégé/Abstract:
An inline bitumen froth steam heater system is comprised of steam injection and static mixing devices. The steam heater system heats and de-aerates an input bitumen froth without creating downstream processing problems with the bitumen froth such as

CA 2455011 C 2011/04/05

(11)(21) 2 455 011

(13) C

(57) Abrégé(suite)/Abstract(continued):
emulsification or live steam entrainment. The inline bitumen froth steam heater is a multistage unit that injects and thoroughly mixes the steam with bitumen resulting in an output bitumen material having a homogenous temperature of about 190°F. The heating system conditions a superheated steam supply to obtain saturated steam at about 300°F. The saturated steam is contacted with a bitumen froth flow and mixed in a static mixer stage. The static mixers provide a surface area and rotating action that allows the injected steam to condense and transfer its heat to the bitumen froth. The mixing action and the increase in temperature of the bitumen froth results in reduction in bitumen viscosity and also allows the release of entrapped air from the bitumen froth.

ABSTRACT

An inline bitumen froth steam heater system is comprised of steam injection and static mixing devices. The steam heater system heats and de-aerates an input bitumen froth without creating downstream processing problems with the bitumen froth such as emulsification or live steam entrainment. The inline bitumen froth steam heater is a multistage unit that injects and thoroughly mixes the steam with bitumen resulting in an output bitumen material having a homogenous temperature of about 190°F. The heating system conditions a superheated steam supply to obtain saturated steam at about 300°F. The saturated steam is contacted with a bitumen froth flow and mixed in a static mixer stage. The static mixers provide a surface area and rotating action that allows the injected steam to condense and transfer its heat to the bitumen froth. The mixing action and the increase in temperature of the bitumen froth results in reduction in bitumen viscosity and also allows the release of entrapped air from the bitumen froth.

BITUMINOUS FROTH INLINE STEAM INJECTION PROCESSING

FIELD OF THE INVENTION

This invention relates to bitumen processing and more particularly is related to heating bituminous froth using inline steam injection.

BACKGROUND TO THE INVENTION

In extracting bitumen hydrocarbons from tar sands, one extraction process separates bitumen from the sand ore in which it is found using an ore washing process generally referred to as the Clark hot water flotation method. In this process, a bitumen froth is typically recovered at about 150°F and contains residual air from the flotation process. Consequently, the froth produced from the Clark hot water flotation method is usually described as aerated bitumen froth. Aerated bitumen froth at 150°F is difficult to work with. It has similar properties to roofing tar. It is very viscous and does not readily accept heat. Traditionally, processing of aerated bitumen froth requires the froth to be heated to 190° to 200°F and deaerated before it can move to the next stage of the process.

Heretofore, the aerated bitumen froth is heated and de-aerated in large atmospheric tanks with the bitumen fed in near the top of the vessel and discharged onto a shed deck. The steam is injected below the shed deck and migrates upward, transferring heat and stripping air from the bitumen as they contact. The method works but much of the steam is wasted and bitumen droplets are often carried by the exiting steam and deposited on nearby vehicles, facilities and equipment.

SUMMARY OF THE INVENTION

The invention provides an inline steam heater to supply heated steam to a bitumen froth by direct contact of the steam to the bitumen froth resulting in superior in efficiency and environmental friendliness than processes heretofore employed.

In one of its aspects, the invention provides an inline bitumen froth steam heater system including at least one steam injection stage, each steam injection stage followed by a mixing stage. Preferably, the mixing stage obtains a mixing action using static mixing devices, for example, using baffle partitions in a pipe. In operation, the invention heats the bitumen froth and facilitates froth deaeration by elevating the froth temperature. In operation the bitumen froth heating is preferably obtained without creating downstream problems such as emulsification or live steam entrainment. The froth heater is a multistage unit that injects and thoroughly mixes the steam with bitumen resulting in solution at homogenous temperature. Steam heated to 300 degrees Fahrenheit is injected directly into a bitumen froth flowing in a pipeline where initial contact takes place. The two incompatible substances are then forced through a series of static mixers, causing the steam to contact the froth. The mixer surface area and rotating action of the material flowing through the static mixer breaks the components up into smaller particles, increasing contact area and allowing the steam to condense and transfer its heat to the froth. The reduction in bitumen viscosity also allows the release of entrapped air.

In another aspect, there is provided an apparatus for heating a bitumen froth by steam, the apparatus comprising: a heater body comprising a bitumen froth inlet for receiving the bitumen froth, a steam inlet for receiving the steam, and a mixture outlet; and a static mixer body having first and second spaced ends and forming an enclosed passageway extending between the first and second ends, wherein the first end is in communication with the mixture outlet, the static mixer body supporting a plurality of baffles disposed within the enclosed passageway to effect a mixing action of the bitumen froth and the steam flowing through the enclosed passageway thereof to form a heated feed, wherein the steam inlet is disposed to inject the steam into the heater body towards the enclosed passageway in a direction generally parallel to a longitudinal axis of the enclosed passageway, and wherein the apparatus is operably configured to: (a) force the bitumen froth and the steam through the mixture outlet into the enclosed passageway, (b) force the bitumen froth and the steam through the enclosed passageway from the first end to the second end so as to cause the steam to contact the bitumen froth so as to form the heated feed, and (c) force all of the heated feed to exit through the second end of the static mixer body.

In another aspect, the apparatus may have the baffles are disposed within the static mixer body to impart a lateral, radial, tangential or circumferential directional component to the bitumen froth and the steam, the directional component changing repeatedly along a length of the enclosed passageway.

In various aspects, the apparatus may further comprise a steam flow control valve to control a rate of supplying the steam to the steam inlet from a steam source.

In various aspects, the apparatus may further comprise a first temperature transmitter disposed to measure a temperature of the heated feed exiting the enclosed passageway of the static mixer, wherein the steam flow control valve is responsive to the measured temperature of the heated feed.

In various aspects, the apparatus may further comprise a steam flow pressure control valve to control a pressure of the steam supplied to the steam inlet from a steam source.

In further various aspects, the apparatus may further comprise a pressure transmitter disposed to measure the pressure of the steam supplied from the steam flow pressure control valve, wherein the steam flow pressure control valve is operative to maintain the steam supplied to the steam inlet at a predetermined pressure in response to the measured pressure of the steam supplied from the steam flow pressure control valve.

The apparatus may further comprise (a) a condensate source and a steam source; (b) a condensate mixer operably configured to mix a condensate from the condensate source with the steam from the steam source for modulating a temperature of the steam supplied to the steam inlet; and (c) a condensate flow control valve to control a supply of the condensate to the condensate mixer.

In various aspects, the apparatus may yet further comprise a second temperature transmitter disposed to measure the temperature of the steam supplied to the steam inlet and relay a representation of the measured temperature of the steam to the condensate flow control valve, wherein the condensate flow control valve is operative to control the supply of the condensate to the steam supplied to the steam inlet.

In various aspects, the steam supplied to the steam inlet comprises saturated steam. In various aspects, the steam supplied to the steam inlet has a temperature of about 300°F and a pressure of about 90 psi.

In various aspects, the heated feed has a substantially uniform temperature, which may be about 190°F.

In another aspect, there is provided an apparatus for heating a bitumen froth by steam, the apparatus comprising: a heater body comprising walls defining a chamber of the heater body, a first inlet for introducing the bitumen froth having a bitumen froth flow into the chamber, and injector inlet for introducing the steam having a steam flow into the chamber, and a heater outlet; and a static mixer body comprising: a mixer inlet and a mixer outlet, the static mixer body forming an enclosed passageway extending between the mixer inlet and the mixer outlet, the mixer inlet being in fluid communication with the heater outlet for receiving the bitumen froth and the steam; and mixing means for mixing the bitumen froth and the steam flowing through the enclosed passageway of the static mixer body to form a heated feed, wherein the heater body and the static mixer body are operably configured to: (a) force the bitumen froth and the steam through the enclosed passageway from the mixer inlet to the mixer outlet so as to cause the steam to contact the bitumen froth and form the heated feed, and (b) force all of the heated feed to exit through the mixer outlet.

In various aspects, the mixing means impart a lateral, radial, tangential or circumferential directional component to the bitumen froth and the steam, the directional component changing repeatedly along a length of the enclosed passageway. In various aspects, the mixing means comprises a plurality of static mixer barriers forming partial walls disposed within the enclosed passageway.

In various aspects, the steam injected by the injector inlet has a temperature of about 300°F to about 500°F and a pressure of about 90 to 150 psi, and the heated feed produced by the static mixer body has a temperature of about 190°F.

In various aspects, the apparatus further comprises a steam flow control valve to control a rate of the steam flow into the chamber and a first temperature

transmitter disposed to measure a temperature of the heated feed exiting the static mixer body, wherein the heater body, the static mixer body, the steam flow control valve and the first temperature transmitter form a first closed loop control system, the steam flow control valve being responsive to the measured temperature of the heated feed by the first temperature transmitter.

In various aspects, the apparatus further comprises a steam flow pressure control valve to control a pressure of the steam flow into the chamber and a pressure transmitter disposed to measure the pressure of the steam flow from the pressure control valve, wherein the heater body, the static mixer body, the steam flow control valve, the temperature transmitter, the steam flow pressure control valve and the pressure transmitter form a second closed loop control system, the steam flow pressure control valve being responsive to the measured pressure.

In various aspects, the apparatus further comprises a condensate flow control valve to control the supply of a condensate to the steam for modulating the temperature of the steam for injecting by the injector inlet and a second temperature transmitter disposed to measure the temperature of the steam supplied to the injector inlet, wherein the heater body, the static mixer body, the steam flow control valve, the first temperature transmitter, the steam flow pressure control valve, the pressure transmitter, the condensate flow control valve, and the second temperature transmitter form a third closed loop control system, the condensate flow control valve being responsive to the temperature of the steam measured by the second temperature transmitter.

The mixing means may comprise a baffle disposed across the enclosed passageway, and the steam supplied to the injector inlet comprises saturated steam.

In another aspect, there is provided a method to heat a bitumen froth by steam. In this aspect, the method comprises (a) providing a source of steam;

(b) contacting the steam with a bitumen froth flow within an enclosed passageway of an inline body; (c) forcing the bitumen froth flow and the steam through the enclosed passageway so as to cause the steam to mix with the bitumen froth flow to form a heated feed having a generally uniform temperature; and (d) forcing all of the heated feed to exit through an outlet of the enclosed passageway.

In various aspects, the method may further comprise controlling the rate of steam supply of the steam contacting the bitumen froth flow to control the generally uniform temperature of the heated feed.

In other aspects, the method may also comprise (a) measuring the generally uniform temperature of the heated feed; and (b) varying the rate of steam supply of the steam contacting the bitumen froth flow to obtain a target uniform temperature of the heated feed. In other aspects, the method may further comprise controlling the pressure of the steam supply of the steam contacting the bitumen froth flow. In yet other aspects, the method may further comprise (a) measuring the controlled pressure of the steam supply; and (b) varying the rate of the steam supply to obtain a target pressure of the steam contacting the bitumen froth flow.

In various other aspects, the method may further comprise providing a condensate to the steam supply to control the temperature of the steam contacting the bitumen froth flow, measuring the controlled temperature of the steam supply; and varying the rate of providing condensate to the steam supply to obtain a target temperature of the steam contacting the bitumen froth flow.

In yet another aspect there is provided a method to heat a bitumen froth by steam. In this aspect, the method comprises (i) providing a source of steam; (ii) controlling the pressure of the steam; (iii) controlling the temperature of the steam; (iv) controlling the rate of supply of the steam; (v) contacting the steam

with a bitumen froth flow within an enclosed passageway of an inline heater body; (vi) forcing the bitumen froth flow and the steam through the enclosed passageway so as to cause the steam to mix with the bitumen froth flow to form a heated feed having a generally uniform temperature; and (vii) forcing all of the heated feed to exit through an outlet of the enclosed passageway. Step (vii) may also further comprise forcing all of the heated feed to exit through the outlet when the enclosed passageway is disposed generally parallel to the horizontal axis.

The method may further comprise imparting a generally lateral, radial, tangential or circumferential directional component to the bitumen froth flow and the steam within the enclosed passageway, the directional component changing repeatedly along a length of the enclosed passageway.

The steam contacting the bitumen froth flow has a temperature of about 300°F to about 500°F and a pressure of about 90 to 150 psi, and the heated feed has a temperature of about 190°F. The steam contacting the bitumen froth flow may consist of saturated steam.

In yet another aspect, there is provided a method of heating a bitumen froth using steam, the method comprising: (a) introducing bitumen froth and the steam into a chamber of an heater body, the steam having a steam flow; (b) causing the bitumen froth and the steam to pass from the chamber into an enclosed passageway of a static mixing body; (c) forcing the bitumen froth and the steam through the enclosed passageway so as to cause the steam to mix with the bitumen froth and form a heated feed; and (d) forcing substantially all of the heated feed to exit through an outlet of the enclosed passageway.

In this aspect, the method may further comprise forcing all of the heated feed to exit through the outlet when the enclosed passageway is disposed generally parallel to the horizontal axis, imparting a generally lateral, radial, tangential or circumferential directional component to the bitumen froth and

the steam within the enclosed passageway, the directional component changing repeatedly along a length of the enclosed passageway, blocking a portion of a flow of the bitumen froth and the steam within the enclosed passageway using a plurality of static mixer barriers forming partial walls disposed within the enclosed passageway or a combination thereof.

The steam introduced into the chamber may have a temperature of about 300°F to about 500°F and a pressure of about 90 to 150 psi, and the heated feed produced by the static mixer body may have a temperature of about 190°F. The steam introduced into the chamber may consist of saturated steam.

Other aspects, features and advantages of the present invention will be apparent from the accompanying drawings, and from the detailed description that follows below. As will be appreciated, the invention is capable of other and different embodiments, and its several details are capable of modifications in various respects, all without departing from the invention. Accordingly, the drawings and description of the preferred embodiments are illustrative in nature and not restrictive.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a functional block diagram of a preferred embodiment of a bitumen froth heating process arrangement of the invention.

Figure 2 is a cross section elevation view of an inline steam heater and mixer stage of Figure 1.

Figure 2a is an elevation view of a baffle plate of Figure 2.

DETAILED DESCRIPTION OF THE INVENTION

In accordance with a preferred embodiment of the process two inputs components, namely, bitumen froth and steam, are contacted to produce an output homogenous bitumen product heated to a temperature of 190°F. The input bitumen froth component 10 is supplied at about 150°F. In a pilot plant implementation the input bitumen froth component is supplied via a 28 inch pipeline at a rate of about 10,000 barrels per hour. The input steam component 12 is supplied as a superheated steam at about 500°F and at 150 psi.

Figure 1 shows a functional block diagram of a preferred embodiment of a bitumen froth heating apparatus arranged in accordance with the invention. The input steam component 12 is supplied to a pressure control valve 14 which reduces the pressure to a set point pressure, which is typically about 90 psi. A pressure transmitter 16 is provided to monitor the pressure of the steam downstream from the pressure control valve 14 to provide a closed loop control mechanism to control the pressure of the steam at the set point pressure. The pressure controlled steam is supplied to a temperature control valve 18 that is used to control the supply of condensate 20 to cool the steam to its saturation point, which is about 300°F at the controlled pressure of 90 psi. A temperature sensor 22 monitors the steam temperature downstream from the temperature control valve to provide a closed loop control mechanism to control the temperature of the steam at the temperature set point setting.

The optimum parameters for steam injection vary so a computer 24 executes a compensation program to review the instantaneously supplied instrumentation pressure 26 and temperature 28 measurements and adjusts inlet steam pressure and temperature set point settings as required. A pressure sensor 29 measures the pressure of the input bitumen component 10 to provide the compensation program executing on computer 24 with this parameter to facilitate optimum control of the parameters for steam injection.

To provide a greater capacity for supply or transfer of heat to the bitumen froth component, the pressure and temperature controlled steam 30 is split into two steam sub-streams 30a, 30b. Each steam sub-stream is supplied to a respective steam injector 32a, 32b and the steam injectors 32a and 32b are arranged in series to supply heat to the bitumen froth component stream 10. While two steam injectors arranged in series are shown in the figure, it will be understood that the bitumen froth component stream 10 could equally well be split into two sub-streams and each bitumen froth component sub-stream supplied to a respective steam injector arranged in parallel. Moreover, it will be understood that more than two sub-streams of either the steam component or the bitumen component streams could be provided if process flow rates require. A suitable inline steam injector 32a, 32b is manufactured by Komax Systems Inc. located in California, USA.

An inline steam injection heater works well in heating water compatible fluids but bitumen is not water compatible so additional mixing is advantageous to achieve uniform fluid temperature. Consequently, in the preferred embodiment depicted in Figure 1, the bitumen and steam material flow mixture is passed through an inlet baffle 34a, 34b downstream from the respective steam injector 32a, 32b. The inlet baffle, which is shown more clearly in Figure 2a, directs the material flow mixture downward to initiate the mixing action of the steam component with the bitumen froth component.

As is indicated by the arrows in Fig. 2, following the initial contact of the steam with the bitumen flowing in a pipeline, the two incompatible substances are then forced through the baffle 34 and through the series of static mixers 36 causing the steam to contact the froth.

Mixing of the material flow continues by passing the material flow through static mixers 36a and 36b respectively.

As seen most clearly in Figure 2, the static mixers provide baffles 40 arranged along the interior volume of each static mixer to effect a mixing action of the material flowing through the static mixer. The mixing action of the material flow through the static mixer is provided by arranging the baffles 40 within the static mixer to impart a lateral, radial, tangential and/or circumferential directional component to the material flow that changes repeatedly along the length of the static mixer. Different static mixer designs and baffle arrangements may be used to advantage in mixing the steam component with the bitumen froth component.

A temperature transmitter 42 is located downstream of the mixers 36. The temperature of the material flow exiting the static mixer is measured by the temperature transmitter 42 and is used to control the rate of supply of steam to the inline steam injector 32 by the associated flow control valve 44. In this manner, a closed loop control system is provided to control the supply of the steam component to the bitumen froth component to obtain a set point or target output temperature of the material flow leaving the static mixer 36.

Referring again to Figure 1, the heating system shown in Figure 2 is arranged with a temperature transmitter 42a, 42b located downstream of each respective mixer 36a, 36b. The temperature of the material exiting each static mixer is measured by the temperature transmitter and is used to control the rate of supply of steam to the inline steam injectors 32a, 32b by the associated flow control valve 44a, 44b respectively. In this manner, a closed loop control system is provided to control the supply of the steam component to the bitumen froth component to obtain a set point or target output temperature of the material flow leaving each static mixer stage 36a, 36b.

The water content of the bitumen froth component 10 can range form 30% to 50%. In a pilot plant implementation of the preferred embodiment, each inline steam heater 32a, 32b was found to be capable of heating about 10,000 barrels per hour of bitumen froth by about 30°F utilizing about 80,000 pounds per hour of steam. By way of comparison to conventional process apparatus, the atmospheric tank method would use about 125,000 pounds of steam to achieve a similar heat transfer.

After heating, the heated bitumen froth is delivered to a plant for processing. To facilitate material flow rate co-ordination with the processing plant, the heated bitumen froth may be discharged to a downstream holding tank 46, preferably above the liquid level 48. The heated, mixed bitumen froth releases entrained air, preferably, therefore, the holding tank is provided with a vent 50 to disperse the entrapped air released from the bitumen froth. To maintain the temperature of the heated bitumen froth in the holding tank 46, a pump 50 and recycle line 52 are

provided, which operate to recycle the hot bitumen froth from the holding tank to the process inlet of the heaters.

The invention has been described with reference to preferred embodiments. Those skilled in the art will perceive improvements, changes, and modifications. The scope of the invention including such improvements, changes and modifications is defined by the appended claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. An apparatus for heating a bitumen froth by steam, the apparatus comprising:

a heater body comprising a bitumen froth inlet for receiving the bitumen froth, a steam inlet for receiving the steam, and a mixture outlet; and

a static mixer body having first and second spaced ends and forming an enclosed passageway extending between the first and second ends, wherein the first end is in communication with the mixture outlet, the static mixer body supporting a plurality of baffles disposed within the enclosed passageway to effect a mixing action of the bitumen froth and the steam flowing through the enclosed passageway thereof to form a heated feed,

wherein the steam inlet is disposed to inject the steam into the heater body towards the enclosed passageway in a direction generally parallel to a longitudinal axis of the enclosed passageway, and

wherein the apparatus is operably configured to: (a) force the bitumen froth and the steam through the mixture outlet into the enclosed passageway, (b) force the bitumen froth and the steam through the enclosed passageway from the first end to the second end so as to cause the steam to contact the bitumen froth so as to form the heated feed, and (c) force all of the heated feed to exit through the second end of the static mixer body.

2. The apparatus of claim 1 wherein the baffles are disposed within the static mixer body to impart a lateral, radial, tangential or circumferential

directional component to the bitumen froth and the steam, the directional component changing repeatedly along a length of the enclosed passageway.

3. The apparatus of claim 1 or 2 further comprising a steam flow control valve to control a rate of supplying the steam to the steam inlet from a steam source.

4. The apparatus of claim 3 further comprising a first temperature transmitter disposed to measure a temperature of the heated feed exiting the enclosed passageway of the static mixer, wherein the steam flow control valve is responsive to the measured temperature of the heated feed.

5. The apparatus of claim 1 or 2 further comprising a steam flow pressure control valve to control a pressure of the steam supplied to the steam inlet from a steam source.

6. The apparatus of claim 5 further comprising a pressure transmitter disposed to measure the pressure of the steam supplied from the steam flow pressure control valve, wherein the steam flow pressure control valve is operative to maintain the steam supplied to the steam inlet at a predetermined pressure in response to the measured pressure of the steam supplied from the steam flow pressure control valve.

7. The apparatus of claim 1 or 2 further comprising:

a condensate source and a steam source;

a condensate mixer operably configured to mix a condensate from the condensate source with the steam from the steam source for modulating a temperature of the steam supplied to the steam inlet; and

a condensate flow control valve to control a supply of the condensate to the condensate mixer.

8. The apparatus of claim 7 further comprising a second temperature transmitter disposed to measure the temperature of the steam supplied to the steam inlet and relay a representation of the measured temperature of the steam to the condensate flow control valve, wherein the condensate flow control valve is operative to control the supply of the condensate to the steam supplied to the steam inlet.

9. The apparatus of any one of claims 1 to 8 wherein the steam supplied to the steam inlet comprises saturated steam.

10. The apparatus of claim 9 wherein the steam supplied to the steam inlet has a temperature of about 300°F and a pressure of about 90 psi.

11. The apparatus of claim 9 or 10 wherein the heated feed has a substantially uniform temperature.

12. The apparatus of claim 11 wherein the substantially uniform temperature is about 190°F.

13. An apparatus for heating a bitumen froth by steam, the apparatus comprising:

a heater body comprising walls defining a chamber of the heater body, a first inlet for introducing the bitumen froth having a bitumen froth flow into the chamber, an injector inlet for introducing the steam having a steam flow into the chamber, and a heater outlet; and

a static mixer body comprising:

a mixer inlet and a mixer outlet, the static mixer body forming an enclosed passageway extending between the mixer inlet and the mixer outlet, the mixer

inlet being in fluid communication with the heater outlet for receiving the bitumen froth and the steam; and

mixing means for mixing the bitumen froth and the steam flowing through the enclosed passageway of the static mixer body to form a heated feed,

wherein the heater body and the static mixer body are operably configured to: (a) force the bitumen froth and the steam through the enclosed passageway from the mixer inlet to the mixer outlet so as to cause the steam to contact the bitumen froth and form the heated feed, and (b) force all of the heated feed to exit through the mixer outlet.

14. The apparatus of claim 13 wherein the mixing means impart a lateral, radial, tangential or circumferential directional component to the bitumen froth and the steam, the directional component changing repeatedly along a length of the enclosed passageway.

15. The apparatus of claim 13 or 14 wherein the mixing means comprises a plurality of static mixer barriers forming partial walls disposed within the enclosed passageway.

16. The apparatus of claim 13, 14 or 15 wherein the steam injected by the injector inlet has a temperature of about 300°F to about 500°F and a pressure of about 90 to 150 psi.

17. The apparatus of any one of claims 13 to 16 wherein the heated feed produced by the static mixer body has a temperature of about 190°F.

18. The apparatus of any one of claims 13 to 17 further comprising a steam flow control valve to control a rate of the steam flow into the chamber

and a first temperature transmitter disposed to measure a temperature of the heated feed exiting the static mixer body, wherein the heater body, the static mixer body, the steam flow control valve and the first temperature transmitter form a first closed loop control system, the steam flow control valve being responsive to the measured temperature of the heated feed by the first temperature transmitter.

19. The apparatus of claim 18 further comprising a steam flow pressure control valve to control a pressure of the steam flow into the chamber and a pressure transmitter disposed to measure the pressure of the steam flow from the pressure control valve, wherein the heater body, the static mixer body, the steam flow control valve, the temperature transmitter, the steam flow pressure control valve and the pressure transmitter form a second closed loop control system, the steam flow pressure control valve being responsive to the measured pressure.

20. The apparatus of claim 19 further comprising a condensate flow control valve to control the supply of a condensate to the steam for modulating the temperature of the steam for injecting by the injector inlet and a second temperature transmitter disposed to measure the temperature of the steam supplied to the injector inlet, wherein the heater body, the static mixer body, the steam flow control valve, the first temperature transmitter, the steam flow pressure control valve, the pressure transmitter, the condensate flow control valve, and the second temperature transmitter form a third closed loop control system, the condensate flow control valve being responsive to the temperature of the steam measured by the second temperature transmitter.

21. The apparatus of claim 13 wherein the mixing means comprises a baffle disposed across the enclosed passageway.

22. The apparatus of claim 13, 14 or 15 wherein the steam supplied to the injector inlet comprises saturated steam.

23. A method to heat a bitumen froth by steam comprising:

providing a source of steam;

contacting the steam with a bitumen froth flow within an enclosed passageway of an inline body;

forcing the bitumen froth flow and the steam through the enclosed passageway so as to cause the steam to mix with the bitumen froth flow to form a heated feed having a generally uniform temperature; and

forcing all of the heated feed to exit through an outlet of the enclosed passageway.

24. The method of claim 23 further comprising controlling the rate of steam supply of the steam contacting the bitumen froth flow to control the generally uniform temperature of the heated feed.

25. The method of claim 23 or 24 further comprising:

measuring the generally uniform temperature of the heated feed; and

varying the rate of steam supply of the steam contacting the bitumen froth flow to obtain a target uniform temperature of the heated feed.

26. The method of claim 23, 14 or 25 further comprising controlling the pressure of the steam supply of the steam contacting the bitumen froth flow.

27. The method of claim 23, 24, 25 or 26 further comprising:

measuring the controlled pressure of the steam supply; and

varying the rate of the steam supply to obtain a target pressure of the steam contacting the bitumen froth flow.

28. The method of any one of claims 23 to 27 further comprising providing a condensate to the steam supply to control the temperature of the steam contacting the bitumen froth flow.

29. The method of claim 28 further comprising:

measuring the controlled temperature of the steam supply; and

varying the rate of providing condensate to the steam supply to obtain a target temperature of the steam contacting the bitumen froth flow.

30. A method to heat a bitumen froth by steam comprising:

(i) providing a source of steam;

(ii) controlling the pressure of the steam;

(iii) controlling the temperature of the steam;

(iv) controlling the rate of supply of the steam;

(v) contacting the steam with a bitumen froth flow within an enclosed passageway of an inline heater body;

(vi) forcing the bitumen froth flow and the steam through the enclosed passageway so as to cause the steam to mix with the bitumen froth flow to form a heated feed having a generally uniform temperature; and

(vii) forcing all of the heated feed to exit through an outlet of the enclosed passageway.

31. The method of claim 30 wherein step (vii) further comprises forcing all of the heated feed to exit through the outlet when the enclosed passageway is disposed generally parallel to the horizontal axis.

32. The method of claim 30 or 31 further comprising imparting a generally lateral, radial, tangential or circumferential directional component to the bitumen froth flow and the steam within the enclosed passageway, the directional component changing repeatedly along a length of the enclosed passageway.

33. The method of claim 30, 31 or 32 wherein the steam contacting the bitumen froth flow has a temperature of about 300°F to about 500°F and a pressure of about 90 to 150 psi.

34. The method of any one of claims 30 to 33 wherein the heated feed has a temperature of about 190°F.

35. The method of any one of claims 30 to 34 wherein the steam contacting the bitumen froth flow consists of saturated steam.

36. A method of heating a bitumen froth using steam, the method comprising:

(a) introducing bitumen froth and the steam into a chamber of an heater body, the steam having a steam flow;

(b) causing the bitumen froth and the steam to pass from the chamber into an enclosed passageway of a static mixing body;

(c) forcing the bitumen froth and the steam through the enclosed passageway so as to cause the steam to mix with the bitumen froth and form a heated feed; and

(d) forcing substantially all of the heated feed to exit through an outlet of the enclosed passageway.

37. The method of claim 36 further comprising forcing all of the heated feed to exit through the outlet when the enclosed passageway is disposed generally parallel to the horizontal axis.

38. The method of claim 36 or 37 further comprising imparting a generally lateral, radial, tangential or circumferential directional component to the bitumen froth and the steam within the enclosed passageway, the directional component changing repeatedly along a length of the enclosed passageway.

39. The method of claim 36 or 37 further comprising blocking a portion of a flow of the bitumen froth and the steam within the enclosed passageway using a plurality of static mixer barriers forming partial walls disposed within the enclosed passageway.

40. The method of any one of claims 36 to 39 wherein the steam introduced into the chamber has a temperature of about 300°F to about 500°F and a pressure of about 90 to 150 psi.

41. The method of any one of claims 36 to 40 wherein the heated feed produced by the static mixer body has a temperature of about 190°F.

42. The method of any one of claims 36 to 41 wherein the steam introduced into the chamber consists of saturated steam.

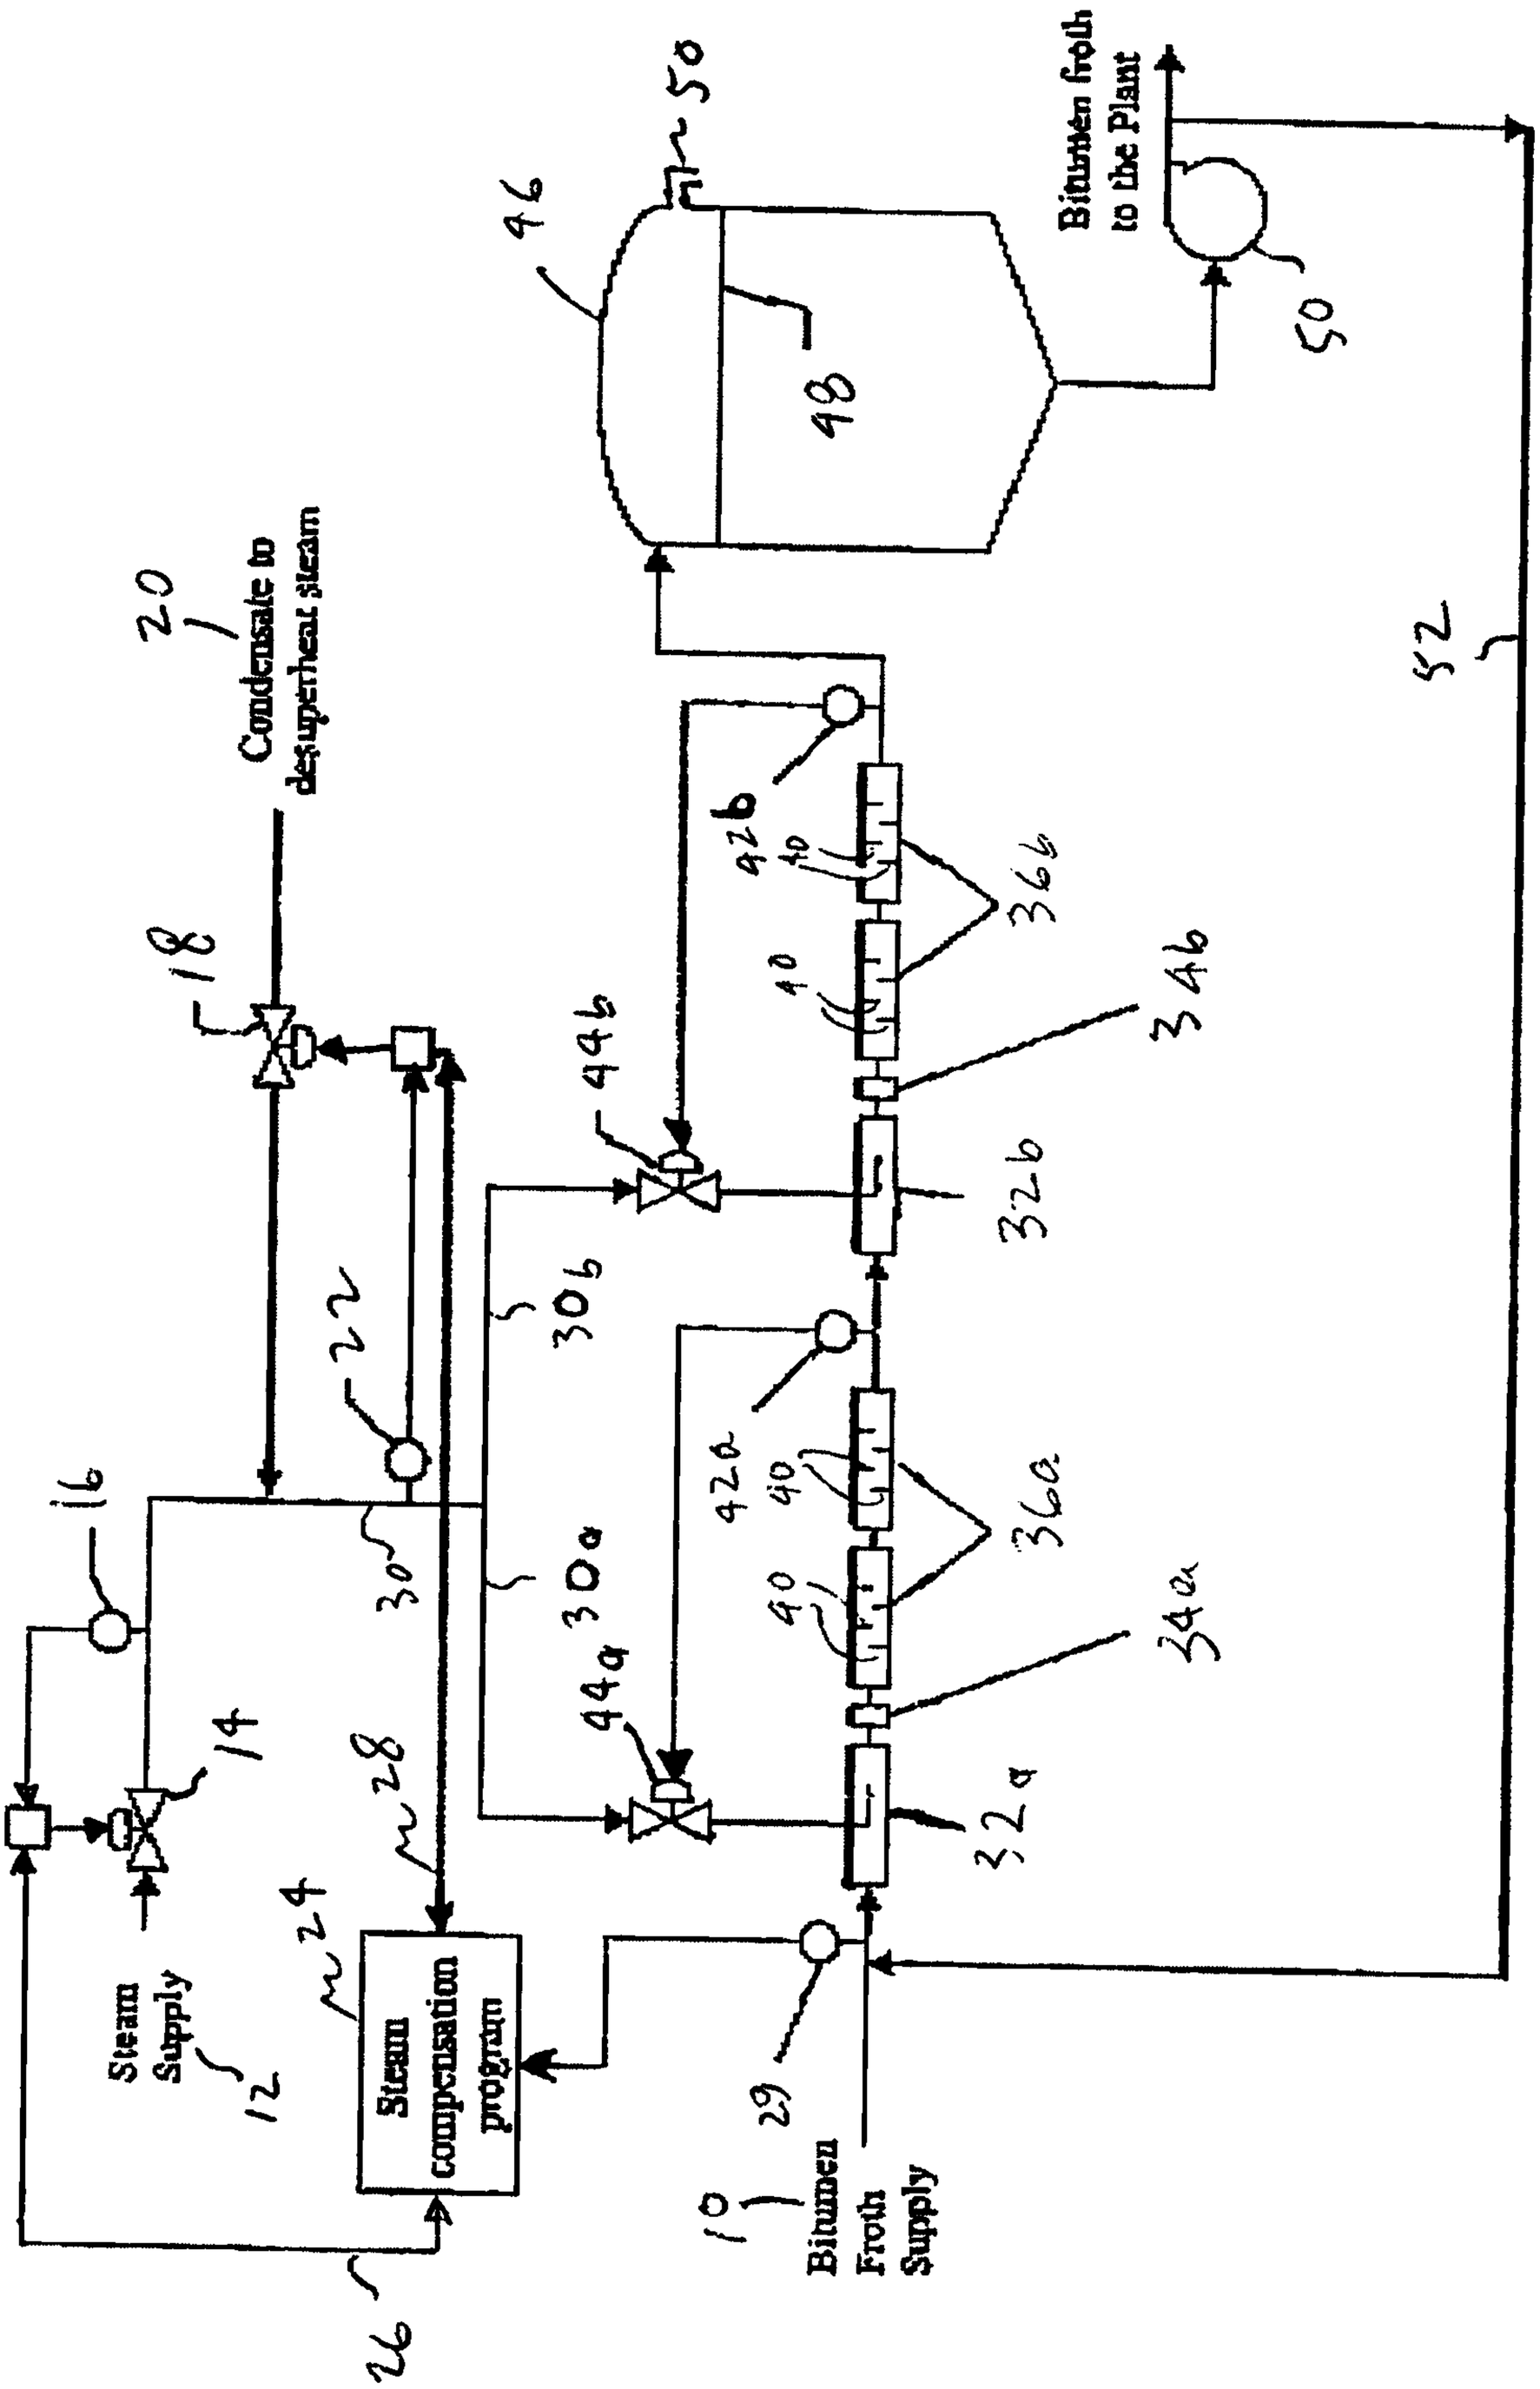

Bitumen froth to the Plant
Condensate to desuperheat steam
Steam Supply
Steam compensation program
Bitumen Froth Supply
10
12
14
16
18
20
22
24
26
28
29
30
30a
30b
32a
32b
34a
34b
36a
36b
40
42a
42b
44a
44b
46
48
50
52

Fig. 1

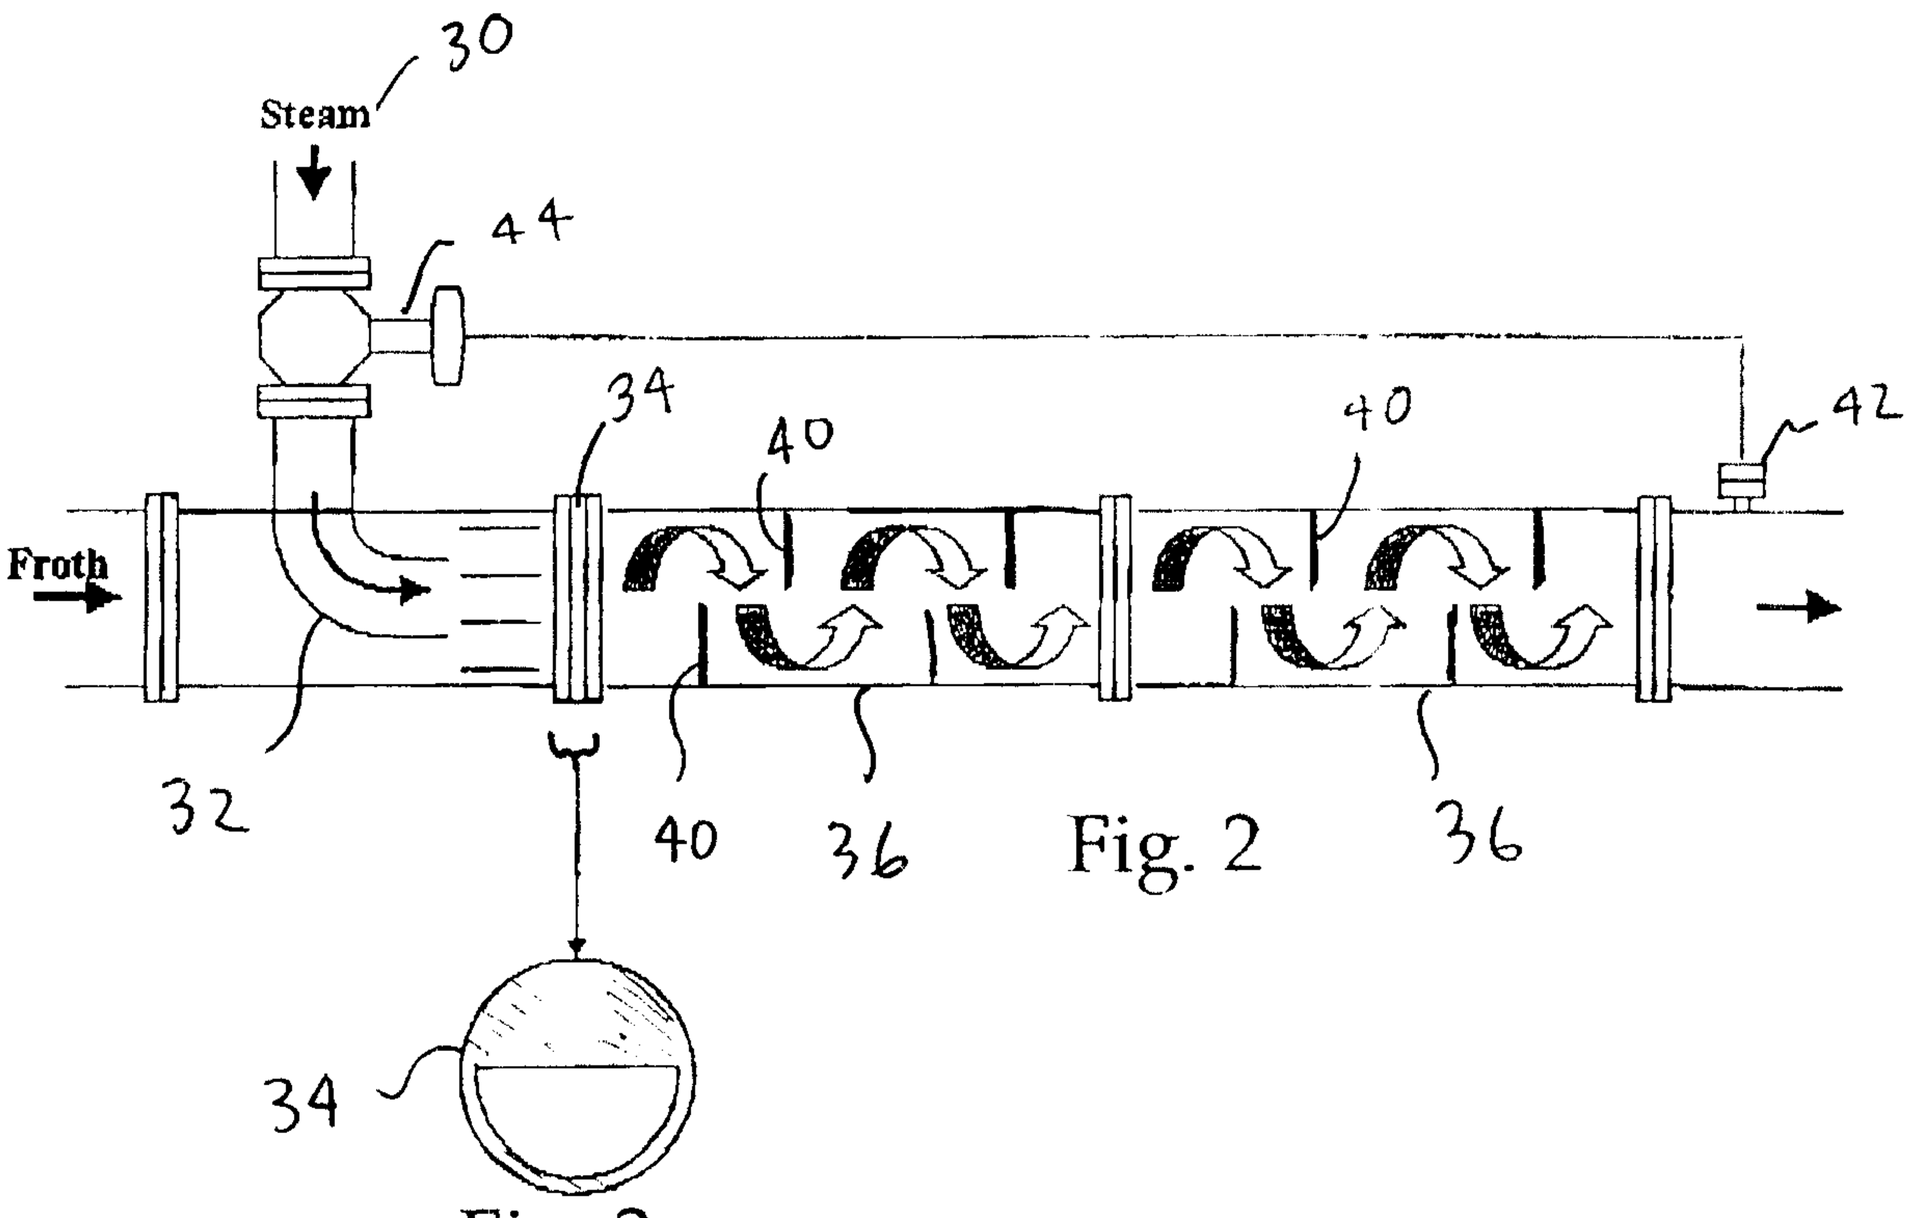
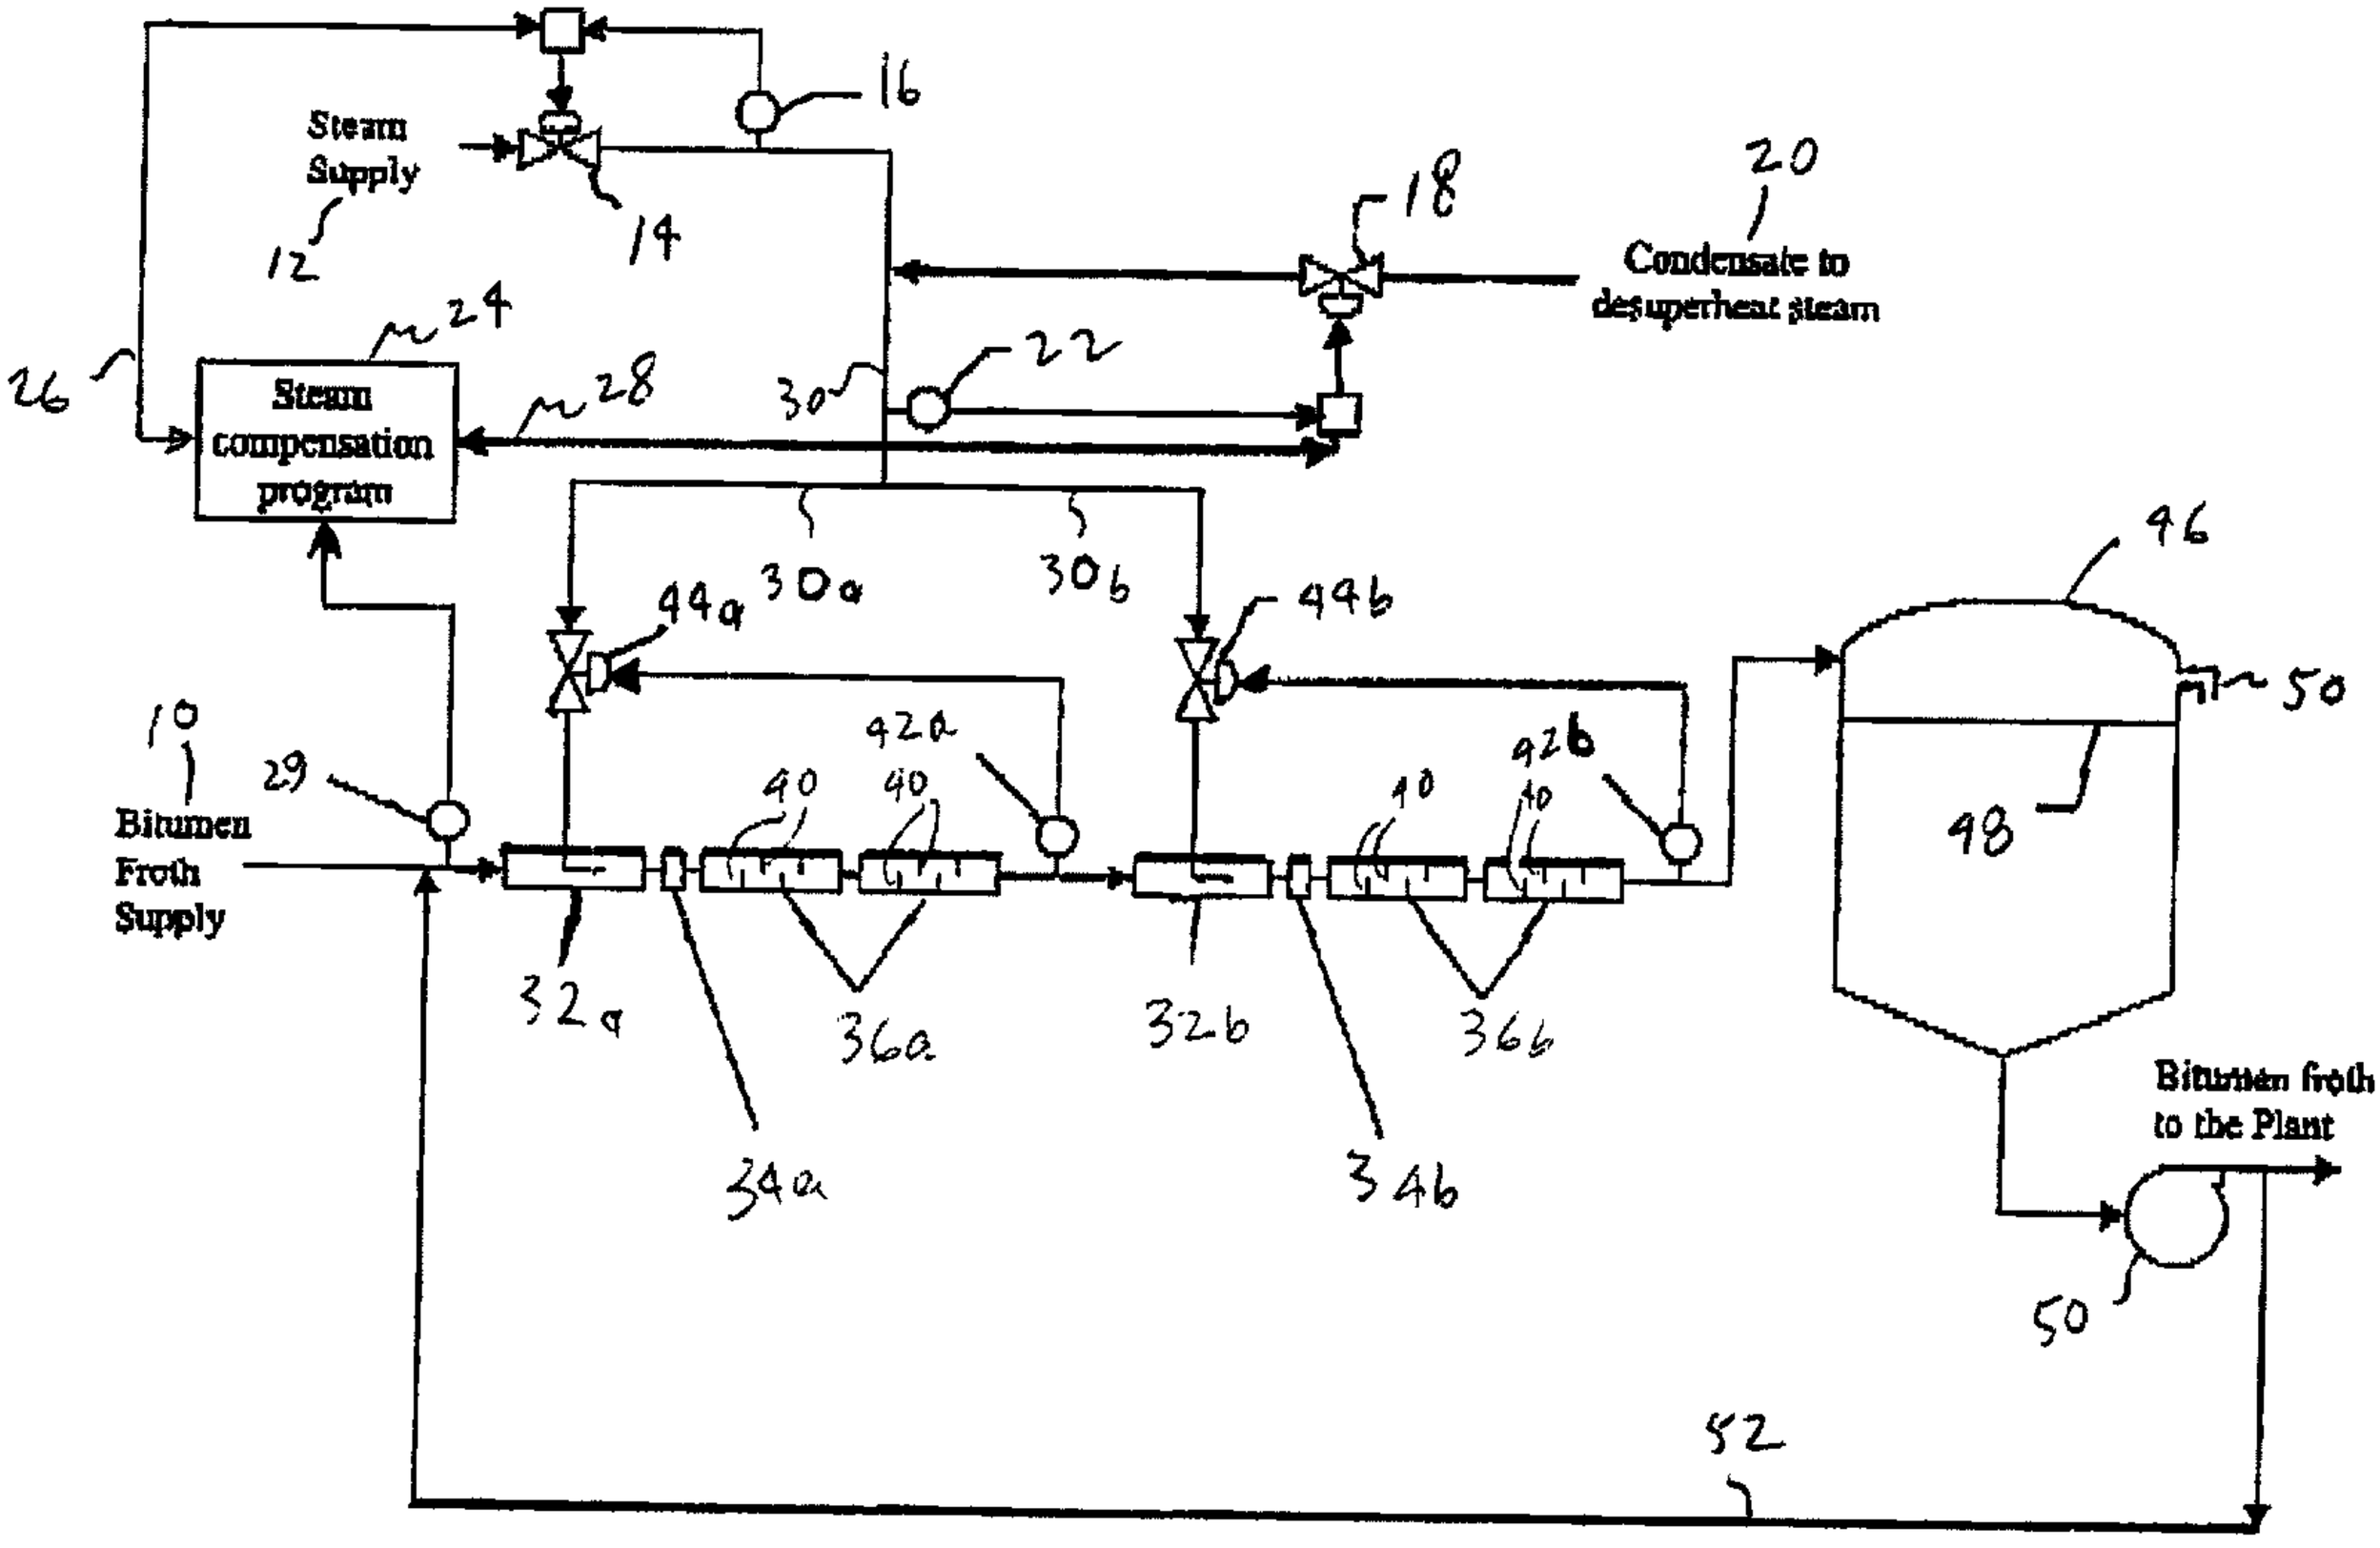


Fig. 2

Fig. 2a


Steam Supply
12
14
16
18
20
Condensate to desuperheat steam
22
24
26
28
30
Steam compensation program
30a
30b
44a
44b
42a
42b
40
40
40
40
10
10
29
Bitumen Froth Supply
32a
34a
36a
32b
34b
36b
46
48
50
Bitumen froth to the Plant
50
52