

## CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
27 December 2007 (27.12.2007)

PCT

(10) International Publication Number  
WO 2007/149513 A2(51) International Patent Classification:  
A61N 1/00 (2006.01)Wen-der Road, Neihu District, Taipei (TW). SCOGGINS,  
Troy [US/US]; 14061 Capewood Lane, San Diego, CA  
92128 (US).

(21) International Application Number:

PCT/US2007/014428

(74) Agents: CHRISTENSEN, Douglas, J. et al.; Patterson,  
Thuente, Skaar & Christensen, P.A., 4800 Ids Center, 80  
South Eighth Street, Minneapolis, MN 55402-2100 (US).

(22) International Filing Date: 19 June 2007 (19.06.2007)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,  
ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,  
IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,  
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,  
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,  
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,  
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,  
ZM, ZW.

(26) Publication Language: English


(30) Priority Data:

60/814,824	19 June 2006 (19.06.2006)	US
60/844,570	14 September 2006 (14.09.2006)	US
60/903,488	26 February 2007 (26.02.2007)	US

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,(71) Applicant (for all designated States except US): ENTE-  
GRIS, INC. [US/US]; 3500 Lyman Boulevard, Chaska,  
MN 55318 (US).

[Continued on next page]

(54) Title: SYSTEM FOR PURGING RETICLE STORAGE

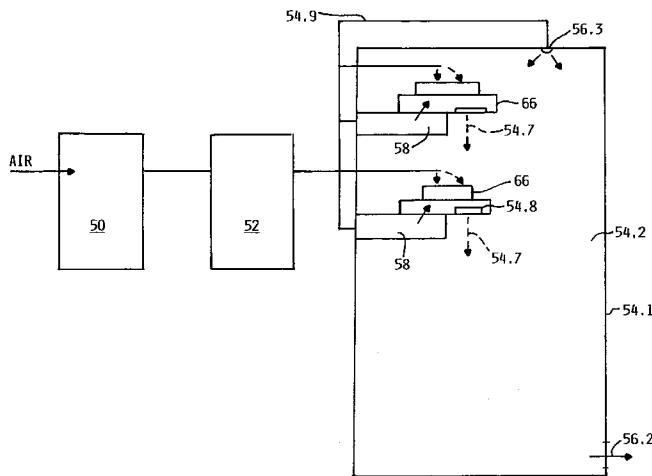

**(57) Abstract:** The present invention provides a method, system, and components for protecting reticles and specifically for minimizing haze formation on reticles during storage and use. By substantially continually maintaining a purge in a storage housing having a reduced humidity level on reticles or by temporarily storing the reticle in a container in proximity to a desiccant or getter when not being purged, haze formation can be eliminated, minimized, or sufficiently controlled. Moreover, a filter media in the container may be positioned to be "recharged" during the substantially continual purging of the reticle, a reduced desirable humidity level can be readily maintained in the reticle container when the container is not currently being purged. Additionally, the system of the invention can comprise an ionizer associated with the purge system. For example, the ionizer can be associated with at least one of the plurality of purge lines of the purge system. The system of the invention can also include a purge gas source connected to the purge system that comprises a source of CDA or extra CDA. The storage housing can comprise a plurality of shelves that each include a plurality of reticle storage receptacles.

WO 2007/149513 A2



PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(48) Date of publication of this corrected version:**

14 February 2008

**Published:**

— *without international search report and to be republished  
upon receipt of that report*      **(15) Information about Correction:**  
see Notice of 14 February 2008

## SYSTEM FOR PURGING RETICLE STORAGE

### RELATED APPLICATIONS

This application claims priority to the following U.S. provisional applications:  
5 U.S. Application No. 60/814,824 filed June 19, 2006; U.S. Application No. 60/844,570, filed September 14, 2006; and U.S. Application No. 60/903,488, filed February 26, 2007. All of the aforementioned Applications are hereby incorporated by reference herein in their entirety.

10

### BACKGROUND OF THE INVENTION

Particulate and airborne molecular contaminants (AMC) pose considerable problems in semiconductor manufacturing facilities. These contaminants can cause reticle defects such as hazing. In general, reticle pods are used to protect reticles from these contaminants during storage and transport. Nonetheless, accumulation of these 15 contaminants is common in reticle pods, which can degrade overall reticle quality. With such accumulation, there exists the opportunity for contaminants to enter the reticle pod when removing a reticle therefrom to use with a semiconductor tool. A typical approach for minimizing contaminants within a reticle pod involves periodic cleanings. One shortcoming with periodic cleanings is the potential for decreased manufacturing 20 efficiencies.

Purging of wafers and reticles with nitrogen is known. Purging with nitrogen can eliminate contaminants in the reticle containment but presents problems in that nitrogen needs to be contained and controlled. Although nitrogen is not considered toxic, a nitrogen enriched environment with reduced oxygen, asphyxiation can result. Thus, 25 leakages of nitrogen into space with personnel is not acceptable. Nitrogen enrichment can be detected only with sophisticated sensing equipment. Pure clean nitrogen is not inexpensive. Hazing can still occur with traditional nitrogen purging.

Thus, there remains a significant need for economically and safely protecting reticles during storage and transportation from contaminants and from hazing.

## SUMMARY OF THE INVENTION

5        The present invention provides a method, system, and components for protecting reticles and specifically for minimizing haze formation on reticles during storage and use. By substantially continually maintaining either a purge of preferably extra dry clean air having a reduced humidity level on reticles or by temporarily storing the reticle in a container in proximity to an adsorbent or dessicant media when not being purged, haze 10 formation can be eliminated, minimized, or sufficiently controlled. Moreover, a filter media in the container may be positioned to be “recharged” during the substantially continual purging of the reticle, a reduced desireable humidity level can be readily maintained in the reticle container when the container is not currently being purged.

15       The invention includes reticle storage comprising a storage housing having a plurality of reticles being stored or plurality of reticle storage receptacles, the receptacles configured for receiving reticle pods, for example reticle SMIF pods. The storage housing can comprise an inspection area or plurality of shelves that each include a plurality of reticle storage receptacles for reticle pods. The storage housing can be a reticle stocker, library or tool for transferring reticles from a reticle transport container, for example, a 20 reticle SMIF pod, to a tool library for use. The storage housing can also be or include a cleanroom, inspection area or combination thereof. In one embodiment, the purge system includes a plurality of purge lines with each purge line being connected to one of the reticle storage receptacles. A preferred embodiment of the invention can use a diffuser at the inlet of each reticle receptacle or reticle container for example, a reticle SMIF pod, 25 which causes a more even distribution of gas entering each pod from the associated purge line. The diffuser can be mounted at the inlet or injector port of the receptacle or container or at the outlet of the purge line, where gas flows into the pod. The discharge from the reticle pods is preferably through a filter open to the environment in the storage housing.

The system of the invention can also include a purge gas source connected to the purge system that comprises a source of clean dry air (CDA), extra CDA or dry inert gases such as nitrogen. A preferred embodiment of the invention uses extra CDA.

In one embodiment, each storage receptacle for a system of the invention can be 5 configured to receive a reticle pod, for example, container or carrier. The reticle pod comprises an inlet that connects at least one of the purge lines of the purge system. Exemplary reticle pods for a system of the invention can be based on standard mechanical interface (SMIF) carriers such as generally described in a U.S. Application claiming priority to U.S. Application No. 60/668,189, filed April 4, 2005 and entitled 10 "ENVIRONMENTAL CONTROL IN A RETICLE SMIF POD," the contents of which, including U.S. Application No. 60/668,189, are hereby incorporated by reference herein. Moreover, a reticle pod can include a conventional reticle comprising a quartz material. Preferably, a reticle pod for a system of the invention comprises a filter member. For example, the filter member can comprise particulate or absorptive media and combinations 15 thereof for protecting the reticle from contaminants during storage and transport.

The purge gas source for a system of the invention can also comprise a gas maintaining a concentration of less than about 10 parts per billion (ppb) of water in each reticle pod or other reticle storage system. By providing a storage environment substantially free of water, the risk of water being introduced into the tool with a reticle 20 can be substantially reduced or eliminated. Moreover, an environment substantially free of water can reduce the likelihood of contaminants or particulates disposing or forming on the reticle, particularly, quartz materials thereof. Consequently, the rate of haze formation in the optical system of a tool or on at least one reticle surface can be reduced. Haze can often be formed from ammonium sulfate, which can occur in the presence of sulfuric acid, 25 ammonia and water. Thus, by removing water from the reticle environment, a substantial reduction or elimination of the formation of ammonium sulfate on the reticle surface results.

The system of the invention can also comprise a semiconductor tool reticle storage bay. For example, the reticle storage bay can be associated with a conventional 30 semiconductor tool such as a photolithography tool. In one embodiment, the reticle storage bay can be connected to a bay purge line. The invention also provides a method

for purging reticle storage, which can be continuous. Preferably, the method includes providing a gas comprising CDA or, preferably, extra CDA, through at least one purge line to the reticle storage receptacle of the storage housing for a system of the invention. The invention also comprises systems and methods for purging reticle stockers, libraries, 5 tools, cleanrooms and inspection areas. Furthermore, a method of the invention can comprise introducing a gas to a reticle pod received by a reticle storage receptacle. A method can also comprise contacting a reticle disposed in the reticle pod with the gas comprising CDA or extra CDA.

10 Additionally, the system of the invention can comprise an ionizer associated with the purge system. For example, the ionizer can be associated with at least one of the plurality of purge lines of the purge system.

#### DESCRIPTION OF THE DRAWINGS

15 Other features and advantages of the invention may also be apparent from the following detailed description thereof, taken in conjunction with the accompanying drawings of which:

Figure 1a is an exploded view of an exemplary reticle pod for a system of the invention;

Figure 1b is a perspective view of the reticle pod of Figure 1a;

20 Figure 2 is a representation of exemplary filters for a reticle pod for a system of the invention and layers thereof;

Figure 3 is a representation of an exemplary filter of a reticle pod for a system of the invention;

25 Figure 4 is a representation of an exemplary purge system for a system of the invention;

Figure 5a is a representation of an exemplary purge system for a system of the invention;

Figure 5b is a representation of an exemplary purge system for a system of the invention;

Figure 6a is a plan view of exemplary shelves of a storage receptacle in accord with the invention;

5 Figure 6b is a plan view of an alternate storage receptacle configured as a U-shape with purge outlet ports on adjacent sides of the opening;

Figure 6c is an elevational view of a robotic gripper engaged with a reticle pod and with an airflow sensor;

Figure 6d is a plan view of the gripper, reticle pod and receptacle of Figure 6c;

10 Figure 7a is a plan view of exemplary reticle pods received by reticle storage receptacles associated with shelves of the type in Figure 6a;

Figure 7b is a side elevational view of three shelves stacked;

Figure 7c is a cross-sectional view of a reticle pod seat on a receptacle;

15 Figure 8A is a representation of an exemplary storage housing for a system of the invention;

Figure 8B is a top view of a carousel reticle stocker;

Figure 8C illustrates a detailed view of a diffuser for the purge system of a reticle stocker;

20 Figure 8D is a side view of another preferred embodiment of a purge system for a reticle stocker;

Figure 8E illustrates a vertically distributed purge system for a reticle storage;

Figure 9 is a representation of an exemplary enclosure comprising a plurality of storage housing of the type in Figure 8;

Figure 10 is a representation of an exemplary semiconductor tool comprising a reticle storage bay and the storage housing in Figure 8;

Figure 11 is a representation of an exemplary method of the invention for purging reticle storage;

5 Figure 12 is a representation of an exemplary system of the invention;

Figure 13 is a representation of an exemplary reticle cassette of the invention;

Figure 14 is a representation of an exemplary reticle cassette of the invention;

Figure 15 is a representation of an exemplary expanding stack of the invention;

Figure 16 is a representation of an exemplary expanding stack of the invention;

10 Figure 17 is a representation of an exemplary library rack of the invention;

Figure 18 is a representation of an exemplary library rack of the invention;

Figures 19 is a representation of exemplary reticle boxes of the invention;

Figures 20 is a representation of exemplary reticle boxes of the invention;

Figures 21 is a representation of exemplary reticle boxes of the invention;

15 Figures 22 is a representation of exemplary reticle boxes of the invention; and

Figures 23 is a representation of exemplary robot end effector reticle shield.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a system for purging reticle storage comprising a 20 storage housing having a plurality of reticle storage receptacles. The storage housing can comprise a plurality of shelves that each include a plurality of reticle storage receptacles. Preferably, the system also comprises a purge system associated with the storage housing.

In one embodiment, the purge system includes a plurality of purge lines with each purge line being connected to one of the storage receptacles. Additionally, the system of the invention can comprise an ionizer associated with the purge system. For example, the ionizer can be associated with at least one of the plurality of purge lines of the purge system. The system of the invention can also include a purge gas source connected to the purge system that comprises a source of CDA or extra CDA. CDA is defined as air having a water concentration of less than 2 ppm (part per million). Extra CDA is defined herein as a gas having a water concentration of less than 1 ppb (part per billion).

Figures 1a and 1b are a representation of an exemplary reticle pod for a system of the invention. As shown, a reticle pod 2 can be equipped with a chemical filtration system or getter. The reticle pod generally comprises a door or base portion 4, which mates with a carrier shell or cover 6 to form a hermetically sealed space 8 to provide a controlled environment. Within the sealed environment, a reticle 9 can be stored and transferred. For example, the reticle 9 can comprise quartz blanks, photomasks or substrates that are susceptible to damage from particulates and gas-phase chemical contaminants. Such a reticle pod is disclosed in more detail in U.S. Publication No. 2006/0266011 of U.S. Application No. 11/396,949 which is incorporated herein by reference.

Preferably, the door portion 4 of Figures 1a and 1b can include an opposed upper door surface 10 and lower door surface 11, separated by a lateral wall 12. In Figures 1a and 1b, a plurality of reticle supports 14, reticle side positioning members 16 and back positioning members 18 extend outwardly from and are disposed in a spaced apart relationship adjacent an upper periphery of and generally about a central portion 20 of the upper door surface over the filter 22. The reticle supports can be configured to hold the reticle at a predefined height above the upper door surface. The reticle side positioning members and back positioning members can serve to guide manual positioning of the reticle, ensuring proper lateral and rearward placement of the reticle on its supports.

In one embodiment, the filter 22 of Figure 1 can have a variety of constructions each of which provides for a fluid-permeable, high efficiency, low-pressure drop, adsorptive composite filter such as generally described by U.S. Patent Nos. 7,014,693, 6,761,753, 6,610,128, and 6,447,584, the contents of which are hereby incorporated by reference herein. For example, adsorptive media for the filter can include, without

limitation, chemisorptive or physisorptive media and combinations thereof. Other media for the filter can comprise, for example, high efficiency particulate air (HEPA) or ultra low penetration air (ULPA) filter mediums, which can also be used in combination or along with adsorptive media. Preferably, the reticle pod for a system of the invention can 5 comprise a passive purifier or desiccant member. Exemplary passive purifiers or desiccant members can reduce the extent of contaminants that may contact the reticle.

The concentration of moisture within the hermetically sealed space 8 of the reticle pod 2 in Figure 1 is preferably maintained at concentration levels approaching a few ppb. The system of a preferred embodiment of the invention also provides for maintaining or 10 controlling the level of humidity within the reticle pod to a concentration of less than about 10 ppb of water. In one embodiment, the reticle pod of Figure 1 can be associated with the system of the invention to achieve such humidity levels. The system of a preferred embodiment of the invention provides a periodic or continuous purge comprising CDA or, more preferably, extra CDA. The invention contemplates that the purge gas can 15 be inert such as, for example, dry argon or nitrogen. The system of the invention can also be associated with the reticle pod 2 by injector or inlet ports 24, which can connect to at least one purge line. The inlet port 24 can be fitted with a diffuser element 25, which causes the purge gas to flow more uniformly within each pod. Preferably, the diffuser element is a porous material with a pore size of 1-3 microns ( $\mu\text{m}$ ). The diffuser element 20 can be a metal such as nickel or stainless steel, made by sintering a powder of the metal. The pores can allow passage of particles less than 3 nanometers (nm) in diameter and prevent passage of larger particles. The diffuser can also be located at the outlet of each purge line as the purge gas flows into the pod or used at the purge of any reticle storage housing, reticle library, inspection tool or tools for transferring reticles from transport pods 25 into libraries or those for storage or use.

The filter 22 can also comprise an extractor part as explained in more detail below. In such a case, both ports 5.0 and 5.1 constitute inlet ports.

In one embodiment, the upper periphery of the door portion 4 in Figures 1a and 1b can be configured with inlet 5.0 and extractor ports 5.1 extending therethrough between 30 upper and lower surfaces thereof in a direction generally parallel with its lateral wall 12. The inlet and extractor ports can also be configured to coaxially receive an inlet fitting 26

and extractor fitting 27. The invention also contemplates other connection means for these fittings and ports. For example, the inlet fitting can be detachably coupled to the purge line of a system of the invention. Moreover, the extractor fitting can also be detachably coupled to a purge removing line, which may be associated with a purge evacuation system. The inlet and extractor fittings can also be equipped with check valves, configured to allow a unidirectional flow. When the system of the invention is not purging the reticle pod, check valves prevent ingress or egress of contaminants into the hermetically sealed space 8.

Furthermore, diaphragm valves with slits such as those generally described by U.S. Patent No. 5,482,161, the contents of which are hereby incorporated by reference herein, can also be employed in conjunction with or without the check valves for the inlet and extractor fittings. Diaphragm and check valves can also limit the exposure of the filter 22 and its media to ambient conditions external to the reticle pod 2. The invention also contemplates that using a system of the invention to inject a purge gas comprising CDA, extra CDA, nitrogen or other inert gases under pressure into the hermetically sealed space 8 may cause at least a portion of the purge gas to egress through the filter and exit the reticle pod. In one embodiment, the extractor fitting can also be replaced by an inlet fitting coupled to the gas inlet. As such, the hermetically sealed space can be pressurized by the purge gas flowing into the reticle pod through such inlet fittings. The purge gas then exits the hermetically sealed space through the filter 22.

Generally, purging the hermetically sealed space 8 in Figure 1 removes trace contaminants by entraining them in the gas flow. In one embodiment, purging via the system of the invention can dislodge and remove particulates and other contaminants such as those associated with any physisorptive media of the filter. Purging with CDA or extra CDA also can maintain and control the humidity levels within the reticle pod 2. For example, the system of the invention can dehumidify the filter 22. Moreover, a purge line for a system of the invention can be associated with the reticle pod to purge contaminants and maintain a concentration of less than about 10 ppb of water therein. For example, the purge line can be connected to one or more storage receptacles for the reticle pod. The purge line can also be part of a purge system for a system of the invention.

In one embodiment, the purge line can also be associated with a conventional ionizer. For example, a purge gas from a source comprising CDA or extra CDA enter the purge line and pass through an ionizer associated therewith. The purge gas then exits from the purge line and can be introduced into a storage receptacle for a reticle pod.

5 Alternatively, the ionizer can be associated with the purge system for a system of the invention. The purge gas flow rate through such ionizers can be about 1.5 cubic feet per minute (CFM), although the invention contemplates other suitable flow rates that may be adjusted depending on parameters such as humidity levels in the reticle pod.

Manifold pressure of an ionizer for a system of the invention can be from about 0  
10 to 70 pounds per square inch (PSI). In one embodiment, the ionizer can include ultraclean  
TEFLON (E. I. du Pont de Nemours and Company, 1007 Market Street, Wilmington,  
Delaware 19898) tubing associated with one or more purge lines as an in-line device.  
Exemplary tubing can be from about 6 to 10 millimeters (mm) in diameter. An ionizer for  
a system of the invention can also be associated with a plurality of purge lines. Preferably,  
15 an ionizer can employ steady-state direct current ion emission. The invention also  
contemplates use of an in-line ionizer distributed by Ion Systems of Berkeley, California.

In one embodiment, a reticle pod for a system of the invention can comprise a pod  
base portion and pod shell portion that cooperate to form a controlled environment. The  
pod based portion can comprise a first surface that is configured to lie interiorly of the  
20 controlled environment. Moreover, a second surface can be configured to lie exteriorly of  
the controlled environment. The reticle pod can also comprise a central hole surrounded  
by and defining a gas flow path between the first and second surfaces. Preferably, the  
reticle pod can comprise a plurality of reticle supports and guides mounted on the first  
surface to support a reticle thereon. For example, the reticle supports and guides can  
25 define a reticle receiving region having a receiving surface being substantially coextensive  
with a patterned surface of the reticle.

Furthermore, the reticle pod can include a filter frame having an open and  
perforated bottom end. A lateral wall can connect the open end to the perforated bottom  
end to define a longitudinal gas flow passage therebetween. The filter frame can be  
30 closely received within a central hole in gas-tight engagement with the reticle pod. In one  
embodiment, the open end can be proximate to a first surface. The perforated bottom end

can also be recessed from the first surface. Preferably, the reticle pod comprises a filter having an extent defining a filter shape and filter area. The filter can be layered and disposed within the gas flow passage in sealed engagement with the open end such that substantially all the gas entering or leaving the filter passes through the filter area.

5 A filter for, without limitation, a reticle pod, stocker, library, tool, cleanroom or inspection area of a system of the invention can comprise an ion exchange resin. For example, a filter comprising at least one ion exchange resin can be included in the systems of the invention to protect a reticle during storage and transport. Alternatively, a filter for a system of the invention may not comprise an ion exchange resin. Such ion exchange 10 resins can feature porosities of higher than about 300 milliliters per gram. Preferably, an exchange resin of the filter can be a cation exchange resin having a concentration of chemically acidic sites of about 1.8 milliequivalent per gram. For example, an exchange resin for a filter or layers thereof can include a surface area of about 45 squared meters per gram. Exemplary resins for a filter are commercially available under the trademark 15 AMBERLYST (Rohm and Hass Company, 100 Independence Mall West, Philadelphia, Pennsylvania 19106).

Preferably, a filter for a reticle pod can be fabricated to exhaust over comparable periods of use. For example, the invention contemplates use of filter layers that concomitantly require maintenance or replacement. In one embodiment, a filter layer 20 comprising a chemisorptive media can be fabricated to be thinner than a layer featuring a physisorptive media as physisorptive medias tend to exhaust prior to chemisorptive medias. A filter employing filter layers that exhaust over comparable periods of use can reduce operation costs by consolidating any potential downtime. Figure 2 is a representation of exemplary filters for a reticle pod for a system of the invention and layers thereof. As 25 shown, the first 28 and second filter layer 30 can be disposed in communication with each other. For example, the first filter layer can be disposed on a surface of the second filter layer 30. The first and second filter layer can also comprise a cover sheet. As shown, the second filter layer 30 features a cover sheet 32. The cover sheet 32 can be a polyester nonwoven material. Preferably, the first and second filter layer comprise a chemisorptive 30 or physisorptive media for removing contaminants such as volatile silica containing compounds.

In one embodiment, a reticle pod, stocker, library, tool, cleanroom or inspection area for a system of the invention comprises a first filter layer having a physisorptive media. An exemplary physisorptive media can include activated carbon. Activated carbon of a physisorptive media can be untreated or treated and granulated. A system of 5 the invention also features a second filter layer comprising a chemisorptive media. For example, a chemisorptive media for a second filter layer can include a cation exchange resin. Preferably, the cation exchange resin comprises a copolymer such as a divinyl benzene styrene copolymer having at least one acidic functional group.

An exemplary chemisorptive media for a filter layer of a filtering system is a 10 cation exchange resin such as a chemically acidic copolymer. In one embodiment, a physisorptive media for a filter layer can include activated carbon, which can be untreated or treated and granulated. Physisorptive medias can be formed into a block held together by binder materials. Exemplary physisorptive medias can be chemically acid and obtained from organic sources such as coal. As shown, the filter or filter layer 34 in Figure 3 15 comprises a cover sheet 36. In one embodiment, the cover sheet comprises a polyester nonwoven material. Preferably, the filter comprises a chemisorptive or physisorptive media. Moreover, a filter 38 comprises a first 40 and second cover sheet 42. The filter 38 also includes a body portion 44 disposed on the first cover sheet.

Exemplary cover sheets of a filter for a reticle pod can comprise filtering or non- 20 filtering nonwoven materials such as polyester, polyamide, polypropylene or any combination thereof. For example, a cover sheet comprising filtering nonwoven materials can remove particulates present in a gas stream passing therethrough. A cover sheet can also be used to retain honeycombed or pleated elements. In addition, a cover sheet can retain given medias such as, for example, activated carbon or beads comprising a 25 sulfonated divinyl benzene styrene copolymer. Preferably, a cover sheet for a filter can comprise chemically inert materials such as, for example, polyester or polypropylene.

For example, a filter for a reticle pod, stocker, library, tool, cleanroom or inspection area of a system of the invention can be retained by any suitable container or framework. Such containers or frameworks are also useful in facilitating filter layer 30 replacement. A filter or layer thereof can comprise a filter member having pleated elements. Pleated elements can increase filter member surface areas, which can aid in

removing particulates or contaminants present in a gas flow path passing therethrough. Figure 3 is a representation of an exemplary filter of a reticle pod for a system of the invention. In one embodiment, the filter layer 46 comprises a high surface area filter member. Moreover, the filter layer can comprise a chemisorptive or physisorptive media and binder type materials. Preferably, a filter layer comprising a high surface area filter member includes a media disposed on, for example, a composite material 48. The binder type material can also be introduced to the media to aid binding thereof.

A first or second filter layer of, for example, a reticle pod can employ a nonwoven composite material comprising at least one cation exchange resin that can bind to airborne contaminants. Exemplary first or second filter layers comprising a chemisorptive media and methods for fabricating such filter layers are generally described in U.S. Patent Nos. 6,447,584, 6,740,147, 6,610,128 and 6,761,753, the contents of which are hereby incorporated by reference herein. A filter layer can also be fabricated via dry application of chemisorptive media to a nonwoven composite or camer material, which is then heated and calendered.

For example, such a nonwoven composite material can be polyester. In one embodiment, the chemisorptive media is a porous divinyl benzene styrene copolymer including acidic functional groups. Exemplary acidic functional groups include sulfonic and carboxylic acid functional groups. The chemisorptive media can feature a pore size in the range of about 50 to 400 angstroms (Å). Moreover, a surface area of the media can be greater than about 20 squared meters per gram. For example, acidic functional groups of a benzene styrene copolymer can also feature an acidity level higher than about 1 milliequivalent per gram.

In one embodiment, a first or second filter layer comprises chemisorptive media particles distributed throughout a material such as, for example, a nonwoven, fiber matrix or polyester material. Preferably, chemisorptive media particles of a filter layer can include a cation exchange resin. For example, these media particles can be chemically acidic. Such media particles can feature exemplary particle sizes from about 0.3 to 1.2 mm. Moreover, a chemisorptive media particle can, for example, have a porosity and average pore diameter of about 0.3 milliliters per gram and 250 Å, respectively.

A chemisorptive media for a first or second filter layer of a filter for a reticle pod is particularly useful for removing contaminants. Moreover, the chemisorptive media can be capable of removing particulates from a gas stream such as, for example, when particulates are greater in size than media pores. In one embodiment, the first or second 5 filter layer of a reticle pod can comprise a physisorptive media. An exemplary physisorptive media is activated carbon. Activated carbon is generally described by U.S. Patent Nos. 5,607,647 and 5,582,865, the contents of which are hereby incorporated by reference herein.

Preferably, a physisorptive media for a first or second filter layer of a reticle pod 10 for a system of the invention includes untreated activated carbon. The physisorptive media can alternatively include synthetic carbon materials such as, for example, generally described in U.S. Patent No. 5,834, 114, the contents of which are hereby incorporated by reference herein. Exemplary synthetic carbon materials can also be used in combination with activated carbon for a physisorptive media. In one embodiment, a filter or layer 15 thereof comprising a physisorptive media includes untreated and granulated activated carbon, which is capable of removing contaminants such as volatile silica containing compounds present in a gas stream.

In one embodiment, the system of the invention comprises a purge system 20 associated with a storage housing. The purge system can include a plurality of storage lines, each connected to at least one storage receptacle for a reticle pod. Preferably, the purge system can provide a purge gas comprising CDA or extra CDA to one or more storage receptacles via at least one purge line. The invention also contemplates that the purge system can provide an inert gas such as dry nitrogen or argon to the storage receptacles. For example, purge systems for the preparation of extra CDA are 25 manufactured by Aeronex, Incorporated of San Diego, California. Exemplary sources of CDA or extra CDA are also generally described by U.S. Publication Nos. 2005/0017198 and 2006/0118138, the contents of which are hereby incorporated by reference herein.

Figure 4 is a representation of an exemplary purge system for a system of the invention. As shown, an inlet gas is introduced to the purge system 50. In one 30 embodiment, the inlet gas can be CDA. For example, an inlet gas comprising CDA can satisfy the specifications of the International Standards Organization (ISO) 8573-1.

Generally, these specifications can require the inlet gas to comprise particulate sizes, particulate concentrations, dew points and oil concentrations of about less than 0.1  $\mu\text{m}$ , less than 0.1  $\text{mg m}^{-3}$ , -20°C and 0.01  $\text{mg m}^{-3}$ , respectively. The purge system can also inlet pressure and temperature for CDA from about 0 to 10 barg and about 15 to 33°C.

5 With a CDA inlet gas, exemplary contaminant concentrations are included in Table 1.

Table 1

	Contaminants	Concentrations
10	Volatile inorganic compounds such as $\text{SO}_2$ , $\text{H}_2\text{S}$ , $\text{H}_2\text{SO}_4$ , HF, HCl and $\text{H}_3\text{PO}_4$	About 5 ppbv
15	Volatile bases such as $\text{NH}_3$ , NMP and small amines	About 100 ppbv
15	Condensable organics	About 100 ppbv
	Water	About 2000 ppbv
20	Refractory compounds such as hydrocarbons containing S, P or Si	About 1 ppbv

The purge system 50 in Figure 4 also includes an exit gas that comprises a purge gas for one or more storage receptacles. In one embodiment, the purge gas from the purge system can comprise a purge gas source. For example, the purge gas source can comprise CDA or extra CDA. With a purge gas source comprising extra CDA, exemplary contaminant concentrations are included in Table 2.

Table 2

	Contaminants	Concentrations
30	Volatile inorganic compounds such as $\text{SO}_2$ , $\text{H}_2\text{S}$ , $\text{H}_2\text{SO}_4$ , HF, HCl and $\text{H}_3\text{PO}_4$	About < 0.001 ppbv
35	Volatile bases such as $\text{NH}_3$ , NMP and small amines	About < 1 ppbv
40	Condensable organics	About < 0.1 ppbv
	Water	About < 1 ppbv

Refractory compounds such as hydrocarbons containing S, P or Si	About < 0.001 ppbv
---	--------------------

Preferably, the pressure drop of the purge system can be less than about 1 bar. The 5 purge gas can exit the purge system at a pressure and temperature of from about 6 to 7 barg and about 15 to 34°C. A flow rate of the purge gas from the purge system can also be about 300 liters per minute.

The purge system 50 in Figure 4 can also comprise an optional exhaust. Figure 5a is a representation of an exemplary purge system for a system of the invention. As shown, 10 an inlet gas is introduced to the purge system 52. Preferably, the inlet gas can be CDA. For example, an inlet gas can comprise CDA. The purge system can also include an optional exhaust and instrument air, electrical power sources, or inputs. Moreover, the purge system can include an exit gas that comprises a purge gas for one or more storage receptacles. The purge system can comprise a purge gas source associated with a storage 15 housing 54. In one embodiment, a purge gas source exits the purge system and can be introduced to the storage housing 54 through one or more purge lines. An ionizer 55 can be added on a purge outlet line or in the purge system. The purge gas source can also comprise extra CDA. Inlet and outlet gases that comprise CDA and extra CDA can be as described herein such as, for example, in Table 1 and 2, respectively.

20 Referring to Figure 5b, one or two purge systems 50, 52 providing CDA or extra CDA connect to a storage housing, such as a reticle pod stocker 54.1. The stocker has receptacles 58 configured as shelves which are plumbed with the purge lines to provide the purge CDA or extra CDA into the reticle pods seated on the receptacles. The pods individually exhaust the purge CDA or extra CDA into the enclosed interior environment 25 54.2 of the reticle pod stocker 54.1 as indicated by the arrow 54.7. A getter or desiccant 54.8 is in the reticle pod as a filter 54.8 and is in the purge flow stream whereby it is effectively recharged, dehumidified, from the purge stream of CDA or extra CDA. Additionally, as indicated by the further purge lines 54.9, the reticle pods may also be washed with the CDA or extra CDA.. The storage housing, configured as the reticle pod 30 stocker may exhaust the enclosed interior environment as indicated by the exhaust arrow 56.2. Typically such exhaust is preferably in the lower region of the housing and the supplemental inlets 56.3 are in the upper region of the housing.

In one embodiment, a purge system for a system of the invention comprises a plurality of purge lines. For example, a purge line of a purge system can be connected to at least one storage receptacle. Preferably, a shelf of a storage housing can comprise a plurality of storage receptacles. Figure 6 is a representation of exemplary shelves for a system of the invention comprising a plurality of storage receptacles. As shown, the shelf 56 comprises a plurality of storage receptacles 58. Although the shelf in Figure 6 includes four storage receptacles configured to receive reticle pods, the invention contemplates any other suitable number of receptacles. Each of the storage receptacles can be configured to receive a reticle pod. The reticle pod comprises at least one inlet, for example, an inlet port, that connects to one or more purge lines.

The shelf 56 in Figure 6 can be associated with connections 60 for at least one purge line. The connections can introduce a purge gas source comprising, without limitation, CDA or extra CDA to the shelf. In one embodiment, the shelf can comprise passages 62 that can provide a purge gas source to a storage receptacle 58. Preferably, the passages associated with the shelf can each comprise an outlet 64. Exemplary outlets of the shelf can be associated with one or more storage receptacles. As shown, the outlets of the shelf can be configured to connect or be coupled to an inlet port, an outlet port or combination thereof of a reticle pod. For example, the storage receptacles of the shelf receive a reticle pod comprising at least one inlet port for introduction of a purge gas source. With the reticle pod received by the storage receptacle, the inlet port of the pod can be associated with at least one outlet of the shelf.

Further disclosure relating to these and related aspects of the invention are disclosed in Provisional Application Serial No. 60/892,196, entitled Purge System for a Reticle SMIF Pod owned by the owner of in the instant invention. Said application is incorporated herein by reference. Said disclosure illustrates a purge connection option between the reticle pods and storage receptacle. An exemplary connection system between the receptacle portion and the reticle pod can be an elastomeric grommet as the purge inlet on the door of the reticle pod that cooperates with a metal nozzle, the purge outlet on the shelf of the storage receptacle .

In one embodiment, an inlet port of a reticle pod can be connected to one or more purge lines. For example, an inlet port can be connected or associated with a purge line

for introducing a purge gas source through one or more connections 60, passages 62 and outlets 64 of the shelf 56 in Figure 6. As described, a purge line can be connected to a purge system associated with a storage housing comprising the shelf. Preferably, the association of a purge line with an inlet port for a reticle pod received by a storage receptacle can be facilitated by automated means such as, without limitation, conventional programmed computer systems and devices that can execute programs directing the manipulation of reticle pods and shelves. A person of ordinary skill in the art can select exemplary programmed computer systems and devices to connect the inlet of a reticle pod to a purge line.

Referring to Figures 6b, 6c, and 6d, a further embodiment of a reticle storage receptacle is shown. A shelf with a U-shape defines a void 64.2 and has purge outlets 64. An automated robotic device with a gripper 70.2 grabs the reticle pod at the flange 70.4. An air flow sensor 71.2 is associated with the gripper and is utilized to confirm purging air flow. Said confirmation can be done before the reticle pod 66 is seated on the receptacle 71.7 or after the pod is seated.

Figure 7 are representations of exemplary reticle pods received by reticle storage receptacles associated with shelves of the type in Figures 6a or 6b. As shown, one or more reticle pods 66 can be disposed on a shelf 68 of a storage housing 70. In one embodiment, the storage housing comprises a plurality of shelves. For example, each of the shelves can include at least one reticle storage receptacle. The reticle pods in Figure 7 can each be received by a storage receptacle of the shelf. Preferably, the reticle pods comprise an inlet port that can connect to at least one of the purge lines. Exemplary purge lines can be disposed in the space 72 of the storage housing and provide a purge gas source to the reticle pod. The purge lines can also be connected or associated with the shelf and its passages or outlets.

The reticle pods 66 in Figures 7a, 7b, 7c can also be manipulated by an automated device 74 with gripper 70.2. Conventional automated devices include those for reticle storage and transport as generally described by U.S. Patent Nos. 6,991,416; 6,364,595; 7,039,499; and U.S. Publication No. 2006/0078407, the contents of which are hereby incorporated by reference herein. The system and methods of the invention can each comprise one or more automated devices, which may be used for reticle storage and

transport. For example, the storage housing 72 can also include access to the reticle pods through conventional ports or doors. Preferably, a series of doors can be used to permit auxiliary manual access to the reticle pods and reticles therein. The storage housing can also comprise a circulation system, which may wash or flow purge gases such as CDA, 5 extra CDA, or other inert gases past the reticle pods to prevent contaminants from accumulating thereon and to minimize absorption of moisture by the reticle pods at their exterior. The circulation system can be capable of providing positive pressure within the storage housing with one door open, thereby preventing contaminants from entering the housing through the open door.

10 In one embodiment, a reticle storage receptacle can be configured to receive a reticle pod having an inlet that connects or is associated with at least one purge line. For example, the reticle pod 66 in Figures 7a, 7b, and 7c is received by a storage receptacle of a shelf 68 and purge lines associated therewith can provide a purge gas source to the pod. As shown, a purge gas source is connected or associated with the shelf through a purge 15 line 76 and can communicate with the reticle pod disposed thereon. Preferably, the shelf comprises an outlet for the purge gas source provided through the purge line. Exemplary outlets for the shelf can be configured to connect or be coupled to an inlet of a reticle pod. The inlet of the reticle pod can be an inlet port connected or associated with the purge line through one or more connections, passages and outlets of the shelf.

20 Furthermore, the system of the invention comprises a storage housing having a plurality of reticle storage receptacles. The storage housing for a system of the invention can be any conventional storage housing including those with automation as generally described by U.S. Patent Nos. 6,562,094 and 6,848,876 and U.S. Publication No. 2004/40158348, the contents of which are hereby incorporated by reference herein. 25 Generally, a storage housing can be used for the safe and efficient storing of reticles or reticle pods in a clean environment. In one embodiment, reticle pods are received by a plurality of storage receptacles disposed in the storage housing for a system of the invention. The storage housing minimizes the amount of contaminants that can contact reticle pods or reticles therein.

30 A storage housing for a system of the invention can also be associated with a retrieval unit. The retrieval unit can be separate or incorporated with the storage housing

for accessing and staging reticle pods. An exemplary retrieval unit comprises the robot end effector reticle shield of Figure 23. The storage unit can also comprise movable shelves having a plurality of storage receptacles for receiving reticle pods. For example, the shelves can be selectively moved by a drive mechanism that is associated with the 5 storage housing. In one embodiment, the storage housing can be hermetically enclosed except during reticle pod retrieval and transport operations. The storage housing can also be substantially free of motors, moving parts, circuitry and other contaminant generating components. These features can also be external to the storage housing.

10 Referred to Figure 7b, the shelves may be swiveable about an axis A1 to provide flexibility in storage.

Preferably, the storage housing can permit a purge gas to circulate uniformly throughout an interior thereof. By uniformly circulating a purge gas such as CDA or extra CDA throughout the storage unit, the amount of potential contaminants exposed to the reticle pods and reticles therein can be minimized. Figure 8A is a representation of an 15 exemplary storage housing for a system of the invention. As shown, the storage housing 78 comprises a plurality of reticle storage receptacles associated with a plurality of shelves 80. In one embodiment, a purge system can be associated with the storage housing. Exemplary purge systems can comprise a plurality of purge lines. Purge lines 82 in Figure 8A provide a purge gas source to reticle pods 84 along both banks of the storage housing. 20 The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle pod or reticle.

As shown, the purge lines 82 are each connected to one of the reticle storage receptacles of the shelves 80. The storage receptacles are configured to receive the reticle pods 84 in which a reticle can be disposed. In one embodiment, the storage housing 78 25 can comprise a plurality of shelves, which each include a plurality of storage receptacles. The storage housing in Figure 8A also comprises conventional devices and components for storage and transport of reticle pods and reticles therein. Preferably, a reticle storage receptacle can be configured to receive a reticle pod having an inlet that connects or is associated with at least one purge line. A purge gas source can be connected or associated 30 with a shelf through a purge line. Moreover, a purge gas source can communicate with a

reticle pod disposed on a shelf. An exemplary shelf comprises an outlet for the purge gas source provided through the purge line.

A preferred embodiment of the invention provides for the purging of a bare reticle stocker. Such a system 120 is illustrated in Figure 8B and involves storage of a number of 5 reticles in either a linear system in which a robot delivers or retrieves reticles from a storage location as described elsewhere herein, or uses a carousel system that rotates to position each storage location relative to a vertically translated robotic delivery and retrieval system. The "bare" reticle can be stored and moved with a pellicle attached thereto, or alternatively, the reticle can be stored with the pellicle in a plastic sleeve. This 10 system 120 includes a plurality of reticle storage locations 122 distributed in a carousel housing 125. A robotic transport system 128 can include a purge delivery system 126 that can purge reticles during transport with robotic arm 127. Each location 122 can have a diffuser element 124 associated with it. As shown in Figure 8C, each location can have a reticle 130 positioned in proximity to a header 132 that delivers CDA or extra CDA in a 15 stream 136 that extends horizontally and/or vertically across the reticle location. The purge system can also be integrated into the robotic transport assembly 128.

Another preferred embodiment of a purge system for a bare reticle stocker is shown in Figure 8D. In this system 140, diffusers 142 are placed above reticles 144 to direct CDA or extra CDA 146 down across the surfaces of the reticles. The diffuser 142 20 can be placed above all the shelf locations or a number of diffusers can be positioned between the shelf locations.

In Figure 8E, the diffuser 164 can have a number of ports distributed vertically along the diffuser element 164 to direct CDA or extra CDA at various shelf locations where reticles 166 are stored. The diffuser can also be incorporated into the robotic 25 system that transports the reticle to and from an interface station so that the reticle can be purged while being removed or inserted into the system 140.

Outlets of a shelf can also be configured to connect or be coupled to an inlet of a reticle pod. The inlet of the reticle pod can be an inlet port connected or associated with the purge line through one or more connections, passages and outlets of the shelf. In one 30 embodiment, a system of the invention comprises a plurality of storage housings disposed in a conventional enclosure. Figure 9 is a representation of an exemplary enclosure

comprising a plurality of storage housings of the type in Figure 8A. As shown, the enclosure 86 can have one or more storage housings 88 disposed therein. In one embodiment, a purge system can be associated with the storage housings of the enclosure. Exemplary purge systems can comprise a plurality of purge lines. Purge lines 90 in Figure 5A provide a purge gas source to reticle pods associated with each storage housing. The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle pod or reticle within the storage housing of the enclosure. The enclosure and storage housing in Figure 9 also can comprise conventional devices and components for storage and transport of reticle pods and reticles therein.

10 For example, a conventional device can be positioned within the enclosure for removing reticles from and replacing reticles in each housing. The device can be a standard robotic device that includes a drive system. A controller for controlling the drive system of the robotic device can calculate a profile of a commanded motion before the motion is performed. The controller can also recalculate a profile multiple times until the 15 controller determines the motion to be performed. The robotic device can also include a gripper arm for gripping the reticle pods in the storage housing. The gripper arm is driveable by a gripper arm drive for movement away from and towards the storage housing. The robotic device can comprise a vertical column to which the gripper arm is movably mounted. Vertical movement of the gripper arm relative to the vertical column 20 can be provided by a vertical drive. The robotic device can also include a carriage to which the vertical column is rotatably mounted.

25 Rotary motion of the vertical column is capable of being provided by a rotary drive. A counterbalance for counterbalancing the gripper arm can also be housed within the vertical column to minimize contaminant generation and to be positioned near the center of mass of the robotic device. The drive system includes a bottom drive for driving the carriage of the robotic device alongside the storage housings of the enclosure. For example, the storage housings can be positioned in linear rows within the enclosure. In one embodiment, the drive system can include a top drive so that the robotic device can be driven from the top and the bottom, thereby providing precise vertical orientation. The 30 robotic device can also include a vision system for determining whether a storage receptacle of the storage housing is occupied or empty, positions of the gripper relative to the receptacle and whether the gripper is correctly gripping a reticle pod or reticle.

The enclosure also can include a robot service location for servicing the robotic device. The robot service location is capable of being isolated from the storage housings to prevent contamination of the reticle pods or reticles therein during service of the robotic device. A pod opening system can also be associated with the enclosure and, preferably, 5 storage housings for placing reticles into and removing reticles from the reticle pods with the robotic device. Exemplary robotic devices can be capable of selecting and transporting reticle pods and reticles within the enclosure and storage housings. In one embodiment, a robotic device can provide for movement of reticle pods and reticles among different storage housings. Preferably, standard robotic devices can also be used to 10 transport reticle pods, reticles or combinations thereof to a reticle storage bay associated with a semiconductor tool. Such semiconductor tools can include lithography, etching, deposition or implantation tools.

In one embodiment, a reticle storage bay associated with a semiconductor tool can comprise each of the features for purging contaminants that are disclosed herein. For 15 example, the reticle storage bay can be connected to a purge line for providing a purge gas. The purge line can comprise an ionizer. Furthermore, the semiconductor tool associated with the reticle storage bay can comprise a purge line connected to a reticle fixture therein. Preferably, a semiconductor tool or reticle storage bay can be associated with one or more 20 purge systems. A reticle storage bay for a system of the invention can include the purge components of a storage housing and enclosure. A system of the invention can also comprise a plurality of reticle storage bays or semiconductor process tools and combinations thereof.

Figure 10 is a representation of an exemplary semiconductor tool comprising a reticle storage bay and the storage housing in Figure 8. As shown, reticle pods 92 or 25 reticles can be transported from a storage housing 94 to a reticle storage bay 96 associated with a semiconductor tool 98. For example, a reticle storage bay can be associated with a conventional semiconductor process tool such as lithography, etching, deposition or implantation tools. In order to transfer reticles between a reticle pod and a semiconductor tool within a manufacturing facility, a pod is typically loaded either manually or by 30 automated devices on a load port of the tool. To transfer reticles, an optional input and output device can be provided for receiving the reticles and separating the reticle pod. For example, a handling device can be used to transfer the reticle from the door of the reticle

pod onto a surface within a clean environment. Additional devices can also be used to transfer the reticle within the tool.

In one embodiment, reticle pods for a reticle can be compatible with standard cleaning agents used with lithography tools. Examples of materials for a reticle pod 5 include fiber reinforced molded polymers or polytetrafluoroethylene (PTFE) coated metals such as aluminum or titanium. The invention also contemplates any suitable materials for a reticle pod. Preferably, a device for transitioning a reticle from atmospheric pressure to vacuum in a semiconductor tool can be provided. The invention also contemplates a reticle protection and transport system. For example, an indexer that stores a plurality of 10 reticles in a storage bay can be provided.

A reticle storage bay associated with a semiconductor tool can also comprise a series of doors for providing auxiliary manual access to the reticle pods or reticles therein. A gas circulation system can flow filtered gases past reticle pods or reticles to prevent contaminants from accumulating thereon. Figure 11 is a representation of an exemplary 15 method of the invention for purging reticle storage. The invention provides a method for purging reticle storage, which can be continuous. Alternatively, the purging can be "most of the time" defined as more than half of the time at issue. Or "substantially continuously" defined as 90% of the time at issue. Preferably, the method 100 includes providing a gas comprising CDA or extra CDA in step 102. In one embodiment, the purge gas can be 20 provided through at least one purge line to the reticle storage receptacle of the storage housing for a system of the invention. Furthermore, the method comprises introducing the gas to a reticle pod received by the reticle storage receptacle in step 104. The method comprises contacting a reticle disposed in the reticle pod with the gas comprising CDA or extra CDA in step 105. The method also comprises removing contaminants from the 25 reticle and reticle pod via the purge gas in step 106. The method also comprises recharging a getter, desiccant, or filter as the reticle pod is being purged a step 108. And, having a fully "charged" or "fresh" desiccant, getter, or filter in the reticle pod when the reticle is present and purging is not occurring. See step 108.5.

In a preferred embodiment, the invention includes maintaining the reticle in a 30 continually purge status with extra CDA, when possible, and when not possible, having the reticle in proximity to a dessicant and/or getter.

In another embodiment the invention includes maintaining the reticle in a substantially continually purge status with at least CDA when the reticle is in a reticle pod and in a storage housing, such as a reticle pod stocker. Moreover, when the reticle in the reticle pod is not being purged, for example when it is being transported, the reticle is in proximity to a dessicant and/or getter in the reticle pod. Moreover, the reticle when removed from the reticle pod is substantially continually washed with at least CDA. Moreover, the dessicant and/or getter may be capable of being recharged as the reticle pod is being purged.

In another embodiment the invention includes maintaining the reticle in a most of the time purge status with at least CDA when the reticle is in a reticle pod and in a storage housing, such as a reticle pod stocker. Moreover, when the reticle is not being purged in a reticle pod, for example when the reticle is being transported, the reticle is in proximity to a dessicant and/or getter in the reticle pod. Moreover, the reticle when removed from the reticle pod is washed most of the time with at least CDA. Moreover, the dessicant and/or getter may be capable of being recharged as the reticle pod is being purged.

The invention also comprises systems and methods for purging reticle pods, cleanrooms, inspection areas, stockers and libraries. For example, Figure 12 is a representation of an exemplary system of the invention. As shown, the system 184 is associated with a semiconductor manufacturing facility 186. The system 184 can comprise a purge system 185 associated with the facility. Preferably, the purge system includes a plurality of purge lines with one or more purge lines being associated with the facility. In one embodiment, purge lines can connect to the facility through one or more inlets thereto. Each inlet can also comprise diffuser elements as described herein. The system of the invention can provide periodic or continuous purge comprising CDA or, preferably, extra CDA.

Additionally, the system 184 can comprise an ionizer associated with the purge system 185. The ionizer can be associated with at least one of the plurality of purge lines of the purge system. The system of the invention can also include a purge gas source connected to the purge system that comprises a source of CDA, extra CDA or dry inert gases such as nitrogen. A preferred embodiment of the invention uses extra CDA. The

system 184 can also comprise a plurality filter or filter members 188. Preferably, the filters 188 can be particulate filters. The filters can also comprise a variety of constructions. In one embodiment, each filter provides for a fluid-permeable, high efficiency, low-pressure drop, adsorptive composite filter such as generally described by 5 U.S. Patent Nos. 7,014,693, 6,761,753, 6,610,128, and 6,447,584, the contents of which are hereby incorporated by reference herein. For example, adsorptive media for the filter can include, without limitation, chemisorptive or physisorptive media and combinations thereof. Other media for the filter can comprise, for example, HEPA or ULPA filter media, which can also be used in combination or along with adsorptive media.

10 Preferably, the filters 188 of Figure 12 can comprise, for example, HEPA or ULPA type filters. These filter types can remove particulates from a gas flow path passing therethrough. The system 184 can be disposed in a first or upper level 190 of the manufacturing facility 186. In one embodiment, chemisorptive filters can also be incorporated, mounted or coupled to a floor region 192 of the upper level 90, which is 15 fluid permeable. The chemisorptive filters can be disposed above particulate filters. For example, each chemisorptive filter can be disposed adjacent to a particulate filter. The chemisorptive filters can communicate with a surface of the particulate filters disposed on the floor region 192. The chemisorptive and particulate filters can be in fluid communication via a gas stream, which preferably comprises the purge gas source, gases 20 provided or circulated by a fan tower, circulation air handler, makeup handler or combinations thereof. The chemisorptive filters can remove contaminants present in a gas. Gas streams can pass through the chemisorptive filter and contact particulate filters. The particulate filters remove particulates from the gas stream as the stream passes through.

25 Preferably, the filters of Figure 12 can permit a purge gas to circulate uniformly throughout an interior of the cleanroom. By uniformly circulating a purge gas such as CDA or extra CDA throughout the cleanroom, the amount of potential contaminants exposed to the reticle pods or reticles therein can be minimized. In one embodiment, a 30 purge system can be associated with the cleanroom. Exemplary purge systems can comprise a plurality of purge lines as described herein. The purge lines can provide a purge gas source to reticle pods or reticles within the cleanroom as each is transported or used. The purge gas source can comprise a source of CD A or extra CDA for removing

contaminants from the reticle pods or reticles. Purge gases can remove trace contaminants by entraining them in the gas flow.

In one embodiment, purging via the system 184 of the invention can dislodge and remove particulates and other contaminants such as those associated with filters. Purging 5 with CDA or extra CDA also can maintain and control the humidity levels within the cleanroom 194. For example, the system of the invention can dehumidify the cleanroom. Moreover, a purge line for a system of the invention can be associated with the stockers, libraries and tools of a cleanroom, maintaining a concentration of less than about 10 ppb of water therein.

10 As shown, after the gas stream passes through the chemisorptive and particulate filters, the stream is introduced to the cleanroom 194. The filters can partially, substantially or completely filter the gas stream from particulates and contaminants. In one embodiment, the filters are in fluid communication with the cleanroom 194 via the gas stream. The invention contemplates partially, substantially or entirely purging the 15 cleanroom via the purge gas source. The cleanroom can comprise tools 196, which are substantially disposed therein. The semiconductor manufacturing facility 186 can also comprise, without limitation, reticle pods, stockers, libraries or combinations thereof. Moreover, the facility also can comprise conventional devices and components for storage, 20 inspection and transport of reticle pods and reticles therein. The invention also comprises systems and methods for purging reticle inspection areas. A reticle inspection area can also comprise one or more stockers as described herein.

The systems and methods of the invention can be used individually or in combination to control the mechanisms of contaminate and particulate formations at each 25 stage of reticle use and storage. For example, as described, a conventional reticle inspection area can be purged via a purge gas source connected to the purge system that comprises a supply of CDA, extra CDA or dry inert gases such as nitrogen. In one embodiment, the purge of the inspection area can be an individual or discontinuous reticle purge. The invention also contemplates providing a reticle pod with continuous or 30 discontinuous purges. For a discontinuous purge, a purifier or desiccant member as described herein can also be used. Similarly, a discontinuous purge can be used for a pod,

stocker, library, tool, cleanroom or inspection area that is substantially or completely sealed.

During transportation of a reticle and standby within a tool or photo bay, passive AMC filtration can also be provided to avoid contamination. Similarly, continuous or 5 discontinuous purging with CDA, extra CDA or dry inert gases may be preformed during transportation of a reticle and standby within a tool or photobay. For a library, CDA, extra CDA or dry inert gases can be provided thereto, which may increase purified air flows for the entire tool. Exemplary inert purge gas can include dry argon or nitrogen. In one embodiment, Figure 13 is a representation of an exemplary reticle cassette of the invention. 10 Preferably, the reticle cassette can permit a purge gas to circulate uniformly throughout an interior thereof. By uniformly circulating a purge gas such as CDA or extra CDA throughout the cassette, the amount of potential contaminants exposed to the reticles therein can be minimized. As shown, the reticle cassette 198 comprises a plurality of reticle slots 204, which can each be associated with a reticle.

15 In one embodiment, a purge system can be associated with the cassette. For example, the purge system includes a plurality of purge lines with each purge line being connected to the cassette. The invention contemplates use of a diffuser at the inlet of each reticle cassette, which causes a more even distribution of gas entering each cassette from the associated purge line. The diffuser can be mounted at the purge line inlet or injector 20 port of the cassette or at the outlet of the purge line, where gas flows into the cassette. For example, the inlet 205 can be fitted with a diffuser element. Exemplary diffuser elements 20 are described herein.

For the reticle cassette of Figure 13, an ionizer can be associated with at least one 25 of the purge lines of the purge system. In one embodiment, the cassette can store or hold a plurality of conventional reticles, each comprising a quartz material. The cassette generally comprises a door portion 210, which forms a hermetically sealed space to provide a controlled environment. Within the sealed environment, a reticle can be stored. The reticle can comprise quartz blanks, photomasks or substrates that are susceptible to damage from particulates and gas-phase chemical contaminants. Generally, purging the 30 hermetically sealed space can removes trace contaminants by entraining them in the gas flow. Purging with CDA or extra CDA also can maintain and control the humidity levels

within the cassette. Moreover, a purge line for the cassette can be associated therewith to purge contaminants and maintain a concentration of less than about 10 ppb of water therein.

As shown, the purge line 200 in Figure 13 provides a purge gas source to reticles 5 along at least one bank 202 of the cassette. The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle. As shown, a purge line inlet 205 can be connected to at least one of the banks 202 of the reticle cassette 198. The banks are configured to receive a plurality of reticles with each disposed in a reticle slot 204. Preferably, the cassette can be configured to comprise at least one inlet 205 that 10 connects or is associated with at least one purge line. A purge gas source can be connected or associated with a bank of the cassette through a purge line. Moreover, a purge gas source can communicate with a reticle disposed in contact with a slot. An exemplary cassette also comprises a filter member 208, preferably, a permeable getter filter member.

15 The filter member of Figure 13 can have a variety of constructions each of which provides for a fluid-permeable, high efficiency, low-pressure drop, adsorptive composite filter such as generally described by U.S. Patent Nos. 7,014,693, 6,761,753, 6,610,128, and 6,447,584, the contents of which are hereby incorporated by reference herein. For example, adsorptive media for the filter can include, for example, chemisorptive or 20 physisorptive media and combinations thereof. Other media for the filter can comprise, without limitation, HEPA or ULPA filter mediums, which can also be used in combination or along with adsorptive media. Preferably, the cassette of the invention can comprise a passive purifier or desiccant member. Exemplary passive purifiers or desiccant members can reduce the extent of contaminants that may contact the reticle.

25 In one embodiment, the cassette can be compatible with standard cleaning agents used in semiconductor manufacturing facilities. Examples of materials for a reticle cassette include fiber reinforced molded polymers or PTFE coated metals such as aluminum or titanium. The invention also contemplates any suitable materials for a cassette. Preferably, a device for transitioning a reticle from atmospheric pressure to 30 vacuum in a semiconductor tool can be provided. The invention also contemplates a reticle protection and transport system. For example, an indexer that stores a plurality of

reticles in a storage bay can be provided. An inlet 205 of the cassette 198 can include an internal diffuser element. Exemplary diffusers include those comprising TEFLON (E. I. du Pont de Nemours and Company, 1007 Market Street, Wilmington, Delaware 19898). The reticle cassette 198 can also comprise at least one door member 210. Preferably, the 5 door member can minimize space requirements by comprising a roll top configuration.

Figure 14 is a representation of an exemplary reticle cassette of the invention. Preferably, the reticle cassette can permit a purge gas to circulate uniformly throughout an interior thereof. By uniformly circulating a purge gas such as CDA or extra CDA throughout the cassette, the amount of potential contaminants exposed to the reticles 10 therein can be minimized. As shown, the reticle cassette 212 comprises a plurality of reticle slots 214, which can each be associated with a reticle. In one embodiment, a purge system can be associated with the cassette. Exemplary purge systems can comprise at least one purge line as described herein. The purge lines 216 in Figure 14 provide a purge gas source to reticles along both banks 218 of the cassette. The purge gas source can 15 comprise a source of CDA or extra CDA for removing contaminants from a reticle.

As shown, one or more purge line inlets 220 can be connected to at least one of the banks 218 of the reticle cassette 212. The banks are configured to receive a plurality of reticles with each disposed in a reticle slot 214. Preferably, the cassette can be configured to comprise at least one inlet 220 that connects or is associated with at least one purge line. 20 A purge gas source can be connected or associated with a bank of the cassette through a purge line. Moreover, a purge gas source can communicate with a reticle disposed in contact with a slot. An exemplary cassette also comprises a filter member 222, preferably, a permeable getter filter member.

In one embodiment, an inlet 220 of the cassette 212 can include an internal diffuser 25 element. Exemplary diffuser elements include those comprising TEFLON (E. I. du Pont de Nemours and Company, 1007 Market Street, Wilmington, Delaware 19898). The reticle cassette 212 can also comprise at least one door member 224. Preferably, the door member can minimize space requirements by comprising a retractable configuration.

For example, the purge system for the cassette of Figure 14 can include a plurality 30 of purge lines with each purge line being connected thereto. The invention contemplates use of a diffuser at the inlet of each reticle cassette, which causes a more even distribution

of gas entering each cassette from the associated purge line. The diffuser can be mounted at the purge line inlet or injector port of the cassette or at the outlet of the purge line, where gas flows into the cassette. For example, the inlet can be fitted with a diffuser element. Exemplary diffuser elements are described herein.

5 For the reticle cassette of Figure 14, an ionizer can be associated with at least one of the purge lines of the purge system. In one embodiment, the cassette can store or hold a plurality conventional reticles, each comprising a quartz material. The cassette generally comprises a door portion, which forms a hermetically sealed space to provide a controlled environment. Within the sealed environment, a reticle can be stored. The reticle  
10 can comprise quartz blanks, photomasks or substrates that are susceptible to damage from particulates and gas-phase chemical contaminants. Generally, purging the hermetically sealed space can removes trace contaminants by entraining them in the gas flow. Purging with CDA or extra CDA also can maintain and control the humidity levels within the cassette. Moreover, a purge line for the cassette can be associated therewith to purge  
15 contaminants and maintain a concentration of less than about 10 ppb of water therein.

The filter member of Figure 14 can have a variety of constructions each of which provides for a fluid-permeable, high efficiency, low-pressure drop, adsorptive composite filter such as generally described by U.S. Patent Nos. 7,014,693, 6,761,753, 6,610,128, and 6,447,584, the contents of which are hereby incorporated by reference herein. For  
20 example, adsorptive media for the filter can include, for example, chemisorptive or physisorptive media and combinations thereof. Other media for the filter can comprise, without limitation, HEPA or ULPA filter mediums, which can also be used in combination or along with adsorptive media. Preferably, the cassette of the invention can comprise a passive purifier or desiccant member. Exemplary passive purifiers or desiccant members  
25 can reduce the extent of contaminants that may contact the reticle.

In one embodiment, the cassette can be compatible with standard cleaning agents used in semiconductor manufacturing facilities. Examples of materials for a reticle cassette include fiber reinforced molded polymers or PTFE coated metals such as aluminum or titanium. The invention also contemplates any suitable materials for a  
30 cassette. Preferably, a device for transitioning a reticle from atmospheric pressure to vacuum in a semiconductor tool can be provided. The invention also contemplates a

reticle protection and transport system. For example, an indexer that stores a plurality of reticles in a storage bay can be provided.

Figure 15 is a representation of an exemplary expanding stack of the invention. Preferably, the expanding stack 226 can permit a purge gas to circulate uniformly throughout an interior of a reticle pod container or pod 228 associated therewith. In one embodiment, the reticle pod can be a SMIF as described herein. By uniformly circulating a purge gas such as CDA or extra CDA throughout the pod, the amount of potential contaminants exposed to the reticles therein can be minimized. As shown, the expanding stack can comprise a plurality of reticle pods, which can each be associated with a reticle 10 230. A purge system can also be associated with each pod. The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle. A purge system can also be associated with one or more reticle pods. Exemplary purge systems can comprise at least one purge line as described herein. A purge line can provide a purge gas source to each reticle disposed in the pods. The purge gas source can 15 comprise a source of CDA or extra CDA for removing contaminants from a reticle.

The expanding stack of Figure 15 can include a lift member 232 for operably raising or lowering a reticle pod cover 234, to provide for access to a reticle therein. The reticle pod cover can be comparable to conventional SMIF pod domes. For example, the lift member can be selectively moved by a drive mechanism that is associated with the 20 stack. The stack can also be substantially free of motors, moving parts, circuitry and other contaminant generating components. These features can also be external to the stack. As described, the reticle pod can include one or more diffuser elements 236. Preferably, a diffuser element can comprise TEFLON (E. I. du Pont de Nemours and Company, 1007 Market Street, Wilmington, Delaware 19898). In one embodiment, each reticle pod can 25 also comprise at least one filter member 238. The expanding stack allows for access to any reticle within the stack without compromising the microenvironment of the other reticles associated therewith.

For example, the purge system for the stack of Figure 15 can include a plurality of purge lines with each purge line being connected thereto. The invention contemplates use 30 of a diffuser at the inlet of each reticle container associated with the stack, which causes a more even distribution of entering gas from the associated purge line. The diffuser can be

mounted at the purge line inlet or injector port of the containers or at the outlet of the purge line, where gas flows therein. For example, the inlet can be fitted with a diffuser element. Exemplary diffuser elements are described herein.

For the stack of Figure 15, an ionizer can be associated with at least one of the 5 purge lines of the purge system. In one embodiment, the stack can store or hold a plurality conventional reticles, each comprising a quartz material. The reticle containers or pods associated with the stack generally comprise a door portion, which forms a hermetically sealed space to provide a controlled environment. Within the sealed environment, a reticle can be stored. The reticle can comprise quartz blanks, photomasks or substrates that are 10 susceptible to damage from particulates and gas-phase chemical contaminants. Generally, purging the hermetically sealed space can removes trace contaminants by entraining them in the gas flow. Purgung with CDA or extra CDA also can maintain and control the humidity levels within the containers. Moreover, a purge line for the container can be associated therewith to purge contaminants and maintain a concentration of less than about 15 10 ppb of water therein.

The filter members of Figure 15 can have a variety of constructions each of which provides for a fluid-permeable, high efficiency, low-pressure drop, adsorptive composite filter such as generally described by U.S. Patent Nos. 7,014,693, 6,761,753, 6,610,128, and 6,447,584, the contents of which are hereby incorporated by reference herein. For 20 example, adsorptive media for the filter can include, for example, chemisorptive or physisorptive media and combinations thereof. Other media for the filter can comprise, without limitation, HEPA or ULPA filter mediums, which can also be used in combination or along with adsorptive media.

The invention also contemplates any suitable materials for a stack. Preferably, a 25 device for transitioning a reticle from atmospheric pressure associated with container or pods of the stack to vacuum in a semiconductor tool can be provided. The invention also contemplates a reticle protection and transport system. Figure 16 is a representation of an exemplary expanding stack of the invention. The stack of Figure 16 can comprise each of the features, components and structures as describe for Figure 15. Preferably, the 30 expanding stack 240 can permit a purge gas to circulate uniformly throughout an interior of a reticle container or pod 242 associated therewith. In one embodiment, the reticle pod

can be comparable to a SMIF type pod as described herein. By uniformly circulating a purge gas such as CDA or extra CDA throughout the pod, the amount of potential contaminants exposed to the reticles therein can be minimized. As shown, the expanding stack can comprise a plurality of reticle pods, which can each be associated with a reticle 244. A purge system can also be associated with each pod. Exemplary purge systems can comprise at least one purge line as described herein. The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle.

The expanding stack of Figure 16 can include a lift mechanism comprising guide members 246 for operably raising or lowering a reticle pod cover, to provide for access to a reticle therein. As described, the reticle pod can include one or more diffuser elements 250. Preferably, a diffuser element can comprise TEFLON (E. I. du Pont de Nemours and Company, 1007 Market Street, Wilmington, Delaware 19898). In one embodiment, each reticle pod can also comprise at least one permeable getter filter member 252. The expanding stack allows for access to any reticle within the stack without compromising the microenvironment of the other reticles associated therewith. Figure 16 also demonstrates the compactness of an expandable stack of the invention. Preferably, a purge system can be associated with one or more reticle pods. Exemplary purge systems can comprise at least one purge line shown as 254 and described herein. The purge lines 254 in Figure 16 can provide a purge gas source to each reticle disposed in the pods. The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle.

The invention contemplates use of a diffuser at the inlet of each reticle container associated with the stack of Figure 16, which causes a more even distribution of entering gas from the associated purge line. The diffuser can be mounted at the purge line inlet or injector port of the containers or at the outlet of the purge line, where gas flows therein. For example, the inlet can be fitted with a diffuser element. Exemplary diffuser elements are described herein. For the stack of Figure 16, an ionizer can also be associated with at least one of the purge lines of the purge system. Purging with CDA or extra CDA also can maintain and control the humidity levels within the containers.

Figure 17 is a representation of an exemplary library rack of the invention. Preferably, the library rack 256 can permit a purge gas to circulate uniformly throughout an interior of a reticle box 258 associated therewith. By uniformly circulating a purge gas

such as CDA or extra CDA throughout each box, the amount of potential contaminants exposed to the reticles therein can be minimized. As shown, the library rack can comprise a plurality of reticle boxes, which can each be associated with a reticle 260. A purge system can also be associated with each box. In one embodiment, a box can be associated 5 with a purge system via a purge line.

Preferably, the purge line can communicate with the box through a diffuser element. For example, a diffuser element can comprise TEFLON (E. I. du Pont de Nemours and Company, 1007 Market Street, Wilmington, Delaware 19898). The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a 10 reticle. A purge system can also be associated with one or more reticle boxes. Exemplary purge systems can comprise at least one purge line as described herein. A purge line can provide a purge gas source to each reticle disposed in the boxes. The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle. The library rack of Figure 17 can comprise reticle boxes that each include at least one door 262. 15 A reticle box door allows access to a reticle therein and can close to provide for a clean microenvironment. An exemplary reticle box door can also comprise at least one permeable getter filter member 264.

For example, the purge system for the library of Figure 17 can include a plurality 20 of purge lines with each purge line being connected thereto. The invention contemplates use of a diffuser at the inlet of each reticle box, which causes a more even distribution of gas entering each box from the associated purge line. The diffuser can be mounted at the purge line inlet or injector port of the box or at the outlet of the purge line, where gas flows into the box. For example, the inlet can be fitted with a diffuser element. Exemplary diffuser elements are described herein.

25 For the library of Figure 17, an ionizer can be associated with at least one of the purge lines of the purge system. In one embodiment, the library can store or hold a plurality conventional reticles in boxes therefore, each comprising a quartz material. The boxes generally comprise a door portion, which forms a hermetically sealed space to provide a controlled environment. Within the sealed environment, a reticle can be stored. 30 The reticle can comprise quartz blanks, photomasks or substrates that are susceptible to damage from particulates and gas-phase chemical contaminants. Generally, purging the

hermetically sealed space can removes trace contaminants by entraining them in the gas flow. Purging with CDA or extra CDA also can maintain and control the humidity levels within the individual boxes. Moreover, a purge line for the boxes can be associated therewith to purge contaminants and maintain a concentration of less than about 10 ppb of water therein.

The filter members of the boxes in Figure 17 can have a variety of constructions each of which provides for a fluid-permeable, high efficiency, low-pressure drop, adsorptive composite filter such as generally described by U.S. Patent Nos. 7,014,693, 6,761,753, 6,610,128, and 6,447,584, the contents of which are hereby incorporated by reference herein. For example, adsorptive media for the filter can include, for example, chemisorptive or physisorptive media and combinations thereof. Other media for the filter can comprise, without limitation, HEPA or ULPA filter mediums, which can also be used in combination or along with adsorptive media. Preferably, the boxes of the invention can comprise a passive purifier or desiccant member. Exemplary passive purifiers or desiccant members can reduce the extent of contaminants that may contact the reticle.

In one embodiment, the library and boxes can be compatible with standard cleaning agents used in semiconductor manufacturing facilities. Examples of materials for a reticle library or box include fiber reinforced molded polymers or PTFE coated metals such as aluminum or titanium. The invention also contemplates any suitable materials for a reticle library or box. Preferably, a device for transitioning a reticle from atmospheric pressure to vacuum in a semiconductor tool can be provided. The invention also contemplates a reticle protection and transport system. For example, an indexer that stores a plurality of reticles in a storage bay can be provided.

Figure 18 is a representation of an exemplary library rack of the invention. The library of Figure 18 can comprise each of the features, components and structures as described for Figure 17. Preferably, the library rack 266 can permit a purge gas to circulate uniformly throughout an interior of a reticle box 268 associated therewith. By uniformly circulating a purge gas such as CDA or extra CDA throughout each box, the amount of potential contaminants exposed to the reticles therein can be minimized. As shown, the library rack can comprise a plurality of reticle boxes, which can each be associated with a

reticle. A purge system can also be associated with each box. In one embodiment, a box can be associated with a purge system via a purge line.

Preferably, the purge line can communicate with the box through a diffuser element. For example, a diffuser element can comprise TEFLON (E. I. du Pont de 5 Nemours and Company, 1007 Market Street, Wilmington, Delaware 19898). The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle. A purge system can also be associated with one or more reticle boxes. Exemplary purge systems can comprise at least one purge line as described herein. A purge line can provide a purge gas source to each reticle disposed in the boxes. The purge gas source can 10 comprise a source of CDA or extra CDA for removing contaminants from a reticle. The library rack of Figure 18 comprises reticle boxes that can each include at least one door.

A reticle box door allows access to a reticle therein and can close to provide for a clean microenvironment. For example, the purge system for the library of Figure 18 can include a plurality of purge lines with each purge line being connected thereto. The 15 invention contemplates use of a diffuser at the inlet of each reticle box, which causes a more even distribution of gas entering each box from the associated purge line. The diffuser can be mounted at the purge line inlet or injector port of the box or at the outlet of the purge line, where gas flows into the box. For example, the inlet can be fitted with a diffuser element. Exemplary diffuser elements are described herein.

20 For the library of Figure 18, an ionizer can be associated with at least one of the purge lines of the purge system. In one embodiment, the library can store or hold a plurality conventional reticles in boxes therefore, each comprising a quartz material. The boxes generally comprise a door portion, which forms a hermetically sealed space to provide a controlled environment. Within the sealed environment, a reticle can be stored. 25 The reticle can comprise quartz blanks, photomasks or substrates that are susceptible to damage from particulates and gas-phase chemical contaminants. Generally, purging the hermetically sealed space can removes trace contaminants by entraining them in the gas flow. Purging with CDA or extra CDA also can maintain and control the humidity levels within the individual boxes. Moreover, a purge line for the boxes can be associated therewith to purge contaminants and maintain a concentration of less than about 10 ppb of 30 water therein.

Figures 19, 20, 21 and 22 are representations of exemplary reticle boxes of the invention. As shown, each reticle box 270 can comprise at least one filter member 272, for example, a permeable getter filter member. The filter members of the boxes in Figures 19, 20, 21 and 22 can have a variety of constructions each of which provides for a fluid-permeable, high efficiency, low-pressure drop, adsorptive composite filter such as generally described by U.S. Patent Nos. 7,014,693, 6,761,753, 6,610,128, and 6,447,584, the contents of which are hereby incorporated by reference herein. For example, adsorptive media for the filter can include, for example, chemisorptive or physisorptive media and combinations thereof. Other media for the filters can comprise, without limitation, HEPA or ULPA filter mediums, which can also be used in combination or along with adsorptive media. Preferably, the boxes of the invention can comprise a passive purifier or desiccant member. Exemplary passive purifiers or desiccant members can reduce the extent of contaminants that may contact the reticle.

Preferably, each box can permit a purge gas to circulate uniformly throughout an interior thereof. By uniformly circulating a purge gas such as CDA or extra CDA throughout each box, the amount of potential contaminants exposed to the reticles therein can be minimized. A purge system can also be associated with each box. In one embodiment, a box can be associated with a purge system via a purge line. The boxes of Figures 19, 20, 21 and 22 can include a plurality of purge lines with each purge line being connected thereto. The invention contemplates use of a diffuser at the inlet of each reticle box, which causes a more even distribution of gas entering each box from the associated purge line. The diffuser can be mounted at the purge line inlet or injector port of the box or at the outlet of the purge line, where gas flows into the box. For example, the inlet can be fitted with a diffuser element. Exemplary diffuser elements are described herein. In one embodiment, the library can store or hold a plurality conventional reticles in boxes therefor, each comprising a quartz material. The boxes generally comprise a door portion, which forms a hermetically sealed space to provide a controlled environment. Within the sealed environment, a reticle can be stored. The reticle can comprise quartz blanks, photomasks or substrates that are susceptible to damage from particulates and gas-phase chemical contaminants. Generally, purging the hermetically sealed space can removes trace contaminants by entraining them in the gas flow. Purging with CDA or extra CDA also can maintain and control the humidity levels within the individual boxes. Moreover,

a purge line for the boxes can be associated therewith to purge contaminants and maintain a concentration of less than about 10 ppb of water therein.

Preferably, the purge line can communicate with the box through a diffuser element. For example, a diffuser element can comprise TEFLO (E. I. du Pont de 5 Nemours and Company, 1007 Market Street, Wilmington, Delaware 19898). The purge gas source can comprise a source of CDA or extra CDA for removing contaminants from a reticle. A purge system can also be associated with one or more reticle boxes. Exemplary purge systems can comprise at least one purge line as described herein. A purge line can provide a purge gas source to each reticle disposed in the boxes. The purge gas source can 10 comprise a source of CD A or extra CDA for removing contaminants from a reticle. The reticle boxes of Figures 19, 20, 21 and 22 each include at least one door 274. A reticle box door allows access to a reticle therein and can close to provide for a clean microenvironment.

In one embodiment, Figure 19 comprises a simple door. Preferably, the door can 15 be removed by a robotic means such as, for example, those described herein. The robotic means can then remove the reticle from the box. As shown, the door separates completely from the box, providing access to a reticle therein. For example, the door can comprise a protrusion that can be grabbed by a robotic device to pull the door from the box. Figure 20 comprises a hinged door. As shown, the door opens such that a reticle therein can be 20 removed. The invention contemplates any suitable robotic means by which to open the door. The door of the box in Figure 20 comprises an opening member by which a force can be applied to rotate the door away from the box on its hinge. The invention contemplates the force can be provided by an operator or robotic device. A person of ordinary skill in the art can appreciate the type of hinge or hinges that would be suitable 25 for use with the box. Exemplary hinges are those that do not introduce or cause a significant amount of contaminant or particulate formations.

Moreover, Figure 21 provides an end effector door, which can be associated with a reticle. Any suitable means can be used to remove the door, which can be transported in a semiconductor manufacturing facility with the reticle associated therewith. Preferably, the 30 door can be removed by a robotic means such as, for example, those described herein. The robotic means can then remove the reticle from the box. As shown, the door separates

completely from the box. For example, the door can comprise a protrusion that can be grabbed by a robotic device to pull the door from the box. The door is associated with the reticle such that removing the door allows transport in the reticle. An advantage of an end effector door is that one operation can be performed to remove the door and transport the reticle, which can minimize the opportunity for increased contaminant or particulate formations when compared to multiple operations with myriad moving parts.

Figure 22 provides a clam shell end effector door. The door of the box in Figure 22 is associated with the reticle. The clam shell type cover 273 can protect the reticle as it moves through, for example, a tool. As described, a robotic means can be used to remove and transport the door and reticle. A person of ordinary skill in the art can incorporate hinges or related means with the box such that the cover is associated therewith. An upper and lower part of the cover can each rotate on the hinges in a manner moving them away from the reticle. The result is that the reticle can be covered during transport and exposed when required for use. Moreover, given that the cover is integrated with the box, only one operation need be performed to remove the door and transport the reticle, which can minimize the opportunity for increased contaminant or particulate formations when compared to multiple operations with myriad moving parts. For example, the door of the box in Figure 22 can comprise a protrusion that can be grabbed by a robotic device for transport.

In one embodiment, an exemplary robotic means is shown in Figure 23. For example, Figure 23 is a representation of an exemplary robot end effector reticle shield. The robot end effector reticle shield 276 comprises a protective cover 278 that can be mounted thereon to protect the reticle 280 as it moves through a tool. The shield 276 of Figure 23 can comprise standard robotic components that include, for example, a drive system and actuators. A controller for controlling the drive system of the robotic device can calculate a profile of a commanded motion before the motion is performed. The controller can also recalculate a profile multiple times until the controller determines the motion to be performed. The robotic device can also include a gripper arm for gripping the reticles, containers or pods during transport. The gripper arm can be driveable by a gripper arm drive for movement away from and towards a library or box. The robotic device can comprise a vertical column to which the gripper arm is movably mounted. Vertical movement of the gripper arm relative to the vertical column can be provided by a

vertical drive. The robotic device can also include a carriage to which the vertical column is rotatably mounted.

The robotic device can also include a vision system for determining whether a container or pod is occupied or empty, positions of the gripper relative to the receptacle 5 and whether the gripper is correctly gripping a reticle, container or pod. In one embodiment, a robotic end effector shield can provide for movement of reticle pods and reticles among areas of a semiconductor manufacturing facility. Preferably, standard robotic devices can also be used to transport reticle pods, reticles or combinations thereof to a reticle storage bay associated with a semiconductor tool. Such semiconductor tools 10 can include lithography, etching, deposition or implantation tools. The shield can also comprise a handle member, which can be used to move the shield and associated reticle. In one embodiment, the handle member can also provide for a mechanism by which the cover can be opened to allow access to the reticle. A person of ordinary skill in the art can understand that the handle member may comprise any suitable design or configuration. 15 Exemplary designs and configurations for the handle member allow it to be operably associated with the cover such that it is capable of moving the cover and providing access to at least one reticle therein.

The invention provides systems and methods for minimizing or treating reticle surface contaminant and particulate formations such as, for example, haze formations. 20 Preferably, the systems and methods of the invention can be used to prevent or substantially remove and clean contaminant or particulate formations from the surface of a reticle. In general, transporting reticles within a semiconductor manufacturing facility tends to cause contaminants and particulates to be disposed or form on surfaces thereof. Typical contaminants and particulates on the surfaces of a reticle can include, for example, 25 ammonium sulfate, ammonium carbonate, ammonium carbamate, acrylonitrile, butadiene styrene co-polymer, dimethyl phthalate, diethyl phthalate, dibutyl phthalate, dioctyl phthalate, palmitic acid, 2,4-di-t-butyl phenyl phosphite, 2,6-di-t-butyl phenyl phosphite, cellulose nitrate, methyl palmitate, potassium phosphate, cyanuric acid, stearic acid, t-butyl benzene, TINUVIN (Ciba Specialty Chemicals, 540 White Plains Road, Tarrytown, 30 New York 10591), oleic acid amide, brassidic acid amide, cyanoacrylate adhesive, poly(dimethyl siloxane), silicic acid, ammonium silicates, poly(methyl methacrylate), poly(butyl methacrylate), poly(methacrylic acid), poly(vinyl chloride), poly(vinylidene

chloride, poly(tetrafluoroethylene, sodium ions, potassium ions, calcium ions, ceric ammonium salts, silica gels, organo silanes, organo, siloxanes, silanols, alkyl fluorosulfonic acids, aryl fluorosulfonic acids, Langmuir-Blodgett films of long chain polymer aliphatic compounds, sodium chloride, potassium chloride, glycine, protein residues, SANTOV AR (Great Lakes Chemical Corporation, 2226 Haynesville Highway El Dorado, Arkansas 71731), nickel acetate, nickel sulfate, chromium sulfate, nylon, organo amines and nitrile compounds.

The formation of contaminants or particulates on the surface of a reticle can be through physical or chemical mechanisms and combinations thereof. Exemplary chemical mechanisms include those that are inorganic or organic. During lithography, contaminants and particulates can form on the surface of a reticle at various wavelengths including, for example, 365, 248 and 193 nm. Contaminants and particulates tend to form more rapidly on reticle surfaces at shorter wavelengths. The methods of the invention can be used to clean reticle surfaces on which contaminants and particulates are disposed or formed. Exemplary methods can substantially remove contaminants, particulates and combinations thereof from the surface of reticles for reuse. Prior to reuse, a reticle can also be pretreated by performing a method of the invention. Pretreating a reticle can prevent or minimize contaminant or particulate formations that may occur in reuse. In one embodiment, a method of the invention comprises pretreating at least one surface of a reticle with a plasma. For example, oxygen plasma can bombard at least one reticle surface to prevent or minimize contaminant or particulate formations during subsequent use of the reticle. Other suitable plasmas can include those comprising, without limitation, nitrogen, argon, hydrogen, air and combinations thereof.

For example, a method of the invention can include a plasma formed by gaseous oxygen. A flow rate of gaseous oxygen can, without limitation, be from about 50 to 150 standard cubic centimeters per minute (sccm). Preferably, the plasma can bombard at least one surface of the reticle at a low temperature. Selection of a suitable plasma temperature for bombardment of a reticle surface can be performed by a person of ordinary skill in the art. An exemplary plasma can be at pressures from about 10 to 100 millitorr (mT) and power of about 500 to 800 watts (W). The period of time for bombardment can vary as understood by a person of ordinary skill in the art. The invention also contemplates any means for providing bombardment of a reticle surface with an oxygen plasma. Such

means for bombarding the surface of a reticle with an oxygen plasma can include conventional or emerging technologies. Conventional means for plasma bombardment of at least one reticle surface include devices or apparatuses generally described in U.S. Patent Nos. 6,610,257 and 6,452,315, the contents of which are hereby incorporated by 5 reference herein.

Plasma bombardment of a reticle surface can occur by operably associating a means therefor with, for example, a reticle pod, box, stocker, library or tool. In one embodiment, a means for plasma bombardment of a reticle, for example, a device or apparatus, can be incorporated into the design or physical structure of a reticle pod, box, 10 stocker, library or tool. Incorporating a means for plasma bombardment into, without limitation, a reticle pod, box, stocker, library or tool can be performed by conventional approaches that account for process requirements and characteristics or properties of a semiconductor manufacturing facility. The type of conventional approach for incorporating a means of plasma bombardment in a reticle pod, box, stocker, library or 15 tool can be selected and performed by a person of ordinary skill in the art.

In one embodiment, oxygen plasma bombardment can be used to prepare and clean or treat a reticle for reuse. A method of the invention can also comprise bombarding a reticle surface with an electrically conductive plasma including, without limitation, any type of ionized gas. Plasma bombardment of at least one reticle surface can also be used 20 with each of the systems of the invention. For example, plasma bombardment can occur during reticle transport through a semiconductor manufacturing facility. The invention contemplates plasma bombarding at least one surface of a reticle on which silica gels are disposed or formed from use and transport thereof. Preferably, the plasma bombardment 25 can convert silica gels disposed or fanned on a reticle surface to silicon dioxide. By converting silica gels disposed or formed on at least one surface of a reticle to silicon dioxide, the reticle can be reused.

The invention also provides a method for minimizing or controlling electromagnetic fields on or adjacent to at least one surface of a reticle. Preferably, the method comprises providing an electrostatic discharge means such as, for example, a 30 Faraday cage or devices based thereon. Exemplary electrostatic discharge means are generally described by U.S. Patent Nos. 6,084,178, 6,933,805 and 6,944,025 and U.S.

Publication No. 2006/0151207, the contents of which are hereby incorporated by reference herein. The electrostatic discharge means can also comprise other conventional or emerging technologies.

A method of the invention can comprise using an electrostatic discharge means 5 with each of the systems of the inventions. In one embodiment, electromagnetic fields on or adjacent to at least one reticle surface can be minimized or controlled by an electrostatic discharge means. For example, the method can be preformed during reticle transport through a semiconductor manufacturing facility. An electrostatic discharge means can also be operably associated with a reticle pod, box, stocker, library or tool. Preferably, an 10 electrostatic discharge means, for example, a device or apparatus, can be incorporated into the design or physical structure of a reticle pod, box, stocker, library or tool. Incorporating an electrostatic discharge means into, without limitation, a reticle pod, box, stocker, library or tool can be performed by conventional approaches that account for process requirements and characteristics or properties of a semiconductor manufacturing facility. 15 The type of conventional approach for incorporating an electrostatic discharge means in a reticle pod, box, stocker, library or tool can be selected and performed by a person of ordinary skill in the art.

Preferably, an electrostatic discharge means can comprise nanomaterials such as, without limitation, carbon nanotubes. Nanomaterials for use with electrostatic discharge 20 means are generally described by U.S. Publication Nos. 2005/0208304 and 2005/0095938, the contents of which are hereby incorporated by reference herein. Single and multi-wall carbon nanotubes can be adapted by a person of ordinary skill in the art for use as electrostatic discharge means. Other conventional or emerging technologies related to nanomaterials can also be used to provide for an electrostatic discharge means.

25 As described, ammonium sulfate can be involved in haze formation on the surface of a reticle, which occurs in the presence of sulfuric acid, ammonia and water. Haze forms on reticle surfaces during transport through a semiconductor manufacturing facility. The invention provides systems and methods for minimizing or preventing haze formation by removing water from the reticle environment. Similarly, silica gels, organo silanes, 30 organo siloxanes, silanols or combinations of these contaminants or particulates can form on the surfaces of a reticle. For example, without being bound to theory, these

contaminants or particulates can comprise chemically and physically adsorbed water, which may each adhere to a reticle surface in the presence of water. The systems and methods of the invention can also reduce or minimize contaminants or particulates forming on the surfaces of a reticle by removing water from the reticle environment.

5        In particular, ammonia may be present from conventional rinse processes and reside on a quartz surface, for example, of a reticle. Negative ions can also be disposed on quartz materials or surfaces under pellicles. Similarly, sulfate can be available for formations from conventional cleaning processes and may reside on the chromium surface of chromium sulfate. Within a semiconductor manufacturing facility, ultraviolet light in  
10      the present of water may mobilize contaminants or particulates. Langmuir-Blodgett films of long chain polymer aliphatic compounds also tend to adhere to reticle surfaces in the presence of water. Through removal of water from reticle environments, the systems and methods of the invention can reduce or minimize the extent of these aliphatic compounds adhering to surfaces thereof.

15        While the present invention has been described herein in conjunction with a preferred embodiment, a person with ordinary skill in the art, after reading the foregoing, can effect changes, substitutions of equivalents and other types of alterations to those set forth herein. Each embodiment described above can also have included or incorporated therewith such variations as disclosed in regard to any or all of the other embodiments.  
20        Thus, it is intended that protection granted by Letters Patent hereon be limited in breadth and scope only by definitions contained in the appended claims and any equivalents thereof.

## CLAIMS

What is claimed is:

1. A reticle handling system comprising:

a storage housing defining an enclosed interior environment;

5 a gas delivery system that can be fluidly coupled to a purge gas source;

the storage housing comprising a plurality of reticle storage receptacles in the enclosed interior environment, each reticle storage receptacle configured for receiving a reticle pod wherein each reticle pod comprises an enclosure with structure for holding a reticle and having a purge inlet and a purge outlet; each reticle storage receptacle having a 10 purge outlet connected to the gas delivery system for connecting with the purge inlet of a reticle in place at said storage receptacle; each reticle storage receptacle having an open area for allowing discharge of the purge outlet into the enclosed interior environment of the storage housing.

2. The reticle handling system of claim 1 wherein the enclosed interior 15 environment comprises air and the gas delivery system delivers air which is at least clean dry air.

3. The reticle handling system of claim 2 wherein the reticle handling system is in combination with a plurality of the reticle pods having a purge inlet and a purge outlet, each of the reticle pods further having a water absorbing filter therein that is recharged 20 when exposed to air which is at least clean dry air.

4 The combination of claim 3 wherein each of the reticle pods has the water absorbing filter positioned in the purge outlet of the respective reticle pod such that any clean dry air that exits the purge outlet of the reticle pod exits through the water absorbing filter.

25 5. The reticle handling system of claim 1 wherein each of the plurality of reticle storage receptacles is configured as a shelf with an upper side and a purge outlet oriented upwardly at said upper side.

6. The reticle handling system of claim 5 wherein each of the plurality of the reticle storage receptacles has a void in the shelf for positioning the purge outlet of a reticle pod received by reticle storage receptacle, said void opening into the interior environment of the storage housing whereby the purge outlet of a reticle pod received by  
5 each of the reticle storage receptacles discharges into the interior environment of the storage housing

7. The reticle handling system of claim 5 wherein a plurality of the reticle storage receptacles are movable within the storage housing.

8. The reticle handling system of claim 7 wherein the plurality of the reticle storage receptacles are swivelable about a vertical axis.  
10

9. The reticle handling system of claim 1 wherein the purge gas source comprises clean dry air having about less than 1000 ppb of water.

10. The reticle handling system of claim 1 wherein the purge gas source comprises clean dry air having about less than 100 ppb of water.

15 11. The reticle handling system of claim 1 wherein the purge gas source comprises clean dry air having about less than 10 ppb of water.

12. The reticle handling system of claim 1 wherein the purge gas source comprises clean dry air having about less than 1 ppb of water.

13. The reticle handling system of claim 1 wherein the enclosed interior  
20 environment has a multiplicity of reticle storage receptacles that each purge outlet of said multiplicity of reticle storage receptacles is continuously open when a reticle pod is not in position thereon.

25 14. The reticle handling system of claim 13 wherein the enclosed interior environment is substantially filled with air, and wherein the enclosed interior environment has a downward airflow and wherein the downward airflow is generated by an interior environment exhaust.

15. The reticle handling system of claim 1 wherein the storage housing is configured as a stocker, and the reticle handling system further comprises a lithography process tool connected by a robotic conveyance system to a process tool, the process tool including a extra clean dry air purging system whereby when a reticle is in use lithography 5 process tool, it may be periodically purged with the clean dry air.

16. The reticle handling system of claim 15 further comprising an inspection tool, the inspection tool connected to a gas delivery system by a robotic conveyance system, the inspection tool including a clean dry air purging system whereby when a reticle is in the inspection tool, it may be periodically purged with the clean dry air.

10 17. The reticle handling system of claim 1 wherein the gas delivery system has a gas stream flowing therethrough and wherein the gas delivery system includes an ionizer .

18. The reticle handling system of claim 17 wherein the gas delivery system utilizes non metal lines and components downstream from the ionizer in the gas stream.

15 19. The reticle handling system of claim 1 further comprising a robotic gripping device for individually gripping reticle pods for placement on and removal from the reticle storage receptacles, the robotic gripping device further comprising an air flow sensor for confirmation of the purge flow at the reticle storage receptacles.

20. The reticle handling system of claim 19 wherein the air flow sensor is positioned for detection of air flow emitting from the reticle storage receptacle purge outlet before a reticle pod is placed on the reticle storage receptacle.

21. The reticle handling system of claim 19 wherein the air flow sensor is positioned for detection of air flow emitting from the reticle pod purge outlet after a reticle pod is placed on the reticle storage receptacle.

25 22. The reticle handling system of claim 1 wherein the enclosed interior environment comprises air and the gas delivery system delivers air into the interior environment at a interior inlet separate from the reticle storage receptacles and located at an position proximate an upper region of the enclosed interior environment, and wherein the enclosed interior environment also has a lower region wherein the storage housing

further comprises an exhaust positioned in the lower region for exhausting the air in the enclosed interior environment.

23. The reticle handling system of claim 1 wherein the enclosed interior environment comprises air and the gas delivery system delivers air into the interior 5 environment at a plurality of interior inlets each positioned at a reticle storage receptacle to wash the exterior of each reticle pod seated in the storage housing.

24. A system for purging reticle storage comprising:

10 a plurality of reticle pods, each reticle pod having a door and support structure for supporting a reticle, the reticle pod having a door for accessing the reticle, and having a sealed interior when the door is closed, the pod having purge inlet and a purge outlet, a 15 water absorbing filter on the door, the filter having two sides, one side open to the interior of the reticle pod, and the other side open exteriorly of the pod,

15 a storage housing comprising a plurality of reticle storage shelves in the enclosed interior environment, each shelf with at least one reticle storage receptacle, each reticle storage receptacle configured for receiving a reticle pod wherein each reticle pod having a 20 purge inlet and a purge outlet; each reticle storage receptacle having a purge outlet connected to the gas delivery system for connecting with the purge inlet of a reticle in place at said storage receptacle;

20 a clean dry air delivery system that is fluidly coupled to a clean dry air source, said clean dry air delivery system connected to each reticle storage receptacle to provide purging of the reticle pods when seated at the reticle storage receptacles.

25. The system of claim 24, wherein each reticle pod has an upper shell portion and a lower door latchable and sealable to the upper shell portion, and wherein the filter is positioned in an aperture in the door, and wherein the filter has a horizontal length and a 25 horizontal width, both of which are a plurality of times greater than the vertical depth of the filter.

26. The system of claim 25 wherein the filter is comprised of a plurality of layers.

27. The system of claim 24 wherein the storage housing is a reticle pod stocker, and the system further comprises a reticle inspection tool, a lithography process tool, and a conveyance system for moving each of the reticle pods between the storage housing, the inspection tool, and the lithography process tool, each of the reticle inspection tool and 5 lithography process tool having a opening and removal mechanism for taking the reticle from the reticle pod, and wherein the reticle inspection tool and the lithography process tool each connected to the clean dry air delivery system to maintain a purge of the reticle most of the time when the reticle is in the inspection tool or the lithograph process tool.

28. A storage housing for reticle pods, the housing having an enclosed interior 10 with air therein, a plurality of receptacles for a plurality of reticle pods, each reticle pod having a lower door latchable onto a upper shell, the lower door having a purge inlet and a purge outlet, each receptacle having a purge outlet for engaging a purge inlet of one of the reticle pods, the storage housing further comprising a gas delivery system providing clean dry air connected to the purge outlets of the receptacles, the gas delivery system providing 15 clean dry air having a water content of less than about 1000 ppb.

29. A storage housing for reticle pods, the housing having receptacles for a plurality of reticle pods, each reticle pod having a lower door latchable onto a upper shell, the lower door having a purge inlet and a purge outlet, each receptacle having a purge outlet for engaging a purge inlet of a reticle pod, the storage housing further comprising a 20 gas delivery system providing clean dry air having a water content of less than about 10 ppb.

30. A reticle handling system comprising:  
a storage housing defining an enclosed interior environment;  
a gas delivery system that can be fluidly coupled to a purge gas source;  
25 the storage housing comprising a plurality of reticle storage receptacles in the enclosed interior environment, each reticle storage receptacle configured for receiving a reticle pod wherein each reticle pod having a purge inlet and a purge outlet; each reticle storage receptacle having a purge outlet connected to the gas delivery system for connecting with the purge inlet of a reticle in place at said storage receptacle;

a robotic gripping device for individually gripping reticle pods for placement on and removal from the reticle storage receptacles, the robotic gripping device further comprising an air flow sensor for confirmation of the purge flow at the reticle storage receptacles.

5 31. The reticle handling system of claim 30 wherein each reticle storage receptacle has a open area for allowing discharge of the purge outlet into the enclosed interior environment of the storage housing

32. The reticle handling system of claim 30 wherein the purge gas source provides clean dry air.

10 33. The reticle handling system of claim 32 wherein the water content of the clean dry air is less than 10 ppb.

34. A method of maintaining a low humidity environment on a reticle, the method comprising the steps of:

15 when not in use or when not in a process tool or an inspection tool, storing the reticle in a reticle pod that has a purge inlet and a purge outlet and a moisture getter, the moisture getter rechargeable when the reticle pod is purged with clean dry air;

storing the reticle pod in a reticle pod stocker; and

purging the reticle pod most of the time when the reticle pod is in the reticle pod stocker with at least clean dry air.

20 35. The method of claim 34 further comprising the step of maintaining the reticle when not in the reticle pod, in a sealed enclosure and washing the reticle with clean dry air most of the time when the reticle is in such a sealed enclosure and not in the reticle pod.

25 36. The method of claim 34 further comprising the step of purging the reticle pod substantially all of the time with CDA when the reticle pod is in the reticle pod stocker.

37. The method of claim 34 further comprising the step of purging the reticle pod substantially all of the time with extra CDA when the reticle pod is in the reticle pod stocker.

38. The method of claim 34 wherein the getter comprises a filter positioned in 5 the purge outlet of the reticle pod.

39. The method of claim 34 wherein the reticle pod stocker has a plurality of reticle storage receptacles with a purge outlet for connection to reticle pod seated thereon, and wherein a robotic gripper grasps the reticle pods individually for seating on and removal from the reticles, the gripping device having an air flow sensor and the method 10 further comprises the step of sensing the flow of clean dry air at the reticle storage receptacle.

40. A method of minimizing haze buildup on a reticle, the method comprising the steps of:

storing the reticle in a purgible reticle pod with a moisture getter therein;

15 storing the purgible reticle pod in a reticle pod stocker; and

maintaining the stocker with clean dry air and purging the purgible reticle pod when in the stocker with a purge stream of clean dry air.

41. The method of claim 40 further comprising the step of recharging the moisture getter in the purgible reticle pod by putting the getter in the purge stream.

20 42. A method of minimizing haze buildup on a reticle, the method comprising the steps of:

storing the reticle in a purgible reticle pod;

storing the purgible reticle pod in a reticle pod stocker; and

maintaining the stocker with extra clean dry air.

43. The method of claim 40 further comprising the step of putting a rechargeable moisture getter in the reticle pod and recharging the moisture getter by putting the moisture getter in the purge stream.

44. A method of confirming flow in a reticle pod stocker that has a plurality of 5 reticle storage receptacles with a respective purge outlets for connection to reticle pod seated thereon, comprising the step of positioning a reticle pod robotic gripper with an air flow sensor in the proximity of one of the purge outlets for confirming air flow.

45. A reticle pod stocker comprising:  
10 an enclosed housing defining an enclosed interior environment;

a source of at least clean dry air connected to the reticle pod stocker;

a plurality of receptacles with open purge outlets at each receptacle, each purge outlet connected to the source of at least clean dry air whereby a purge stream exits each open purge outlet;

15 each receptacle configured for receiving a purgible reticle pod with the open purge outlet engaging an inlet on a purgible reticle pod seated thereon;

wherein when a reticle pod is seated on a receptacle the respective purge outlet injects the purge stream into the reticle pod and when the reticle pod is not seated thereon the purge outlet exits into the enclosed interior environment of the housing.

46. The reticle pod stocker of claim 45 further comprising a robotic gripper for 20 placing and removing reticle pods at and from the receptacles, and wherein the robotic gripper comprises an air flow sensor for confirming air flow at a receptacle.

47. The reticle pod stocker of claim 45 wherein each receptacle has a pair of 25 purge outlets each on opposite side of a void in the receptacle, and wherein the reticle pods have an outlet filter positioned intermediate two purge inlets, and wherein the two purge inlets engage the two purge outlets for injecting a stream of at least clean dry air into the reticle pod, and wherein said stream of at least clean dry air exits the reticle pod at the void in the receptacle to the enclosed interior environment of the stocker.

1/27


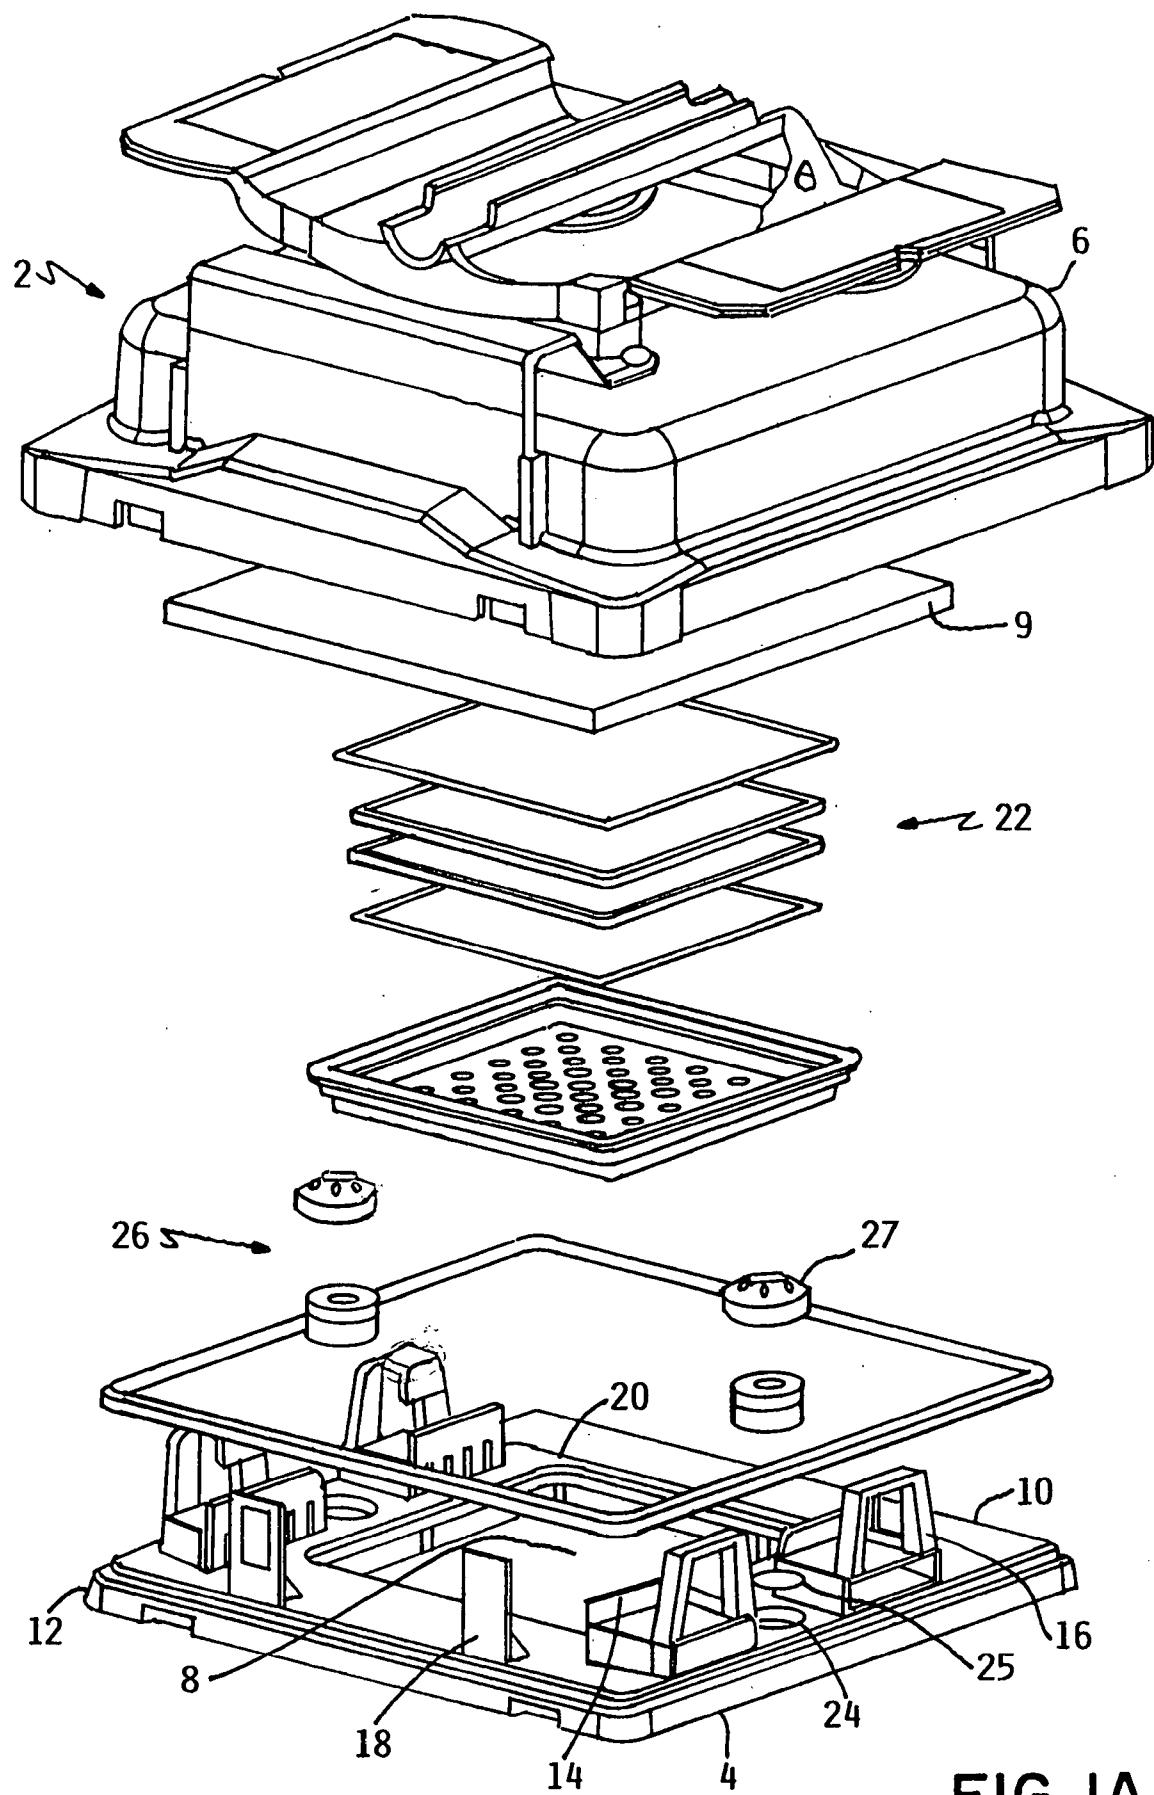


FIG. 1A

2/27

FIG. 1B

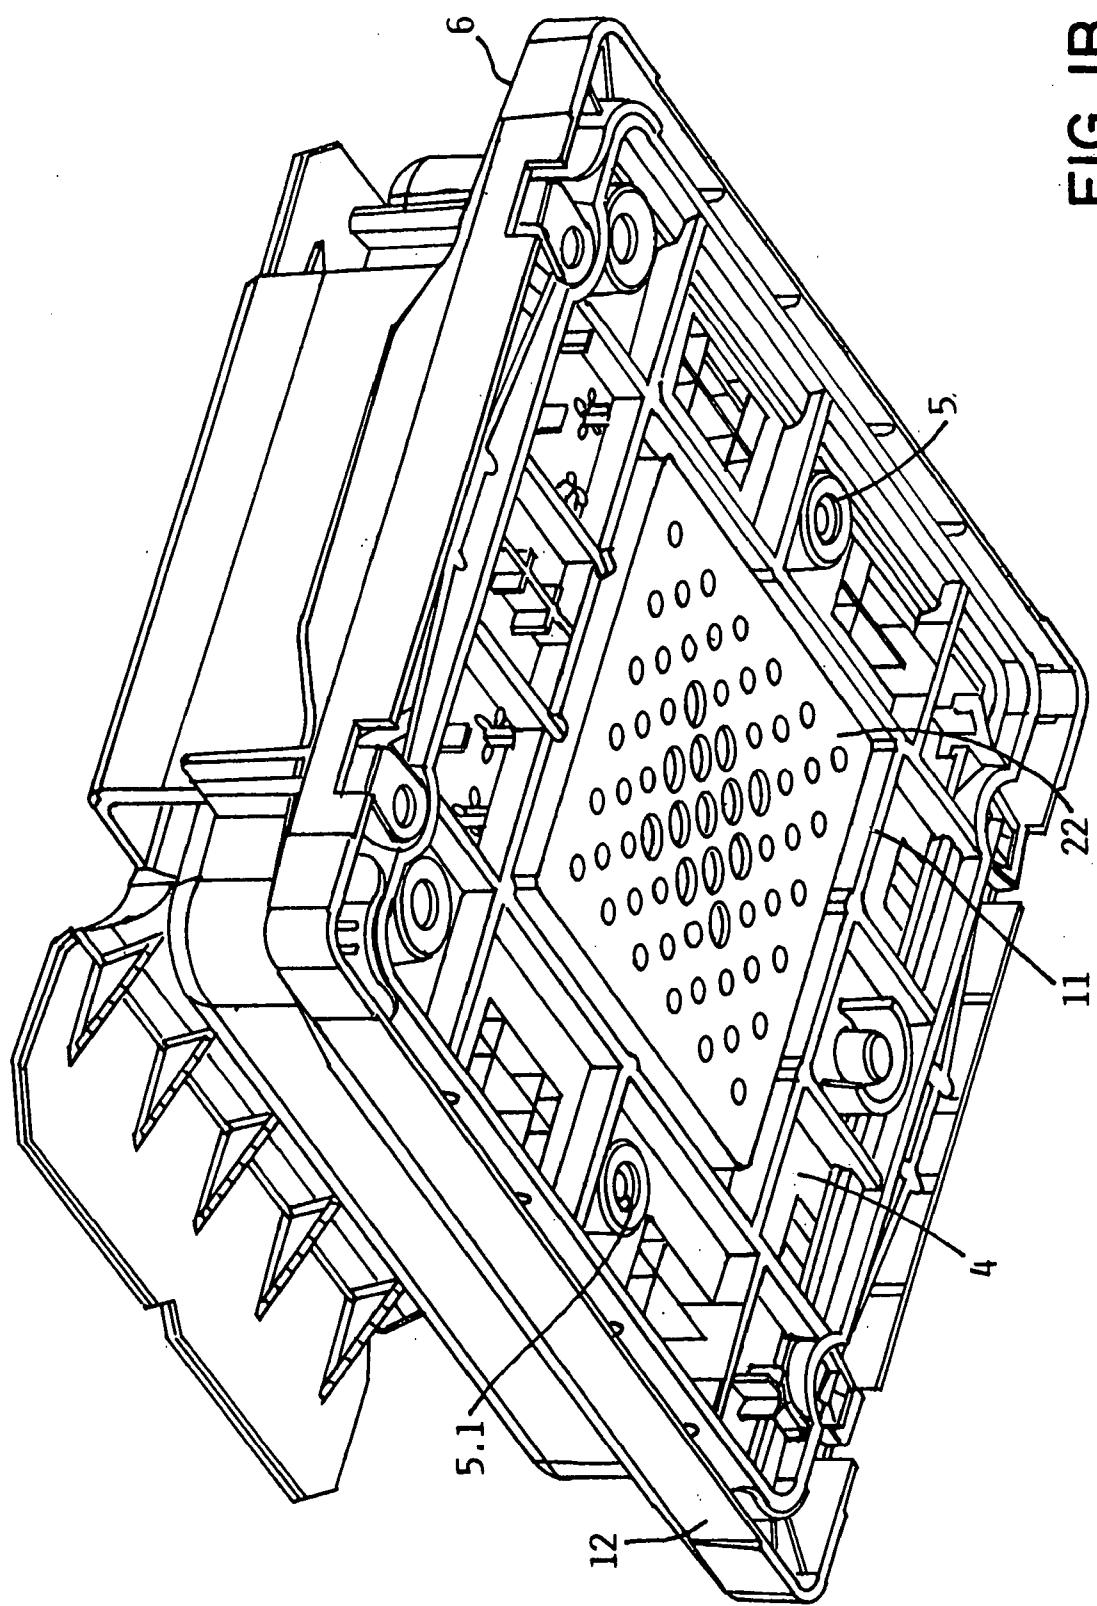

3/27

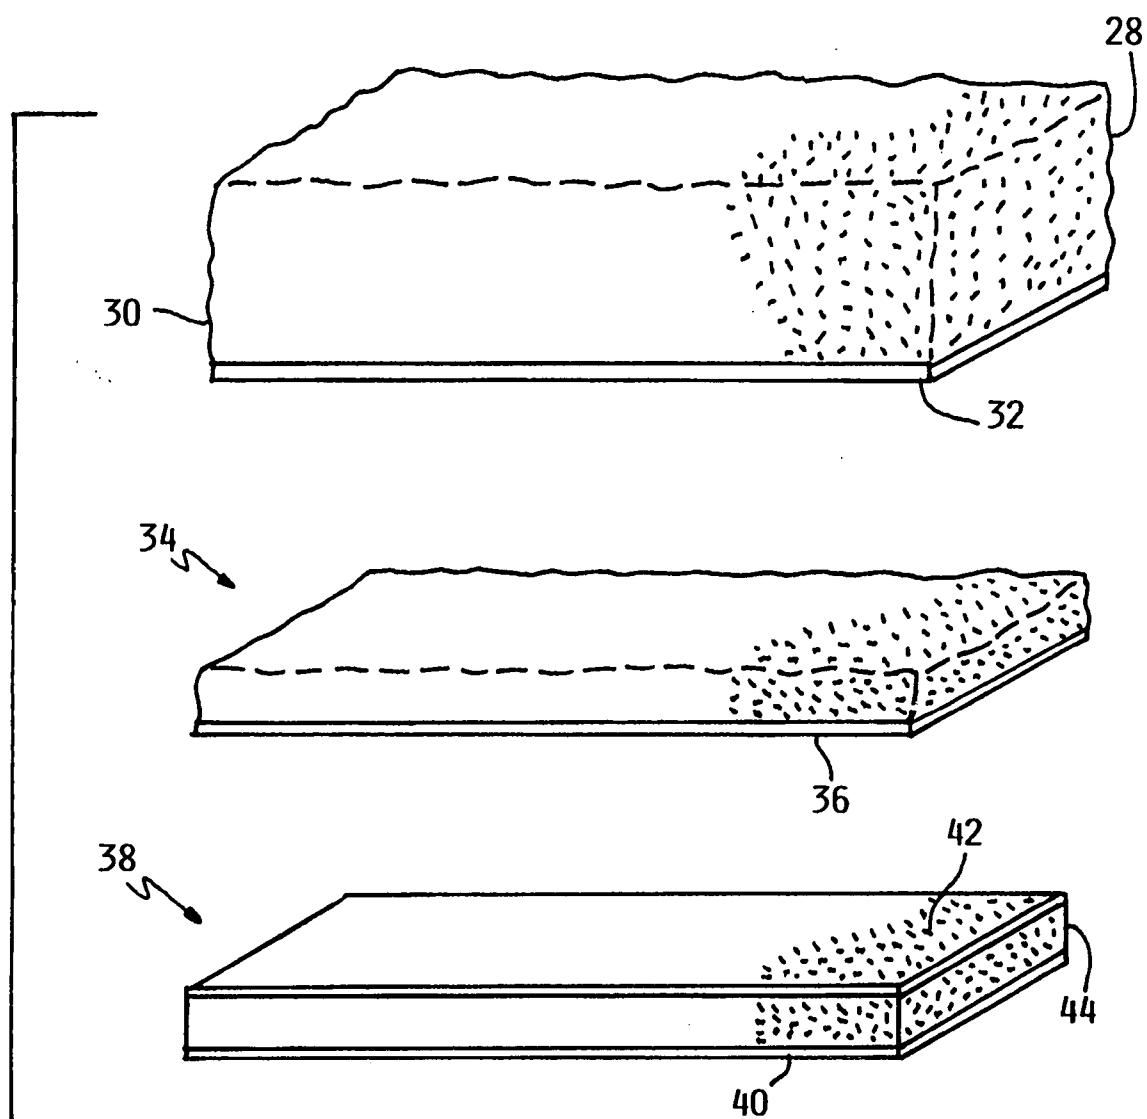


FIG. 2

4/27

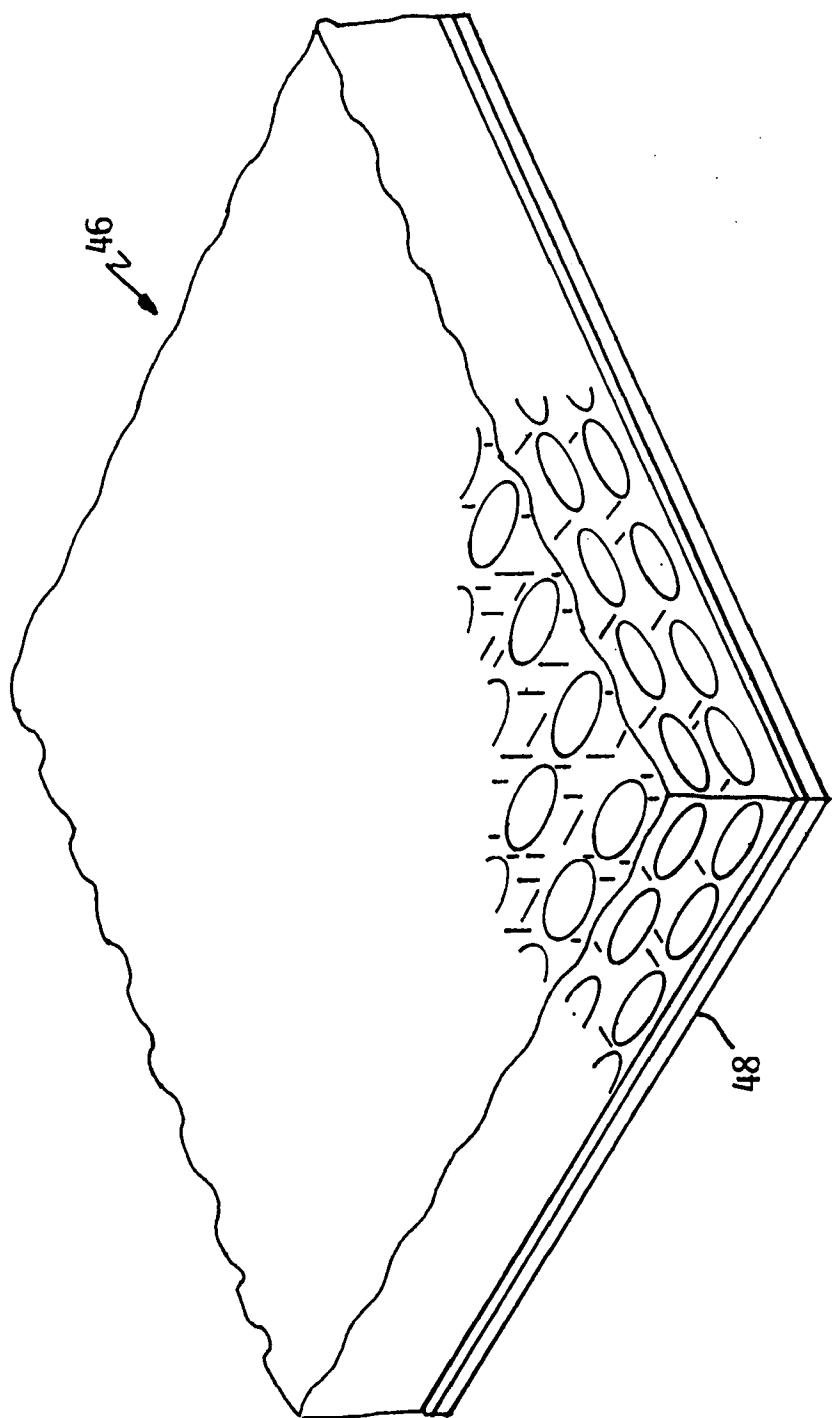


FIG. 3

5/27

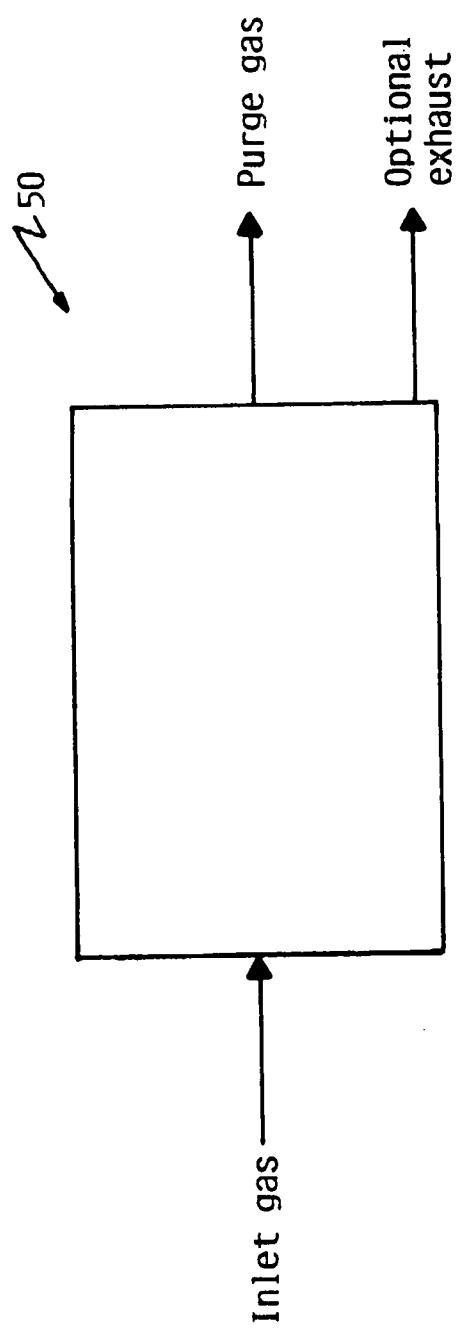


FIG. 4

6/27

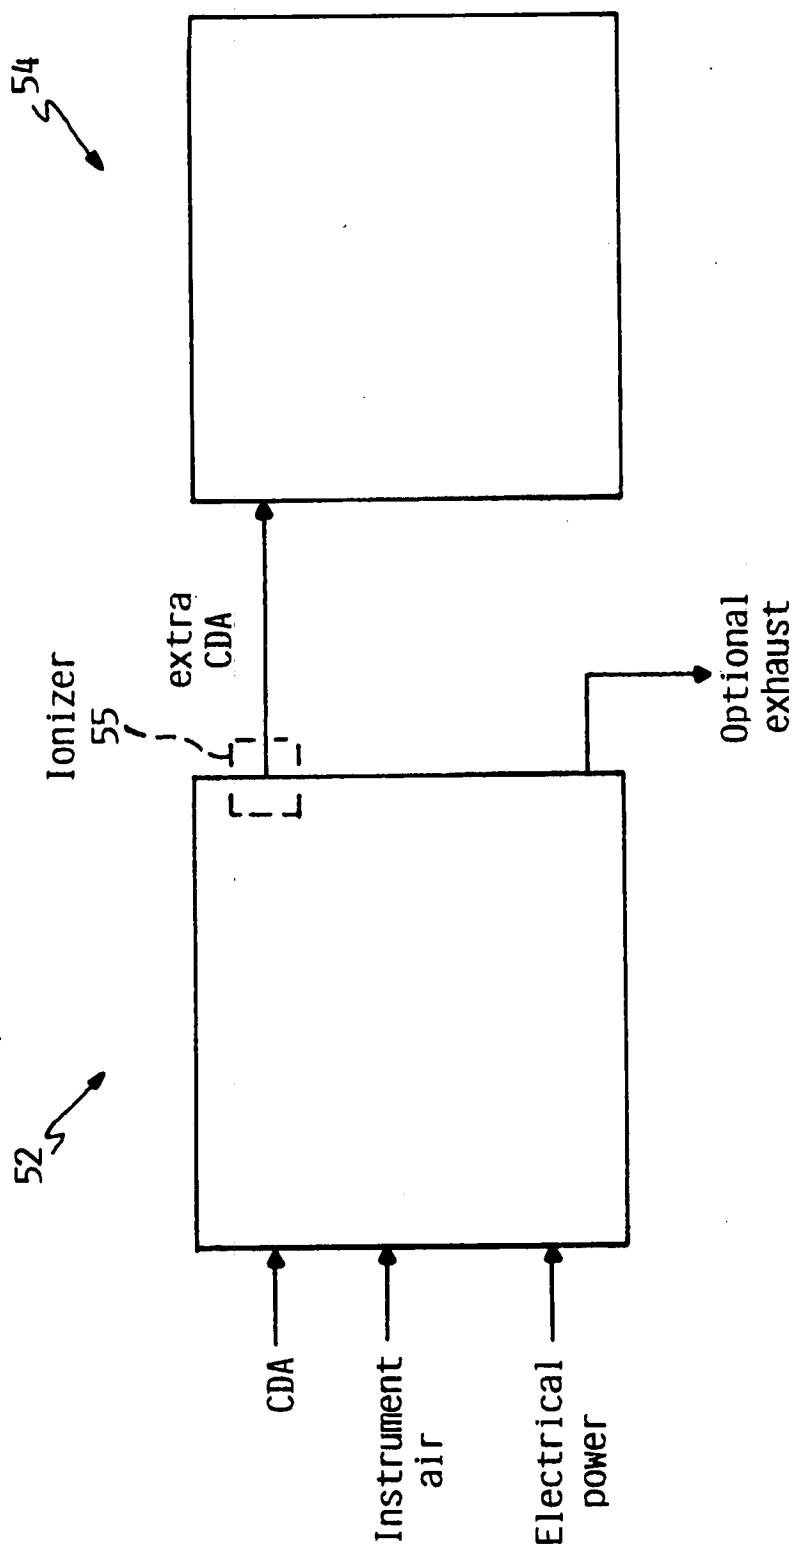


FIG. 5A

7/27

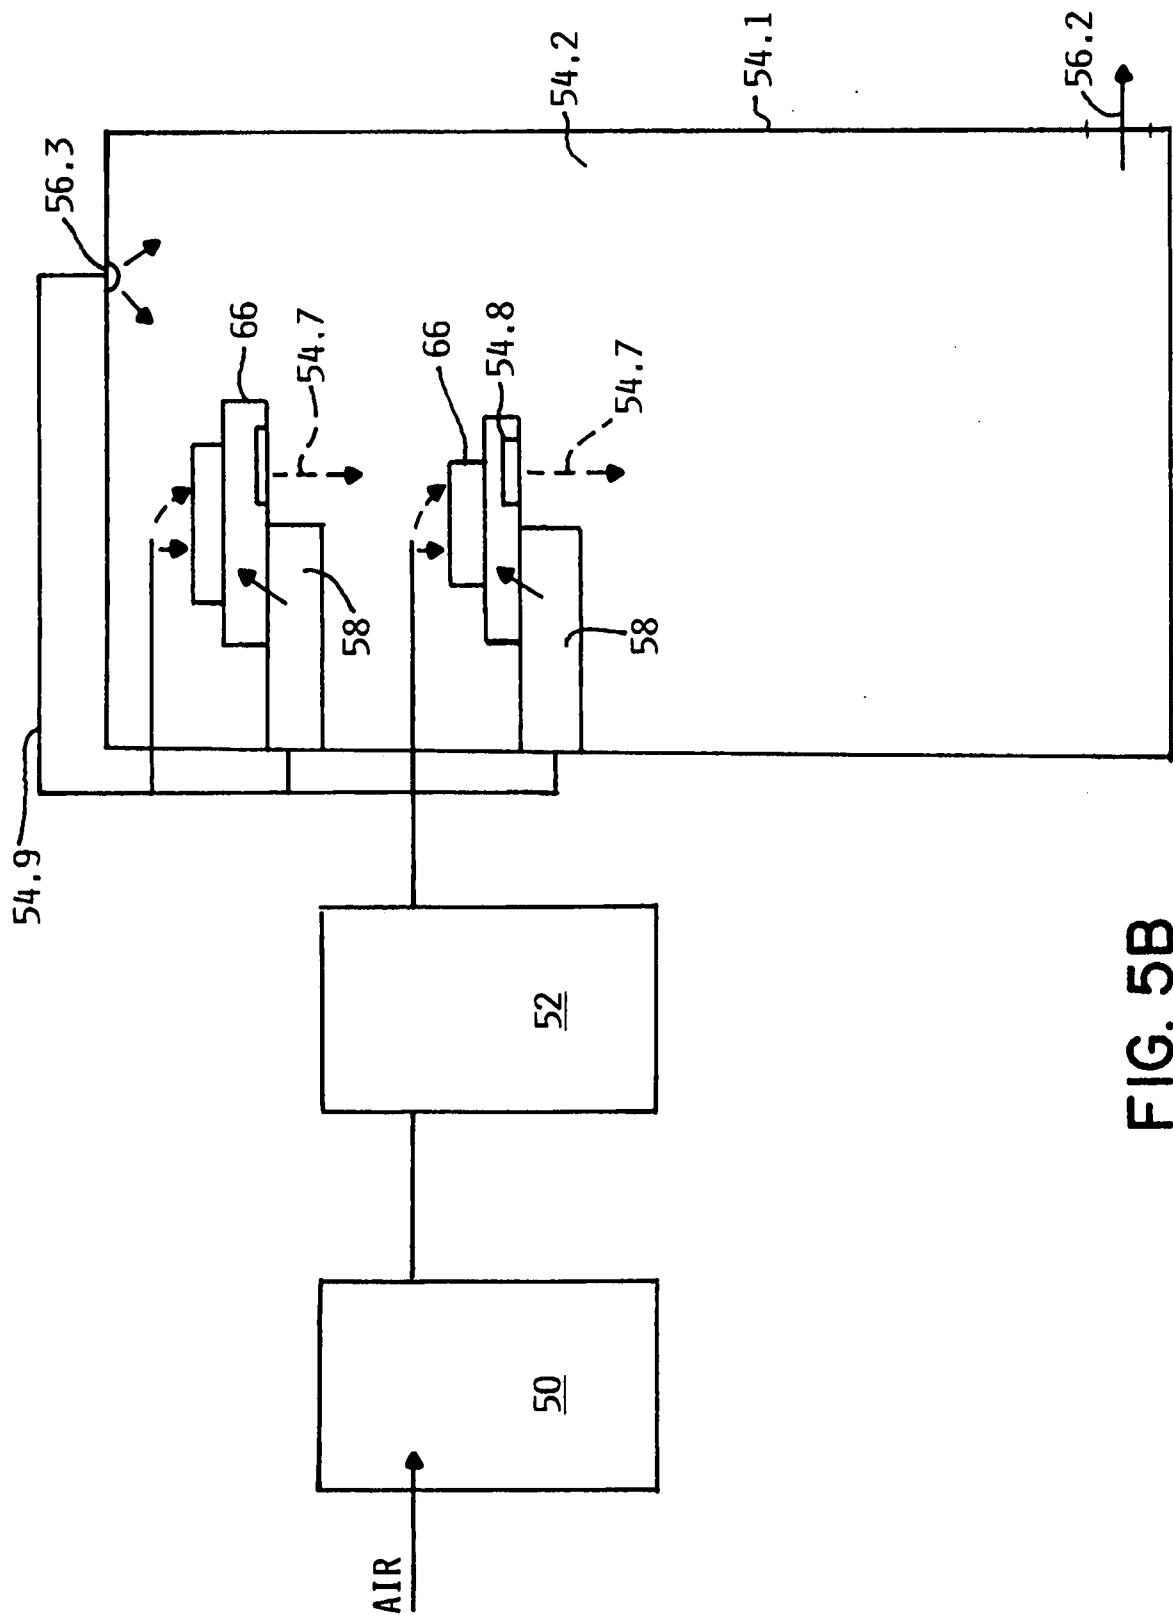


FIG. 5B

8/27




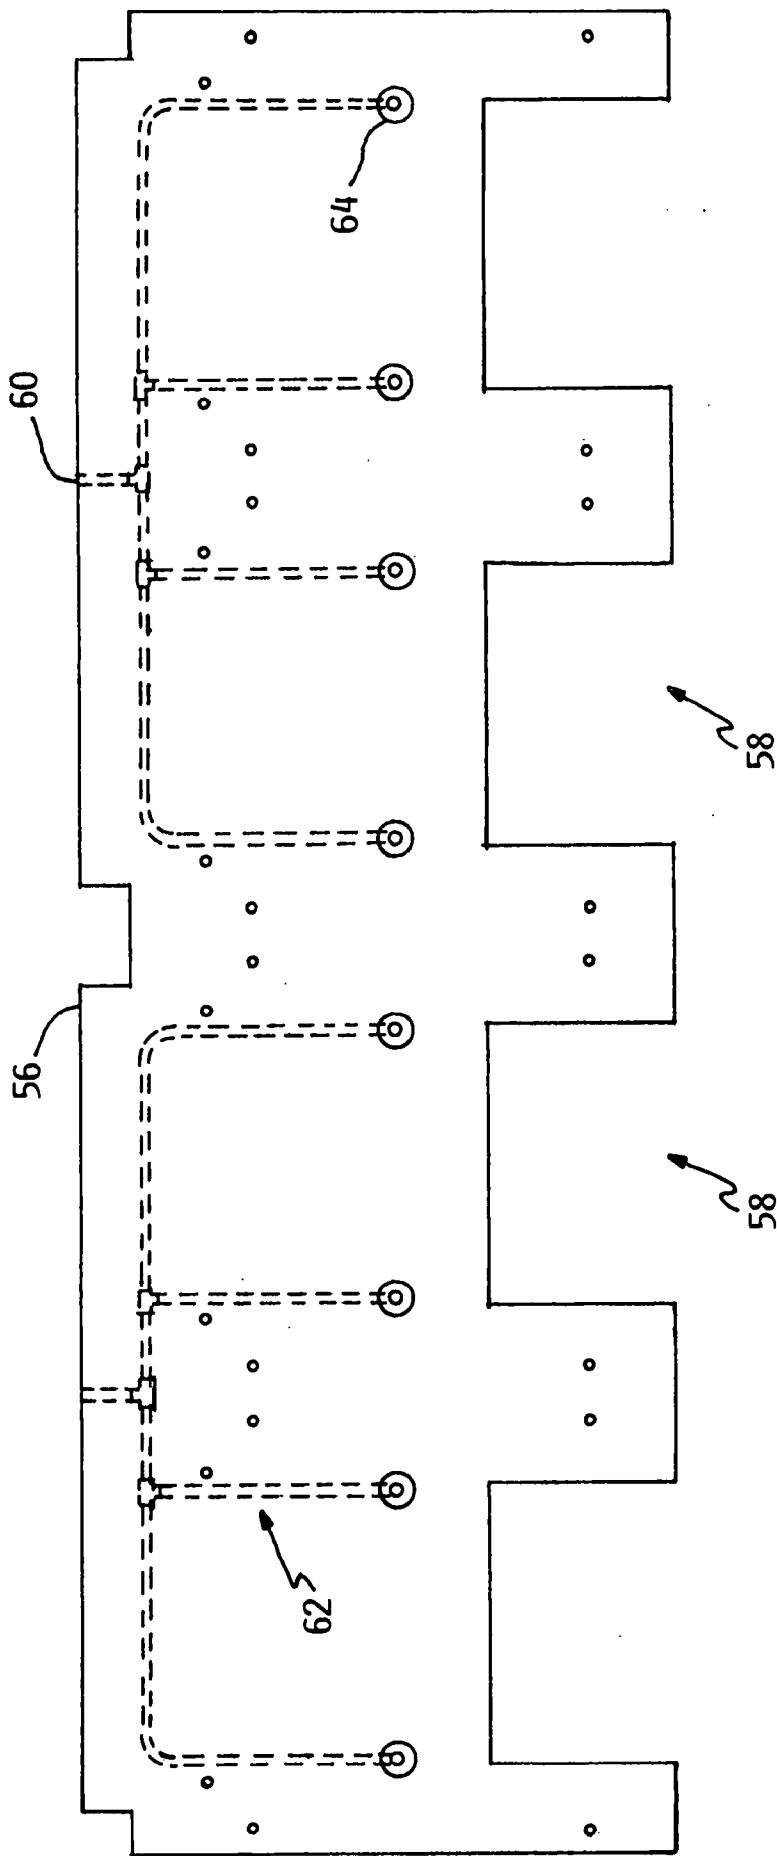


FIG. 6A

9/27

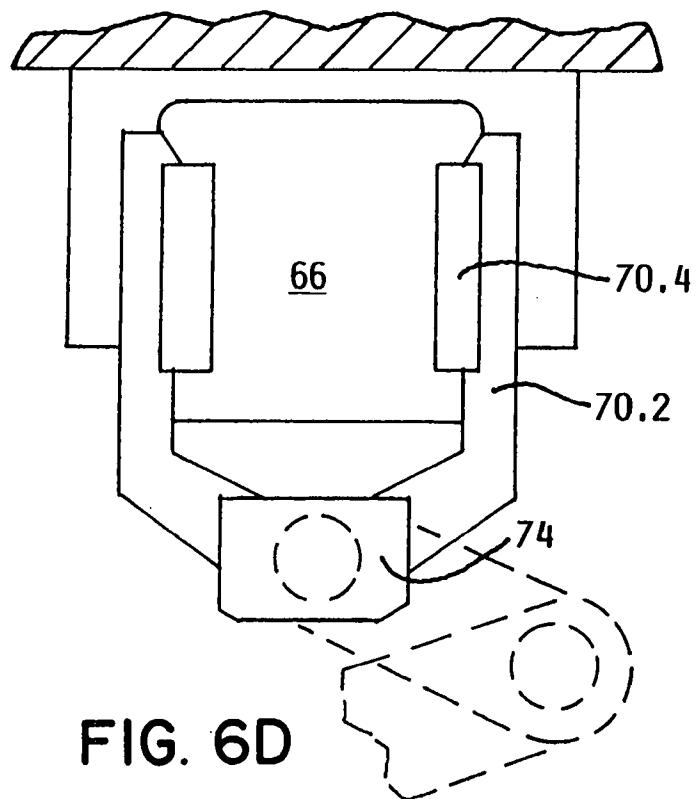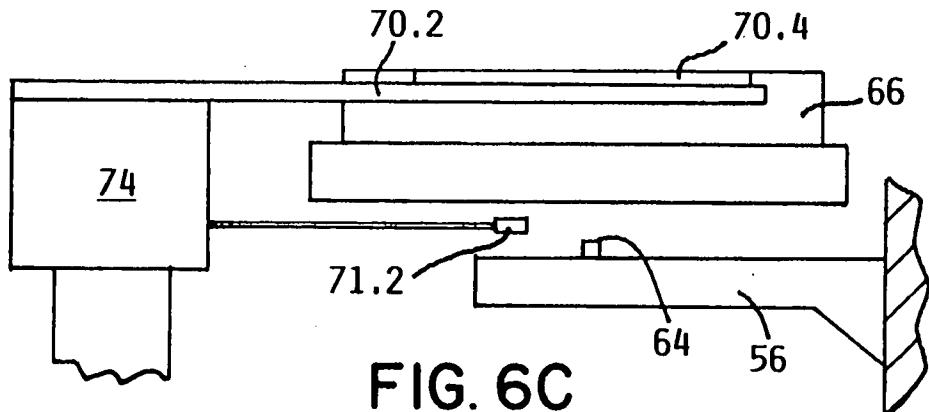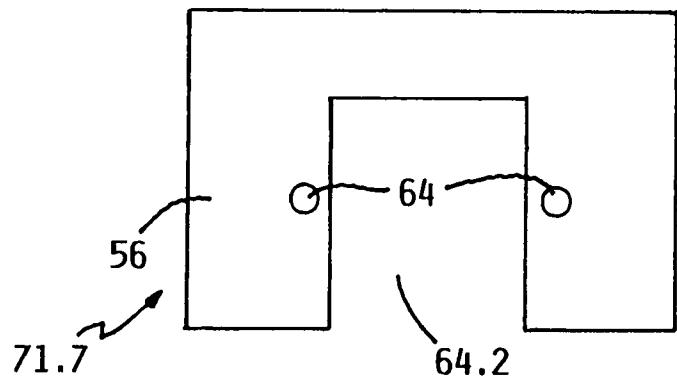

10/27

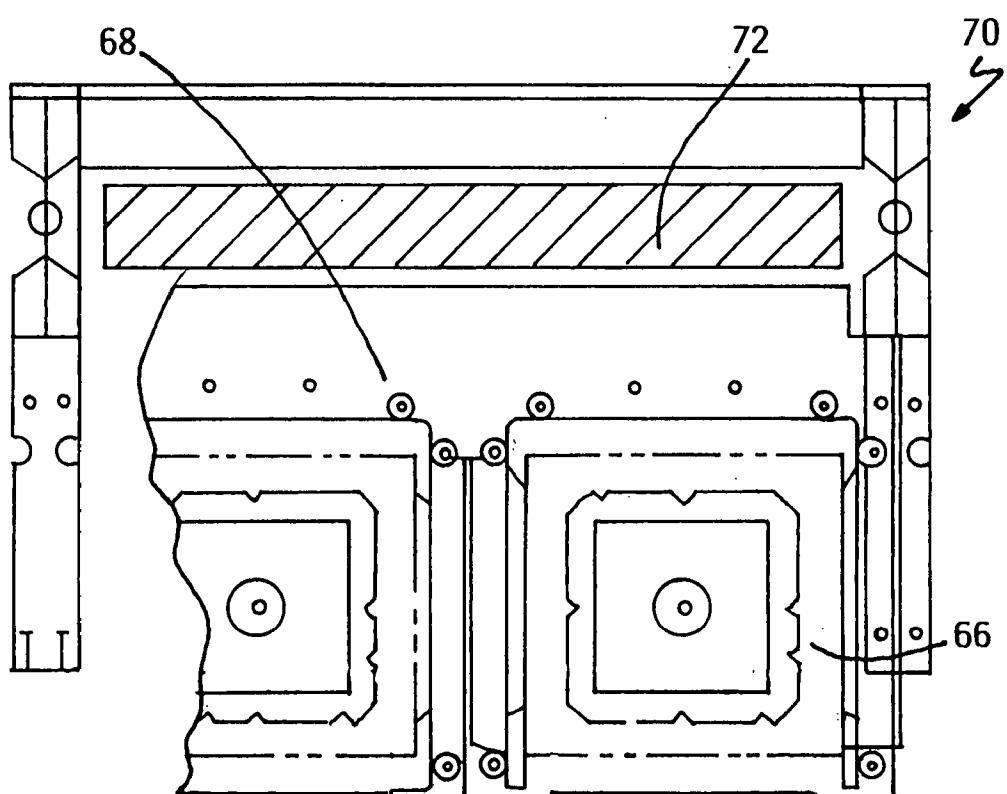


FIG. 7A

11/27

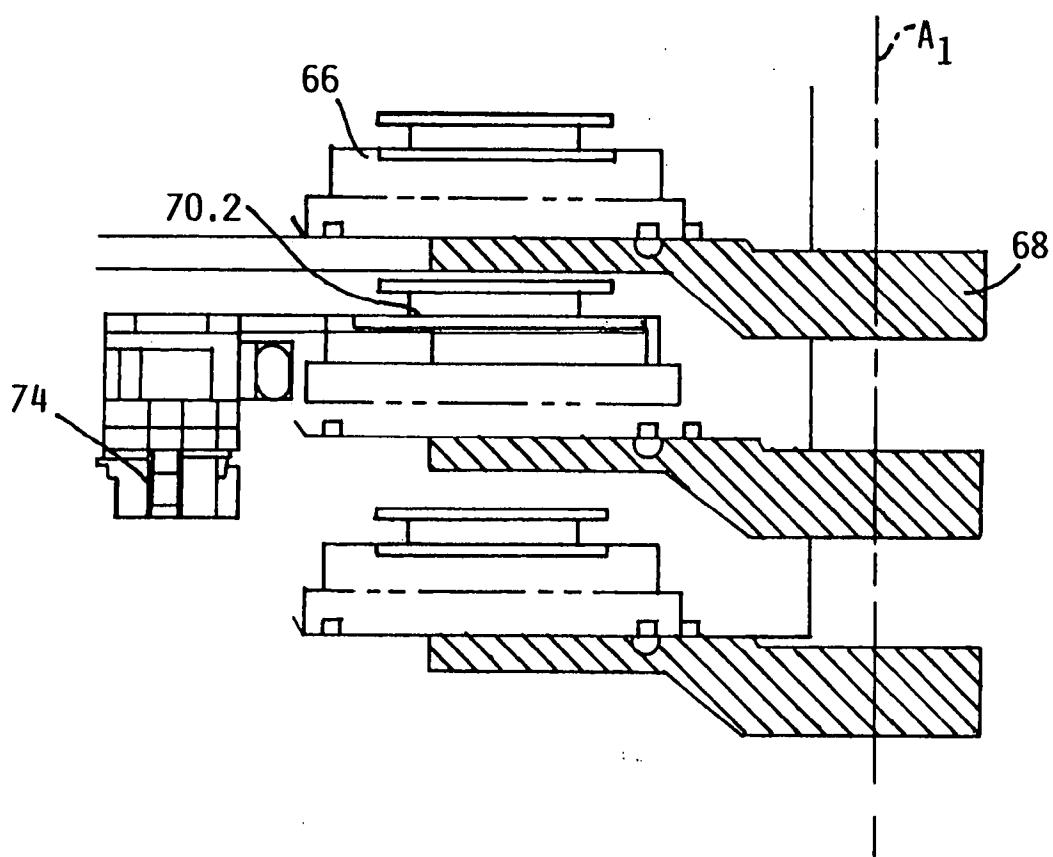


FIG. 7B

12/27

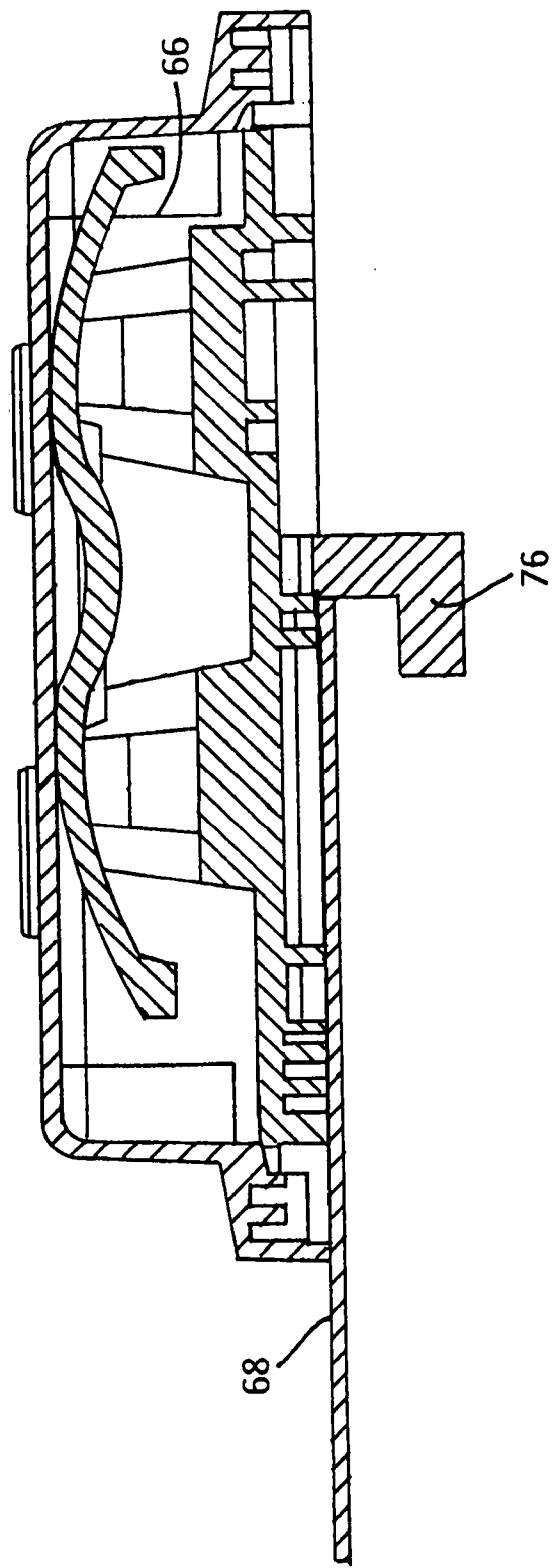


FIG. 7C

13/27

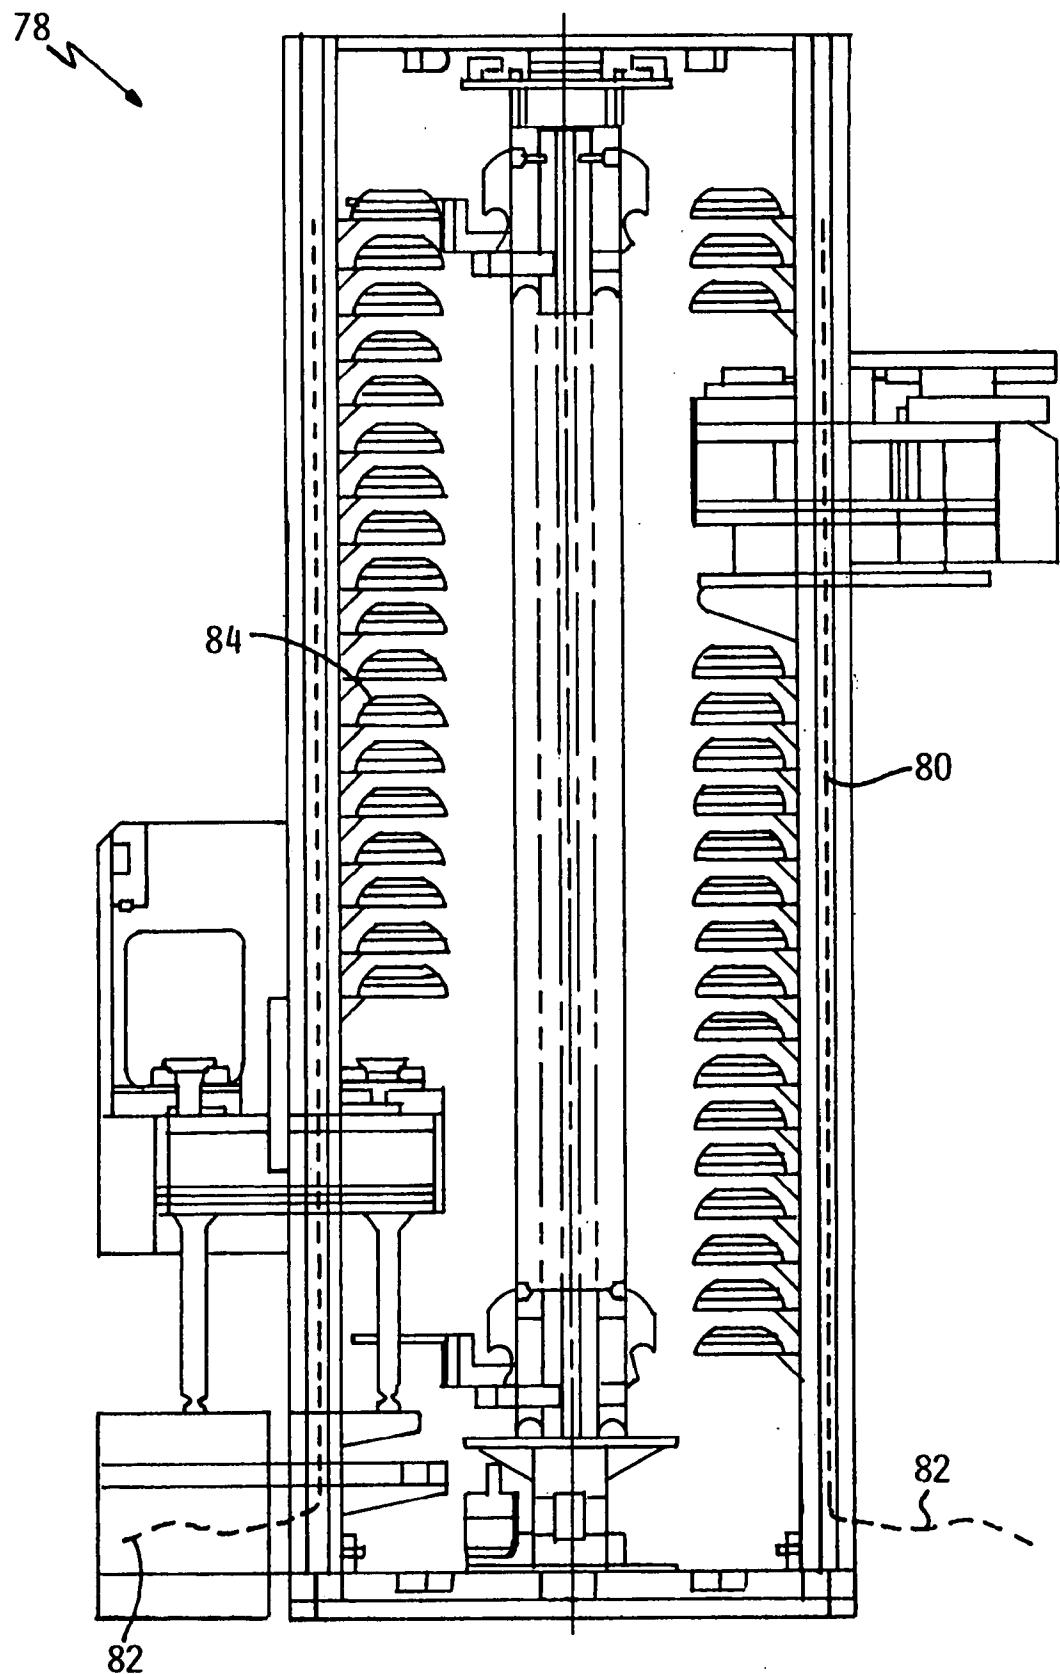


FIG. 8A

14/27

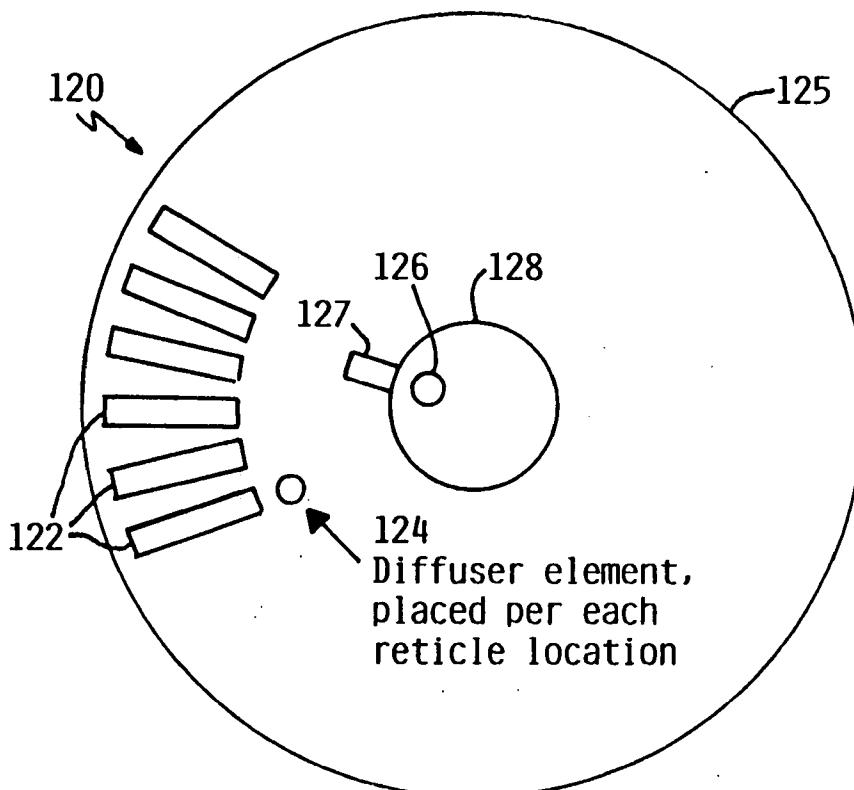


FIG. 8B

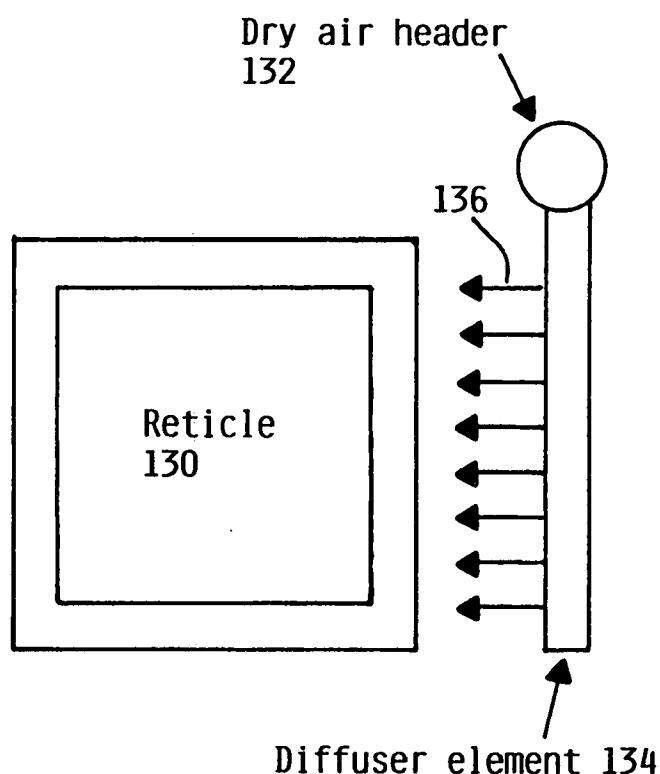


FIG. 8C

15/27

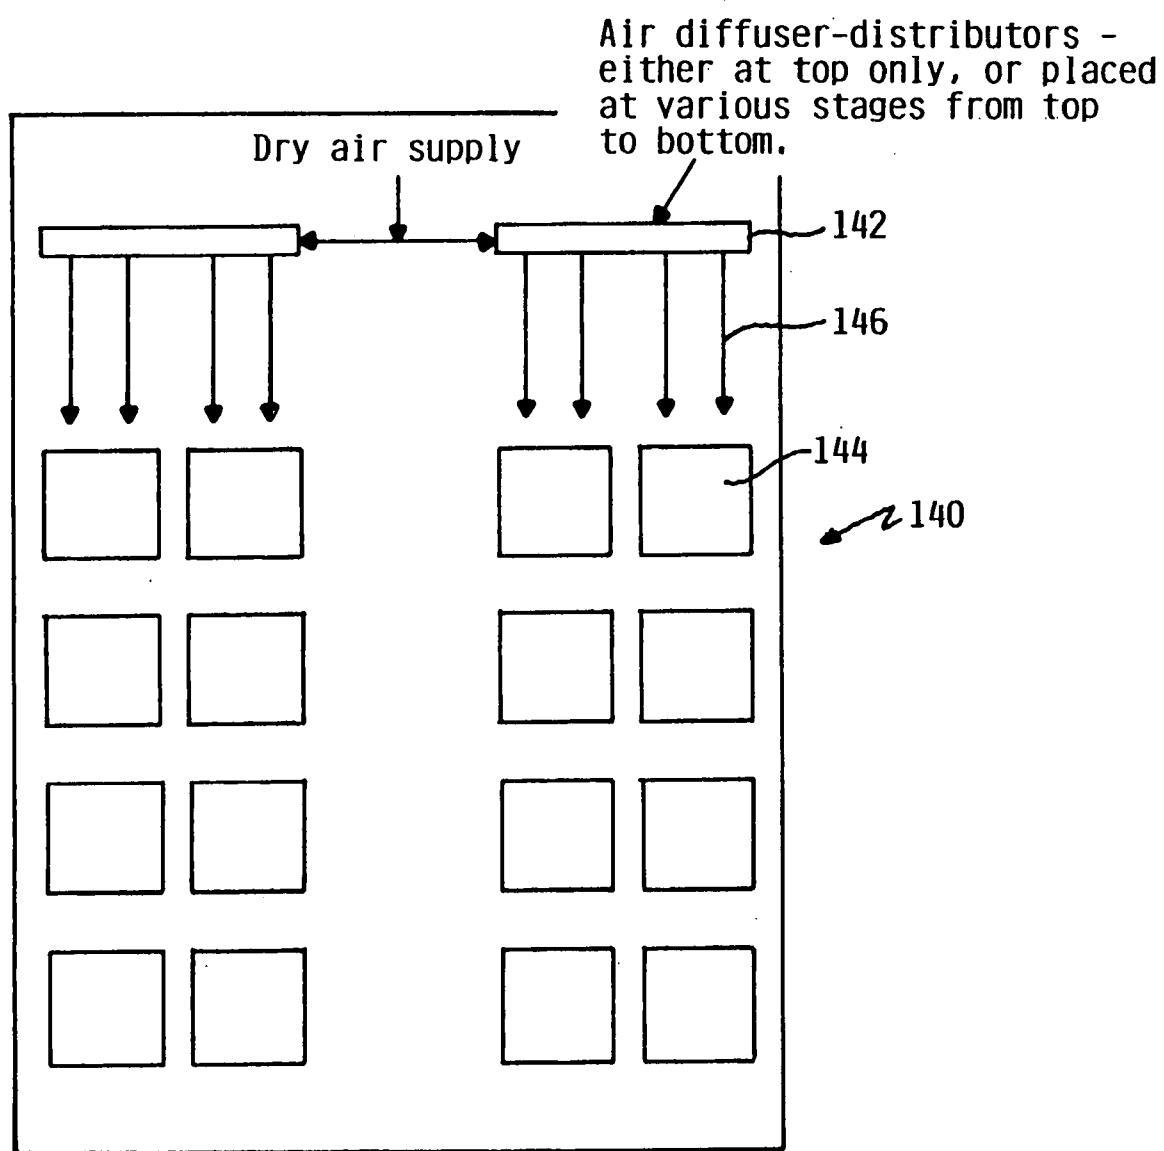


FIG. 8D

16/27



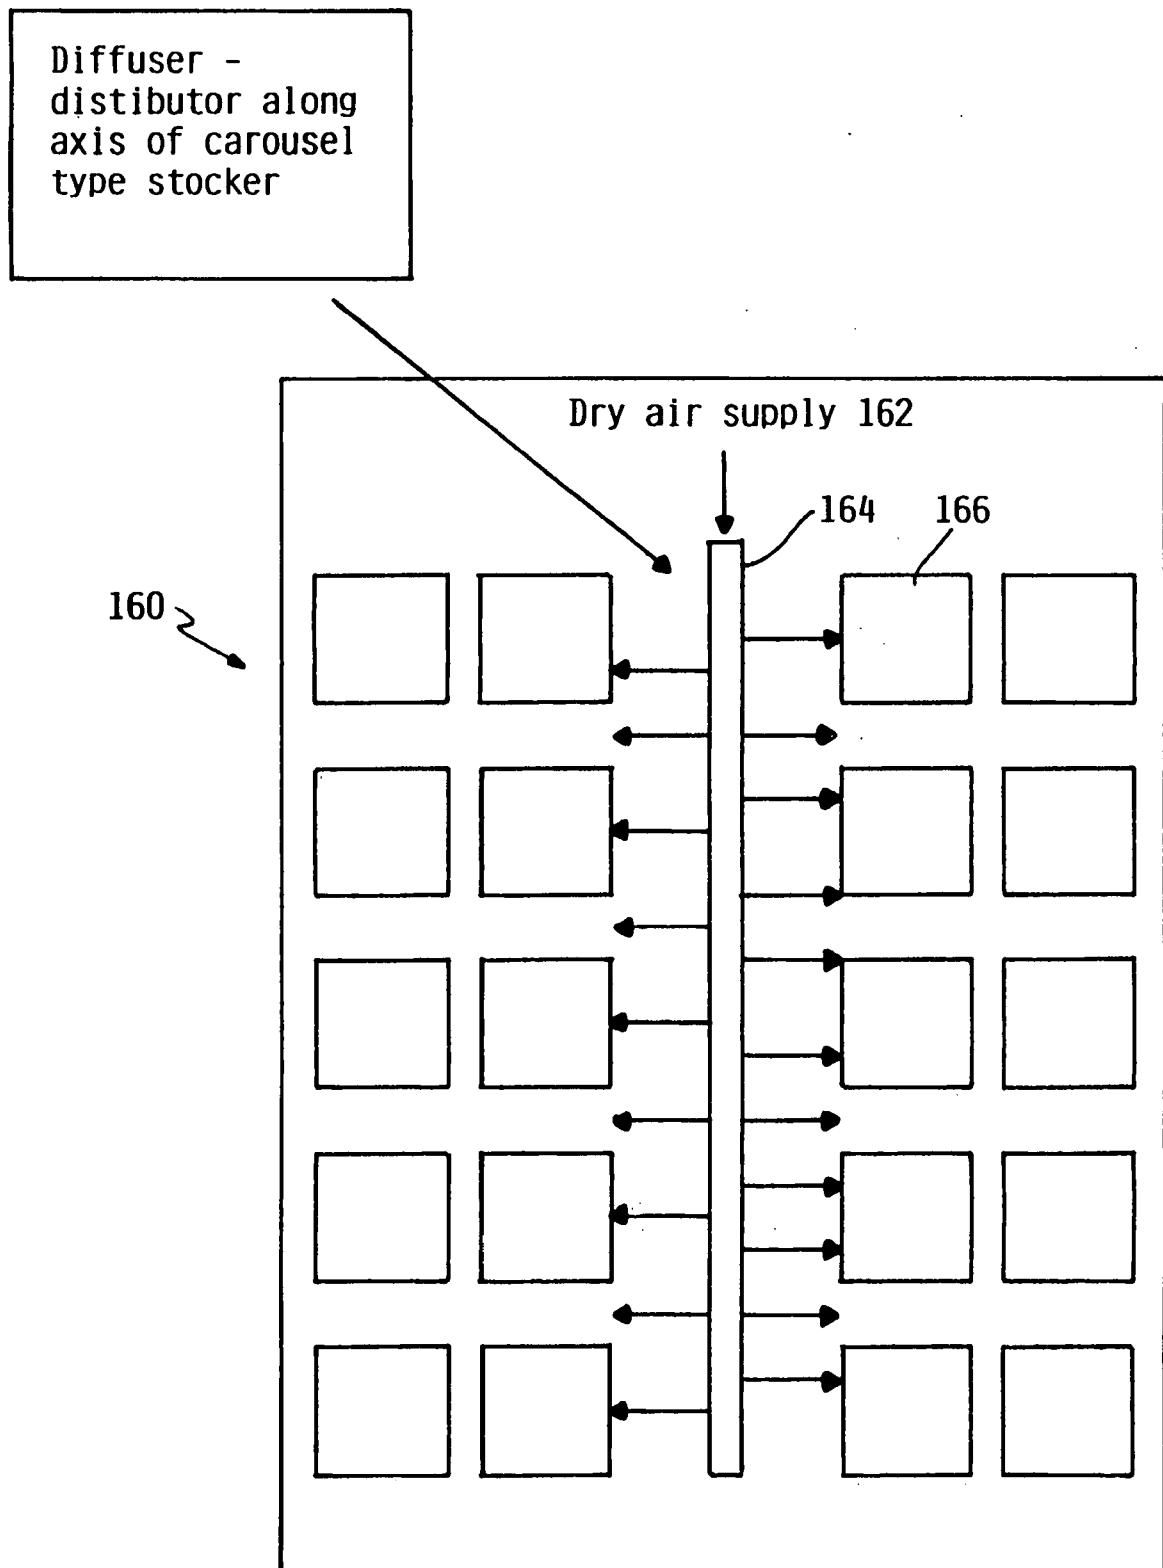


FIG. 8E

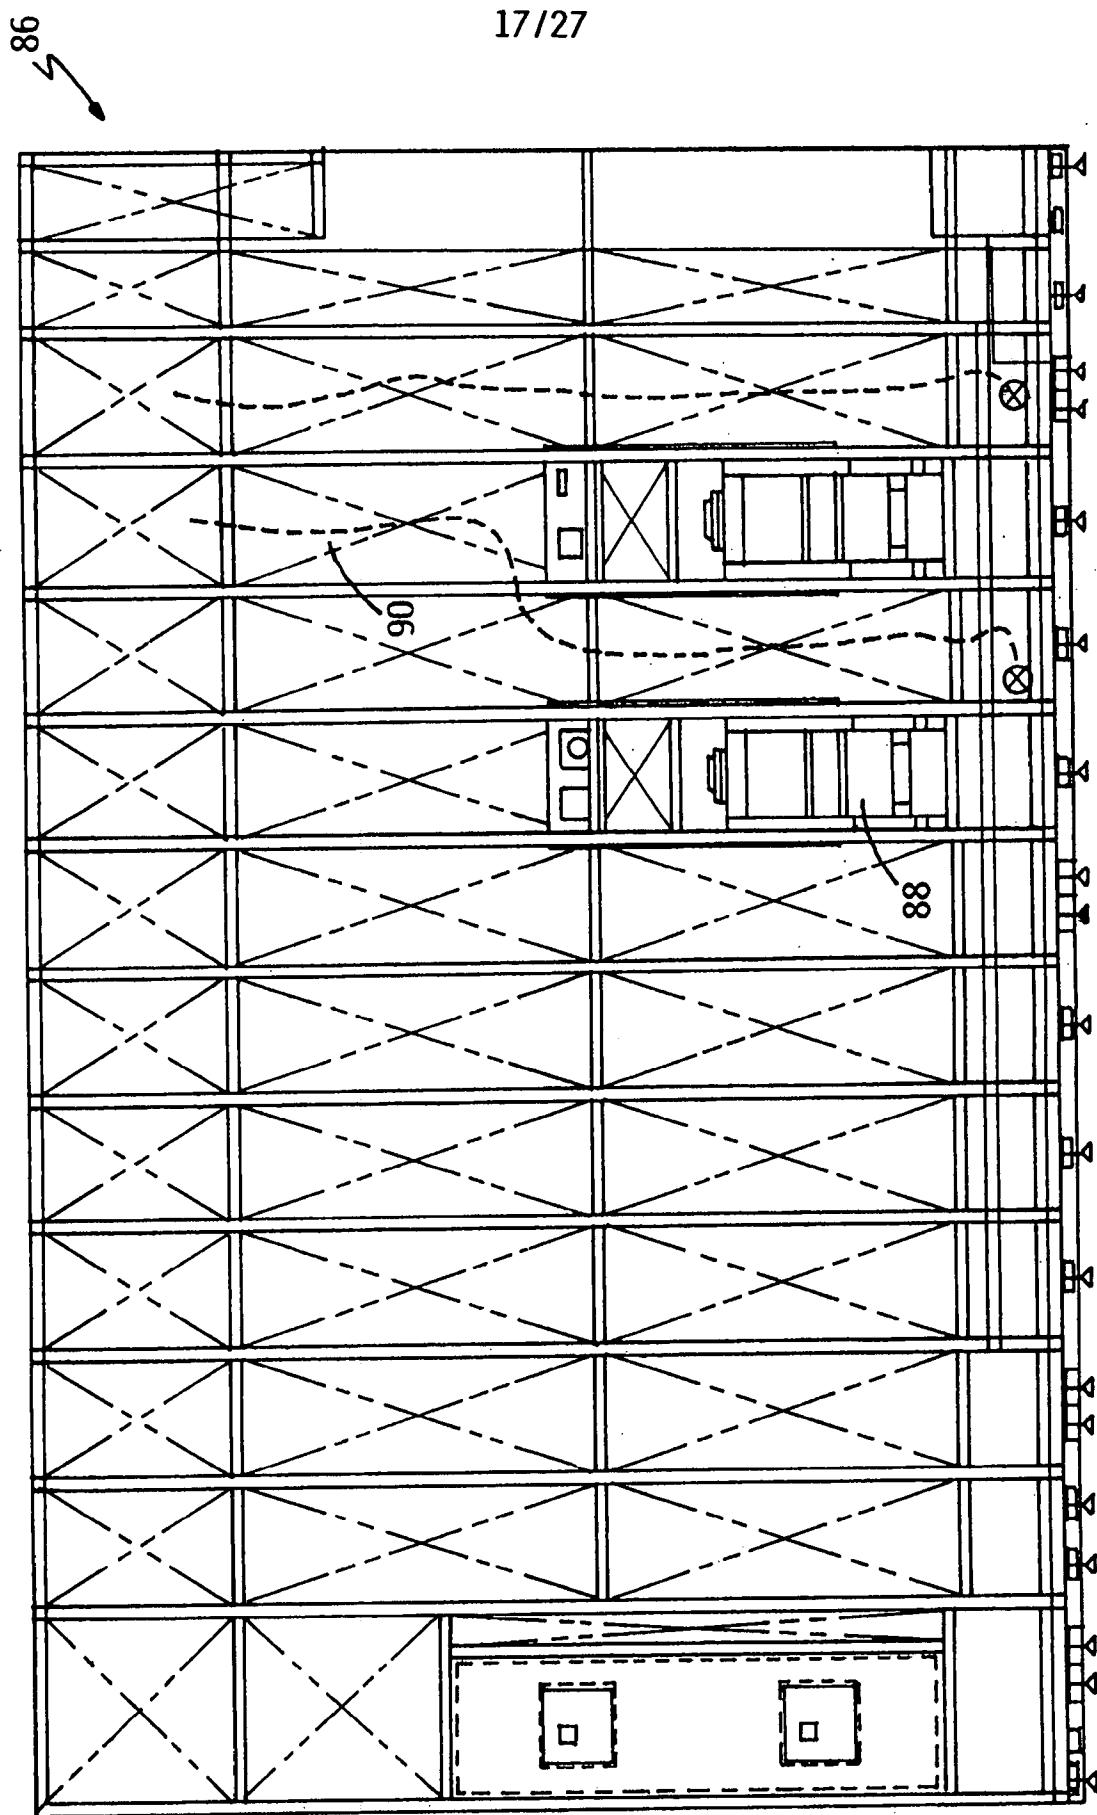

18/27

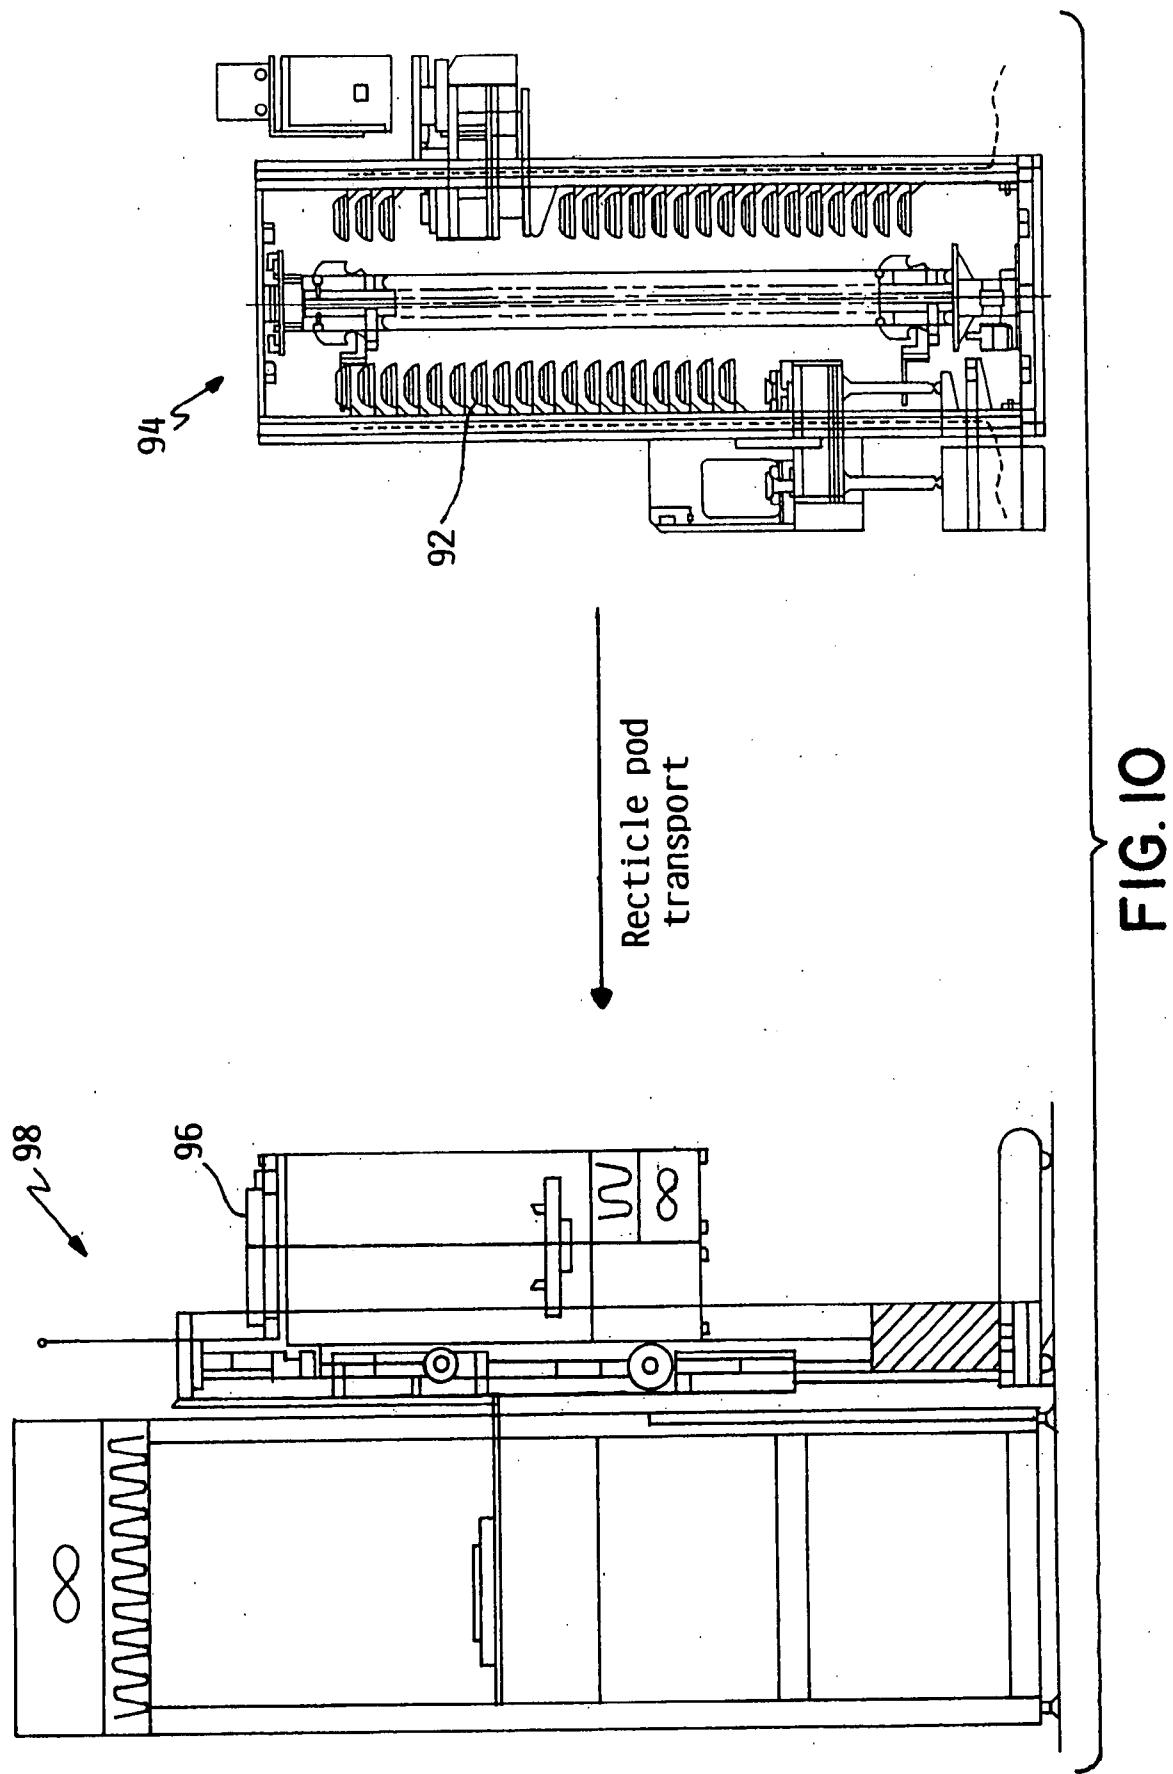

19/27


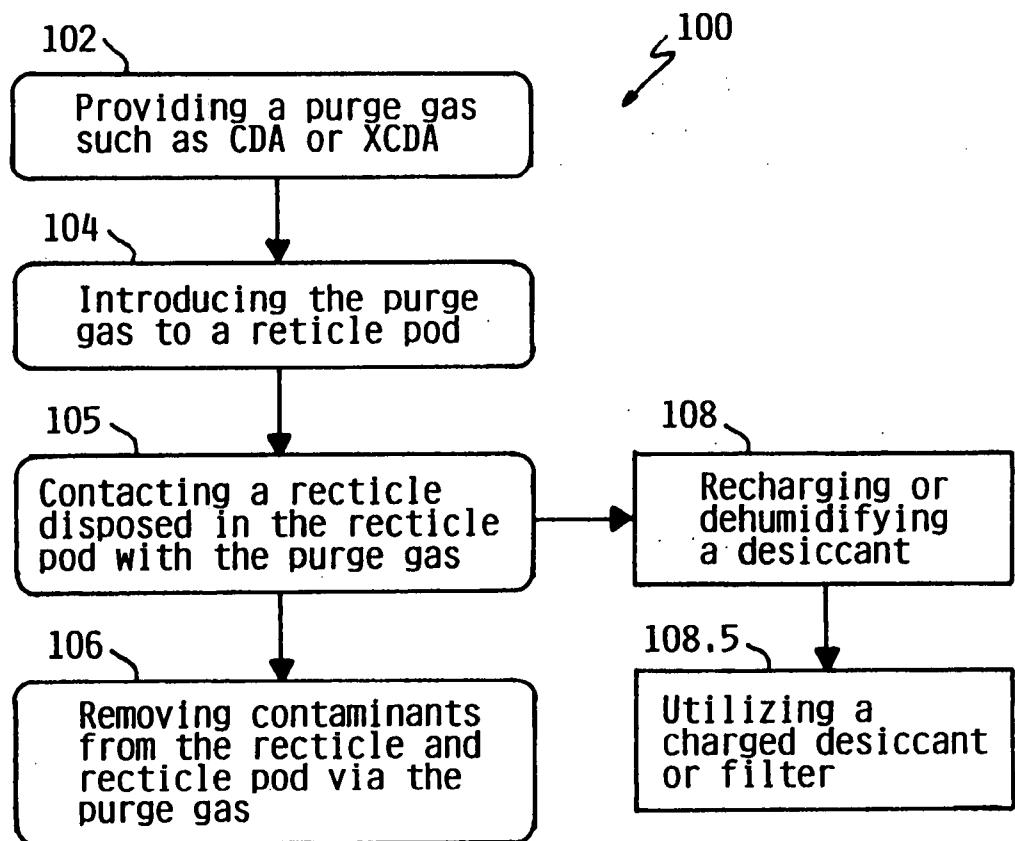


FIG. 11

20/27

FIG. 12

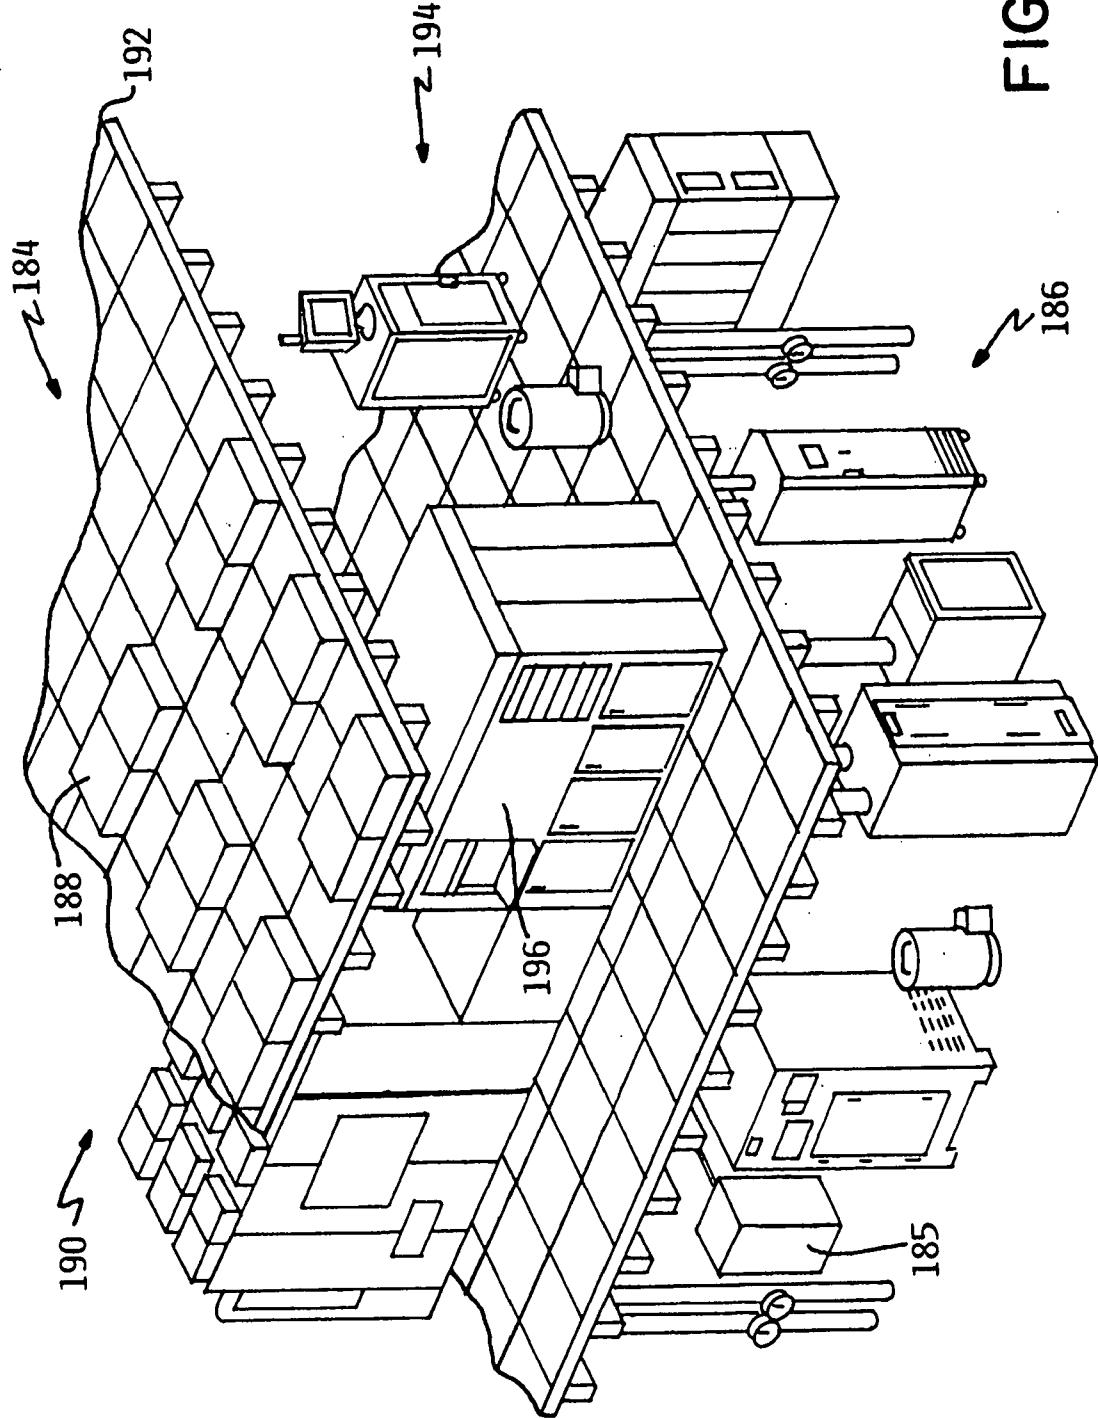

21/27

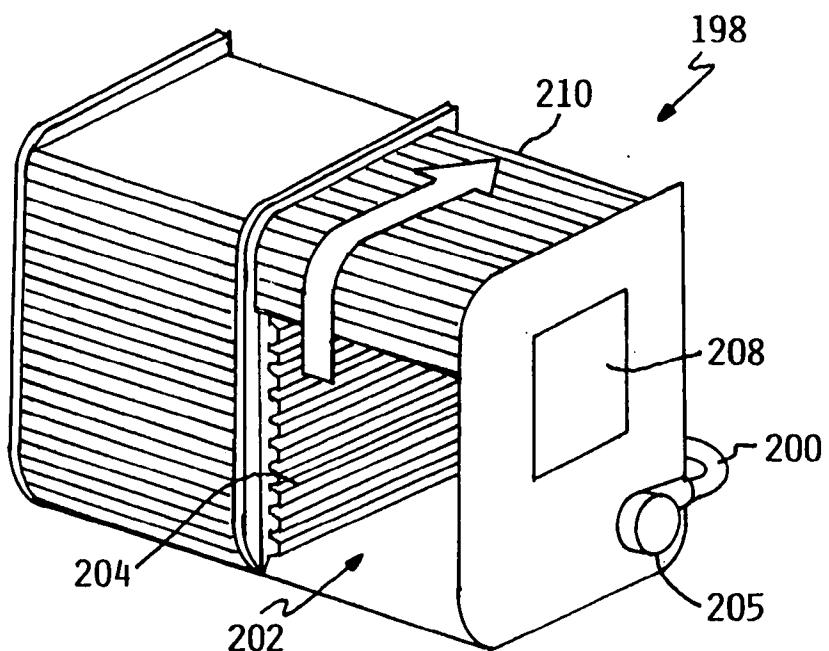


FIG. 13

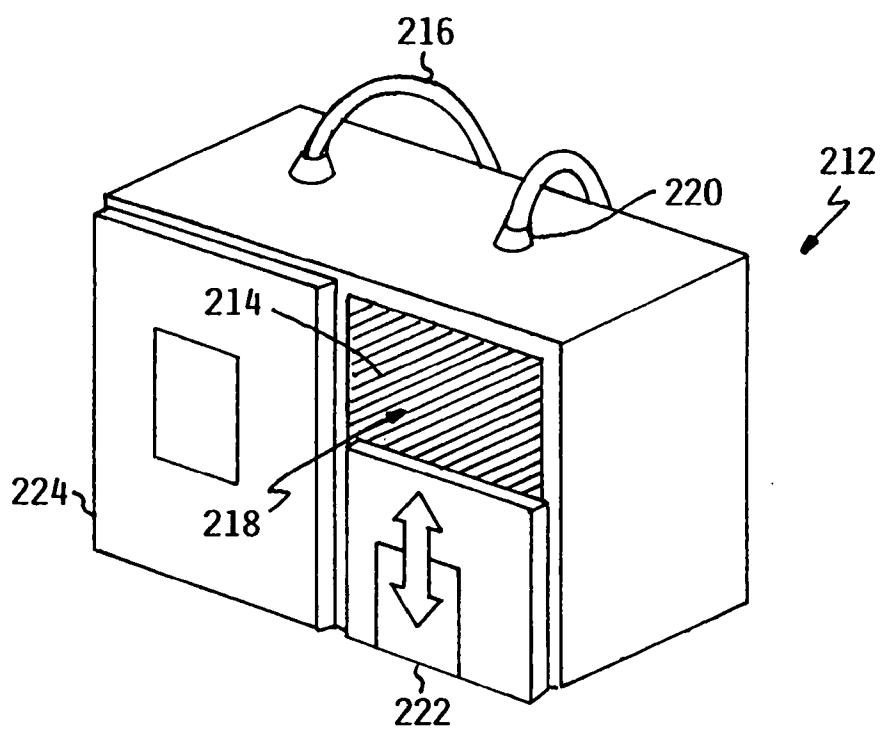


FIG. 14

22/27

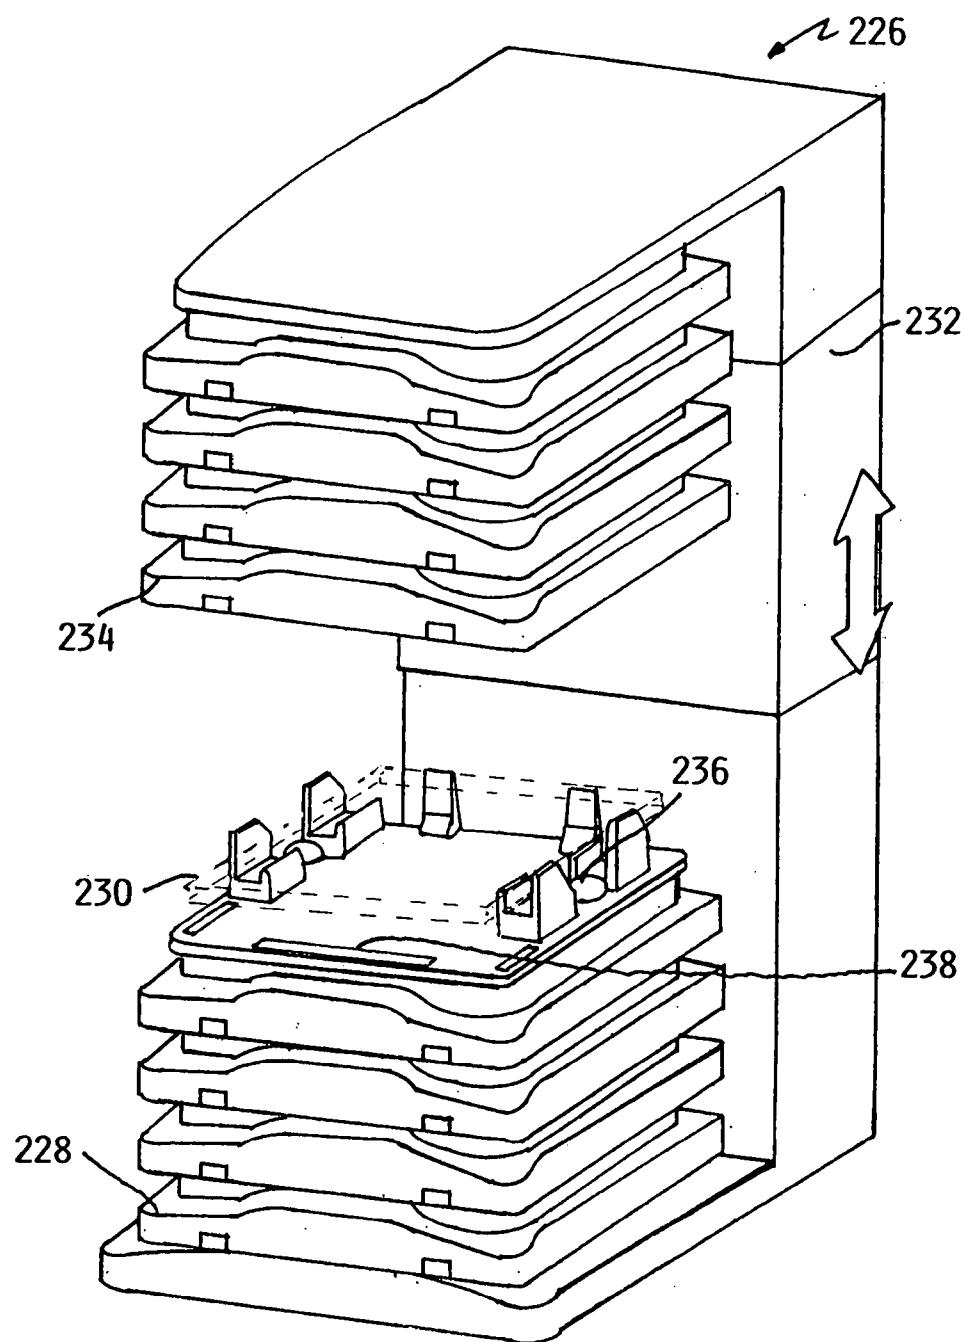


FIG. 15

23/27

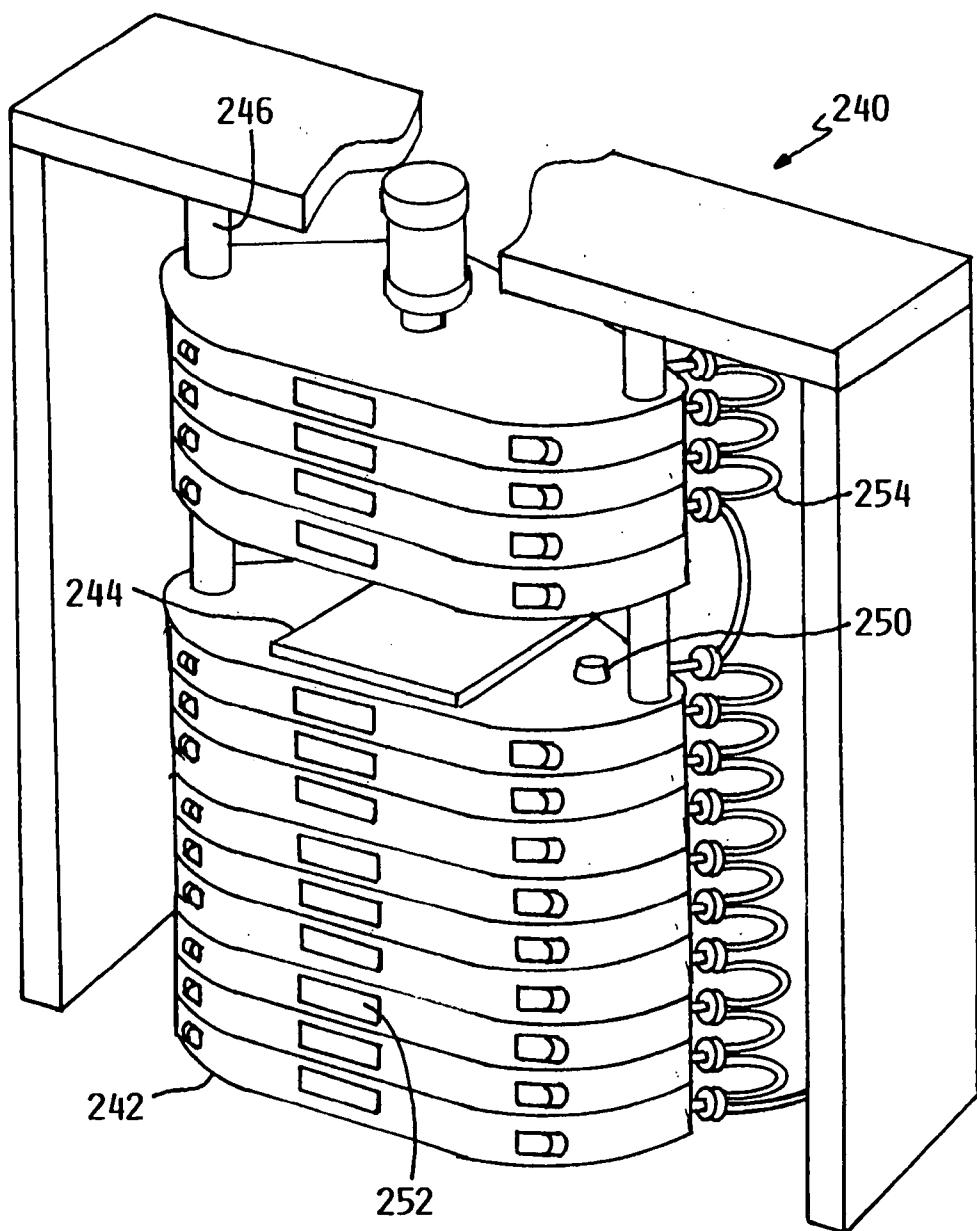


FIG. 16

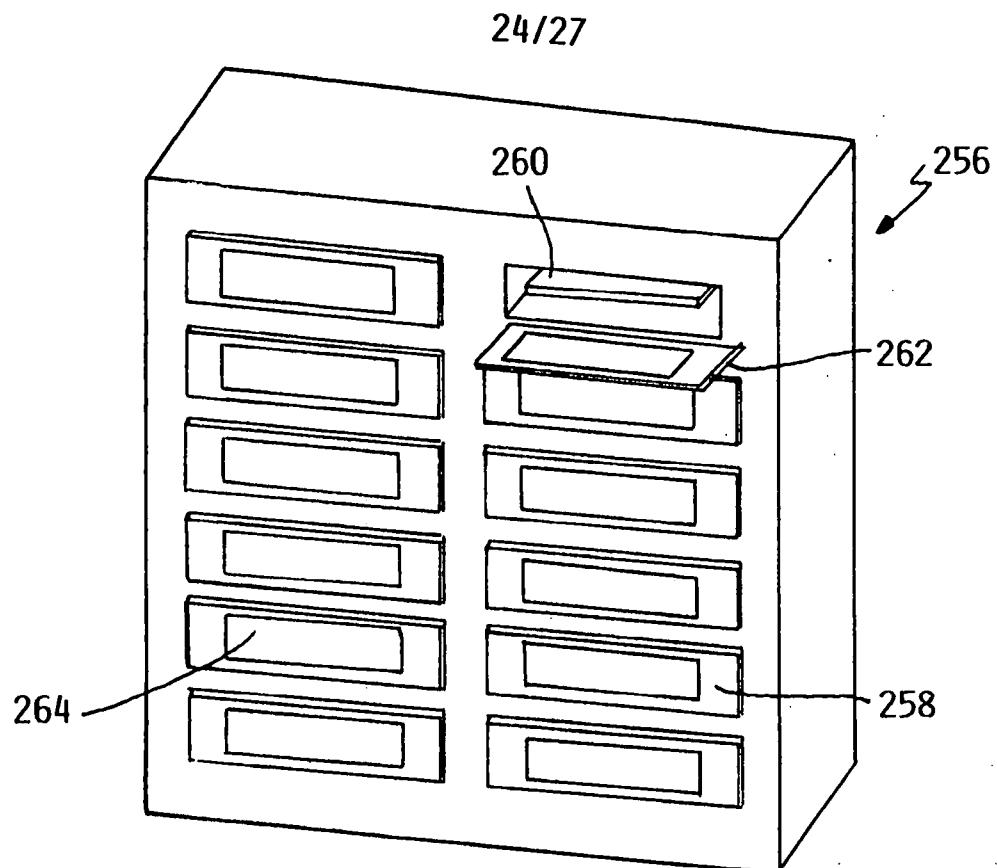


FIG. 17

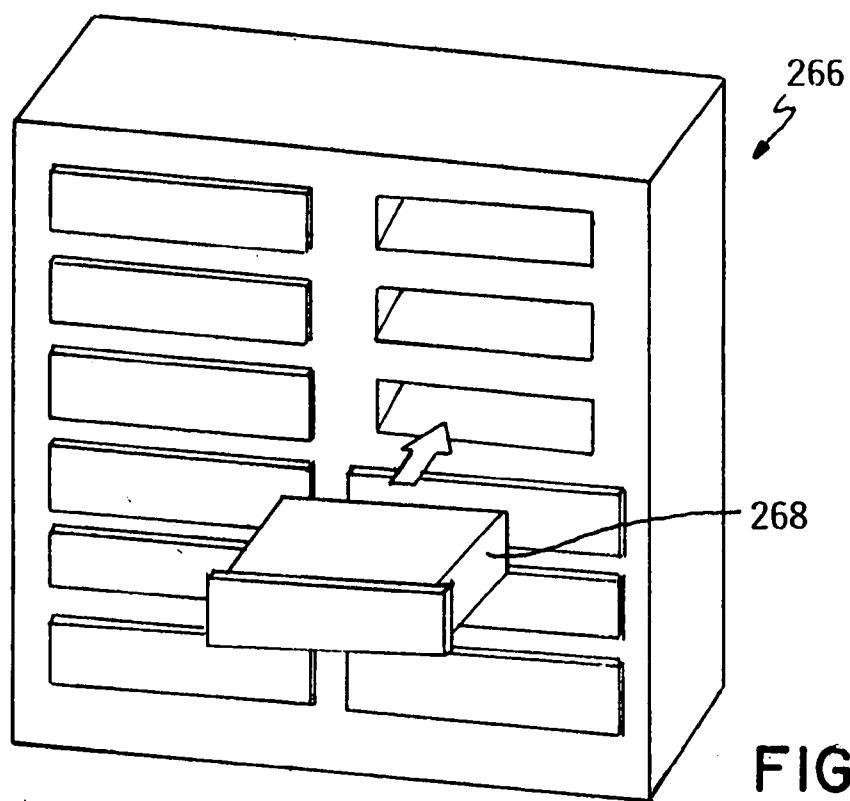


FIG. 18

25/27

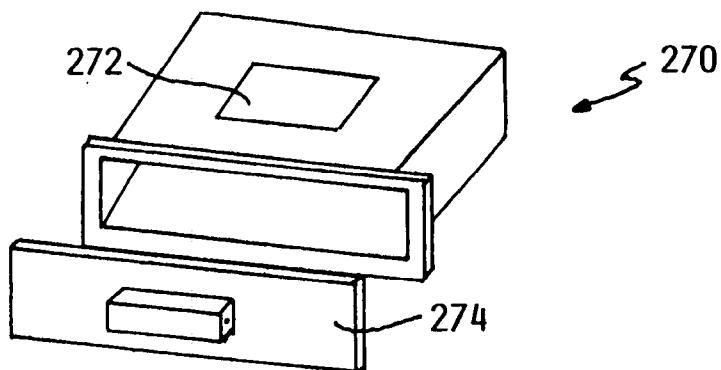


FIG. 19

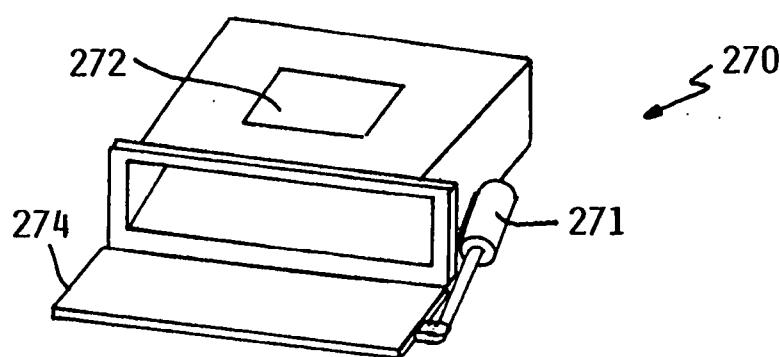


FIG. 20

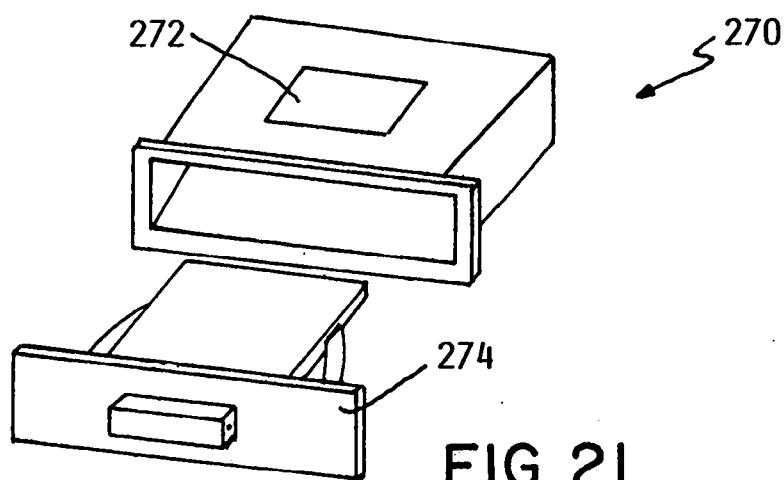


FIG. 21

26/27

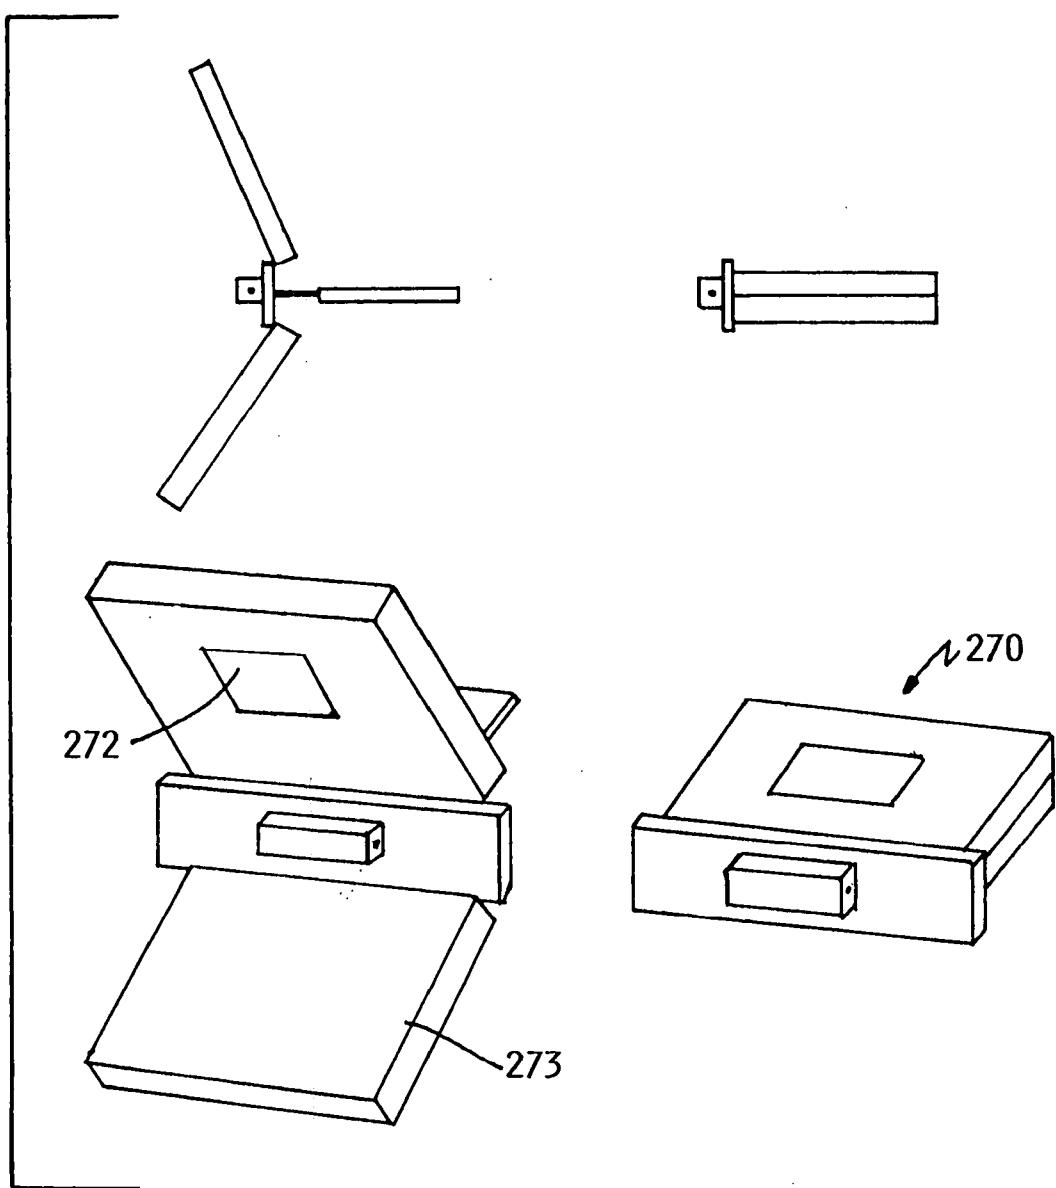


FIG. 22

27/27

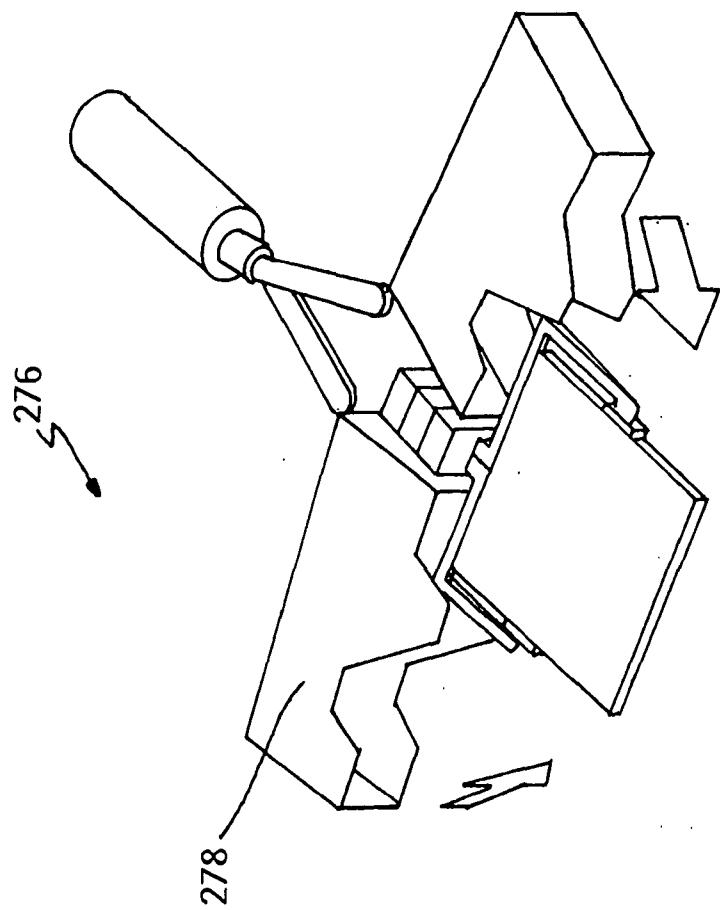


FIG. 23

