



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ :

B25J 15/08

A1

(11) International Publication Number:

WO 92/20497

(43) International Publication Date:

26 November 1992 (26.11.92)

(21) International Application Number: PCT/US92/03935

(22) International Filing Date: 8 May 1992 (08.05.92)

(30) Priority data:

698,434

10 May 1991 (10.05.91)

US

(71) Applicant: NEW FOCUS, INC. [US/US]; 340 Pioneer Way, Mountain View, CA 94041 (US).

(72) Inventor: LUECKE, Francis, S. ; 14620 Nelson Way, San Jose, CA 95124 (US).

(74) Agents: HESLIN, James, M. et al.; Townsend and Townsend, One Market Plaza, 2000 Steuart Tower, San Francisco, CA 94105 (US).


(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CI (OAPI patent), CM (OAPI patent), CS, DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC (European patent), MG, ML (OAPI patent), MN, MR (OAPI patent), MW, NL, NL (European patent), NO, PL, RO, RU, SD, SE, SE (European patent), SN (OAPI patent), TD (OAPI patent), TG (OAPI patent).

Published*With international search report.*

(54) Title: DEVICE FOR CENTERING ROUND ARTICLES

(57) Abstract

A holder (10) for centered round articles (A) comprises a frame (12) having a first arm (14) and a second arm (16) pivotally attached thereto. The first arm defines a single contact point (18) at its distal end while the second arm defines a pair of diverging surfaces (20, 22) at its distal end. The two arms are mechanically coupled to rotate relative to each other in a fixed relationship, and the curved surfaces on the second arm are shaped in a particular manner so that circular articles held by the two arms will be centered at a fixed location relative to the frame.

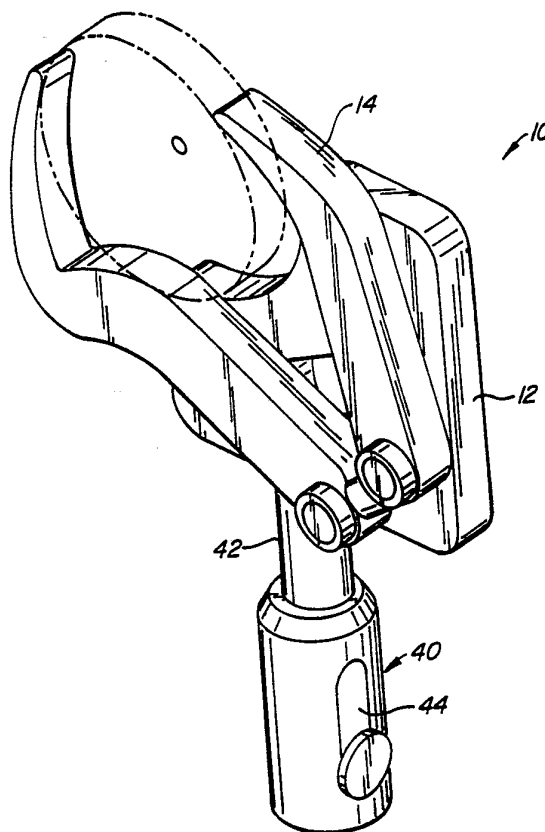

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

DEVICE FOR CENTERING ROUND ARTICLES**BACKGROUND OF THE INVENTION**

5 The present invention relates generally to apparatus for interchangeably mounting articles. More particularly, the present invention relates to a device which can center and hold circular articles of varying diameter.

10 Apparatus for interchangeably mounting articles are available in almost infinite variety. Of particular interest to the present invention are apparatus for interchangeably mounting articles having circular peripheries, where the diameter of the individual articles may vary over a fairly large ratio. Exemplary
15 mounting apparatus of this type include optical component holders for mounting lenses, mirrors, beam splitters, gratings, and the like.

Optical component holders themselves may take a variety of forms. One common form comprises a pair of
20 opposed jaws which are spring-mounted on a frame or post. Each jaw is V-shaped and is grooved along its inner surface so that the optical component can be mounted by spreading the jaws apart, placing the article between the jaws, and allowing the jaws to close under the spring
25 tension to hold the component in place. One such optical component holder is commercially available as Catalogue Number 22-8155 (Spring Grip Lens Holder) in Ealing Catalogue Number E100K/190, pages C24 and C25.

While such opposed arm optical element holders
30 are functional, they suffer from being able to accommodate only a relatively limited range of diameters, typically within a ratio of only about 1:2. Moreover, the center point of a circular optical component held in such a device will move relative to a fixed portion of
35 the holder depending on the diameter of the particular component which is being held. Such a characteristic is undesirable when optical components of different

diameters are interchanged and it is desirable to maintain centering of the component relative to an externally originating light beam.

A second type of optical component mount which provides for such centering is referred to generally as an "iris" mount. Such iris mounts include three or more pivotably attached arms which are located around the periphery of a circular frame. By adjusting the inward travel of each of the arms equally, the device can hold components of varying diameter so that they are centered concentrically relative to the center of the circular frame. An exemplary iris mounting device is commercially available as "PSC100 holder with concentric grip" (Cat. No. 178 133), Klinger Catalogue, 1990, page 225.

Although such iris mounts are very useful in theory, it can be difficult to maintain precise alignment of all three arms to assure that the optical component is precisely centered. The design of iris mounts which assure such simultaneous alignment of all three arms can be complicated and the resulting devices are not always sturdy. Additionally, the distance between the center of the object being held and the periphery of the holder is always large, making it difficult to position optical elements to receive closely spaced light beams.

For these reasons, it would be desirable to provide alternative designs for mounting apparatus having the capability of holding and centering circular articles having varying diameters. It would be particularly desirable if the device could hold circular articles having diameters which vary over a range greater than 2:1, preferably greater than 3:1, and more preferably greater than 10:1. Such devices should have a minimum number of working parts and should be of sturdy construction so that it is easy to maintain alignment of the parts. It would be particularly desirable if the device could be adapted to act as a grasping element or a

gripping element on a robotic arm or other assembly for capturing circular articles at a first location and moving them to a second location.

5

SUMMARY OF THE INVENTION

According to the present invention, a holder for round articles will center the articles with respect to a frame. The apparatus comprises a pair of arms pivotally attached at their proximal ends to the frame, where the first arm defines a single contact point at its distal end and the second arm defines a pair of diverging surfaces at its distal end. The diverging surfaces each define a continuous locus of contact points which are available to contact a round article depending on its diameter. The arms are mechanically coupled so that they rotate about their respective pivot points (which may be spaced-apart or concentric) at a known ratio, usually a constant ratio. The position of the single contact point on the first arm and the shapes of the diverging surfaces on the second arm are then selected so that they will contact three points on the circular article being held, regardless of its diameter, and hold such articles with their center points at a single fixed location relative to the frame.

25

The present invention further includes a holder having a second arm with particular curved surfaces which have been precisely defined to meet conditions where (1) the first and second arms are spaced-apart but pivotally mounted at positions which are equidistant from the desired article center point and (2) the arms move at a constant rotational ratio. Precise formulas are given for calculating the curved surfaces for any particular radius (arm length) and rotational movement ratio. It will be appreciated, however, that curves can also be calculated for other conditions, including conditions where the pivot points of each arm are located at different distances from the article's center point

30

35

and/or the arms rotate relative to each other at a non-constant ratio.

The holder of the present invention is particularly useful as a device in an optical mounting system where it is frequently desired to interchange particular optical components having different diameters positioned at critical locations on an optical path. Usually, the holder of the present invention will be mounted on a post or other platform which has been precisely positioned to hold the optical component at the critical location. The holder of the present invention allows the component to be interchanged with another component having a different diameter, with the center point of the second round component remaining coincident with that of the first round component.

The holder of the present invention will also find use in systems where it is desired to grasp or capture a circular article at a first location and move the article to another location. For example, the holder may be used as an actuator or a grasper on a robotic arm programmed to move circular articles in a predetermined manner. The holder of the present invention is particularly useful when articles of varying diameter may be randomly present at a pick-up location so that it is necessary only to align the known center point of the holder with the anticipated center point of the article. Use of the holder of the present invention further simplifies automatic control of robotic arms and other automatic systems since the center point of the holding arms will not vary depending on the amount they are opened.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a round article holder constructed in accordance with the principles of the present invention, where the holder is mounted on a variable height mounting post.

Fig. 2 is a front elevational view of the holder of Fig. 1, shown holding a relatively large circular article.

5 Fig. 3 is a front elevational view of the holder of Fig. 1, shown with portions broken away and holding a medium sized circular article.

Fig. 4 is a front elevational view of the round article holder of Fig. 1, shown with its holding arms substantially closed.

10 Fig. 5 illustrates the curved surfaces of the second arm of the circular article holder of the present invention, including the parameters which are used in calculating the curves in a Cartesian plane.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

15 Referring to Figs. 1-4, a round article holder 10 constructed in accordance with the principles of the present invention includes a frame 12, a first arm 14 pivotally mounted on the frame, and a second arm 16 pivotally mounted on the frame. The first arm 14 includes a contact point 18 at its distal end, while the
20 second arm 16 includes a pair of diverging surfaces 20 and 22 at its distal end. As illustrated in Figs. 1 and 2, the arms 14 and 16 can hold a circular article A therebetween so that contact point 18 on arm 14 contacts the article at a first point and surfaces 20 and 22
25 contact the article at the second and third points, respectively. The article A is held so that its center point CP is at a particular position relative to the frame 12. As will be discussed in greater detail hereinafter, the position of contact point 18, the shapes
30 of curves 20 and 22, the positions of pivot points 15 and 17, and the rate at which the arms 14 and 16 rotate relative to each other are each specifically chosen so that the holder 10 can hold articles A of different
35 diameters while maintaining the center point of each article at precisely the same position relative to the frame 12.

The arms 14 and 16 are mechanically coupled together so that the arms rotate in opposite directions at known rates relative to each other. Usually, the arms will be coupled so that they rotate at a fixed constant ratio as this simplifies the construction of the device and the calculation of the shapes of curved surfaces 20 and 22. It is possible, however, that the arms would be coupled to rotate in a non-constant or even non-linear fashion relative to each other, and the remaining parameters of the system, particularly the shape of curves 20 and 22, could be adjusted to accommodate such a non-linear relationship.

The coupling mechanism between the arms can take a variety of forms, including chains, timing belts, bar linkages, band drives, and the like. It is generally preferred, however, to use gear assemblies for coupling the motion of the arms together. Particularly preferred is a single tooth mating gear, as illustrated in the drawings, having involute teeth forms to provide a constant rotational ratio between the arms. The illustrated gear is designed to provide a constant ratio of 1.6:1 between the arms 14 and 16, where arm 16 rotates 1.6 units in the counterclockwise direction (as illustrated in the drawings) for each unit that arm 14 rotates in the clockwise direction.

As illustrated, the pivot points 15 and 17 are spaced-apart and are equidistant from the center point CP of the articles A, A' which are being held. It is not necessary, however, that the pivot points be located at a fixed distance, although when they are located at different distances the calculation of the curved surfaces (as described in detail hereinbelow) is somewhat more complicated.

It is also possible to mount the pivot points of the first and second arms concentrically on a single pivot point. Such concentric mounting, however, requires a more elaborate gearing mechanism, such as a jackshaft

gear, which is generally more difficult to incorporate in the design. There are no other advantages associated with concentric mounting of the arms, so it will generally be preferred to employ a spaced-apart mounting as illustrated.

A locking screw 30 (Fig. 3) will usually be provided so that the arms 14 and 16 may be firmly held against the article A, A' being supported. The locking screw 30 is received in a threaded aperture 32 formed in the side of frame 12 and engages a tab 34 which is attached to the rear surface of arm 16 and present in an aperture 36 formed through the frame 12. Thus, the locking screw 30 engages a surface 35 defined by the tab 34, causing the arm 16 to rotate inward (clockwise) against the article A, A'. Arm 14, in turn, is rotated inward (counterclockwise) by the coupling mechanism. Optionally, the arms may be further coupled by a spring element (not illustrated) to further assure that the article A, A' will be held firmly therebetween.

Referring now in particular to Fig. 4, the arms 14 and 16 are illustrated in their fully closed configuration. There, the contact point 18 on arm 14 engages the cleft where surfaces 20 and 22 converge on arm 16 at the point which is the center point for the held articles. In this way, circular articles having very small diameters can be held when the arms are close together, as illustrated in Fig. 4, as well as articles having relatively large diameters, such as article A in Fig. 2. Of course, to fully close against and concentrically hold an article of infinitesimally small diameter, both the cleft and the contact point 18 on arm 14 would have to meet with complementary V-shaped geometries. The radiused geometries illustrated are a compromise which facilitates machining.

The holders 10 of the present invention may be mounted on a variety of surfaces and other devices. As illustrated in Fig. 1, the frame 12 is conveniently

attached to a mounting post 40 having a vertically adjustable shaft 42 which is secured directly to the frame. The mounting post 40 includes a lever 44 which may be depressed to allow raising and lowering of the shaft 42. The construction of such mounting post is described in detail in copending application serial no. 07/638,886, filed on January 7, 1991, the disclosure of which is incorporated herein by reference.

Referring now to Fig. 5, the equations for the two curved surfaces 20 and 22 in a Cartesian plane will be described. The formulas assume that the distance between the center point CP and the pivot points 15 and 17 will be equal and have a value R (which is arbitrarily selected). It is further assumed that the ratio between the clockwise rotation of first arm 14 and the counterclockwise rotation of the second arm 16 will have a constant value C (which is arbitrarily selected and determined by the structure of coupling mechanism). Based on these assumptions, the Cartesian coordinates of the curve 20 (x_2 , y_2) and second curve 22 (x_1 , y_1) may be calculated as follows.

$$x_1 = R (P + Q)$$

$$y_1 = R (S + T)$$

$$x_2 = R (P - Q)$$

$$y_2 = R (S - T), \text{ wherein}$$

$$P = \sin \theta - \left(\sin \frac{\theta}{C} \right) \left(\frac{\cos \theta}{C} \right);$$

$$Q = (2 \sin \theta) \left(\sin \frac{\theta}{2C} \right) \left(1 - \frac{\cos^2 \frac{\theta}{2C}}{C^2} \right)^{0.5};$$

$$S = \cos \theta + \frac{\left(\sin \frac{\theta}{C}\right) (\sin \theta)}{C};$$

5

$$T = (2 \cos \theta) \left(\sin \frac{\theta}{2C}\right) \left(1 - \frac{\cos^2 \frac{\theta}{2C}}{C^2}\right)^{0.5};$$

10

θ is the angle of divergence between the point where curves 20 and 22 converge and the center point CP, measured at pivot point 17.

The actual curve illustrated in Fig. 5 is based on a C equal to 1.6. The radius of the article being held is r equal to $2 R \sin \theta/2C$.

15

Although the foregoing invention has been described in detail for purposes of clarity of understanding, it will be obvious that certain modifications may be practiced within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A holder for centered round articles, said holder comprising:

5 a first arm pivotally attached at a proximal end to the frame, said first arm defining a single contact point at a distal end;

10 a second arm pivotally attached at a proximal end to the frame, said second arm defining a pair of diverging surfaces each of which define a continuous locus of contact points; and

15 means for mechanically coupling the first and second arms to control their ratio of relative rotational motion, wherein the position of the single contact, the shapes of the diverging surfaces, and the ratio of relative rotational motion are selected to maintain a center point of the held article at a fixed position relative to the frame regardless of article diameter.

20 2. A holder as in claim 1, wherein the pivot point of the first arm on the frame is spaced-apart from the pivot point of the second arm.

25 3. A holder as in claim 1, wherein the mechanical coupling means is a gear.

4. A holder as in claim 3, wherein the gear is a single tooth mating gear.

30 5. A holder as in claim 1, wherein the mechanical coupling means provides a constant ratio of relative rotational translation.

35 6. A holder as in claim 1, wherein the distances from the pivot point of each arm to the fixed center point are equal.

7. A holder as in claim 6, wherein the diverging surfaces follow curves having following equations in a Cartesian plant:

$$x_1 = R (P + Q)$$

$$y_1 = R (S + T)$$

$$x_2 = R (P - Q)$$

$$y_2 = R (S - T), \text{ wherein}$$

R is the radial length from the pivot point of each arm to the fixed center point;

$$P = \sin \theta - \left(\sin \frac{\theta}{C} \right) \left(\frac{\cos \theta}{C} \right);$$

$$Q = (2 \sin \theta) \left(\sin \frac{\theta}{2C} \right) \left(1 - \frac{\cos^2 \frac{\theta}{2C}}{C^2} \right)^{0.5};$$


$$S = \cos \theta + \frac{\left(\sin \frac{\theta}{C} \right) (\sin \theta)}{C};$$



$$T = (2 \cos \theta) \left(\sin \frac{\theta}{2C} \right) \left(1 - \frac{\cos^2 \frac{\theta}{2C}}{C^2} \right)^{0.5};$$


θ is the angle of divergence of the second arm at its pivot point between the point where the two curves converge on the second arm and the fixed center point of the article being gripped; and

C is the ratio of rotational translation of the first arm to the second arm.

1/4

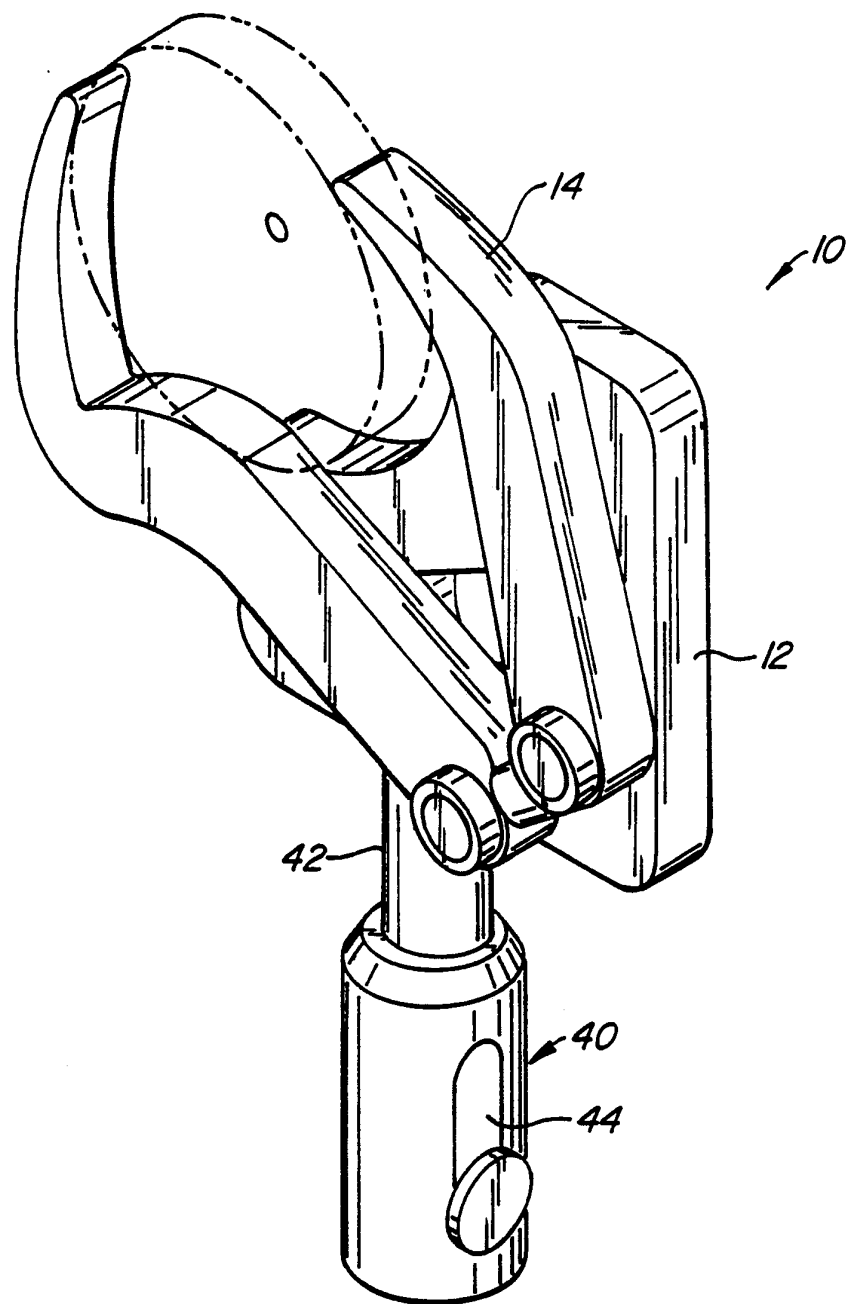**FIG. 1.**

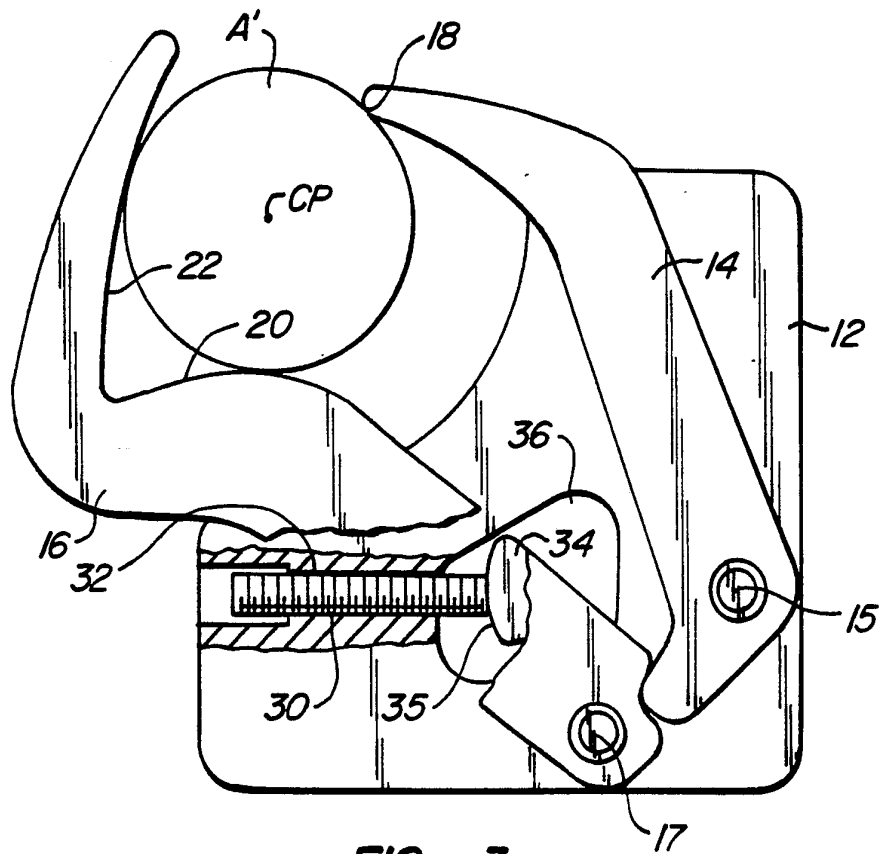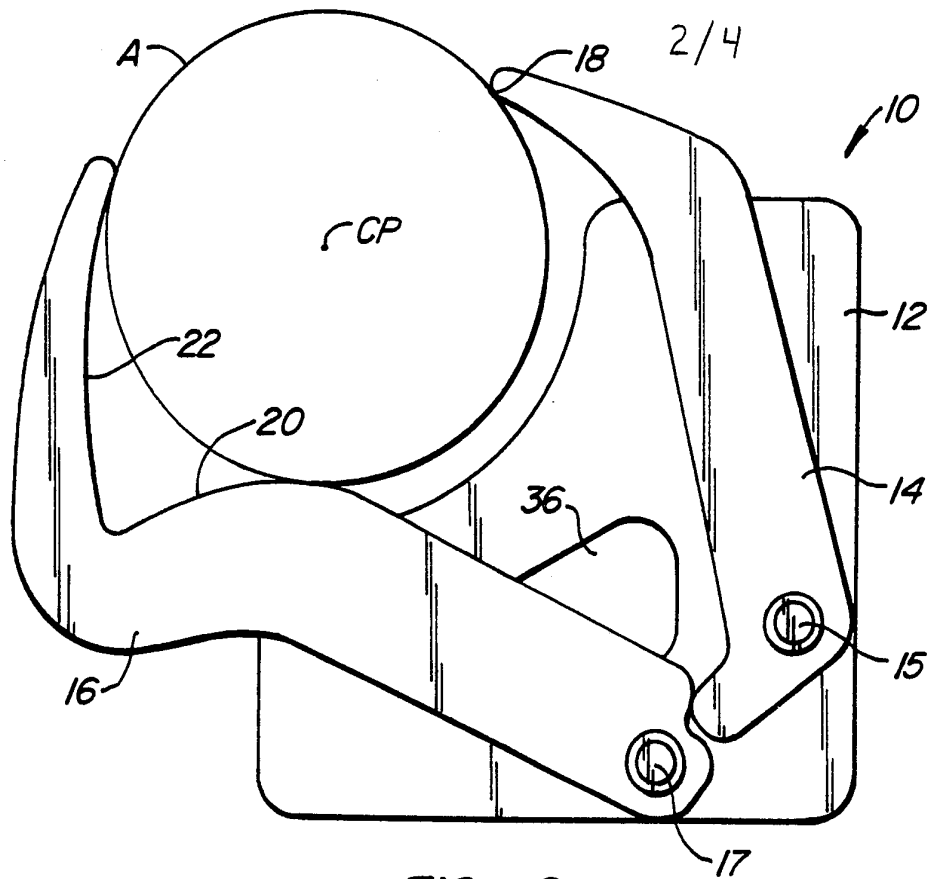

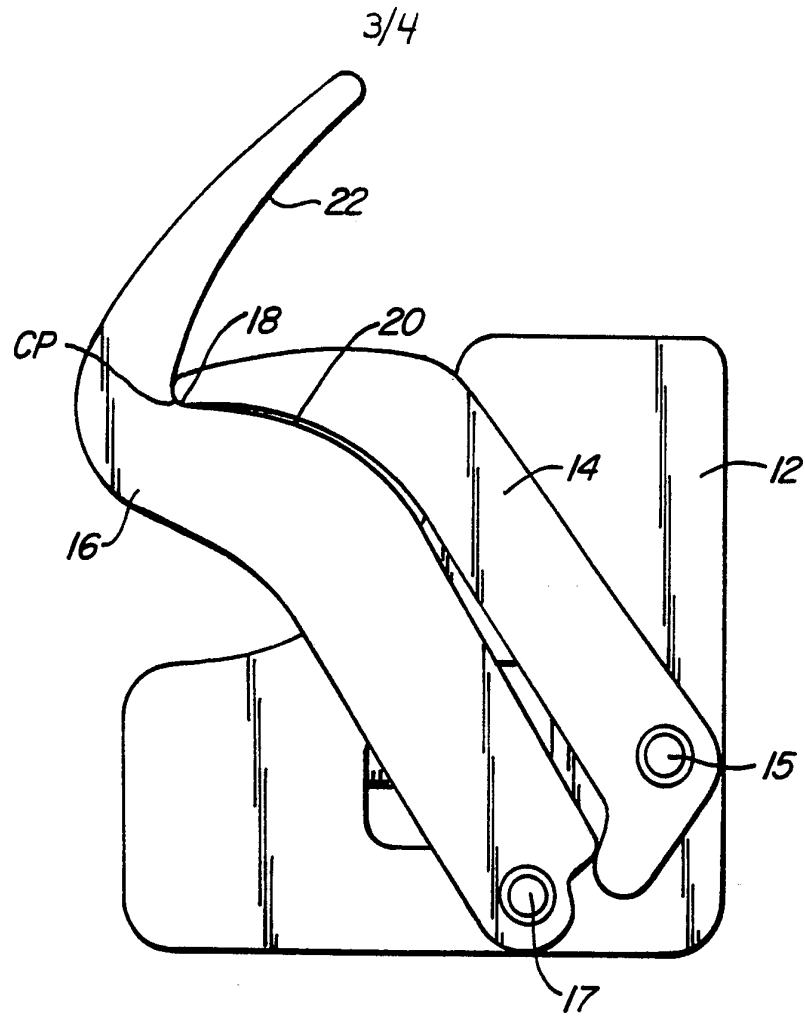**FIG. 4.**

4/4

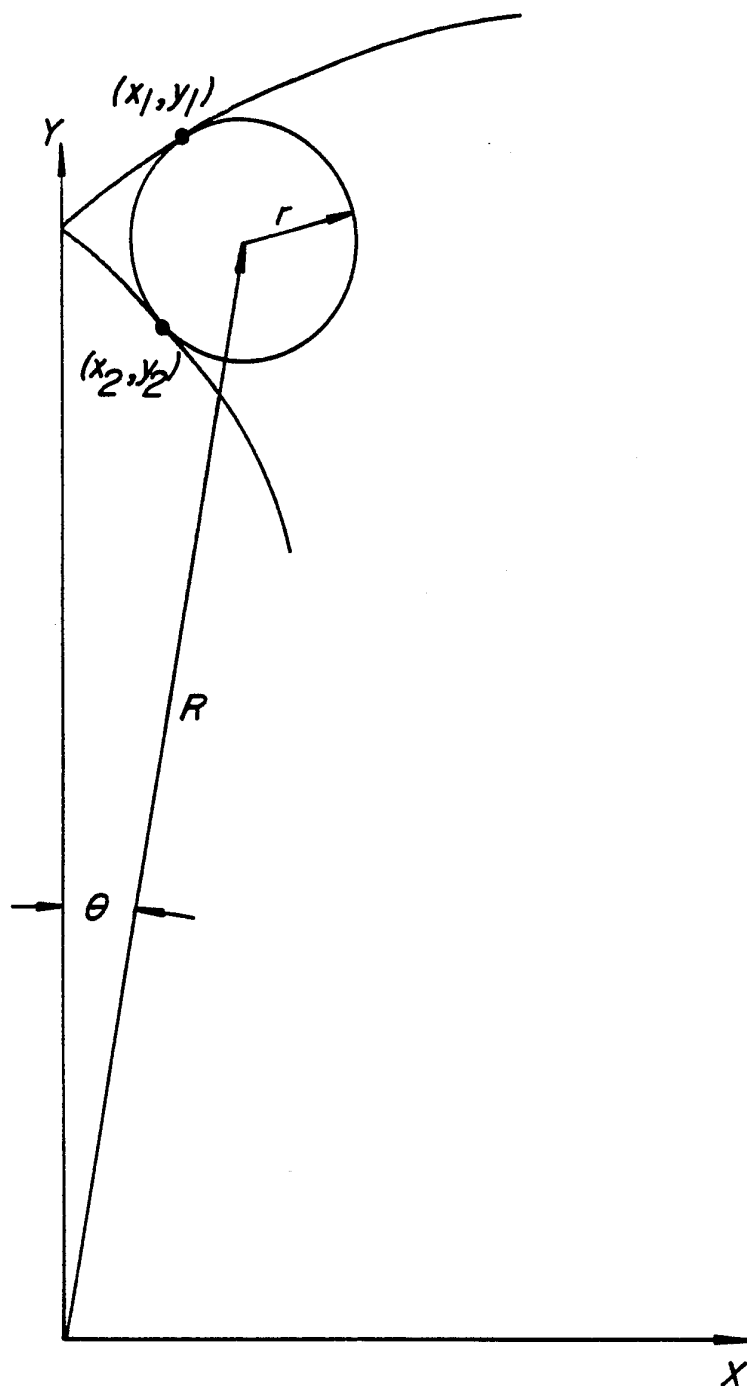


FIG. 5.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/03935

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :B25J 15/08

US CL :294/106, 902; 269/237

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 294/106, 902; 269/237

294/104, 28; 269/238, 239, 34; 901/31, 39

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 2,024,112 (PHILLIS) 22 November 1935	
A	US, A, 4,478,451 (BRUCHER ET AL.) 23 October 1984	
A	US, A, 4,796,877 (MUSIL ET AL.) 10 January 1989	
A	US, A, 4,810,019 (BRUCHER ET AL.) 07 March 1989	
A	SU, A, 905,063 (LENGD) 25 February 1982	
A	SU, A, 1,399,059 (KOSTROMSK) 30 May 1988	

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

21 JULY 1992

Date of mailing of the international search report

21 AUG 1992

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

JOSEPH D. PAPE

Telephone No. (703) 308-1113

Nguyen Ngoc-Ho
NGUYEN NGOC-HO
INTERNATIONAL DIVISION