

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2007 (19.04.2007)

PCT

(10) International Publication Number
WO 2007/044272 A2

(51) International Patent Classification:
A63B 71/14 (2006.01) **A41D 19/015** (2006.01)

(21) International Application Number:
PCT/US2006/038290

(22) International Filing Date: 2 October 2006 (02.10.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/243,311 4 October 2005 (04.10.2005) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 11/243,311 (CON)
Filed on 4 October 2005 (04.10.2005)

(71) Applicant (for all designated States except US): **HILLERICH & BRADSBY CO.** [US/US]; 800 West Main Street, P.O. Box 35700, Louisville, Kentucky 40232-5700 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KLEINERT, James, M.** [US/US]; 3422 Glenview Avenue, Louisville, Kentucky 40222 (US).

(74) Agents: **LAMB, Charles, G.** et al.; Middleton Reutlinger, 2500 Brown & Williamson Tower, (401 S. 4th Street, Suite 2500), Louisville, Kentucky 40202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **BATTING GLOVE**

(57) Abstract: A batting glove particular for baseball and softball includes padding along the palmar side of at least the proximal ends of the metacarpals of the ring finger and the small finger. Padding is absent over the hook of the hamate and preferably the carpometacarpal joints of the ring finger and the small finger.



WO 2007/044272 A2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
AS RECEIVING OFFICE

UNITED STATES PATENT APPLICATION FOR

BATTING GLOVE

BY

JAMES M. KLEINERT

BATTING GLOVE
BY
JAMES M. KLEINERT

5 CROSS REFERENCE TO RELATED APPLICATIONS

 This international patent application claims priority to
and benefit from U.S. Patent Application Serial Number
11/243,311, filed on October 4, 2005, which is a continuation-
10 in-part of and claims priority to and benefit from, currently
pending U.S. Patent Application Serial Number 10/670,859 filed
September 25, 2003 which is a continuation-in-part of Patent
Application Serial no. 10/001,325 filed October 25, 2001, now
U.S. Patent No. 6,701,530 issued March 9, 2004, which is a
15 continuation-in-part of and claims priority to and benefit
from U.S. Patent Application Serial Number 09/867,084 filed
May 29, 2001, now U.S. Patent Number 6,389,601 issued on May
21, 2002, which is a continuation of and claims priority to
and benefit from U.S. Patent Application Serial Number
20 09/491,742 filed January 27, 2000 now U.S. Patent No.
6,253,382 issued on July 3, 2001.

BACKGROUND OF THE INVENTION

1. Field of the Invention

 This invention relates to gloves for the human hand which
25 are worn when playing sports such as baseball, softball, or
working and the like. In one aspect, this invention relates
to a batting glove specifically designed to improve grip,

comfort, protection, and performance of a wearer. However, this invention has broader implications and may be advantageously employed in other applications requiring protection of the hands. More particularly, this invention
5 relates to a batting glove which includes padding in selected areas to provide protection at the hook of the hamate during use by the wearer.

2. Description of Related Art

Glove construction for protection of the human hand is well known. In addition, there are a number of patents which teach gloves claimed to be particularly useful as batting gloves. For example, U.S. Patent No. 3,175,226 teaches a dress glove construction which completely covers the fingers and which includes resiliently expandable materials in
10 selected areas to accommodate hands of different sizes. In contrast, U.S. Patent No. 4,561,122 teaches a protective glove which has a wrap around construction for a protective glove which leaves the thumb and fingers ends exposed. U.S. Patent No. 5,345,609 teaches a protective glove which includes shock
15 absorbing cells disposed at selected portions along the top of the glove. U.S. Patent No. 5,790,980 teaches a hand glove with a polyurethane foam pad in the palm portion of the glove. Other references attempt to provide a sport glove for supporting and stabilizing the wrist and hand. Current gloves
20 protect the bony prominence areas of the hand. Although hand

protection from direct shocks and abrasions is found in gloves of the current art, what is needed is a batting glove which provides improved grip, comfort and performance by unloading bony prominences, unloading pulleys and tendons, and improving
5 finger and knuckle motion of the hand of a wearer by providing preselected thicknesses of preselected materials specifically chosen to protect the wearer from injury from distributed shocks in hitting a ball with a bat, and the attendant risk of long-term injury to the aforementioned bones, ligaments,
10 pulleys, tendons, etc., by repetitive swinging of bats and hitting of balls.

Also, hockey goaltender's blocker gloves for use, particularly in ice hockey and other sports which require the player to protect his arm from high flying objects, such as
15 pucks or the like are well known. These blocker gloves are provided on the back or dorsal side of the hand with a blocker pad, usually of substantially rectangular shape which extends longitudinally of the glove covering the back of the hand as well as the forearm. These blocker pads are designed to
20 control the reflective direction of a hockey puck which is directed towards the goal wherein the goaltender prevents the puck from entering the goal. The blocker pad generally has a thick leather skin at the facing thereof and has thereunder a plurality of layers of padding material. On the palmar side
25 of the blocker glove is a stick glove portion designed to

receive the thumb and fingers of the hand and to grip a hockey stick. However, there have been problems in the design of the palmar side of the blocker glove in providing protection against "stingers" and yet maintain flexibility of the fingers and rotational movement of the joints.

SUMMARY OF THE INVENTION

In the development of gloves, several key elements are utilized in the design. First, on the dorsal side of the glove, the motion zones are determined by the center axis of rotation of the individual thumb, finger, hand, and wrist joints. These motion zones have been applied to specific joint locations for the particular uses of a designed glove. This helps the flexibility of the glove in relationship to its use. As such, the motion zones are selected in various combinations or even individually depending on the specific task or function of the glove.

Secondly, on the palm side of the glove there are additional motion zones. Again, these motion zones, which also function to decrease glove impedance and improve the breath-ability of the glove, are located specifically in relationship to the center axis of rotation of the finger joints.

Thirdly, again on the palm side of the glove, there are specific areas of padding. The location of the padding is determined by the bone and joint anatomy of the hand, fingers,

and thumb. For the hand, the palm pad is placed above the center axis of rotation of the wrist (i.e., just above or distal to the hook of the hamate) and just below the center axis of rotation of the metacarpal heads. These bony landmarks
5 are actually quite prominent in relationship to the surface of the hand. By placing the pads between the bony prominences, these areas of the hand are unloaded. The type of pad chosen for the palm is specific to its function. Other applications require some adjustments to the pad, but the basic premise
10 still remains to unload the bony prominences of the hand in relationship to the required object to be held.

The pads for the fingers are placed again between the bony prominences of each specific finger bone (phalanx). The individual pads of the digits are placed over the relatively
15 flat portion of the phalanx and as such, between the joints that are present on each side of the respective phalanx. The pad does not cover the area near the center axis of rotation. Again, this unloads these bony areas and leads to more even distribution of force across the digit. In other words,
20 decreased areas of concentrated pressure, i.e., over the bony prominences and individual phalanxes will experience less discomfort. Of course, improved comfort leads to better grip and performance of the specific task in question. The pads on the fingers are placed over the proximal and middle phalanx of
25 each digit. Because of the relative bony and flexor tendon

pulley anatomy, these regions correlate with the A2 and A4 pulleys specifically. Furthermore, this placement allows for unrestricted motion of the various finger and hand joints by precisely keeping the pads away from the center axis of

5 rotation (for each specific joint). Depending on the use of the glove, various combinations, or even independent use of these pads could be utilized in glove construction.

Additionally, the pads may have different sizes and shapes depending on the application. However, the pads would still

10 be centered primarily between the bony prominences and away from the center axis of rotation for each joint.

The pad for the thumb is placed between the bony prominences of the first phalanx, primarily on the lateral (side) region. Again, the pad is located above the center axis of rotation of the metacarpalphalangeal joint of the thumb and below the center axis of rotation of the interphalangeal joint of the thumb. Other applications to this pad placement are quite numerous. Even this pad could be an application in combination with all, some, one, or none of

15

20 the finger and palm pads depending on the task.

Optionally, pads may also be placed over the distal phalanx of each digit, just beyond the bony prominences. This pad would be above (distal) the center axis of rotation of the distal interphalangeal joint of the respective finger. As

such, three pads could be placed over each finger depending on the use required for the glove.

The motion zone for the wrist area is also determined by the center axis of rotation of the wrist joint. This allows
5 for essentially full motion of the wrist, while at the same time, avoiding dislodgement of the glove from the player's hand. Not all gloves require or benefit from a wrist motion zone. However, a combination of the finger, thumb, hand, and wrist motion zones determined by the joints center axis of
10 rotation may be utilized for various glove applications.

An object of the present invention is to provide a batting glove which takes stress off of selected parts of the human hand.

Another object of the present invention is to provide a
15 batting glove having preselected materials of construction in different areas of contact with the human hand.

A further object of the present invention is to provide a batting glove having preselected thicknesses of preselected materials of construction in different areas of contact with
20 the human hand.

Yet another object of the present invention is to provide a batting glove which uses different materials to allow wrist motion, unload bony prominences, improve finger and knuckle motion, and protect the back of the hand.

An additional object of the present invention is to provide a batting glove with padding which unloads the boney prominence of the hook of the hamate of a hand without interference with the flexibility and mobility of the fingers and joints of the hand.

Also, an object of the present invention is to provide a goaltender's blocker glove which takes stress off selected parts of the human hand when the glove is in use.

Another object of the present invention is to provide a hockey goaltender's blocker glove with padding added at selected areas of the hand for protecting selected anatomical portions of the human hand and yet allow the fingers and the joints of the hand to have flexibility and mobility.

Even a further object of the present invention is to provide a work glove with padding added at selected areas of the hand for protecting selected anatomical portions of the human hand and yet allow the finger and joints of the hand to have flexibility and mobility. As used herein the word "work glove" applies to, but is not limited to, for example, gloves for gardening, automobile mechanic gloves, sports glove for use when riding bicycles, motorcycles, automobile racing and the like.

In one aspect, the present invention provides a batting glove including preselected material in preselected thicknesses to fill in the soft spots surrounding the bony

prominences of the hand, to unload the pulleys and tendons, and to take stress off of selected parts of the hand.

Specifically, 2-Way SPANDEX® materials are used in the wrist motion zone of the glove; thin elastic material such as LYCRA®

5 is used in the area of the finger joints and knuckles; synthetic material such as JANEC SUPER® is used in the area of the dorsal side of the fingers; a cabretta skin protective covering is used for selected parts of the hand, rubber foam protective padding is placed at selected contact areas, and
10 soft padding such as terry cotton is placed inside the glove in selected areas.

In another aspect, the present invention provides a hockey goaltender's block glove which includes a glove segment and a blocker pad. The glove segment has a dorsal side and a
15 palmar side with a top glove panel covering the palmar side of the human hand which includes the palm, thumb and fingers and a bottom glove panel sized to cover the back, thumb and fingers of the dorsal side of the human hand. The top and bottom panels which make up the glove segment are secured
20 along each panel's periphery to define a glove body with an opening therein to receive a human hand. The blocker pad is provided with a front face and an opposed back wherein the dorsal side of the glove segment is attached to the blocker pad back. Particularly, the glove segment is provided with a
25 thumb and fingers section for receiving a thumb and fingers of

the human hand. Shock absorbing pads are provided to overlie selected areas defined by the location of anatomical parts of the human hand when inserted into the glove. Specifically, the shock absorbing padding, which is usually a foam rubber or another foam elastomeric material of approximately 1/4" in thickness, overlies at least the A2 pulley region of the thumb which is between the metacarpalphalangeal joint and the center axis of rotation of the interphalangeal joint of the thumb.

Other areas of shock absorbing padding may be added to overlie the middle phalanx of the index finger above the proximal interphalangeal joint and below the center axis of rotation of the distal interphalangeal joint, to overlie the proximal phalanx of the long finger above the metacarpal-phalangeal joint and below the center axis of rotation of the proximal interphalangeal joint, as well as overlying the proximal phalanx of the ring finger and the small finger above the metacarpalphalangeal and below the center axis of rotation of the proximal interphalangeal joint. Additionally, the shock absorbing padding may overlie areas of the metacarpals of the index, long, ring, and small fingers below the center axis of rotation of the metacarpalphalangeal joints.

Additionally, the present invention provides a work glove having a dorsal side panel and a palmar side panel wherein the dorsal side panel is sized to cover the back, thumb, and fingers of the dorsal side of a human hand and the palmar side

panel is sized to cover the palmar side of the human hand, including the palm, thumb and fingers. The dorsal side panel and the palmar side panel are secured along each panel's outer periphery to define a glove body with an opening therein to receive a human hand. Particularly, the glove body is provided with a thumb and fingers section for receiving a thumb and fingers of the human hand. Shock absorbing pads are provided to overlie selected areas defined by the location of anatomical parts of the human hand when inserted into the glove. Specifically, the shock absorbing padding, which is usually a foam rubber or another foam elastomeric material of approximately 1/4" in thickness, is disposed to overlie at least the distal halves of the index finger and long finger metacarpals excluding the metacarpal joints of the index finger and the long finger. Furthermore, and preferably, a thumb ulnar protective padding is disposed along the thumb stall at a location to be along an ulnar border of the thumb proximal phalanx between the metacarpalphalangeal joint and the interphalangeal joint as well as padding over the A2 pulley of the proximal phalanx between the metacarpalphalangeal joint and the interphalangeal joint.

More particularly, the present invention provides a batting glove having a dorsal side panel and a palmar side panel wherein the dorsal side panel is sized to cover the back, thumb, and fingers of the dorsal side of a human hand

and the palmar side panel is sized to cover the palmar side of the human hand, including the palm, thumb and fingers. The dorsal side panel and the palmar side panel are secured along each panel's outer periphery to define a glove body with an opening therein to receive a human hand. Particularly, the glove body is provided with a thumb and fingers section for receiving a thumb and fingers of the human hand. Shock absorbing pads are provided to overlie selected areas defined by the location of anatomical parts of the human hand when inserted into the glove. Specifically, the shock absorbing padding, which is usually a foam rubber or another foam elastomeric material of generally less than 1/4" in thickness, is disposed to overlie at least the proximal ends of the metacarpals of the ring finger and the small finger distal to the hook of the hamate. Padding is absent at the hook of the hamate. Additionally, padding may be added to the distal halves of the fingers metacarpals excluding the metacarpal joints of the fingers.

Further objects and advantages of this invention will appear from the following description and appended claims, reference being had to the accompanying drawings forming a part of the specification wherein like references designate corresponding parts into several views.

BRIEF DESCRIPTION OF THE DRAWINGS

A better understanding of the invention will be had upon reference to the following description in conjunction with the accompanying drawings in which like numerals refer to like parts throughout the several views and wherein:

5 Fig. 1 is a bottom schematic anatomical view of the bones of a right-side human hand showing the palm-side details;

 Fig. 1A is a bottom schematic anatomical palm-side view of the bones, and selected details of the pulleys and tendons of a right-side human hand;

10 Fig. 2 is a top view of a batting glove of a preferred embodiment of the present invention showing the dorsal-side details and seen overlaying the skeletal structure of a right-dorsal-side human hand;

 Fig. 3 is a bottom view of a batting glove of a preferred
15 embodiment of the present invention showing the palm-side details and seen overlaying the skeletal structure of a right-palm-side human hand;

 Fig. 3A is a bottom view of another batting glove of a preferred embodiment of the present invention showing relevant
20 palm-side details;

 Fig. 4 is a radial side view of a batting glove of a preferred embodiment of the present invention showing relevant details and seen overlaying the skeletal structure of a right-side human hand;

Fig. 5 is an exploded view of some of the major components of a batting glove of a preferred embodiment of the present invention;

Fig. 6 is a perspective view of a blocker glove of the present invention with a goaltender shown in phantom lines;

Fig. 7 is a perspective view of the blocker glove of Fig. 6 showing the palm side of the glove;

Fig. 8 is a bottom view of a preferred hockey goaltender's blocker glove showing the palmar-side details and seen overlaying the skeletal structure of a right-palmar-side human hand inserted into the glove showing location for shock absorbing pads;

Fig. 9 is a bottom view of the hockey goaltender's blocker glove;

Fig. 10 is a sectional view taken along line 10-10 of Fig. 9;

Fig. 11 is a sectional view taken along line 11-11 of Fig. 9;

Fig. 12 is a palmar side view of a glove of the present invention showing relevant details and seen overlying the skeletal structure of a right hand;

Fig. 13 is a sectional view taken along line 13-13 of Fig. 12;

Fig. 14 is a sectional view taken along line 14-14 in Fig. 12;

Fig. 15 is a palmar side view of a preferred glove of the present invention showing relevant details and skin overlying the skeletal structure of a right hand; and

Fig. 15A is a modified palmar side view of the preferred embodiment of Fig. 15.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A. BATTING GLOVE

Fig. 1 is a schematic anatomical view of the bones of a right human hand 10 looking at a palm 18 side. Shown are the radius 20, ulna 21, radiocarpal joint (RC) 23', distal radio ulnar joint (DRUJ) 22, wrist 12, thumb 64, index finger 65, long finger 66, ring finger 67, and small finger 68. The carpus 69 comprises eight carpal bones, seven of which are shown in Fig. 1 and includes the hamate bone 71 with its hook-like protrusion, the scaphoid 24' and the lunate 25.

The thumb 64 is comprised of the distal phalanx 51, the interphalangeal joint (IP) 46, proximal phalanx 41, diaphysis of proximal phalanx 41', metacarpalphalangeal joint (MCP) 36, metacarpal 31, and carpometacarpal joint (CMC) 26.

The index finger 65 is comprised of the distal phalanx 60, distal interphalangeal joint (DIP) 56, middle phalanx 52, proximal interphalangeal joint (PIP) 47, proximal phalanx 42, metacarpalphalangeal joint (MCP) 37, metacarpal 32, and carpometacarpal joint (CMC) 27.

The long finger 66 is comprised of the distal phalanx 61, distal interphalangeal joint (DIP) 57, middle phalanx 53, proximal interphalangeal joint (PIP) 48, proximal phalanx 43, metacarpalphalangeal joint (MCP) 38, metacarpal 33, and
5 carpometacarpal joint (CMC) 23.

The ring finger 67 is comprised of the distal phalanx 62, distal interphalangeal joint (DIP) 58, middle phalanx 54, proximal interphalangeal joint (PIP) 49, proximal phalanx 44, metacarpalphalangeal joint (MCP) 39, metacarpal 34, and
10 carpometacarpal joint (CMC) 24.

The small finger 68 is comprised of the distal phalanx 63, distal interphalangeal joint (DIP) 59, middle phalanx 55, proximal interphalangeal joint (PIP) 50, proximal phalanx 45, metacarpalphalangeal joint (MCP) 40, metacarpal 35, and
15 carpometacarpal joint (CMC) 30.

Fig. 1A shows the skeletal anatomy, pulley system, and flexor tendons of the thumb 64 and fingers 65-68 of the right hand 10. The thumb 64 includes the flexor tendon (flexor pollicis longus) 200 and the three pulleys 220-224 of the
20 thumb 64; an A1 pulley 220, A2 pulley 222, and A3 pulley 224. The A2 pulley 222 is the most important for function and is attached to the proximal phalanx 41 of the thumb 64. The respective pulleys 230-238 are also shown for each of the: index finger 65, long finger 66, ring finger 67, and small
25 finger 68. Each finger 65-68 has five pulleys 230-238; an A1

pulley 230, A2 pulley 232, A3 pulley 234, A4 pulley 236, and A5 pulley 238. The A2 pulley 232 and A4 pulley 236 are considered to be the most important for function. The A2 pulley 232 is attached to the proximal phalanx 42-45. The A4 pulley 236 is attached to the middle phalanx 52-55. The A1 pulley 230 is near the MCP joint 37-40, the A3 pulley 234 is near the PIP joint 47-50 and the A5 pulley 238 is near the DIP joint 56-59.

The flexor tendons 202-208 are shown as one unit for each finger 65-68, but actually there are two flexor tendons to each unit. They are the flexor digitorum superficialis and the flexor digitorum profundus (shown as one, 202-208). These tendons 202-208 travel underneath the pulleys 230-238 and the flexor digitorum profundus tendon attaches to the distal phalanx 60-63 of each finger 65-68. The tendons 202-208 move back and forth below the pulleys 230-238, via muscles (not shown) attached to the proximal end of the tendons. This movement of the tendon 202-208 produces finger 65-68 flexion. The pulleys 230-238 prevent the flexor tendons 202-208 from bowstringing or moving away from the bone with finger 65-68 flexion. If the pulleys 230-238 are damaged and no longer function, the tendons 202-208 will bowstring with a resultant significant loss of finger motion as well as grip strength. As such, pulleys 230-238, especially the A2 pulley 232 and the A4 pulley 236, are very important and must be preserved and

protected as much as possible. As shown in Fig. 4, protective padding 102 for each finger 65-68 is placed in an anatomically designed fashion over the A2 and A4 pulley regions. When the A2 and A4 pulleys 232 and 236 are preserved, adequate finger
5 65-68 motion and grip strength is maintained.

In Figs. 2-5, a preferred batting glove 80 is provided for either a right, left, or both human hand(s) 10, as desired. A glove 80 for a left hand 10 utilizes symmetrical placement of the elements, materials, and thicknesses herein
10 described.

Fig. 2 shows details of a dorsal side of a batting glove 80 to cover a human hand 10 and seen overlaying the skeletal structure and skin outline of a right-dorsal-side human hand 10.

15 The batting glove 80 has a plurality of finger elements 82, a thumb element 84, a top portion 86, and a lower portion 88 (see Figs. 3-5), wherein the finger elements 82 cover fingers 65-68. The thumb element 84 covers a thumb 64, and the top portion 86 covers a back side 16 of the hand 10. The
20 lower portion 88 covers the palm side 18 of the hand 10.

An elastic band 90 is attached to the top portion 86 and to the lower portion 88. The elastic band 90 includes a securing means in the form of a hook 92 and loop 94 fastener for retention above a human wrist 12.

The top portion 86 includes elastic material 96, preferably 2-WAY SPANDEX® in the vicinity of the wrist 12 out to the vicinity of the metacarpalphalangeal joints (MCP) 37-40 of the fingers 65-68 of the hand 10. Additionally, a
5 protective covering 98 is centrally located to cover the back side 16 of the hand 10.

The finger elements 82 each include an upper portion 83 which includes synthetic material 100 with openings formed therein to receive thin elastic material 116 attached to cover
10 the proximal interphalangeal joints (PIP) 47-50, and the distal interphalangeal joint (DIP) 56-59 of each finger 65-68.

As shown in Fig. 3, a lower portion 85 of the finger elements 82 includes protective covering 98. In addition, protective padding 102 is affixed beneath the protective
15 covering 98 and adjacent to the fingers 65-68, in preselected areas. As shown in Figs. 3 and 4, protective padding 102 and protective covering 98 cover the middle phalanx 52-55, specifically the A4 pulley 236 region, and the proximal phalanx 42-45, specifically the A2 pulley 232 region, of each
20 finger 65-68. Openings are formed in the lower portion 85 to receive thin elastic material 116 attached to cover the palm-side 18 of the proximal interphalangeal joints (PIP) 47-50, and the distal interphalangeal joints (DIP) 56-59 of each finger 65-68.

The thumb element 84 includes protective covering 98 which surrounds the distal phalanx 51, metacarpalphalangeal joint (MCP) 36, proximal phalanx 41, metacarpal 31, and carpometacarpal joint (CMC) 26 of the thumb 64. As shown in Fig. 2, an opening is formed in the protective covering 98 to receive thin elastic material 116 attached to cover the interphalangeal joint (IP) 46 of the thumb 64. Another opening is formed in the protective covering 98 over the metacarpalphalangeal joint (MCP) 36 to receive thin elastic material 116. As shown in Figs. 2-5, a piece of protective padding 102, which is itself covered by thin elastic material 116, is affixed to an area on the thumb element 84 and centered on an ulnar border (inside) of the thumb 64 over the diaphysis of proximal phalanx 41' of the thumb 64. The diaphysis of proximal phalanx 41' is found between the metacarpalphalangeal joint (MCP) 36 and interphalangeal joint (IP) 46 of the thumb 64.

Referring again to Fig. 3, the bottom portion 88 includes elastic material 96 in the vicinity of the wrist 12. Out from the wrist 12 area, the bottom portion 88 includes protective covering 98 continuing out to the vicinity of the metacarpalphalangeal joints (MCP) 36-40 and located to cover the palm 18 of the hand 10. A piece of protective padding 102 is affixed to a central palm 18 area underneath the protective covering 98 and placed at a preselected distance below a

center axis of rotation of the metacarpalphalangeal joints (MCP) 37-40 and extending to a preselected distance above the hook of the hamate 71.

As shown in Fig. 3A, another preferred embodiment of the batting glove 80 is similar to the glove 80 of Fig. 3, but is distinguished wherein a central portion 103 of the central palm 18 area is provided having no protective padding 102 and abutting two separate sections, a first section 105, and a second section 107. Both the first section 105 and the second section 107 include affixing protective padding 102 underneath the protective covering 98. The central portion 103 includes protective covering 98, but no protective padding 102. When viewed as in Fig. 3A, an overall outline of the central palm 18 area is similar to that of the glove of Fig. 3, except that the central portion 103 appears to be relieved or depressed in relation to the first section 105 and the second section 107.

Referring back to Fig. 3, a first web 120 is formed in the area where the thumb element 84 is in proximity to the index finger 65. An additional piece of protective covering 98 (thereby creating a double thickness of protective covering 98) is affixed over the first web 120. A piece of protective padding 102 covered by thin elastic material 116 is affixed over the additional piece of protective padding 98 over the first web 120 to cover an area which is contacted by protective padding 102 of the thumb element 84. When the

glove 80 is worn by a wearer, the bottom portion 88 contacts the remainder of the palm 18.

Referring to Fig. 5, the bottom portion 88 is attached to the top portion 86 to enable an entire covering of the palm 18 and the back side 16 of the hand 10 along an outer periphery having at selected locations a plurality of finger openings 110, a thumb opening 112, and a main opening 130. Second, third and fourth webs, 122, 124, and 126, respectively, are formed between adjacent fingers 65-68. The finger elements 82 are fixedly attached to each of the finger openings 110. The batting glove 80 further provides the finger elements 82 with elastic webbing material 104 affixed laterally therebetween beginning at a tip of the index finger 65 down to the second web 122, running up to the long finger 66 and continuing likewise terminating at the tip of the small finger 68 just past the fourth web 126. Soft padding 99 such as terry cotton is placed as desired inside of the batting glove to cover the thicker protective padding 102, preferably in the areas of the palm 18 and pulleys of the fingers 65-68, and to provide for the comfort of the wearer.

Materials used in manufacture are preselected to achieve various goals as follows:

Synthetic material 100, such as, for example, JANEC SUPER® is used dorsally over the fingers 65-68 of the hand 10;

2-Way Elastic material 96, such as, for example, 2-WAY SPANDEX® is used in motion zones of the hand 10 to allow glove 80 movement;

Thin elastic material 116, such as, for example, LYCRA® is used to cover areas on the glove 80 based on centers of axes of rotation of all joints of the fingers 65-68 and thumb 64 of the hand 10;

Protective covering 98, such as, for example, cabretta skin (Indonesian sheep skin) is used to provide for protection from abrasion and direct shock applied to the hand in gripping a bat (not shown) and hitting a ball (not shown) with the bat; and,

Protection padding 102, such as, for example, rubber foam of 1/16" in thickness, is used to enhance a gripping surface of the fingers 65-68, specifically the regions of the A2 pulley 232 and A4 pulley 236, and in the palm 18 and first web 120 in order to reduce the most severe of shocks transmitted to the hand 10.

As best shown in Figs. 15, 15A, a preferred batting glove 500 is provided for the right human hand. The glove 500 outlined in phantom lines, includes a palmar side panel 502 and a dorsal side panel such as the dorsal (top) side panel shown in Fig. 2 and identified by the numeral 86 or the dorsal side panel 404 in Fig. 13. The two panels are generally stitched together along their outer periphery such as shown in

Fig. 13 and indicated by the numeral 401. The panels 502 and 404 are patterned and sized to define a plurality of finger stalls and a thumb stall. The finger stalls are identified by the numerals 510 for the index finger, 512 for the long
5 finger, 514 for the ring finger and 516 for the small finger. The thumb stall is identified as 508. The glove 500 is also provided with an opening 503 to receive the human hand therein. The glove panels 502, 404 are made of any suitable material known in the art, such as leather, or the like.

10 Along the bottom portion of the palmar side panel 502 is attached at least a hook of the hamate relief padding 524 which overlies at least a portion of distal portion of the ring finger and small finger metacarpals 34 and 35, respectively. Preferably, pad 524 covers about one-half of
15 the length of the metacarpals 34 and 35. That is, pad 524 is about 2.25 to 2.75cm lengthwise of the metacarpals 34, 35 and from about 4.0 to 4.5cm across the metacarpals 34, 35.

Padding 524 may also cover a portion of metacarpal 33 of the long finger 66. Moreover, padding is absent over the hook of
20 the hamate 71 as well as the carpometacarpal joints 24 and 30 of the ring finger 67 and the small finger 68, respectively.

As shown in Fig. 15, additional padding 526 may also be provided to cover the proximal phalanx 42 above the metacarpalphalangeal joint 37 and below the center axis of
25 rotation of the interphalangeal joint 47. Other padding may

also include shock absorbing padding 527, 528, and 529 which are placed over the proximal phalanxes 43, 44 and 45 of the long finger 66, the ring finger 67, and the small finger 68, respectively. The padding will be positioned above the metacarpalphalangeal joints 38, 39 and 40, respectively, and below the center axis of rotation of 30 the proximal interphalangeal joints 48, 49 and 50, respectively. Even additional shock absorbing padding may be placed over the middle phalanxes 52, 53, 54 and 55 and identified as 536, 537, 538 and 539, respectively. The paddings 536, 537, 538 and 539 are positioned above the center axis of rotation of the proximal interphalangeal joints 47, 48, 49 and 50 and below the center axis of rotation of the distal interphalangeal joints as indicated by the numerals 56, 57, 58 and 59, respectively. The protective shock absorbing padding being placed in the aforementioned anatomically designed fashion protects the pulleys and tendons of the fingers while leaving the center axis of rotation of the appropriate joints free. This enables the movement of the fingers and thumb without adverse effects when in use.

The disclosure given is applicable not only to batting gloves, but also to gloves intended for use in various other activities such as, for example, golf, and working in the outdoors to include gardening. Protection for the hands during use in such activities is achieved by measures such as,

for example, varying quantity, placement, thickness, dimensions, and elastic qualities of pads, coverings, elastic materials and openings, as appropriate.

B. BLOCKER GLOVE

5 The goaltender's blocker glove identified by the numeral 300 is shown in Figs. 6 and 7. A blocking pad 302 covers a major portion of the hand, wrist, and forearm of the goalie and may be of any conventional shape but is shown as being rectangular with a preselected thickness of padding material
10 314 (Fig. 10) within the cover provided, the cover being an enclosed sewn construction including a back cover portion 316 and a face cover portion 318. The cover may be made of any conventional durable and flexible material with one preferred embodiment being of a nylon that exhibits both superior
15 abrasion and tear resistance and easily conventionally cut and sewn in the manner of any fabric material. A glove 304 is shown affixed by any well known means to the back cover 316 and includes a thumb portion 306, an index finger portion 307, a long finger portion 308, a ring finger portion 309, and a
20 small finger portion 310. The thumb portion 306 extends around the finger portions and wrist to provide extra padding over the sensitive wrist found in the index finger regions and is folded over to protect the wrist and lower portion of the palmar side of the hand. Additional wrist padding may also be
25 provided to fit over the wrist portion of the user and the

glove may be of any conventional size and shape known in the art.

As best shown in Figs. 8-11, a preferred hockey goaltender blocker glove 300 is provided for the right human hand. The glove 304 includes a covering 320 which may be of either unitary construction or include a plurality of sections to cover the finger sections 307-310. The glove covering is made of any suitable material known in the art, such as leather, or the like. Along the bottom portion of the covering 320 is attached a plurality of shock absorbing pads positioned at specific areas to protect, particularly, the A2 pulley region 222 (Fig. 1A) and the proximal phalanx 41 of the thumb above the metacarpalphalangeal joint 36 and below the center axis of rotation of the interphalangeal joint 46.

Additional padding may be provided to cover the middle phalanx 52 of the index finger above the proximal interphalangeal joint 47 and below the center axis of rotation of the distal interphalangeal joint as indicated by the numeral 56, as well as the proximal phalanxes 43, 44, and 45, of the long finger, ring finger and small finger, respectively. The shock absorbing padding 195 is provided over the thumb in the A-2 pulley region of the proximal phalanx 41 between the metacarpalphalangeal joint 36 and the center axis of rotation of the interphalangeal joint 46, as shown in Fig. 2. Padding 190 is positioned above the proximal interphalangeal joint 47

and below the center axis of rotation of the digital interphalangeal joint as indicated by the numeral 56. Padding 191 is positioned above the metacarpalphalangeal joint 38 and below the center axis of rotation of the proximal interphalangeal joint as indicated by the numeral 48. Padding 192 is positioned to overlie the proximal phalanx 44 and is positioned between the metacarpalphalangeal joint 39 and the center axis of rotation of the proximal interphalangeal joint as indicated at the numeral 49. Padding 193 is positioned to overlie the proximal phalanx 45 of the small finger above the metacarpalphalangeal joint 40 and below the center axis of rotation of the proximal interphalangeal joint as indicated at the numeral 50. Shock absorbing pad 194 may also be provided to overlie the metacarpals 32, 33, 34 and 35 of the index finger, the long finger, the ring finger and the small finger. Shock absorbing pad 194 overlies metacarpals 32, 33, 34, and 35 and is positioned between the carpometacarpal joints 27, 23, 24, and 30 (Fig. 1) and the center axis of rotation of the metacarpalphalangeal joints of each of the fingers 65, 66, 67, and 68 also as shown in Fig. 1. The protective shock absorbing padding is placed in the aforementioned anatomically designed fashion as shown in cut-away of the index finger section in Fig. 10 to illustrate the pulleys and tendons regions protected with the motion zones defined by the center axis of rotation of the appropriate joints being left free.

This enables the movement of the fingers and thumb without adverse effects when in use.

C. WORK GLOVE

As best shown in Figs. 12-13, a preferred glove 400,
5 particularly useful as a work glove including gardening, is provided for the right human hand. The glove 400 outlined in phantom lines, includes a palmar side panel 402 and a dorsal side panel 404. The two panels are generally stitched together along their outer periphery as indicated by the
10 numeral 401 and are sized to define a plurality of finger stalls and a thumb stall. The finger stalls are identified by the numerals 410 for the index finger, 412 for the long finger, 414 for the ring finger and 416 for the small finger. The thumb stall is identified as 408. The glove 400 is also
15 provided with an opening 403 to receive the human hand therein. The glove panels 402, 404 are made of any suitable material known in the art, such as leather, or the like. Along the bottom portion of the palmar side panel 402 is attached at least a palmar protective padding 424 which
20 overlies at least the distal halves of the index finger and long finger, metacarpals 32 and 33, respectively, and may include the metacarpals 34 and 35 of the ring finger and the little finger also. In a preferred embodiment, an ulnar protective pad 422 is provided along the thumb stall at a
25 location adapted to be along an ulnar border of the thumb

proximal phalanx 41 between the metacarpalphalangeal joint 36 and the interphalangeal joint 46 as well as a thumb A2 pulley protective padding 423 disposed along the thumb stall of the thumb proximal phalanx 41 between the metacarpalphalangeal joint 36 and the interphalangeal joint 46. Padding 423 is below the center axis of rotation of the interphalangeal joint 46. Even though padding 422 and 423 are shown as separate padding it is realized that padding 422, 423 may be unitary. Additional padding 426 may also be provided to cover the proximal phalanx 42 above the metacarpalphalangeal joint 37 and below the center axis of rotation of the interphalangeal joint 47. Other padding may also include shock absorbing padding 427, 428 and 429 which are placed over the proximal phalanxes 43, 44 and 45 of the long finger 66, the ring finger 67, and the small finger 68, respectively. The padding will be positioned above the metacarpalphalangeal joints 38, 39 and 40, respectively, and below the center axis of rotation of the proximal interphalangeal joints 48, 49 and 50, respectively. Even additional shock absorbing padding may be placed over the middle phalanxes 52, 53, 54 and 55 and identified as 436, 437, 438 and 439, respectively. The paddings 436, 437, 438 and 439 are positioned above the proximal interphalangeal joints 47, 48, 49 and 50 and below the center axis of rotation of the distal interphalangeal joints as indicated by the numerals 56, 57, 58 and 59,

respectively. The protective shock absorbing padding being placed in the aforementioned anatomically designed fashion protects the pulleys and tendons of the fingers and thumb while leaving the center axis of rotation of the appropriate joints free. This enables the movement of the fingers and thumb without adverse effects when in use.

As shown in Figs. 13 and 14, an additional pad identified as 444 may be located to overlies the thumb metacarpal 31 between the center axis of rotation of the metacarpalphalangeal joint 36 and the carpometacarpal joint 26.

The detailed description is given primarily for clearness of understanding and no unnecessary limitations are to be understood therefrom for modifications will become obvious to those skilled in the art upon reading this disclosure and may be made without departing from the spirit of the invention and scope of the appended claims.

What Is Claimed Is

1. A glove comprising:

a palmar side panel and a dorsal side
panel secured along each panel's outer
5 periphery with an opening therein to receive a
human hand, said dorsal side panel being sized
to cover the back of said hand and in
conjunction with said palmar side panel
providing a thumb stall and a plurality of
10 finger stalls for receiving a thumb and fingers
of a human hand;

a hook of the hamate relief padding
disposed along the palmar side of at least the
proximal ends of a ring finger and a small
15 finger metacarpal distal to the hook of the
hamate, said hook of the hamate being absent of
padding; and,

padding overlying at least the proximal
phalanx and the middle phalanx of an index
20 finger and a long finger excluding the
interphalangeal joints of said index finger and
said long finger.

2. The glove of claim 1 further including padding
overlying the proximal phalanx and the middle phalanx of
25 said ring finger and said small finger excluding the

interphalangeal joints of said ring finger and said small finger.

3. The glove of claim 1, said hook of the hamate relief padding covering about one-half of the length of the metacarpals of the ring finger and the small finger.

4. The glove of claim 1, said hook of the hamate padding being about 2.25 to 2.75 cm lengthwise covering at least the middle portion of the metacarpals of said ring finger and said small finger and about 4.0 to 4.5 cm across the metacarpals of said ring finger and said small finger.

5. The glove of claim 1 wherein the carpometacarpal joints of said ring finger and said small finger being absent of padding.

6. A glove comprising:

a palmar side panel and a dorsal side panel secured along each panel's outer periphery with an opening therein to receive a human hand, said dorsal side panel being sized to cover a back of said hand and in conjunction with said palmar side panel providing a thumb stall and a plurality of finger stalls for receiving a thumb and fingers of a human hand; and,

a hook of the hamate relief disposed along the palmar side of at least the distal portion of a ring finger and a small finger metacarpal distal to hook of the hamate, said hook of the hamate being absent of padding.

7. The glove of claim 6 further including padding overlying the proximal phalanx and the middle phalanx of said ring finger and said small finger excluding the interphalangeal joints of said ring finger and said small finger.

8. The glove of claim 6 said hook of the hamate relief padding covering about one-half of the length of the metacarpals of the ring finger and the small finger.

9. The glove of claim 6 said hook of the hamate padding being about 2.25 to 2.75 cm lengthwise covering at least the middle portion of the metacarpals of said ring finger and said small finger and about 4.0 to 4.5 cm across the metacarpals of said ring finger and said small finger, further including middle phalanx padding covering at least the middle phalanx of said index finger above the proximal interphalangeal joint and below the center axis of rotation of the distal interphalangeal joint.

10. The glove of claim 6 wherein the carpometacarpal joints of said ring finger and said small finger are absent of padding.

11. In combination with a glove having a palmar side panel and a dorsal side panel secured along each panel's outer periphery with an opening therein to receive a human hand, a thumb stall and a plurality of finger stalls for receiving a thumb and fingers of a human hand an improvement comprising:

a hook of the hamate relief padding disposed along the palmar side of at least the proximal ends of a ring finger and a small finger metacarpal distal to the hook of the hamate, said hook of the hamate being absent of padding.

12. The combination of Claim 11 including padding overlying at least the proximal phalanx and the middle phalanx of an index finger and a long finger excluding the interphalangeal joints of said index finger and said long finger.

13. The combination of Claim 11 including padding overlying the proximal phalanx and the middle phalanx of said ring finger and said small finger excluding the interphalangeal joints of said ring finger and said small finger.

14. The combination of Claim 11, said hook of the hamate padding being about 2.25 cm to 2.75 cm lengthwise covering at least the middle portion of the metacarpals

of said ring finger and said small finger and about 4.0 cm to 4.5 cm across the metacarpals of said ring finger and said small finger.

15. The combination of claim 11 wherein the
5 carpometacarpal joints of said ring finger and said small finger are absent of padding.

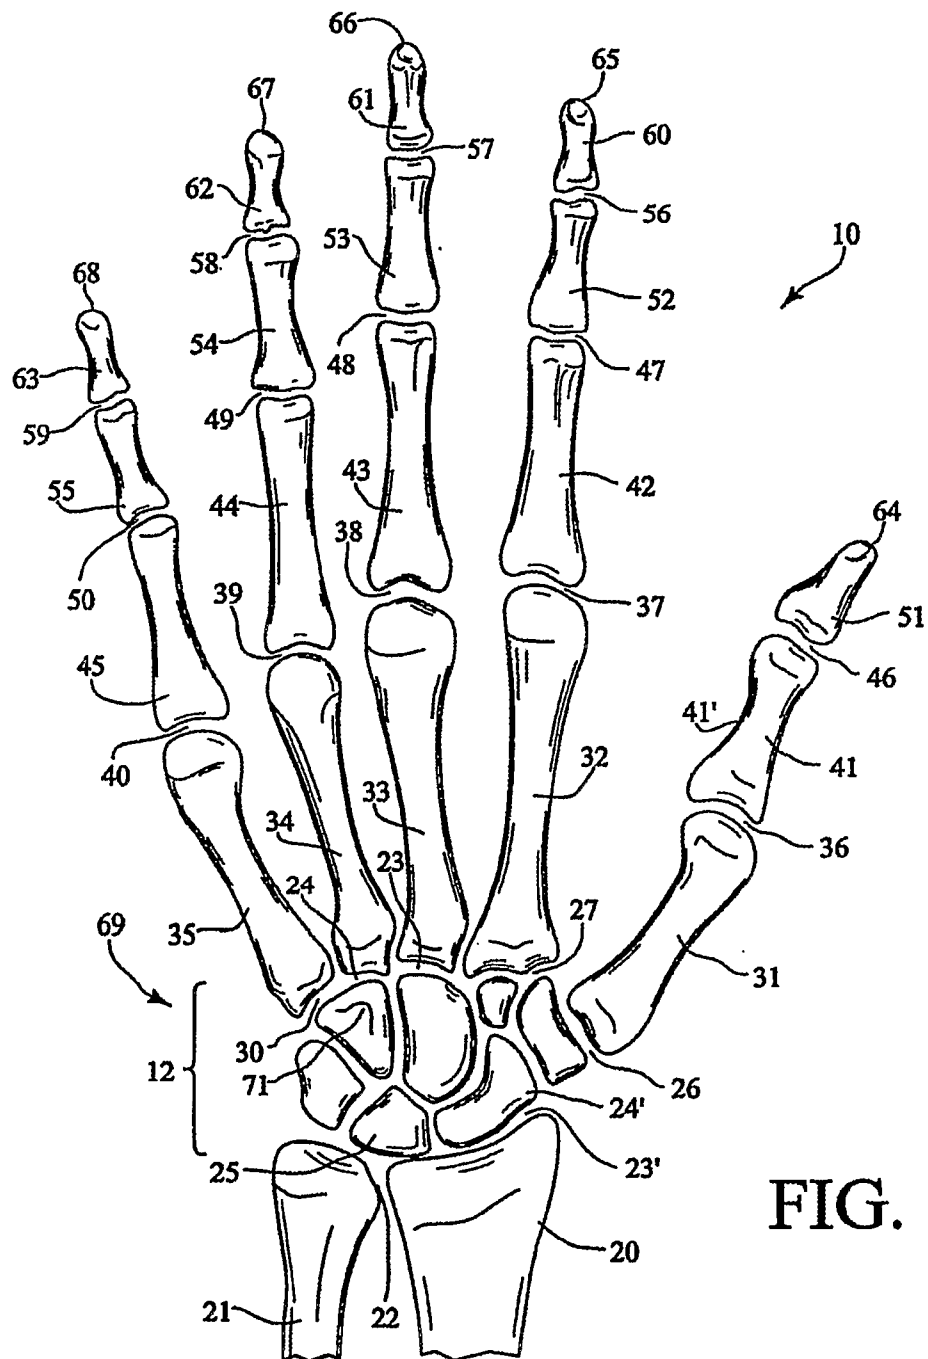


FIG. 1

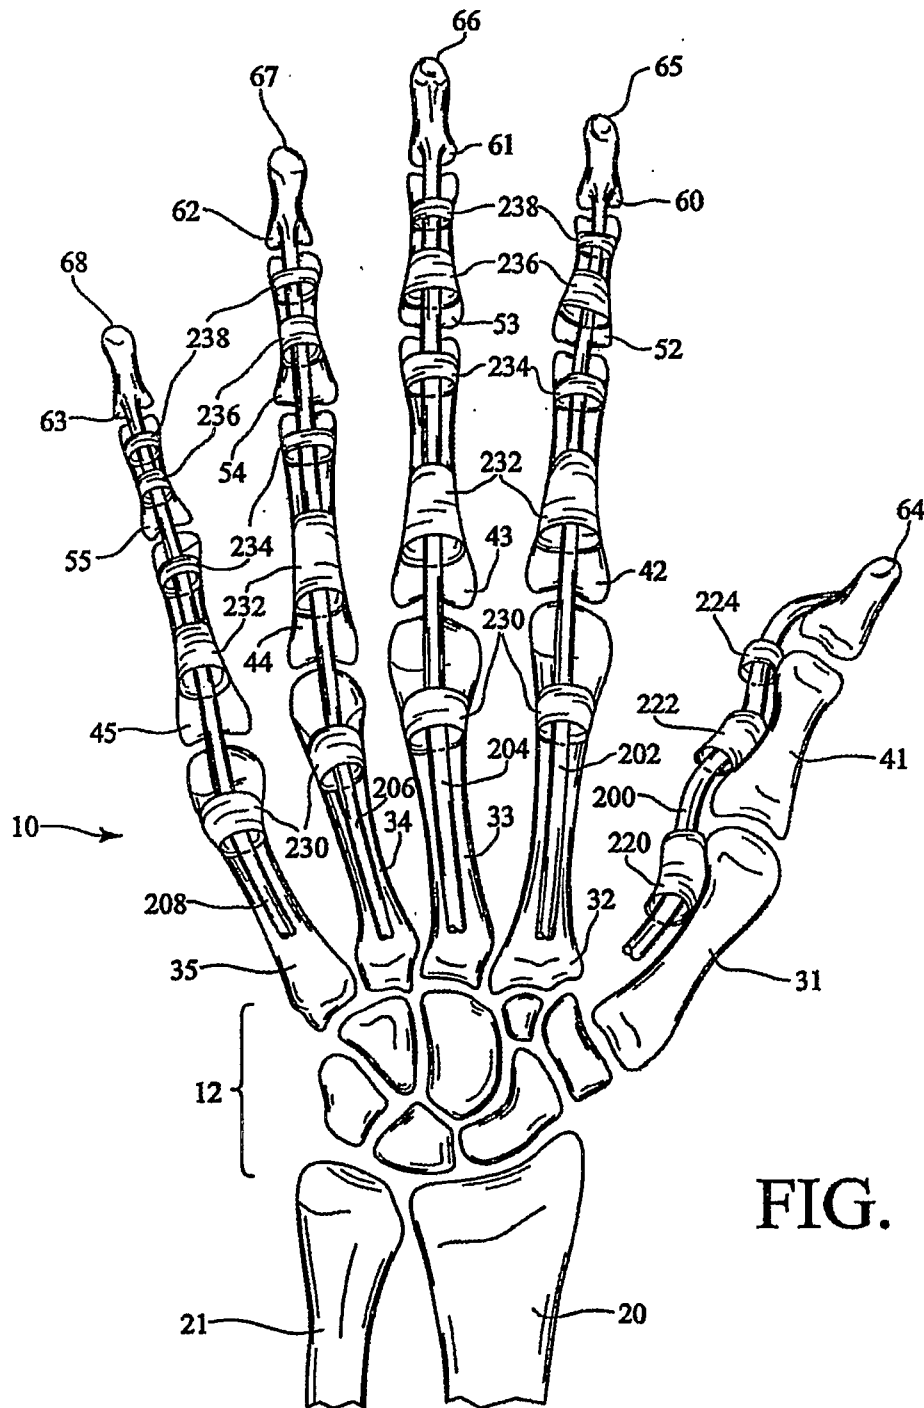
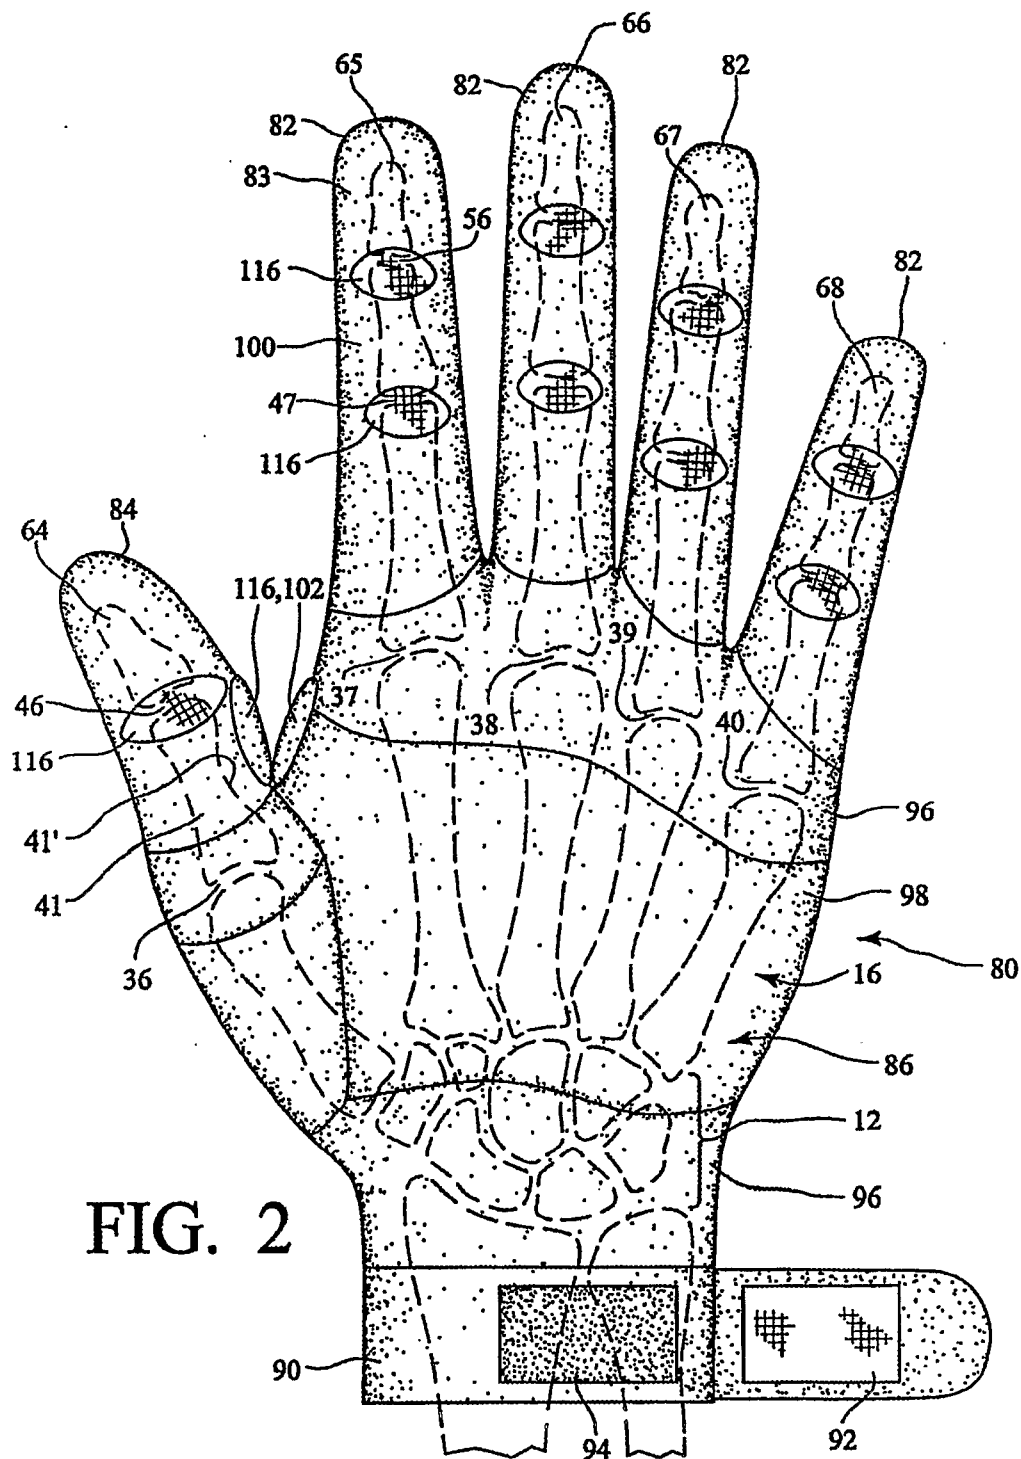
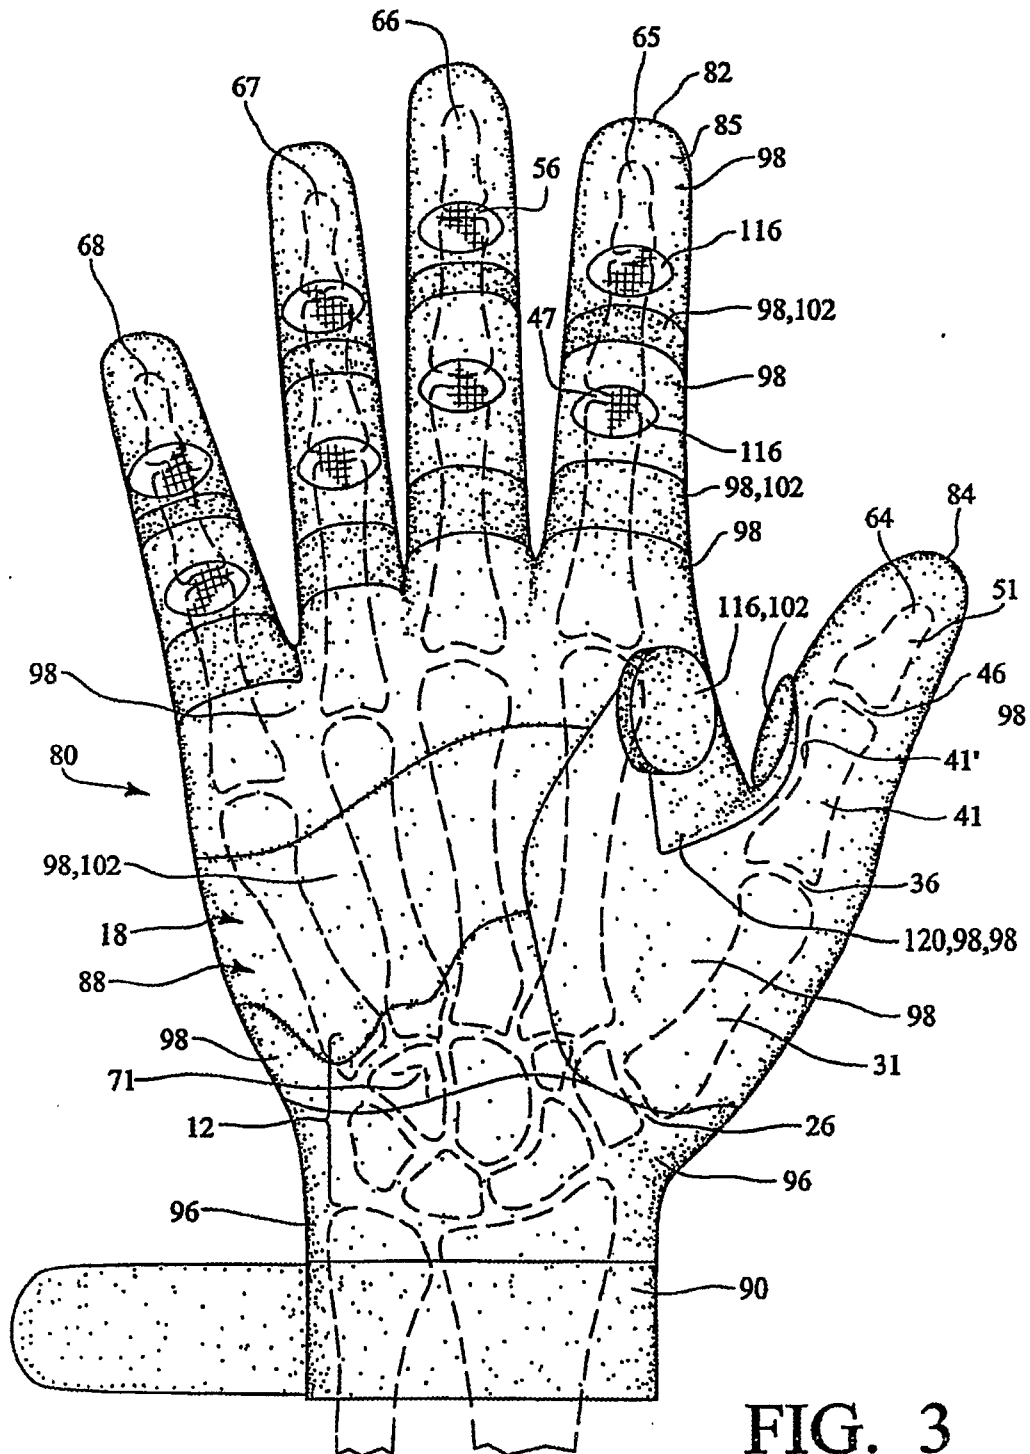


FIG. 1A





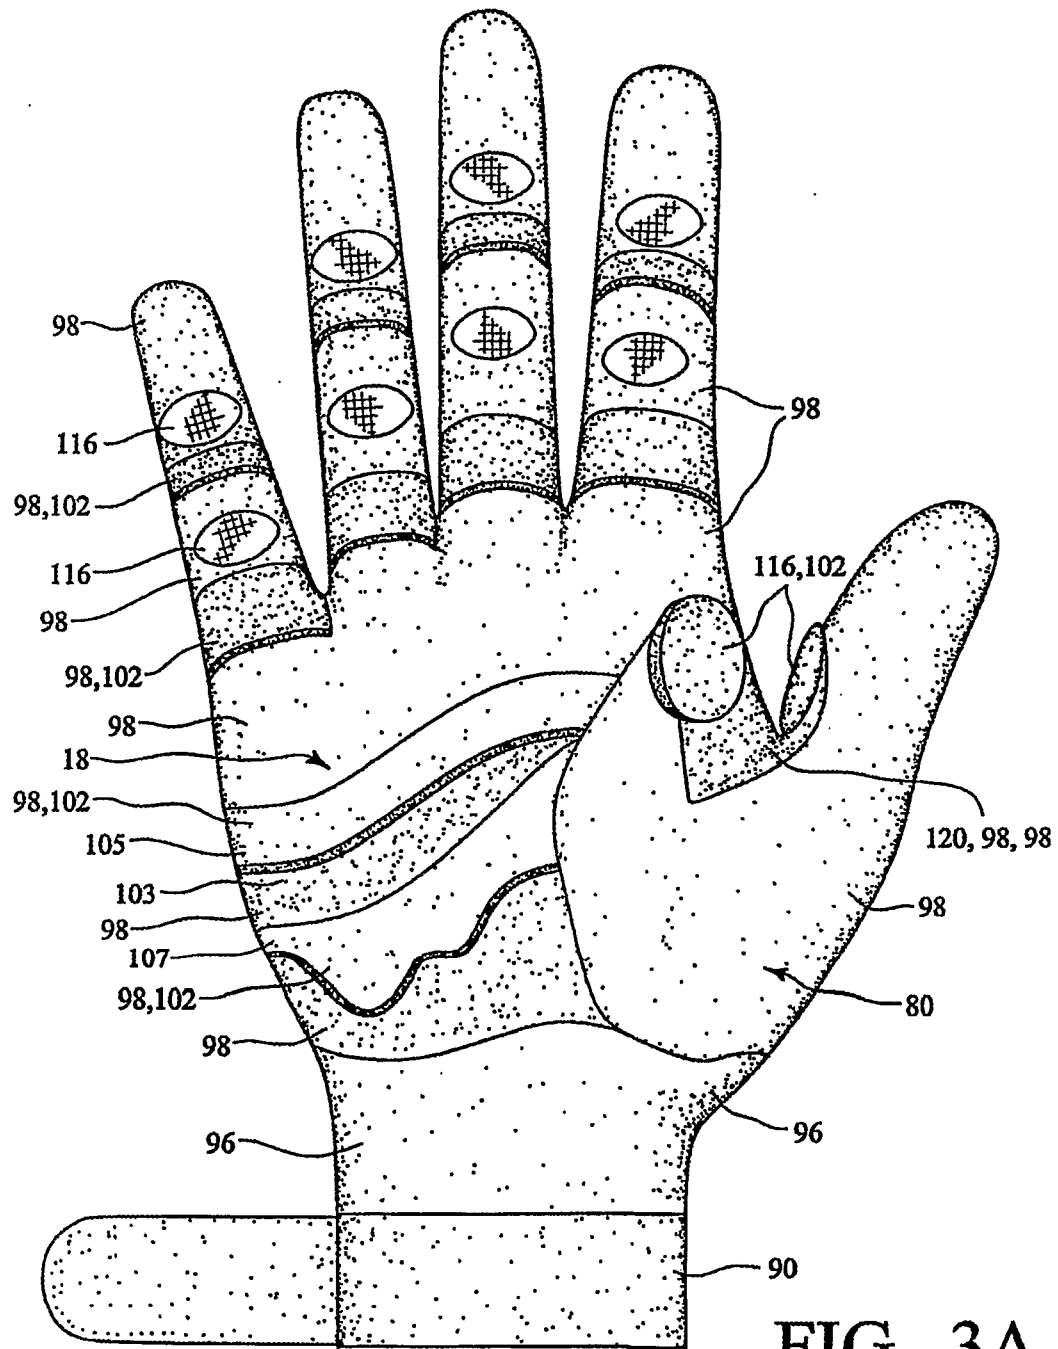


FIG. 3A

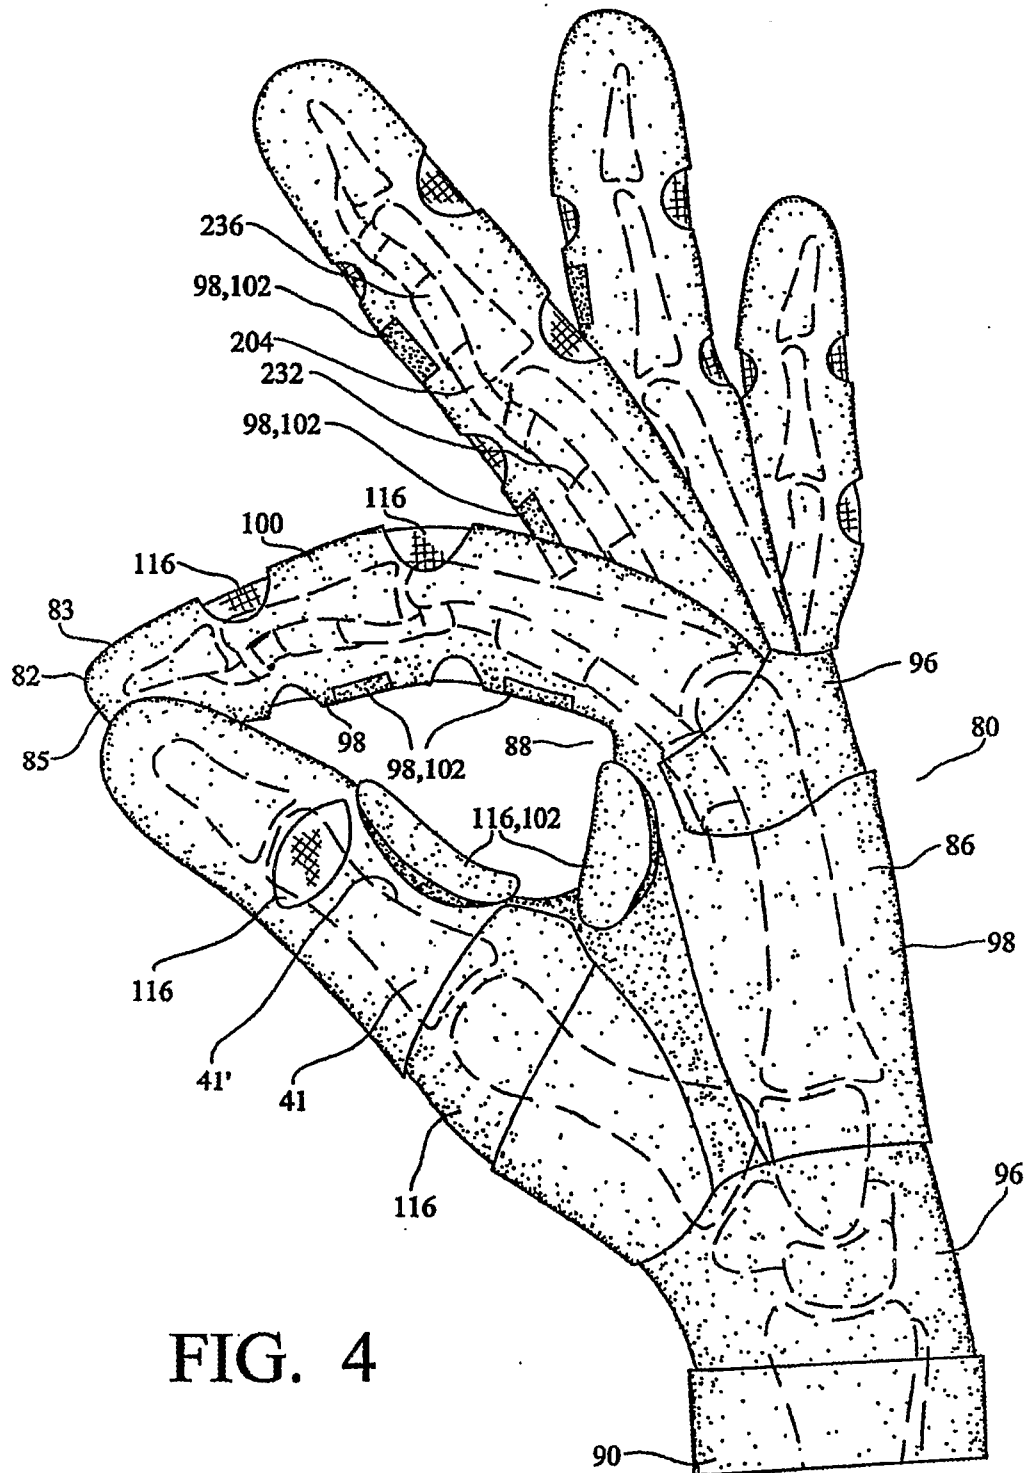


FIG. 4

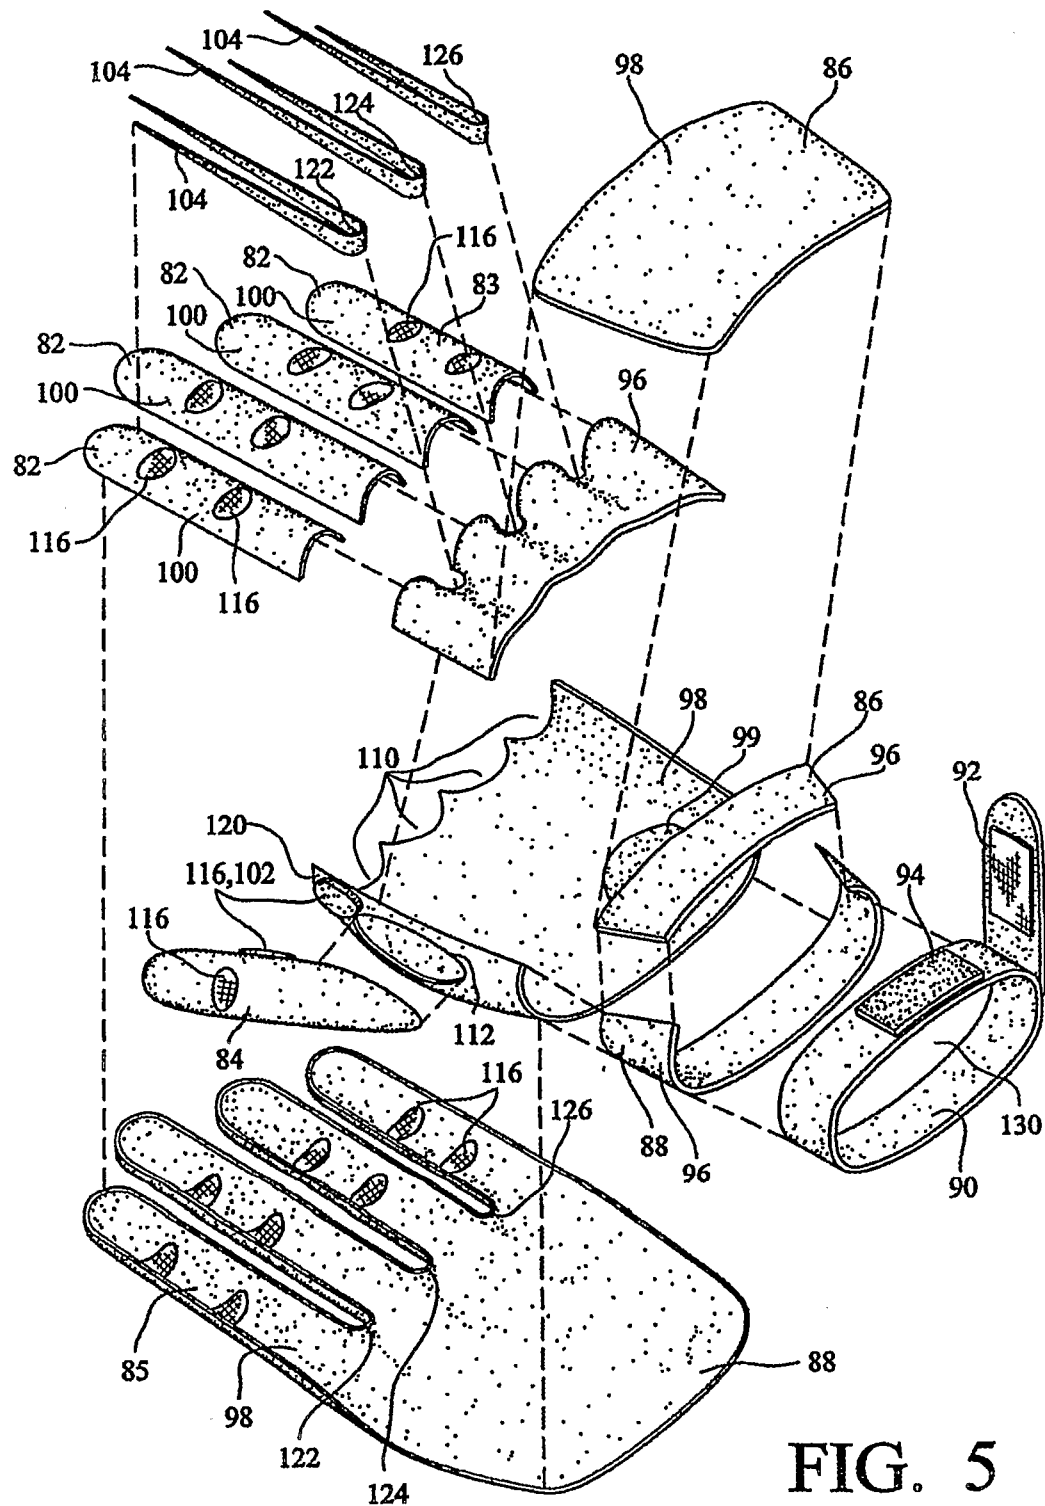


FIG. 5

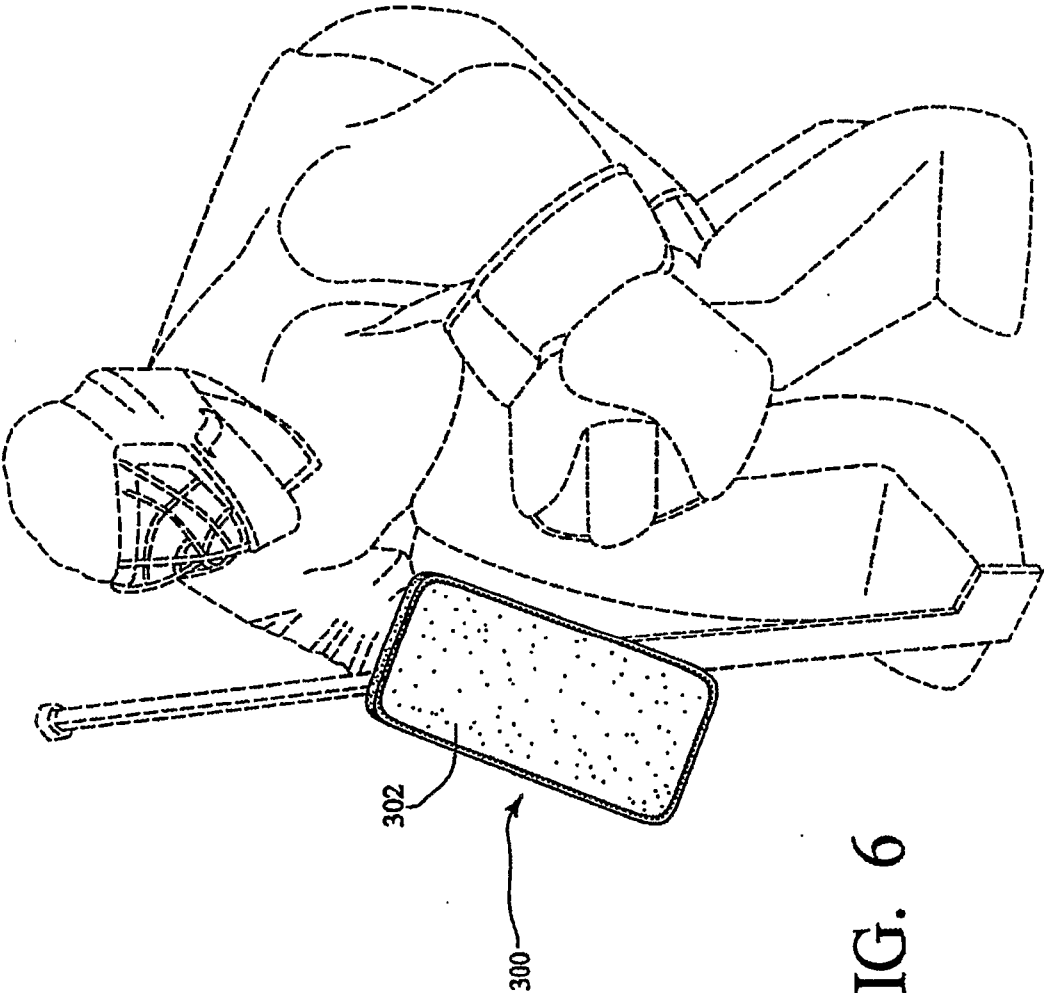


FIG. 6

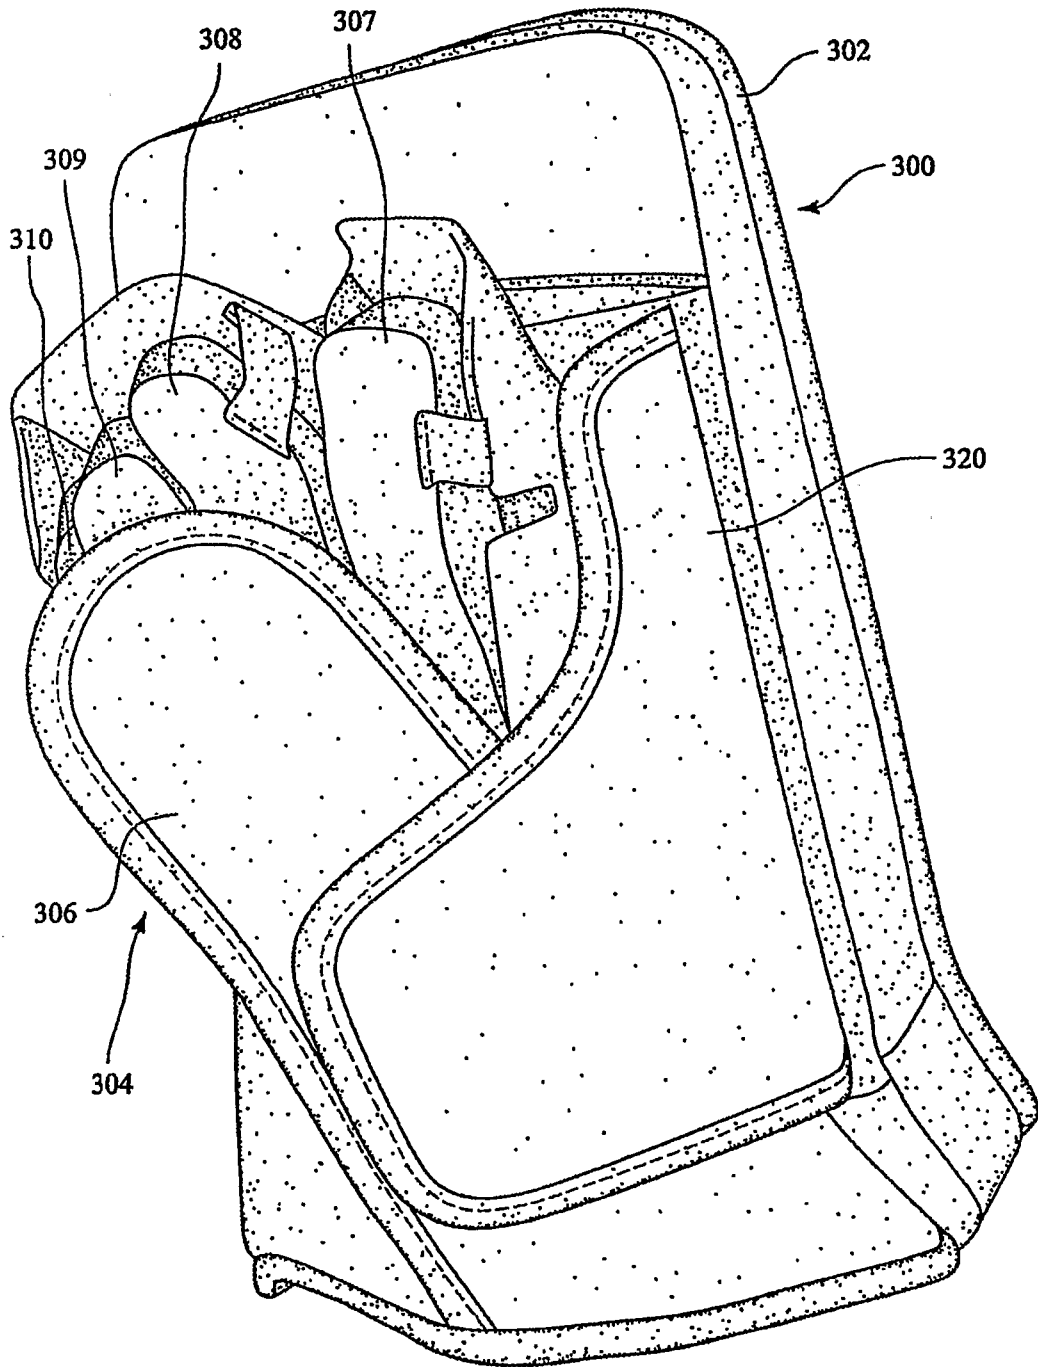


FIG. 7

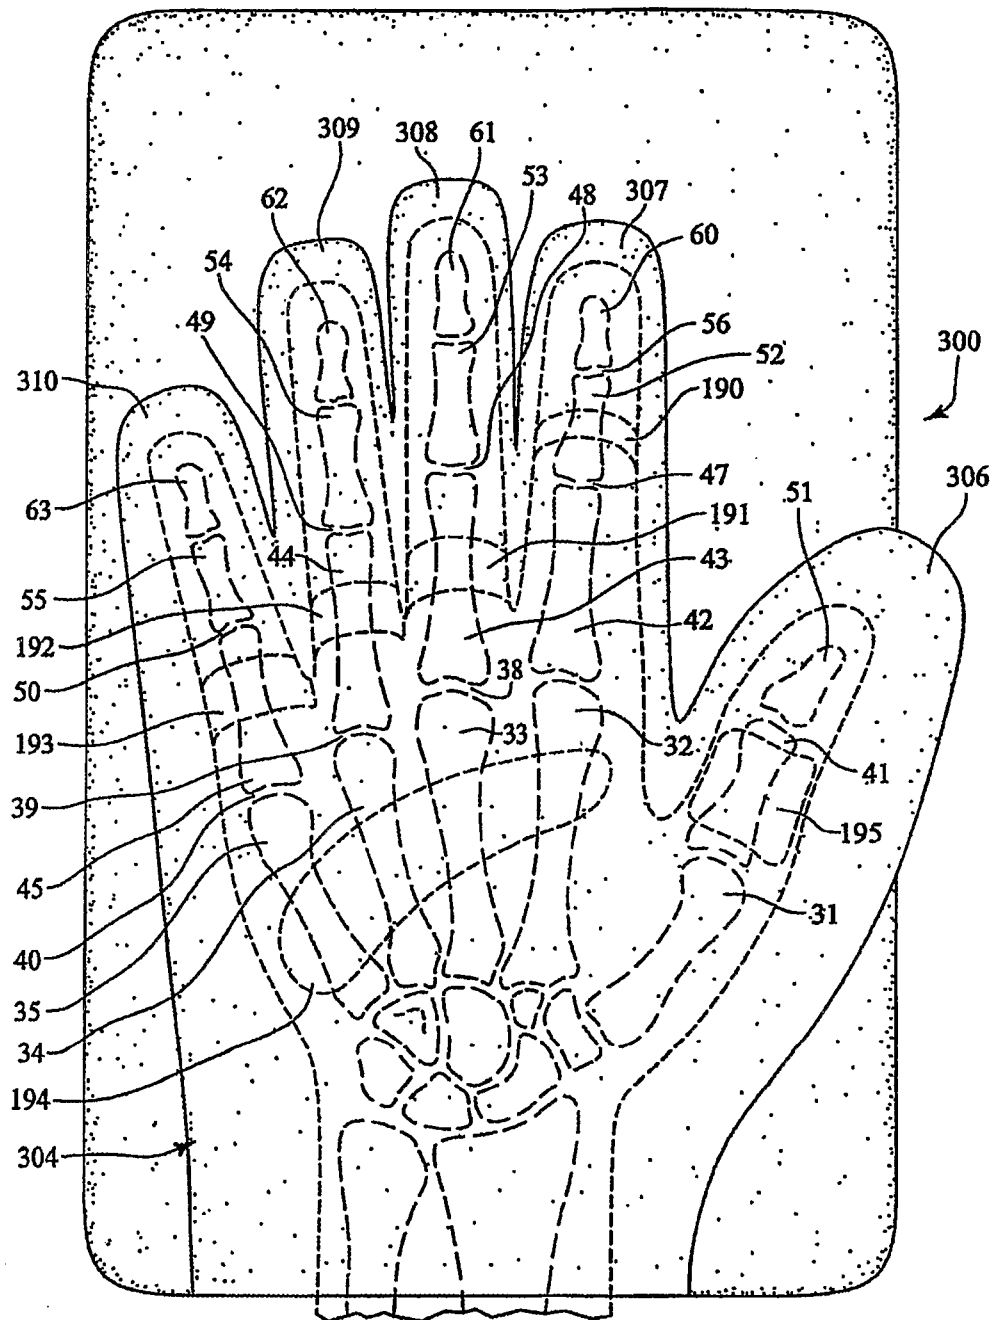


FIG. 8

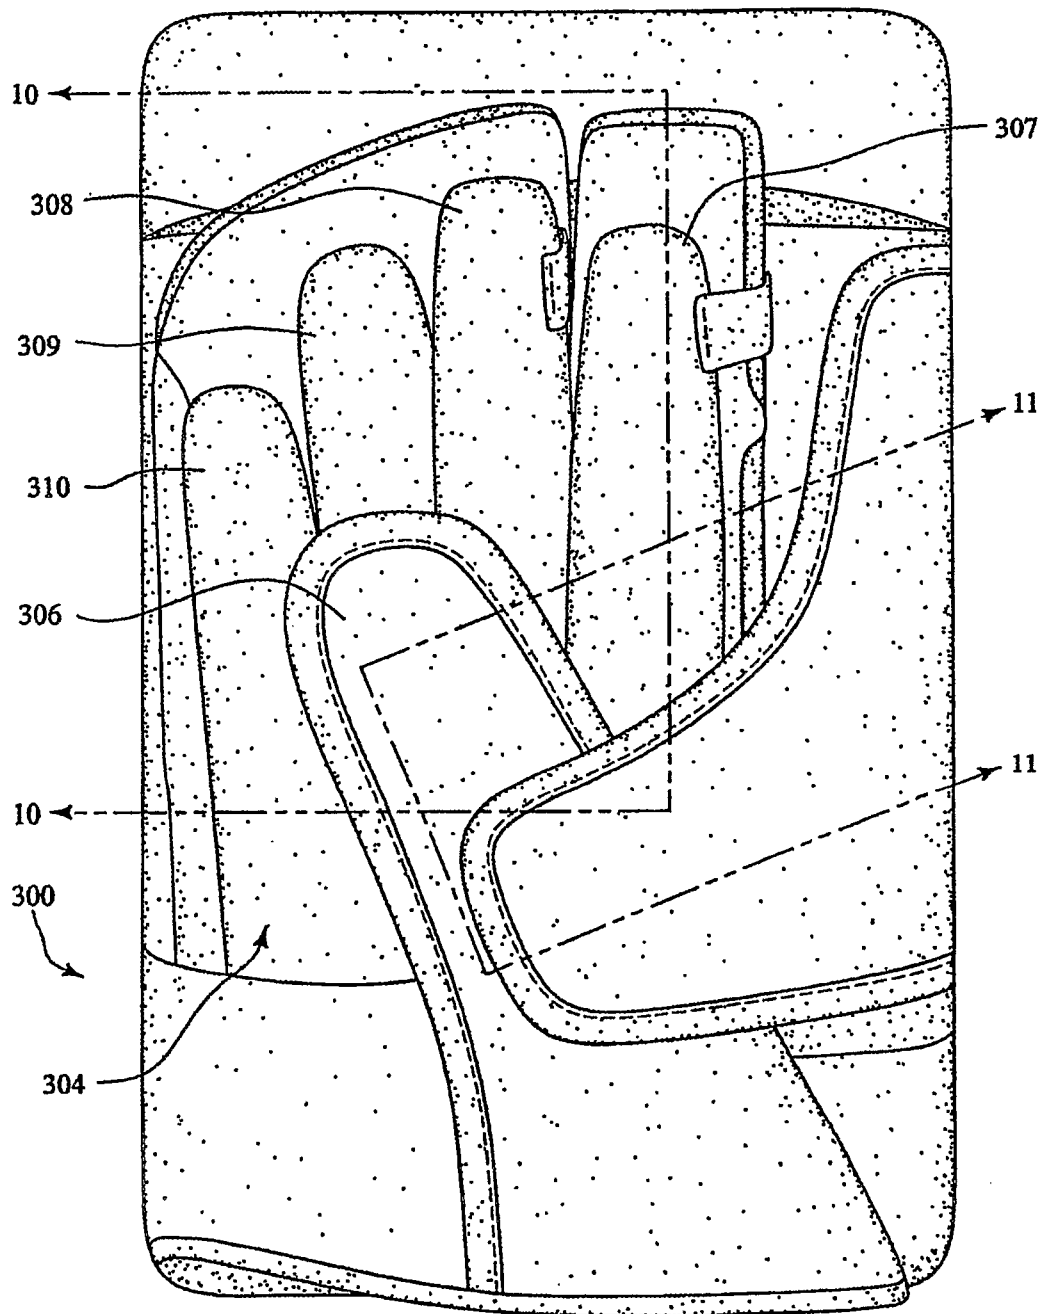
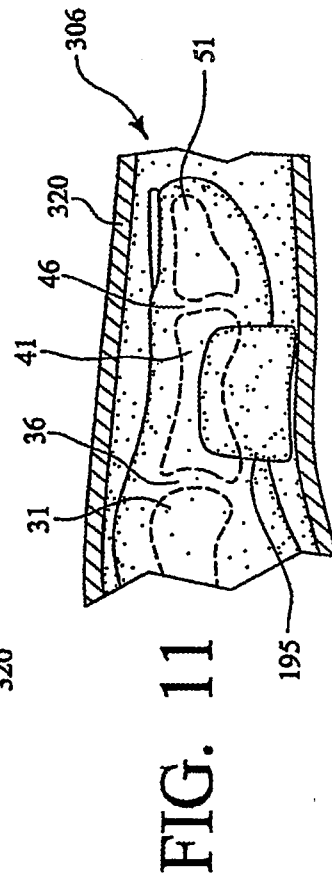
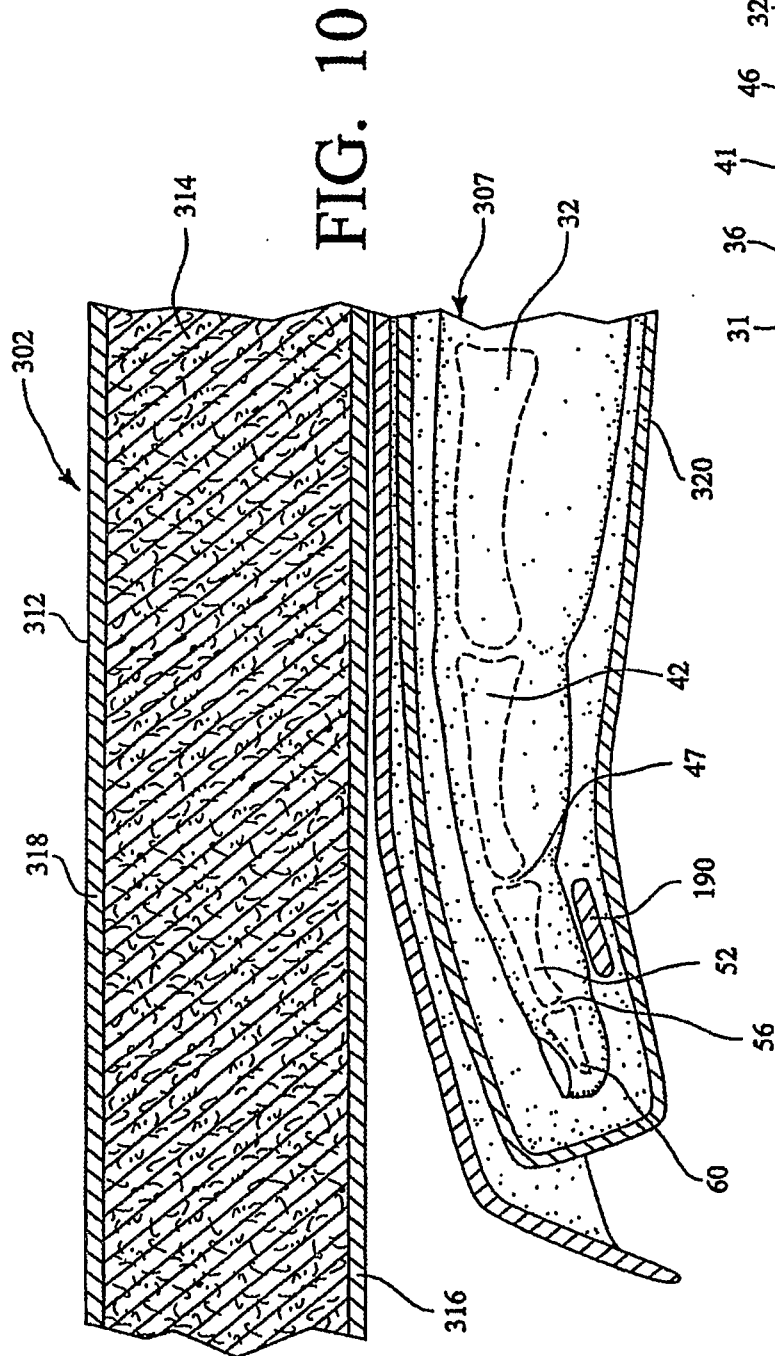


FIG. 9



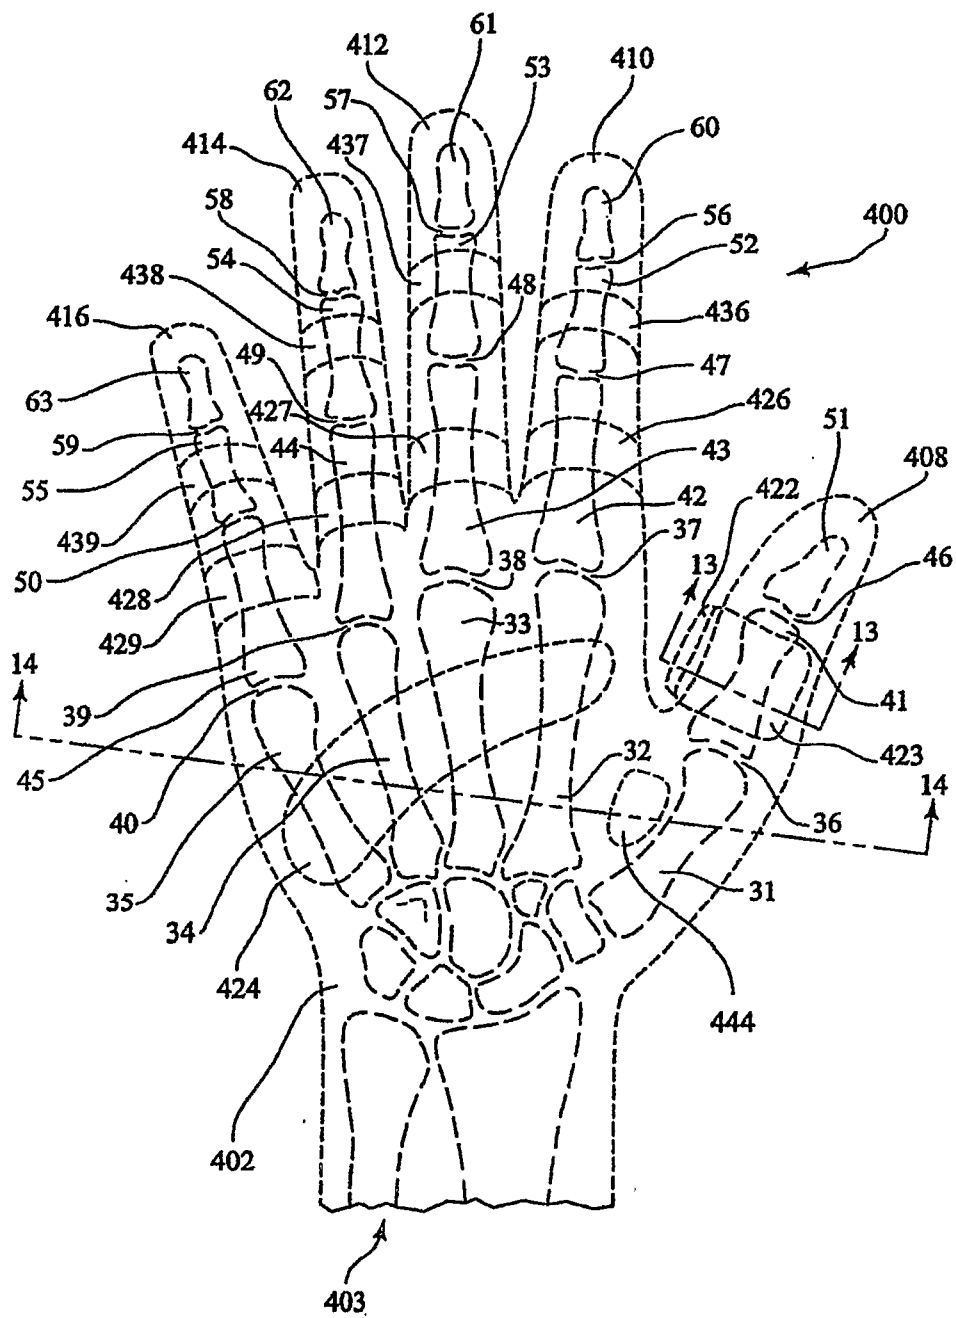


FIG. 12

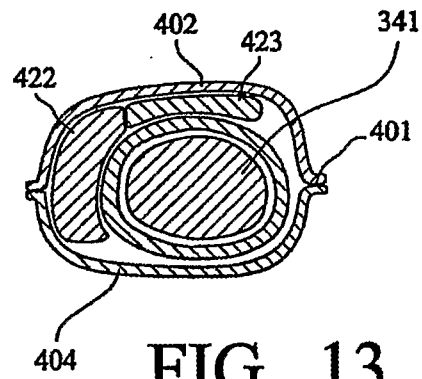


FIG. 13

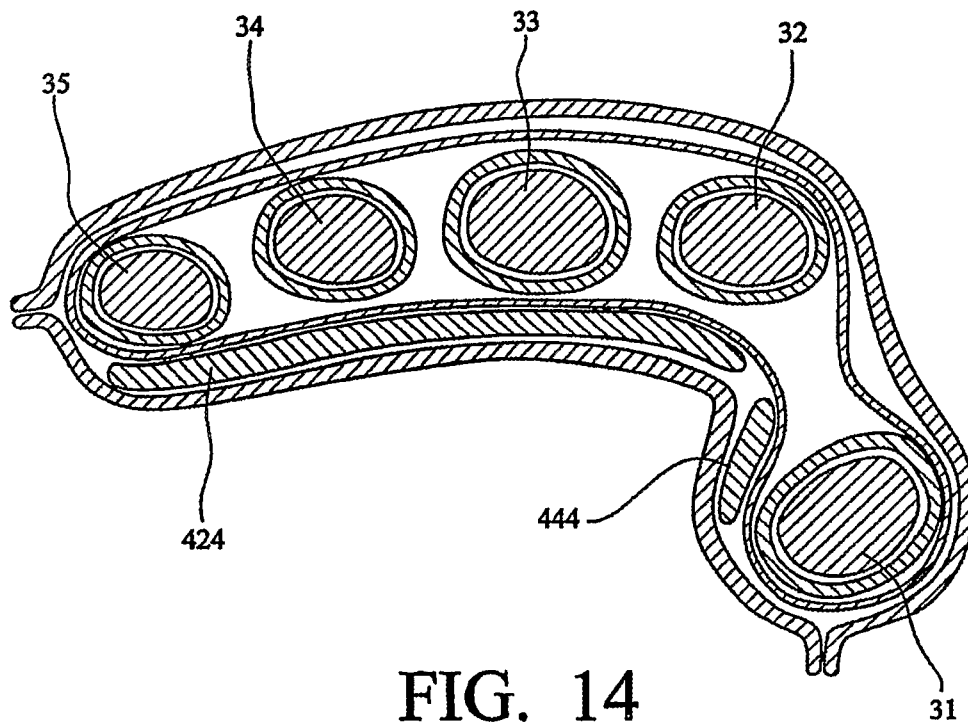


FIG. 14

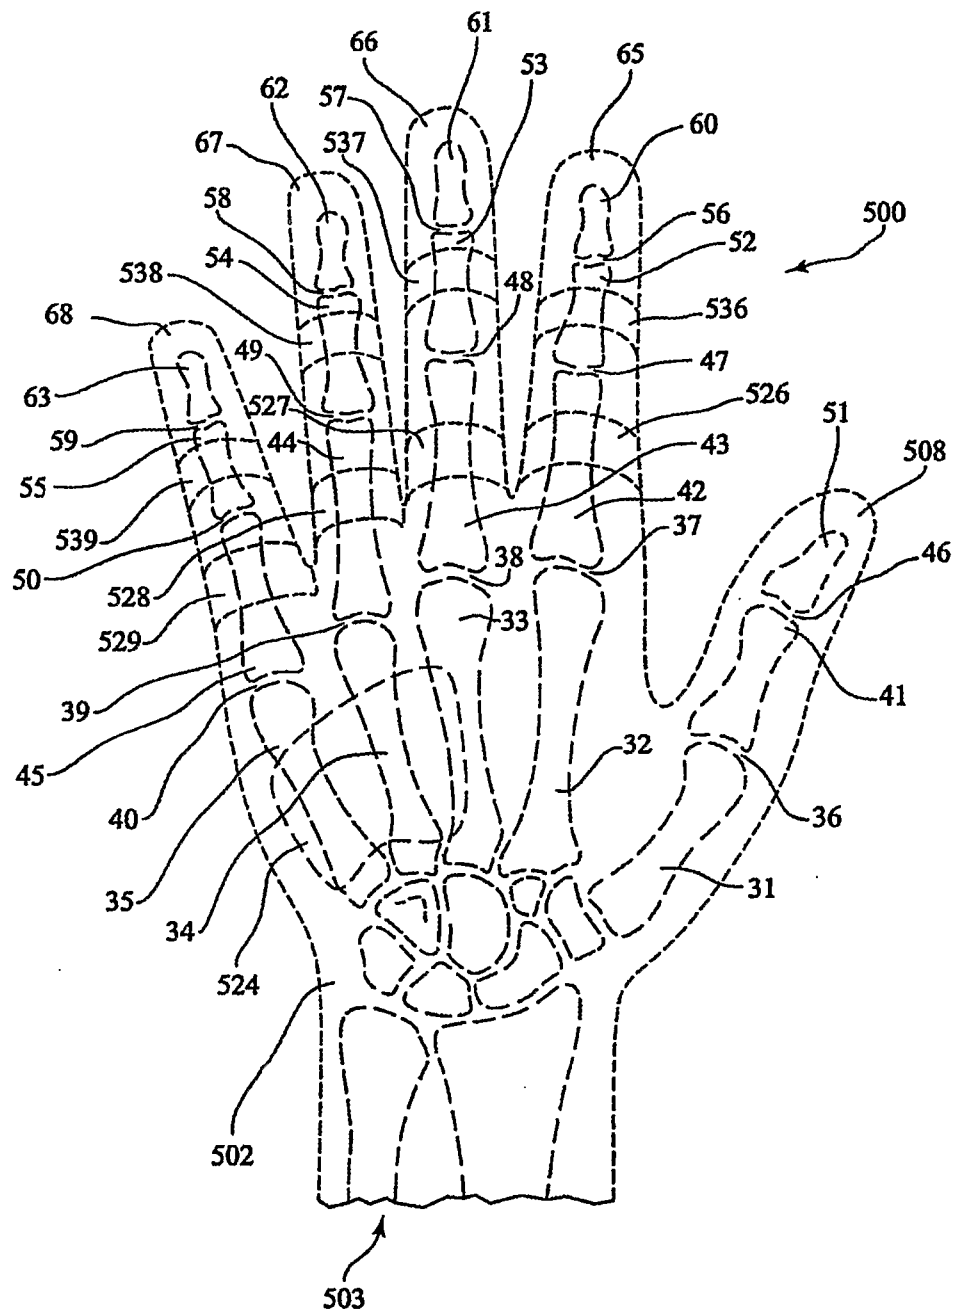


FIG. 15

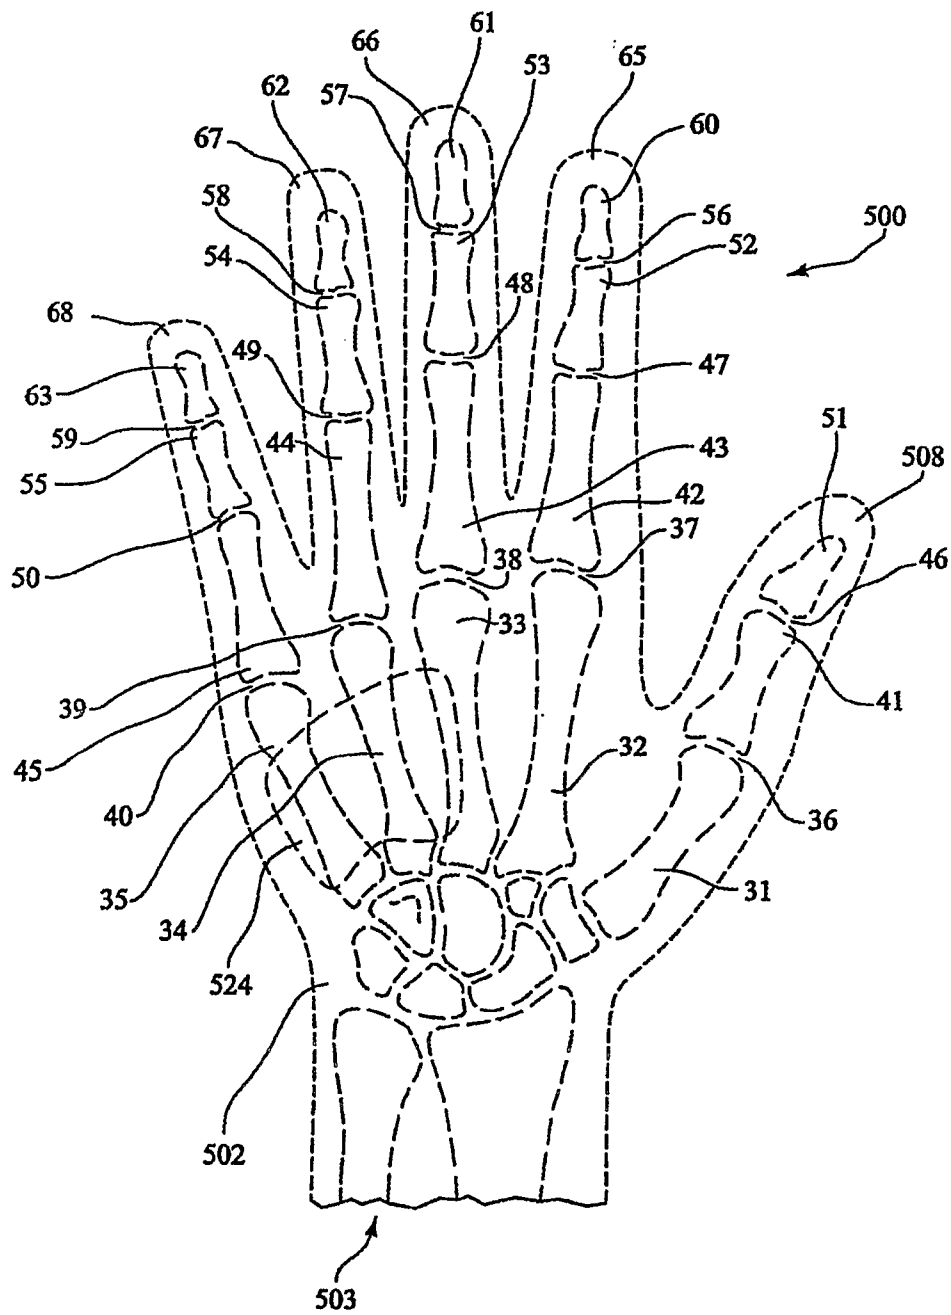


FIG. 15A