

(21) Application No: **1111866.8**
 (22) Date of Filing: **11.07.2011**
 (30) Priority Data:
 (31) **1100462** (32) **12.01.2011** (33) **GB**
 (31) **1104032** (32) **09.03.2011** (33) **GB**

(51) INT CL:
H04N 7/26 (2006.01) **H04N 7/36** (2006.01)
 (56) Documents Cited:
WO 2010/043806 A2
 (58) Field of Search:
 INT CL **H04N**
 Other: **WPI, EPODOC, INSPEC**

(71) Applicant(s):
Canon Kabushiki Kaisha
(Incorporated in Japan)
30-2, Shimomaruko 3-chome, Ohta-ku,
Tokyo 146-8501, Japan

(72) Inventor(s):
Guillaume Laroche
Christophe Gisquet

(74) Agent and/or Address for Service:
Canon Europe Ltd
3 The Square, Stockley Park, UXBRIDGE, Middlesex,
UB11 1ET, United Kingdom

(54) Title of the Invention: **Video encoding and decoding with improved error resilience**
 Abstract Title: **Motion compensated image coding using diverse set of motion predictors**

(57) A method for encoding a sequence of digital images into a bitstream (and, conversely, decoding) – at least one portion of an image being encoded by motion compensation (MC) using a reference image portion - comprises the following steps. First, a target number of motion information predictors are obtained, S500. Next, a set of motion information predictors consisting of the target number of motion information predictors is generated; each predictor of the set is different from any other predictor of the set, i.e. the motion (vector) predictors are diverse and different. A variety of a given target number of different motion predictors (e.g. with duplicates eliminated) is used in encoding, providing enhanced compression efficiency. Virtual predictors S516 may be generated by adding an offset value to motion vector components; virtual predictor numbers may be capped. Also claimed is a method for generating a set of motion predictors having controlled diversity, selecting a predictor from the set; and encoding and decoding methods and devices in which, if a number of predictors is greater than a target number, they are selected using a removal criterion, and a second (target number) set of predictors is formed.

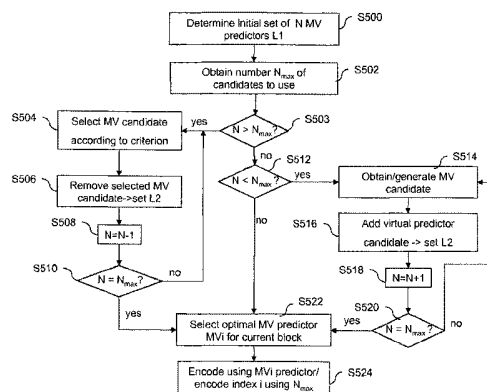


Figure 5

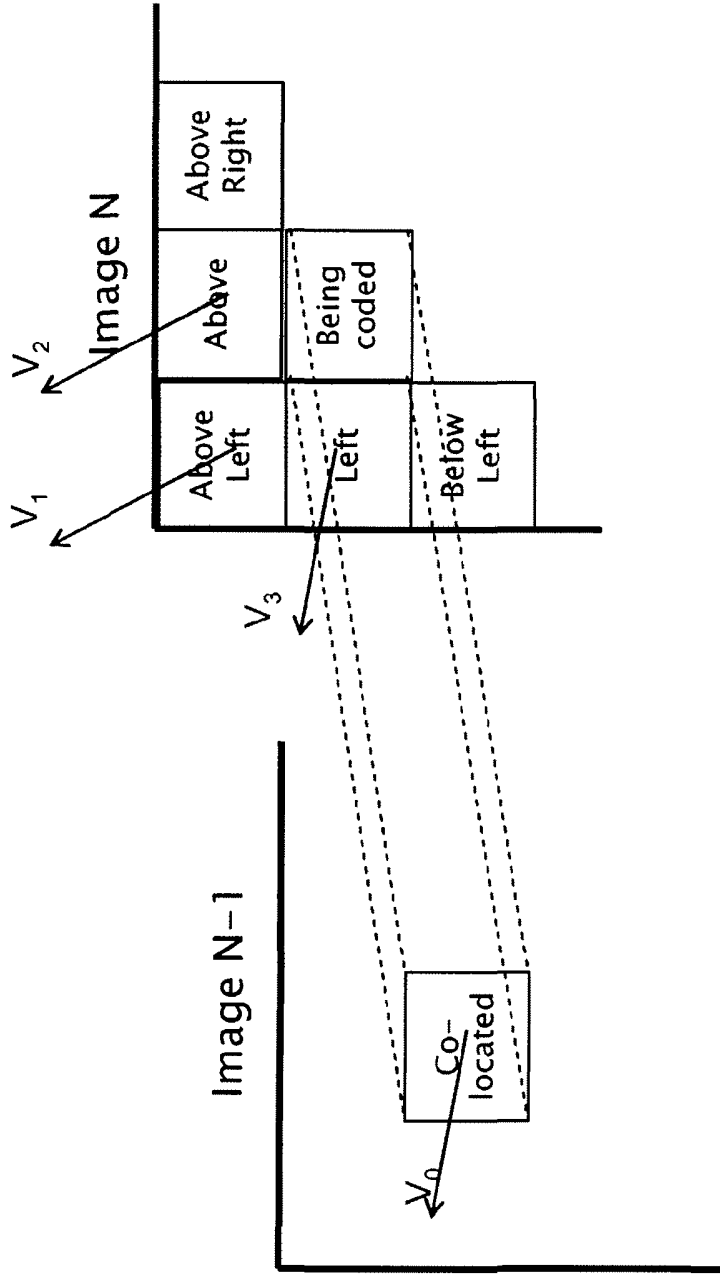


Figure 1

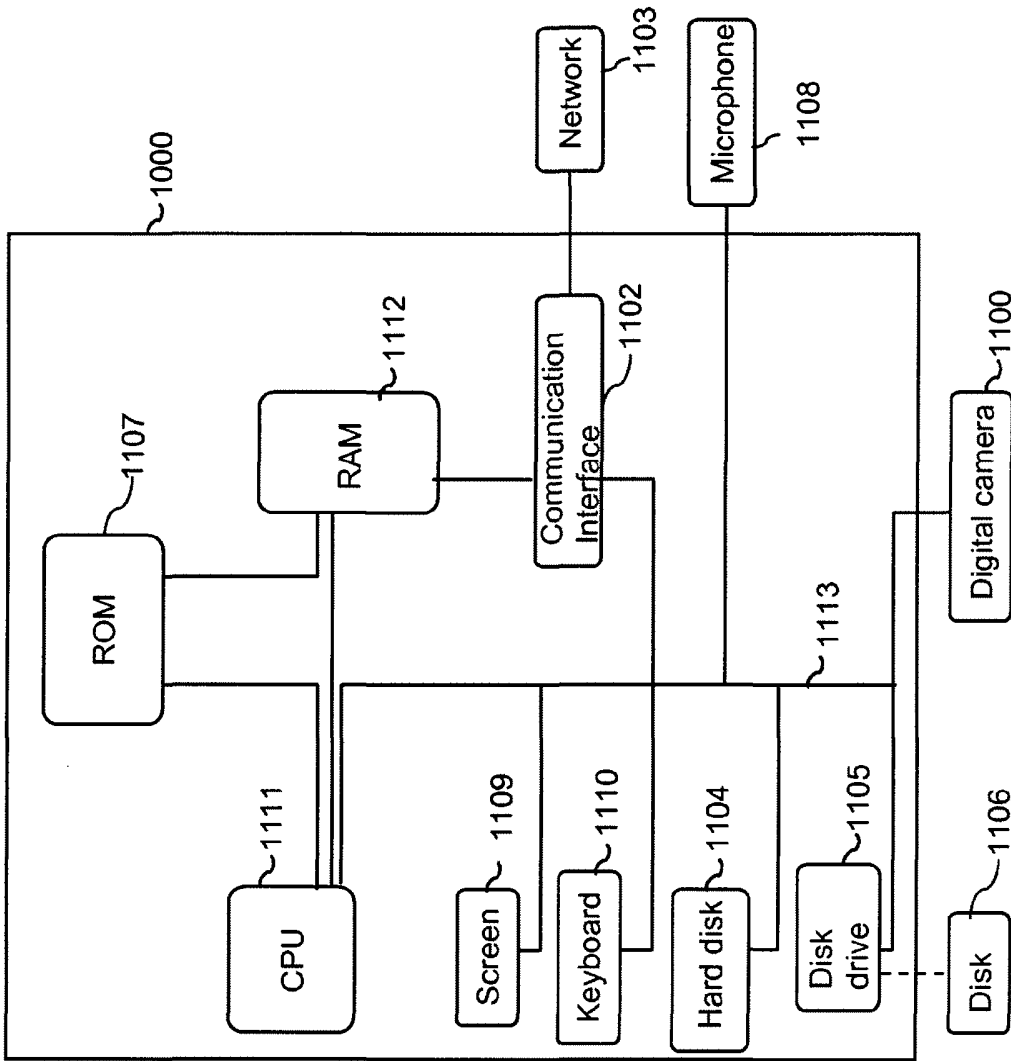


Figure 2

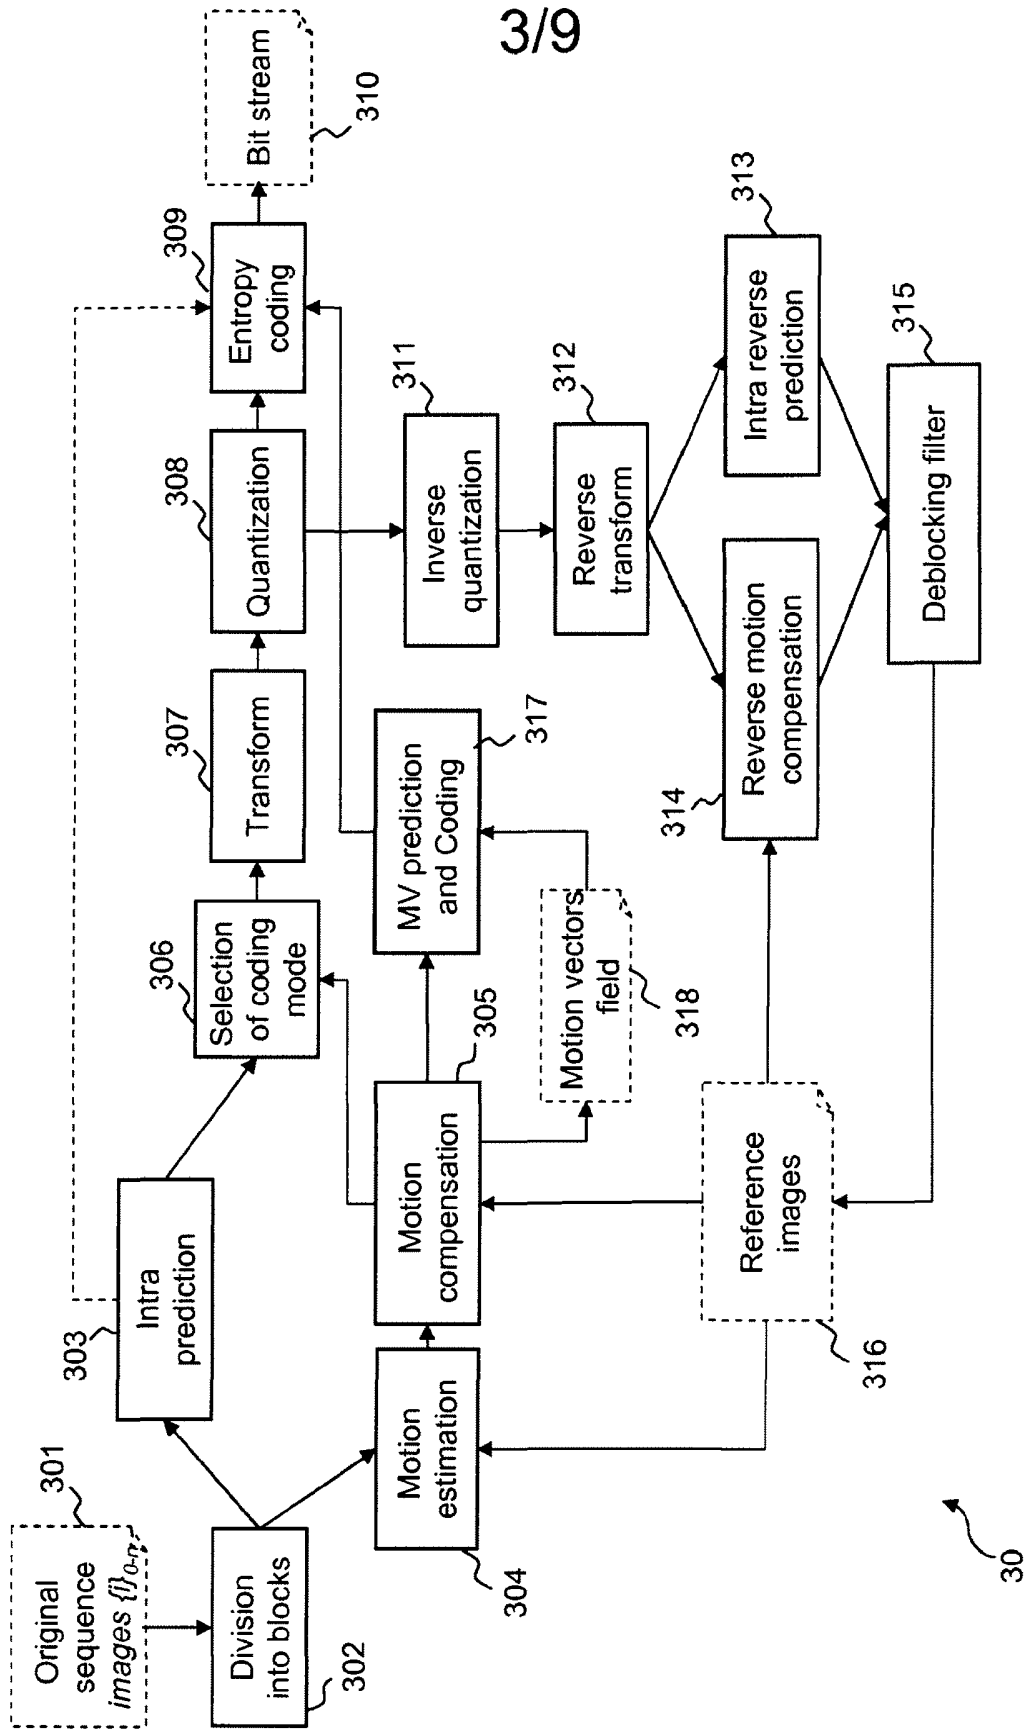


Figure 3

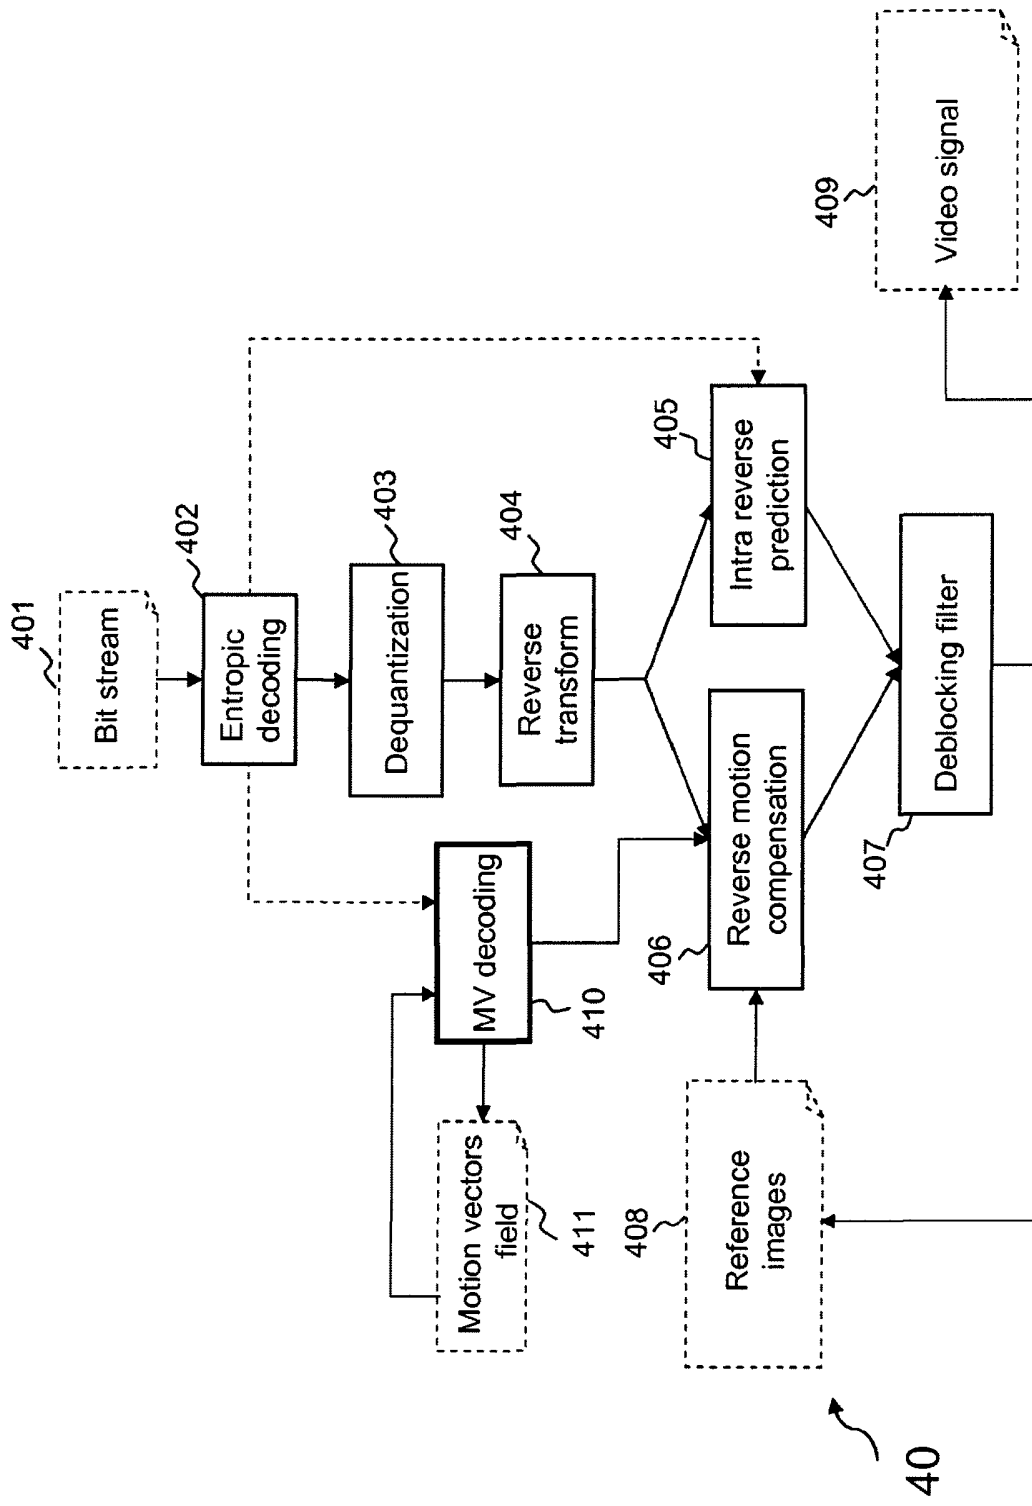


Figure 4

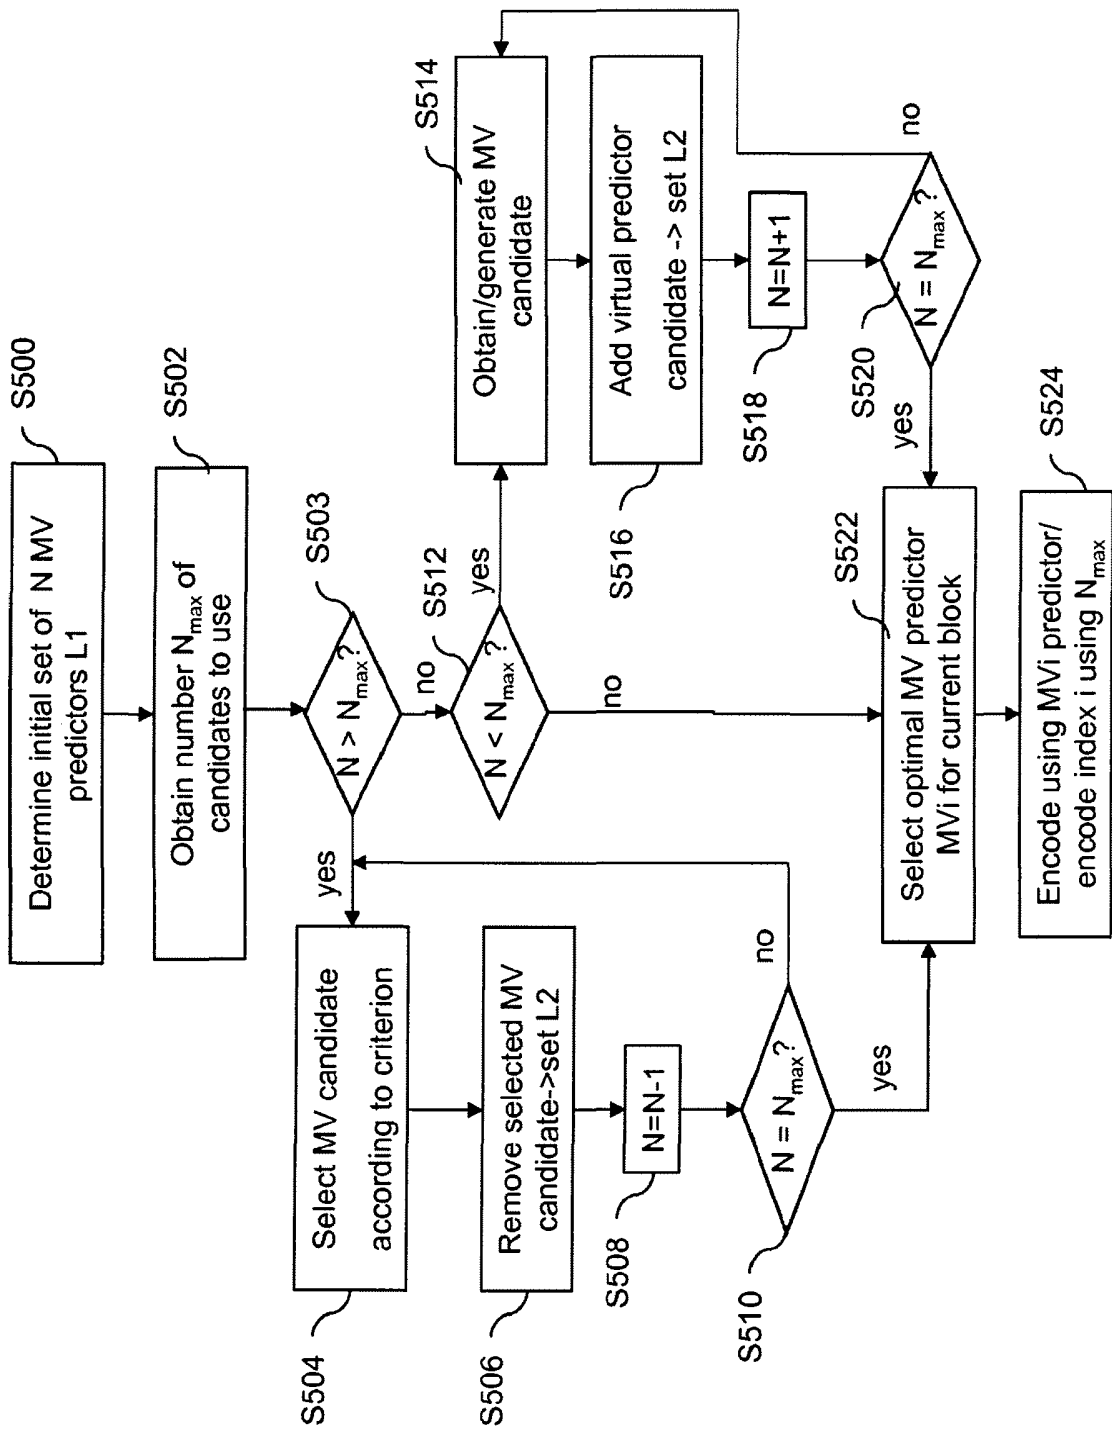


Figure 5

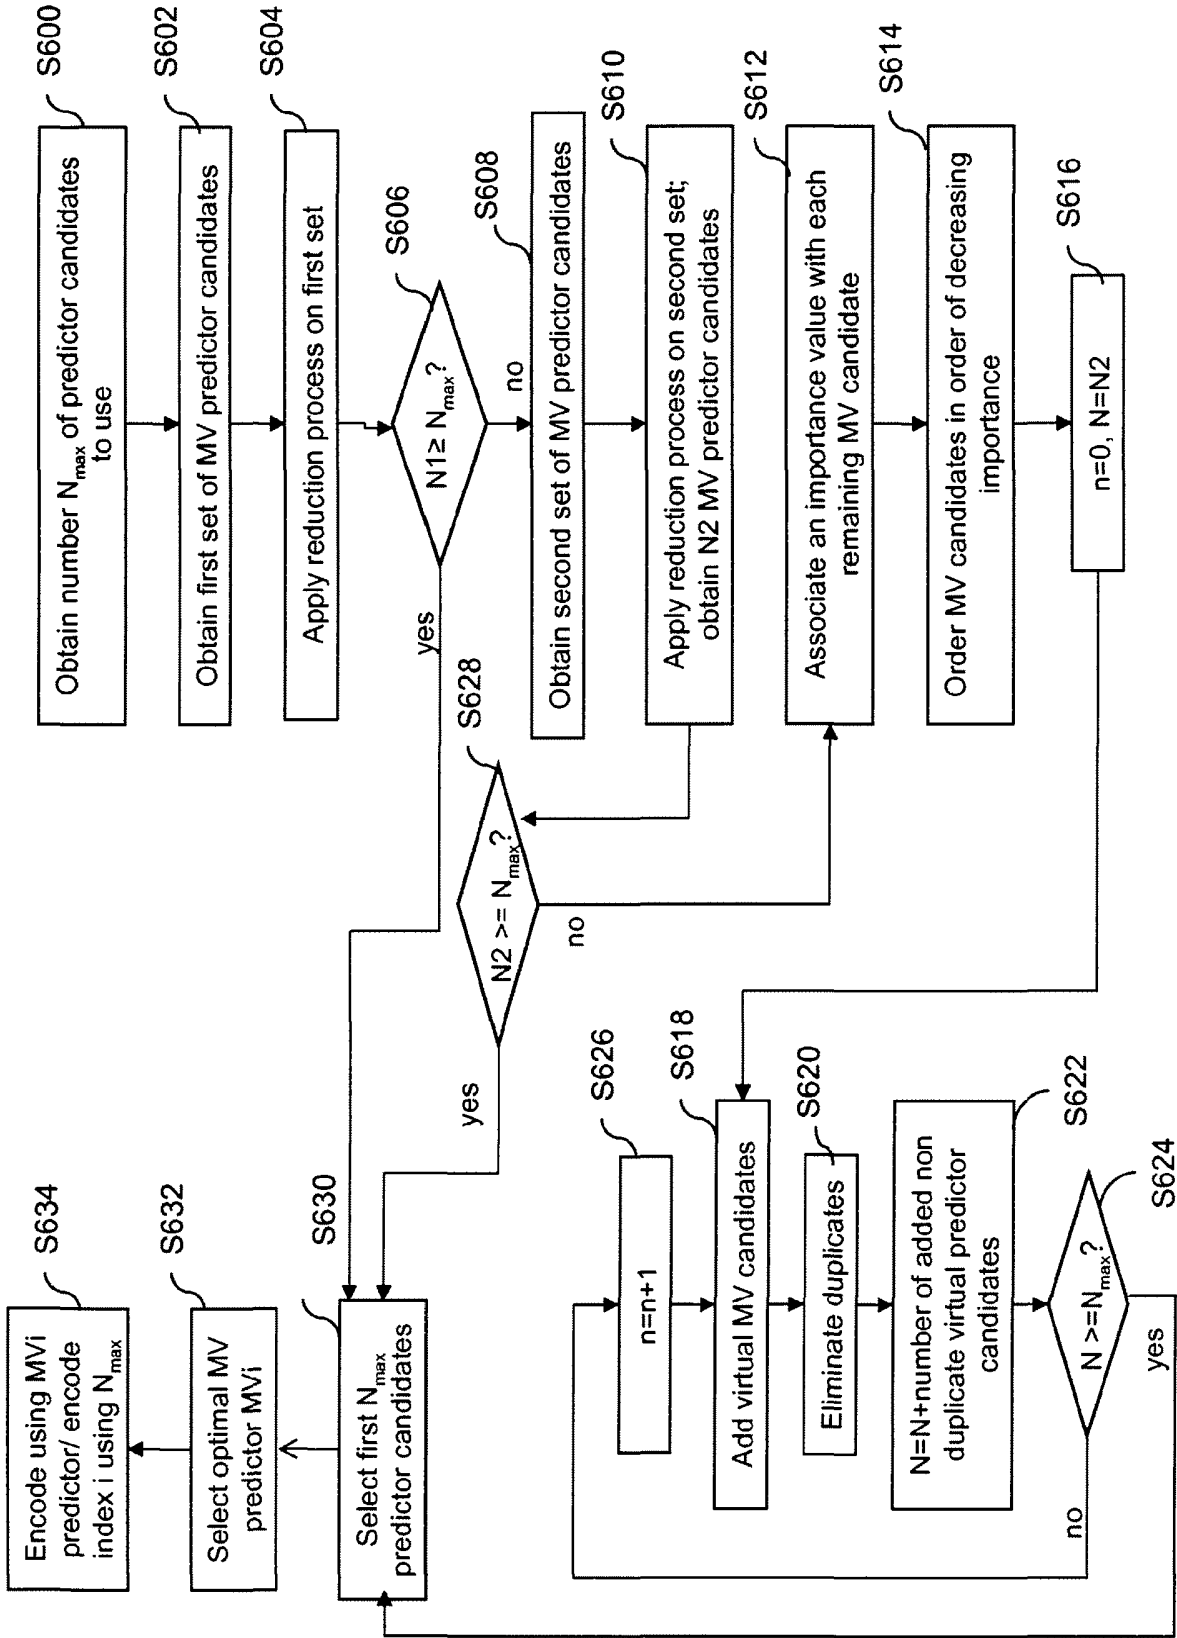


Figure 6

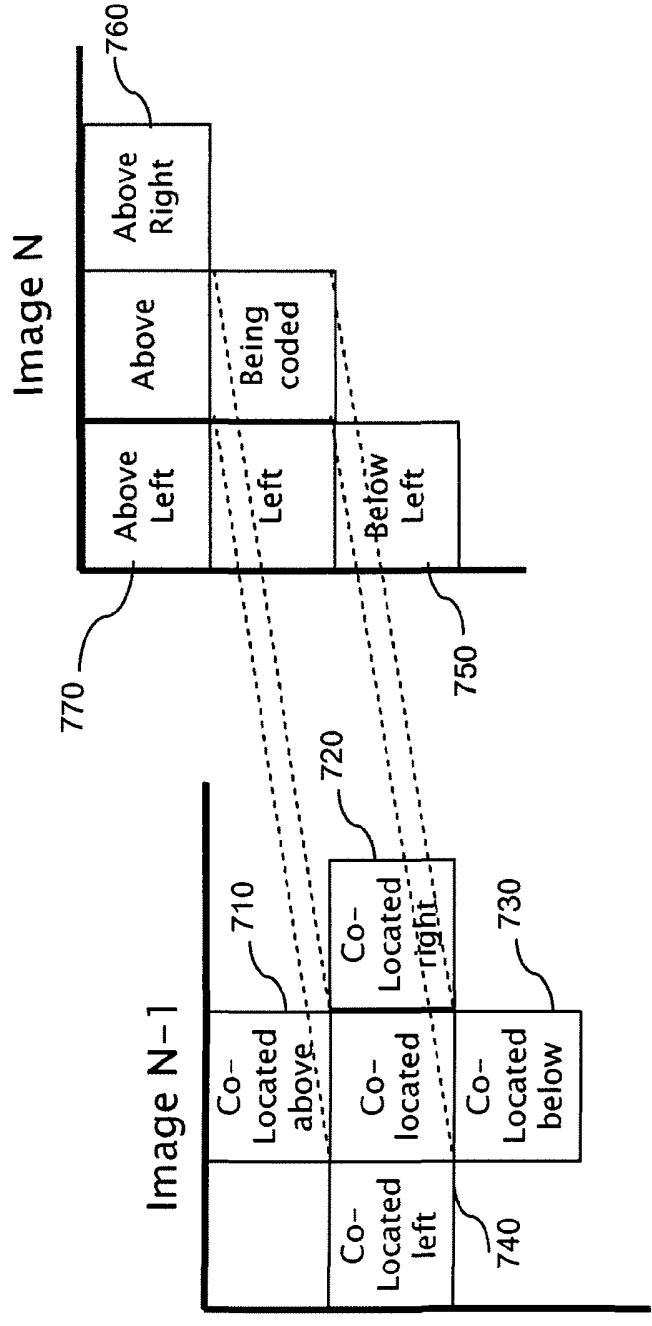


Figure 7


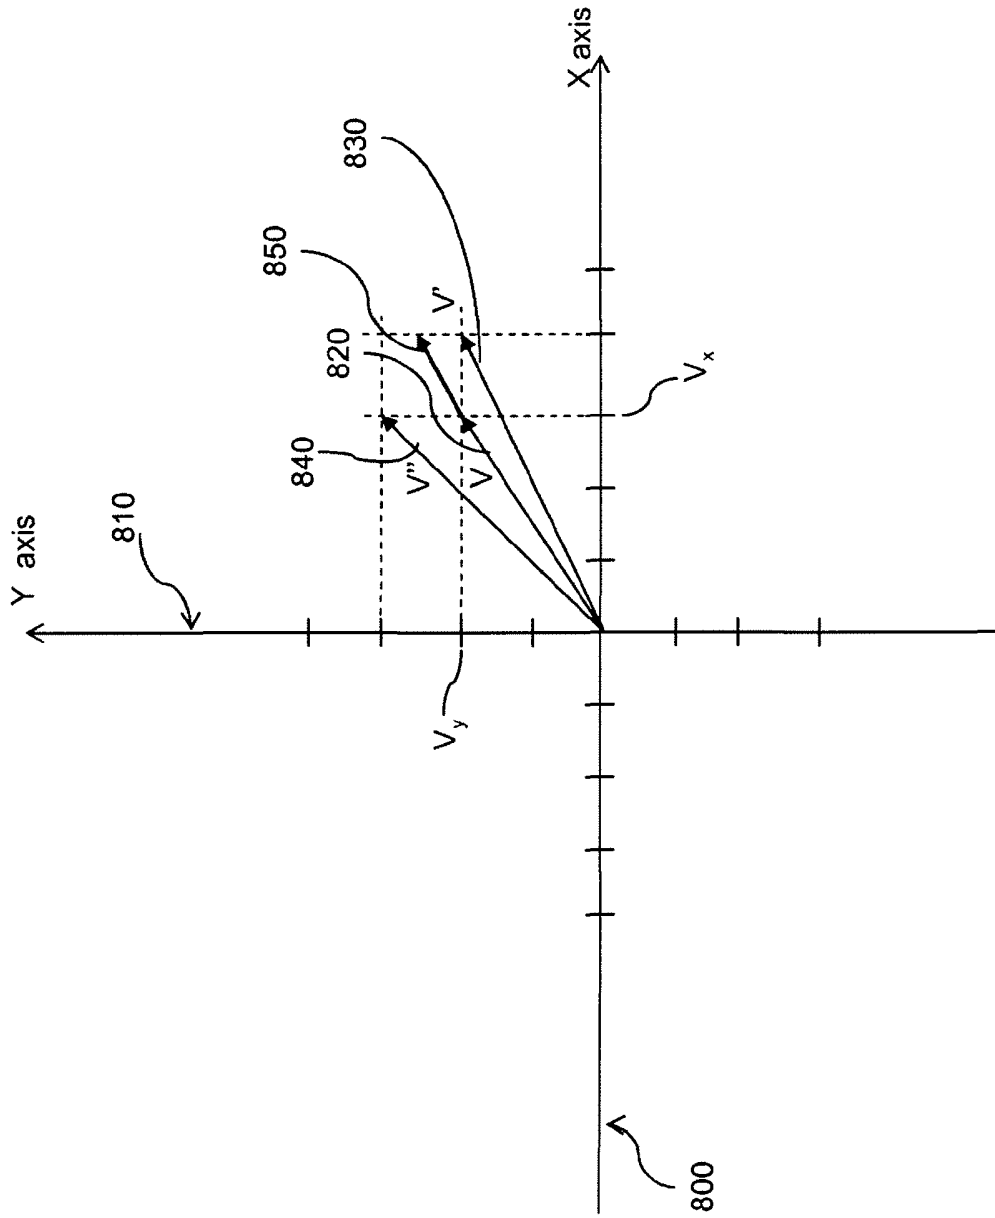


Figure 8

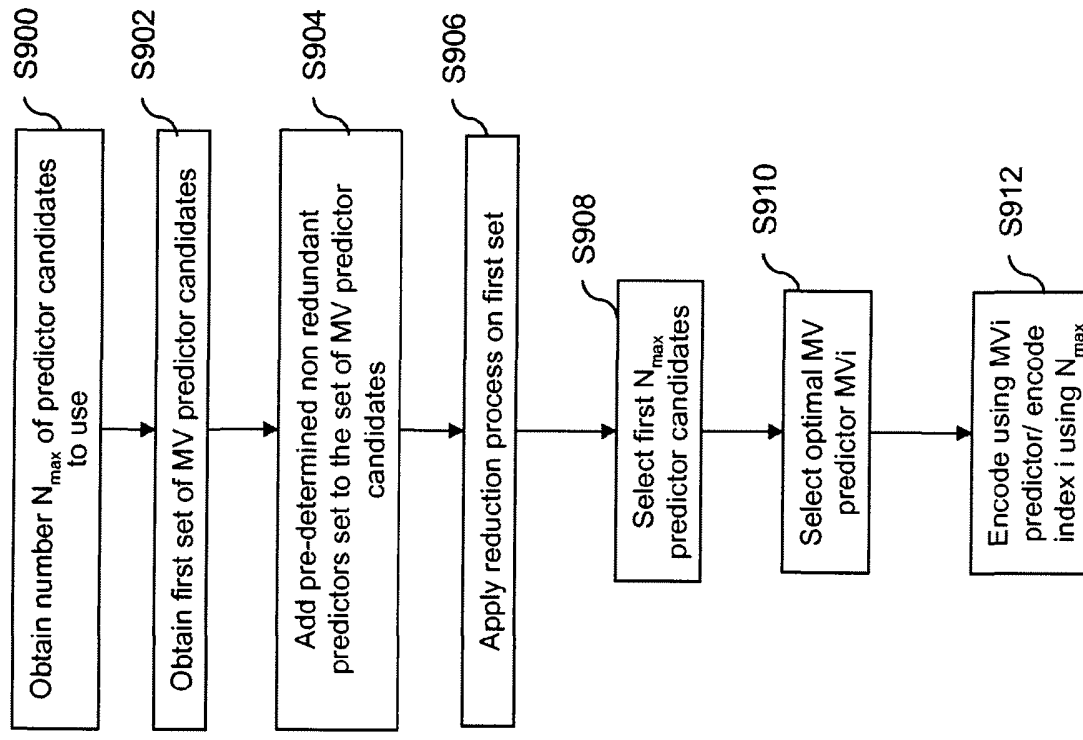

9/9

Figure 9

5 **Video encoding and decoding with improved error resilience**

10 Field of the invention

The invention relates to a method and device for encoding a sequence of digital images and a method and device for decoding a corresponding bitstream.

15 The invention belongs to the field of digital signal processing, and in particular to the field of video compression using motion compensation to reduce spatial and temporal redundancies in video streams.

20 Description of the prior-art

Many video compression formats, for example H.263, H.264, MPEG-1, MPEG-2, MPEG-4, SVC, use block-based discrete cosine transform (DCT) and motion compensation to remove spatial and temporal redundancies. They can be referred to as predictive video formats. Each frame or image of the video signal is divided into slices which are encoded and can be decoded independently. A slice is typically a rectangular portion of the frame, or more generally, a portion of a frame or an entire frame. Further, each slice is divided into macroblocks (MBs), and each macroblock is further divided into blocks, typically blocks of 8x8 pixels. The encoded frames are of two types: temporal predicted frames (either predicted from one reference frame called P-frames or predicted from two reference frames called B-frames) and non temporal predicted frames (called Intra frames or I-frames).

25

30

35

Temporal prediction consists in finding in a reference frame, either a previous or a future frame of the video sequence, an image portion or reference area which is the closest to the block to encode. This step is known as motion estimation. Next, the difference between the block to encode and the reference portion is encoded (motion compensation), along with an item of motion information relative to the motion vector which indicates the reference area to use for motion compensation.

In order to further reduce the cost of encoding motion information, it has been proposed to encode a motion vector by difference from a motion vector predictor, typically computed from the motion vectors of the blocks surrounding the block to encode.

In H.264, motion vectors are encoded with respect to a median predictor computed from the motion vectors situated in a causal neighbourhood of the block to encode, for example from the blocks situated above and to the left of the block to encode. Only the difference, also called residual motion vector, between the median predictor and the current block motion vector is encoded.

The encoding using residual motion vectors saves some bitrate, but necessitates that the decoder performs the same computation of the motion vector predictor in order to decode the value of the motion vector of a block to decode.

Recently, further improvements have been proposed, such as using a plurality of possible motion vector predictors. This method, called motion vector competition, consists in determining between several motion vector predictors or candidates which motion vector predictor minimizes the encoding cost, typically a rate-distortion cost, of the residual motion information. The residual motion information comprises the residual motion vector, i.e. the difference between the actual motion vector of the block to encode and the selected motion vector predictor, and an item of information indicating the selected motion vector predictor, such as for example an encoded value of the index of the selected motion vector predictor.

In the High Efficiency Video Coding (HEVC) currently in the course of standardization, it has been proposed to use a plurality of motion vector predictors as schematically illustrated in figure 1: 3 so-called spatial motion vector predictors V_1 , V_2 and V_3 taken from blocks situated in the neighbourhood of the block to encode, a median motion vector predictor computed based on the components of the three spatial motion vector predictors V_1 , V_2 and V_3 and a temporal motion vector predictor V_0 which is the motion vector of the co-located block in a previous image of the sequence (e. g. block of image N-1 located at the same spatial position as block 'Being coded' of image N). Currently in HEVC the 3 spatial motion vector predictors are taken from the block situated to the left of the block to encode (V_3), the block situated above (V_2) and from one of the blocks situated at the respective corners of the block to encode, according to a predetermined rule of availability. This motion vector predictor selection scheme is called Advanced Motion Vector Prediction (AMVP). In the example of figure 1, the vector V_1 of the block situated above left is selected. Note that a scaling of the motion vectors could be necessary in function of the difference of POC (Picture Order Count: image number) between the image containing the motion vector and the reference image pointed by the motion vector. The difference of POC represents a distance between the image containing the motion vector and the image pointed by the vector. For instance if the difference of POC for V_1 , V_2 and V_0 is 1 and the difference of POC for V_3 is 2, then the coordinates of V_3 have to be scaled and divided by 2.

Finally, a set of 5 motion vector predictor candidates mixing spatial predictors and temporal predictors is obtained. In order to reduce the overhead of signaling the motion vector predictor in the bitstream, the set of motion vector predictors is reduced by eliminating the duplicated motion vectors, i.e. the motion vectors which have the same value. For example, in the illustration of figure 1, V_1 and V_2 are equal, and V_0 and V_3 are also equal, so only two of them should be kept as motion vector prediction candidates, for example V_0 and V_1 . In this

case, only one bit is necessary to indicate the index of the motion vector predictor to the decoder.

A further reduction of the set of motion vector predictors, based on the values of the predictors, is possible. Once the best motion vector predictor is selected and the motion vector residual is computed, it is possible to further eliminate from the prediction set the candidates which would have not been selected, knowing the motion vector residual and the cost optimization criterion of the encoder. A sufficient reduction of the set of predictors leads to a gain in the signaling overhead, since the indication of the selected motion vector predictor can be encoded using fewer bits. At the limit, the set of candidates can be reduced to 1, for example if all motion vector predictors are equal, and therefore it is not necessary to insert any information relative to the selected motion vector predictor in the bitstream.

To summarize, the encoding of motion vectors by difference with a motion vector predictor, along with the reduction of the number of motion vector predictor candidates leads to a compression gain. However, as explained above, for a given block to encode, the reduction of the number of motion vector predictor candidates is based on the values taken by the motion vector predictors of the set, in particular the values of the motion vectors of the neighbouring blocks and of the motion vector of the co-located block. Also, the decoder needs to be able to apply the same analysis of the set of possible motion vector predictors as the encoder, in order to deduce the amount of bits used for indicating the selected motion vector predictor and to be able to decode the index of the motion vector predictor and finally to decode the motion vector using the motion vector residual received. Referring to the example of figure 1, the set of motion vector predictors of the block 'being coded' is reduced by the encoder to V_0 and V_1 , so the index is encoded on one single bit. If the block 'Co-located' of image N-1 is lost during transmission, the decoder cannot obtain the value of V_0 , and therefore cannot find out that V_0 and V_3 are equal. Therefore, the decoder cannot find how many bits were used for encoding the

index of the motion vector predictor for the block 'Being coded', and consequently the decoder cannot correctly parse the data for the slice because it cannot find where the index encoding stops and the encoding of video data starts.

5 Therefore, the fact that the number of bits used for signaling the motion vector predictors depends of the values taken by the motion vector predictors makes the method very vulnerable to transmission errors, when the bitstream is transmitted to a decoder on a lossy communication network. Indeed, the method requires the knowledge of
10 the values of the motion vector predictors to parse the bitstream correctly at the decoder. In case of packet losses, when some motion vector residual values are lost, it is impossible for the decoder to determine how many bits were used to encode index representing the motion vector predictor, and so it is impossible to parse the bitstream
15 correctly. Such an error may propagate causing the decoder's de-synchronization until a following synchronization image, encoded without prediction, is received by the decoder.

 It would be desirable to at least be able to parse an encoded bitstream at a decoder even in case of packet losses, so that some re-
20 synchronization or error concealment can be subsequently applied.

 It was proposed, in the document JCTVC-C166r1, 'TE11: Study on motion vector coding (experiment 3.3a and 3.3c)' by K. Sato, published at the 3rd meeting of the Joint Collaborative Team on Video Coding (JCT-VC) of Guangzhou, 7-15 of October 2010, to use only the
25 spatial motion vector predictors coming from the same slice in the predictor set. This solution solves the problem of parsing at the decoder in case of slice losses. However, the coding efficiency is significantly decreased, since the temporal motion vector predictor is no longer used. Therefore, this solution is not satisfactory in terms of
30 compression performance.

SUMMARY OF THE INVENTION

It is desirable to address one or more of the prior art drawbacks. It is also desirable to provide a method allowing correct parsing at the decoder even in the case of a bitstream corrupted by transmission losses while keeping good compression efficiency.

To that end, the invention relates to method of encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion. The method comprises, for at least one image portion to encode, the steps of:

- obtaining a target number of motion information predictors to be used for said image portion to encode, and
- generating a set of motion information predictors consisting of said target number of motion information predictors, each motion information predictor of the generated set being different from any other motion information predictor of the generated set.

Advantageously, the method of the invention allows the systematic determination of a target number of motion information predictors to be used for encoding motion information, such as a motion vector, associated with an image portion, and the compression is advantageously improved by generating a set of motion information predictors which are all different from one another. The potential overhead of using a fixed target number of motion information predictors is compensated by the variety of predictors selected which helps improving the compression rate. The target number of different motion information predictors is determined and fixed independently of the actual values of the items of motion information, such as motion vectors, selected as motion information predictors for the current image portion to encode.

An embodiment of the present invention is effective when the number of motion information predictors that is initially generated is a priori unknown, for example as when AMVP is used. For example, if reduction of an initial set is carried out, and the number of initial

predictors removed by the reduction process is a priori unknown, an embodiment of the present invention can be used to ensure that the final set of motion information predictors consists of the target number of motion information predictors.

5 According to an embodiment, the encoding method further comprises the steps of:

-selecting a motion information predictor for said image portion to encode from said generated set of motion information predictors, and

10 -encoding an item of information representative of said selected motion information predictor based upon said target number obtained.

Advantageously, a motion information predictor can be selected for a current block to encode and the selected motion vector predictor can be encoded depending on the number of motion information predictors determined. The number of motion information predictors can be systematically retrieved by the decoder, so that the encoded bitstream can be systematically parsed at a decoder even in case of losses.

20 According to an embodiment, the item of information representative of said selected motion vector predictor is an index of the selected motion vector predictor in the generated set of motion information predictors, and the index is encoded on a number of bits dependent upon said target number obtained.

25 According to an embodiment an initial set of motion vector predictor candidates for instance provided by AMVP, could be complemented by a predetermined set of non duplicate predictors. The predetermined set could be the same for any sequence or predetermined at the sequence level, image level or image portion level.

30 The use of a pre-determined set of non duplicate predictors could reduce the complexity.

According to an embodiment a scaling is applied to the motion information predictors in function of a distance between the

image containing the motion information predictors and the image pointed by the motion information predictors. This scaling allow obtaining a set of motion vector predictors having a same scale.

In another embodiment the number of authorized scaling operations performed during the generation of the set of motion vector candidates could be limited in order to decrease the process complexity.

In an embodiment the number of processing operations to generate additional motion vector predictors could be limited. Thanks to this feature the complexity of the algorithm is upper bounded.

According to an embodiment, in the step of obtaining a target number of motion information predictors to be used for said image portion to encode, said target number is set equal to a predetermined value for any image portion to encode of the sequence of digital images.

The advantage of this embodiment is that the target number of motion information predictors can be easily obtained, without any supplementary computation or signaling overhead, at both the encoder or the decoder.

According to another embodiment, in the step of obtaining a target number of motion information predictors to be used for said image portion to encode, said target number is determined, for a given image portion to encode, depending upon an encoding information of said given image portion to encode.

Advantageously, such an encoding information can be an encoding parameter, such as for example, if the images are divided into variable size macroblocks for processing, the size of the macroblock to which the image portion to encode belongs. Such an encoding information may also be for example an encoding mode associated with the image portion to encode.

According to yet another aspect, the invention relates to a device for encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation

with respect to a reference image portion. The device comprises, for at least one image portion to encode:

-means for obtaining a target number of motion information predictors to be used for said image portion to encode, and

5 -means for generating a set of motion information predictors consisting of said target number of motion information predictors, each motion information predictor of the generated set being different from any other motion information predictor of the generated set.

According to yet another aspect, the invention also relates to
10 a computer program product that can be loaded into a programmable apparatus, comprising sequences of instructions for implementing a method for encoding a sequence of digital images as briefly described above, when the program is loaded into and executed by the programmable apparatus. Such a computer program may be transitory
15 or non transitory. In an implementation, the computer program can be stored on a non-transitory computer-readable carrier medium.

The particular characteristics and advantages of the device for encoding a sequence of digital images, of the storage means and of the computer program product being similar to those of the digital video
20 signal encoding method, they are not repeated here.

According to yet another aspect, the invention also relates to a method for decoding a bitstream comprising an encoded sequence of digital images, at least one portion of an image being encoded by motion compensation with respect to a reference image. For at least
25 one said image portion to decode, the method comprises the steps of:

-obtaining a target number of motion information predictors to be used for said image portion to decode, and

-generating a set of motion information predictors consisting of said target number of motion information predictors, each motion
30 information predictor of the generated set being different from any other motion information predictor of the generated set.

The method for decoding a bitstream has the advantage of allowing determining a target number of motion information predictors

and using such a number of different motion information predictors. The target number of motion information predictors can be systematically retrieved, and consequently the bitstream can be parsed systematically, even in case of transmission errors. A further advantage is that in all cases, the parsing of the bitstream is simple, and in particular simpler than with prior art methods which adaptively reduce the number of motion information predictors instead of using a predetermined target number that can be obtained by the decoder.

According to an embodiment, the method further comprises a step of decoding an item of information representative of a selected motion information predictor for said image portion to decode based upon said target number obtained.

Advantageously, in case an encoding dependent on the number of motion information predictors has been applied at the encoder, the item of information representative of the selected motion information predictor for said image portion to decode can be systematically decoded, even in case of transmission errors.

According to yet another aspect, the invention also relates to a device for decoding a bitstream comprising an encoded sequence of digital images, at least one portion of an image being encoded by motion compensation with respect to a reference image portion. The device comprises, for at least one said image portion to decode:

- means for obtaining a target number of motion information predictors to be used for said image portion to decode, and
- means for generating a set of motion information predictors consisting of said target number of motion information predictors, each motion information predictor of the generated set being different from any other motion information predictor of the generated set.

According to yet another aspect, the invention also relates to an information storage means that can be read by a computer or a microprocessor, this storage means being removable, and storing instructions of a computer program for the implementation of the method for decoding a bitstream as briefly described above.

According to yet another aspect, the invention also relates to a computer program product that can be loaded into a programmable apparatus, comprising sequences of instructions for implementing a method for decoding a bitstream as briefly described above, when the program is loaded into and executed by the programmable apparatus. Such a computer program may be transitory or non transitory. In an implementation, the computer program can be stored on a non-transitory computer-readable carrier medium.

The particular characteristics and advantages of the device for decoding a bitstream, of the storage means and of the computer program product being similar to those of the decoding method, they are not repeated here.

According to another aspect of the present invention there is provided a method of encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion, the method comprising generating a set of motion information predictors having controlled diversity and selecting a motion information predictor for said image portion to encode from said generated set of motion information predictors.

Controlled diversity means that the motion information predictors of the set are different from one another but one or more of them are statistically likely to be close to the actual motion information so that a residual (difference between the actual motion information and the predictor concerned) is small and hence efficiently compressible.

The method may comprise:

- generating first motion information predictors;
- identifying one or more first motion information predictors as seed predictors;
- generating one or more second motion information predictors based on the seed predictor(s); and
- forming said set of motion information predictors from the first and/or second motion information predictors.

In this case, the first motion information predictors can be predictors expected statistically to give good results in terms of compression efficiency. The second motion information predictors, being based on the first predictors, can then be used to explore in an organized or systematic way other predictors in the predictor space neighbouring the first predictors. Such predictors may also be expected to give good results and the more the predictors that are examined the greater the chance of finding a good match to the actual motion information is.

10 In one embodiment, at least one first motion information predictors is identified as such a seed predictor based on an importance of the first motion information predictor concerned.

The importance may be dependent on a number of times the first motion information predictor concerned appears among the first motion information predictors. The greater the number of times the more important the predictor is considered to be and the more likely it is to be used in the set. As well as looking for identical predictors (duplicates) it can also be effective to look for close matches, too.

20 Alternatively the importance may be dependent on a measure of how representative the first motion information predictor concerned is of the first motion information predictors as a whole. For example, if the first motion information predictors are averaged, the difference or distance between the average predictor and a given first motion information predictor is a measure of how representative the given predictor is of the first motion information predictors as a whole.

25 One way of controlling the diversity is to generate at least one said second motion information predictor by adding or subtracting an offset from one of said seed predictors. The offset may be fixed. It could also be a pseudo-random value as long as the same seed value is available to the decoder as to the encoder. If the seed predictors are vectors, it is also possible to control the diversity by adding to the seed predictor another vector, e.g. of fixed magnitude and predetermined direction relative to the direction of the seed predictor.

30

A plurality of said second motion information predictors may be generated based on the same said seed predictor. If the motion information predictors are vectors each having X and Y components, the plurality of second motion information predictors can be obtained
5 by adding and/or subtracting offsets to/from one or both said components of the same said seed predictor. For example, the same offset can be added to and subtracted from the same seed predictor. If the seed predictor is a vector having X and Y components, there are a number of permutations of adding/subtracting offsets to/from one or
10 both of the X and Y components of the same seed predictor. This is an efficient way of generating controlled diversity without a large processing burden.

Another way of controlling the diversity is to generate a plurality
15 of second motion information predictors by forming average of different pairs (or other combinations) of first motion information predictors. For example, if the first motion information predictors are V1, V2 and V3, three second motion information predictors could be formed from the averages of V1 & V2, V2 & V3 and V3 & V1. It would also be possible
20 to form different weighted combinations of the same first motion information predictors as different second motion information predictors.

Another way of controlling the diversity is to generate a plurality of second motion information predictors by taking into account the position of the predictor removed from the set of predictors by the
25 reduction process. For example, if a spatial predictor is removed from the set because it is equal to another predictor, the value of the motion vector of the co-located block, the block situated at the same spatial position in the previous frame, can be taken into account. If this motion vector exists and if the value of this motion vector is different from all
30 other predictors in the set, the value of this temporal predictor is added in the predictors set in order to replace the spatial predictor at the same position in the current frame. If the value of this motion vector of the co-located block is the same as the value of any other predictor in the set,

the motion vector of the neighboring blocks of the co-located block could be tested. If any motion vector value is different, other alternative way of controlling the diversity could be used.

In a second example, if a temporal predictor is removed from the set because it is equal to another predictor, the value of the motion vector of the co-located block in the current frame can be taken into account. If this vector exists and if the value of this motion vector is different from all other predictors in the set, the value of this spatial predictor is added in the predictors set in order to replace the temporal predictor at the same position in the previous reference frame. If the value of this spatial motion vector is the same as the value of another predictor in the set, the motion vector of the neighboring blocks of this co-located block in the current frame could be tested. If any motion vector value is different, other alternative way of controlling the diversity could be used.

The first motion information predictors may be or include motion information predictors each associated with an image portion having a predetermined spatial and/or temporal relationship with the image portion being encoded. For example the motion information predictors used in AMVP may be first motion information predictors. These are a good source of seed predictors.

In another embodiment, the generation of a set of non-duplicate predictors may consist in pre-determining a fixed set of non-duplicate predictors and replacing eventual duplicate predictor values from the first set of predictors by predictors from this pre-determined fixed set. In order to insure obtaining a final set of non duplicate predictors with a size equal to the target number, the size of the fixed pre-determined set is fixed at least to the target number. The values of these fixed predictors could be determined off line or adaptively for a set of image portions. In that last case the pre-determined fixed set will be the same for all image portions of that set. This set of non duplicate predictors could be systematically added at the end of the first list of predictors. This pre-determined set of predictors can be generated by adding an

offset of a fixed motion vector predictor value as described in the previous paragraph. This fixed value can be the zero motion vector (0,0) or a global motion vector value determined for the current image. The advantage of this pre-determined non-duplicate predictor is the complexity. The pre-determined set of non-duplicate predictors is
5 computed only once per frame or per sequence or it is fixed. So, no or only minor additional operations are needed to generate a non-duplicate predictors set according to a target number.

In another embodiment the method comprises:
10 generating first motion information predictors;
checking the differences between the generated first motion information predictors; and
excluding from said set of motion information predictors one or more first motion information predictors based on the differences.

15 By taking into account the differences between the first motion information predictors it is possible to control the diversity of the motion information predictors of the set. It is not necessary in this case to identify seed predictors among the first motion information predictors and generate second motion information predictors based on the seed
20 predictors. This can be effective, for example, if a sufficiently high number of first motion information predictors are initially available.

For example, a first motion information predictor having the smallest difference from another first motion information predictor can be removed, as a way of controlling the diversity. The process can be
25 repeated again, as necessary, to successively remove the less diverse predictors.

It is important to note that in this aspect of the invention a number of motion information predictors in said set can be variable.

30 However, as in the other basic aspect of the present invention the number of motion information predictors in said set can be predetermined at least for a given image portion to encode or even for all image portions (a target number). This makes it possible not only to

achieve controlled diversity among the predictors of the set but also to solve the parsing problem noted in the introduction.

This aspect of the invention also provides a corresponding decoding method and corresponding encoding and decoding devices,
5 as well as programs which cause the encoding and decoding.

According to yet another aspect, the invention relates to a method of encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion. The method comprises, for at
10 least one image portion to encode, the steps of:

-obtaining a first set of motion vector predictors to be used for said image portion to encode, and

-generating a second set of motion vector predictors from said first set of motion vector predictors, each motion vector predictor of
15 the generated set being different from any other motion vector predictor of the generated second set of motion vector predictors, wherein at least one motion vector predictor of the second set is computed from a selected motion vector predictor of the first set.

Advantageously, the second set of motion vector predictors
20 generated is used for encoding the motion vector associated with the portion of image to encode. The second set of motion vector predictors comprises a variety of different motion vector predictors, which are generated (and possibly selected) so as to enhance the compression efficiency.

25 According to an embodiment, a motion vector predictor of the first set is selected in a selecting step according to an importance value.

According to an embodiment, the encoding method comprises a step of computing an importance value associated with each motion vector predictor of the first set.

30 According to an embodiment, a motion vector predictor of the first set is selected in a selecting step according to a distance among the motion vector predictors of the first set.

The various embodiments for selecting a motion vector predictor to generate further additional or virtual motion vector predictors allow applying a controlled diversity selection, which has the advantage of improving the compression efficiency. Indeed, the use of
5 motion vector predictors computed from important motion vector predictors of the initial set allows to more accurately represent the motion vector of the current image portion to encode. Again, it is not essential to have a fixed or target number of predictors in the final set.

According to an embodiment, the motion vector predictors of
10 the first set of motion vector predictors are motion vectors associated with image portions to encode of the image being encoded and/or of a reference image. The first set may be made up of, or include, the predictors used in AMVP.

According to another aspect of the present invention there is
15 provided a method of encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

wherein, for at least one image portion to encode, the method comprises the steps of:

- 20 -obtaining a target number of motion information predictors to be used for said image portion to encode and
- obtaining a first set of motion information predictors containing a first number of motion information predictors, and
- after obtaining said first set of motion information predictors,
25 -comparing said first number of motion information predictors to said target number obtained, and
- if said first number is higher than said target number,
-selecting one or several motion
information predictors according to a removal criterion, and
30 -removing said selected motion information predictors to obtain a second set of motion information predictors having said target number of motion information predictors.

Preferably, the motion information predictors of said first set are or include motion information predictors each associated with an image portion having a predetermined spatial and/or temporal relationship with the image portion being encoded.

5 In one embodiment, the first set of motion information predictors are the motion information predictors used in Advanced Motion Vector Prediction.

The method may further comprise the steps of:

10 -selecting a motion information predictor for said image portion to encode from said second set of motion information predictors, and
 -encoding an item of information representative of said selected motion information predictor based upon said target number obtained.

15 In one embodiment the motion information predictors of said second set are the first N_{max} motion information predictors of said first set, where N_{max} is said target number, and the or each further motion information predictor of said first set is removed.

20 According to a further aspect of the present invention there is provided a method of decoding a bitstream comprising an encoded sequence of digital images, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

 wherein, for at least one image portion to decode, the method comprises the steps of:

25 -obtaining a target number of motion information predictors to be used for said image portion to decode and
 -obtaining a first set of motion information predictors containing a first number of motion information predictors, and
 -after obtaining said first set of motion information predictors,
 -comparing said first number of motion information
30 predictors to said target number obtained, and
 -if said first number is higher than said target number,
 -selecting one or several motion information predictors according to a removal criterion, and

-removing said selected motion information predictors to obtain a second set of motion information predictors having said target number of motion information predictors.

5 Preferably, the motion information predictors of said first set are or include motion information predictors each associated with an image portion having a predetermined spatial and/or temporal relationship with the image portion being decoded.

In one embodiment, the first set of motion information predictors
10 are the motion information predictors used in Advanced Motion Vector Prediction.

In one embodiment, the motion information predictors of said second set are the first N_{max} motion information predictors of said first set, where N_{max} is said target number, and the or each further motion
15 information predictor of said first set is removed.

According to another aspect of the present invention there is provided a device for encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

20 the device comprising:

-means for obtaining a target number of motion information predictors to be used for an image portion to encode and

-means for obtaining a first set of motion information predictors containing a first number of motion information
25 predictors, and

-means for comparing said first number of motion information predictors to said target number obtained, and

-means operable, if said first number is higher than said target number, to

30 -select one or several motion information predictors according to a removal criterion, and

-remove said selected motion information predictors to obtain a second set of motion information

predictors having said target number of motion information predictors.

According to a further aspect of the present invention there is provided a device for decoding a bitstream comprising an encoded
5 sequence of digital images, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

the device comprising:

-means for obtaining a target number of motion information
10 predictors to be used for said image portion to decode;

-means for obtaining a first set of motion information predictors containing a first number of motion information predictors, and

-means for comparing said first number of motion information
15 predictors to said target number obtained, and

-means operable, if said first number is higher than said target number, to:

-select one or several motion information predictors according to a removal criterion, and

20 -remove said selected motion information predictors to obtain a second set of motion information predictors having said target number of motion information predictors.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Other features and advantages will appear in the following description, which is given solely by way of non-limiting example and
30 made with reference to the accompanying drawings, in which:

- Figure 1, already described, illustrates schematically a set of motion vector predictors used in a motion vector prediction scheme;

- Figure 2 is a diagram of a processing device adapted to implement an embodiment of the present invention;

- Figure 3 is a block diagram of an encoder according to an embodiment of the invention;

5 - Figure 4 illustrates a block diagram of a decoder according to an embodiment of the invention;

- Figure 5 details the determination of a set of motion vector predictors according to a first embodiment;

10 - Figure 6 details the determination of a set of motion vector predictors according to a second embodiment;

- Figure 7 illustrates schematically a second set of motion vector predictors,

- Figure 8 illustrates schematically motion vectors in a coordinates system, and

15 Figure 9 details the determination of a set of motion vector predictors according to a third embodiment.

20

DETAILED DESCRIPTION OF THE EMBODIMENTS

Figure 2 illustrates a diagram of a processing device 1000 adapted to implement one embodiment of the present invention. The apparatus 1000 is for example a micro-computer, a workstation or a light portable device.

The apparatus 1000 comprises a communication bus 1113 to which there are preferably connected:

30 -a central processing unit 1111, such as a microprocessor, denoted CPU;

-a read only memory 1107 able to contain computer programs for implementing the invention, denoted ROM;

-a random access memory 1112, denoted RAM, able to contain the executable code of the method of the invention as well as the registers adapted to record variables and parameters necessary for implementing the method of encoding a sequence of digital images
5 and/or the method of decoding a bitstream; and

-a communication interface 1102 connected to a communication network 1103 over which digital data to be processed are transmitted.

Optionally, the apparatus 1000 may also have the following
10 components:

-a data storage means 1104 such as a hard disk, able to contain the programs implementing the invention and data used or produced during the implementation of the invention;

-a disk drive 1105 for a disk 1106, the disk drive being
15 adapted to read data from the disk 1106 or to write data onto said disk;

-a screen 1109 for displaying data and/or serving as a graphical interface with the user, by means of a keyboard 1110 or any other pointing means.

The apparatus 1000 can be connected to various
20 peripherals, such as for example a digital camera 1100 or a microphone 1108, each being connected to an input/output card (not shown) so as to supply multimedia data to the apparatus 1000.

The communication bus affords communication and interoperability between the various elements included in the apparatus
25 1000 or connected to it. The representation of the bus is not limiting and in particular the central processing unit is able to communicate instructions to any element of the apparatus 1000 directly or by means of another element of the apparatus 1000.

The disk 1106 can be replaced by any information medium
30 such as for example a compact disk (CD-ROM), rewritable or not, a ZIP disk or a memory card and, in general terms, by an information storage means that can be read by a microcomputer or by a microprocessor, integrated or not into the apparatus, possibly removable and adapted to

store one or more programs whose execution enables the method of encoding a sequence of digital images and/or the method of decoding a bitstream according to the invention to be implemented.

The executable code may be stored either in read only
5 memory 1107, on the hard disk 1104 or on a removable digital medium
such as for example a disk 1106 as described previously. According to
a variant, the executable code of the programs can be received by
means of the communication network 1103, via the interface 1102, in
order to be stored in one of the storage means of the apparatus 1000
10 before being executed, such as the hard disk 1104.

The central processing unit 1111 is adapted to control and
direct the execution of the instructions or portions of software code of
the program or programs according to the invention, instructions that
are stored in one of the aforementioned storage means. On powering
15 up, the program or programs that are stored in a non-volatile memory,
for example on the hard disk 1104 or in the read only memory 1107, are
transferred into the random access memory 1112, which then contains
the executable code of the program or programs, as well as registers
for storing the variables and parameters necessary for implementing the
20 invention.

In this embodiment, the apparatus is a programmable
apparatus which uses software to implement the invention. However,
alternatively, the present invention may be implemented in hardware
(for example, in the form of an Application Specific Integrated Circuit or
25 ASIC).

Figure 3 illustrates a block diagram of an encoder according
to an embodiment of the invention. The encoder is represented by
connected modules, each module being adapted to implement, for
example in the form of programming instructions to be executed by the
30 CPU 1111 of device 1000, a corresponding step of a method
implementing an embodiment of the invention.

An original sequence of digital images i_0 to i_n 301 is received as an input by the encoder 30. Each digital image is represented by a set of samples, known as pixels.

A bitstream 310 is output by the encoder 30.

5 The bitstream 310 comprises a plurality of encoding units or slices, each slice comprising a slice header for encoding values of encoding parameters used to encode the slice and a slice body, comprising encoded video data.

10 The input digital images are divided into blocks (302), which blocks are image portions and may be of variable sizes (e.g. 4x4, 8x8, 16x16, 32x32). A coding mode is selected for each input block. There are two families of coding modes, spatial prediction coding or Intra coding, and temporal prediction coding or Inter coding. The possible coding modes are tested.

15 Module 303 implements Intra prediction, in which the given block to encode is predicted by a predictor computed from pixels of the neighbourhood of said block to encode. An indication of the Intra predictor selected and the difference between the given block and its predictor is encoded if the Intra coding is selected.

20 Temporal prediction is implemented by modules 304 and 305. Firstly a reference image among a set of reference images 316 is selected, and a portion of the reference image, also called reference area, which is the closest area to the given block to encode, is selected by the motion estimation module 304. The difference between the
25 selected reference area and the given block, also called a residual block, is computed by the motion compensation module 305. The selected reference area is indicated by a motion vector.

30 An information relative to the motion vector and the residual block is encoded if the Inter prediction is selected. To further reduce the bitrate, the motion vector is encoded by difference with respect to a motion vector predictor. A set of motion vector predictors, also called motion information predictors, is obtained from the motion vectors field 318 by a motion vector prediction and coding module 317.

Advantageously, the set of motion vector predictors used to select a best motion vector predictor to encode a current motion vector is generated as explained in more detail hereafter with respect to figures 5 and 6. For a given current block to encode, a predetermined number N_{\max} of motion vector predictors is set, and consequently the index of the selected motion vector predictor, which is an item of information representative of the selected motion vector predictor, can be encoded using a predetermined number of bits. This predetermined number of bits can be also retrieved by the decoder even in case of losses, therefore it is ensured that the decoder will be able to parse the bitstream even in case of errors or losses. The N_{\max} motion vector predictors are selected according to various embodiments to be all different from one another so as to enhance the compression efficiency.

The selection of the predetermined number N_{\max} of motion vector predictors and of the corresponding number of bits to encode the index of the motion vector predictor can be applied either for the entire sequence, or for a group of images of the sequence, or at the block level depending on an encoding parameters such as the block size or the encoding mode. For example, a first predetermined number of motion vector predictors $N_{\max1}$ can be used for the blocks encoded using Inter prediction for which a residual block is encoded, and a second predetermined number motion vector predictors $N_{\max2}$ can be used for the blocks encoded using the SKIP mode, for which only a motion vector is encoded, but no residual block. The respective numbers of motion vector predictors $N_{\max1}$ and $N_{\max2}$ can be for example signaled in the bitstream by inserting them in a header, such as the slice header, or in any appropriate metadata field.

The encoder further comprises a module of selection of the coding mode, which uses an encoding cost criterion, such as a rate-distortion criterion, to determine which is the best mode among the spatial prediction mode and the temporal prediction mode. A transform is applied to the residual block, the transformed data obtained is then quantized by module and entropy encoded by module.

Finally, the encoded residual block of the current block to encode is inserted in the bitstream 310, along with the information relative to the predictor used. For the blocks encoded in 'SKIP' mode, only a reference to the predictor is encoded in the bitstream, without any residual block.

5 The encoder 30 further performs the decoding of the encoded image in order to produce a reference image for the motion estimation of the subsequent images. The module 311 performs inverse quantization of the quantized data, followed by an inverse transform 312. The reverse motion prediction module 313 uses the prediction
10 information to determine which predictor to use for a given block and the reverse motion compensation module 314 actually adds the residual obtained by module 312 to the reference area obtained from the set of reference images 316. Optionally, a deblocking filter 315 is applied to
15 remove the blocking effects and enhance the visual quality of the decoded image. The same deblocking filter is applied at the decoder, so that, if there is no transmission loss, the encoder and the decoder apply the same processing.

Figure 4 illustrates a block diagram of a decoder according to an embodiment of the invention. The decoder is represented by
20 connected modules, each module being adapted to implement, for example in the form of programming instructions to be executed by the CPU 1111 of device 1000, a corresponding step of a method implementing an embodiment of the invention.

The decoder 40 receives a bitstream 401 comprising
25 encoding units, each one being composed of a header containing information on encoding parameters and a body containing the encoded video data. As explained with respect to figure 3, the encoded video data is entropy encoded, and the motion vector predictors' indexes are encoded, for a given block, on a predetermined number of bits. The
30 received encoded video data is entropy decoded (402), dequantized (403) and then a reverse transform (404) is applied.

In particular, when the received encoded video data corresponds to a residual block of a current block to decode, the

decoder also decodes motion prediction information from the bitstream, so as to find the reference area used by the encoder.

The module 410 applies the motion vector decoding for each current block encoded by motion prediction, comprising determining the number N_{\max} of motion vector predictors used and retrieving the motion vector predictor index encoded on a number of bits dependent on N_{\max} . Similarly to module 317 of figure 3, motion vector decoding module 410 generates a set of N_{\max} motion vector predictors. The embodiments explained hereafter with respect to figures 5 and 6 apply similarly. If the bitstream is received without losses, the decoder generates exactly the same set of motion vector predictors as the encoder. In case of losses, it may not be possible to generate the set of motion vector predictors and therefore to correctly decode the motion vector associated with the current block. However, the parsing of the bitstream is always possible, even in case of losses, since the number of bits used to encode the index of the motion vectors predictor can be systematically retrieved by the decoder.

Once the index of the motion vector predictor for the current block has been obtained, if no losses have occurred, the actual value of the motion vector associated with the current block can be decoded and used to apply reverse motion compensation (406). The reference area indicated by the decoded motion vector is extracted from a reference image (408) to finally apply the reverse motion compensation 406.

In case an Intra prediction has been applied, an inverse Intra prediction is applied by module 405.

Finally, a decoded block is obtained. A deblocking filter 407 is applied, similarly to the deblocking filter 315 applied at the encoder. A decoded video signal 409 is finally provided by the decoder 40.

Figure 5 details the generation of the set of motion vector predictors or motion vector candidates in a first embodiment of the present invention. All the steps of the algorithm represented in figure 5 can be implemented in software and executed by the central processing unit 1111 of the device 1000.

Figure 5 represents a flowchart applied for a given current block to encode, which has an associated motion vector designating a reference area in a reference image.

An initial set of motion vector predictors L1 is firstly obtained
 5 in step S500. The set L1 is composed of N candidates. In an embodiment, the initial set of motion vector predictors comprises the motion vector candidates selected according to the motion vector prediction scheme AMVP already described with reference to figure 1, for example vectors V_0 to V_3 of figure 1 and the median vector
 10 computed from V_1 , V_2 and V_3 . Accordingly, N is a maximum of 5.

Preferably, the initial set of motion vector predictors L1 contains only motion vectors different from one another. Taking the example of figure 1, only motion vectors V_0 , V_1 and the median vector should be kept in L1, and the number of motion vector predictors is
 15 $N=3$.

In an alternative embodiment, any other scheme for selecting motion vectors already computed and computing other motion vectors from available ones (i.e. average, median etc) to form the initial set of motion vector predictors L1 can be applied.

20 In a yet another alternative embodiment, the initial set of motion vector predictors L1 is empty and $N=0$.

In the following step S502, the target number N_{max} of candidate motion vector predictors to use is obtained. N_{max} may either be predetermined for the entire sequence of digital images to encode, for example $N_{max}=4$, or may be selected according to encoding
 25 parameters of the current block to encode or of the encoding unit (for example the slice) to which the current block to encode belongs.

For example, the number N_{max} may be dependent on the size of the transform applied to the macroblock to which the current
 30 block being processed belongs: e.g. $N_{max}=p$ for a transform applied on a block of $2^{p+1} \times 2^{p+1}$.

In an embodiment, the number of bits k to use for encoding the index of the motion vector predictor is directly related to N_{max} :

$k = \text{INT}_{\text{sup}}(\log_2(N_{\text{max}}))$, where $\text{INT}_{\text{sup}}(x)$ is the integer number immediately following the value x . Preferably, N_{max} should be a power of 2, $N_{\text{max}} = 2^k$, so as to use all the indexes that can be encoded on k bits. Advantageously, all the bits used for signaling are used so as to be able to designate a variety of motion vector predictors and to improve the compression.

Alternatively, any type of encoding of the indexes representative of the motion vector predictors can be used, after the number of different motion vector predictors N_{max} has been determined. In particular, any type of entropy encoding, such as Huffman encoding or arithmetic encoding can be used. Also, the indexes may be also encoded using a prefix type code, such as a Rice-Golomb or a unary code.

Next, it is tested in step S503 whether the number N of motion vector predictors of set L1 is higher than N_{max} .

In case of positive answer, test S503 is followed by step S504 of selection of a motion vector predictor candidate from L1, followed by the removal of the selected motion vector predictor candidate from L1 in step S506 to form a modified set of motion vector predictors L2.

The selection of step S504 is applied according to a removal criterion, for example a distance criterion. For example, the set L1 comprises motion vectors predictors $\{V_1, \dots, V_N\}$, wherein each motion vector predictor is a vector represented by its components or coordinates on the X-axis and the Y-axis in a coordinate system, as represented in figure 8.

In an embodiment, step S504 determines the distance between each vector V_k and each other vector V_n of L1 other than V_k itself, by computing the distance as: $d(V_k, V_n) = |V_{kx} - V_{nx}| + |V_{ky} - V_{ny}|$, where $|a|$ represents the absolute value of a . Taking the example of figure 8, vector V has the coordinates (3,2), vector V' has the coordinates (4,2) and V'' has the coordinates (3,3). In this example,

$d(V,V')=d(V,V'')=1$, so V' and V'' are at the same distance from vector V , whereas $d(V',V'')=2$.

Any other type of metric for the calculation of the distances can be alternatively applied.

5 The minimal distance found $d(V_p, V_q)$ indicates the two closest vectors V_p , V_q , among the set $L1$, and therefore one of these two vectors is selected for removal. The selection of one of these two vector can be based on the distance of each one of them to the remaining motion prediction vectors in the modified set $L1$: the vector
10 between V_p and V_q which has the smallest distance to another vector of the set $L1$ is selected for removal.

The effect is to ensure that the distance between the remaining vectors in the modified set $L2$ is maximal, so as to allow the use of motion vector predictors as varied or diverse as possible.

15 After the removal of the selected vector, the value of N is decreased (S508), and then N is compared to N_{max} (S510). If the value of N has not reached yet N_{max} (answer 'no' to test S510) steps S504 to S510 are repeated. Otherwise, if N has reached N_{max} , step S510 is followed by step S522 described hereafter.

20 If the answer to test S503 is 'no', then test S512 checks whether N is lower than N_{max} . In case of negative answer, i.e. if $N=N_{max}$, test S512 is followed by step S522 described hereafter.

 If the answer to test S512 is 'yes', i.e. if N is strictly lower than N_{max} , then test S512 is followed by step S514 of obtaining or
25 generating an additional motion vector predictor candidate. Indeed, starting from the initial set of motion vector predictors $L1$, it is possible to add other candidates as motion vector predictors, in a predetermined order, to form a modified set of motion vector predictors $L2$. Taking the example of figure 7, the motion vectors of blocks 710, 720, 730 and 740
30 can be added as possible motion vector predictors. Further, the 2 predictors among 770, 760, 750 which were not selected in S500 can be added as possible motion vector predictors.

For each potential motion vector predictor candidate MV, it is checked whether the motion vector predictor MV is different from all the motion vector predictor candidates already stored in the set L2.

If each potential motion vector candidate considered, as for example the motion vectors of blocks 710, 720, 730, 740, 750, 760 and 770 of figure 7, is equal to a motion vector predictor of set L2, new 'virtual' motion vector predictor candidates are computed in step S514.

Such motion vector predictor candidates are called virtual because they are not motion vectors of other blocks of the current image or of the reference image. The virtual motion vector predictors are computed from existing motion vector predictors, for example by adding offsets. For example, from a motion vector MV of set L2 of coordinates (MV_x, MV_y) , it is possible to compute four virtual motion vector predictors by adding/subtracting an offset off to its coordinates: $MV'(MV_x \pm \text{off}, MV_y \pm \text{off})$. Typically, off may be set equal to 1 or 2.

Alternatively, other modifications of the components of the motion vector predictor MV to obtain virtual motion vector predictors can be applied, so as to obtain diverse motion vector predictors starting from the existing motion vector predictors in order to increase the compression efficiency.

For example, the components of the motion vector MV may be modified independently, using respectively two values offx and offy, and either offx or offy may be set to 0.

In an embodiment, both offx and offy are proportional to the corresponding component: $\text{offx} = aMV_x$ and $\text{offy} = bMV_y$ with a and b typically smaller than 0.5. If necessary, the modified coordinates MV_x and MV_y are rounded to the closest integer value, so as to represent a displacement on the grid of pixels.

In an embodiment, a supplementary motion vector, of predetermined norm, is added to the vector MV, the supplementary vector having the same direction as motion vector MV, as represented in figure 8: supplemental vector 850 is added to vector 820.

In yet another alternative embodiment, a variance of the motion vectors of the set L2 is computed:

$$\text{var} = \sum_{MV \in L2} (MV_x - \overline{MV_x})^2 + (MV_y - \overline{MV_y})^2 \quad \text{where } \overline{MV_x} \text{ represents the}$$

mean value of the MV_x coordinates of the vectors of L2 and $\overline{MV_y}$

5 represents the mean value of the MV_y coordinates of the vectors of L2. Then, the offset off is selected by comparing the calculated value var to a predetermined threshold T. T can be equal to $50/L2$. If var is lower than T, the value off is small, for example off=1; if var is higher than T, off is set to a larger value, for example off=3. Further, in this
10 embodiment also, a differentiated value offx or offy can be computed for each component.

In one embodiment, to generate a virtual motion vector predictor, the virtual motion vector is selected among a pre-determined set of non-redundant predictors. This set can be fixed or changed at
15 sequence level or at image level. It contains N_{\max} predictor values which are all different. These predictor values can be generated by adding offsets to a fixed value. For example, this fixed value could be the zero motion vector (0,0) or a global motion vector value of the current image. The advantage of these pre-defined virtual predictors is the low
20 complexity. Indeed, the pre-determined predictors set doesn't need to be computed for each image portion so no operation is needed to generate the predictor compared to adding offsets to the motion vector values of the first set.

One motion vector predictor obtained in step S514 is added
25 to the set of motion vector predictors L2 in step S516, and the number N is increased by 1 (step S518).

Next, it is checked in step S520 is N is equal to N_{\max} . In case of negative answer, steps S514 to S520 are repeated.

In case of positive answer, the determined target number of
30 motion vector predictor candidates N_{\max} has been reached, and step S520 is followed, at the encoder, by the step S522 of selection of an optimal motion vector predictor for the current block from set L2. For

example, a rate-distortion optimization criterion is applied to select the optimal motion vector predictor MV_i to encode the motion vector of the current block.

At the encoder, the motion residual, i.e. the difference
5 between the motion vector of the current block and the selected motion vector predictor is encoded, as well as an indication of the motion vector predictor selected in step S524. For example, the index i of the selected motion vector predictor MV_i of L2 is encoded, using $k = \text{INT}_{\text{sup}}(\log_2(N_{\text{max}}))$ bits.

10 Alternatively, an entropy encoding of the index i may be applied.

In yet another alternative, the index i can be encoded using a prefix type code, such as the Rice-Golomb code, in which each value i is encoded using i '1's followed by a '0'.

15 The algorithm of figure 5 can also be implemented by a decoder to generate the set of motion vector predictor or motion vector candidates for a given block, without steps S522 and S524.

At the decoder, the index i of the selected motion vector predictor MV_i for the given block to decode is obtained from the
20 bitstream, knowing N_{max} and therefore the number of bits k on which the index i has been encoded. The steps S500 to S518 are similarly implemented to obtain the set of motion vector predictors L2, so that the index i decoded from the bitstream designates the motion vector predictor actually used by the encoder.

25 In case of losses during transmission, since the number N_{max} can be systematically retrieved by the decoder, the received bitstream can be systematically parsed to extract the index i designating the selected motion vector predictor, even if, depending on the packets lost, the complete set of motion vector predictors L2 may not be obtained at
30 the decoder.

Figure 6 details the generation of the set of motion vector predictors or motion vector candidates in a second embodiment of the present invention. All the steps of the algorithm represented in figure 6

can be implemented in software and executed by the central processing unit 1111 of the device 1000.

Figure 6 represents a flowchart applied for a given current block to encode, which has an associated motion vector designating a reference area in a reference image.

Firstly, similarly to step S502 of figure 5, the target number N_{\max} of motion vector predictor candidates to use is obtained in step S600.

In an embodiment, N_{\max} is of the form 2^k , so that each index value that can be coded on k bits corresponds to a possible motion vector predictor.

For example, in order to use all motion vector predictors of the AMVP scheme which proposes 5 motion vector predictors, 3 bits are necessary to encode the index of a motion vector predictor. In this case, preferably $N_{\max}=2^3=8$.

An initial set of motion vector predictor candidates L1 is obtained in step S602. For example, the initial set of N=5 motion vector predictors of AMVP is selected.

A reduction process is applied on the initial set of motion vector predictors to eliminate duplicates, so as to obtain a reduced set of motion vector predictors containing N1 elements. Preferably, the number of duplicates of each remaining vector after the reduction process is recorded and stored in a memory for a subsequent use in step S612 described hereafter.

It is next checked (test S606) whether N1 is higher than or equal to N_{\max} , the target number of motion vector predictors. It may be pointed out that a positive outcome to this test only occurs if the algorithm starts with a first set of motion vector predictors a greater number of motion vectors than N_{\max} . In case of positive answer, step S606 is followed by step S630 of selection of the first N_{\max} motion vector predictor candidates of the set L1 to form the set of motion vector predictors L2

In case of negative answer, i.e. if N_1 is lower than N_{max} , the set of motion vector predictors has to be complemented with additional motion vector predictors.

5 A second set of motion vector predictor candidates L_1' is obtained in step S608.

The second set of motion vector predictors L_1' is composed of the remaining motion vector predictors of the first set L_1 and of additional motion vectors, for example corresponding to the motion vectors of the block 710, 720, 730 and 740 of the reference image as represented on figure 7. Further, the 2 predictors among 770, 760, 750
10 which were not selected in S600 can be added as possible motion vector predictors. Each motion vector predictor of the set L_1' has a corresponding index.

As already mentioned with reference to figure 1, a scaling of
15 motion vectors could be necessary to obtain a set of motion vectors having the same scale. However, it may be considered that scaling is a complex process. As a consequence, increasing the number of scalings could increase the complexity of the encoding and decoding processes. A solution to limit the increase of complexity could be to forbid scaling
20 or limit the number of authorized scalings during the generation of the set of candidates. For instance, in step S608, additional motion vector predictors could be added, if they do not require any scaling or, if a scaling is necessary, an additional motion vector requiring scaling is added only if a budget of authorized scalings is not already used. If this
25 budget is already used, then the additional motion vector predictor is not considered and a new predictor is tested. Another embodiment could be to consider only motion vector predictors with the same POC difference as the current motion vector to predict.

Next, a reduction process is applied to the second set of
30 motion vector predictors in step S610 to obtain a reduced second set of motion vector predictors L_1'' of N_2 vectors. The reduction process eliminates the duplicates, so that all motion vector predictors of L_1'' are different from one another. The number of duplicates of each vector

kept in L1" is recorded and stored in a memory for a subsequent use in step S612 described hereafter.

It is then checked in step S628 whether the number of motion vector predictors N2 is higher than or equal to N_{\max} . In case of positive answer, step S628 is followed by step S630 already described.

In case of negative answer, it is necessary to add more motion vector predictors to the reduced second set of motion vector predictors L1" to obtain the final set of N_{\max} motion vector predictors.

Following the test S628, in case of negative answer, an importance value is assigned to each remaining motion vector predictor candidate of the reduced second set of motion vector predictors L1" in step S612.

In an alternative embodiment, step S612 follows directly test S606, in case of negative answer to test S606.

The importance value is computed in this embodiment as the number of duplicates of a given motion vector predictor, using the number of duplicates of a given motion vector predictor computed and stored during steps S604 and S610. Taking the example of figure 1, two vectors, V_0 and V_3 , are equal, so vector V_0 has an importance value equal to 2.

In an alternative embodiment, the importance value can be computed as a function of the distance to a representative vector of the set of vectors considered, such as the average value of the vectors of the set or the median of the vectors of the set. Then, the importance may be computed as the inverse of the distance of a given vector of the set V_n to the representative vector: the closer a vector V_n is to the representative vector of the set, the higher the importance of V_n .

Then, the N2 remaining motion vector predictor candidates are ordered in step S614 according to an order of decreasing importance value. If several motion vector predictors have the same importance value, they can be ordered according to the increasing order of their indexes.

The re-ordered motion vector predictors are re-assigned increasing indexes $\{V_0, V_1, \dots, V_{N2-1}\}$.

In the following step S616, a variable n is initialized to 0 and a variable N is initialized to $N2$, which is the current number of motion vector predictors in the re-ordered set.

Next, in step S618 following step S616, virtual motion vector predictor candidates are added to the re-ordered set. In this embodiment, the virtual motion vector predictors are computed from the remaining motion vector predictors, ordered according to their importance. The motion vector predictor of index n of the re-ordered set, V_n of coordinates (V_{n_x}, V_{n_y}) , is considered. The following list of 8 virtual motion vector predictors, defined by their coordinates, can be computed from V_n , by adding successively +off and -off to one or the two coordinates of V_n : $\{(V_{n_x}+off, V_{n_y}), (V_{n_x}-off, V_{n_y}), (V_{n_x}+off, V_{n_y}+off), (V_{n_x}+off, V_{n_y}-off), (V_{n_x}-off, V_{n_y}+off), (V_{n_x}-off, V_{n_y}-off), (V_{n_x}, V_{n_y}+off), (V_{n_x}, V_{n_y}-off)\}$.

Any alternative computation of the virtual motion vector predictors starting from the motion vector predictor V_n , in particular the alternatives described above with respect to step S514 of figure 5, may be used.

This list of virtual motion vector predictors is added to the current set of motion vector predictors.

The duplicates are eliminated in step S620.

The value N is updated in step S622 to the remaining number of motion vector predictors after the removal of potential duplicates.

Next, it is checked whether N is higher than or equal to N_{max} in step S624. In case of negative answer, step S624 is followed by step S626 of increasing of the value n by 1, and steps S618 to S624 are repeated.

In case of positive answer to step S624, sufficient motion vector predictors have been obtained. Step S624 is followed by step

S630 of selection of the first N_{\max} motion vector candidates to constitute the final set of motion vector predictors L2 of N_{\max} vectors.

Alternatively, in order to reduce the algorithm complexity, we may limit the number of times we loop in steps S618 to S624 and consequently limit the number of virtual motion vector predictor candidates generated. In that case, if in step S624 N is above or equal to N_{\max} or if n is above or equal to a given maximum number of loops, S624 is followed by step S630.

One can note that in this algorithm, the motion vector predictors in the set of N_2 motion vector predictors are ordered. If step S630 follows step S606, then the set follows the order defined by the AMVP algorithm. In an embodiment, AMVP could provide an order depending on statistics of selection of motion vector predictors computed on a set of training sequences.

If step S630 is followed by step S628, motion vector predictors selected by AMVP are positioned at the beginning of the set. These first predictors are known to be the most relevant. These predictors are then followed by motion vector predictors extracted from already encoded image portions (and consequently representing the real motion in the video) but which would not have been selected by AMVP.

If step S630 follows step S624, an order depending of the motion vector importance has been defined in step S614. Additional virtual motion vector predictors are added to the set obtained after steps S610/S628/S612, but the insertion of these virtual motion vector predictors depends on the order obtained during step S614.

It may be considered as a consequence that step S630 removes the less relevant motion vector predictors.

At the encoder, step S630 is followed by step S632, analogous to step S522 of figure 5, of selection of an optimal motion vector predictor MV_i among the set of motion vector predictors for the current block, according to a predetermined criterion such as a rate-distortion criterion.

Step S632 is followed by a step S634 of encoding the motion vector of the current block using the motion vector predictor MV_i , similar to step S524 of figure 5. For example, the index i of the motion vector predictors MV_i is encoded using k bits, k being computed from N_{max} ,
 5 $k = \text{INT}_{sup}(\log_2(N_{max}))$.

Alternatively, an entropy encoding of the index i may be applied.

In yet another alternative, the index i can be encoded using a prefix type code, such as the Rice-Golomb code, in which each value i
 10 is encoded using i '1's followed by a '0'.

In a further embodiment, the motion vector predictors are stored in memory in a table of size N_{max} created during step S600. Each element of the table contains a motion vector predictor value and a flag indicating whether the value is a duplicate value compared to a
 15 previous element of the table. During step S600, all flags are initialized to "non-duplicate", and all vector predictor values are initialized to the vector (0,0). This table is initialized in step S602 with the motion vector predictors of the initial set. During steps S606 to S624, each element of this table could be manipulated (associated flag set to "duplicate",
 20 insertion of new motion predictor values, etc). The objective is to replace all elements with an associated flag equal to "duplicate" by a new non duplicate element. However, when the loop S618 to S624 stops in step S624 under the condition "n above or equal to a given maximum number of loops", it is possible that the process ends without
 25 removing all non duplicates values. In that case, all flags are set to non-duplicate during step S624 (even if some duplicate elements remain) and step S624 is followed by step S630.

The algorithm of figure 6 can also be implemented by a decoder to generate the set of motion vector predictors or motion vector
 30 candidates for a given block, except steps S632 and S634 are omitted on the decoder side.

At the decoder, the index i of the selected motion vector predictor MV_i for the given block to decode is obtained from the

bitstream, knowing N_{\max} and therefore the number of bits k on which the index i has been encoded. The steps S600 to S630 are similarly implemented to obtain the set of motion vector predictors L2, so that the index i decoded from the bitstream designates the motion vector predictor actually used by the encoder.

In case of losses during transmission, since the number N_{\max} can be systematically retrieved by the decoder, the received bitstream can be systematically parsed to extract the index i designating the selected motion vector predictor, even if, depending on the packets lost, the complete set of motion vector predictors L2 may not be obtained at the decoder.

The embodiments described above are based on block partitions of input images, but more generally, any type of image portions to encode or decode can be considered, in particular rectangular portions or more generally geometrical portions.

Figure 9 details a third embodiment for the generation of the set of motion vector predictors or motion vector candidates according to the invention. This third embodiment is a fast motion vector predictors set generation.

Firstly, similarly to step S502 of figure 5 or to step S600 of figure 6, the target number N_{\max} of motion vector predictor candidates to use is obtained in step S900.

An initial set of motion vector predictor candidates L1 is obtained in step S902 similarly to step S602 of figure 6.

Then in step S904, a pre-determined set of non-redundant predictors is added to the initial set of predictors. The pre-determined set of non-redundant predictors can be fixed or changed at sequence level or at image level. It contains N_{\max} predictor values which are different from one another. These predictor candidate values can be generated by adding offsets to a fixed value. For example, this fixed value could be the zero motion vector (0,0) or a global motion vector value of the current image.

A reduction process is applied in step S906 on the set resulting from the combination of the initial set with the pre-determined set of motion vector predictors to eliminate duplicate motion vectors so as to obtain a reduced set L1 of motion vector predictors containing N1
5 elements. In this process, the reduced set of predictor candidates contains necessarily at least N_{\max} candidates. Note that in a faster implementation, the elimination of duplicate candidates is not performed. In that case, L1 is just the combination of the initial set with the pre-determined set of motion vector predictors.

10 The first N_{\max} motion vector predictor candidates of the set L1 are selected to form the set of motion vector predictors L2 in step 908.

At encoder side, the optimal motion vector is selected in step S910 and its index i is encoded using k bits, k being computed from
15 N_{\max} , $k = \text{INT}_{\text{sup}}(\log_2(N_{\max}))$ in step S912. Steps S910 and S912 are similar to respectively steps S632 and S634 of figure 6.

Other alternative embodiments may be envisaged, such as for example starting with a large set of motion vector predictor candidates, comprising a number of vectors N larger than the target
20 number of motion vector predictors determined N_{\max} , and applying a clustering type algorithm to reduce the set of vectors. For example, a Voronoï partition can be applied to reduce the set to the N_{\max} most representative vectors of the set according to a predefined distance between the vectors of the set.

25 More generally, any modification or improvement of the above-described embodiments, that a person skilled in the art may easily conceive should be considered as falling within the scope of the invention.

30

CLAIMS

5

1. Method of encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

wherein, for at least one image portion to encode, the
10 method comprises the steps of:

-obtaining a target number of motion information predictors to be used for said image portion to encode and

-generating a set of motion information predictors consisting of said target number of motion information predictors, each motion
15 information predictor of the generated set being different from any other motion information predictor of the generated set.

2. A method according to claim 1, further comprising the steps of:

20 -selecting a motion information predictor for said image portion to encode from said generated set of motion information predictors, and

-encoding an item of information representative of said selected motion information predictor based upon said target number
25 obtained.

3. A method according to any of claims 1 or 2, wherein in the step of obtaining a target number of motion information predictors to be used for said image portion to encode, said target number is set equal
30 to a predetermined value for any image portion to encode of the sequence of digital images.

4. A method according to any of claims 1 or 2, wherein in the step of obtaining a target number of motion information predictors to be used for said image portion to encode, said target number is determined, for a given image portion to encode, depending upon an encoding information of said given image portion to encode.

5. A method according to any of claims 1 to 4, wherein the step of generating a set of motion information predictors comprises:

- obtaining a first set of motion information predictors containing a first number of motion information predictors, and
- modifying said first set of motion information predictors by adding or removing motion information predictors to obtain a second set of motion information predictors containing said target number of motion information predictors, each motion information predictor of said second set being different from any other motion information predictor of said second set.

6. A method according to claim 5, further comprising, after obtaining said first set of motion information predictors,

- comparing said first number of motion information predictors to said target number obtained, and
- if said first number is higher than said target number,
 - selecting one or several motion information predictor candidates according to a removal criterion, and
 - removing said selected motion information predictor candidates.

7. A method according to claim 6, wherein said removal criterion takes into account a distance computed between motion information predictors of said first set of said motion information predictors.

8. A method according to claim 5, further comprising, after obtaining said first set of motion information predictors,

-comparing said first number of motion information predictors to said target number obtained, and

5 -if said first number is lower than said target number,

-obtaining an additional motion information predictor, and

-adding said additional motion information predictor to said first set of motion information predictors.

10 9. A method according to claim 8, wherein said motion information predictors are motion vectors, and wherein obtaining an additional motion information predictor comprises generating a virtual motion information predictor by adding a predetermined offset value to at least one component of a selected motion vector of said first set of
15 motion vectors.

10. A method according to claim 9, further comprising capping the number of virtual motion information predictors generated to a maximum number of virtual motion information predictors.

11. A method according to claim 9, wherein motion
20 information predictors and virtual motion information predictors are stored in a table of size given by said target number of motion information predictors, each element of the table being previously initialized to an initialization value, and the elements of the table constituting the generated set of motion information predictors

25

12. A method according to any of claims 8 to 11, further comprising a step of eliminating duplicates among the set of motion information predictors obtained by adding said additional motion information predictor to said first set of motion vector predictors.

30

13. A method according to claim 5, further comprising, after obtaining said first set of motion information predictors,

-comparing said first number of motion information predictors to said target number obtained, and

-if said first number is lower than said target number,
-obtaining a plurality of additional motion information
predictors,
-adding said plurality of additional motion information
5 predictors obtained to said first set of motion information predictors, and
-eliminating duplicates among the set of motion
information predictors obtained by adding said additional motion
information predictors to said first set of motion vector predictors to
obtain a reduced set of motion information predictors.

10

14. A method according to claim 13, further comprising
-assigning an importance value to each motion information
predictor of the reduced set of motion information predictors, and
-re-ordering the motion information predictors of said reduced set of
15 motion information predictors according to decreasing importance
value.

15. A method according to claim 14, wherein said
motion information predictors are motion vectors, further comprising
selecting a motion information predictor according to its importance
20 value and generating a virtual motion information predictor by adding a
predetermined offset value to at least one component of a selected
motion vector of said first set of motion vectors.

16. A method according to any of claims 2 to 15,
25 wherein said item of information representative of said selected motion
vector predictor is an index of said selected motion vector predictor in
said generated set of motion information predictors, and wherein said
index is encoded on a number of bits dependent upon said target
number obtained.

30 17. A method according to claim 5, wherein the
modifying step comprises,
-obtaining a fixed set of predetermined non duplicate
predictors,

-adding said fixed set to said first set of motion information predictors, and

-removing motion information predictors from the set resulting from adding the fixed set to obtain said second set of motion information predictors.

18. A method according to claim 17, wherein the fixed set contains said target number of motion information predictors.

19. A method according to claim 17 or 18, wherein the predetermined motion information predictors are obtained by adding predetermined offsets to a given motion information predictor.

20. A method according to claim 19, wherein the given motion information predictor is the motion vector (0,0).

21. A method according to any one of claims 17 to 20, wherein the fixed set is the same for any sequence of digital images.

22. A method according to any one of claims 17 to 20, wherein the fixed set is the same for two or more image portions of digital images of said sequence of digital images

23. A method according to any of the previous claims wherein a scaling is applied to the motion information predictors in dependence upon a distance between the image containing the motion information predictors and the image pointed by the motion information predictors.

24. A method according to claim 23, wherein the scaling of motion information predictors is performed until a given maximum number of scalings is attained.

25. Method of decoding a bitstream comprising an encoded sequence of digital images at least one portion of an image being encoded by motion compensation with respect to a reference image, wherein, for at least one said image portion to decode, the method comprises the steps of:

-obtaining a target number of motion information predictors to be used for said image portion to decode, and

-generating a set of motion information predictors consisting of said target number of motion information predictors, each motion information predictor of the generated set being different from any other motion information predictor of the generated set.

5

26. A method according to claim 25, further comprising a step of decoding an item of information representative of a selected motion information predictor for said image portion to decode based upon said target number obtained.

10

27. A method according to claim 26, further comprising a step of retrieving said selected motion information predictor from said generated set of motion information predictors using said decoded item of information.

15

28. A method according to any of claims 25 to 27, wherein the step of generating a set of motion information predictors comprises:

20 -obtaining a first set of motion information predictors containing a first number of motion information predictors, and

-modifying said first set of motion information predictors by adding or removing motion information predictors to obtain a second set of motion information predictors containing said target number of motion information predictors, each motion information predictor of said second set being different from any other motion information predictor of said second set.

25

29. A method according to claim 28, wherein the modifying step comprises,

30 -obtaining a fixed set of predetermined non duplicate predictors,

-adding said fixed set to said first set of motion information predictors, and

-removing motion information predictors from the set resulting from adding the fixed set to obtain said second set of motion information predictors.

5 30. Device for encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion, comprising, for at least one image portion to encode:
-means for obtaining a target number of motion information
10 predictors to be used for said image portion to encode, and
-means for generating a set of motion information predictors consisting of said target number of motion information predictors, each motion information predictor of the generated set being different from any other motion information predictor of the generated set.

15 31. Device for decoding a bitstream comprising an encoded sequence of digital images, at least one portion of an image being encoded by motion compensation with respect to a reference image portion, comprising, for at least one said image portion to
20 decode:
-means for obtaining a target number of motion information predictors to be used for said image portion to decode, and
-means for generating a set of motion information predictors consisting of said target number of motion information predictors, each
25 motion information predictor of the generated set being different from any other motion information predictor of the generated set.

30 32. A computer program which, when run on a computer, causes the computer to carry out a method for encoding a digital video signal according to any one of claims 1 to 24 or a method for decoding a bitstream according to one of the claims 25 to 29.

33. A computer-readable storage medium storing a program according to claim 32.

5 34. A method, device or computer program for encoding a sequence of digital images substantially as hereinbefore described with reference to the accompanying drawings.

35. A method, device or computer program for
10 decoding a bitstream substantially as hereinbefore described with reference to the accompanying drawings.

36. A method of encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by
15 motion compensation with respect to a reference image portion, the method comprising generating a set of motion information predictors having controlled diversity and selecting a motion information predictor for said image portion to encode from said generated set of motion information predictors.

20

37. A method as claimed in claim 36, comprising:
generating first motion information predictors;
identifying one or more first motion information predictors as seed predictors;
25 generating one or more second motion information predictors based on the seed predictor(s); and
forming said set of motion information predictors from the first and/or second motion information predictors.

30 38. A method as claimed in claim 37, wherein at least one first motion information predictor is identified such a seed predictor based on an importance of the first motion information predictor concerned.

39. A method as claimed in claim 38, wherein said importance is dependent on a number of times the first motion information predictor concerned appears among the first motion information predictors.
5

40. A method as claimed in claim 38, wherein said importance is dependent on a measure of how representative the first motion information predictor concerned is of the first motion information predictors as a whole.
10

41. A method as claimed in any one of claims 37 to 40, wherein at least one said second motion information predictor is generated by adding or subtracting an offset from one of said seed predictors.
15

42. A method as claimed in claim 41, wherein a plurality of said second motion information predictors are generated based on the same said seed predictor.
20

43. A method as claimed in claim 42, wherein the motion information predictors are vectors each having X and Y components, and the plurality of second motion information predictors are obtained by adding and/or subtracting offsets to/from one or both said components of the same said seed predictor.
25

44. A method as claimed in any one of claims 37 to 43, wherein the first motion information predictors are or include motion information predictors each associated with an image portion having a predetermined spatial and/or temporal relationship with the image portion being encoded.
30

45. A method as claimed in claim 36, comprising:

generating first motion information predictors;
checking the differences between the generated first motion
information predictors; and
excluding from said set of motion information predictors one or
5 more first motion information predictors based on the differences.

46. A method as claimed in claim 45, wherein a first
motion information predictor having the smallest difference from another
first motion information predictor is removed.

10

47. A method as claimed in any one of claims 36 to 46,
wherein a number of motion information predictors in said set is
variable.

15

48. A method as claimed in any one of claims 36 to 46,
wherein a number of motion information predictors in said set is
predetermined for a given image portion to encode.

20

49. A method of encoding a sequence of digital images
into a bitstream, at least one portion of an image being encoded by
motion compensation with respect to a reference image portion,

wherein, for at least one image portion to encode, the
method comprises the steps of:

25

-obtaining a target number of motion information predictors to
be used for said image portion to encode and

-obtaining a first set of motion information predictors
containing a first number of motion information predictors, and

-after obtaining said first set of motion information predictors,

30

-comparing said first number of motion information
predictors to said target number obtained, and

-if said first number is higher than said target number,

-selecting one or several motion
information predictors according to a removal criterion, and

-removing said selected motion information predictors to obtain a second set of motion information predictors having said target number of motion information predictors.

5

50. A method as claimed in claim 49, wherein the motion information predictors of said first set are or include motion information predictors each associated with an image portion having a predetermined spatial and/or temporal relationship with the image portion being encoded.

10

51. A method as claimed in claim 49 or 50, wherein the first set of motion information predictors are the motion information predictors used in Advanced Motion Vector Prediction.

15

52. A method as claimed in any one of claims 49 to 51, further comprising the steps of:

-selecting a motion information predictor for said image portion to encode from said second set of motion information predictors, and

20

-encoding an item of information representative of said selected motion information predictor based upon said target number obtained.

25

53. A method as claimed in any one of claims 49 to 52, wherein the motion information predictors of said second set are the first Nmax motion information predictors of said first set, where Nmax is said target number, and the or each further motion information predictor of said first set is removed.

30

54. A method of decoding a bitstream comprising an encoded sequence of digital images, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

wherein, for at least one image portion to decode, the method comprises the steps of:

-obtaining a target number of motion information predictors to be used for said image portion to decode and

5 -obtaining a first set of motion information predictors containing a first number of motion information predictors, and

-after obtaining said first set of motion information predictors,

-comparing said first number of motion information predictors to said target number obtained, and

10 -if said first number is higher than said target number,

-selecting one or several motion information predictors according to a removal criterion, and

-removing said selected motion information predictors to obtain a second set of motion information predictors having said target number of motion information predictors.

55. A method as claimed in claim 54, wherein the motion information predictors of said first set are or include motion information predictors each associated with an image portion having a predetermined spatial and/or temporal relationship with the image portion being decoded.

56. A method as claimed in claim 54 or 55, wherein the first set of motion information predictors are the motion information predictors used in Advanced Motion Vector Prediction.

57. A method as claimed in any one of claims 54 to 56, wherein the motion information predictors of said second set are the first Nmax motion information predictors of said first set, where Nmax is said target number, and the or each further motion information predictor of said first set is removed.

58. A device for encoding a sequence of digital images into a bitstream, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

the device comprising:

5 -means for obtaining a target number of motion information predictors to be used for an image portion to encode and

-means for obtaining a first set of motion information predictors containing a first number of motion information predictors, and

10 -means for comparing said first number of motion information predictors to said target number obtained, and

-means operable, if said first number is higher than said target number, to

15 -select one or several motion information predictors according to a removal criterion, and

-remove said selected motion information predictors to obtain a second set of motion information predictors having said target number of motion information predictors.

20

59. A device for decoding a bitstream comprising an encoded sequence of digital images, at least one portion of an image being encoded by motion compensation with respect to a reference image portion,

25 the device comprising:

-means for obtaining a target number of motion information predictors to be used for said image portion to decode;

-means for obtaining a first set of motion information predictors containing a first number of motion information predictors, and

30

-means for comparing said first number of motion information predictors to said target number obtained, and

-means operable, if said first number is higher than said target number, to:


-select one or several motion information predictors according to a removal criterion, and

5 -remove said selected motion information predictors to obtain a second set of motion information predictors having said target number of motion information predictors.

10 60. A computer program which, when run on a computer, causes the computer to carry out a method for encoding a digital video signal according to any one of claims 49 to 53 or a method for decoding a bitstream according to one of the claims 54 to 57.

15 61. A computer-readable storage medium storing a program according to claim 60.

20



Application No: GB1111866.8

Examiner: Matthew Males

Claims searched: 1, 25, 30 & 31

Date of search: 24 October 2011

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
A	-	WO 2010/043806 A2 FRANCE TELECOM - see abstract; Fig 1.

Categories:

X Document indicating lack of novelty or inventive step	A Document indicating technological background and/or state of the art.
Y Document indicating lack of inventive step if combined with one or more other documents of same category.	P Document published on or after the declared priority date but before the filing date of this invention.
& Member of the same patent family	E Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

Worldwide search of patent documents classified in the following areas of the IPC

H04N

The following online and other databases have been used in the preparation of this search report

WPI, EPODOC, INSPEC

International Classification:

Subclass	Subgroup	Valid From
H04N	0007/26	01/01/2006
H04N	0007/36	01/01/2006