

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2005 (29.12.2005)

PCT

(10) International Publication Number
WO 2005/124940 A2

(51) International Patent Classification⁷: **H01R 13/658**

(74) Agent: MYERS BIGEL SIBLEY & SAJOVEC, P.A.;
P.O. Box 37428, Raleigh, North Carolina 27627 (US).

(21) International Application Number:
PCT/US2005/018713

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 26 May 2005 (26.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/578,730 10 June 2004 (10.06.2004) US
11/137,063 25 May 2005 (25.05.2005) US

(71) Applicant (for all designated States except US): **COMM-SCOPE SOLUTIONS PROPERTIES, LLC** [US/US];
1285 Southern Way, Sparks, Nevada 89431 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GORDON, W. Andrew** [US/US]; 390 Bee Caves Road, Allen, Texas 75002 (US). **CANNING, Michael Walter** [US/US]; 4340 Ridge Point Lane, Plano, Texas 75024 (US). **GOODRICH, Robert R.** [US/US]; 7440 Cape Cod Circle, Indianapolis, Indiana 46250 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: SHIELDED JACK ASSEMBLIES AND METHODS FOR FORMING A CABLE TERMINATION

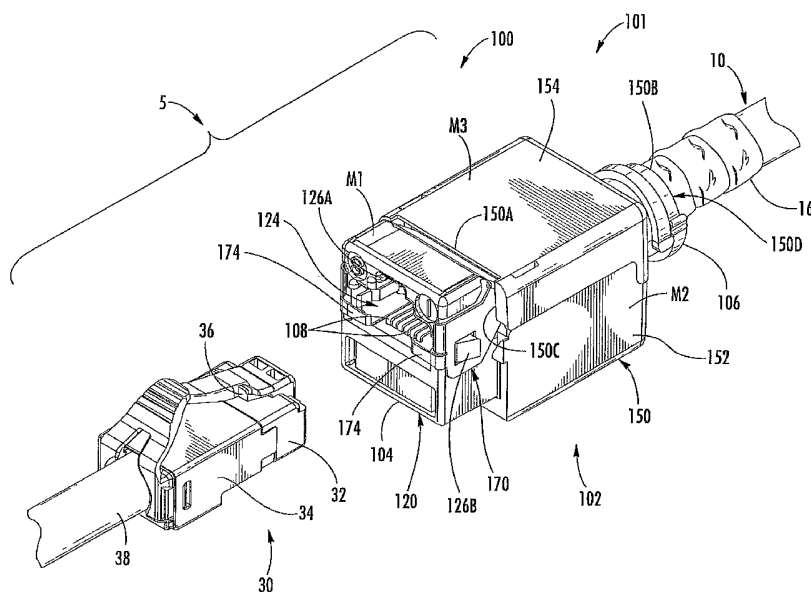

(57) Abstract: A jack assembly for use with a modular electrical plug includes a jack housing. The jack housing includes an electrically non-conductive substrate metallized with a metal shield layer. The jack housing defines a socket adapted to receive the plug. At least one electrical contact is positioned in the socket to engage the plug when the plug is inserted in the socket. An electrically conductive jumper member including a drain wire connector may be mounted on the jack housing. The drain wire connector includes a pair of connector tabs defining a slot therebetween to receive and hold the drain wire.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SHIELDED JACK ASSEMBLIES AND METHODS FOR FORMING A CABLE TERMINATION

Related Application(s)

[001] This application claims the benefit of priority from U.S. Provisional Patent Application No. 60/578,730, filed June 10, 2004, the disclosure of which is incorporated herein in its entirety.

Field of the Invention

[002] The present invention relates to electrical connectors and, more particularly, to shielded electrical connectors.

Background of the Invention

[003] Shielded transmission cables are commonly employed for the transmission of communications signals, for example, in structured cabling. Such cables may include one or more pairs of signal wires that are twisted along the length of the cable, a drain wire extending alongside the signal cables, a metal foil or braided sheath surrounding the twisted wire pair(s) and the drain wire, and an insulating jacket surrounding the wires and the metal foil or sheath. Typically, the signal wires are each covered by a respective insulation cover. Examples of cables of this type include foil-shielded twisted pair (FTP) cables (also commonly referred to as foil twisted pair or foil screened twisted pair cables). The shielding provided by the foil and the drain wire may serve to prevent radiation and signal loss and to reduce electromagnetic interference (EMI) and radiofrequency interference (RFI), and to meet electromagnetic frequency compatibility requirements. The drain wire directs extraneous signals to ground.

[004] An FTP cable may be terminated by a connector, such as a jack, that is adapted to operatively engage a mating connector, such as a plug. The jack typically includes a nonconductive housing and a surrounding metal wrap. The drain wire of

the cable is secured to the metal wrap, commonly by soldering or winding the drain wire about a post or other feature of the wrap. When a mating shielded plug is engaged with the shielded jack, the metal wrap of the jack contacts a corresponding metal wrap surrounding the plug so as to provide electrical continuity with a cable shield (e.g., foil shield) or other component connected to the wrap of the plug. The metal wrap of the jack may also serve as a continuation of the foil so that continuity of shielding is provided to and through the connection. The metal wrap of the jack may also contact a further grounded component such as a patch panel.

Summary of the Invention

[005] According to embodiments of the present invention, a jack assembly for use with a modular electrical plug includes a jack housing. The jack housing includes an electrically non-conductive substrate metallized with a metal shield layer. The jack housing defines a socket adapted to receive the plug. At least one electrical contact is positioned in the socket to engage the plug when the plug is inserted in the socket.

[006] According to method embodiments of the present invention, a method for making a jack assembly for use with a modular electrical plug includes: metallizing an electrically non-conductive substrate to form a metallized jack housing with a metal shield layer, the jack housing defining a socket adapted to receive the plug; and positioning at least one electrical contact in the socket to engage the plug when the plug is inserted in the socket.

[007] According to further embodiments of the present invention, a jack assembly for use with a modular electrical plug and a cable including a drain wire includes a jack housing. The jack housing defines a socket adapted to receive the plug. At least one electrical contact is positioned in the socket to engage the plug when the plug is inserted in the socket. An electrically conductive jumper member is mounted on the jack housing and includes a drain wire connector. The drain wire connector includes a pair of connector tabs defining a slot therebetween to receive and hold the drain wire.

[008] According to further embodiments of the present invention, a jumper member for use with a jack housing and a cable, the jack housing defining a socket adapted to receive an electrical plug connector and the cable including a drain wire, is

provided. The jumper member is electrically conductive and adapted to be mounted on the jack housing. The jumper member includes a drain wire connector. The drain wire connector includes a pair of connector tabs defining a slot therebetween to receive and hold the drain wire.

[009] According to further method embodiments of the present invention, a method for providing a cable termination includes providing a jack assembly including: a jack housing defining a socket adapted to receive the plug; at least one electrical contact positioned in the socket to engage the plug when the plug is inserted in the socket; and an electrically conductive jumper member mounted on the jack housing and including a drain wire connector, the drain wire connector including a pair of connector tabs defining a slot therebetween to receive and hold the drain wire. The method further includes connecting a cable to the jack assembly, including inserting a drain wire of the cable into the slot of the drain wire connector.

[010] According to further embodiments, a jack assembly for use with a modular electrical plug includes a jack housing including a metal-filled polymer. The jack housing defines a socket adapted to receive the plug. At least one electrical contact is positioned in the socket to engage the plug when the plug is inserted in the socket.

[011] According to further embodiments of the invention, a method for making a jack assembly for use with a modular electrical plug includes: forming a jack housing including a metal-filled polymer, the jack housing defining a socket adapted to receive the plug; and positioning at least one electrical contact in the socket to engage the plug when the plug is inserted in the socket.

[012] Further features, advantages and details of the present invention will be appreciated by those of ordinary skill in the art from a reading of the figures and the detailed description of the preferred embodiments that follow, such description being merely illustrative of the present invention.

Brief Description of the Drawings

[013] **Figure 1** is a front, perspective view of a connector system according to embodiments of the present invention, wherein a plug and a jack assembly of the connector system are shown in an uncoupled position;

[014] **Figure 2** is a front, perspective view of the connector system of **Figure 1**, wherein the plug and the jack assembly are shown in a coupled position;

[015] **Figure 3** is a partial cross-sectional view of the connector system of **Figure 1** taken along the line 3-3 of **Figure 2**;

[016] **Figure 4** is an exploded, perspective view of a terminated cable forming a part of the connector system of **Figure 1**;

[017] **Figure 5** is a front, bottom, perspective view of a housing assembly forming a part of the jack assembly of **Figure 1**;

[018] **Figure 6** is a rear, perspective view of a portion of the jack assembly of **Figure 1** and a cable partially installed therein;

[019] **Figure 7** is a rear, perspective, partially exploded view of the jack assembly of **Figure 1** with the cable installed therein;

[020] **Figure 8** is a front, perspective view of the terminated cable of **Figure 4** mounted in a mount panel; and

[021] **Figure 9** is a partial cross-sectional view of a connector system according to further embodiments of the present invention.

Detailed Description of Embodiments of the Invention

[022] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which illustrative embodiments of the invention are shown. In the drawings, the relative sizes of regions or features may be exaggerated for clarity. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[023] It will be understood that when an element is referred to as being "coupled" or "connected" to another element, it can be directly coupled or connected to the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly coupled" or "directly connected" to another element, there are no intervening elements present. Like numbers refer to like elements throughout. As used herein the term "and/or" includes any and all

combinations of one or more of the associated listed items.

[024] In addition, spatially relative terms, such as "under", "below", "lower", "over", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is inverted, elements described as "under" or "beneath" other elements or features would then be oriented "over" the other elements or features. Thus, the exemplary term "under" can encompass both an orientation of over and under. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[025] Well-known functions or constructions may not be described in detail for brevity and/or clarity.

[026] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[027] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[028] As used herein, the term "drain wire" means an uninsulated wire in a cable that is in contact with a shield of the cable, such as a metal foil or braided tube, throughout a major portion of its length.

[029] With reference to **Figures 1-8**, a shielded jack assembly **100** according to embodiments of the present invention is shown therein. The jack assembly **100** may be operatively connected and mounted on a cable **10** (e.g., an FTP cable) to form a terminated cable **101**. The jack assembly **100** is adapted to operatively receive and couple with a modular plug **30** associated with a cable **38** (as shown **Figure 2**) to provide continuity between the cables **10** and **38** for transmitting electrical signals, etc., therebetween in known manner. As discussed in more detail below, the jack assembly **100** provides EMI/RFI shielding between the interconnected cables **10**, **38**. The jack assembly **100** also provides continuity between a drain wire **14** of the cable **10** and a drain wire of the cable **38** and/or a mount panel or the like. The plug **30** may also be shielded. The jack assembly **100** and the plug **30** may together form a connector system **5** (**Figures 1-3**) that may be employed to make connections in structured cabling, for example.

[030] The plug **30** may be a plug assembly constructed as disclosed in Applicants' U.S. Provisional Patent Application Serial No. 60/578, 642, filed June 10, 2004, Attorney Docket No. 9457-17PR and as disclosed in Applicants' U.S. Patent Application Serial No. _____, filed concurrently herewith, inventors Gordon et al., Attorney Docket No. 9457-17, the disclosures of which are hereby incorporated herein by reference in their entireties.

[031] The jack assembly **100** has a front end **104** and a rear end **106** and defines an EMI/RFI shield **102** (**Figures 1 and 3**) that extends continuously from the end **104** to the end **106**. The jack assembly **100** includes a housing assembly **110** (**Figures 5 and 6**), a can assembly **150** and a jumper member in the form of a jack wrap or clip **170**. The housing assembly **110** includes a front inner housing member or jack frame **120**, a rear inner housing member or IDC housing **130**, and a carrier **140**. The can assembly **150** includes a pair of can members **152**, **154** that surround the IDC housing **130** and the carrier **140** and a portion of the jack frame **120**. The jack wrap **170** extends around a portion of the jack frame **120** and rearwardly into the can assembly **150**. As discussed in more detail below, the cable **10** is received through the rear end of the can assembly **150** and engages the carrier **140** and the jack wrap **170**.

[032] Turning to the jack frame **120** in more detail, the jack frame **120** extends from a front end **120A** to a rear end **120B** (**Figure 4**). The jack frame **120**

includes a body 122 defining a socket 124 adapted to receive the plug 130. The body 122 has a latch feature 126A (Figure 1) in the socket 124 adapted to releaseably engage a latch feature 36 of the plug 30 to secure the plug 30 in the socket 124. Side latch tabs 126B extend laterally from the body 122. The side latch tabs 126B may be adapted to secure the jack assembly 100 in a bezel or mount plate, for example. A latch tab 126C (Figure 5) extends from the rear end of the body 122 and defines a slot. A metallization layer M1 covers the body 122, as discussed below in more detail.

[033] The IDC housing 130 is coupled to the jack frame 120 by a tab 132A that engages the slot in the tab 126C (Figure 5).

[034] The carrier 140 is secured to the IDC housing 130 by a post 141 (Figure 3). The carrier 140 is secured to the jack frame 120 by clips 144 (Figure 4). The carrier 140 defines slots 142 to receive conductor members 12 of the cable 10. Insulation displacement connectors (IDC's) or the like are disposed in the slots 142 and provide electrical connections between the conductor members and respective contacts 108 (Figure 1) mounted on the carrier 140. The contacts 108 are configured and positioned in the socket 124 to engage corresponding contacts of the plug 30 when the plug 30 is mated to the jack assembly 100.

[035] With reference to Figure 1, the can members 152, 154 define a front end 150A, a rear end 150B, a front opening 150C and a rear cable opening 150D of the can assembly 150. Each of the can members 152, 154 includes a body 156, a latch 160 to secure the can member 152, 154 to the jack frame 120, a latch 162 to secure one can member to the other can member, a neck 164, and a flange 166. The can member 152 has a metallization layer M2 covering its body 156. The can member 154 has a metallization layer M3 covering its body 156. The can assembly 150 defines a chamber 151 (Figure 3) that holds the housing assembly 110.

[036] As best seen in Figure 4, the jack wrap 170 includes a top band or body 171 and spaced apart side walls 172 extending forwardly from either end of the body 171. Latch apertures 172A are defined in the side walls 172 and receive the latch features 126B to secure the jack wrap 170 to the jack frame 120. Bendable spring tabs 174 extend inwardly from the side walls 172 into or across the socket 124. A bridge portion 176 extends rearwardly from the body 171 to a pair of connector

tabs **178A** defining a slot **178B** therebetween. The connector tabs **178A** and the slot **178B** may be generally configured as an IDC. A second slot **178C** is defined in the bridge portion **176**. A trough **176A** is formed in the bridge portion **176**.

[037] According to some embodiments of the present invention, the length **E** (**Figure 6**) of the tabs **178A** is between about 0.130 and 0.125 inch. According to some embodiments, the nominal width **F** (**Figure 4**) of the slot **178B** is between about 0.005 and 0.015 inch. According to some embodiments and as shown, the depth of the trough **176A** is substantially the same as the length of the tabs **178A**.

[038] According to some embodiments, the nominal thickness **T4** (**Figure 3**) of the jack wrap **170** is between about 0.012 and 0.008 inch. According to some embodiments, the width **G** (**Figure 5**) of the side walls **172** is between about 0.325 and 0.315 inch and the width **H** (**Figure 6**) of the body **171** is between about 0.185 and 0.195 inch.

[039] The jack wrap **170** may be formed of any suitable electrically conductive material. According to some embodiments, the jack wrap **170** is formed of a metal such as steel. The jack wrap **170** may be formed by any suitable method, such as stamping from a metal sheet.

[040] The body **122**, the IDC housing **130**, the carrier **140** and the can member bodies **156** may be formed of any suitable dielectric or electrically insulating or non-conductive material. Suitable materials include polymeric or plastic materials such as polycarbonate, ABS, and/or PC/ABS blend. The members **122**, **130**, **140** and **156** may be molded. According to some embodiments, each of the members **122**, **130**, **140** and **156** comprises an integral and unitary piece.

[041] The metallization layers **M1**, **M2**, **M3** may be applied to the respective members **120**, **156** by any suitable means. The metallization layers **M1**, **M2**, **M3** may cover only the outer surfaces of the members **122**, **156**, only the inner surfaces of the members **122**, **156**, or, as shown, both the inner and outer surfaces of the members **122**, **156**. The metallization layers **M1**, **M2**, **M3** are bonded to the surfaces of the members **122**, **156**. The metallization layers **M1**, **M2**, **M3** may be formed of any suitable material such as stainless steel, gold, nickel-plated copper, silver, silvered copper, nickel, nickel silver, copper or aluminum. The metallization layers **M1**, **M2**, **M3** may be formed and applied by any suitable techniques. Suitable techniques may

include electroless coating, electroplated coating, conductive paint, and/or vacuum metallizing. According to some embodiments, the metallization layers **M1**, **M2**, **M3** are layers of nickel-plated copper applied using electroless plating.

[042] According to some embodiments and with reference to **Figure 3**, the metallization layers **M1**, **M2**, **M3** each have a thickness **T1**, **T2**, **T3** of no more than about 240 micro inches. According to some embodiments, the thicknesses **T1**, **T2**, **T3** are between about 20 and 240 micro inches. According to some embodiments, the thicknesses **T1**, **T2**, **T3** are between about 40 and 120 micro inches.

[043] In accordance with embodiments of the invention, the jack assembly **100** can be assembled and mounted on the cable **10** in the following manner. The cable **10** may be any suitable type of cable. As shown, the cable **10** includes a jacket **18** and a plastic film tube surrounding the drain wire **14**, a tubular shield sleeve **16**, and a plurality of twisted pairs of conductor members **12** (for clarity, the conductor members **12** are not shown in **Figure 3**). The shield sleeve **16** as illustrated is a metal foil shield (*e.g.*, a metal foil laminated to a plastic film backing); however, the shield sleeve **16** can be a braided metal shield tube or the like. The conductor members **12** may each include an electrical conductor surrounded by a respective layer of insulation. It will be appreciated that other types of cables may be employed.

[044] The carrier **140** may be secured to the IDC housing **130** and then to the jack frame **120** by engaging the tabs **126C** with the clip tab **132A** and engaging the clips **144** with corresponding openings in the jack frame **120** to form the housing assembly **110**. The jack wrap **170** may then be mounted on the housing assembly **110** and secured in place by engaging the side latch tabs **126B** with the apertures **172A**.

[045] The jacket **18** of the cable is pulled back or trimmed and the foil **16** is folded back so that the conductor members **12** are exposed. As shown in **Figure 6**, the conductor members **12** are laced into the slots **142** and forced into engagement with the IDC's located therein using a tool or cap, for example. In **Figure 6**, the conductor members **12** are shown after trimming excess wire length.

[046] The drain wire **14** is routed over the slot **178B** of the IDC **178**. The drain wire **14** is forced into the slots **178B**, **178C** so that the drain wire **14** is captured by the IDC **178** as shown in **Figure 7**. The drain wire **14** may be forced into the IDC

178 by pushing the drain wire 14 into the trough 176A using a tool such as a screwdriver 58. The drain wire 14 may then be trimmed as shown in **Figure 7**.

[047] The can members 152, 154 are then installed over the housing assembly 110 such that the latches 160 interlock with the jack frame 120 and the latches 162 interlock with one another. The rear opening 150D may be sized to form an interference fit with the cable 10.

[048] The terminated cable 101 can be mounted in an opening 52 of a mount panel 50, such as a patch panel, as shown in **Figure 8**. The latch tabs 126B may interlock with corresponding latch features (not shown) of the mount panel 50. The mount panel 50 may include a metallization layer M4 or other grounding layer or structure. The metallization layer M4 may be grounded via a rack or the like. The side walls 172 may engage the metallization layer M4 when the jack assembly 100 is mounted in the opening 52 so that electrical continuity is provided between the drain wire 14 and the metallization layer M4.

[049] As discussed above, the jack assembly 100 provides a shielded termination and connection. The metallization layers M1, M2, M3 serve as metal shield layers that, in combination, extend from the front end 104 to the rear end 106. The shield formed by the metallization layer M1 is tubular. Likewise, the metallization layers M2 and M3 in combination form a tubular shield.

[050] As shown, the layers M2, M3 may overlap portions of the layer M1. According to some embodiments, the length of overlap J (**Figure 3**) is at least 0.20 inch. The jack wrap 170 may also form a part of the tubular shield 102. The can assembly 150 overlaps and contacts the foil 16 of the cable 110 to provide electrical continuity between the foil 16 and the can assembly 150. The overlap between the foil 16 and the can assembly 150 also provides overlap between the tubular shields defined by the foil 16 and the can assembly 150 to ensure continuity of the shield. According to some embodiments, the can assembly 150 overlaps the foil 16 a distance C of at least 0.25 inch (**Figure 3**).

[051] In the foregoing manner, the jack assembly 100 provides a substantially continuous tubular shield 102 that extends from the front end 104 to the rear end 106 at or overlapping the foil 16. That is, 360 degrees of shielding is provided from the end 104 to the end 106. According to some embodiments, the shield 102 extending

from the end 104 to the end 106 (Figures 1 and 3) is at least about 80% complete (*i.e.*, free of openings). According to some embodiments, the shield 102 is at least about 95% complete from the end 104 to the end 106.

[052] The shields formed by the metallization layers M1, M2, M3 may be grounded in any suitable manner. The drain wire 14 of the cable 10 and/or the drain wire of the cable 38 may lead to ground. The metallization layers M2, M3 contact the foil 16 to provide electrical continuity therewith. The metallization layer M1 may contact one or both of the metallization layers M2, M3 and/or the jack wrap 170 to provide a connection to ground.

[053] The jack wrap 170 provides electrical continuity between the drain wire 14 and the tabs 174 in the socket 124. The tabs 174 are adapted to engage corresponding portions of a plug wrap 34 on a housing 32 of the plug 30. The tabs 174 may be spring biased to ensure positive and adequate contact between the tabs 174 and the plug wrap 34. The plug wrap 34 is in turn electrically connected to a drain wire of the cable 38. In this manner, the connector system 5 provides electrical continuity between the respective drain wires of the cables 10 and 38, either or both of which may lead to ground. The jack wrap 170 may also provide electrical continuity with the metallization layer M4 or other grounding structure of the mount panel 50.

[054] The jack wrap 170 may be constructed to meet conventionally required or desired drain wire continuity standards. According to some embodiments, the jack wrap 170 introduces a resistance of no more than about 20 milliohms from the drain wire 14 to the contact tabs 174. According to some embodiments, the jack wrap 170 and the plug wrap 34 in combination introduce a resistance of no more than about 40 milliohms from the drain wire 14 to the drain wire of the cable 38. According to some embodiments, the jack wrap 170 introduces a resistance of no more than about 1 ohm from the drain wire 14 to the portions of the side walls 172 configured to engage the grounding layer or structures of the mount panel 50.

[055] Notably, the relatively thin metallization layers M1, M2, M3 alone may not be capable of providing sufficient or standards compliant continuity between the drain wire 14 and the socket 124 or the mount panel 50. Rather, this function may be primarily or substantially entirely served by the jack wrap 170.

[056] In accordance with some embodiments, the jack wrap 170 provides only a minority of the EMI/RFI shielding of the jack assembly 100. Rather, the shielding function is primarily served by the relatively thin and lightweight metallization layers M1, M2, M3. The drain wire 14 is thus terminated to a different component than that providing the majority of the shielding. According to some embodiments, the jack wrap 170 surrounds less than 50% of the jack assembly 100 from the front end 104 to the foil 16. According to some embodiments, the jack wrap 170 surrounds less than 15%.

[057] The jack assembly 100 may comprise a modular jack that complies with applicable standards. The jack assembly 100, the terminated cable 101 and the connector system 5 of the present invention may be particularly suitable for use in high speed data transmission lines, for example, of the type including shielded twisted wire pairs (*e.g.*, FTP cables). However, the jack assemblies, terminated cables and connector systems of the present invention may be used for other types of cables as well. The jack assembly 100 may be a RJ-type jack. According to some embodiments, the jack assembly 100 is an RJ45 jack and the socket 124 is an RJ45 opening (*i.e.*, is configured to operatively receive an RJ45 modular plug). According to some embodiments, the jack assembly 100 complies with the standards of at least one of the following: the International Electrotechnical Commission (IEC), the Telecommunications Industry Association (TIA), and the Electronics Industries Alliance (EIA). According to some embodiments, the jack assembly 100 complies with at least one of the foregoing standards as applicable for RJ45 jacks.

[058] The jack assembly 100 may provide a number of advantages over known jack assemblies. The metallization layers M1, M2, M3 and the relatively small jack wrap 170 may be applied to various geometries of jack housings. The metallization layers can be easily applied to different geometries and do not add substantially to the dimensions or weights of the housing members. Thus, housings meeting a given standard can be metallized to provide shielding without having to modify the configuration of the housings. Likewise, the jack wrap 170 can be adapted to fit or retro-fitted to various housings so that the housings need not be modified. The use of metallized plastic parts may provide significant cost savings as compared to formed metal jack wrap shields, for example.

[059] In accordance with further embodiments of the invention, various modifications may be made to the foregoing methods and devices and various features or aspects thereof may be employed without the other(s). For example, one or more of the metallization layers **M1**, **M2**, **M3** can be replaced or supplemented with metal shield components otherwise formed. For example, according to some embodiments, the metal shield layers can take the form of one or more stamped metal wraps. Similarly, according to some embodiments, the jack wrap **170** may be replaced with a jack wrap including a post or the like in place of the IDC **178**.

[060] With reference to **Figure 9**, a connector system **6** including a jack assembly **200** according to further embodiments of the present invention is shown therein. The jack assembly **200** is constructed in the same manner as the jack assembly **100** except as follows. The metallization layers **M1**, **M2**, **M3** are omitted. The jack frame body **222**, the can member **252**, and the can member **254** are each formed of an electrically conductive metal-filled polymer composite material. The metal-filled polymer components **222**, **252**, **254** provide an EMI/RFI shield **202** corresponding to the shield **102**.

[061] The metal-filled polymers of the components **222**, **252**, **254** may be the same or different. Any suitable polymers and metals may be employed. The ratio of the metal filler to the polymer may be at any suitable level. Suitable polymers may include polycarbonate, ABS, and/or a PC/ABS blend. Suitable metals may include stainless steel, nickel, and/or copper. The amount or density and distribution of the metal in the metal-filled polymer should be sufficient to provide electrical continuity required to provide the desired level of EMI/RFI shielding.

[062] One or more of the components **222**, **252**, **254** may be additionally provided with a metallization layer corresponding to the metallization layer **M1**, **M2**, or **M3**. Aspects of the jack frame assemblies **100**, **200** may be combined such that one or more of the components **222**, **252**, **254** are formed of a metal-filled polymer and one or more are provided with a metallization layer instead.

[063] According to some embodiments, the jack wrap (*e.g.*, the jack wrap **170**) may be replaced or supplemented with a jumper member that does not wrap about and/or clip onto the housing assembly (*e.g.*, the housing assembly **110**). For example, the jumper member may extend through the housing assembly.

[064] Shielded jack assemblies according to the present invention may be formed so as to be watertight or water-resistant. According to some embodiments, a rubber gasket is provided between the can members 152, 154 and/or the jack frame 120, for example.

[065] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention. Therefore, it is to be understood that the foregoing is illustrative of the present invention and is not to be construed as limited to the specific embodiments disclosed, and that modifications to the disclosed embodiments, as well as other embodiments, are intended to be included within the scope of the invention.

That which is claimed is:

1. A jack assembly for use with a modular electrical plug, the jack assembly comprising:
 - a) a jack housing including an electrically non-conductive substrate metallized with a metal shield layer, the jack housing defining a socket adapted to receive the plug; and
 - b) at least one electrical contact positioned in the socket to engage the plug when the plug is inserted in the socket.
2. The jack assembly of Claim 1 wherein the metal shield layer has a thickness of no more than about 240 micro inches.
3. The jack assembly of Claim 2 wherein the metal shield layer has a thickness of between about 40 and 120 micro inches.
4. The jack assembly of Claim 1 wherein the metal shield layer forms a tubular, electrically conductive EMI/RFI jack shield.
5. The jack assembly of Claim 1 wherein the jack housing is adapted to receive a cable such that a shield sleeve of the cable engages the metal shield layer to form a continuous EMI/RFI shield including the shield sleeve and the metal shield layer.
6. The jack assembly of Claim 5 wherein:
 - the jack housing includes a tubular, electrically conductive EMI/RFI jack shield extending at least from the shield sleeve to a front opening of the socket when the cable is installed in the jack assembly; and
 - the EMI/RFI jack shield includes the metal shield layer.
7. The jack assembly of Claim 1 wherein:
 - the jack housing includes an inner housing defining the socket and at least one can member surrounding at least a portion of the inner housing; and

the at least one can member is metallized.

8. The jack assembly of Claim 7 wherein:

the inner housing includes a metallized front section extending beyond the at least one can member.

9. The jack assembly of Claim 8 wherein a metallized portion of the can member overlaps a metallized portion of the inner housing.

10. The jack assembly of Claim 1 wherein the socket is adapted to receive an RJ-type plug.

11. The jack assembly of Claim 1 including an electrically conductive jumper member mounted on the jack housing, wherein the jumper member is adapted to couple with a drain wire of a cable.

12. The jack assembly of Claim 11 wherein the jumper member includes a jack wrap having a body surrounding at least a portion of the jack housing.

13. The jack assembly of Claim 12 wherein the jack wrap further includes at least one contact tab connected to the body and extending into the socket and positioned to engage the plug when the plug is inserted into the socket.

14. The jack assembly of Claim 11 wherein the jumper member includes a drain wire connector, the drain wire connector including a pair of connector tabs defining a slot therebetween to receive and hold the drain wire.

15. The jack assembly of Claim 14 wherein the jumper member includes a jack wrap having a body and a bridge portion connecting the drain wire connector to the body, the bridge portion defining a trough between the drain wire connector and the body.

16. The jack assembly of Claim 11 wherein the jumper member is unitary.

17. The jack assembly of Claim 11 wherein the jumper member is formed of metal.

18. A method for making a jack assembly for use with a modular electrical plug, the method comprising:

- a) metallizing an electrically non-conductive substrate to form a metallized jack housing with a metal shield layer, the jack housing defining a socket adapted to receive the plug; and
- b) positioning at least one electrical contact in the socket to engage the plug when the plug is inserted in the socket.

19. A jack assembly for use with a modular electrical plug and a cable including a drain wire, the jack assembly comprising:

- a) a jack housing defining a socket adapted to receive the plug;
- b) at least one electrical contact positioned in the socket to engage the plug when the plug is inserted in the socket; and
- c) an electrically conductive jumper member mounted on the jack housing and including a drain wire connector, the drain wire connector including a pair of connector tabs defining a slot therebetween to receive and hold the drain wire.

20. The jack assembly of Claim 19 wherein the jumper member includes a jack wrap having a body surrounding at least a portion of the jack housing.

21. The jack assembly of Claim 20 wherein the jack wrap further includes at least one contact tab connected to the body and extending into the socket and positioned to engage the plug when the plug is inserted into the socket.

22. The jack assembly of Claim 21 wherein the at least one contact tab is adapted to apply a spring bias against the plug when the plug is inserted into the socket.

23. The jack assembly of Claim 19 including a panel contact portion adapted to engage an electrically conductive portion of a mount panel when the jack assembly is mounted in the mount panel.

24. The jack assembly of Claim 19 wherein the jumper member includes a jack wrap having a body and a bridge portion connecting the drain wire connector to the body, the bridge portion defining a trough between the drain wire connector and the body.

25. The jack assembly of Claim 19 wherein the jumper member and the jack housing include respective mechanical coupling features that cooperate to secure the jumper member to the jack housing.

26. The jack assembly of Claim 19 wherein the jumper member is unitary.

27. The jack assembly of Claim 19 wherein the jumper member is formed of metal.

28. A jumper member for use with a jack housing and a cable, the jack housing defining a socket adapted to receive an electrical plug connector, the cable including a drain wire, wherein the jumper member is electrically conductive and adapted to be mounted on the jack housing and includes a drain wire connector, the drain wire connector including a pair of connector tabs defining a slot therebetween to receive and hold the drain wire.

29. The jumper member of Claim 28 including a jack wrap having a body surrounding at least a portion of the jack housing.

30. A method for providing a cable termination, the method comprising:
a) providing a jack assembly including:
a jack housing defining a socket adapted to receive the plug;
at least one electrical contact positioned in the socket to engage the plug when the plug is inserted in the socket; and

an electrically conductive jumper member mounted on the jack housing and including a drain wire connector, the drain wire connector including a pair of connector tabs defining a slot therebetween to receive and hold the drain wire; and

b) connecting a cable to the jack assembly, including inserting a drain wire of the cable into the slot of the drain wire connector.

31. The method of Claim 30 wherein the jumper member includes a jack wrap, and further including wrapping a body of the jack wrap around at least a portion of the jack housing.

32. A jack assembly for use with a modular electrical plug, the jack assembly comprising:


a) a jack housing including a metal-filled polymer, the jack housing defining a socket adapted to receive the plug; and


b) at least one electrical contact positioned in the socket to engage the plug when the plug is inserted in the socket.


33. A method for making a jack assembly for use with a modular electrical plug, the method comprising:

a) forming a jack housing including a metal-filled polymer, the jack housing defining a socket adapted to receive the plug; and

b) positioning at least one electrical contact in the socket to engage the plug when the plug is inserted in the socket.

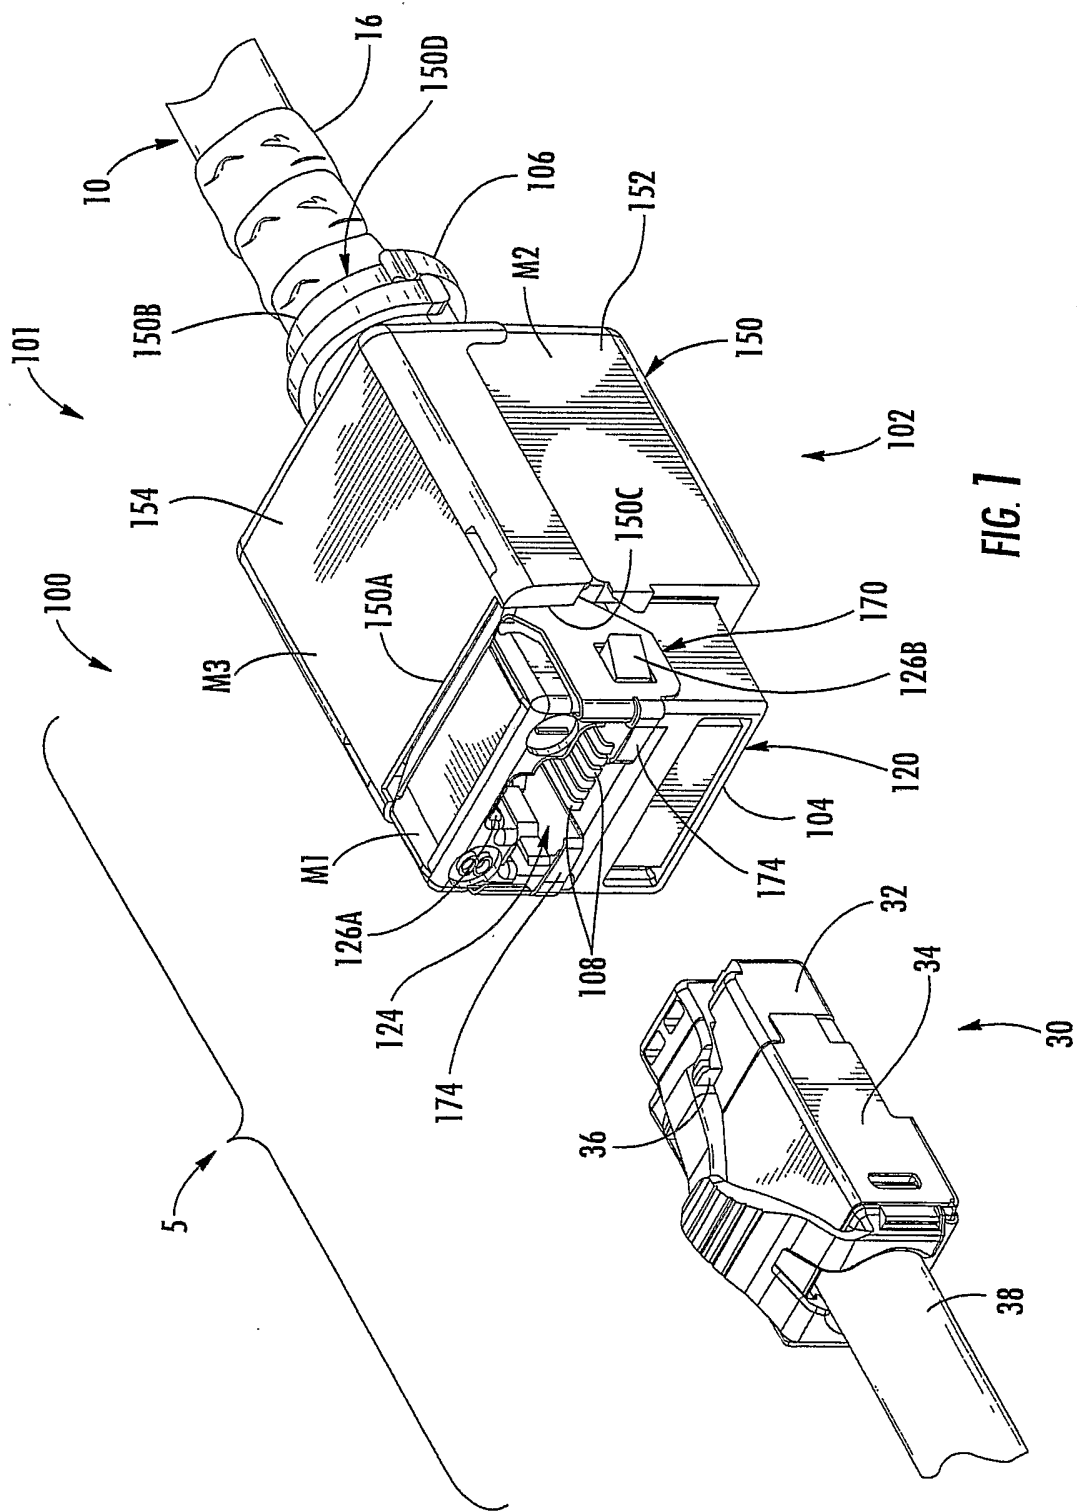

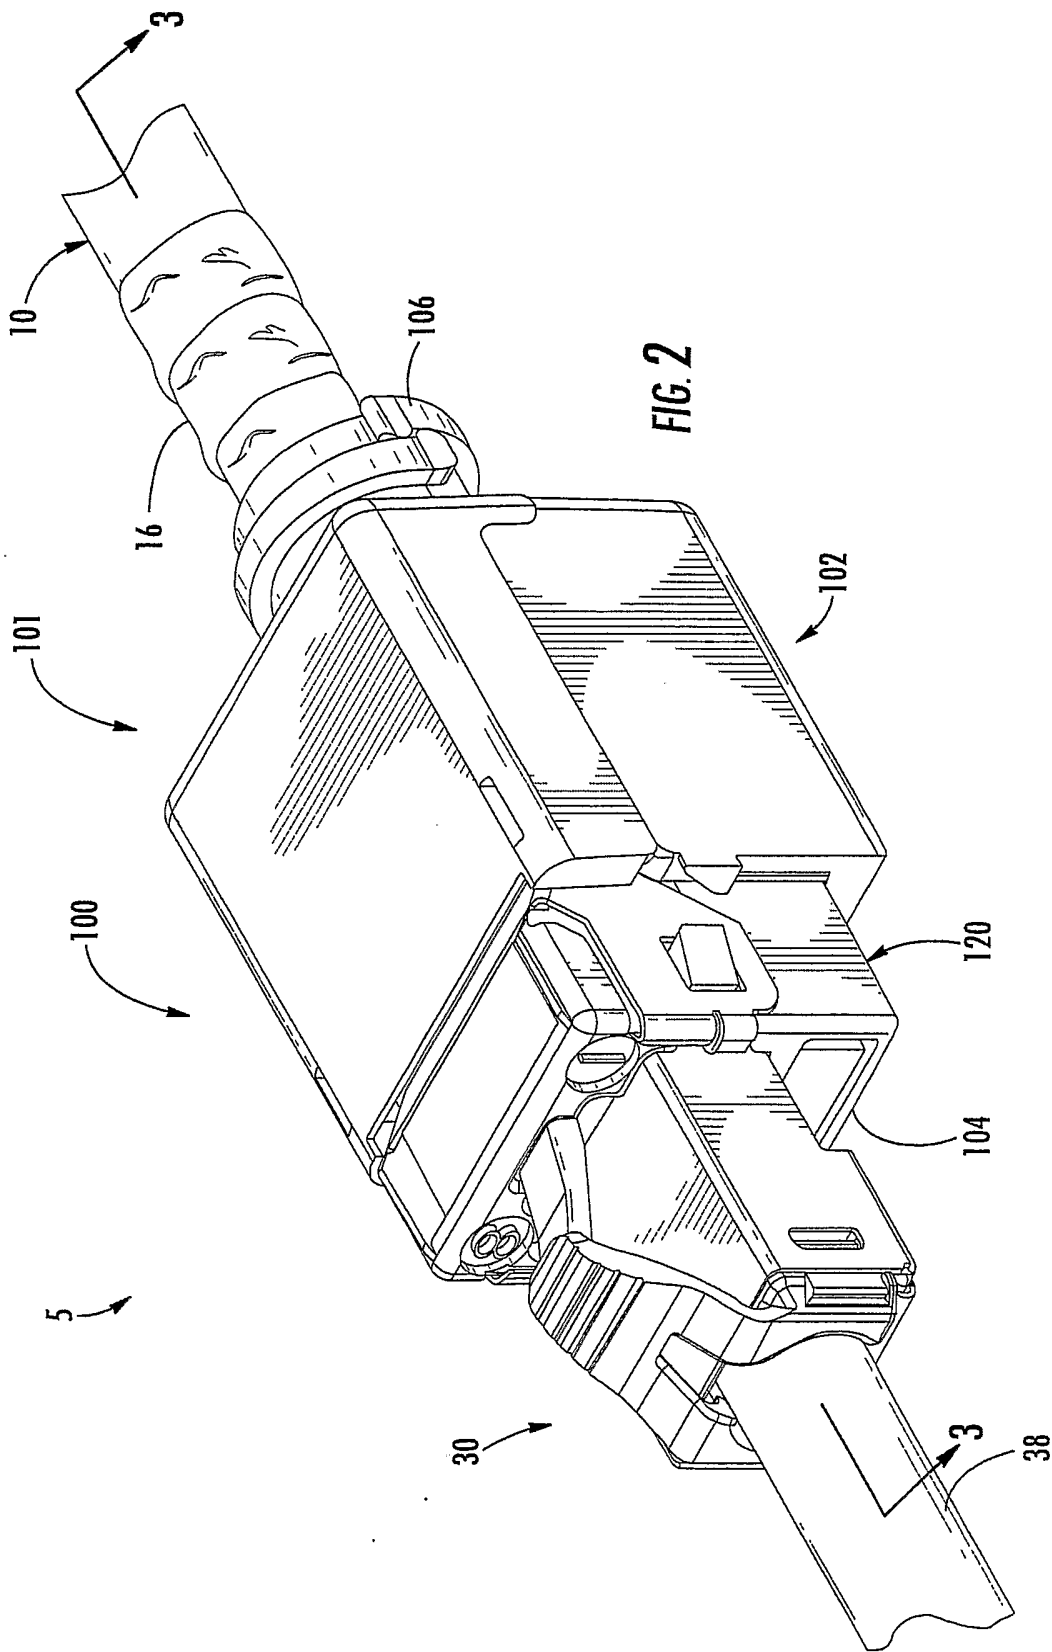

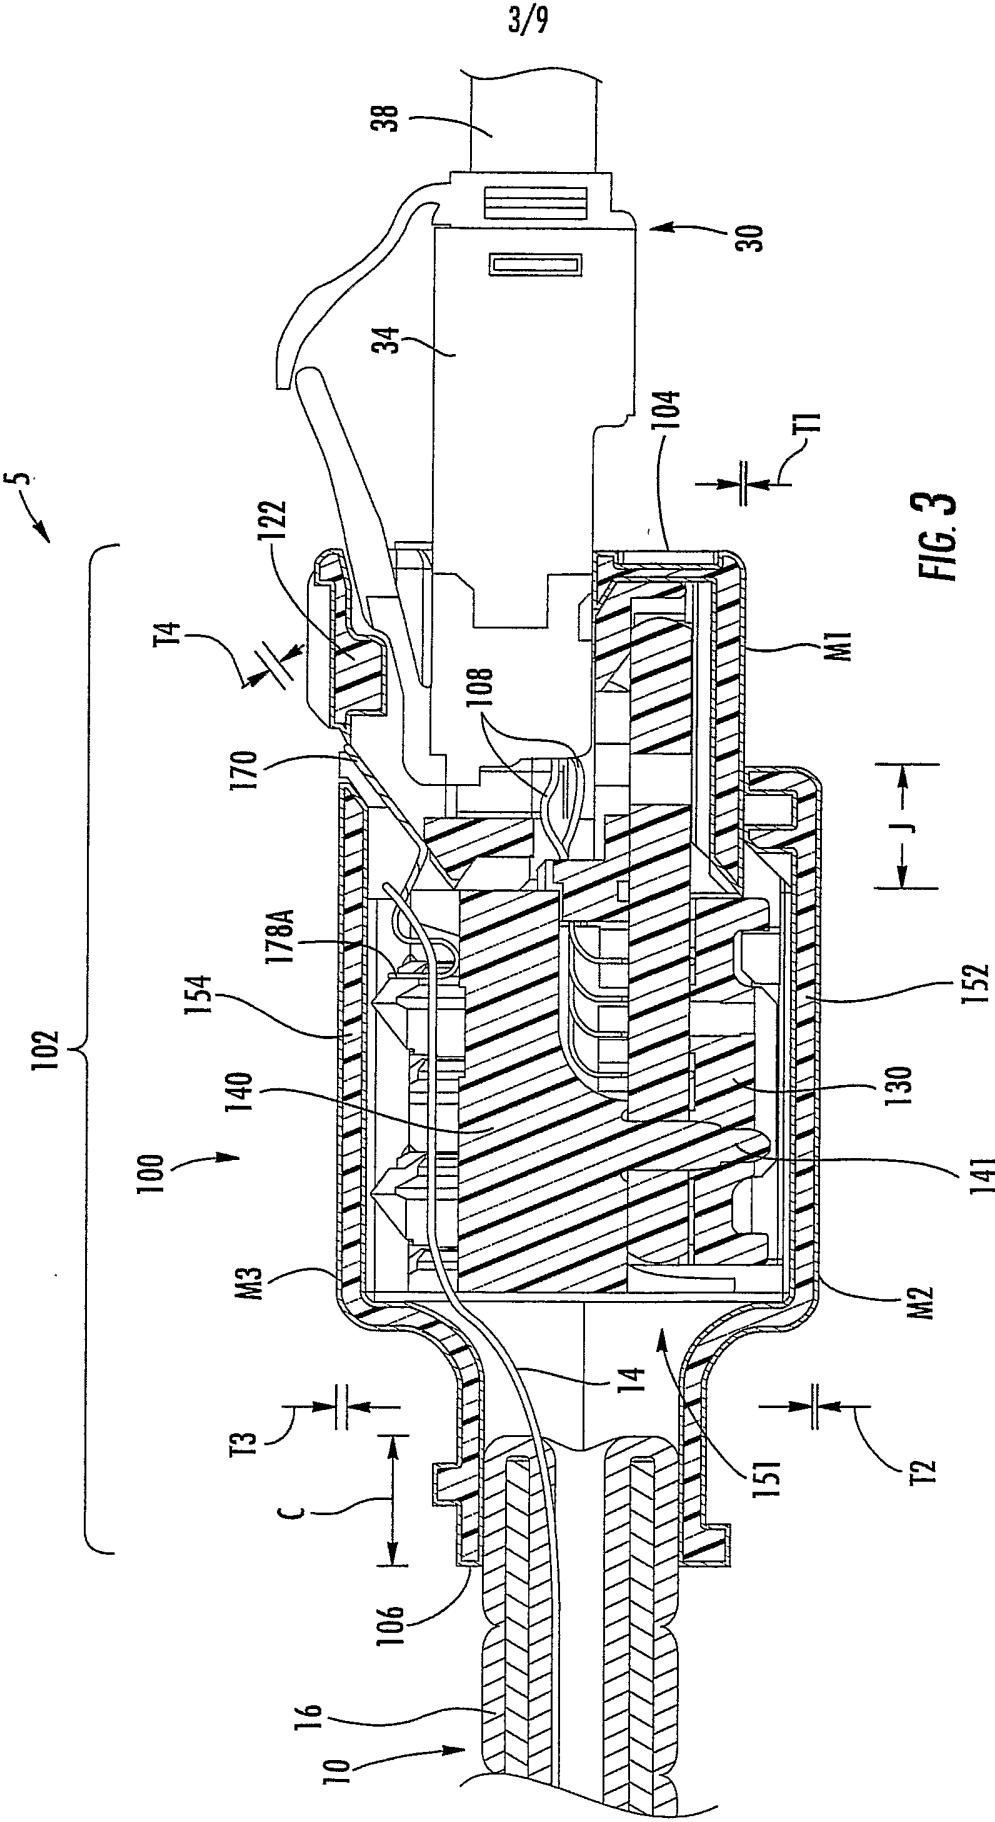



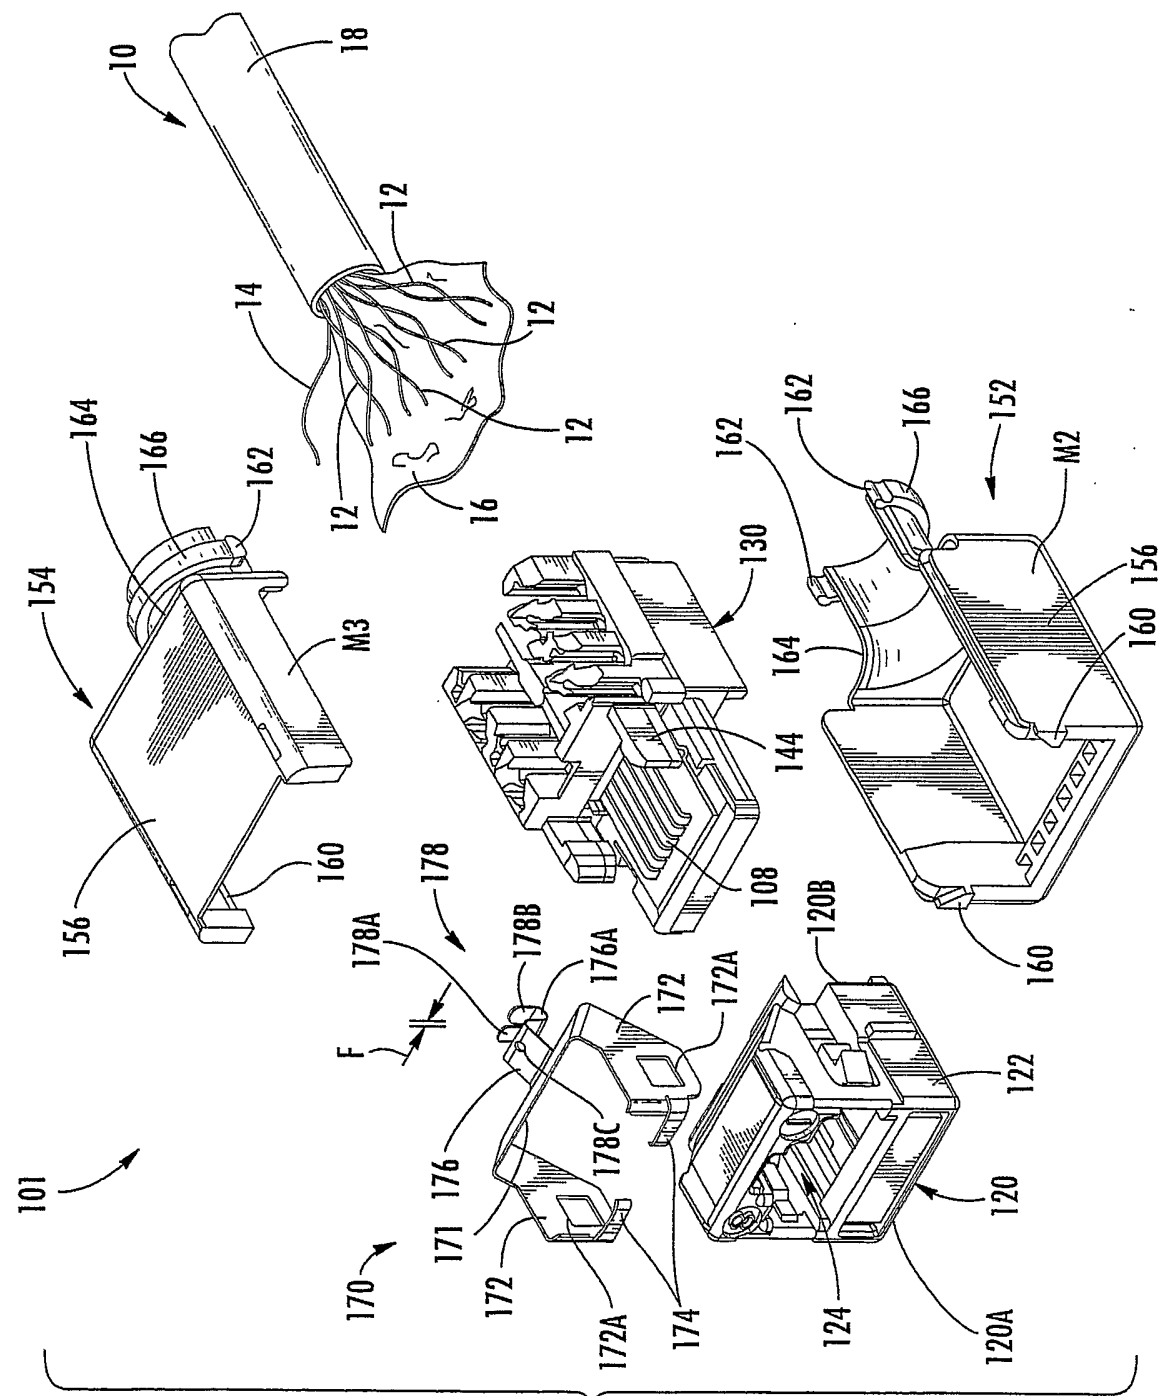


FIG. 4

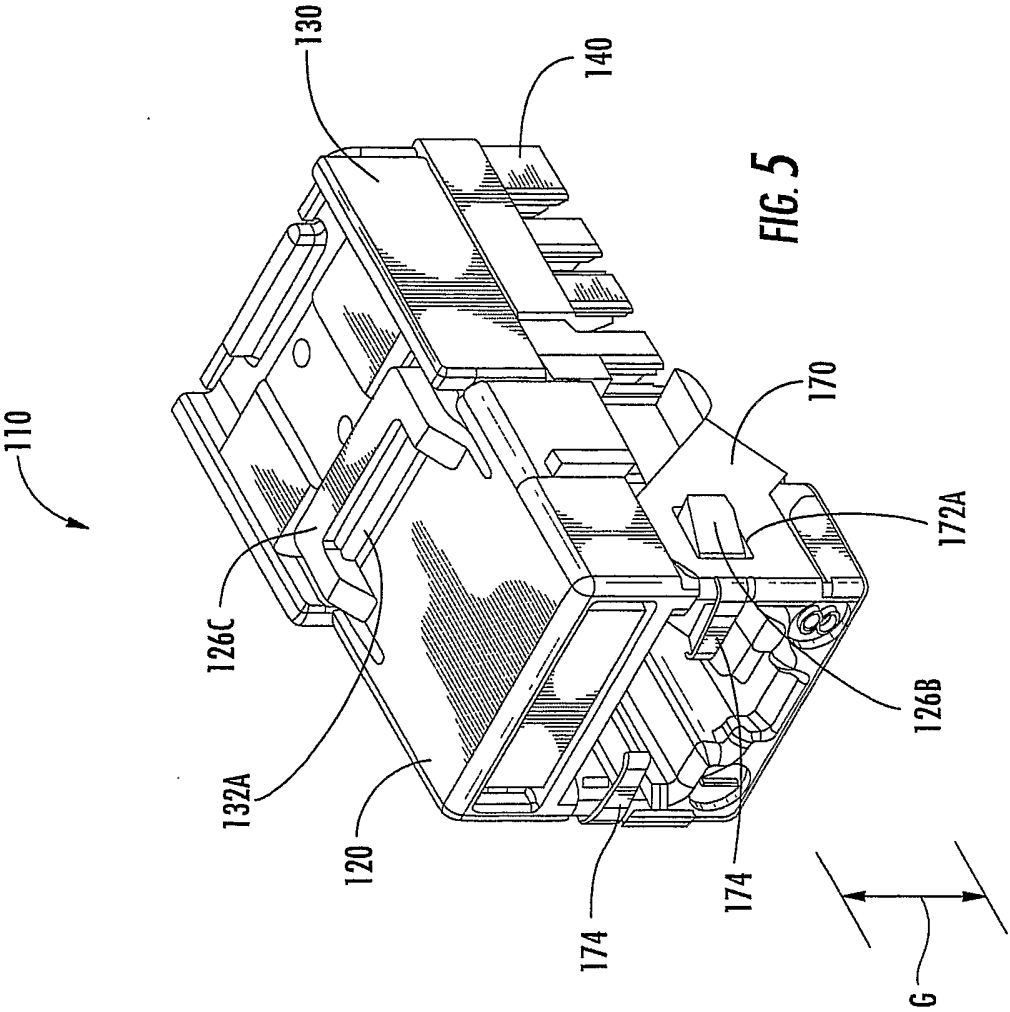

7/9

**FIG. 7**

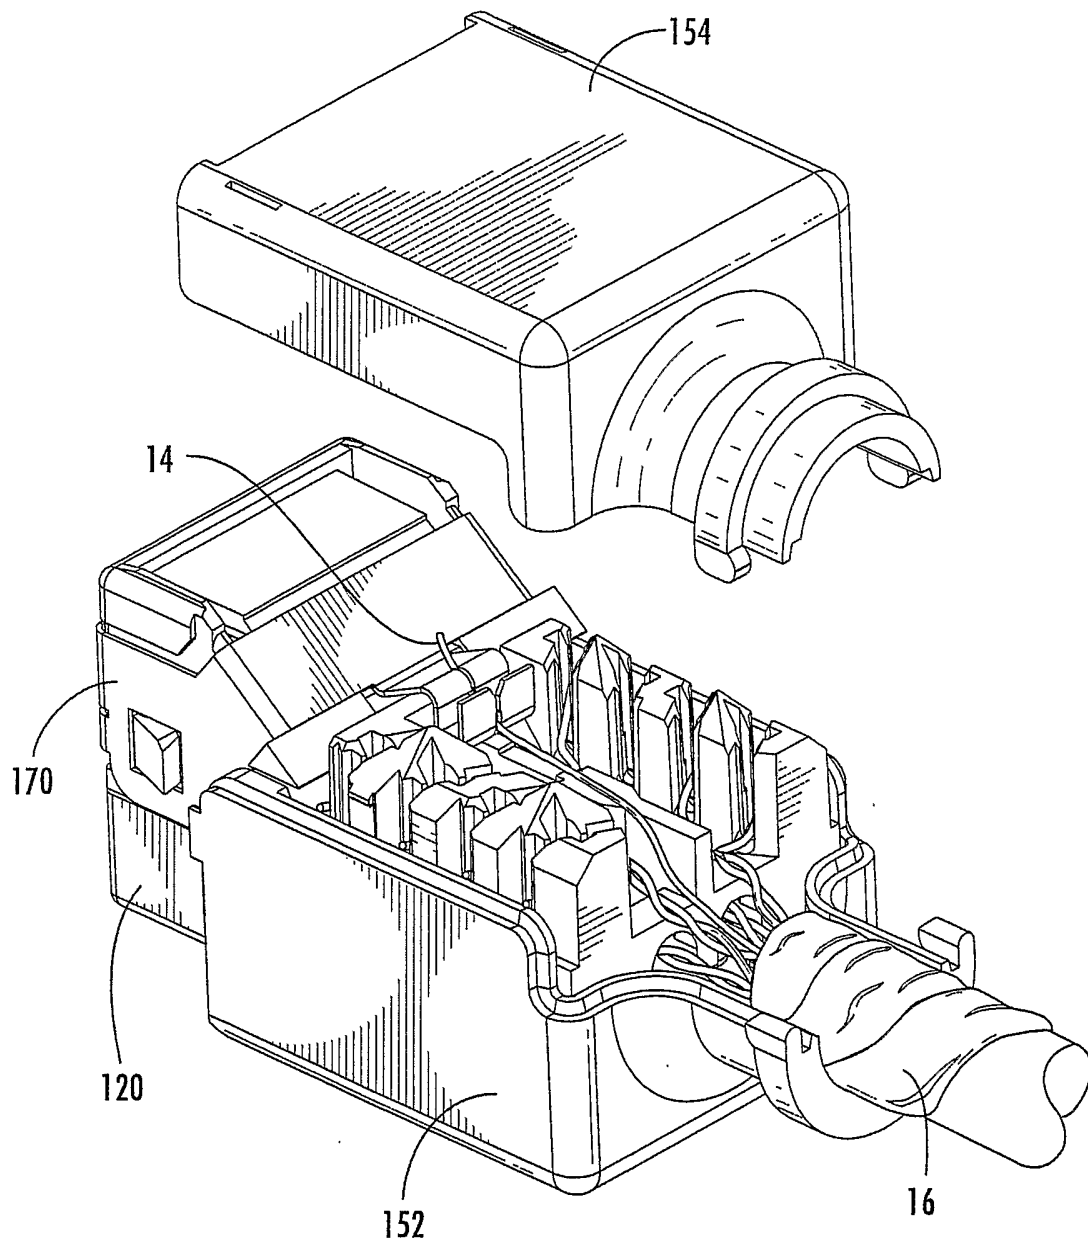