

(19)



(11)

EP 3 096 088 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
22.09.2021 Bulletin 2021/38

(51) Int Cl.:
F24F 1/00 ^(2019.01) **F24F 11/00** ^(2018.01)

(21) Application number: **16170097.6**

(22) Date of filing: **18.05.2016**

(54) **ROOM AIR CONDITIONING SYSTEM**

RAUMKLIMAANLAGENSYSTEM

SYSTÈME DE CONDITIONNEMENT D'AIR D'UN LOCAL

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **20.05.2015 JP 2015102565**

(43) Date of publication of application:
23.11.2016 Bulletin 2016/47

(73) Proprietor: **Panasonic Intellectual Property
Management Co., Ltd.
Osaka-shi, Osaka 540-6207 (JP)**

(72) Inventors:
• **YAEGASHI, Masahiro
Osaka, 540-6207 (JP)**

• **KAMATA, Shigemitsu
Osaka, 540-6207 (JP)**

(74) Representative: **Eisenführ Speiser
Patentanwälte Rechtsanwälte PartGmbB
Postfach 31 02 60
80102 München (DE)**

(56) References cited:
**EP-A1- 2 865 959 WO-A1-2011/099608
JP-A- 2013 224 755 JP-A- 2015 021 719**

• **None**

EP 3 096 088 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a room air conditioning system in an air conditioner, which includes at least four horizontal vanes (flaps) in blow-off openings and can independently change vertical angles of airflows.

2. Description of the Related Art

[0002] Unexamined Japanese Patent Publication No. 2011-099609 (PTL1) and Japanese Patent No. 5,310,792 (PTL2) disclose conventional examples of a configuration of an indoor unit in an air conditioner which is to be installed on the ceiling in a room.

[0003] The first indoor unit disclosed in PTL1 includes a controller and a human body sensor. If the human body sensor detects the presence of a person when the indoor unit starts a heating operation, the controller controls the horizontal flap in the blow-off opening that corresponds to the target area in which the detected person is present. In this way, the controller suppresses air from being directly blown into the person.

[0004] Similar to the controller in PTL1, human body sensors in the second indoor unit disclosed in PTL2 detect whether persons are present below the respective blow-off openings. If any of the human body sensors detects the presence of a person, the controller controls one of a plurality of vanes which corresponds to the target area in which the detected person is present such that air flows horizontally within this target area.

[0005] The human body sensor in the first indoor unit in PTL 1 has a rotatable opening section, which rotates when the human body sensor detects whether persons are present within the respective target areas. The above second indoor unit has a human body sensor assembly made up of the human body sensors that detect whether persons are present within the respective target areas.

[0006] Unfortunately, both the human body sensors in the first and second indoor units need to detect whether persons are present within as many as four target areas. In which case, the structure of the human body sensors may be complex and thus expensive.

[0007] Moreover, JP patent application 2015-21719 discloses a room air conditioning system from which the present invention starts. This know room air conditioning system comprises a plurality of indoor units to be installed on a ceiling and a controller that causes the plurality of indoor units to perform airflow control and temperature evenness control, wherein each of the plurality of indoor units includes an air conditioner main body whose lower surface has a periphery along which a plurality of blow-off openings are formed and a plurality of flaps rotatably disposed in the respective blow-off openings, the flaps being capable of independently changing vertical angles

of airflows and a human body sensor that detects whether a person is present below a corresponding one of the plurality of indoor units, and wherein when at least one of the human body sensors in the plurality of indoor units detects absence of a person with the airflow control being selected, the controller causes a corresponding one of the indoor units that detects the absence to perform the temperature evenness control in case of absence of user, in dependence of heating or cooling operation, the air is directed horizontally or vertically in order to reduce temperature unevenness in the whole air conditioning sauce.

SUMMARY OF THE INVENTION

[0008] The present invention provides a room air conditioning system as defined in claims 1 and 5, which is capable of reducing unevenness of room temperature without directly blowing air into a person.

[0009] The room air conditioning system according to claims 1 and 5 includes, amongst others: a plurality of indoor units to be installed on a ceiling; and a controller that causes the plurality of indoor units to perform airflow control and temperature evenness control. Each of the plurality of indoor units includes: an air conditioner main body; a plurality of flaps; and a human body sensor. A lower surface of the air conditioner main body has a periphery along which a plurality of blow-off openings are formed. The plurality of flaps are rotatably disposed in the respective blow-off openings and are capable of independently changing vertical angles of airflows. The human body sensor detects whether a person is present below a corresponding one of the plurality of indoor units. When at least one of the human body sensors in the plurality of indoor units detects the absence of a person with the airflow control being selected, the controller causes a corresponding one of the indoor units that detects the absence to perform the temperature evenness control.

[0010] According to the above configuration, when at least one of the human body sensors in the plurality of indoor units detects the absence of a person with the airflow control being selected, the controller causes a corresponding one of the indoor units that detects the absence to perform the temperature evenness control. In this way, the room air conditioning system can reduce unevenness of room temperature without blowing air directly into a person.

BRIEF DESCRIPTION OF DRAWINGS

[0011]

FIG. 1 illustrates a vertical cross section of an exemplary indoor unit in a room air conditioning system according to an exemplary embodiment of the present invention;

FIG. 2 is a plan view of the indoor unit as seen from the floor in a room;

FIG. 3 is a partial cross section of the indoor unit, which is used to explain an operation of the flaps; FIG. 4 illustrates the placement of indoor units; FIG. 5 is a block diagram of a control configuration of the room air conditioning system; FIG. 6A illustrates an operation of the flaps under temperature evenness control according to the exemplary embodiment; FIG. 6B illustrates another operation of the flaps under the temperature evenness control; FIG. 7 is a flowchart of a control operation of the room air conditioning system when indoor units perform a heating operation; and FIG. 8 is a flowchart of a control operation of the room air conditioning system when the indoor units perform a cooling operation.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0012] A description will be given below of a room air conditioning system according to some exemplary embodiments of the present invention, with reference to the accompanying drawings.

Exemplary Embodiment

[0013] FIG. 1 illustrates a vertical cross section of an exemplary indoor unit in a room air conditioning system according to an exemplary embodiment of the present invention. FIG. 2 is a plan view of a decorative panel in the indoor unit as seen from the floor in a room. FIG. 3 is a partial cross section of the indoor unit, which is used to explain an operation of the flaps.

[0014] Herein, an exemplary room air conditioning system that will be described below is installed on a ceiling. The arrangement of constituent elements in the room air conditioning system will be described with reference to the "top", "bottom", and "side" in FIG. 1.

[0015] The room air conditioning system in this exemplary embodiment includes indoor unit 10 installed on ceiling 11 in a house, a building or other structures. As illustrated in FIG. 1, indoor unit 10 is positioned in ceiling space 13 between ceiling 11 and ceiling plate 12 disposed under ceiling 11.

[0016] Indoor unit 10 includes air conditioner main body 14, which has a lower surface 14a having an opening and is formed into a rectangular shape, for example. Air conditioner main body 14 is hung from ceiling 11 with hanging bolts 15.

[0017] Thermal insulating member 16, which is made of Styrofoam (TM), for example, is disposed inside air conditioner main body 14. Thermal insulating member 16 is in contact with the inner surface of side plate 17 of air conditioner main body 14, thereby reducing condensation on side plate 17 of air conditioner main body 14.

[0018] Fan motor 21 is mounted on the lower surface of upper plate 18 of air conditioner main body 14. Fan

motor 21 extends downward and is provided with rotating shaft 22, which rotates in response to the driving of fan motor 21. The lower end of rotating shaft 22 is attached to centrifugal fan 23. Both fan motor 21 and centrifugal fan 23 constitute blower 20.

[0019] Centrifugal fan 23 has main plate 24 having a flat, circular shape. Main plate 24 has motor container 25 on the lower surface at its center, motor container 25 having a frustum shape.

[0020] Motor container 25 accommodates fan motor 21. Rotating shaft 22 of fan motor 21 extends downward with its lower end connected to bottom surface 25a of motor container 25. With the driving of fan motor 21, centrifugal fan 23 to which rotating shaft 22 is connected rotates.

[0021] Main plate 24 is provided with shroud 26 having a lower circumferential surface formed into an arc shape, for example. A plurality of vanes 27 are disposed at pre-determined spacings between main plate 24 and the inner circumferential surface of shroud 26.

[0022] Orifice 28 is disposed below shroud 26. Orifice 28 is formed into a circular shape, and its circumference is formed into an arc shape, for example.

[0023] Heat exchanger 30 is disposed between blower 20 and thermal insulating member 16. Heat exchanger 30 is formed into a substantially rectangular shape (including a rectangular shape) in a plan view by bending and folding process. Heat exchanger 30 surrounds all the sides of blower 20.

[0024] During a cooling operation, heat exchanger 30 functions as an evaporator for a coolant. During a heating operation, heat exchanger 30 functions as a radiator for the coolant. Heat exchanger 30 exchanges heat between the coolant and air sucked from the room into air conditioner main body 14. During the cooling operation, heat exchanger 30 cools the air inside the air conditioning room. During the heating operation, heat exchanger 30 heats the air inside the room.

[0025] Drain pan 31 is disposed below heat exchanger 30 so as to face lower surface 30a of heat exchanger 30. Drain pan 31 receives drain water from heat exchanger 30, thus preventing the drain water from dropping onto the floor. Drain pan 31 has central suction opening 32 through which blower 20 sucks air.

[0026] As illustrated in FIG. 1 and FIG. 2, decorative panel 33 that has a substantially rectangular shape (including a rectangular shape) is attached to the lower surface of air conditioner main body 14. Decorative panel 33 covers the opening in lower surface 14a of air conditioner main body 14.

[0027] Decorative panel 33 has central suction opening 34 communicating with suction opening 32 in drain pan 31. Suction grill 35 is detachably attached to decorative panel 33 so as to cover suction opening 34. The surface of suction grill 35 which faces air conditioner main body 14 is provided with filter 36. Filter 36 captures dust or other foreign matter in air to be absorbed into air conditioner main body 14 through suction opening 34 in dec-

orative panel 33.

[0028] Decorative panel 33 has blow-off openings 37, through which air whose temperature has been adjusted by indoor unit 10 is supplied to the interior of the room. Blow-off openings 37 are positioned outside the rectangular suction opening 34 in decorative panel 33 and along the respective four sides of decorative panel 33. When centrifugal fan 23 is rotated by fan motor 21 through rotating shaft 22, air in the room is sucked into indoor unit 10 via both suction opening 34 in decorative panel 33 and suction opening 32 in drain pan 31. Then, dust and other foreign matter are removed from the air by filter 36. After having entered indoor unit 10, the air passes through heat exchanger 30 while being subjected to the heat exchange, so that the temperature of the air is adjusted. The resultant air is returned to the interior of the room through blow-off openings 37 in decorative panel 33, thereby adjusting the room temperature.

[0029] As illustrated in FIG. 2 and FIG. 3, flaps 38, each of which can change a direction of airflow, are provided in respective blow-off openings 37 formed along the four sides of decorative panel 33. Hereinafter, when the flaps are collectively indicated, the flaps are referred to as flaps 38, whereas when the flaps are individually indicated as opposing pairs of flaps, the flaps are referred to as flaps 38A and 38B.

[0030] In this exemplary embodiment, flaps 38 include the opposing pair of flaps 38A (for example, a first pair of flaps) and the opposing pair of flaps 38B (for example, a second pair of flaps), in which a direction in which flaps 38A face each other is orthogonal to that in which flaps 38B face each other. Each of flaps 38 has support shafts (not illustrated) at both longitudinal ends and is attached to both short sides of a corresponding blow-off opening 37 through the support shafts. Consequently, flaps 38 are supported so as to be rotatable around the support shafts. Hinge 39 is provided on the rear surface of each flap 38 which faces air conditioner main body 14, at substantially the middle (including the middle) in a longitudinal direction. Hinges 39 are driven by flap driving motor 40 (see FIG. 5). Flaps 38 thereby can rotate independently of one another by flap driving motor 40.

[0031] In this exemplary embodiment, as illustrated in FIG. 3, the angle of each flap 38 can change in five stages ranging from first stage (F1) to fifth stage (F5), so that a direction of airflow from each blow-off opening 37 is adjusted. In first stage (F1), the angle of flap 38 is set to the smallest value with respect to the horizontal plane, so that air flows horizontally. In fifth stage (F5), the angle of flap 38 is set to the largest value, namely, approximately 90 degrees with respect to the horizontal surface, so that air blows directly downward. Second stage (F2), third stage (F3), and fourth stage (F4) correspond to midway stages in which the angle of flap 38 changes stepwise in the range from the smallest value to the largest value.

[0032] As illustrated in FIG. 2, floor temperature sensor 41 and human body sensor 42 are disposed in decorative panel 33 at one corner. Floor temperature sensor 41 de-

fects a temperature of the floor in the room. Human body sensor 42 detects whether a person is present in the room or where a person is.

[0033] Up to this point, the configuration of the room air conditioning system in this exemplary embodiment has been described.

[0034] Next, a description will be given below of a concrete example of placement of the room air conditioning system in this exemplary embodiment inside a room, with reference to FIG. 4.

[0035] FIG. 4 illustrates the placement of indoor units;

[0036] In a typical case, a plurality of indoor units 10 are installed on the ceiling in a single air conditioning room.

[0037] In this exemplary embodiment, as illustrated in FIG. 4, indoor units 10A and 10B are installed. Hereinafter, when the indoor units are collectively indicated, the indoor units are referred to as the indoor units 10, whereas when the indoor units are individually indicated, the indoor units are referred to as indoor units 10A and 10B.

[0038] As illustrated in FIG. 4, each of indoor units 10A, 10B has single human body sensor 42. Human body sensor 42 disposed in indoor unit 10A detects whether a person is present within a predetermined region below indoor unit 10A, and human body sensor 42 disposed in indoor unit 10B detects whether a person is present within a predetermined region below indoor unit 10B.

[0039] In this exemplary embodiment, single human body sensor 42 is disposed in each of indoor units 10A and 10B. This configuration can detect whether a person is present within the region below each of indoor units 10A and 10B.

[0040] Next, a description will be given below of a control configuration of the room air conditioning system in this exemplary embodiment, with reference to FIG. 5.

[0041] FIG. 5 is a block diagram of a control configuration of the room air conditioning system.

[0042] The room air conditioning system in this exemplary embodiment includes controller 45, which may be implemented using a central processing unit (CPU) and a memory, for example and operates in accordance with a predetermined program. Controller 45 controls operations of various units constituting a plurality of indoor units 10 to which controller 45 is connected. Examples of these units include fan motors 21, flap driving motors 40, floor temperature sensors 41, and human body sensors 42.

[0043] Hereinafter, the room air conditioning system includes two indoor units 10A, 10B.

[0044] Each of indoor units 10A, 10B includes: floor temperature sensor 41 that detects a temperature of the floor in the room; and human body sensor 42 that detects the presence of a person in the room.

[0045] Floor temperature sensor 41 detects a temperature of the floor in the room, and human body sensor 42 detects the presence of a person in the room. Then, both floor temperature sensor 41 and human body sensor 42 transmit the detection results to controller 45. Controller 45 controls operations of fan motor 21 and flap

driving motor 40 in each of indoor units 10A, 10B, based on the received detection results.

[0046] Likewise, controller 45 determines whether persons are present at the sites below and corresponding to indoor units 10A, 10B, based on the detection results from human body sensor 42.

[0047] In the room air conditioning system in this exemplary embodiment, controller 45 can perform airflow control and temperature evenness control. The airflow control is performed such that air is not blown directly into a person in the room. The temperature evenness control is performed such that air circulates inside the room and thus reduces unevenness of room temperature. Both the airflow control and the temperature evenness control may be selected optionally by a user through an operation using remote controller 46, for example, disposed inside the room.

[0048] A description will be given below of an operation of the room air conditioning system when the user selects the airflow control by using remote controller 46.

[0049] When the user selects the airflow control, controller 45 detects whether persons are present below indoor units 10 by using respective human body sensors 42. If detecting the presence of a person below one of indoor units 10 (indoor unit 10A in FIG. 4), controller 45 controls the angles of the flaps 38 in indoor unit 10A such that air is not blown directly into the detected person. More specifically, for example, controller 45 controls flaps 38 so as to blow air at an angle ranging from first stage (F1) to third stage (F3).

[0050] Even when the airflow control is selected, if human body sensor 42 does not detect the presence of a person below another one of indoor units 10 (indoor unit 10B in FIG. 4), controller 45 causes indoor unit 10B to perform the temperature evenness control.

[0051] More specifically, as illustrated in FIG. 4, when human body sensor 42 in indoor unit 10A installed on the right side detects the presence of a person and human body sensor 42 in indoor unit 10B in indoor unit 10B installed on the left side does not detect the presence of a person, controller 45 causes indoor unit 10B to perform the temperature evenness control. In this way, the room air conditioning system successfully suppresses the person from being annoyed by airflow and reduces unevenness of the room temperature.

[0052] A description will be given below of an exemplary operation performed by the room air conditioning system in this exemplary embodiment under the temperature evenness control, with reference to FIG. 6A.

[0053] FIG. 6A illustrates an operation of the flaps under temperature evenness control in the exemplary embodiment.

[0054] Under the temperature evenness control, as illustrated in FIG. 6A, operations from a first step to a third step are performed in accordance with the angles of flaps 38.

[0055] More specifically, in the first step, the opposing pair of flaps 38B (for example, a first pair of flaps) rotates

such that their angles are equal to that in fifth stage (F5), and the opposing pair of flaps 38A (for example, a second pair of flaps) rotates such that their angles are equal to that in third stage (F3). Then, indoor unit 10 blows air for a preset period (e.g., approximately 10 minutes). In the second step, all flaps 38 rotate such that their angles are equal to that in fifth stage (F5). Then, indoor unit 10 blows air for a preset period (e.g., approximately 10 minutes). At the third step, the opposing pair of flaps 38B whose angles have been set to that in fifth stage (F5) in the first step rotates such that their angles are equal to that in third stage (F3). Simultaneously, the opposing pair of flaps 38A whose angles have been set to that in third stage (F3) in the first step rotates such that their angles are equal to that in fifth stage (F5). Then, indoor unit 10 blows air for a preset period (e.g., approximately 10 minutes).

[0056] In this exemplary embodiment, first, controller 45 sequentially performs the operations in the first step, the second step, and the third step. Then, controller 45 performs the above operations in the reverse sequence, that is, sequentially performs the operations in the third step, the second step, and the first step. In short, controller 45 performs the operation in the second step at which the angles of all flaps 38 are set to that in fifth stage (F5) between the operations in the first and third steps. Performing these sequential operations in this manner successfully reduces unevenness of room temperature.

[0057] In this exemplary embodiment, in both of the first step and the third step, the angles of one pair of flaps 38 are set to that in fifth stage (F5), and the angles of the remaining pair of flaps 38 are set to that in third stage (F3); however, the angles of flaps 38 in the first and third steps are not limited.

[0058] In this exemplary embodiment, the angles in the first stage (F1) and the second stage (F2) out of the first stage (F1) to the fifth stage (F5) are set such that air is not blown directly into a person in the room. In addition, under the temperature evenness control, the angle in the third stage (F3) is used as an angle that is the smallest one of the angles at which air is blown directly into a person below indoor unit 10. Therefore, if an angle of each flap 38 is set in six or more stages, for example, the angles of one pair of flaps 38 may be set to that in fourth stage (F4) and the angles of the remaining pair of flaps 38 may be set to that in sixth stage (F6), in the first and third steps under the temperature evenness control. Alternatively, if an angle of each flap 38 is set in up to four stages, for example, the angles of one pair of flaps 38 may be set to that in second stage (F2) and the angles of the remaining pair of flaps 38 may be set to that in fourth stage (F4), in the first and third steps under the temperature evenness control.

[0059] Next, a description will be given below of another exemplary operation performed by the room air conditioning system in this exemplary embodiment under the temperature evenness control, with reference to FIG. 6B.

[0060] FIG. 6B illustrates another operation of the flaps

under the temperature evenness control.

[0061] Under the temperature evenness control, as illustrated in FIG. 6B, operations from a first step to a third step are performed in accordance with the angles of flaps 38, similar to the example in FIG. 6A.

[0062] More specifically, as illustrated in FIG. 6B, in the first step, an adjacent pair of flaps 38A, 38B (for example, a first pair of flaps) rotates such that their angles are equal to that in fifth stage (F5), and the remaining adjacent pair of flaps 38A, 38B (for example, a second pair of flaps) rotates such that their angles are equal to that in third stage (F3). Then, indoor unit 10 blows air for a preset period (e.g., approximately 10 minutes). In the second step, all flaps 38 rotate such that their angles are equal to that in fifth stage (F5), similar to the example in FIG. 6A. Then, indoor unit 10 blows air for a preset period (e.g., approximately 10 minutes). In the third step, the adjacent pair of flaps 38A, 38B whose angles have been set to that in the fifth stage (F5) in the first step rotates such that their angles are equal to that in third stage (F3). Simultaneously, the adjacent pair of flaps 38A, 38B whose angles have been set to that in the third stage (F3) in the first step rotates such that their angles are equal to that in fifth stage (F5). Then, indoor unit 10 blows air for a preset period (e.g., approximately 10 minutes).

[0063] Similar to the example in FIG. 6A, first, controller 45 sequentially performs the operations in the first step, the second step, and the third step. Then, controller 45 performs the above operations in the reverse sequence, that is, sequentially performs the operations in the third step, the second step, and the first step. This successfully reduces unevenness of room temperature.

[0064] When indoor unit 10 blows air downward under the temperature evenness control in this exemplary embodiment, flaps 38 may rotate such that their angles are equal to that in fourth stage (F4) or fifth stage (F5), for example, instead of that in third stage (F3). Alternatively, flaps 38 may continue to move between the location at which their angles are equal to that in first stage (F1) and the location at which their angles are equal to that in fifth stage (F5). In short, flaps 38 may perform the so-called swing operation. This is also effective in reducing unevenness of room temperature.

[0065] Up to this point, the operation performed by the room air conditioning system in this exemplary embodiment under the temperature evenness control has been described.

[0066] Next, a description will be given below of a control operation of the room air conditioning system in this exemplary embodiment.

[0067] First, a description will be given below of a control operation of the room air conditioning system when indoor units 10 perform a heating operation, with reference to FIG. 7. In this case, for example, indoor units 10A, 10B are installed in the room as a plurality of indoor units 10, especially although indoor units 10 are not discriminated against each other.

[0068] FIG. 7 is a flowchart of a control operation of

the room air conditioning system when the indoor units perform a heating operation.

[0069] As illustrated in FIG. 7, when each indoor unit 10 performs a heating operation, controller 45 determines whether the airflow control is selected (Step ST1). If the airflow control is not selected (NO at Step ST1), controller 45 waits until the airflow control has been selected.

[0070] If the airflow control is selected, namely, the ON operation is performed (YES in Step ST1), human body sensors 42 of indoor units 10 detect whether persons are present below respective indoor units 10 (Step ST2). In this case, if human body sensor 42 in each indoor unit 10 detects the presence of a person (YES in Step ST2), controller 45 waits until human body sensor 42 detects the absence of the person.

[0071] If one of human body sensors 42 in indoor units 10 does not detect the presence of a person (NO in Step ST2), floor temperature sensor 41 in indoor unit 10 in which no person is present detects whether a temperature of the floor in the room is equal to or lower than a predetermined temperature (e.g., 18°C) (Step ST3). If the temperature of the floor in the room exceeds 18°C (NO in Step ST3), the control operation returns to Step ST2, and the room air conditioning system performs the operation at Step ST2 and the subsequent operations.

[0072] If floor temperature sensor 41 detects that the temperature of the floor in the room is equal to or lower than 18°C (YES in Step ST3), controller 45 starts to perform the temperature evenness control (Step ST4).

[0073] In response to the start of the temperature evenness control, controller 45 starts to measure a time period (Step ST5). While the temperature evenness control is performed, controller 45 causes human body sensor 42 to detect whether a person is present below indoor unit 10 (Step ST6). For example, if someone enters the room and thus human body sensor 42 detects his/her presence (YES in Step ST6), controller 45 terminates the temperature evenness control quickly (Step ST8).

[0074] If human body sensors 42 does not detect the presence of a person (NO in Step ST6), controller 45 determines whether a predetermined period (e.g., 10 minutes) has elapsed from the start of the temperature evenness control (Step ST7). If 10 minutes have not yet elapsed (NO at Step ST7), the control operation returns to Step ST6, and the room air conditioning system performs the operation in Step ST6 and the subsequent operations.

[0075] If 10 minutes have already elapsed (YES in Step ST7), controller 45 terminates the temperature evenness control (Step ST8).

[0076] Controller 45 determines whether the compressor in heat exchanger 30 is stopped, namely, whether the so-called thermo-off operation has been performed (Step ST9). If the thermo-off operation has not yet been performed (NO in Step ST9), controller 45 waits until the thermo-off operation has been performed.

[0077] If the thermo-off operation has already been

performed (YES at Step ST9), the control operation returns to Step ST1, and the room air conditioning system continues to perform the operation in Step ST1 and the subsequent operations.

[0078] In this way, the control operation is performed during the heating operation.

[0079] Next, a description will be given below of a control operation of the room air conditioning system when indoor units 10 perform a cooling operation, with reference to FIG. 8. In this case, for example, indoor units 10A, 10B are installed in the room as a plurality of indoor units 10, although indoor units 10 are not especially discriminated against each other.

[0080] FIG. 8 is a flowchart of a control operation of the room air conditioning system when the indoor units perform a cooling operation.

[0081] As illustrated in FIG. 8, when indoor units 10 perform a cooling operation, controller 45 determines whether the airflow control is selected (Step ST11). If the airflow control is not selected (NO at Step ST11), controller 45 waits until the airflow control has been selected.

[0082] If the airflow control, or an ON operation, is selected (YES in Step ST11), human body sensors 42 of indoor units 10 detect whether persons are present below respective indoor units 10 (Step ST12). In this case, if human body sensor 42 in each indoor unit 10 detects the presence of a person (YES in Step ST12), controller 45 waits until human body sensor 42 detects the absence of the person.

[0083] If one of human body sensors 42 in indoor units 10 does not detect the presence of a person (NO in Step ST12), floor temperature sensor 41 in indoor unit 10 in which no person is present detects a temperature of the floor in the room (Step ST13).

[0084] More specifically, controller 45 causes floor temperature sensor 41 to detect whether a temperature of the floor in the room is a predetermined temperature (e.g., a preset temperature + α ; α is in the range from approximately 2°C to approximately 3°C) (Step ST13). If the floor temperature is lower than the predetermined temperature (NO in Step ST13), the control operation returns to Step ST12, and the room air conditioning system performs the operation in Step ST12 and the subsequent operations.

[0085] If floor temperature sensor 41 detects that the floor temperature is equal to or higher than the predetermined temperature (YES in Step ST13), controller 45 starts the temperature evenness control (Step ST14).

[0086] In response to the start of the temperature evenness control, controller 45 starts to measure a time period (Step ST15). While the temperature evenness control is performed, controller 45 causes human body sensor 42 to detect whether a person is present below indoor unit 10 (Step ST16). If detecting the presence of a person (YES in Step ST16), controller 45 terminates the temperature evenness control quickly (Step ST18).

[0087] If human body sensor 42 does not detect the presence of a person (NO in Step ST16), controller 45

determines whether a preset period (e.g., 10 minutes) has elapsed from the start of the temperature evenness control (Step ST17). If 10 minutes have not yet elapsed (NO at Step ST17), the control operation returns to Step ST16, and the room air conditioning system performs the operation in Step ST16 and the subsequent operations.

[0088] If 10 minutes have already elapsed (YES at Step ST17), controller 45 terminates the temperature evenness control (Step ST18).

[0089] Controller 45 determines whether the compressor in heat exchanger 30 is stopped, namely, whether the so-called thermo-off operation has been performed (Step ST19). If the thermo-off operation has not yet been performed (NO at Step ST19), controller 45 waits until the thermo-off operation has been performed.

[0090] If the thermo-off operation has already been performed (YES in Step ST19), the control operation returns to Step ST11, and the room air conditioning system performs the operation in Step ST11 and the subsequent operations again.

[0091] In this way, the control operation is performed during the cooling operation.

[0092] In the foregoing exemplary embodiment, controller 45 terminates the temperature evenness control after a predetermined period has elapsed; however, the control operation is not limited to this example. Alternatively, for example, controller 45 may detect a floor temperature by using floor temperature sensor 41, and may terminate the temperature evenness control if the floor temperature reaches a predetermined temperature (e.g., 26°C). This successfully reduces the risk that a user's body, especially around the foot may be overcooled during the cooling operation.

[0093] In this exemplary embodiment, when human body sensor 42 does not detect the presence of a person, indoor unit 10 in which no person is present performs the temperature evenness control; however, the control operation is not limited to this example. For example, if indoor units 10 are installed adjacent to each other and one indoor unit 10 does not detect the presence of a person, the above control operation may create following disadvantage. Specifically, for example, when indoor unit 10B does not detect the presence of a person as illustrated in FIG. 4 and thus performs the temperature evenness control, air from indoor unit 10B may be blown directly into a person present below adjacent indoor unit 10A.

[0094] To reduce the risk of the above disadvantage occurring, controller 45 may control indoor unit 10B to continuously blow air with the angle of flap 38 closest to indoor unit 10A kept unchanged (e.g., kept at the angle in first stage (F1) or second stage (F2)). In addition, controller 45 may control indoor unit 10B to perform the temperature evenness control with the angles of the remaining flaps 38 in the respective blow-off openings 37 changed in the above manner. This successfully reduces the risk of blowing air directly into a person below adjacent indoor unit 10A.

[0095] In this exemplary embodiment, as described above, controller 45 detects whether persons are present below respective indoor units 10 by using human body sensors 42, with the airflow control being selected. Then, if not detecting the presence of a person, indoor unit 10 in which no person is present performs the temperature evenness control. This successfully reduces the risk of blowing air directly into a person while reducing unevenness of room temperature.

[0096] In this exemplary embodiment, when not detecting the presence of a person, controller 45 performs a control operation, based on a temperature of the floor in the room which is detected by floor temperature sensor 41. More specifically, when the floor temperature is lower than a predetermined temperature (e.g., 28°C) during the heating operation or when the floor temperature is higher than another predetermined temperature (e.g., 25°C) during the cooling operation, indoor unit 10 that does not detect the presence of a person performs the temperature evenness control. In short, when a floor temperature is considerably different from a preset temperature, indoor unit 10 performs the temperature evenness control. This successfully reduces unevenness of room temperature efficiently.

[0097] In this exemplary embodiment, controller 45 terminates the temperature evenness control after a predetermined time period has elapsed from the start of the temperature evenness control. This successfully reduces the risk that controller 45 may excessively perform the temperature evenness control.

[0098] In this exemplary embodiment, when detecting the presence of a person by using human body sensor 42 during the temperature evenness control, controller 45 terminates the temperature evenness control. This successfully reduces the risk of blowing air directly into a person.

[0099] Up to this point, the exemplary embodiment of the present invention has been described with reference to the accompanying drawings. However, the present invention is not limited to this exemplary embodiment, and the exemplary embodiment can undergo various modifications without departing from the spirit of the invention.

[0100] A room air conditioning system, as described above, according to an exemplary embodiment of the present invention includes, inter alia: a plurality of indoor units to be installed on a ceiling; and a controller that causes the plurality of indoor units to perform airflow control and temperature evenness control. Each of the plurality of indoor units includes: an air conditioner main body; a plurality of flaps; and a human body sensor. A lower surface of the air conditioner main body has a periphery along which a plurality of blow-off openings are formed. The plurality of flaps are rotatably disposed in the respective blow-off openings and are capable of independently changing vertical angles of airflows. The human body sensor detects whether a person is present below a corresponding one of the plurality of indoor units. When at least one of the human body sensors in the

plurality of indoor units detects the absence of a person with the airflow control being selected, the controller causes a corresponding one of the indoor units which detects the absence to perform the temperature evenness control. In this way, the room air conditioning system can reduce the risk of blowing air directly into a person while reducing unevenness of room temperature.

[0101] In the foregoing room air conditioning system, each of the plurality of indoor units preferably further includes a floor temperature sensor that detects a temperature of a floor in a room. When the absence of a person is detected and at least one of the floor temperature sensors detects a state that the temperature of the floor in the room is lower than a predetermined temperature during a heating operation or higher than a predetermined temperature during a cooling operation, the controller causes a corresponding one of the indoor units that detects the state to perform the temperature evenness control. In this way, the room air conditioning system can reduce unevenness of room temperature efficiently.

[0102] In the foregoing room air conditioning system, the controller may terminate the temperature evenness control after a predetermined time period has elapsed from a start of the temperature evenness control. In this way, the room air conditioning system can reduce the risk that the controller may excessively perform the temperature evenness control, thereby operating efficiently.

[0103] In the foregoing room air conditioning system, when the human body sensor of the indoor unit performing the temperature evenness control detects the presence of a person, the controller may terminate the temperature evenness control. In this way, the room air conditioning system can reduce the risk of blowing air directly into a person.

[0104] In the foregoing room air conditioning system, the plurality of flaps preferably include a first pair of flaps opposing each other and a second pair of flaps opposing each other, the first pair of flaps and the second pair of flaps being disposed perpendicularly to each other.

[0105] In the room air conditioning system, the controller may perform the temperature evenness control by sequentially performing: a first step of positioning, of the plurality of flaps, the first pair of flaps at an angle of the lowest location and the second pair of flaps at an angle of a middle location; a second step of positioning all of the plurality of flaps at the angle of the lowest location; and a third step of positioning the first pair of flaps at the angle of the middle location and the second pair of flaps at the angle of the lowest location.

[0106] In the room air conditioning system, the plurality of flaps preferably include a first pair of flaps disposed adjacent to each other and a second pair of flaps disposed adjacent to each other. The controller may perform the temperature evenness control by sequentially performing: a first step of positioning, of the first and second pairs, the first pair of flaps at an angle of the lowest location and the second pair of flaps at an angle of a middle location; a second step of positioning all of the plurality

of flaps at the angle of the lowest location; and a third step of positioning the first pair of flaps at the angle of the middle location and the second pair of flaps at the angle of the lowest location.

[0107] In the above ways, the room air conditioning system can reduce the risk of blowing air directly into a person while reducing unevenness of room temperature efficiently.

Claims

1. A room air conditioning system, comprising:

a plurality of indoor units (10, 10A, 10B) to be installed on a ceiling (11); and
a controller (45) that causes the plurality of indoor units (10, 10A, 10B) to perform airflow control and temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18),
wherein each of the plurality of indoor units (10, 10A, 10B) includes:

an air conditioner main body (14) whose lower surface (14a, 30a) has a periphery along which a plurality of blow-off openings (37) are formed;

a plurality of flaps (38, 38A, 38B) rotatably disposed in the respective blow-off openings (37), the flaps (38, 38A, 38B) being capable of independently changing vertical angles of airflows; and

a human body sensor (42) that detects whether a person is present below a corresponding one of the plurality of indoor units (10, 10A, 10B),

wherein when at least one of the human body sensors (42) in the plurality of indoor units (10, 10A, 10B) detects absence of a person with the airflow control being selected, the controller (45) causes a corresponding one of the indoor units (10, 10A, 10B) that detects the absence to perform the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18), **characterized in that** the plurality of flaps (38, 38A, 38B) include a first pair of flaps (38A) opposing each other and a second pair of flaps (38B) opposing each other, the first pair of flaps (38A) and the second pair of flaps (38B) being disposed perpendicularly to each other, **and in that** the controller (45) is configured to perform the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18) by sequentially performing:

a first step of positioning, of the plurality of flaps (38, 38A, 38B), the first pair of flaps (38A) at an angle of a lowest location and

the second pair of flaps (38B) at an angle of a middle location;

a second step of positioning all of the plurality of flaps (38, 38A, 38B) at the angle of the lowest location; and

a third step of positioning the first pair of flaps (38A) at the angle of the middle location and the second pair of flaps (38B) at the angle of the lowest location.

2. The room air conditioning system according to claim 1, wherein

each of the plurality of indoor units (10, 10A, 10B) further includes a floor temperature sensor (41) that detects a temperature of a floor in a room, and

when absence of a person is detected and at least one of the floor temperature sensors (41) detects a state that the temperature of the floor in the room is lower than a predetermined temperature during a heating operation or higher than a predetermined temperature during a cooling operation, the controller (45) causes a corresponding one of the indoor units (10, 10A, 10B) that detects the state to perform the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18).

3. The room air conditioning system according to claim 1, wherein

the controller (45) terminates the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18) after a predetermined time period has elapsed from a start of the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18).

4. The room air conditioning system according to claim 1, wherein

when the human body sensor (42) of the indoor unit performing the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18) detects presence of a person, the controller (45) terminates the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18).

5. A room air conditioning system, comprising:

a plurality of indoor units (10, 10A, 10B) to be installed on a ceiling (11); and

a controller (45) that causes the plurality of indoor units (10, 10A, 10B) to perform airflow control and temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18),
wherein each of the plurality of indoor units (10, 10A, 10B) includes:

an air conditioner main body (14) whose

lower surface (14a, 30a) has a periphery along which a plurality of blow-off openings (37) are formed;

a plurality of flaps (38, 38A, 38B) rotatably disposed in the respective blow-off openings (37), the flaps (38, 38A, 38B) being capable of independently changing vertical angles of airflows; and
a human body sensor (42) that detects whether a person is present below a corresponding one of the plurality of indoor units (10, 10A, 10B),

wherein when at least one of the human body sensors (42) in the plurality of indoor units (10, 10A, 10B) detects absence of a person with the airflow control being selected, the controller (45) causes a corresponding one of the indoor units (10, 10A, 10B) that detects the absence to perform the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18), **characterized in that** the plurality of flaps (38, 38A, 38B) include a first pair of flaps (38A) disposed adjacent to each other and a second pair of flaps (38B) disposed adjacent to each other, **and in that** the controller (45) is configured to perform the temperature evenness control (ST4, ST7, ST8, ST14, ST17, ST18) by sequentially performing:

a first step of positioning, of the first and second pairs, the first pair of flaps (38A) at an angle of a lowest location and the second pair of flaps (38B) at an angle of a middle location;
a second step of positioning all of the plurality of flaps (38, 38A, 38B) at the angle of the lowest location; and
a third step of positioning the first pair of flaps (38A) at the angle of the middle location and the second pair of flaps (38B) at the angle of the lowest location.

Patentansprüche

1. Raumklimatisierungssystem, umfassend:

mehrere Inneneinheiten (10, 10A, 10B), die an einer Decke (11) zu installieren sind; und
eine Steuervorrichtung (45), die bewirkt, dass die mehreren Inneneinheiten (10, 10A, 10B) eine Luftstromsteuerung und eine Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) durchführen, wobei jede der mehreren Inneneinheiten (10, 10A, 10B) umfasst:

einen Klimaanlagehauptkörper (14), des-

sen Unterseite (14a, 30a) einen Umfang aufweist, entlang dessen mehrere Ausblasöffnungen (37) ausgebildet sind;
mehrere Klappen (38, 38A, 38B), die drehbar in den jeweiligen Ausblasöffnungen (37) angeordnet sind, wobei die Klappen (38, 38A, 38B) dazu ausgelegt sind, unabhängig voneinander vertikale Winkel von Luftströmen zu verändern; und
einen Menschenkörpersensor (42), der erfasst, ob sich eine Person unter einer entsprechenden der mehreren Inneneinheiten (10, 10A, 10B) befindet,

wobei, wenn mindestens einer der Menschenkörpersensoren (42) in den mehreren Inneneinheiten (10, 10A, 10B) die Abwesenheit einer Person erfasst und die Luftstromsteuerung ausgewählt ist, die Steuervorrichtung (45) bewirkt, dass eine entsprechende der Inneneinheiten (10, 10A, 10B), die die Abwesenheit erfasst, die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) durchführt,

dadurch gekennzeichnet,

dass die mehreren Klappen (38, 38A, 38B) ein erstes Paar von Klappen (38A), die einander gegenüberliegen, und ein zweites Paar von Klappen (38B), die einander gegenüberliegen, umfassen, wobei das erste Paar von Klappen (38A) und das zweite Paar von Klappen (38B) senkrecht zueinander angeordnet sind, und
dass die Steuervorrichtung (45) dazu konfiguriert ist, die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, SST14, ST17, ST18) durch sequentielles Ausführen der folgenden Schritte durchzuführen:

einen ersten Schritt des Positionierens der mehreren Klappen (38, 38A, 38B), wobei das erste Paar von Klappen (38A) in einem Winkel einer niedrigsten Position und das zweite Paar von Klappen (38B) in einem Winkel einer mittleren Position positioniert wird;

einen zweiten Schritt des Positionierens aller der mehreren Klappen (38, 38A, 38B) in dem Winkel der niedrigsten Position; und
einen dritten Schritt des Positionierens des ersten Paares von Klappen (38A) in dem Winkel der mittleren Position und des zweiten Paares von Klappen (38B) in dem Winkel der niedrigsten Position.

2. Raumklimatisierungssystem nach Anspruch 1, wobei

jede der mehreren Inneneinheiten (10, 10A, 10B) ferner einen Bodentempersensor (41)

- umfasst, der eine Temperatur eines Bodens in einem Raum erfasst, und wenn die Abwesenheit einer Person erfasst wird und mindestens einer der Bodentemperatursensoren (41) einen Zustand erfasst, dass die Temperatur des Bodens in dem Raum niedriger als eine vorbestimmte Temperatur während eines Heizbetriebs oder höher als eine vorbestimmte Temperatur während eines Kühlbetriebs ist, die Steuervorrichtung (45) bewirkt, dass eine entsprechende der Inneneinheiten (10, 10A, 10B), die den Zustand erfasst, die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) durchführt.
3. Raumklimatisierungssystem nach Anspruch 1, wobei die Steuervorrichtung (45) die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) beendet, nachdem eine vorbestimmte Zeitspanne ab einem Start der Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) verstrichen ist.
4. Raumklimatisierungssystem nach Anspruch 1, wobei wenn der Menschenkörpersensor (42) der Inneneinheit, die die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) durchführt, die Anwesenheit einer Person feststellt, die Steuervorrichtung (45) die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) beendet.
5. Raumklimatisierungssystem, umfassend:
- mehrere Inneneinheiten (10, 10A, 10B), die an einer Decke (11) zu installieren sind; und eine Steuervorrichtung (45), die bewirkt, dass die mehreren Inneneinheiten (10, 10A, 10B) eine Luftstromsteuerung und eine Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) durchführen, wobei jede der mehreren Inneneinheiten (10, 10A, 10B) umfasst:
- einen Klimaanlagehauptkörper (14), dessen Unterseite (14a, 30a) einen Umfang aufweist, entlang dessen mehrere Ausblasöffnungen (37) ausgebildet sind; mehrere Klappen (38, 38A, 38B), die drehbar in den jeweiligen Ausblasöffnungen (37) angeordnet sind, wobei die Klappen (38, 38A, 38B) dazu ausgelegt sind, unabhängig voneinander vertikale Winkel von Luftströmen zu verändern; und einen Menschenkörpersensor (42), der erfasst, ob sich eine Person unter einer entsprechenden der mehreren Inneneinheiten

(10, 10A, 10B) befindet,

wobei, wenn mindestens einer der Menschenkörpersensoren (42) in den mehreren Inneneinheiten (10, 10A, 10B) die Abwesenheit einer Person erfasst und die Luftstromsteuerung ausgewählt ist, die Steuervorrichtung (45) bewirkt, dass eine entsprechende der Inneneinheiten (10, 10A, 10B), die die Abwesenheit erfasst, die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) durchführt, **dadurch gekennzeichnet, dass** die mehreren Klappen (38, 38A, 38B) ein erstes Paar von Klappen (38A), die nebeneinander angeordnet sind, und ein zweites Paar von Klappen (38B), die nebeneinander angeordnet sind, umfassen, und **dass** die Steuervorrichtung (45) dazu konfiguriert ist, die Temperaturgleichmäßigkeitssteuerung (ST4, ST7, ST8, ST14, ST17, ST18) durch sequentielles Ausführen der folgenden Schritte durchzuführen:

einen ersten Schritt des Positionierens des ersten und des zweiten Paares, wobei das erste Paar von Klappen (38A) in einem Winkel einer niedrigsten Position und das zweite Paar von Klappen (38B) in einem Winkel einer mittleren Position positioniert wird; einen zweiten Schritt des Positionierens aller der mehreren Klappen (38, 38A, 38B) in dem Winkel der niedrigsten Position; und einen dritten Schritt des Positionierens des ersten Paares von Klappen (38A) in dem Winkel der mittleren Position und des zweiten Paares von Klappen (38B) in dem Winkel der niedrigsten Position.

Revendications

1. Système de conditionnement d'air d'un local, comprenant :

une pluralité d'unités intérieures (10, 10A, 10B) à installer sur un plafond (11) ; et un dispositif de commande (45) qui amène la pluralité d'unités intérieures (10, 10A, 10B) à effectuer une commande d'écoulement d'air et une commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18), chacune parmi la pluralité d'unités intérieures (10, 10A, 10B) comprenant :

un corps principal (14) de climatiseur dont la surface inférieure (14a, 30a) présente une périphérie le long de laquelle une pluralité d'ouvertures de soufflage (37) sont

formées ;
 une pluralité de volets (38, 38A, 38B) disposés de manière rotative dans les ouvertures de soufflage (37) respectives, les volets (38, 38A, 38B) étant en mesure de changer indépendamment des angles verticaux des écoulements d'air ; et
 un capteur (42) de corps humain qui détecte si une personne est présente sous une unité correspondante parmi la pluralité d'unités intérieures (10, 10A, 10B),

où, lorsqu'au moins l'un des capteurs (42) de corps humain dans la pluralité d'unités intérieures (10, 10A, 10B) détecte l'absence d'une personne et la commande d'écoulement d'air est sélectionnée, le dispositif de commande (45) amène une unité correspondante parmi les unités intérieures (10, 10A, 10B) qui détecte l'absence à effectuer la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18),

caractérisé en

ce que la pluralité de volets (38, 38A, 38B) comprend une première paire de volets (38A) opposés l'un à l'autre et une deuxième paire de volets (38B) opposés l'un à l'autre, la première paire de volets (38A) et la deuxième paire de volets (38B) étant disposées perpendiculairement l'une à l'autre, et

en ce que le dispositif de commande (45) est conçu pour effectuer la commande d'uniformité de température (ST4, ST7, ST8, SST14, ST17, ST18) en effectuant séquentiellement :

une première étape de positionnement de la pluralité de volets (38, 38A, 38B), de la première paire de volets (38A) à un angle d'un emplacement le plus bas et de la deuxième paire de volets (38B) à un angle d'un emplacement intermédiaire ;
 une deuxième étape de positionnement de l'ensemble de la pluralité de volets (38, 38A, 38B) à l'angle de l'emplacement le plus bas ; et
 une troisième étape de positionnement de la première paire de volets (38A) à l'angle de l'emplacement intermédiaire et de la deuxième paire de volets (38B) à l'angle de l'emplacement le plus bas.

2. Système de conditionnement d'air d'un local selon la revendication 1, dans lequel

chaque unité parmi la pluralité d'unités intérieures (10, 10A, 10B) comprend en outre un capteur (41) de température de sol qui détecte une température d'un sol dans un local et

lorsque l'absence d'une personne est détectée et qu'au moins l'un des capteurs (41) de température de sol détecte un état dans lequel la température du sol dans le local est inférieure à une température prédéterminée pendant une opération de chauffage ou supérieure à une température prédéterminée pendant une opération de refroidissement, le dispositif de commande (45) amène une unité correspondante parmi les unités intérieures (10, 10A, 10B) qui détecte l'état à effectuer la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18).

3. Système de conditionnement d'air d'un local selon la revendication 1, dans lequel le dispositif de commande (45) met fin à la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18) après l'écoulement d'une période de temps prédéterminée depuis un début de la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18).

4. Système de conditionnement d'air d'un local selon la revendication 1, dans lequel lorsque le capteur (42) de corps humain de l'unité intérieure effectuant la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18) détecte la présence d'une personne, le dispositif de commande (45) met fin à la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18).

5. Système de conditionnement d'air d'un local, comprenant :

une pluralité d'unités intérieures (10, 10A, 10B) à installer sur un plafond (11) ; et
 un dispositif de commande (45) qui amène la pluralité d'unités intérieures (10, 10A, 10B) à effectuer une commande d'écoulement d'air et une commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18), chacune parmi la pluralité d'unités intérieures (10, 10A, 10B) comprenant :

un corps principal (14) de climatiseur dont la surface inférieure (14a, 30a) présente une périphérie le long de laquelle une pluralité d'ouvertures de soufflage (37) sont formées ;

une pluralité de volets (38, 38A, 38B) disposés de manière rotative dans les ouvertures de soufflage (37) respectives, les volets (38, 38A, 38B) étant en mesure de changer indépendamment des angles verticaux des écoulements d'air ; et
 un capteur (42) de corps humain qui détecte si une personne est présente sous une unité correspondante parmi la pluralité d'unités

intérieures (10, 10A, 10B),

où, lorsqu'au moins l'un des capteurs (42) de corps humain dans la pluralité d'unités intérieures (10, 10A, 10B) détecte l'absence d'une personne et la commande d'écoulement d'air est sélectionnée, le dispositif de commande (45) amène une unité correspondante parmi les unités intérieures (10, 10A, 10B) qui détecte l'absence à effectuer la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18),

caractérisé en

ce que la pluralité de volets (38, 38A, 38B) comprend une première paire de volets (38A) disposés de manière adjacente l'un à l'autre et une deuxième paire de volets (38B) disposés de manière adjacente l'un à l'autre, et ce que le dispositif de commande (45) est conçu pour effectuer la commande d'uniformité de température (ST4, ST7, ST8, ST14, ST17, ST18) en effectuant séquentiellement :

une première étape de positionnement de la première et la deuxième paire, de la première paire de volets (38A) à un angle d'un emplacement le plus bas et de la deuxième paire de volets (38B) à un angle d'un emplacement intermédiaire ;
une deuxième étape de positionnement de l'ensemble de la pluralité de volets (38, 38A, 38B) à l'angle de l'emplacement le plus bas ; et
une troisième étape de positionnement de la première paire de volets (38A) à l'angle de l'emplacement intermédiaire et de la deuxième paire de volets (38B) à l'angle de l'emplacement le plus bas.

40

45

50

55

FIG. 1

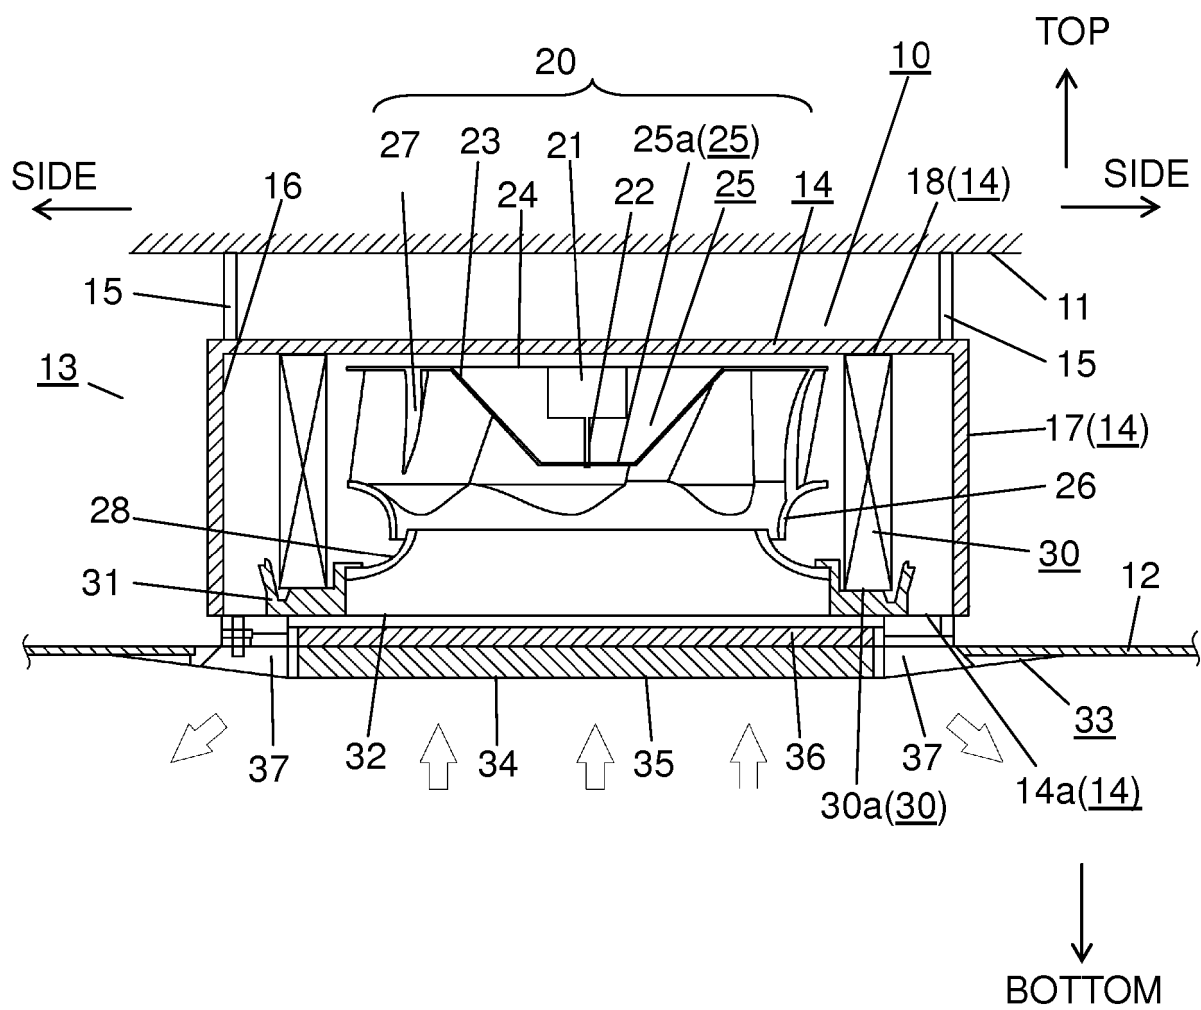


FIG. 2

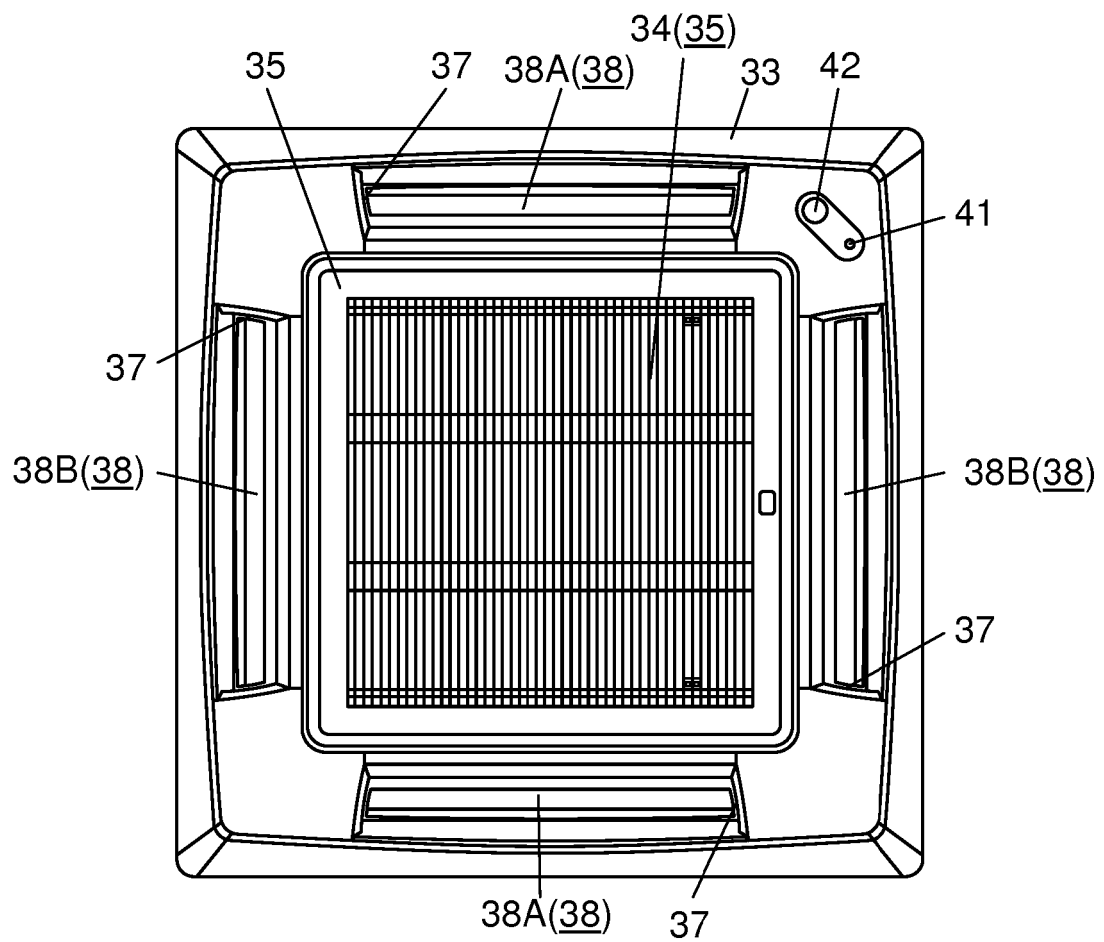


FIG. 3

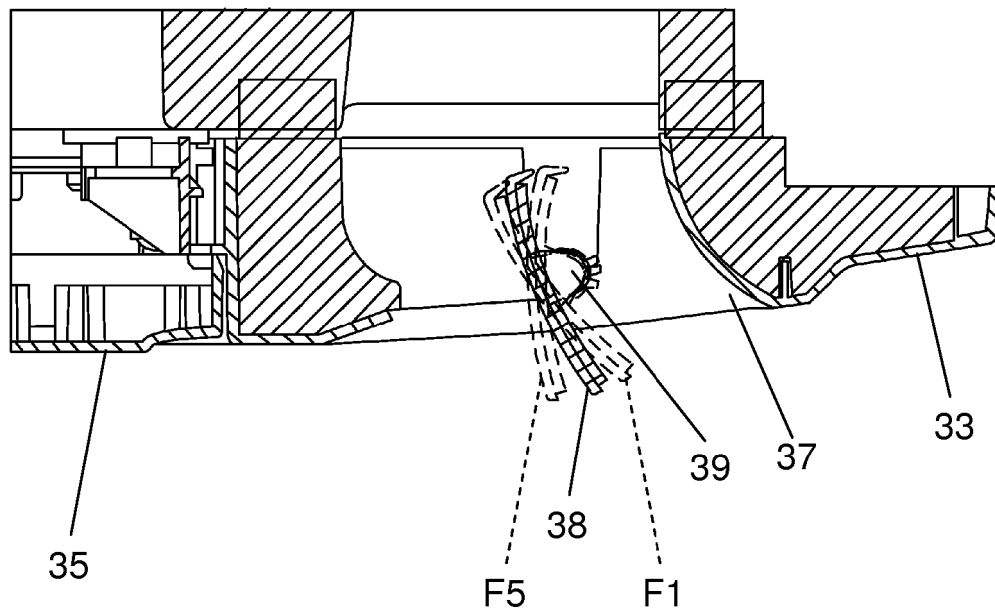


FIG. 4

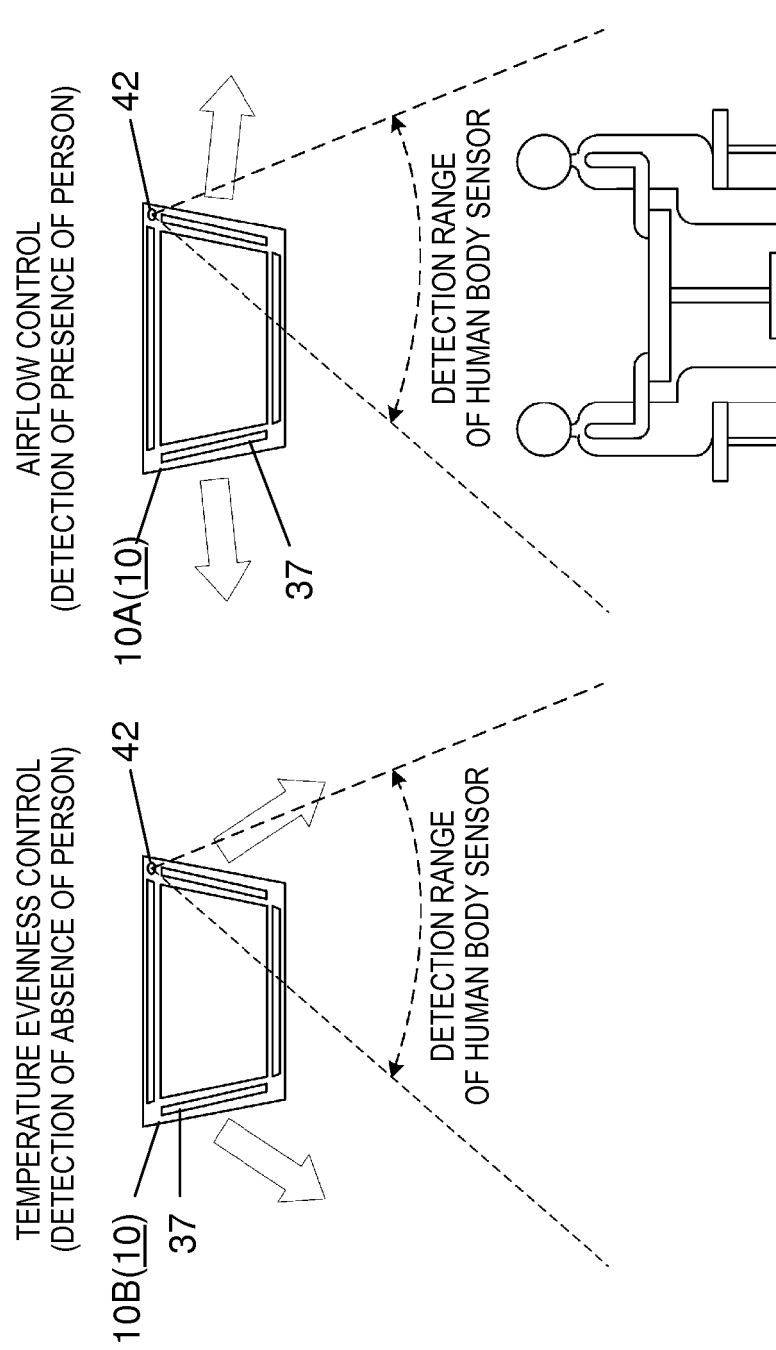


FIG. 5

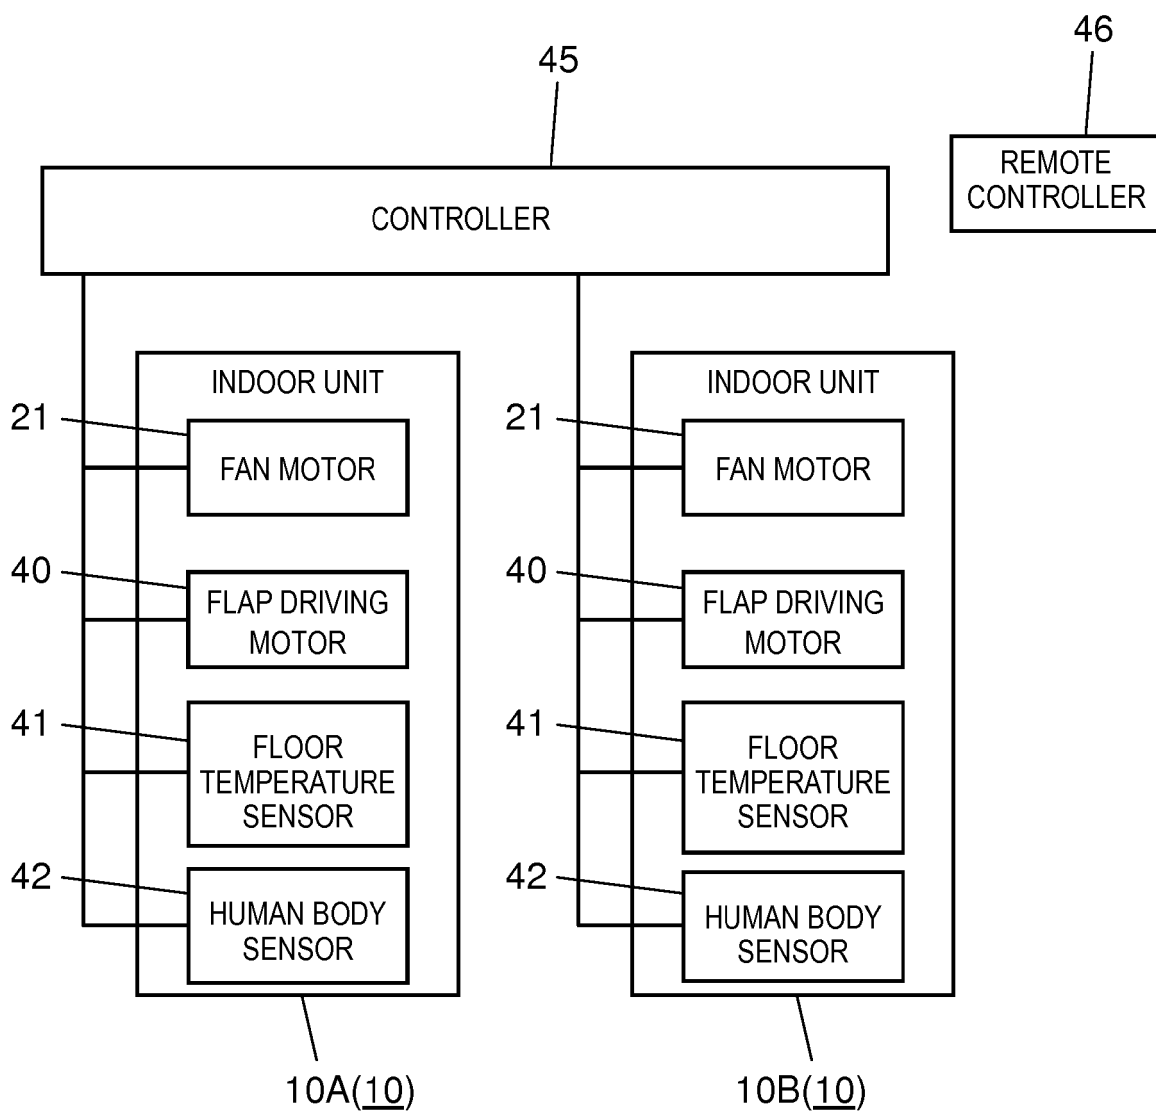


FIG. 6A

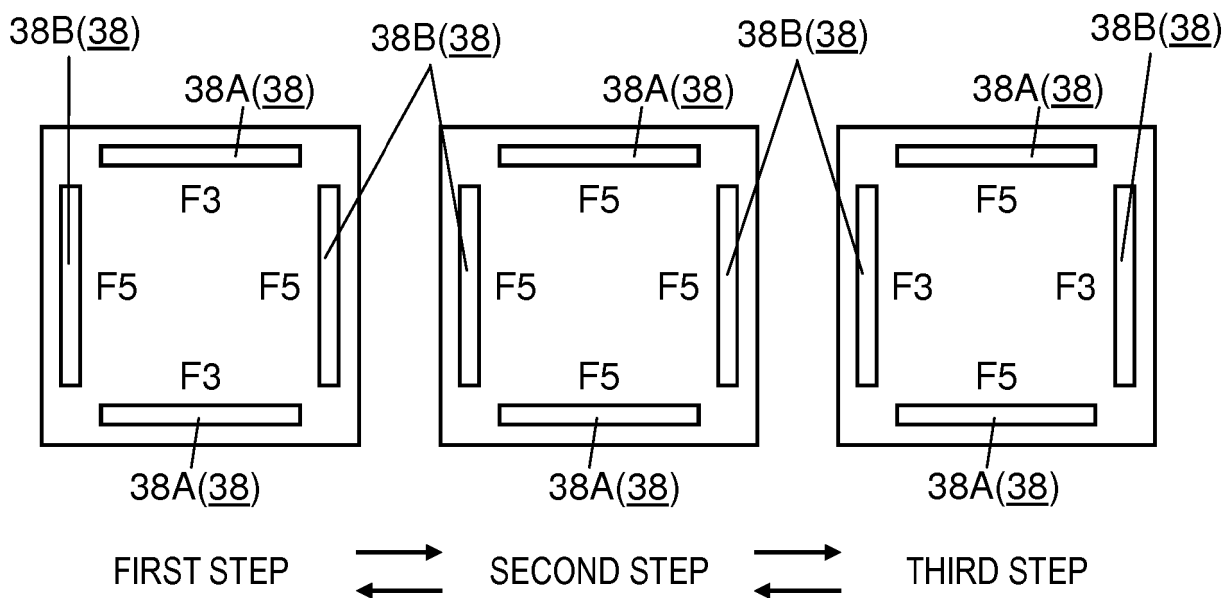


FIG. 6B

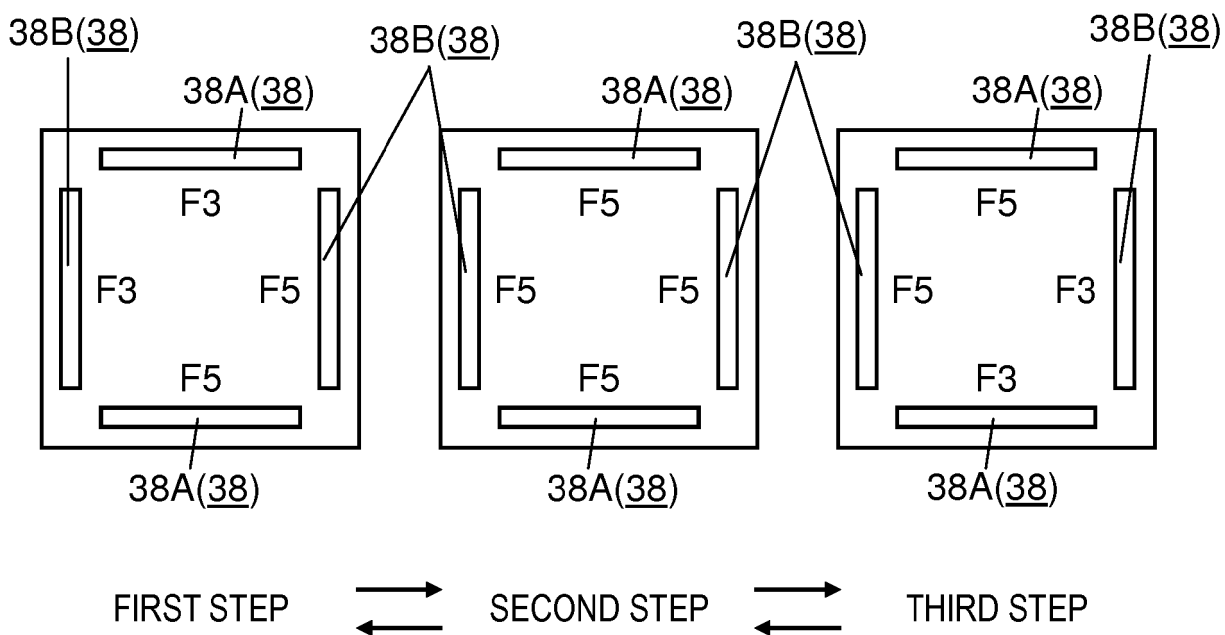


FIG. 7


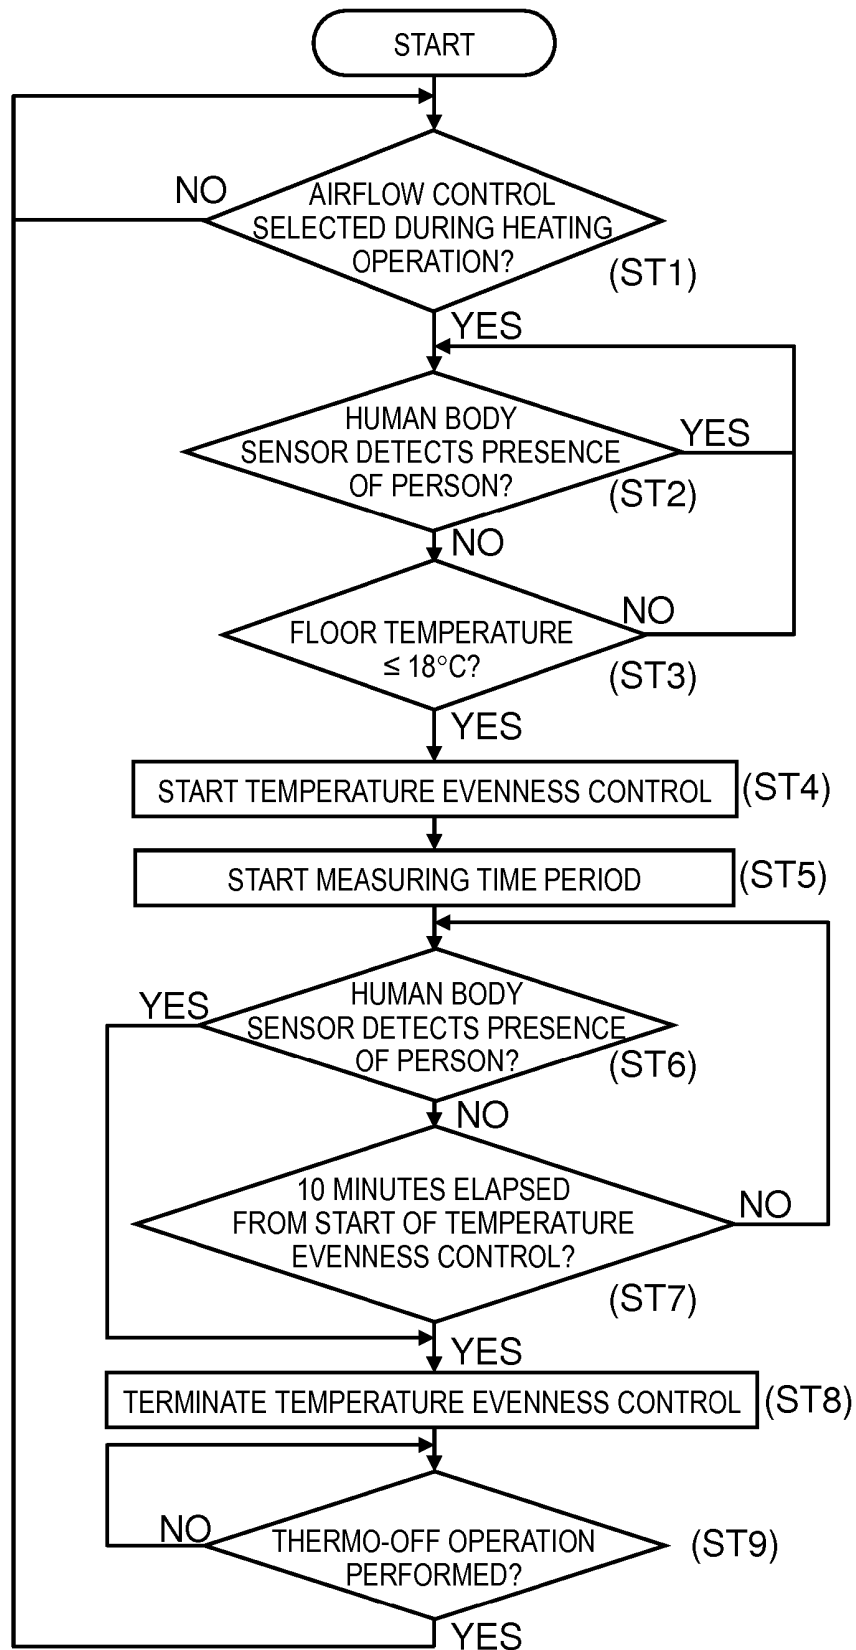


FIG. 8

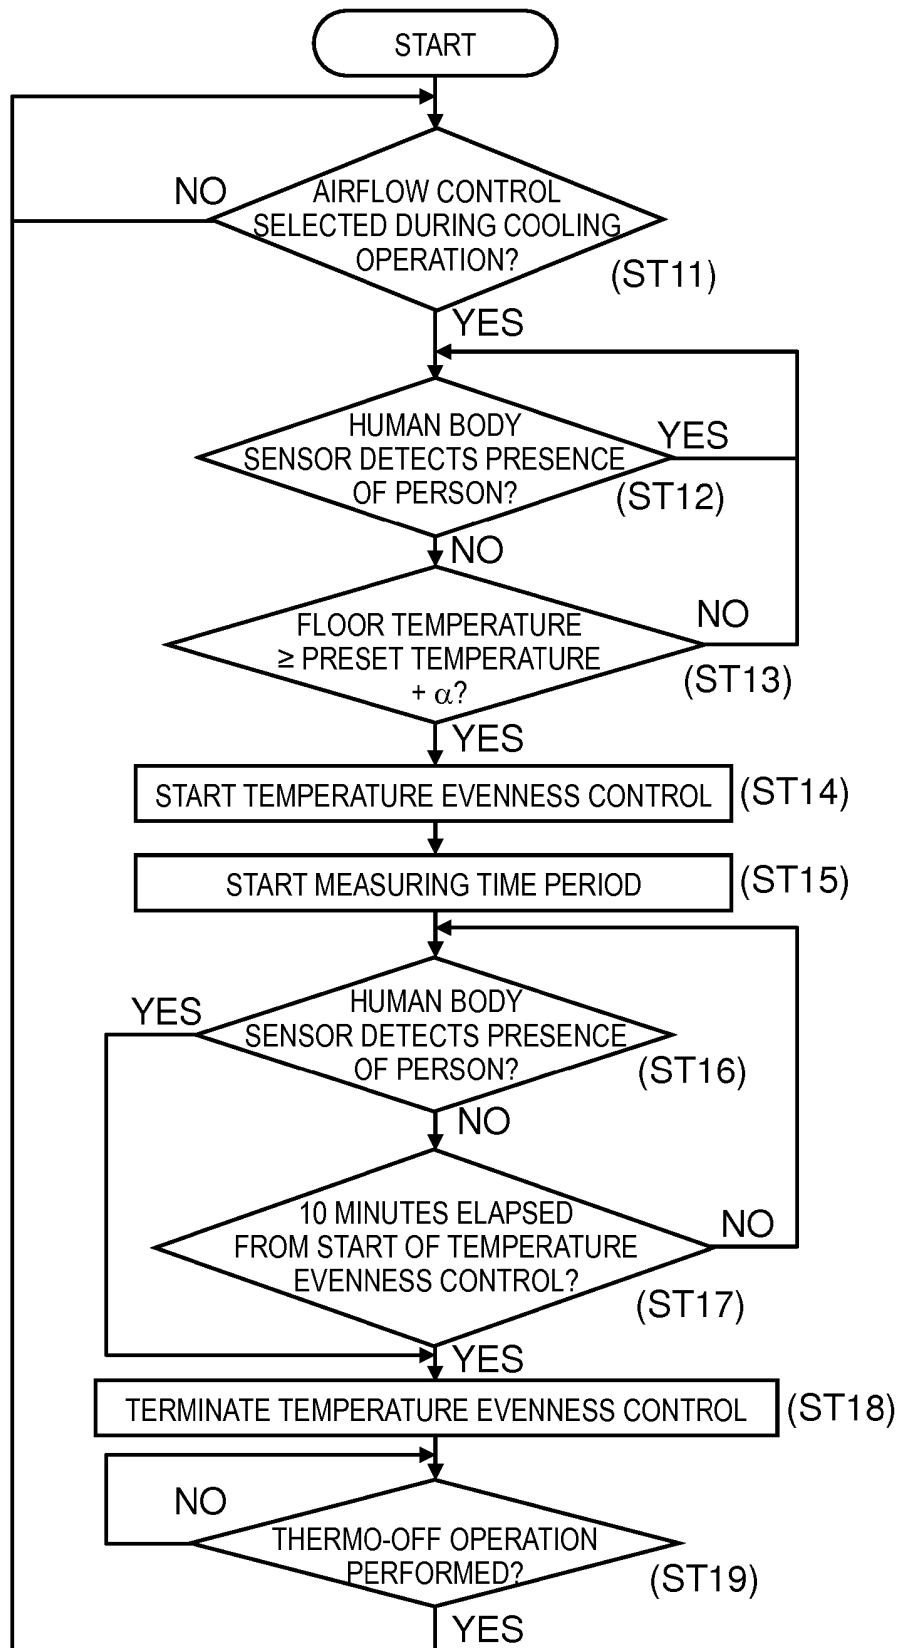

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2011099609 A [0002]
- JP 5310792 B [0002]
- JP 2015021719 A [0007]