

(12) **Patent Application Publication**
Brase et al.

(43) **Pub. Date:** **Jul. 12, 2007**

(22) Filed: **Jan. 9, 2006**

Publication Classification

(51) **Int. Cl.**
H01R 24/04 (2006.01)

(52) **U.S. Cl.** 439/668

(57) **ABSTRACT**

A connector includes a unitary body defining a hollow center region configured and arranged to receive a proximal contact portion of a lead. The unitary body may define connector pockets and seal features within the hollow center region. The connector pockets can be spaced-apart and may define openings through the unitary body. The seal features may be disposed between the connector pockets.

(21) Appl. No.: 11/327,880

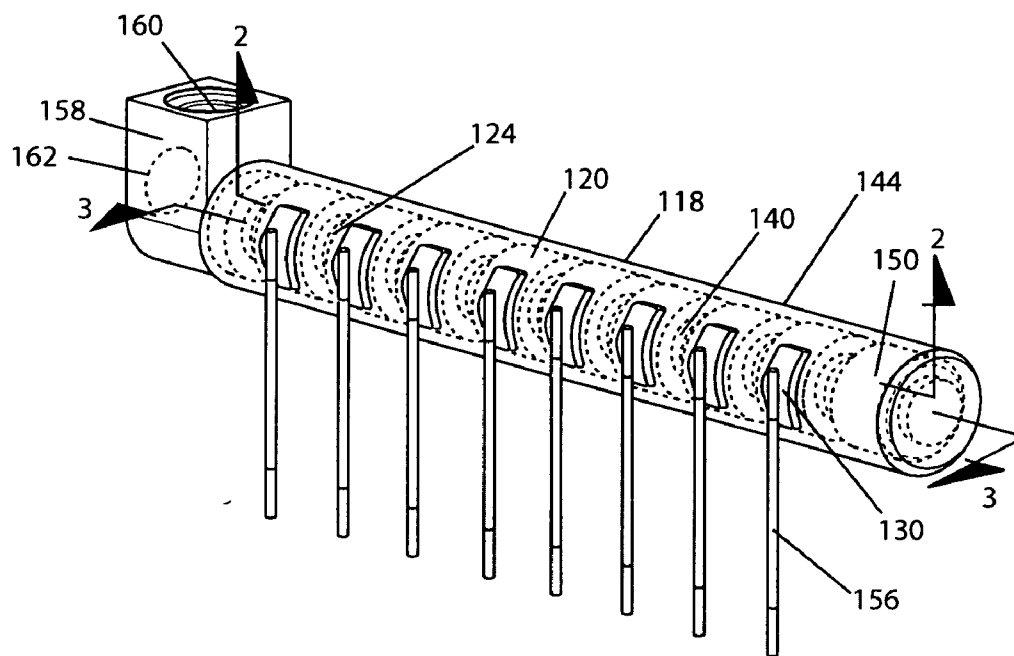


FIG. 1

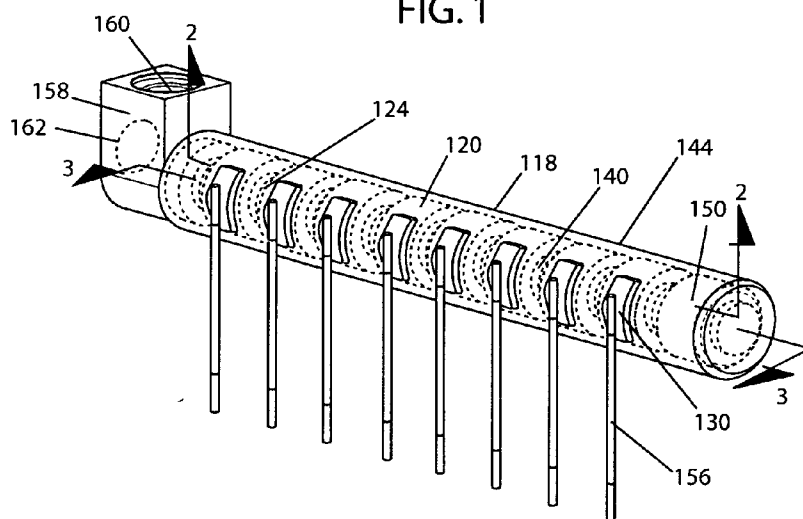


FIG. 2

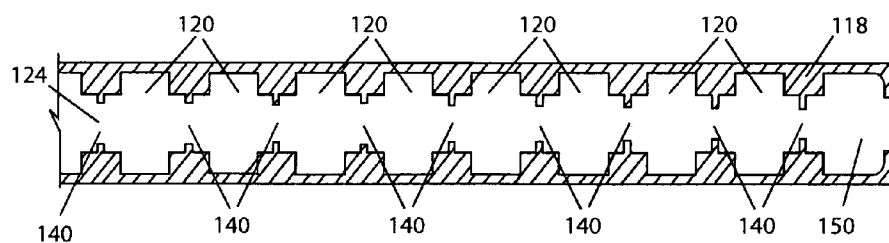


FIG. 3

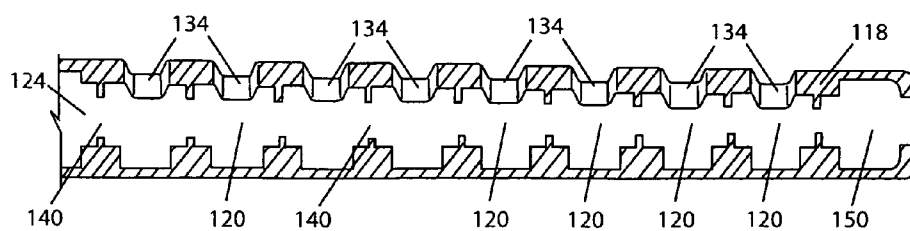


FIG. 4

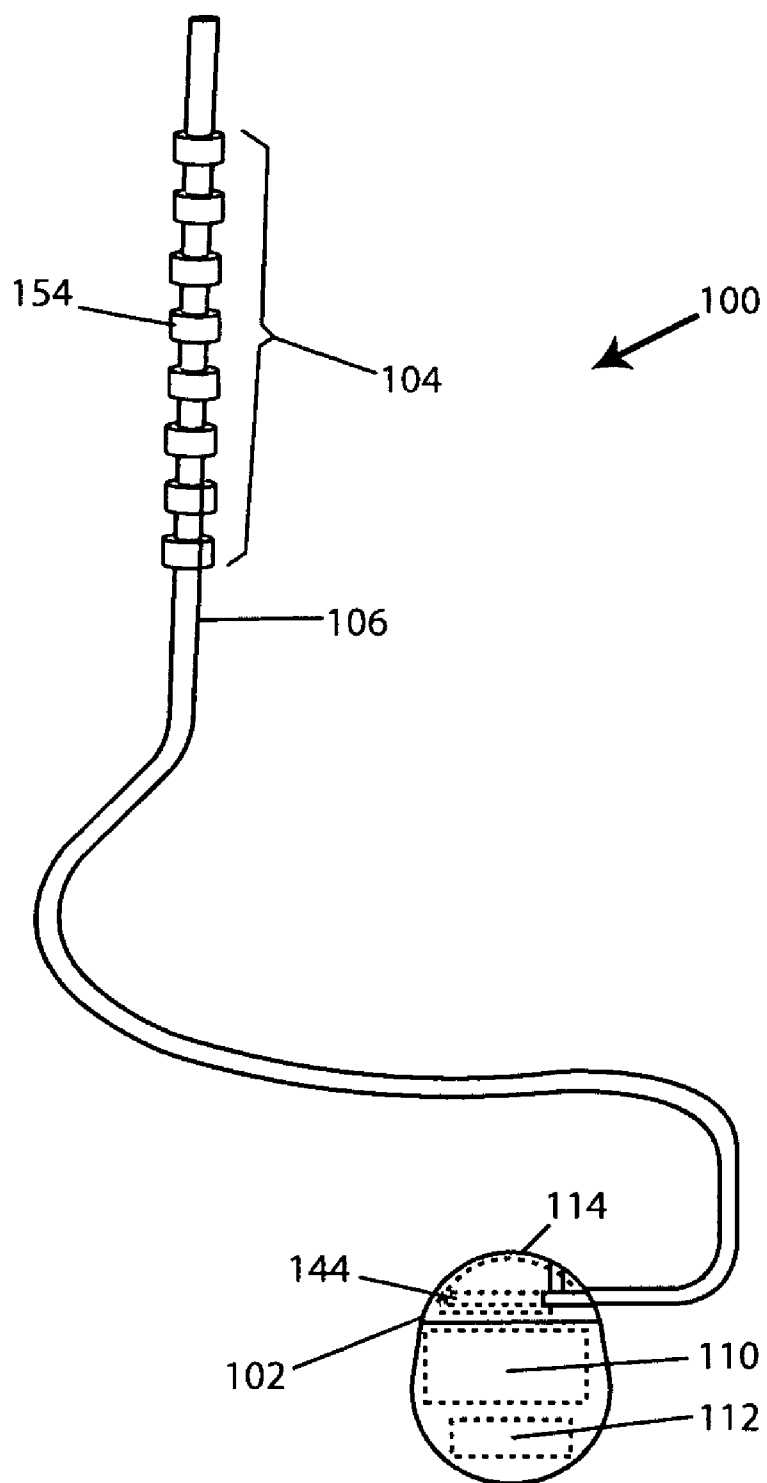


FIG. 5

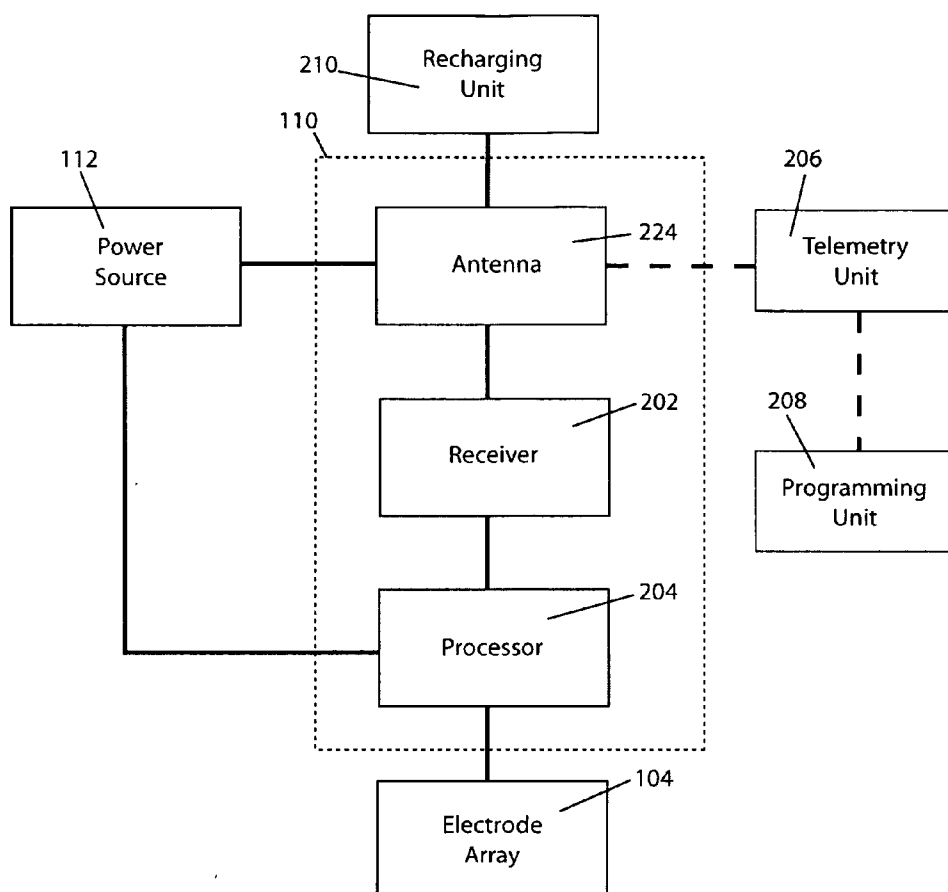


FIG. 6

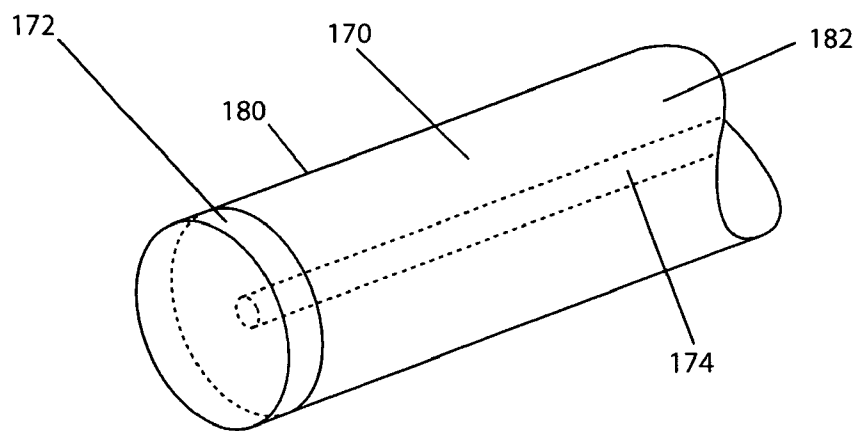


FIG. 7

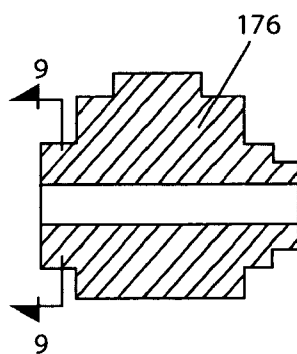


FIG. 8




FIG. 9

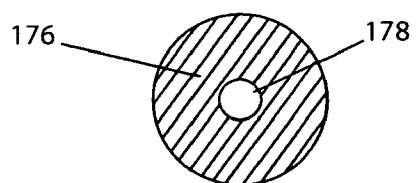


FIG. 10

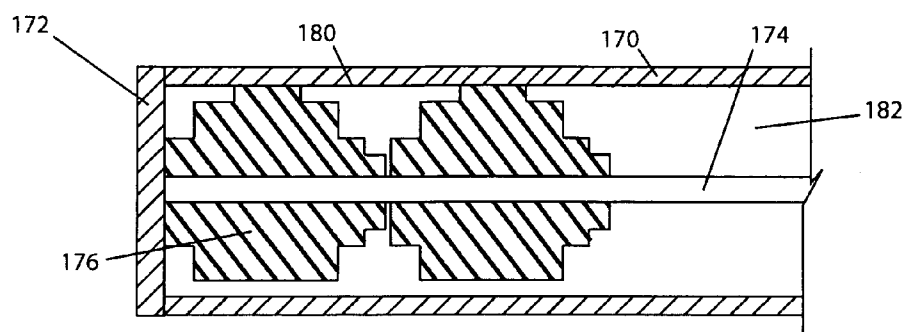


FIG. 11


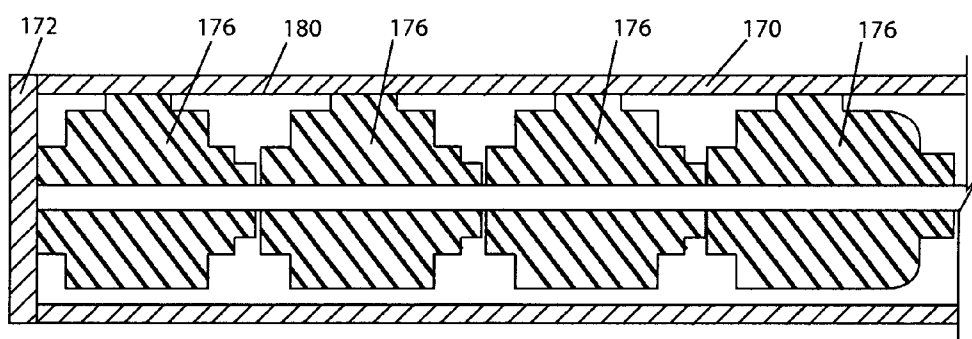


FIG. 12

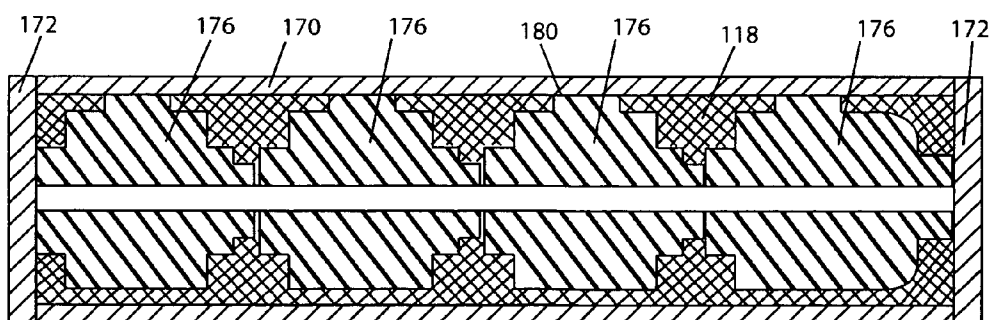

CONNECTOR AND METHODS OF FABRICATION

FIELD OF THE INVENTION

[0001] The invention is directed to stimulators and stimulator components and methods of making the devices. The invention is also directed to stimulators and stimulator components with a connector, as well as methods of making the devices.

BACKGROUND OF THE INVENTION

[0002] Stimulators have been developed to provide therapy for a variety of disorders, as well as for other treatments. For example, stimulators can be used in neurological therapy by stimulating nerves or muscles, for urinary urge incontinence by stimulating nerve fibers proximal to the pudendal nerves of the pelvic floor, for erectile and other sexual dysfunctions by stimulating the cavernous nerve(s), for reduction of pressure sores or venous stasis, etc.

[0003] As one example, spinal cord stimulation is a well accepted clinical method for reducing pain in certain populations of patients. Stimulators have been developed to provide therapy for a variety of treatments. For example, stimulators can be used to stimulate nerves, such as the spinal cord, muscles, or other tissue. A stimulator can include a control module (with a pulse generator), one or more leads, and an array of stimulator electrodes on each lead. The stimulator electrodes are in contact with or near the nerves, muscles, or other tissue to be stimulated. The pulse generator in the control module generates electrical pulses that are delivered by the electrodes to body tissue. As an example, electrical pulses can be provided to the dorsal column fibers within the spinal cord to provide spinal cord stimulation.

BRIEF SUMMARY OF THE INVENTION

[0004] In one embodiment, a connector includes a unitary body defining a hollow center region configured and arranged to receive a proximal contact portion of a lead. The unitary body further defines within the hollow center region a plurality of spaced-apart connector pockets. Each connector pocket defines an opening through the unitary body. The unitary body further defines within the hollow center region a plurality of seal features disposed between the connector pockets.

[0005] In another embodiment, a stimulation device includes a lead with a proximal contact portion comprising a plurality of contacts, an electronic subassembly, a connector, and a plurality of conductive contacts. The connector receives the proximal contact portion of the lead. The connector includes a unitary body that defines a hollow center region configured and arranged to receive the proximal contact portion of the lead. The unitary body further defines within the hollow center region a plurality of spaced-apart connector pockets. Each connector pocket defines an opening through the connector. The unitary body further defines within the hollow center region a plurality of seal features disposed between the connector pockets. The conductive contacts are disposed in the openings of the connector and are configured and arranged to couple the contacts of the lead to the electronic subassembly.

[0006] In another embodiment, a method of making a stimulation device includes forming a connector, disposing

a plurality of conductive contacts in the openings through the unitary body, and coupling contacts on a lead to an electronic subassembly through the connector and conductive contacts. The connector includes a unitary body defining a hollow center region configured and arranged to receive a proximal contact portion of a lead. The unitary body further defines within the hollow center region a plurality of spaced-apart connector pockets. Each connector pocket defines an opening through the unitary body. The unitary body further defines within the hollow center region a plurality of seal features disposed between the connector pockets.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Non-limiting and non-exhaustive embodiments of the present invention are described with reference to the following drawings. In the drawings, like reference numerals refer to like parts throughout the various figures unless otherwise specified.

[0008] For a better understanding of the present invention, reference will be made to the following Detailed Description, which is to be read in association with the accompanying drawings, wherein:

[0009] FIG. 1 is a schematic perspective view of one embodiment of a connector, according to the invention;

[0010] FIG. 2 is a schematic cross-sectional view of the unitary body of the connector of FIG. 1;

[0011] FIG. 3 is a schematic cross-sectional view of the unitary body of the connector of FIG. 1 from a different side;

[0012] FIG. 4 is a schematic exterior perspective view of one embodiment of a stimulator system, according to the invention;

[0013] FIG. 5 is a schematic overview of components of a system for stimulation, according to the invention;

[0014] FIG. 6 is a schematic perspective view of one embodiment of a mold frame, an end pin and a locating feature, according to the invention;

[0015] FIG. 7 is a schematic cross-sectional view of one embodiment of a mold insert piece, according to the invention;

[0016] FIG. 8 is a schematic cross-sectional view of one embodiment of a mold insert piece, according to the invention;

[0017] FIG. 9 is a schematic end cross-sectional view of the mold insert piece of FIG. 7;

[0018] FIG. 10 is a schematic cross-sectional view of one embodiment of mold insert pieces disposed in a mold frame, according to the invention;

[0019] FIG. 11 is a schematic cross-sectional view of one embodiment of mold insert pieces disposed in a mold frame, according to the invention; and

[0020] FIG. 12 is a schematic cross-sectional view of one embodiment of a unitary body molded around mold insert pieces disposed within a mold frame, according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0021] The invention is directed to stimulators and stimulator components and methods of making the devices. The

invention is also directed to stimulators and stimulator components with a connector, as well as methods of making the devices.

[0022] Examples of stimulators are found in U.S. Pat. Nos. 6,181, 969; 6,516,227; 6,609,029; 6,609,032; and 6,741, 892; and U.S. patent application Ser. No. 11/238,240, all of which are incorporated by reference.

[0023] In at least some applications, the electronic subassembly of a stimulator is coupled to the lead, which includes the electrodes of the stimulator. In at least some designs, the lead has several contacts that connect to individual connector contacts via a connector. The connector contacts may be arranged, for example, in a single row, and are generally electrically isolated from each other.

[0024] In at least some designs, the spacing and pitch between the individual contacts may vary due to variation in manufacturing processes or components. Such variation can result in misalignment between the contacts of the lead and the individual connector contacts. To address this, in one embodiment, a connector having a unitary body with periodically spaced connector contacts electrically isolates the connections between adjacent pairs of lead contacts and connector contacts. For example, the connector can include spaced-apart connector pockets into which conductive contacts may be inserted.

[0025] As one example, a connector includes a unitary body that defines a hollow center region configured and arranged to receive a proximal contact portion of a lead. The unitary body further defines within the hollow center region spaced-apart connector pockets, where each connector pocket defines an opening through the unitary body. Conductive contacts can be disposed in the openings through the unitary body.

[0026] FIG. 2 illustrates schematically a cross-sectional view of one embodiment of a unitary body 118 of a connector, according to the invention. The unitary body 118 defines a hollow center region 124 that is capable of receiving the proximal contact portion of a lead. Suitable materials for the unitary body 118 include, for example, silicone and polyurethane. In some instances, the unitary body 118 may be formed from more than one material.

[0027] The unitary body 118 further defines connector pockets 120 within the hollow center region 124. The unitary body 118 may include any number of connector pockets 120. There may be, for example, two, three, four, five, six, seven, eight, nine, ten, eleven, twelve, thirteen, fourteen, fifteen, sixteen, seventeen, eighteen, or more connector pockets 120. Preferably, the number of connector pockets 120 is equal to the number of contacts on the proximal contact portion of the lead.

[0028] In one embodiment illustrated in FIG. 3, the connector pockets 120 define an opening 134 through the unitary body 118. The openings 134 through the unitary body 118 may be located on any side of the unitary body 118. Preferably, the openings 134 are all located on the same side of the unitary body 118.

[0029] The connector pockets 120 are spaced-apart. The connector pockets 120 may be spaced-apart in any fashion. For example, the connector pockets 120 can be regularly (e.g., with a regular period) spaced-apart. In one embodi-

ment, the connector pockets 120 are spaced-apart at substantially uniform intervals. Preferably, the connector pockets 120 are spaced-apart such that the openings 134 defined by the connector pockets 120 can be aligned with the lead contacts of the proximal contact portion of the lead received by the unitary body 118.

[0030] The opening 134 through the unitary body 118 may have any dimensions. Preferably, the opening 134 is capable of receiving a conductive contact 130 (FIG. 1). Conductive contacts 130 may be made of any material that is conductive including, for example, metals, alloys, conductive polymers, conductive carbon, etc. There may be any number of conductive contacts including, for example, two, three, four, five, six, seven, eight, nine, ten, eleven, twelve, thirteen, fourteen, fifteen, sixteen, seventeen, eighteen or more conductive contacts 130. Preferably, the number of conductive contacts 130 is equal to the number of connector pockets 120.

[0031] The conductive contacts 130 couple the electronic subassembly 110 (FIG. 4) to the lead 106 (FIG. 4) through the conductors 156 (FIG. 1). Optionally, the conductors 156 may be insulated by an insulating material except where the conductor 156 makes contact with the conductive contacts 130, electronic subassembly 110, or other components of the electrical circuitry. The insulating material may be any material that is a poor conductor of an electrical signal including, for example, Teflon™, and non-conductive polymers.

[0032] In one embodiment, the unitary body 118 further defines within the hollow center region 124 a stop pocket 150 (FIG. 2). The stop pocket 150 is located at the end of the unitary body 118 opposite the end from which the lead is inserted.

[0033] In one embodiment, the unitary body 118 is coupled to a connector block 158 as illustrated, for example, in FIG. 1. The connector block 158 can be made of any conductive or non-conductive material. Suitable non-conductive materials for the connector block 158 include, for example, non-conductive polymers, polyetheretherketone (PEEK), ceramics, etc. Suitable conductive materials include, but are not limited to, metal, alloys, conductive polymers, conductive carbon, etc.

[0034] In one embodiment, the connector block 158 aids positioning and/or securing the proximal contact portion of the lead within the hollow center region 124 of the unitary body 118. In one embodiment, the connector block 158 has an insertion opening 162 through which the proximal portion of the lead may pass (FIG. 1). The connector block 158 may also have a securement opening 160 that may be used to secure the proximal contact portion of the lead disposed within the hollow center region 124 of the unitary body 118 (FIG. 1). Optionally, the securement opening 160 may be roughly perpendicular to the insertion opening 162 (FIG. 1). A pin, screw or other member can be inserted through the securement opening 160 in the connector block 158 to secure the proximal contact portion of the lead in the hollow center region 124 of the unitary body 118.

[0035] The connector block 158 may be coupled to any end of the unitary body 118. Preferably, the connector block 158 is coupled to the end of the unitary body 118 that is opposite the end of the unitary body 118 where the stop pocket 150 is located.

[0036] In one embodiment, the unitary body **118** further defines seal features **140** (FIG. 2) within the hollow center region **124**. The seal features **140** are located between the connector pockets **120**. A seal feature(s) **140** may also be disposed between a connector pocket **120** and a stop pocket **150**.

[0037] The unitary body **118** may include any number of seal features **140**. There may be, for example, two, three, four, five, six, seven, eight, nine, ten, eleven, twelve, thirteen, fourteen, fifteen, sixteen, seventeen, eighteen or more seal features **140**. For example, one seal feature **140** is disposed between each pair of adjacent connector pockets **120**. A seal feature **140** may also be disposed between a connector pocket **120** and a connector block **158**. Preferably, the number of seal features **140** is one greater than the number of conductive contacts **130**.

[0038] The seal features **140** generally electrically isolate electrical circuitry located in each connector pocket **120** from the electrical circuitry located in other connector pockets **120**. For example, the seal features **140** may electrically isolate each connection between a conductive contact **130** and a lead contact of the lead received by the unitary body **118**.

[0039] FIG. 4 illustrates schematically one embodiment of a stimulation system **100**. The stimulation system includes a control module (e.g., a stimulator or pulse generator) **102**, an electrode array **104**, and at least one lead body **106** coupling the control module to the electrode array. The electrode array **104** and the lead body **106** form a lead. Examples of leads include, for example, percutaneous leads and paddle leads. It will be understood that the system for stimulation can include more, fewer, or different components and can have a variety of different configurations including those configurations disclosed in the stimulator references cited herein. The stimulation system or components of the stimulation system, including one or more of the lead body **106**, electrode array **104**, and the control module **102**, may be implanted into the body.

[0040] The control module **102** typically includes a housing **114** with an electronic subassembly **110** and, in at least some embodiments, a power source **112** disposed within a chamber in the housing. Preferably, the housing is resistant to moisture penetration into the chamber containing the electronic subassembly and power source. In some embodiments, water may diffuse through the housing. Preferably, the diffused water is relatively pure, without substantial ionic content, as deionized water is relatively non-conductive.

[0041] The housing **114** may be made of any biocompatible material including, for example, glass, ceramics, metals, epoxies and polymers (including plastics). In one embodiment, the housing **114** of the control module is formed of a plastic material that resists the transport of moisture into the interior of the housing and is sufficiently sturdy to protect the components on the interior of the housing from damage under expected usage conditions. Preferably, the material of the plastic housing is a hydrophobic polymer material.

[0042] The housing **114** may include additives such as, for example, fillers, plasticizers, antioxidants, colorants, and the like. The thickness of the walls of the housing may also impact the moisture permeability of the housing. A mini-

mum thickness needed to achieve a particular degree of resistance to moisture transport will often depend on the material selected for the housing, as well as any additives.

[0043] Optionally, the housing **114** can be covered, in full or in part, with a coating. The coating can be provided to improve or alter one or more properties of the housing **114** including, for example, biocompatibility, hydrophobicity, moisture permeability, leaching of material into or out of the housing, and the like. In one embodiment, a coating can be applied which contains a compound, such as, for example, a drug, prodrug, hormone, or other bioactive molecule, that can be released over time when the stimulator is implanted. (In another embodiment, the housing itself may include such a compound to be released over time after implantation.)

[0044] The connector **144** is disposed in a portion of the housing that is, at least initially, not sealed. This allows the proximal end of the lead **106** to be inserted into the unitary body **118** of the connector **144**. The conductors **156** (FIG. 1), or other electrical conduits (not shown) attached to the conductors **156**, penetrate the housing **114** into the sealed chamber containing the electronic subassembly **110**, and are attached to the electronic subassembly **110**.

[0045] FIG. 5 is a schematic overview of one embodiment of components of a system for stimulation, including an electronic subassembly **110** (which may or may not include the power source **112**), according to the invention. It will be understood that the system for stimulation and the electronic subassembly **110** can include more, fewer, or different components and can have a variety of different configurations including those configurations disclosed in the stimulator references cited herein. Some or all of the components of the system for stimulation can be positioned on one or more circuit boards or similar carriers within a housing of a stimulator, if desired.

[0046] Any power source **112** can be used including, for example, a battery such as a primary battery or a rechargeable battery. Examples of other power sources include super capacitors, nuclear or atomic batteries, mechanical resonators, infrared collectors, thermally-powered energy sources, flexural powered energy sources, bioenergy power sources, fuel cells, bioelectric cells, osmotic pressure pumps, and the like including the power sources described in U.S. Patent Application Publication No. 2004/0059392, incorporated herein by reference.

[0047] As another alternative, power can be supplied by an external power source through inductive coupling via the optional antenna **124** or a secondary antenna. The external power source can be in a device that is mounted on the skin of the user or in a unit that is provided near the stimulator user on a permanent or periodic basis.

[0048] If the power source **112** is a rechargeable battery, the battery may be recharged using the optional antenna **124**, if desired. Power can be provided to the battery for recharging by inductively coupling the battery through the antenna to a recharging unit **210** (see FIG. 5) external to the user. Examples of such arrangements can be found in the stimulator references identified above.

[0049] In one embodiment, electrical current is emitted by the electrodes **154** to stimulate motor nerve fibers, muscle fibers, or other body tissues near the stimulator. The electronic subassembly **110** provides the electronics used to

operate the stimulator and generate the electrical pulses at the electrodes **154** to produce stimulation of the body tissues. FIG. **5** illustrates one embodiment of components of the electronic subassembly and associated units.

[0050] In the illustrated embodiment, a processor **204** is generally included in the electronic subassembly **110** to control the timing and electrical characteristics of the stimulator. For example, the processor can, if desired, control one or more of the timing, frequency, strength, duration, and waveform of the pulses. In addition, the processor **204** can select which electrodes can be used to provide stimulation, if desired. In some embodiments, the processor may select which electrode(s) are cathodes and which electrode(s) are anodes. In some embodiments with electrodes disposed on two or more sides of the housing, the processor may be used to identify which electrodes provide the most useful stimulation of the desired tissue. This process may be performed using an external programming unit, as described below, that is in communication with the processor **204**.

[0051] Any processor can be used and can be as simple as an electronic device that produces pulses at a regular interval or the processor can be capable of receiving and interpreting instructions from an external programming unit **208** that allow modification of pulse characteristics. In the illustrated embodiment, the processor **204** is coupled to a receiver **202** which, in turn, is coupled to the optional antenna **124**. This allows the processor to receive instructions from an external source to direct the pulse characteristics and the selection of electrodes, if desired.

[0052] In one embodiment, the antenna **124** is capable of receiving signals (e.g., RF signals) from an external telemetry unit **206** which is programmed by a programming unit **208**. The programming unit **208** can be external to, or part of, the telemetry unit **206**. The telemetry unit **206** can be a device that is worn on the skin of the user or can be carried by the user and can have a form similar to a pager or cellular phone, if desired. As another alternative, the telemetry unit may not be worn or carried by the user but may only be available at a home station or at a clinician's office. The programming unit **208** can be any unit that can provide information to the telemetry unit for transmission to the stimulator. The programming unit **208** can be part of the telemetry unit **206** or can provide signals or information to the telemetry unit via a wireless or wired connection. One example of a suitable programming unit is a computer operated by the user or clinician to send signals to the telemetry unit.

[0053] The signals sent to the processor **204** via the antenna **124** and receiver **202** can be used to modify or otherwise direct the operation of the stimulator. For example, the signals may be used to modify the pulses of the stimulator such as modifying one or more of pulse duration, pulse frequency, pulse waveform, and pulse strength. The signals may also direct the stimulator to cease operation or to start operation or to start charging the battery. In other embodiments, the electronic subassembly **110** does not include an antennae **124** or receiver **202** and the processor **204** operates as programmed.

[0054] Optionally, the stimulator may include a transmitter (not shown) coupled to the processor and antenna for transmitting signals back to the telemetry unit **206** or another unit capable of receiving the signals. For example, the

stimulator may transmit signals indicating whether the stimulator is operating properly or not or indicating when the battery needs to be charged. The processor may also be capable of transmitting information about the pulse characteristics so that a user or clinician can determine or verify the characteristics.

[0055] The optional antenna **124** can have any form. In one embodiment, the antenna comprises a coiled wire that is wrapped at least partially around the electronic subassembly within or on the housing.

[0056] Any method of manufacture of the components of the system for stimulation can be used. For example, the power source and antenna can be manufactured as described in U.S. Patent Application Publication No. 2004/0059392. These components can then be placed inside the housing (or, alternatively, the housing can be formed, e.g., molded, around the components).

[0057] In one embodiment, a method of making a stimulation device includes forming a connector **144** comprising a unitary body **118** and coupling a lead **106** to an electronic subassembly **110** through the connector **144**. The unitary body **118** of the connector **144** may be formed by any method that results in the unitary body **118** defining a hollow center region **124** capable of receiving a proximal contact portion of a lead. The unitary body **118** is formed such that the unitary body **118** defines connector pockets **120** within the hollow center region **124**. The unitary body **118** may be formed, for example, by molding (including injection molding), casting, etc.

[0058] As an example, the unitary body **118** can be formed by molding. In one embodiment, an end pin **172** is inserted onto one end of a mold frame **170** as illustrated schematically in FIG. **10**. Suitable materials for the mold frame **170** include, but are not limited to, metal, wood, wax, polymers, and the like. Preferably, the mold frame **170** is made of a material such that the mold frame **170** is reusable.

[0059] The interior surface **180** of the mold frame **170** is generally complementary to the desired external shape of the unitary body **118**. Preferably, the unitary body **118** has a cylindrical exterior shape. The interior surface **180** of the mold frame **170** typically defines the dimensions of the exterior of the unitary body **118**. Preferably, the mold frame **170** has at least one open surface **182**, which may optionally be sealed with an end pin **172**. Optionally, the final molded unitary body **118** can be removed from the mold frame **170** through the at least one open surface **182** of the mold frame **170**.

[0060] Suitable materials for the end pin **172** include, but are not limited to, metals, wood, wax, polymers, and the like. Preferably, the end pin **172** is made of a material such that the end pin **172** is reusable. The end pin **172** may have any shape or dimensions. Preferably, the end pin **172** has a shape and dimensions such that the end pin **172** may seal an open surface **182** of the mold frame **170**. The end pin may also have a shape of a stop pocket **150** or a connector pocket **120**.

[0061] In one embodiment, at least one mold insert piece **176** is disposed within the mold frame **170** (see FIGS. **10** and **11**). Suitable materials for the mold insert piece **176** include, but are not limited to, metals, wood, wax, polymers, and the like. Preferably, the mold insert piece **176** is made of a material such that the mold insert piece **176** is reusable. In

one embodiment, a single mold insert piece **176** is disposed within the mold frame **170**. Optionally, two, three, four, five, six, seven, eight, nine, ten, eleven, twelve, thirteen, fourteen, fifteen, sixteen, seventeen, eighteen, or more mold insert pieces **176** can be disposed within the mold frame **170**.

[0062] In one embodiment, the mold insert pieces **176** have a shape such that the cumulative shape of all the mold insert pieces **176** disposed within the mold frame **170** defines the desired shape of the hollow center region **124** of the unitary body **118**. In one embodiment, the mold insert pieces **176** have a shape such that, when the mold insert pieces **176** are located in the mold frame **170**, the exterior surface of the combined mold insert pieces **176** defines the connector pockets **120**, seal features **140**, and stop pockets **150**, if any, of the unitary body **118** as illustrated schematically in FIGS. **7** and **8**. It will be recognized that, optionally, the end pins **172** can also have the shape of a stop pocket **150** or other mold insert piece **176**.

[0063] In one embodiment, the mold insert pieces **176** may be located and/or secured into position within the mold frame **170** by one or more locating features **174**. The locating features **174** may be anything that aids positioning of the mold insert pieces **176** within the mold frame **170** or that aids in securing the position of the mold insert pieces **176** once they are disposed in the mold frame **170**. For example, a cylindrical rod disposed within the mold frame **170** may act as a locating feature **174** as illustrated schematically in FIGS. **8**, **12**, and **13**. Optionally, a positioning aperture **178** disposed within a mold insert piece **176** may act as a locating feature **174**. In one embodiment, a positioning aperture **178** locating feature **174** is illustrated schematically in FIG. **9**. Other locating features can include pins in one end of the mold insert piece **176** (or end pin **172**) that correspond with holes in the end of another mold insert piece **176** (or end pin **172**).

[0064] In one embodiment, cooperating locating features **174** may aid in disposing or securing mold insert pieces **176** in the mold frame **170**. For example, a cylindrical rod locating feature **174** may act cooperatively with a positioning aperture **178** locating feature **174** disposed within a mold insert piece **176**. In one embodiment, the positioning aperture **178** disposed within mold insert pieces **176** may be used to thread the mold insert pieces **176** onto the cylindrical rod locating feature **174**. Pins/holes in the end of the mold insert pieces may also aid in aligning the opening **134**-creating features.

[0065] After disposing the mold insert piece(s) **176** in the mold frame **170**, at least one end pin **172** can be used to seal an open surface **182** of the mold frame **170** as illustrated schematically in FIG. **12**.

[0066] A material suitable for forming the unitary body **118** is then added into the mold frame **170** containing the mold insert pieces **176**. For example, the material suitable for forming the unitary body **118** may be injected into the mold frame **170**. This material may then be allowed to cure, harden, or otherwise solidify. In one embodiment, a polymerizing agent may be added to the material to facilitate curing.

[0067] Once the unitary body **118** material has cured, hardened, or otherwise solidified, at least one end pin **172** (and in some instances, two end pins) is removed. In some

instances, the unitary body **118** is temporarily deformed (e.g., stretched) to remove one or more of the end pins **172**. In some embodiments, locating features **174** may also be removed at this time. For example, a cylindrical rod locating feature **174** that passes through positioning apertures **178** of the mold insert pieces **176** may be removed at this time.

[0068] In some embodiments, the unitary body **118** is removed from the mold frame **170**. In one embodiment, the mold insert pieces **176** are then removed from the unitary body **118**. The mold insert pieces **176** may be removed from the unitary body **118** in any manner. Optionally, removal of the mold insert pieces **176** may be aided by altering the properties of the material used to form the unitary body **118**. For example, the unitary body **118** may be formed from polysilicone and the polysilicone unitary body **118** may be swollen by treating the polysilicone with hexane or another material that swells the polysilicone. The swelling of the polysilicone unitary body **118** may facilitate removal of the mold insert pieces **176** through the openings **134** in the unitary body **118**. The openings may be temporarily deformed (e.g., stretched) during this process. In such instances, it is preferable that the unitary body **118** be made of a suitable material which allows such deformation and then returns to its original shape.

[0069] Once the mold insert pieces **176** are removed, the conductive contacts **130** are disposed within the connector pockets **120**. The conductive contacts **130** may be disposed within the connector pockets **120** in any manner. Optionally, disposing the conductive contacts **130** in the connector pockets **120** may also be aided by altering the properties of the material used to form the unitary body **118**. For example, the unitary body **118** may be formed from polysilicone. The polysilicone unitary body **118** may be swollen by treatment with hexane or another material that swells the polysilicone. The conductive contacts **130** may then be disposed within the connector pockets **120** of the unitary body **118**. As the polysilicone is allowed to dry, the swelling of the polysilicone unitary body **118** decreases, and the conductive contacts **130** are disposed within the polysilicone as the polysilicone shrinks around the conductive contacts **130**. Optionally, adhesive may be used to further attach the conductive contacts **130** to the unitary body **118**.

[0070] Conductors **156** may then be coupled to the conductive contacts **130** by any suitable method including, for example, welding, soldering, and the like. Optionally, the conductors **156** may be attached to electrical conduits (not shown) that pass through the housing **114** to the sealed chamber.

1. A connector comprising:

a unitary body defining a hollow center region configured and arranged to receive a proximal contact portion of a lead, the unitary body further defining within the hollow center region a plurality of spaced-apart connector pockets, wherein each connector pocket defines an opening through the unitary body, and the unitary body further defining within the hollow center region a plurality of seal features disposed between the connector pockets.

2. The connector of claim 1, wherein the openings through the unitary body are disposed on one side of the unitary body.

3. The connector of claim 1, wherein the connector pockets are spaced-apart at substantially uniform intervals.

4. The connector of claim 1, wherein the unitary body further defines a stop pocket at an end of the hollow center region.

5. The connector of claim 1, further comprising a connector block coupled to the unitary body.

6. The connector of claim 1, further comprising a plurality of conductive contacts disposed in the openings through the unitary body.

7. The connector of claim 6, further comprising a plurality of conductors coupled to the conductive contacts.

8. The connector of claim 1, wherein the unitary body comprises polysilicone.

9. A stimulation device comprising:

a lead with a proximal contact portion comprising a plurality of contacts;

an electronic subassembly;

a connector that receives the proximal contact portion of the lead, wherein the connector comprises a unitary body that defines a hollow center region configured and arranged to receive the proximal contact portion of the lead, wherein the unitary body further defines within the hollow center region a plurality of spaced-apart connector pockets, wherein each connector pocket defines an opening through the connector, and the unitary body further defining within the hollow center region a plurality of seal features disposed between the connector pockets; and

a plurality of conductive contacts disposed in the openings of the connector and configured and arranged to couple the contacts of the lead to the electronic subassembly.

10. The stimulation device of claim 9, wherein the unitary body further defines a stop pocket at an end of the hollow region.

11. The stimulation device of claim 9, wherein the connector pockets are spaced-apart at substantially uniform intervals.

12. The stimulation device of claim 9, further comprising a connector block coupled to the unitary body.

13. The stimulation device of claim 9, further comprising a plurality of conductors that couple the electronic subassembly to the conductive contacts.

14. A method of making a stimulation device that provides electrical pulses to a tissue comprising:

forming a connector comprising a unitary body defining a hollow center region configured and arranged to receive a proximal contact portion of a lead, wherein the unitary body further defines within the hollow center region a plurality of spaced-apart connector pockets, wherein each connector pocket defines an opening through the unitary body, and the unitary body further defining within the hollow center region a plurality of seal features disposed between the connector pockets;

disposing a plurality of conductive contacts in the openings through the unitary body; and

coupling contacts on a lead to an electronic subassembly through the connector and conductive contacts.

15. (canceled)

16. The method of claim 14, wherein the connector is formed by molding, and wherein forming a connector comprises:

disposing mold insert pieces in a mold frame;

forming a unitary body around the mold insert pieces; and

removing the mold insert pieces from the unitary body formed around the mold insert pieces.

17. The method of claim 16, wherein disposing mold insert pieces in a mold frame comprises disposing mold insert pieces in a mold frame using a locating feature.

18. The method of claim 14, wherein disposing a plurality of conductive contacts in the openings through the unitary body comprises swelling the material used to form the unitary body.

19. The method of claim 14, further comprising coupling a connector block to the unitary body.

20. The method of claim 14, wherein coupling a lead to an electronic subassembly comprises coupling the lead to the electronic subassembly via a plurality of conductors.

21. The connector of claim 1, wherein at least four conductive contacts are disposed in the openings through the unitary body.

* * * * *