

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 August 2005 (25.08.2005)

PCT

(10) International Publication Number
WO 2005/077607 A1

(51) International Patent Classification⁷: **B25C 1/08**

(21) International Application Number:
PCT/US2005/002817

(22) International Filing Date: 2 February 2005 (02.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/543053 9 February 2004 (09.02.2004) US
11/028023 3 January 2005 (03.01.2005) US

(71) Applicant (for all designated States except US): **ILLINOIS TOOL WORKS, INC.** [US/US]; 3600 West Lake Avenue, Glenview, IL 60026-1215 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOELLER, Larry,**

M. [US/US]; 1074 Wren's Gate, Mundelein, IL 60060 (US). **DOHERTY, James, E.** [US/US]; 1127 Juniper Lane, Mount Prospect, IL 60056 (US).


(74) Agent: **SOLTIS, Lisa, M.**; Illinois Tool Works INC., 3600 West Lake Avenue, Glenview, IL 60026-1215 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: EXHAUST SYSTEM FOR COMBUSTION-POWERED FASTENER-DRIVING TOOL

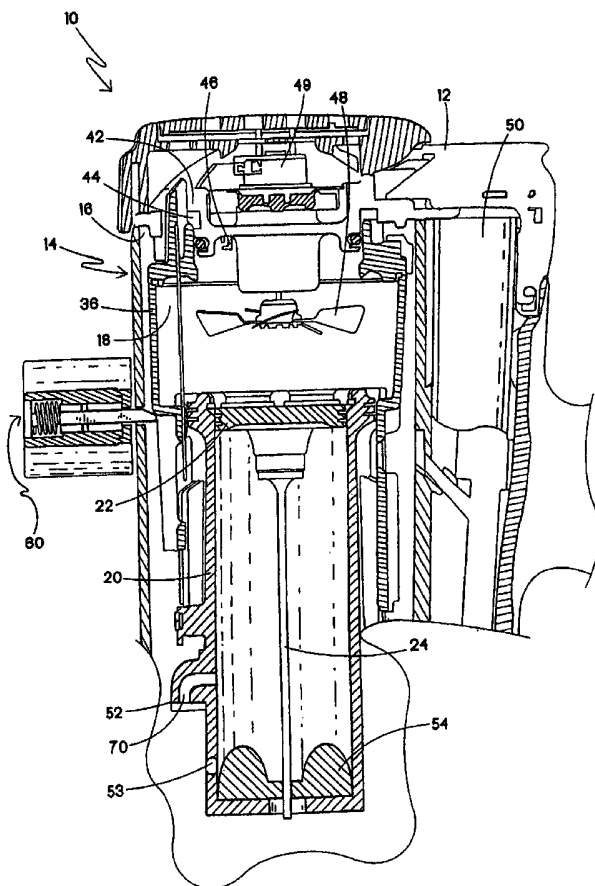

(57) Abstract: A combustion-powered fastener-driving tool (10) includes a combustion powered power source (14) including a cylinder (20) defining a path for a reciprocating piston (22) and an attached driver blade (24), the piston (22) reciprocating between a pre-firing position achieved prior to combustion and a bottom out position. Upon combustion in the power source (14), the cylinder (20) includes at least one exhaust valve (52) configured for releasing combustion gases from the cylinder (20). The at least one exhaust valve (52) is dimensioned so that sufficient gas is released to reduce post-combustion pressure in the cylinder (20) to approximately one atmosphere in the time available for the piston (22) to travel past the at least one exhaust valve (52) and return to the at least one exhaust valve (52).



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

EXHAUST SYSTEM FOR COMBUSTION-POWERED
FASTENER-DRIVING TOOL

RELATED APPLICATION

This application claims priority under 35 USC §120 from US Serial No. 60/543,053, filed February 9, 2004.

BACKGROUND

The present invention relates generally to fastener-driving tools used to drive fasteners into workpieces, and specifically to combustion-powered fastener-driving tools, also referred to as combustion tools.

5 Combustion-powered tools are known in the art, and exemplary tools produced by Illinois Tool Works of Glenview, IL, also known as IMPULSE® brand tools for use in driving fasteners into workpieces, are described in commonly assigned patents to Nikolich U.S. Pat. Re. No. 32,452, and U.S. Pat. Nos. 4,522,162; 4,483,473; 4,483,474; 4,403,722; 5,197,646; 5,263,439;
10 5,897,043 and 6,145,724 all of which are incorporated by reference herein.

Such tools incorporate a generally pistol-shaped tool housing enclosing a small internal combustion engine. The engine is powered by a canister of pressurized fuel gas, also called a fuel cell. A battery-powered electronic power distribution unit produces a spark for ignition, and a fan located in a combustion
15 chamber provides for both an efficient combustion within the chamber, while

facilitating processes ancillary to the combustion operation of the device. Such ancillary processes include: inserting the fuel into the combustion chamber; mixing the fuel and air within the chamber; and removing, or scavenging combustion by-products. The engine includes a reciprocating piston with an
5 elongated, rigid driver blade disposed within a single cylinder body.

A valve sleeve is axially reciprocable about the cylinder and, through a linkage, moves to close the combustion chamber when a work contact element at the end of the linkage is pressed against a workpiece. This pressing action also triggers a fuel-metering valve to introduce a specified volume of fuel
10 into the closed combustion chamber.

Upon the pulling of a trigger switch, which causes the spark to ignite a charge of gas in the combustion chamber of the engine, the combined piston and driver blade is forced downward to impact a positioned fastener and drive it into the workpiece. The piston then returns to its original, or pre-firing position,
15 through differential gas pressures within the cylinder. Fasteners are fed magazine-style into the nosepiece, where they are held in a properly positioned orientation for receiving the impact of the driver blade.

Combustion-powered tools now offered on the market are sequentially operated tools. The tool must be pressed against the work, collapsing
20 the work or workpiece contact element (WCE) before the trigger is pulled for the tool to fire a nail. This contrasts with tools which can be fired in what is known as repetitive cycle operation. In other words, the latter tools will fire repeatedly by

pressing the tool against the workpiece if the trigger is held in the depressed mode. These differences manifest themselves in the number of fasteners that can be fired per second for each style tool. The repetitive cycle mode is substantially faster than the sequential fire mode; 4 to 7 fasteners can be fired per second in repetitive
5 cycle as compared to only 2 to 3 fasteners per second in sequential mode.

Effective and complete piston return to the pre-firing position after combustion is required for dependable operation in sequential firing combustion tools as well as repetitive cycle combustion tools. An important factor that limits combustion-powered tools to sequential operation is the manner in which the drive
10 piston is returned to the initial position after the tool is fired. Combustion-powered tools utilize self-generative vacuum to perform the piston return function. Piston return of the vacuum-type requires significantly more time than that of tools that use positive air pressure from the supply line for piston return.

With combustion-powered tools of the type disclosed in the patents
15 listed above, by firing rate and control of the valve sleeve the operator controls the time interval provided for the vacuum-type piston return. The formation of the vacuum occurs following the combustion of the mixture and the exhausting of the high-pressure burnt gases. With residual high temperature gases in the tool, the surrounding lower temperature aluminum components cool and collapse the gases,
20 thereby creating a vacuum. In many cases, the tool operating cycle rate is slow enough, such as in trim applications that vacuum return works consistently and reliably.

However, for those cases where a tool is operated at a much higher cycle rate, the operator can open the combustion chamber early by removing the tool from the workpiece, allowing the valve sleeve to return to a rest position, causing the vacuum to be lost. Without vacuum to move it, piston travel stops
5 before reaching the top of the cylinder. This leaves the driver blade in the guide channel of the nose, thereby preventing the nail strip from advancing. The net result is no nail in the firing channel and no nail fired in the next shot.

Conventional combustion tools using the sequential-fire mode assure adequate closed combustion chamber dwell time with a chamber lockout
10 mechanism that is linked to the trigger. This mechanism holds the combustion chamber closed until the operator releases the trigger, thus taking into account the operator's relatively slow musculature response time. In other words, the physical release of the trigger consumes enough time of the firing cycle to assure piston return. It is disadvantageous to maintain the chamber closed longer than the
15 minimum time to return the piston, as cooling and purging of the tool is prevented.

Piston return in vacuum return combustion tools is the longest single process in the tool's engine cycle, which is defined as the time from when ignition occurs and the piston is returned to the pre-firing position. Times for piston return can range to 75 or even over 100 milliseconds. These times are controlled by the
20 rate and magnitude of vacuum formation. When the tool is operated in a repetitive cycle mode, a faster cycle time is desired and thus less time is available for

achieving proper piston return. A piston that does not fully return will prevent the tool from firing properly in a subsequent cycle.

Thus, there is a need for a combustion-powered fastener-driving tool provided with an enhanced piston return which is capable of operating in a repetitive cycle mode, and also which is capable of enhancing operation of sequentially firing combustion-powered tools.

BRIEF SUMMARY

The above-listed needs are met or exceeded by the present combustion-powered fastener-driving tool which overcomes the limitations of the current technology. Among other things, the present tool incorporates an exhaust valve dimensioned for enhancing piston return by facilitating the release of exhaust gas from the combustion chamber, thus accelerating the creation of vacuum responsible for piston return.

More specifically, the present combustion-powered fastener-driving tool includes a combustion-powered power source including a cylinder defining a path for a reciprocating piston and an attached driver blade, the piston reciprocating between a pre-firing position achieved prior to combustion and a bottom out position. Upon combustion in the power source, the cylinder includes at least one exhaust valve configured for releasing combustion gases from the cylinder. The at least one exhaust valve is dimensioned so that sufficient gas is released to reduce combustion pressure in the cylinder to approximately one

atmosphere in the time available for the piston to travel past the at least one exhaust valve and return to the at least one exhaust valve.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

5 FIG. 1 is a perspective view of a combustion tool suitable for incorporating the present exhaust system; and

 FIG. 2 is a fragmentary vertical cross-section of a fastener-driving tool incorporating the present exhaust system.

10 DETAILED DESCRIPTION

 Referring now to FIGs. 1 and 2, a combustion-powered fastener-driving tool incorporating the present invention is generally designated 10 and preferably is of the general type described in detail in the patents listed above and incorporated by reference in the present application. A housing 12 of the tool 10
15 encloses a self-contained internal power source 14 within a housing main chamber 16. As in conventional combustion tools, the power source 14 is powered by internal combustion and includes a combustion chamber 18 that communicates with a cylinder 20. A piston 22 reciprocally disposed within the cylinder 20 is connected to the upper end of a driver blade 24. As shown in FIG. 2, an upper
20 limit of the reciprocal travel of the piston 22 is referred to as a pre-firing position, which occurs just prior to firing, or the ignition of the combustion gases which

initiates the downward driving of the driver blade 24 to impact a fastener (not shown) to drive it into a workpiece.

Through depression of a trigger 26, an operator induces combustion within the combustion chamber 18, causing the driver blade 24 to be forcefully
5 driven downward through a nosepiece 28. The nosepiece 28 guides the driver blade 24 to strike a fastener that had been delivered into the nosepiece via a fastener magazine 30.

Included in the nosepiece 28 is a workpiece contact element 32, which is connected, through a linkage or upper probe 34 to a reciprocating valve
10 sleeve 36, an upper end of which partially defines the combustion chamber 18. Depression of the tool housing 12 against the workpiece contact element 32 in a downward direction (other operational orientations are contemplated as are known in the art) causes the workpiece contact element to move from a rest position to a pre-firing position (FIG. 2). This movement overcomes the normally downward
15 biased orientation of the workpiece contact element 32 caused by a spring 38 (shown hidden in FIG. 1). The position of the spring 38 may vary to suit the application, and locations displaced farther from the nosepiece 28 are contemplated.

In the pre-firing position (FIG. 2), the combustion chamber 18 is
20 sealed, and is defined by the piston 22, the valve sleeve 36 and a cylinder head 42, which accommodates a chamber switch 44 and a spark plug 46. In the preferred embodiment of the present tool 10, the cylinder head 42 also is the mounting point

for a cooling fan 48 and a fan motor 49 powering the cooling fan, the fan and at least a portion of the motor extending into the combustion chamber 18 as is known in the art.

Firing is enabled when an operator presses the workpiece contact
5 element 32 against a workpiece. This action overcomes the biasing force of the spring 38, causes the valve sleeve 36 to move upward relative to the housing 12, and sealing the combustion chamber 18 and activating the chamber switch 44. This operation also induces a measured amount of fuel to be released into the combustion chamber 18 from a fuel canister 50 (shown in fragment).

10 Upon a pulling of the trigger 26, the spark plug 46 is energized, igniting the fuel and air mixture in the combustion chamber 18 and sending the piston 22 and the driver blade 24 downward toward the waiting fastener. As the piston 22 travels down the cylinder 20, it pushes a rush of air which is exhausted through at least one petal or check valve 52 and at least one vent hole 53 located
15 beyond piston displacement (FIG. 2). At the bottom of the piston stroke or the maximum piston travel distance, the piston 22 impacts a resilient bumper 54 as is known in the art. With the piston 22 beyond the exhaust check valve 52, high pressure gasses vent from the cylinder 20 until near atmospheric pressure conditions are obtained and the check valve 52 closes. Due to internal pressure
20 differentials in the cylinder 20, the piston 22 is returned to the pre-firing position shown in FIG. 2.

As described above, one of the issues confronting designers of combustion-powered tools of this type is the need for a rapid return of the piston 22 to pre-firing position and improved control of the chamber 18 prior to the next cycle. While an issue with sequentially-firing combustion-powered tools, this need is more important if the tool is to be fired in a repetitive cycle mode, where an ignition occurs each time the workpiece contact element 32 is retracted, and during which time the trigger 26 is continually held in the pulled or squeezed position.

To accommodate these design concerns, the present tool 10 preferably incorporates an optional lockout device, generally designated 60, configured for preventing the reciprocation of the valve sleeve 36 from the closed or firing position until the piston 22 returns to the pre-firing position. This holding or locking function of the lockout device 60 is operational for a specified period of time required for the piston 22 to return to the pre-firing position. Thus, the operator using the tool 10 in a repetitive cycle mode can lift the tool from the workpiece where a fastener was just driven, and begin to reposition the tool for the next firing cycle.

Generally speaking, the device 60 includes a reciprocating, solenoid-type powered latch which engages the valve sleeve 36 according to a designated timing sequence controlled by a main tool control unit. It will be appreciated that a variety of mechanisms may be provided for retaining the combustion chamber

sealed during this period, and the depicted lockout device is by no means the only way this operation can be performed.

Due to the shorter firing cycle times inherent with repetitive cycle operation, the lockout device 60 ensures that the combustion chamber 18 will remain sealed, and the differential gas pressures maintained so that the piston 22 will be drawn back up without a premature opening of the chamber 18, which would normally interrupt piston return. With the present lockout device 60, the return of the piston 22 and opening of the combustion chamber 18 can occur while the tool 10 is being moved toward the next workpiece location. It is to be understood that the lockout device 60 is contemplated for use with some types of combustion-powered tools, but is not considered a required component.

The time required for desired piston return, is controlled by the extent that combustion gas is exhausted before the piston begins its return after having struck and rebounded from the bumper. Typical combustion tool construction locates exhaust ports at some convenient distance above the bumper, so that combustion gas can exhaust once the piston passes the ports and until it passes again on the return stroke. It is usually desirable to put the ports close to the bumper to gain the longest power stroke possible. This causes the exhaust time to be very short; typically on the order of only a few milliseconds. Once internal tool pressure equals atmospheric pressure, a check valve system closes the exhaust port, allowing vacuum to form in the tool to begin piston return.

It has been found that exhaust ports typically found in combustion tools are too small for the pressurized combustion gas to be fully removed. This causes the piston return time to be unnecessarily long, or the piston to rebound or oscillate back and forth – even stop for a time – as the vacuum develops. The piston 22 rebounding off of the bumper or bouncing off of the air cushion formed below the piston can cause such oscillation. The air cushion is formed when the exhaust ports 70, associated with the petal valves 52, and the vent hole 53 around the bumper 54 do not effectively allow for the swept volume caused by the downward movement of the piston 22 to be removed in a timely fashion. In cases where the piston 22 rebounds above the exhaust ports 70, the remaining residual combustion pressure has been known to force the piston back down to the bumper a second time. When this occurs, there is often a telltale mark on the work as evidence of the “double strike”, which is undesirable in finish work applications. Poor exhaust has been found to limit the tool cycle rate, especially in high-speed applications.

In the present tool 10, the desired short firing cycle times expected in the repetitive cycle mode are achieved in part by sizing the exhaust ports 70 (FIG. 2) to match the volume of combustion gases that must be exhausted such that the pressure inside the cylinder 20 is essentially reduced to one atmosphere. While tedious, it is contemplated that the proper port area can of course be found empirically for each specific case.

In the course of the development of the present tool 10, the inventors developed a rule that can be used once the time available for exhausting is selected. The latter is defined by the location of the exhaust ports 70 relative to the bumper 54, the stiffness of the bumper, the air cushion pressure, and the velocity of the piston 22. The ratio of the volume to be exhausted (in cubic inches) to the effective port area, in square inches is approximately ten times the required exhaust time (in milliseconds). Ideally, it is desired that after combustion, the zone of the cylinder 20 above the piston 22 is at atmospheric pressure as the piston reaches the bottom out position against the bumper 54. The differential pressure in the cylinder 20 on either side of the piston 22 helps return the piston back to the pre-firing position.

It has been found that the above relation may be expressed as $V/A = 20 + 8.4t$, where V is the expandable volume of the combustion chamber, A is the effective port area, V/A is the ratio of exhaust volume to effective port area, and t = time in milliseconds that the exhaust ports 70 allow fluid communication between the cylinder 20 and atmosphere. In other words, the time “ t ” represents the interval beginning when the piston 22 passes the exhaust ports 70, hits the bumper, and returns back toward the combustion chamber and passes over the exhaust ports again. For effective piston return, the value of “ t ” is approximately 4 milliseconds, although available times can range from 2 to 10 milliseconds. For a typical combustion-powered tool 10 with an exhaust volume of 40 cubic inches, in applying the above formula, the available time ranges from 2 to 10 milliseconds

and requires a range of corresponding minimum effective port areas of 1.1 and 0.4 square inches respectively to achieve effective exhaust conditions.

It has been found that the above relationships in sizing of the exhaust ports 70 can be utilized to enhance performance in combustion tools of many types, including those designed for repetitive cycle mode, in which a lockout device 60 may be provided, as well as combustion tools operating in a sequential firing mode, in which such lockout devices are usually not required.

While a particular embodiment of the present exhaust system for a combustion-powered fastener-driving tool has been described herein, it will be appreciated by those skilled in the art that changes and modifications may be made thereto without departing from the invention in its broader aspects and as set forth in the following claims.


CLAIMS:

1. A combustion-powered fastener-driving tool, comprising:
a combustion-powered power source including a cylinder defining a path for a reciprocating piston and an attached driver blade;
said piston reciprocating between a pre-firing position achieved prior
5 to combustion and a bottom out position, upon combustion in said power source, said cylinder includes at least one exhaust valve configured for releasing combustion gases from said cylinder;
said at least one exhaust valve being dimensioned so that sufficient gas is released to reduce combustion pressure in said cylinder to approximately
10 one atmosphere in the time available for said piston to travel past said at least one exhaust valve and return to said at least one exhaust valve.
2. The tool of claim 1 wherein said at least one exhaust valve is a check valve.
3. The tool of claim 2 wherein said at least one exhaust valve is a petal valve.
4. The tool of claim 1 wherein said exhaust valve is dimensioned according to the formula $V/A=20+8.4t$.


5. The tool of claim 1 wherein said exhaust valve has a port area in the range of .4 to 1.1 square inches.

6. The tool of claim 1 further including a valve sleeve lockout device.

1/2

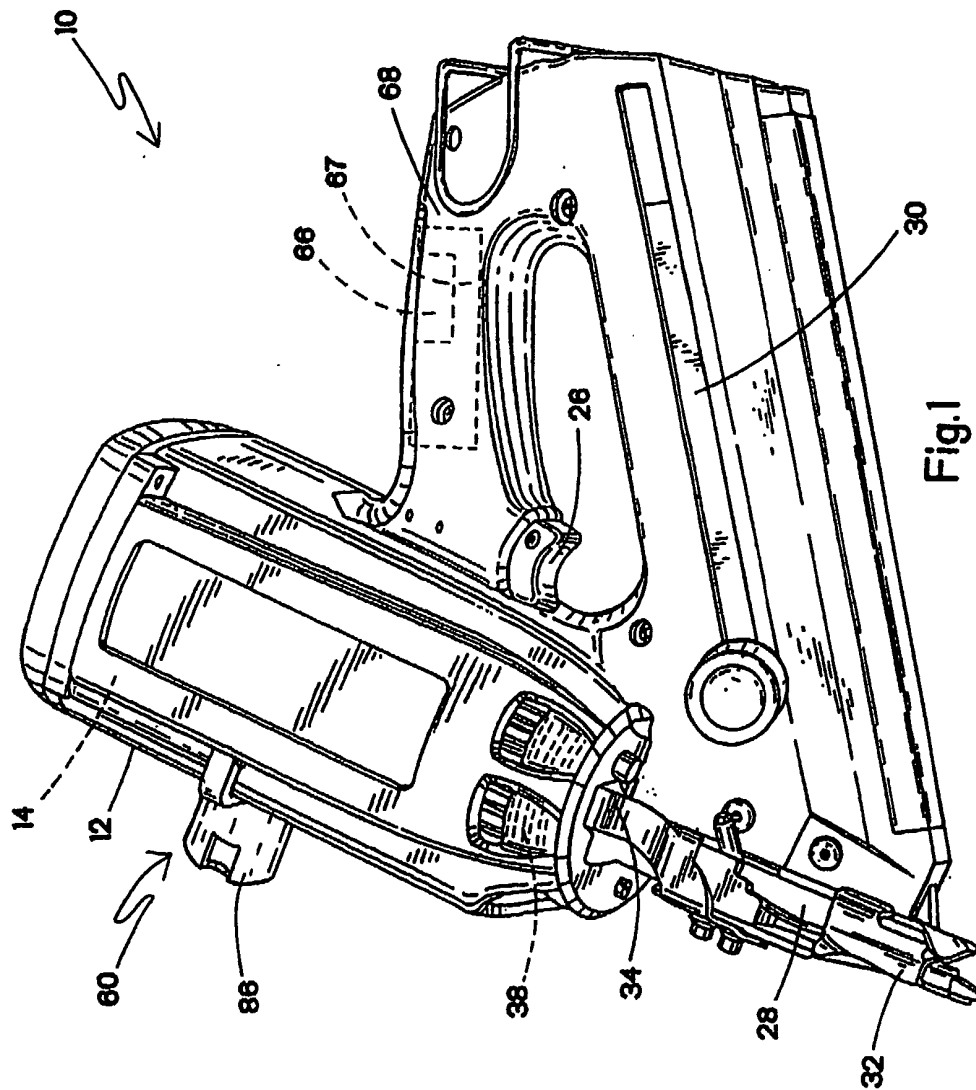

2/2

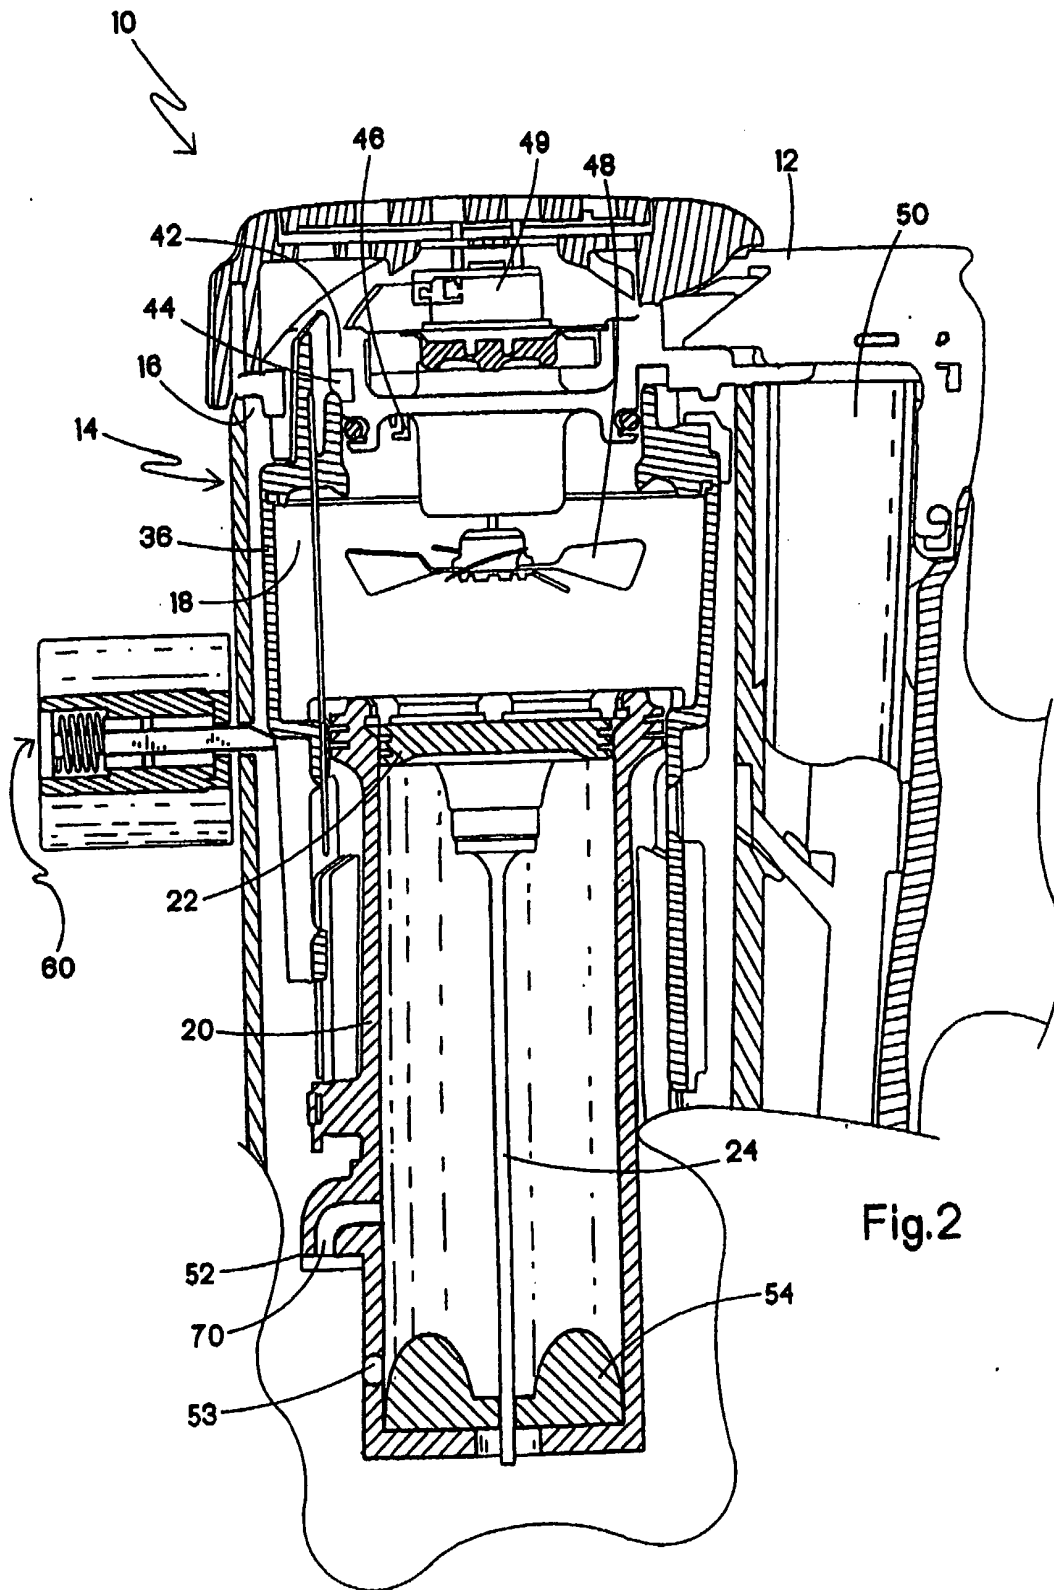

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/002817

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B25C1/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B25C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 522 162 A (NICKOLICH) 11 June 1985 (1985-06-11) cited in the application column 10, lines 6-30; figure 2	1-5
Y	-----	6
X	DE 198 53 555 A (BERNER) 31 May 2000 (2000-05-31) column 3, lines 49-52; figures	1
Y	-----	6
	US 6 145 724 A (SHKOLNIKOV) 14 November 2000 (2000-11-14) cited in the application column 3, lines 41-44; figures 1,2,8,14a-1	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

26 May 2005

Date of mailing of the international search report

06/06/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Matzdorf, U

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2005/002817

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 4522162	A	11-06-1985	AR	228635 A1		30-03-1983
			AT	38171 T		15-11-1988
			AT	73374 T		15-03-1992
			AU	549145 B2		16-01-1986
			AU	7974882 A		29-07-1982
			BR	8200348 A		23-11-1982
			CA	1187418 A1		21-05-1985
			CA	1277244 A ,B		04-12-1990
			DE	3279149 D1		01-12-1988
			DE	3280396 D1		16-04-1992
			DK	26582 A ,B,		23-07-1982
			EP	0056989 A2		04-08-1982
			EP	0316468 A2		24-05-1989
			ES	8302196 A1		01-04-1983
			FI	820189 A ,B,		23-07-1982
			IE	57459 B1		16-12-1992
			IL	64694 A		31-07-1986
			IN	157475 A1		05-04-1986
			JP	1658664 C		21-04-1992
			JP	3025307 B		05-04-1991
			JP	57178677 A		02-11-1982
			KR	8900721 B1		30-03-1989
			MX	151622 A		14-01-1985
			NO	820182 A ,B,		23-07-1982
			NO	870252 A ,B,		23-07-1982
			NZ	199535 A		16-08-1985
			PH	20783 A		14-04-1987
			PT	74323 A ,B		01-02-1982
			SU	1768024 A3		07-10-1992
			RU	2039644 C1		20-07-1995
			US	4483280 A		20-11-1984
			US	RE32452 E		07-07-1987
			ZA	8200448 A		29-12-1982
DE 19853555	A	31-05-2000	DE	19853555 A1		31-05-2000
US 6145724	A	14-11-2000	US	5909836 A		08-06-1999
			AU	733889 B2		31-05-2001
			AU	3401400 A		30-11-2000
			BR	0002161 A		19-12-2000
			CA	2306619 A1		20-11-2000
			CN	1274633 A ,C		29-11-2000
			CN	1431083 A		23-07-2003
			EP	1053834 A2		22-11-2000
			JP	2000334676 A		05-12-2000
			NO	20002583 A		21-11-2000
			NZ	504552 A		22-12-2000
			TW	461846 B		01-11-2001
			AU	703870 B1		01-04-1999
			BR	9804258 A		21-12-1999
			CA	2250457 A1		30-04-1999
			CN	1217967 A ,C		02-06-1999
			EP	0913234 A2		06-05-1999
			JP	11216684 A		10-08-1999
			NZ	332544 A		26-05-2000
			TW	426589 B		21-03-2001