

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



WIPO | PCT



(10) International Publication Number

WO 2014/133851 A1

(43) International Publication Date

4 September 2014 (04.09.2014)

(51) International Patent Classification:

D02G 3/28 (2006.01) D02G 3/48 (2006.01)

(21) International Application Number:

PCT/US2014/017244

(22) International Filing Date:

20 February 2014 (20.02.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/778,595 27 February 2013 (27.02.2013) US
14/037,459 26 September 2013 (26.09.2013) US

(71) Applicant: E. I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).

(72) Inventors: LOVE, Nathan, W.; 4421 Stonewall Avenue, Richmond, Virginia 23225 (US). FRANCE, Brian, R.; 5518 Koufax Drive, N. Chesterfield, Virginia 23234 (US). LAMONTIA, Mark, Allan; 108 Walnut Run Road, Landenberg, Pennsylvania 19350 (US). DEAKYNE, Clifford, K.; 3711 Oak Ridge Road, Wilmington, Delaware 19808 (US).

(74) Agent: STRICKLAND, Frederick, D.; E. I. du Pont de Nemours and Company, Legal Patent Records Center, Chestnut Run Plaza 721/2340, 974 Centre Road, PO Box 2915 Wilmington, Delaware 19805 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: UNBALANCED HYBRID CORDS AND METHODS FOR MAKING SUCH CORDS ON CABLE CODING MACHINES

FIG. 2

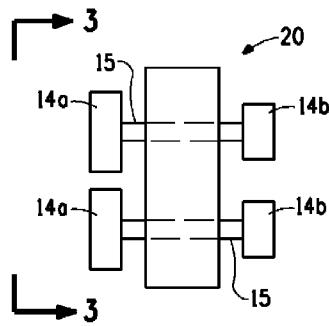

(57) Abstract: A hybrid cord formed from a plurality of component plies wherein at least one of the plies has a length that is from 1 to 50 percent longer than the other plies and a method of providing a cord with predetermined twist and component ply lengths.

WO 2014/133851 A1

TITLE OF INVENTION

UNBALANCED HYBRID CORDS AND METHODS FOR MAKING SUCH CORDS ON CABLE CODING MACHINES

5

BACKGROUND OF INVENTION

1. Field of the Invention.

This invention relates to producing twisted hybrid cords.

2. Description of Related Art.

10 Different types of materials, for example one having a higher modulus and one having a lower modulus, are often used together in hybrid cords for applications such as tire reinforcement. When forming a plied cord, it is common to use different twist levels in the high-modulus ply and the low-modulus ply to account for the difference in modulus 15 between the two materials, or in order to achieve a desired cord response. This currently cannot be achieved on cable corders because they do not form cords in the same manner as ring twisters. Although hybrid cords can be made on cable corders, the cord behavior that can be achieved is limited to that of a balanced twist cord, that is, a cord where the high- 20 modulus and low-modulus ply lengths are the same in which case there is only one response for any given twist level. When an unbalanced hybrid is required, it is currently made on ring twisters. Cable corders provide a tremendous productivity advantage, so it would be desirable to make both balanced and unbalanced hybrids on such machines considering that the 25 unbalanced hybrids are more common than perfectly balanced twist hybrids.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 depicts a prior art cable corder.

Figure 2 depicts a front view of the inventive cable corder.

30 Figure 3 depicts a side view of the inventive cable corder.

Figure 4 is a graph showing **load** vs. elongation at break.

SUMMARY OF THE INVENTION

The invention pertains to a hybrid cord comprising a plurality of 5 plies, wherein at least two of the plies are of unequal ply length regardless of the twist of the plies and at least one of the plies has a length that is from 1 to 50 percent longer than the other plies.

DETAILED DESCRIPTION OF THE INVENTION

By hybrid cord we mean a cord consisting of at least two plies in 10 which at least one ply has a different modulus from the other plies. As an example, one ply can be para-aramid and the other ply can be nylon. The plies may also be of the same composition, but of different modulus.

By zero ply twist we mean the amount of twist that could be measured in a ply if it were removed from a cord without untwisting the 15 cord. By ply length we mean the length of the ply if it were removed from the cord without untwisting the cord.

When two yarn plies are to be combined in the cable cording process, the plies run through a regulator. The regulator may consist of 20 two pulleys on one side connected by solid axles to two pulleys on the other side. The regulator helps assure the plies are entering the cord twist machine at the same rate. Fig. 1 shows generally at 10 a prior art regulator comprising pulleys 11 connected by axles 12. The diameters of the pulleys are all the same. Fig. 2 shows generally at 20 a regulator comprising pulleys 14a connected by axles 15 to pulleys 14b. The two 25 pulleys 14a on side 1 are of a larger diameter than the pulleys 14b on side 2, thus the ply traveling through side 1 will enter the cord faster than the ply from side 2. This is because the pulleys on both sides are connected by a solid axle and must rotate at the same speed. The larger circumferences of the pulleys on side 1 (as opposed to the pulleys on side 30 2) create a longer path for the ply to wrap around and therefore convey more ply for each rotation of the pulleys. Fig. 3 is a side view of Fig. 2 and

shows the path of a ply 13 around the larger diameter pulleys 14a. A second component ply follows a similar path around the smaller diameter pulleys 14b (not shown). Thus at least two of the plies are of unequal ply length regardless of the twist of the plies. In one embodiment, this 5 invention is to use a series of pulley sizes to create unbalanced hybrid cords. By sending a high modulus ply over larger pulleys and a lower modulus ply over the smaller pulleys, the high modulus ply will be longer than the other ply in the cord structure. The ratio between pulley sizes will dictate the ratio between ply lengths. If the pulleys for the high modulus 10 pulley are 25% larger in diameter than the pulleys for the low modulus pulley, the former will be roughly 25% longer than the latter.

In addition to matching the behavior of unbalanced, ring-twisted hybrid cords at cable corder productivity levels, the quality of the cord can also be improved. When large differences in twist between high modulus 15 plies and low modulus plies are made on ring twisters, the highly twisted low modulus ply provides a tremendous amount of residual torque in the cord. If the difference in length is achieved on a cable corder using different size pulleys, such residual torque in the low modulus ply will be minimized or absent. This will allow for more neutral cords and cords that 20 should be easier to control in manufacturing.

The hybrid cord can be made of a plurality of plies, wherein there is zero twist in the plies and at least one of the plies has a length that is from 1 to 50 percent longer than the other plies or 1 to 35 % longer or even 1 to 25% longer. The amount of differential length between the plies is selected 25 to suit specific performance requirements. In some embodiments, the hybrid cord has a linear density of from 500 to 5000 denier. In some other embodiments, the hybrid cord has a linear density of from 1000 to 3500 denier. The hybrid cord may be made from polymeric plies such as meta-aramid, para-aramid, polyazole, nylon, polyester, polyethylenenaphthalate 30 (PEN), rayon, polypropylene, ultra-high-molecular weight polyethylene (UHMW-PE) or carbon. A suitable polyazole is polyoxadiazole such as is available under the tradename Arselon from OJSC Svetlogorsk

Khimvolokno, Svetlogorsk, Belarus. The hybrid cord may also be made from metallic plies.

The hybrid cord may comprise a single ply of a high modulus material and a single ply of a low modulus material, such as at least one p-5 aramid ply and at least one nylon ply, wherein the shortest length ply is nylon. The hybrid cord may even comprise at least one p-aramid ply and at least one m-aramid ply wherein the shorter length ply is m-aramid.

In preferred embodiments, the plies comprise filamentary yarns that can be continuous, partly discontinuous or discontinuous such terms being 10 well known in the textile art. An example of a partly discontinuous yarn is a stretch-broken yarn. An example of a discontinuous yarn is a staple-spun 15 yarn.

In one embodiment of this invention, the p-aramid ply is from 2 to 7 percent longer than the m-aramid ply, preferably from 3 to 6 percent 20 longer or more preferably from 4 to 5 percent longer. A hybrid cord of this construction formed into a woven or knit fabric is particularly suitable for use in components that are subject to burst pressure testing at low temperatures such as room temperature and fatigue testing at high 25 temperatures such as 175 degrees C. An example of such a component is a turbocharger hose where the cords provide structural reinforcement to an elastomeric material. Similar applications may be found in other mechanical rubber goods applications such as conveyor belts and tires. In other embodiments, a p-aramid ply may be from 3 to 5 percent longer than a polyoxadiazole ply or a polyoxadiazole ply may be from 1 to 10 percent longer than a m-aramid ply.

The plies may have the same or different twist. In some embodiments, the plies have zero twist.

The pulleys may be adapted to fit any cabling machine such as those available from Oerlikon Saurer, Charlotte, NC or Verdol, Valence, 30 France or Aalidhra Textile Engineers Ltd., Surat, India.

In one embodiment, the invention is also directed to a method of providing a cord with predetermined twist and component ply lengths having the steps of

- (i) identifying the desired cord twist multiplier and component ply lengths,
- 5 (ii) identifying the number of component plies and the composition of each ply,
- (iii) providing a cabling machine,
- (iv) selecting appropriate size pulleys for the regulator of the cabling machine such that the pulleys on side 1 are larger than the pulleys on side
- 10 2 so as to provide the desired component ply length in the cord,
- (v) setting the desired twist level for the hybrid cord into the cabling machine,
- (vi) feeding the plies into the cabling machine, and
- (vii) producing a cabled cord having the desired twist multiplier and
- 15 component ply lengths.

Another embodiment pertains to a method of providing a hybrid cord with predetermined twist and component ply lengths by adjusting tension leads to force a length differential that accomplishes the goal outlined above wherein the size of the pulley is increased. This

20 embodiment comprises the steps of:

- (i) identifying the desired cord twist multiplier and component ply lengths,
- (ii) identifying the number of component plies and the composition of each ply,
- 25 (iii) providing a cabling machine,
- (iv) setting the desired twist level for the hybrid cord into the cabling machine ,

- (v) setting the desired tension level for the component piles,
- (vi) feeding the plies into the cabling machine, and
- (vii) producing a cabled cord having the desired twist multiplier and component ply lengths.

5 In this embodiment, a cabling machine of Fig. 1 may be used with a yarn tension device (not shown) located before each yarn feed-in pulley. Several types of tension devices are available on the market and are suitable for use.

10 In both of the methods described above, the component plies can have various combinations of twist. For example, the plies can all have zero twist; the component plies all have the same twist; or least two of the component plies can have a different twist.

EXAMPLES

15 The following examples are given to illustrate the invention and should not be interpreted as limiting it in any way.

Sample Preparation

The para-aramid yarns used were Kevlar® K29 1100 dtex available from E.I. DuPont de Nemours and Company, Wilmington, DE.

20 The nylon yarns used were PA66 1400 dtex available from Invista, Wilmington, DE.

Cords were formed on an Oerlikon Allma CC3 cable cording machine with each cord comprising one p-aramid yarn and one nylon yarn. All of the cords had a twist multiplier of 6.5. One cord had both component yarns of equal length from passing both yarns over pulleys of 25 equal diameter. Other cords had p-aramid yarns of a length 5%, 10% and 20% longer than the nylon yarns from using pulleys in which the diameter of the pulleys over which the p-aramid yarns passed were respectively of 5%, 10% and 20% greater diameter than those over which the nylon yarns passed. The cords were then tested for mechanical performance on an 30 Instron® universal test machine model 5500. The test method was ASTM

D885-07. Load vs. elongation at break profiles for the examples are shown in Figure 4.

The curves in Fig. 4 demonstrate how the behavior of hybrid cords

- 5 can be modified with different pulley ratios without changing the twist level of the cords. For the example of a Kevlar ®/nylon hybrid, 100/100 denotes that the diameter of the pulley over which the Kevlar ® yarn was the same as the diameter of the pulley over which the nylon yarn was fed. Kevlar ®/nylon hybrid, 105/100 denotes that the diameter of the pulley over which
- 10 the Kevlar ® yarn was fed was 5% larger than the diameter of the pulley over which the nylon yarn was fed and similarly for the other curves in Fig. 4. In certain tire applications higher elongations and lower initial modulus are desired and can be achieved by using a larger pulley for the Kevlar® ply.

Claims

1. A hybrid cord, comprising a plurality of plies, wherein at least two of the plies are of unequal ply length regardless of the twist of the plies and at least one of the plies has a length that is from 1 to 50 percent longer than the other plies and the plies comprise yarns selected from the group consisting of continuous filaments, staple spun yarns and stretch-broken yarns
2. The cord of claim 1, wherein the component plies are polymeric or metallic.
3. The cord of claim 1, wherein at least one of the plies has a length that is from 1 to 35 percent longer than the other plies.
4. The cord of claim 1, wherein at least one of the plies has a length that is from 1 to 25 percent longer than the other plies.
5. The cord of claim 2, wherein the polymeric plies are selected from the group consisting of m-aramid, p-aramid, polyazole, nylon, polyester, polyethylenenaphthalate, rayon, UHMW-PE and carbon.
6. The cord of claim 5, wherein the polyazole is polyoxadiazole.
7. The cord of claim 5, comprising at least one p-aramid ply and at least one nylon ply.
8. The cord of claim 5, comprising at least one p-aramid ply and at least one m-aramid ply.
9. The cord of claim 7, wherein the shortest length ply is nylon.
- 25 10. The cord of claim 8, wherein the shortest length ply is m-aramid.
11. The cord of claim 8, wherein the p-aramid ply is from 4 to 5 percent longer than the m-aramid ply.
12. A method of providing a hybrid cord with predetermined twist and component ply lengths comprising the steps of.

- (i) identifying the desired cord twist multiplier and component ply lengths,
- (ii) identifying the number of component plies and the composition of each ply,
- 5 (iii) providing a cabling machine,
- (iv) setting the desired twist level for the hybrid cord into the cabling machine ,
- (v) setting the desired tension level for the component piles,
- (vi) feeding the plies into the cabling machine, and
- 10 (vii) producing a cabled cord having the desired twist multiplier and component ply lengths.

13. The method of claim 12, wherein the component plies have zero twist.

14. The method of claim 12, wherein the component plies all have the same twist.

15. The method of claim 12, wherein at least two of the component plies have a different twist.

16. A product made by the method of claim 12, wherein the component plies have zero twist.

20 17. A product made by the method of claim 12, wherein the component plies all have the same twist.

18. A product made by the method of claim 12, wherein at least two of the component plies have a different twist.

20. An elastomeric reinforced hose, comprising the hybrid cord of claim 25 1

1/2

FIG. 1
(Prior Art)

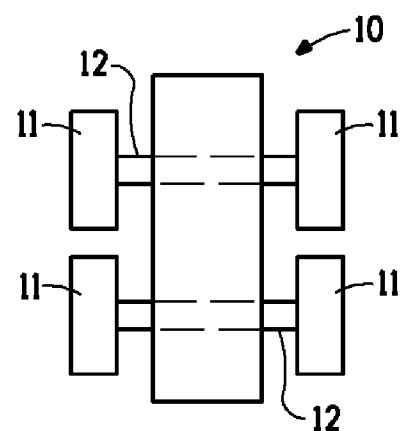


FIG. 2


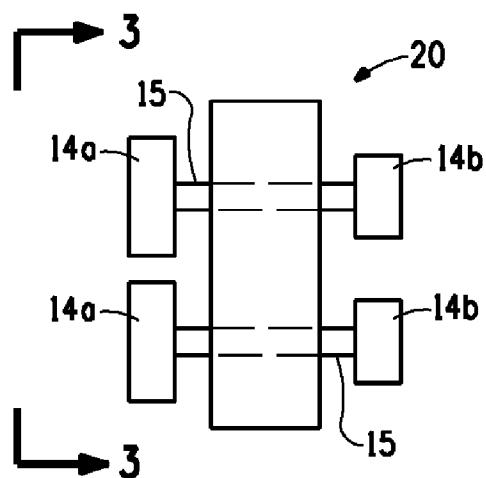


FIG. 3

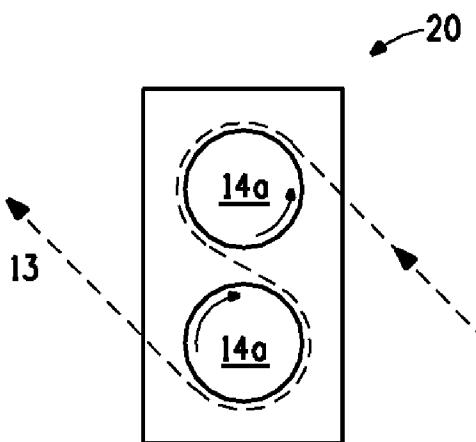

2/2

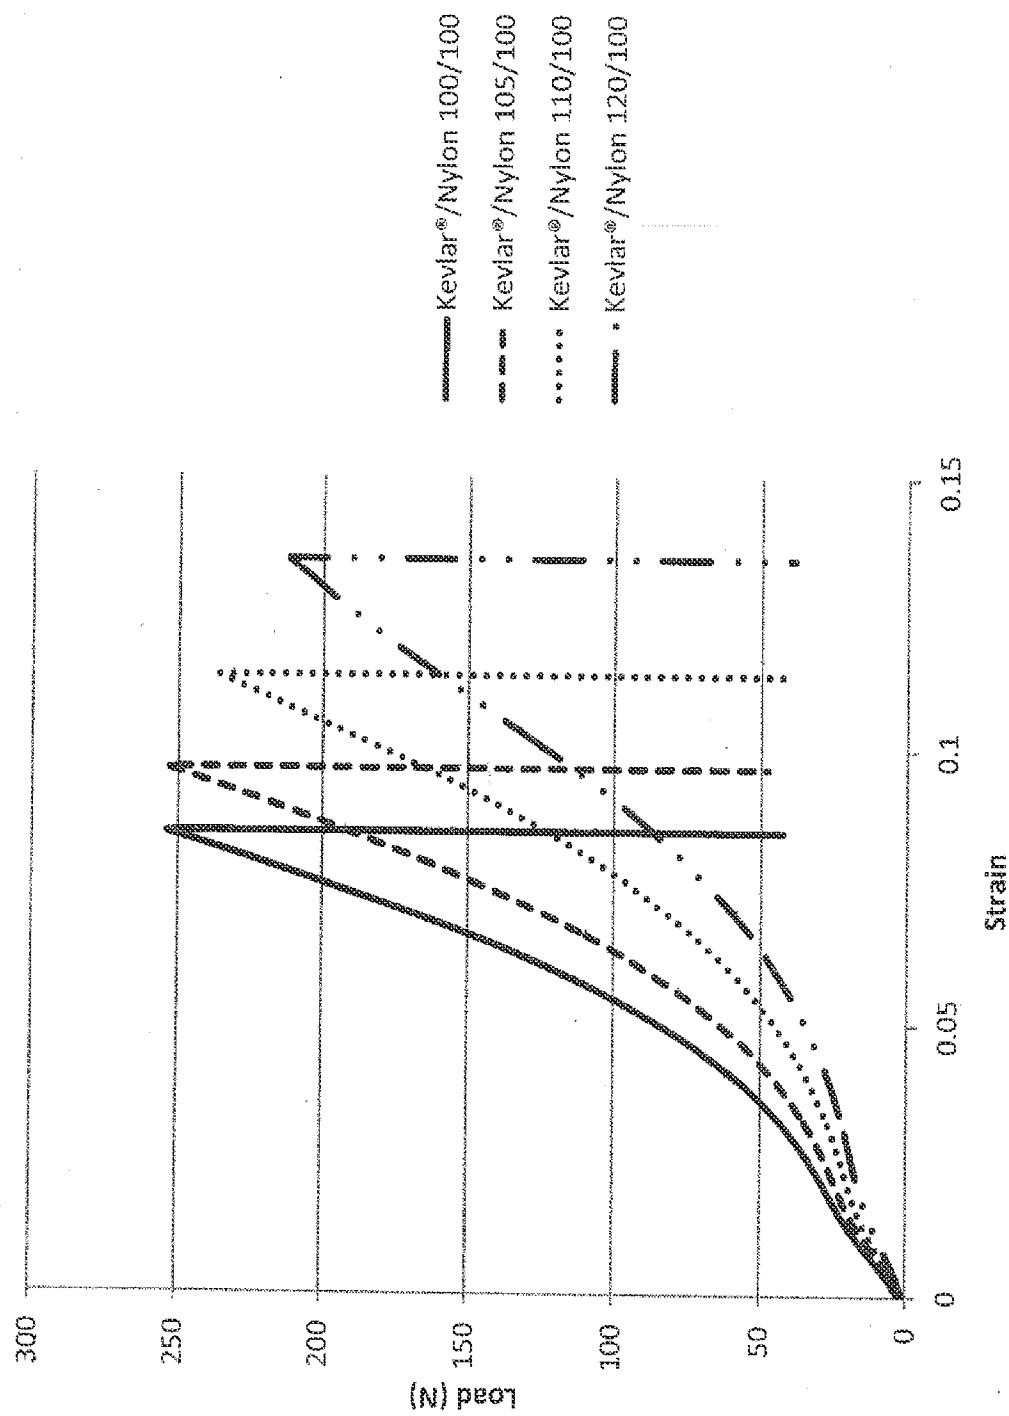


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/017244

A. CLASSIFICATION OF SUBJECT MATTER
INV. D02G3/28 D02G3/48
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
D02G B60C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/18291 A1 (ALLIED SIGNAL INC [US]) 15 March 2001 (2001-03-15) the whole document ----- X WO 2009/027615 A2 (RITM [FR]; MATAS CARLOS [FR]; COSTECHAREYRE SERGE [FR]) 5 March 2009 (2009-03-05) page 1, line 14 - line 27 page 5, line 28 - page 6, line 26 page 12, line 1 - page 14, line 23 ----- -/-	1-19 1-19

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
15 July 2014	24/07/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Pollet, Didier

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/017244

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BARRON E R: "Hybrid Tire Cords Containing Kevlar Aramid", KAUTSCHUK UND GUMMI - KUNSTSTOFFE, HUTHIG VERLAG, HEIDELBERG, DE, vol. 40, no. 2, 1 January 1987 (1987-01-01), pages 130-135, XP002232349, ISSN: 0948-3276 page 131, column 2, paragraph 2 - page 132; figure 5; table 3 -----	1-5,7,9, 12,15, 18,19
X	US 7 513 021 B1 (HASELWANDER JOHN G [US]) 7 April 2009 (2009-04-07) column 2, line 49 - line 54; figure 1 column 4, line 25 - column 6, line 5 -----	1,12
X	KR 2012 0030004 A (KOLON INC [KR]) 27 March 2012 (2012-03-27) paragraph [0011] - paragraph [0012] paragraph [0020] - paragraph [0025] paragraph [0048] - paragraph [0051] paragraph [0065] - paragraph [0067]; claims 14-15; example 4 -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2014/017244

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO 0118291	A1 15-03-2001	AU	773621 B2	27-05-2004
		AU	7129000 A	10-04-2001
		BR	0013910 A	27-08-2002
		EP	1210473 A1	05-06-2002
		MX	PA02002531 A	30-08-2002
		US	6601378 B1	05-08-2003
		US	2003159768 A1	28-08-2003
		WO	0118291 A1	15-03-2001
<hr/>				
WO 2009027615	A2 05-03-2009	NONE		
<hr/>				
US 7513021	B1 07-04-2009	NONE		
<hr/>				
KR 20120030004	A 27-03-2012	CN	103328705 A	25-09-2013
		EP	2617883 A2	24-07-2013
		JP	2013537264 A	30-09-2013
		KR	20120030004 A	27-03-2012
		US	2013167503 A1	04-07-2013
<hr/>				