



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
11.03.2020 Bulletin 2020/11

(51) Int Cl.:
H01G 11/34 (2013.01) H01G 11/86 (2013.01)

(21) Application number: **18880956.0**

(86) International application number:
PCT/KR2018/012276

(22) Date of filing: **17.10.2018**

(87) International publication number:
WO 2019/103314 (31.05.2019 Gazette 2019/22)

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **SUH, Donghoon**
Daejeon 34122 (KR)
• **YOON, Seokhyun**
Daejeon 34122 (KR)
• **LYU, Byunggook**
Daejeon 34122 (KR)

(30) Priority: **24.11.2017 KR 20170158926**

(74) Representative: **Hoffmann Eitle**
Patent- und Rechtsanwälte PartmbB
Arabellastraße 30
81925 München (DE)


(71) Applicant: **LG Chem, Ltd.**
Seoul 07336 (KR)

(54) **PROCESS FOR PREPARING ANODE ACTIVE MATERIAL FOR PSEUDOCAPACITOR**

(57) A method of preparing an anode active material for a pseudocapacitor is provided. According to the present invention, a method of preparing an anode active

material for a pseudocapacitor, which enables expression of high specific capacitance and excellent output characteristics, is provided.

【FIG. 8】

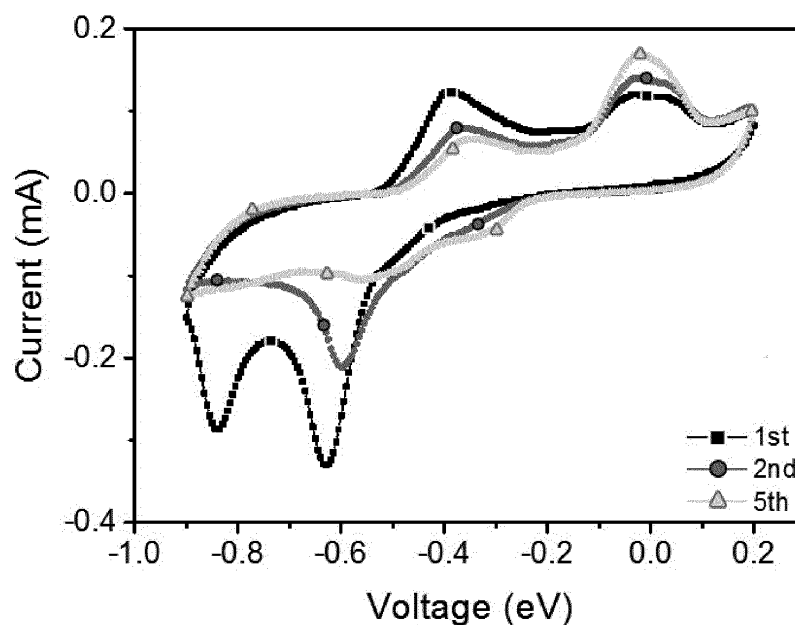

Description

[TECHNICAL FIELD]

5 Cross-reference to Related Application

[0001] The present application is based on, and claims priority from, Korean Patent Application No. 10-2017-0158926, filed on November 24, 2017, the disclosure of which is hereby incorporated by reference herein in its entirety.

[0002] The present invention relates to a method of preparing an anode active material for a pseudocapacitor.

10 [BACKGROUND OF ART]

[0003] Electrochemical capacitors are devices that store electrical energy by forming an electrical double layer between the surface of an electrode and an electrolyte. Capacitors have an almost infinite lifetime without damage to the electrode itself, and can store a large amount of current in a short time owing to their short charge/discharge time. For this reason, capacitors are electrical storage devices which may be usefully applied in fields where high output power is required.

[0004] With an increasing demand for an energy storage device having both high energy density and high output power, there is a growing interest in supercapacitors having higher energy density than known general capacitors and having much better output characteristics than lithium ion batteries.

20 **[0005]** Based on the energy storage mechanisms, supercapacitors may be classified into electrical double-layer capacitors (EDLCs) and pseudocapacitors.

[0006] Among them, EDLCs are based on the electrochemical phenomenon of the surface of carbon materials. Although EDLCs exhibit high output characteristics, they are applied only in limited fields because of relatively low energy density.

25 **[0007]** Pseudocapacitors store charges through a faradaic reaction that occurs on the nanostructured surface, and exhibit greater capacitance through reversible oxidation/reduction reactions at the electrode/electrolyte interface. Thus, pseudocapacitors are emerging as an alternative that can overcome the low specific capacitance of EDLCs.

[0008] However, in the case of pseudocapacitors operated in aqueous electrolytes, the kind of anode active materials known to be applicable is limited to bismuth oxide (Bi_2O_3), vanadium oxide (V_2O_5), etc. In particular, although a variety of methods such as SILAR, a hydrothermal method, an electrodeposition method, a sol-gel method, etc. are known as a method of preparing the anode active material, anode active materials prepared by these methods have limitations in that they cannot exhibit sufficient electrochemical characteristics.

35 [DETAILED DESCRIPTION OF THE INVENTION]

[Technical Problem]

[0009] The present invention provides a method of preparing an anode active material for a pseudocapacitor, which enables expression of high specific capacitance and excellent output characteristics.

40 [Technical Solution]

[0010] According to the present invention, a method of preparing an anode active material for a pseudocapacitor is provided, the method including the steps of:

45 forming a first precipitate by dropwise adding triethanolamine to a bismuth nitrate ($\text{Bi}(\text{NO}_3)_3$) aqueous solution; obtaining a second precipitate by refluxing the solution containing the first precipitate; and obtaining bismuth(III) oxide nanoparticles by heat-treating the second precipitate.

50 **[0011]** Hereinafter, a method of preparing an anode active material for a pseudocapacitor according to embodiments of the present invention will be described in detail.

[0012] The terminology used herein is only for the purpose of describing particular embodiments and is not intended to be limiting of the invention, unless the context clearly indicates otherwise.

[0013] As used herein, the singular forms are intended to include plural forms as well, unless the context clearly indicates otherwise.

55 **[0014]** It will be further understood that the terms "include" or "including" when used in this specification, specify the stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of other features, regions, integers, steps, operations, elements, components, and/or groups.

[0015] Meanwhile, the present inventors have continued to study, and as a result, they found that when triethanolamine is dropwise added to a bismuth nitrate aqueous solution to form a precipitate, which is then subjected to a simplified reaction process of refluxing, bismuth(III) oxide nanoparticles may be synthesized. It was also confirmed that when the bismuth(III) oxide nanoparticles prepared by this method are applied to an anode active material for a pseudocapacitor, high specific capacitance and excellent output characteristics may be expressed.

[0016] Particularly, during formation of the precipitate by dropwise adding triethanolamine and the subsequent refluxing process, bismuth cations (Bi^{3+}) are easily generated through the ionic reaction between bismuth nitrate and triethanolamine, and through the refluxing process, the bismuth cations (Bi^{3+}) bind to hydroxide anions (OH^-) to produce final stable bismuth(III) oxide nanoparticles via an unstable $\text{Bi}(\text{OH})_3$ phase. The anode material synthesized by such processes has a structural feature of relatively small aggregation, and thus enables expression of high specific capacitance and excellent output characteristics, as compared with nanoparticles having the same composition prepared by any method other than the above processes.

[0017] According to one embodiment of the present invention, a method of preparing an anode active material for a pseudocapacitor is provided, the method including the steps of:

forming a first precipitate by dropwise adding triethanolamine to a bismuth nitrate ($\text{Bi}(\text{NO}_3)_3$) aqueous solution; obtaining a second precipitate by refluxing the solution containing the first precipitate; and obtaining bismuth(III) oxide nanoparticles by heat-treating the second precipitate.

[0018] Hereinafter, each of the steps which may be included in the method of preparing the anode active material for a pseudocapacitor will be described in more detail.

[0019] According to an embodiment of the present invention, the step of forming a first precipitate by dropwise adding triethanolamine to a bismuth nitrate ($\text{Bi}(\text{NO}_3)_3$) aqueous solution is performed.

[0020] The bismuth nitrate aqueous solution is a homogeneous mixture in which bismuth nitrate is dissolved in a solvent such as distilled water or deionized water.

[0021] Preferably, the bismuth nitrate aqueous solution may be a 50 to 100 mN (based on bismuth) aqueous solution containing bismuth nitrate(III) pentahydrate ($\text{Bi}(\text{NO}_3)_3 \cdot 5\text{H}_2\text{O}$) as a solute. Specifically, a concentration of the bismuth nitrate aqueous solution may preferably be 50 mN or more, or 55 mN or more, and 100 mN or less, 90 mN or less, 80 mN or less, or 70 mN or less, based on bismuth.

[0022] That is, to allow sufficient formation of the precipitate by dropwise adding triethanolamine, the concentration of the bismuth nitrate aqueous solution is preferably 50 mN or more. However, when the concentration is too high, the unreacted solute may be included in the precipitate to decrease the efficiency of the precipitate formation reaction. Thus, the concentration of the bismuth nitrate aqueous solution is preferably 100 mN or less.

[0023] The triethanolamine is added dropwise to the bismuth nitrate aqueous solution to allow a first white precipitate to be slowly formed.

[0024] In this regard, the triethanolamine is added dropwise at a volume ratio of 1:0.001 to 1:0.1, based on the volume of the bismuth nitrate aqueous solution. Specifically, the triethanolamine may preferably be added dropwise at a volume ratio of 1:0.001 or more, 1: 0.005 or more, 1:0.010 or more, or 1:0.015 or more, and 1:0.1 or less, 1: 0.05 or less, or 1:0.025 or less, based on the volume of the bismuth nitrate aqueous solution.

[0025] In other words, to allow sufficient formation of the first precipitate by dropwise adding the triethanolamine, the triethanolamine is preferably added dropwise at a volume ratio of 1:0.001 or more with respect to the bismuth nitrate aqueous solution. However, when an excess amount of triethanolamine is added, the efficiency of the first precipitate formation may be decreased. Therefore, the triethanolamine is preferably added dropwise at a volume ratio of 1:0.1 or less with respect to the bismuth nitrate aqueous solution.

[0026] The step of obtaining a second precipitate by refluxing the solution containing the first precipitate is performed.

[0027] The refluxing may be performed using a common reflux apparatus.

[0028] As a non-limiting example, the solution containing the first precipitate is put in an appropriate vessel, for example, a round-bottom flask. This vessel is connected to a water-cooled Liebig or Vigreux condenser, which is generally open to the atmosphere at the top. The vessel is directly or indirectly heated to boil the solution containing the first precipitate. Vapor produced from the solution may be condensed by the condenser, and returned to the vessel by gravity. Through refluxing, formation of the nanoparticle-phased second precipitate from the first precipitate may be facilitated, and a precursor of the anode active material that enables expression of the effects according to the present invention may be formed.

[0029] According to an embodiment of the present invention, the refluxing is preferably performed at 50 °C to 100 °C for 5 hours to 24 hours.

[0030] That is, the refluxing may be continuously performed at a 100 °C or lower which is a boiling point of the solvent for 5 hours to 24 hours, 10 hours to 24 hours, or 12 hours to 24 hours, which is advantageous in terms of formation of the nanoparticle-phased second precipitate. However, when the refluxing is performed at an excessively low temperature

and/or for a very short time, the efficiency of the second precipitate formation may be reduced. Therefore, the refluxing may preferably be performed at a temperature of 50 °C or higher, 60 °C or higher, or 70 °C or higher for the above range of time.

[0031] Through the refluxing, the white nanoparticle-phased second precipitate is formed in the vessel. The second precipitate has the same composition as the first precipitate. However, the first precipitate in a form in which it is difficult to specify its particle size is contained in the solution, and through the refluxing, the second precipitate having a nanoscale particle size may be obtained.

[0032] The second precipitate precipitated in the vessel may be separated by a common method, such as centrifugation, etc.

[0033] Optionally, a step of washing the second precipitate may be further performed.

[0034] The washing is a process of removing impurities from the second precipitate. The washing may be performed by a method of washing the second precipitate several times using a solvent such as distilled water, deionized water, or ethanol.

[0035] Optionally, a step of drying the washed second precipitate may be further performed. The drying may be performed using a vacuum oven. Alternatively, the drying may be performed by a common freeze-drying method.

[0036] Preferably, the drying may be performed at a temperature of 20 °C to 80 °C. Specifically, the drying may be performed at a temperature of 20 °C or higher, 25 °C or higher, 40 °C or higher, or 60 °C or higher, and 80 °C or lower, or 70 °C or lower.

[0037] Subsequently, the step of obtaining bismuth(III) oxide nanoparticles by heat-treating the second precipitate is performed.

[0038] According to an embodiment of the present invention, the heat-treatment may be performed in an oxygen atmosphere at 150 °C to 300 °C for 1 hour to 5 hours, which is preferable in terms of obtaining the bismuth(III) oxide nanoparticles as an anode active material satisfying the above-described characteristics.

[0039] Specifically, the heat treatment may be performed in an oxygen atmosphere at 150 °C or higher, or 200 °C or higher; and 300 °C or lower, or 250 °C or lower, and the heat treatment may be continuously or discontinuously performed for 60 minutes or longer, 90 minutes or longer, or 120 minutes or longer, and 300 minutes or shorter, 240 minutes or shorter, or 180 minutes or shorter.

[0040] Optionally, the step of pulverizing the bismuth(III) oxide nanoparticles obtained by the above heat-treatment may be performed.

[0041] The pulverizing is a step of providing an anode active material having more improved activity by increasing a specific surface area of the bismuth(III) oxide nanoparticles. This step may be optionally performed.

[0042] According to an embodiment of the present invention, the bismuth(III) oxide nanoparticles prepared by the above-described method may have an average particle diameter of 500 nm to 5000 nm.

[0043] Here, the average particle diameter of the nanoparticles means an arithmetic mean calculated based on the greatest outer diameter of individual particles, as measured with a scanning electron microscope.

[0044] The bismuth(III) oxide nanoparticles prepared by the above method may be applied to an anode active material for a pseudocapacitor, which enables expression of high specific capacitance and excellent output characteristics.

[0045] Meanwhile, the anode for a pseudocapacitor may include common components such as a conductive material and a binder, together with the bismuth(III) oxide nanoparticles prepared by the above method.

[0046] The conductive material is used to provide an anode with conductivity, and is not particularly limited as long as it has electrical conductivity without causing chemical changes. Non-limiting examples of the conductive material may include natural graphite, artificial graphite, carbon black, acetylene black, Ketjen black, channel black, furnace black, lamp black, thermal black, carbon fibers, etc.

[0047] Further, the binder may be used to improve adhesion between materials constituting the anode, and adhesive force between the collector and the anode. Non-limiting examples of the binder may include polyvinylidene fluoride (PVDF), a vinylidene fluoride-hexafluoropropylene copolymer (PVDF-co-HFP), polyvinyl alcohol, polyacrylonitrile, carboxymethyl cellulose, starch, hydroxypropyl cellulose, polyvinyl pyrrolidone, tetrafluoroethylene, polyethylene, polypropylene, an ethylene-propylene-diene polymer (EPDM), sulfonated-EPDM, styrene butadiene rubber (SBR), fluorine rubber, etc.

[0048] The anode for a pseudocapacitor may be manufactured by applying the above-described components onto a collector made of a material such as copper, aluminum, nickel, or stainless steel, followed by pressing and drying.

[0049] The pseudocapacitor may have a structure including the anode, a common positive electrode, a separator interposed between the positive electrode and the anode, and an electrolyte.

[ADVANTAGEOUS EFFECTS]

[0050] According to the present invention, a method of preparing an anode active material for a pseudocapacitor, which enables expression of high specific capacitance and excellent output characteristics, is provided.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[0051]

FIG. 1 shows scanning electron microscopic (SEM) images of an anode active material prepared according to Example 1, photographed at different magnifications;
 FIG. 2 shows SEM images of an anode active material prepared according to Comparative Example 1, photographed at different magnifications;
 FIG. 3 shows SEM images of an anode active material prepared according to Comparative Example 2, photographed at different magnifications;
 FIG. 4 shows SEM images of an anode active material prepared according to Comparative Example 3, photographed at different magnifications;
 FIG. 5 shows a cyclic voltammetry graph for a pseudocapacitor to which the anode active material according to Example 1 was applied;
 FIG. 6 shows a cyclic voltammetry graph for a pseudocapacitor to which the anode active material according to Comparative Example 1 was applied;
 FIG. 7 shows a cyclic voltammetry graph for a pseudocapacitor to which the anode active material according to Comparative Example 2 was applied; and
 FIG. 8 shows a cyclic voltammetry graph for a pseudocapacitor to which the anode active material according to Comparative Example 3 was applied.

[DETAILED DESCRIPTION OF THE EMBODIMENTS]

Hereinafter, preferred examples will be provided for better understanding of the present invention. However, the following examples are for illustrative purposes only, and the present invention is not intended to be limited thereby.

Example 1

[0053] 3.0 g of bismuth nitrate(III) pentahydrate ($\text{Bi}(\text{NO}_3)_3 \cdot 5\text{H}_2\text{O}$) and 100 mL of deionized water were put into and stirred in a round bottom flask having a volume of 250 mL to prepare a homogeneous bismuth nitrate aqueous solution.

[0054] A total of 2 mL of triethanolamine was slowly added dropwise to the round bottom flask, and formation of a first white precipitate was confirmed.

[0055] The round bottom flask was placed in a reflux apparatus provided with a condenser, a heating mantle, and a thermocouple probe, followed by refluxing for 12 hours while heating at a temperature of 70 °C. By refluxing, a second white precipitate having a nanoscale particle size was formed from the first precipitate.

[0056] The second precipitate was recovered using a centrifuge, and then washed with deionized water and ethanol to remove impurities.

[0057] The washed second precipitate was dried in a vacuum oven at 70 °C.

[0058] The dried second precipitate was continuously heat-treated in an oxygen atmosphere at 200 °C for 2 hours to obtain bismuth(III) oxide nanoparticles (SDH-68).

Comparative Example 1

[0059] 3.0 g of bismuth nitrate(III) pentahydrate ($\text{Bi}(\text{NO}_3)_3 \cdot 5\text{H}_2\text{O}$) and 6 mL of 60 % nitric acid were put into and stirred in a round bottom flask having a volume of 250 mL to prepare a homogeneous solution.

[0060] 30 mL of propanol and 30 mL of N-methyl-2-pyrrolidone were added to the round bottom flask, followed by stirring.

[0061] 1 g of citric acid was added thereto, and further stirred, and then 20 ml of a 9 M NaOH aqueous solution was added dropwise thereto to confirm formation of a precipitate.

[0062] The round bottom flask was placed in a reflux apparatus provided with a condenser, a heating mantle, and a thermocouple probe, followed by refluxing for 12 hours while heating at a temperature of 80 °C. By refluxing, a nanoscale precipitate was formed.

[0063] The nanoscale precipitate was recovered using a centrifuge, and then washed with deionized water and ethanol to remove impurities.

[0064] The washed precipitate was dried in a vacuum oven at 70 °C.

[0065] The dried precipitate was continuously heat-treated in an oxygen atmosphere at 400 °C for 2 hours to obtain bismuth(III) oxide (SDH-63).

Comparative Example 2

[0066] 3.0 g of bismuth nitrate(III) pentahydrate ($\text{Bi}(\text{NO}_3)_3 \cdot 5\text{H}_2\text{O}$) and 6 mL of 60 % nitric acid were put into and stirred in a round bottom flask having a volume of 250 mL to prepare a homogeneous solution.

[0067] 60 mL of propanol and 60 mL of N-methyl-2-pyrrolidone were added to the round bottom flask, followed by stirring.

[0068] 1 g of citric acid and 1 g of carbon nanotube powder were added thereto, and further stirred, and then 20 ml of a 9 M NaOH aqueous solution was added dropwise thereto to confirm formation of a precipitate.

[0069] The round bottom flask was placed in a reflux apparatus provided with a condenser, a heating mantle, and a thermocouple probe, followed by refluxing for 12 hours while heating at a temperature of 80 °C. By refluxing, a nanoscale precipitate was formed.

[0070] The nanoscale precipitate was recovered using a centrifuge, and then washed with deionized water and ethanol to remove impurities.

[0071] The washed precipitate was dried in a vacuum oven at 70 °C.

[0072] The dried precipitate was continuously heat-treated in an oxygen atmosphere at 200 °C for 2 hours to obtain a bismuth(III) oxide nanoparticle-containing carbon nanotube complex (SDH-66).

Comparative Example 3

[0073] 3.0 g of bismuth nitrate(III) pentahydrate ($\text{Bi}(\text{NO}_3)_3 \cdot 5\text{H}_2\text{O}$) and 6 mL of 60 % nitric acid were put into and stirred in a round bottom flask having a volume of 250 mL to prepare a homogeneous solution.

[0074] 60 mL of propanol and 60 mL of N-methyl-2-pyrrolidone were added to the round bottom flask, followed by stirring.

[0075] 1 g of citric acid and 1 g of lithium acetate ($\text{C}_2\text{H}_3\text{LiO}_2$) were added thereto, and further stirred, and then 20 ml of a 9 M NaOH aqueous solution was added dropwise thereto to confirm formation of a precipitate.

[0076] The round bottom flask was placed in a reflux apparatus provided with a condenser, a heating mantle, and a thermocouple probe, followed by refluxing for 12 hours while heating at a temperature of 80 °C. By refluxing, a nanoscale precipitate was formed.

[0077] The nanoscale precipitate was recovered using a centrifuge, and then washed with deionized water and ethanol to remove impurities.

[0078] The washed precipitate was dried in a vacuum oven at 70 °C.

[0079] The dried precipitate was continuously heat-treated in an oxygen atmosphere at 200 °C for 2 hours to obtain excess lithium-containing bismuth(III) oxide (SDH-70).

Experimental Example 1

[0080] The anode active materials for a pseudocapacitor according to the example and comparative examples were photographed using a scanning electron microscope (SEM) at different magnifications. The photographed images are shown in FIG. 1 (Example 1), FIG. 2 (Comparative Example 1), FIG. 3 (Comparative Example 2), and FIG. 4 (Comparative Example 3).

[0081] Referring to FIGS. 1 to 4, it was confirmed that the aggregation phenomenon of the bismuth(III) oxide nanoparticles according to Example 1 was not relatively severe, as compared with those of the bismuth(III) oxides according to Comparative Example 2 and Comparative Example 3, and therefore, it may be more appropriately used as an anode active material for a pseudocapacitor. The bismuth(III) oxide according to Comparative Example 1 showed a smooth surface, whereas the bismuth(III) oxide according to Example 1 showed a relatively rough surface, implying that accessibility of an electrolyte to the bismuth(III) oxide according to Example 1 is better.

Experimental Example 2

[0082] Pseudocapacitors were manufactured using the anode active materials for a pseudocapacitor according to the example and comparative examples by the following method, and then IVIUMSTAT equipment (manufactured by Ivium Technologies) was used to obtain a cyclic voltammetry graph for each pseudocapacitor.

[0083] Each of the anode active materials, carbon black, and a binder (PVDF) were mixed at a weight ratio of 7:2:1 to prepare a composition for forming an anode. The composition was applied onto a glassy carbon electrode (GCE), and then dried under vacuum and dried at 70 °C for 24 hours. An electrolyte (1 M Li_2SO_4) was impregnated into the manufactured electrode, and stabilized, followed by cyclic voltammetry using a platinum counter electrode and an SCE reference electrode. At this time, cyclic voltammetry was performed in the potential range of - 0.9 V to 0.2 V at a scan rate of 10 mV/s.

[0084] The cyclic voltammetry graphs thus obtained by the method are shown in FIG. 5 (Example 1), FIG. 6 (Comparative Example 1), FIG. 7 (Comparative Example 2), and FIG. 8 (Comparative Example 3), and the measured values

of specific capacitance are shown in the following Table 1.

[Table 1]

Cycle	Example 1	Comparative Example 1	Comparative Example 2	Comparative Example 3
1 st	192.25 F/g	106.62 F/g	73.57 F/g	31.03 F/g
2 nd	177.33 F/g	101.13 F/g	66.89 F/g	27.36 F/g
5 th	155.92 F/g	96.52 F/g	60.89 F/g	27.02 F/g

[0085] Referring to Table 1 and FIGS. 5 to 8, the pseudocapacitor to which the anode active material of Example 1 was applied showed high specific capacitance of 192.25 F/g and specific capacitance of 155.92 F/g even after a 5th cycle.

[0086] Although the anode active materials according to the comparative examples were prepared under reflux conditions similar to those of the example, they showed remarkably low specific capacitance, as compared with that of Example 1.

Claims

1. A method of preparing an anode active material for a pseudocapacitor, the method comprising the steps of:

forming a first precipitate by dropwise adding triethanolamine to a bismuth nitrate ($\text{Bi}(\text{NO}_3)_3$) aqueous solution;
obtaining a second precipitate by refluxing the solution containing the first precipitate; and
obtaining bismuth(III) oxide nanoparticles by heat-treating the second precipitate.

2. The method of claim 1, wherein the bismuth nitrate aqueous solution is a 50 to 100 mN (based on bismuth) aqueous solution containing bismuth nitrate(III) pentahydrate ($\text{Bi}(\text{NO}_3)_3 \cdot 5\text{H}_2\text{O}$) as a solute.

3. The method of claim 1, wherein the triethanolamine is added dropwise at a volume ratio of 1:0.001 to 1:0.1, based on the volume of the bismuth nitrate aqueous solution.

4. The method of claim 1, wherein the refluxing is performed at 50 °C to 100 °C for 5 hours to 24 hours.


5. The method of claim 1, wherein the heat treatment is performed in an oxygen atmosphere at 150 °C to 300 °C for 1 hour to 5 hours.

6. The method of claim 1, comprising the steps of:


forming a first precipitate by dropwise adding triethanolamine to a bismuth nitrate ($\text{Bi}(\text{NO}_3)_3$) aqueous solution;
obtaining a second precipitate by refluxing the solution containing the first precipitate;
washing the second precipitate;
drying the washed second precipitate; and
obtaining bismuth(III) oxide nanoparticles by heat-treating the dried second precipitate.

7. The method of claim 1, wherein the bismuth(III) oxide nanoparticles have an average particle diameter of 500 nm to 5000 nm, based on the greatest outer diameter of individual particles, as measured by a scanning electron microscope.


【FIG. 1】

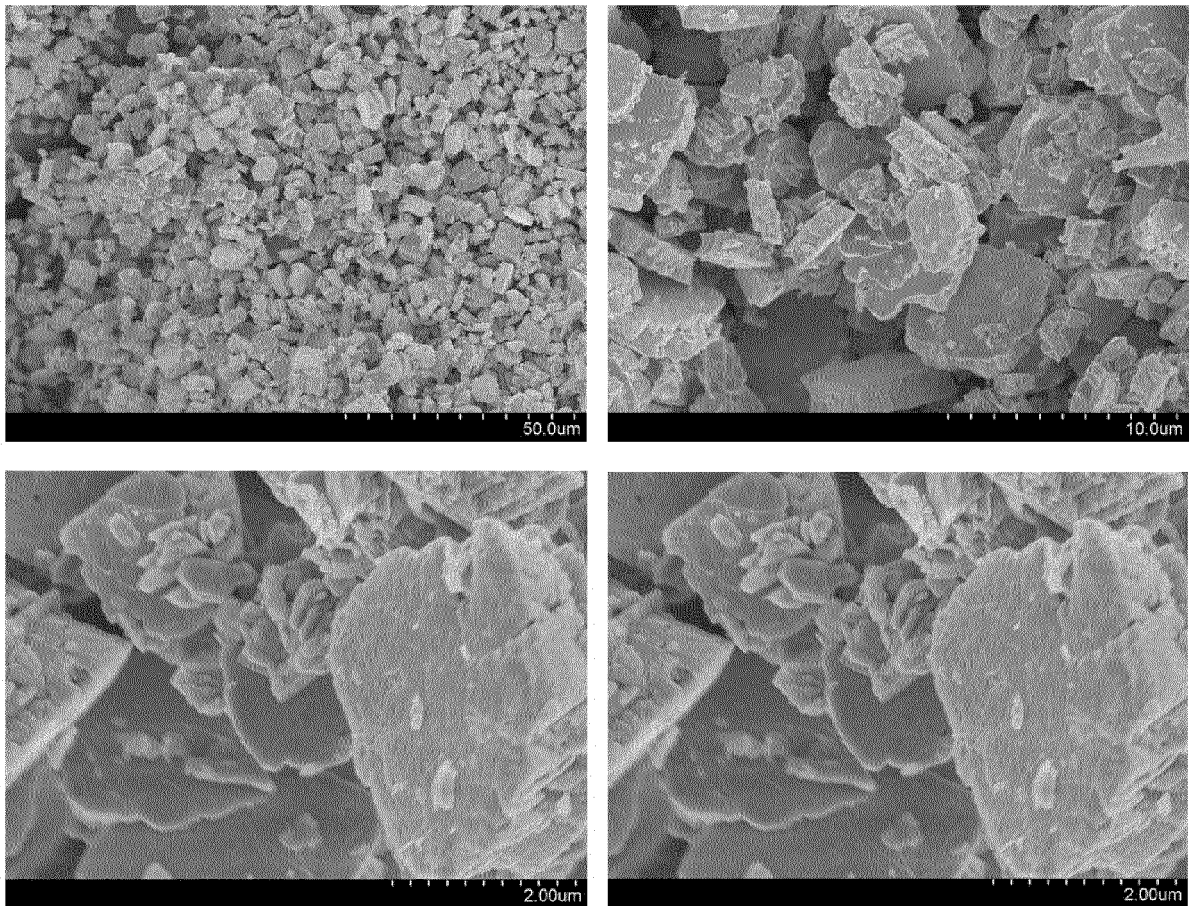


【FIG. 2】

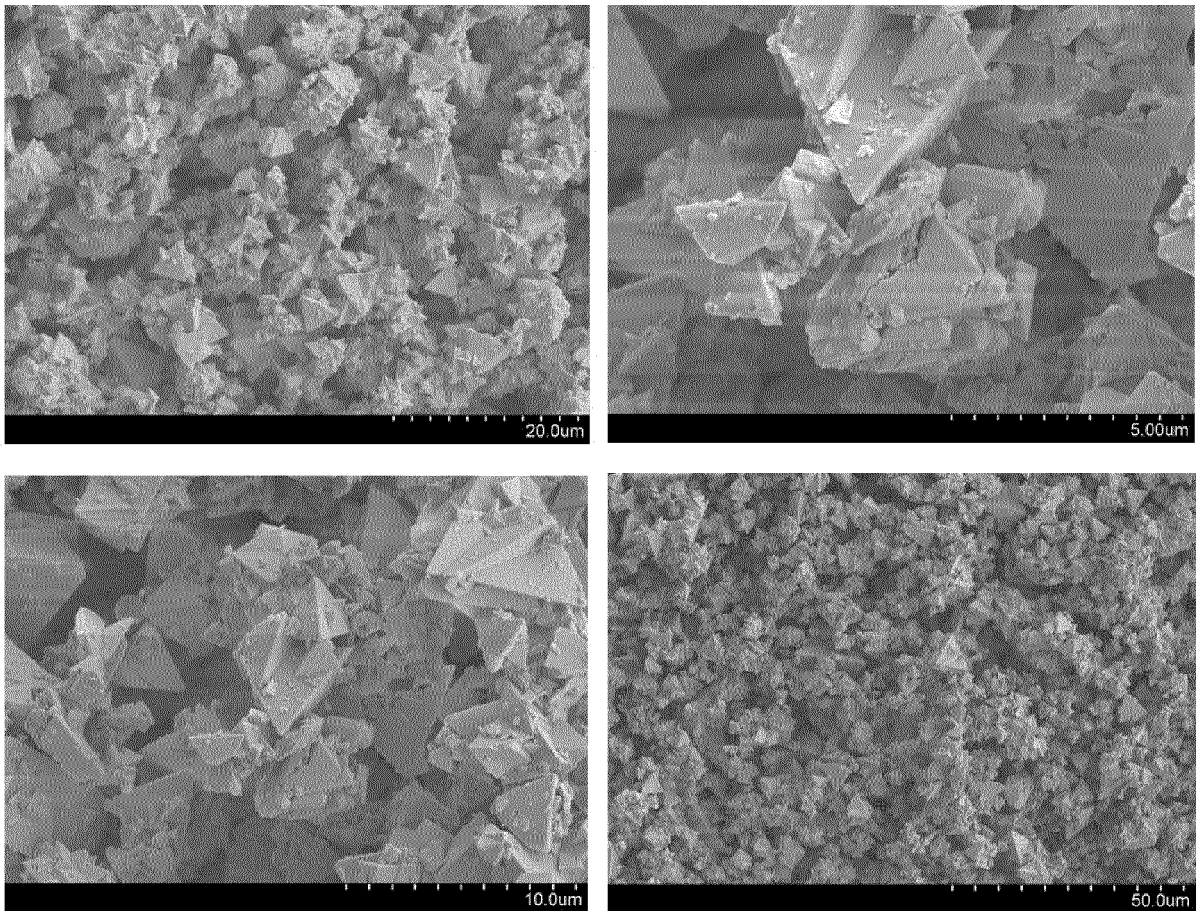


【FIG. 3】

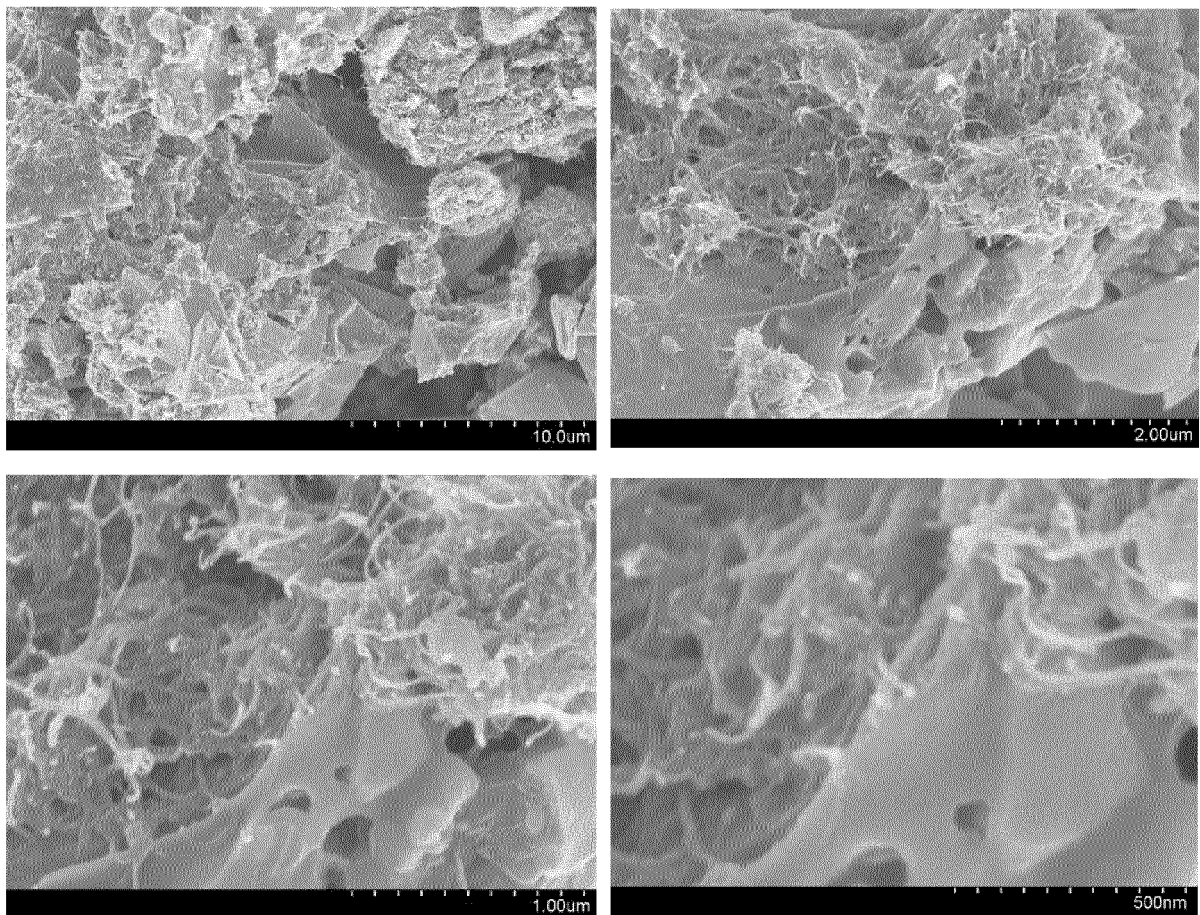


【FIG. 4】

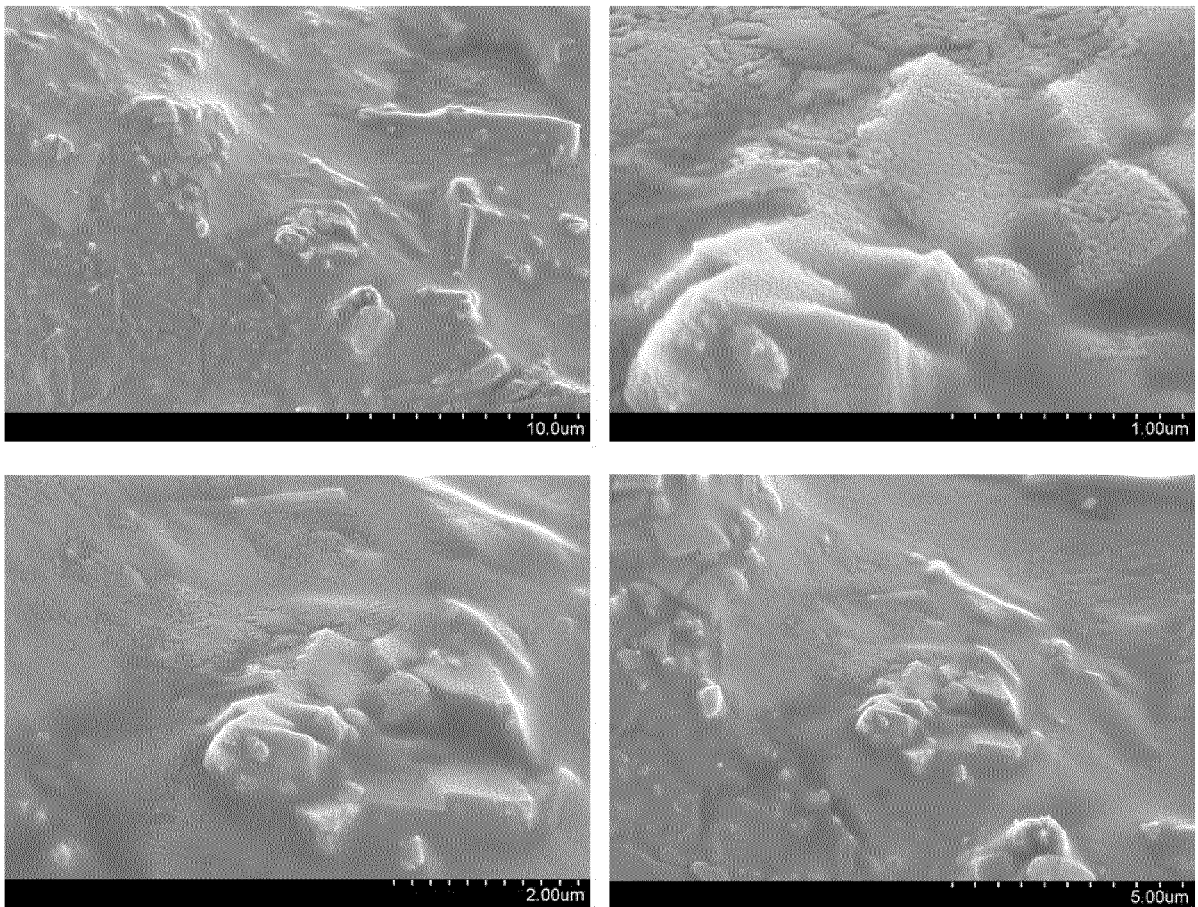


【FIG. 5】

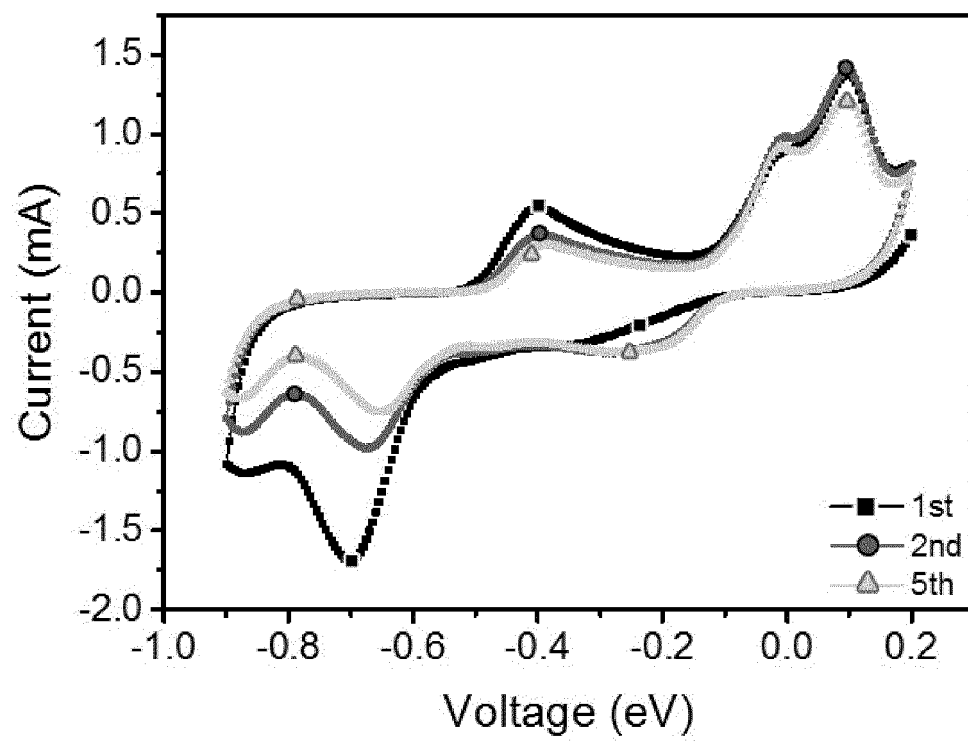


【FIG. 6】

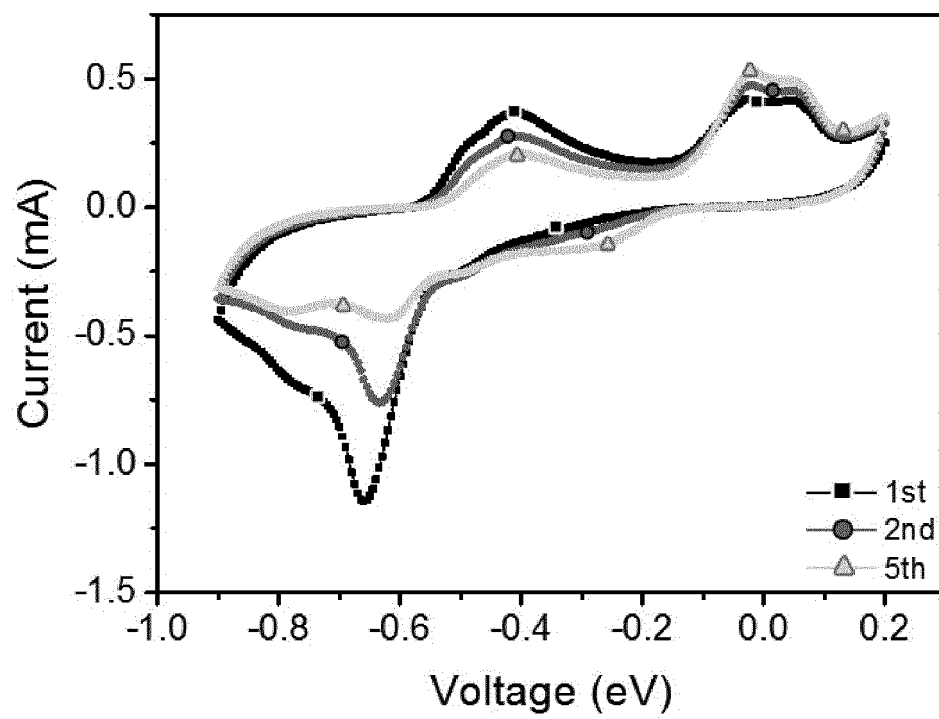

【FIG. 7】

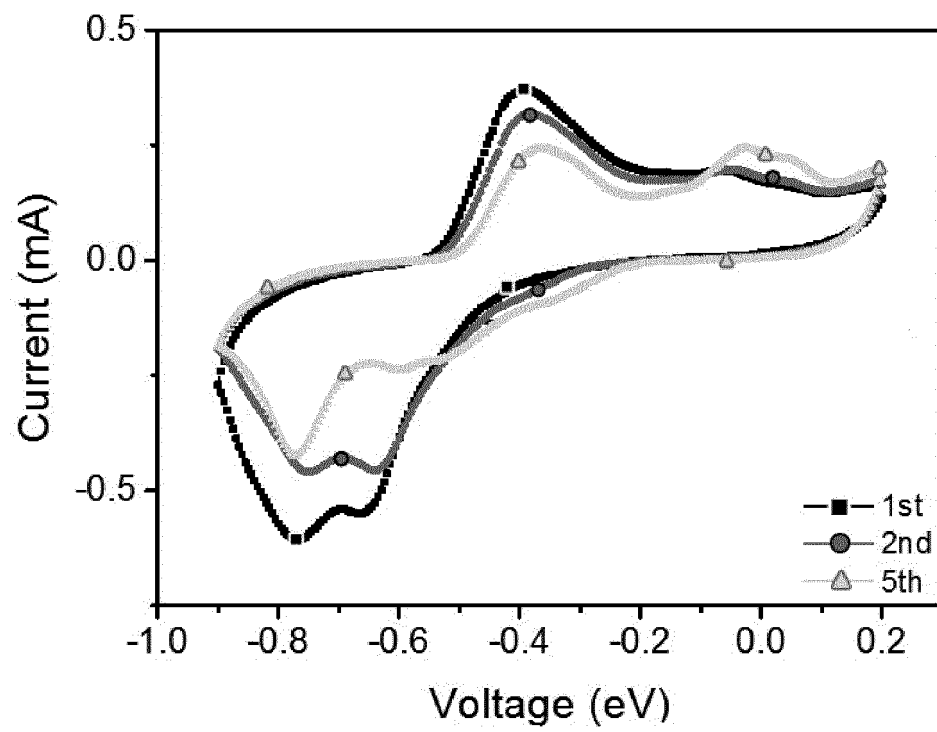

【FIG. 8】

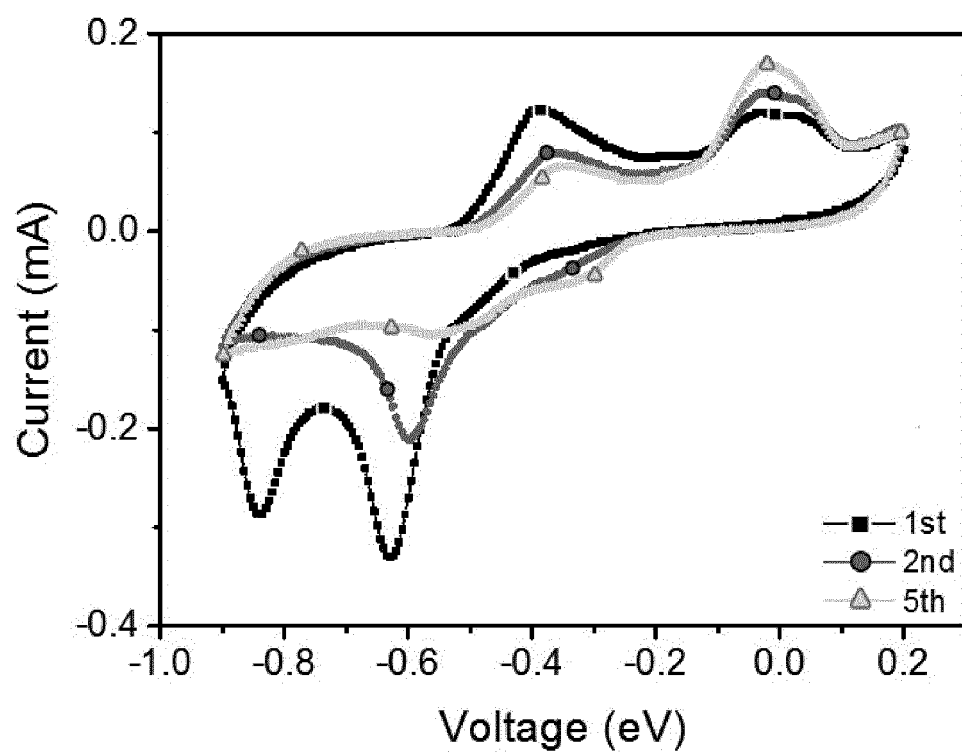

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2018/012276

A. CLASSIFICATION OF SUBJECT MATTER

H01G 11/34(2013.01)i, H01G 11/86(2013.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01G 11/34; H01M 4/48; H01M 4/50; H01G 11/86

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility models: IPC as above

Japanese Utility models and applications for Utility models: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS (KIPO internal) & Keywords: bismuth nitrate, triethanolamine, precipitate, reflux, thermal treatment, bismuth oxide, pseudocapacitor, anode active material

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	SHINDE, N.M. et al., "A Binder-free Wet Chemical Synthesis Approach to Decorate Nanoflowers of Bismuth Oxide on Ni-foam for Fabricating Laboratory Scale Potential Pencil-type Asymmetric Supercapacitor Device", Dalton Transactions, 10 April 2017, vol. 46, pages 6601-6611 See abstract; and pages 6601, 6602.	1-7
Y	AIJUAN, Han, "Development of Bismuth Based Visible-light-driven Photocatalysts for the Degradation of Organic Pollutants", National University of Singapore, Ph.D. Thesis, 2014, pages 1-229 See page 47.	1-7
A	PAUL, M.M. et al., "Synthesis of Bismuth Oxide Nanoparticles at 100°C", Materials Letters, 2005, vol. 59, pages 2523-2525 See the entire document.	1-7
A	WANG, Ying et al., "Characterization of Porous Bismuth Oxide (Bi ₂ O ₃) Nanoplates Prepared by Chemical Bath Deposition and Post Annealing", RSC Advances, 2015, vol. 5, pages 65591-65594 See the entire document.	1-7
A	US 7972726 B2 (EYLEM, Cahit et al.) 05 July 2011 See the entire document.	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 FEBRUARY 2019 (28.02.2019)

Date of mailing of the international search report

28 FEBRUARY 2019 (28.02.2019)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
 Government Complex Daejeon Building 4, 189, Cheongsu-ro, Seo-gu,
 Daejeon, 35208, Republic of Korea
 Facsimile No. +82-42-481-8578

Authorized officer

Telephone No.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/KR2018/012276

5

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member	Publication date
US 7972726 B2	05/07/2011	BR P10715455 A2	06/08/2013
		CN 101490876 A	22/07/2009
		EP 2041819 A2	01/04/2009
		JP 2009-543313 A	03/12/2009
		US 2008-0008937 A1	10/01/2008
		WO 2008-007288 A2	17/01/2008
		WO 2008-007288 A3	15/05/2008

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020170158926 [0001]