

(19)



(11)

EP 1 381 734 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
11.04.2012 Bulletin 2012/15

(21) Application number: **02721777.7**

(22) Date of filing: **11.04.2002**

(51) Int Cl.:
D21H 17/00 (2006.01)

(86) International application number:
PCT/US2002/012264

(87) International publication number:
WO 2002/084026 (24.10.2002 Gazette 2002/43)

(54) THE USE OF THE PAPER FOR DIE CUTTING

DIE VERWENDUNG VON PAPIER ZUM STANZEN

L'UTILISATION DE PAPIER POUR DECOUPER

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **11.04.2001 US 282983 P**

(43) Date of publication of application:
21.01.2004 Bulletin 2004/04

(60) Divisional application:
07014530.5 / 1 852 552

(73) Proprietor: **INTERNATIONAL PAPER COMPANY**
Memphis, TN 38197 (US)

(72) Inventors:
• **WILLIAMS, Richard, C.**
Middletown, NY 10940-4543 (US)
• **FROASS, Peter, M.**
Chester, NY 10918 (US)

• **BOONE, David, A.**
germantown, TN 38139 (US)
• **FABER, Richard, D.**
Memphis, TN 38119 (US)

(74) Representative: **Schneider, Michael et al**
Heisse Kursawe Eversheds
Rechtsanwälte Partnerschaft
Maximiliansplatz 5
80333 München (DE)

(56) References cited:
WO-A-01/54988 GB-A- 2 307 487
US-A- 3 293 114 US-A- 3 293 114
US-A- 3 533 908 US-A- 3 556 934
US-A- 4 133 688 US-A- 4 179 546
US-A- 4 324 753 US-A- 4 483 889
US-A- 4 619 734 US-A- 5 125 996
US-A- 5 125 996 US-A- 5 342 649
US-A- 5 514 429 US-B1- 6 379 497

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 381 734 B1

DescriptionField of the Invention

5 **[0001]** The invention relates to the papermaking arts and, in particular, to the manufacture of paper products such as file folders and the like made of relatively heavy weight paper a/k/a paperboard for use in office and clerical environments.

Background of the Invention

10 **[0002]** The contemporary work office uses a myriad of paper products including, but not limited to, writing papers, notepads, and file folders and / or jackets to organize and store various paperwork. Such file folders and / or jackets (hereinafter referred to collectively as "folders") are typically made using a paper material which is rather stiff and durable so as to protect the contents of the file and to stand upright or remain relatively flat and self-supporting. Unfortunately, such products also typically have edges which have a tendency to inflict so called "paper cuts" upon personnel handling the files. While rarely presenting a case of serious injury, paper cuts are nonetheless an inconvenience and may cause considerable discomfort as such cuts are often jagged and irregular and formed across the highly sensitive nerve endings of the fingers.

15 **[0003]** US-A-3 293 114 discloses a paper containing gaseous filled spheres of thermoplastic resins.

20 **[0004]** Accordingly, there exists a need for improved paper products, and in particular paper based file folders, which reduce or eliminate paper cuts.

Summary of the Invention

25 **[0005]** With regard to the foregoing and other objects and advantages, the present invention provides the use of a paper material as defined in present claim 1 in a method for making a paper material having a reduced tendency to cut human skin and tissue. The method includes providing a papermaking furnish including cellulosic fibers, from about 0.5 to about 5.0 wt% by weight dry basis expanded or expandable microspheres, and, optionally, conventional furnish additives including fillers, retention aids, and the like, forming a fibrous web from the papermaking furnish, drying the web, and calendaring the web to a caliper of from (0.279 to 0.457 mm 11.0 to 18.0 mils) and a density ranging from (0.449 to 0.70 to 0.77 g/cm³ 7.0 to 12.0 lb/3000ft²/mil).

30 **[0006]** The paper material is used in the manufacture of paper articles such as file folders. The paper material includes a paper web including cellulosic fibers and expanded microspheres dispersed within the fibers and, optionally, conventional paper additives including one or more fillers and starches. The paper web has a density of from (0.449 to 0.77 g/cm³ 7.0 to 12.0 lb/3000ft²/mil) and a caliper of from (0.279 to 0.457 mm 11.0 to 18.0 mils). In addition, the paper web has edges which exhibit an improved resistance to inflicting cuts upon human skin.

35 **[0007]** The inventive use provides a file folder or jacket. The file folder or jacket comprises a paper web including wood fibers and expanded microspheres dispersed within the fibers. The paper web has a density of from (0.449 to 0.77 g/cm³ 7.0 to 12.0 lb/3000ft²/mil) and a caliper of from (0.279 to 0.457 mm 11.0 to 18.0 mils). The paper web is die cut to provide exposed edges on the folder or jacket that exhibit improved resistance to inflicting cuts upon human skin.

40 **[0008]** In accordance with one preferred embodiment of the invention, the paper web has a density of from (0.482 to 0.578 g/cm³ 7.5 lb/3000ft²/mil to 0.356 to 0.406 mm 9.0 lb/300ft²/mil). It is also preferred that the paper web have a caliper of 0.356 to 0.406 mm 14.0 to 16.0 mils). The basis weight of the web is typically from (0.013 to 80 lb/3000ft² to 0.049 g/cm² 300 lb/300ft²), more preferably from (0.02 to 0.025 g/cm² 120 lb/3000ft² to 150 lb/3000ft²)

45 **[0009]** Typically the microspheres in the paper web comprise synthetic polymeric microspheres and comprise from about 0.5 to about 5.0 wt.% of the total weight of the web on a dry basis, more preferably from about 1.0 wt % to about 2.0 wt % of the total weight of the web on a dry basis. It is particularly preferred that the microspheres comprise microspheres made from a polymeric material selected from the group consisting of methyl methacrylate, ortho-chlorostyrene, polyortho-chlorostyrene, polyvinylbenzyl chloride, acrylonitrile, vinylidene chloride, para-tert-butyl styrene, vinyl acetate, butyl acrylate, serene, methacrylic acid, vinylbenzyl chloride and combinations of two or more of the foregoing. The microspheres have a preferred expanded diameter of from 30 to 60 micrometer. In addition, it may be preferred in some cases to initially disperse the microspheres in the furnish in an unexpanded state and subsequently expand the microspheres as the paper web dries.

50 **[0010]** The cellulosic fibers of the web may be provided from hardwoods, softwoods, or a mixture of the two. Preferably, the fibers in the paper web include from about 30% to about 100 % by weight dry basis softwood fibers and from about 70% to about 0% by weight dry basis hardwood fibers.

Brief Description of the Drawings

[0011] The above and other aspects and advantages of the invention will now be further described in conjunction with the accompanying drawings in which:

Fig. 1 is photomicrograph illustrating edges of conventional papers after being cut by various paper cutting techniques; Fig. 2 is another photomicrograph comparing a die cut conventional paper and a die cut paper according to one embodiment of the present invention; Fig. 3 is a side elevational view illustrating diagrammatically a paper die cutting apparatus for use in reverse die cutting paper samples; Fig. 4 is a side elevational view illustrating diagrammatically a testing apparatus for simulating paper cuts upon a finger; and Fig. 5 is a perspective view illustrating certain aspects of the testing apparatus of Fig. 4.

Detailed Description of the Invention

[0012] The invention use provides a paper material having an improved cut resistance, i.e., the edges of the paper have a reduced tendency to cut, abrade, or damage human skin. As used herein, "paper" refers to and includes both paper and paperboard unless otherwise noted.

[0013] The paper is provided as a web containing cellulosic pulp fibers such as fiber derived from hardwood trees, softwood trees, or a combination of hardwood and softwood trees prepared for use in a papermaking furnish by any known suitable digestion, refining, and bleaching operations. In a preferred embodiment; the cellulosic fibers in the paper include from about 30% to about 100 % by weight dry basis softwood fibers and from about 70% to about 0% by weight dry basis hardwood fibers. In certain embodiments, at least a portion of the fibers may be provided from non-woody herbaceous plants including, but not limited to, kenaf, hemp, jute, flax, sisal, or abaca although legal restrictions and other considerations may make the utilization of hemp and other fiber sources impractical or impossible. The paper may also include other conventional additives such as, for example, starch, mineral fillers, sizing agents, retention aids, and strengthening polymers. Among the fillers that may be used are organic and inorganic pigments such as, by way of example, polymeric particles such as polystyrene latexes and polymethylmethacrylate, and minerals such as calcium carbonate, kaolin, and talc. In addition to pulp fibers and fillers, the paper material also includes dispersed within the fibers and any other components from about 0.5 to about 5.0 wt % by dry weight expanded microspheres. More preferably the paper includes from about 1.0 to about 2.0 wt % expanded microspheres. Suitable microspheres include synthetic resinous particles having a generally spherical liquid-containing center. The resinous particles may be made from methyl methacrylate, methyl methacrylate, ortho-chlorostyrene, polyortho-chlorostyrene, polyvinylbenzyl chloride, acrylonitrile, vinylidene chloride, para-tert-butyl styrene, vinyl acetate, butyl acrylate, styrene, methacrylic acid, vinylbenzyl chloride and combinations of two or more of the foregoing. Preferred resinous particles comprise a polymer containing from about 65 to about 90 percent by weight vinylidene chloride, preferably from about 65 to about 75 percent by weight vinylidene chloride, and from about 35 to about 10 percent by weight acrylonitrile, preferably from about 25 to about 35 percent by weight acrylonitrile.

[0014] The microspheres preferably subsist in the paper web in an "expanded" state, having undergone expansion in diameter in the order of from about 300 to about 600 % from an "unexpanded" state in the original papermaking furnish from which the web is derived. In their original unexpanded state, the center of the expandable microspheres may include a volatile fluid foaming agent to promote and maintain the desired volumetric expansion. Preferably, the agent is not a solvent for the polymer resin. A particularly preferred foaming agent is isobutane, which may be present in an amount ranging from about 10 to about 25 percent by weight of the total weight of the resinous particles. Upon heating to a temperature in the range of from about 80 to about 190°C in the dryer unit of a papermaking machine, the resinous particles expand to a diameter ranging from 30 to 60 micrometer. Suitable expandable microspheres are available from Akzo Nobel of Marietta, Georgia under the tradename EXPANCEL. Expandable microspheres and their usage in paper materials are described in more detail in copending application Serial No. 09/770,340 filed January 26, 2001, the contents of which are incorporated by reference.

[0015] Papers formed according to the present invention preferably have a final caliper, after calendering of the paper, and any nipping or pressing such as may be associated with subsequent coating of from (0.279 to 0.457 mm 11.0 to 18.0 mils), more preferably from (0.356 to 0.406 mm 14. mils to 16.0 mils). Papers formed according to the invention also typically exhibit basis weights of from (0.013 to 0.049 g/cm² 80 lb/3000ft²), to 300 lb/3000ft²), more preferably from (0.02 to 0.025 g/cm² 120 lb/3000ft² to 150 lb/3000ft²) The final density of the papers, that is, the basis weight divided by the caliper, is typically from (0.449 to 0.77 g/cm³ 7.0 lb/3000ft²/mil to 12.0 lb/3000ft²/mil) and more preferably from (0.482 to 0.578 g/cm³ 7.5 lb/3000ft²/mil to 9.0 lb/3000ft²/mil). Thus, the paper has a relatively larger caliper in relation to its weight compared to conventional papers.

[0016] The reduction in basis weight versus caliper is believed to be attributable at least in part to the large number of tiny voids in the paper associated with the expanded microspheres interspersed in the fibers with the microspheres causing, especially during the expansion process, a significant increase in the void volume in the material. In addition, the paper after drying operations is calendered sufficient to achieve the final desired calipers discussed herein along with any desired surface conditioning of the web associated with the calendering operation. The impartation of a significantly increased void volume along with a relatively high caliper also has the effect of reducing the density of the paper while retaining good stiffness and other properties important for use as stock for file folders and the like.

[0017] The method of forming the paper materials according to the inventive use includes providing an initial paper furnish. The cellulosic fibrous component of the furnish is suitably of the chemically pulped variety, such as a bleached kraft pulp, although the invention is not believed to be limited to kraft pulps, and may also be used with good effect with other chemical pulps such as sulfite pulps, mechanical pulps such as ground wood pulps, and other pulp varieties and mixtures thereof such as chemical-mechanical and thermo-mechanical pulps.

[0018] While not essential to the invention, the pulp is preferably bleached to remove lignins and to achieve a desired pulp brightness according to one or more bleaching treatments known in the art including, for example, elemental chlorine-based bleaching sequences, chlorine dioxide-based bleaching sequences, chlorine-free bleaching sequences, elemental chlorine-free bleaching sequences, and combinations or variations of stages of any of the foregoing and other bleaching related sequences and stages.

[0019] After bleaching is completed and the pulp is washed and screened, it is generally subjected to one or more refining steps. Thereafter, the refined pulp is passed to a blend chest where it is mixed with various additives and fillers typically incorporated into a papermaking furnish as well as other pulps such as unbleached pulps and/or recycled or post-consumer pulps. The additives may include so-called "internal sizing" agents used primarily to increase the contact angle of polar liquids contacting the surface of the paper such as alkenyl succinic anhydride (ASA), alkyl ketene dimer (AKD), and rosin sizes. Retention aids may also be added at this stage. Cationic retention aids are preferred; however, anionic aids may also be employed in the furnish.

[0020] In addition, and prior to providing the furnish to the headbox of a papermaking machine, polymeric microspheres are added to the pulp furnish mixture. As noted above, the microspheres are added in an amount of from about 0.5% to about 5.0% based on the total dry weight of the furnish. The microspheres may be preexpanded or in substantially their final dimension prior to inclusion in the furnish mixture. However, it is preferred that the microspheres are initially added to the furnish in a substantially unexpanded state and then caused to expand as the paper web is formed and dried as described hereinafter. It will be appreciated that this expansion has the effect of enabling an increased caliper and reduced density in the final paper product. It is also within the scope of the invention to include mixtures of expandable and already-expanded microspheres (or microspheres that are already substantially in their final dimensional state) in the papermaking furnish so that a portion of the microspheres will expand to a substantial degree in drying operations while the balance will remain in substantially the same overall dimensions during drying.

[0021] Once prepared, the furnish is formed into a single or multi-ply web on a papermaking machine such as a Fourdrinier machine or any other suitable papermaking machine known in the art, as well as those which may become known in the future. The basic methodologies involved in making paper on various papermaking machine configurations are well-known to those of ordinary skill in the art and accordingly will not be described in detail herein. In general, a so-called "slice" of furnish consisting of a relatively low consistency aqueous slurry of the pulp fibers (typically about 0.1 to about 1.0%) along with the microspheres and various additives and fillers dispersed therein is ejected from a headbox onto a porous endless moving forming sheet or wire where the liquid is gradually drained through small openings in the wire until a mat of pulp fibers and the other materials is formed on the wire. The still-wet mat or web is transferred from the wire to a wet press where more fiber-to-fiber consolidation occurs and the moisture is further decreased. The web is then passed to an initial dryer section to remove most of the retained moisture and further consolidate the fibers in the web. The heat of the drying section also promotes expansion of unexpanded microspheres contained in the web.

[0022] After initial drying, the web may be further treated using a size press wherein additional starch, pigments, and other additives may be applied to the web and incorporated therein by the action of the press.

[0023] After treatment in the size press and subsequent drying, the paper is calendered to achieve the desired final caliper as discussed above to improve the smoothness and other properties of the web. The calendering may be accomplished by steel-steel calendaring at nip pressures sufficient to provide a desired caliper. It will be appreciated that the ultimate caliper of the paper ply will be largely determined by the selection of the nip pressure.

[0024] Paper materials formed according to the invention may be utilized in a variety of office or clerical applications. In particular, the inventive papers are advantageously used in forming Bristol board file folder or jackets for storing and organizing materials in the office workplace. The manufacture of such folders from paper webs is well known to those in the paper converting arts and consists in general of cutting appropriately sized and shaped blanks from the paper web, typically by "reverse" die cutting, and then folding the blanks into the appropriate folder shape followed by stacking and packaging steps. The blanks may also be scored beforehand if desired to facilitate folding. The scoring, cutting, folding, stacking, and packaging operations are ordinarily carried out using automated machinery well-known to those

of ordinary skill on a substantially continuous basis from rolls of the web material fed to the machinery from an unwind stand.

[0025] A typical apparatus for "reverse" die cutting is illustrated diagrammatically in Fig. 3. Such die cutting is in contrast to so-called "guillotine" cutting of paper. In guillotine cutting, a paper to be cut is supported by a flat, fixed surface underneath the paper, and the paper is cut by the lowering of a movable cutting blade down through the thickness of the paper and into a slot in the fixed surface dimensioned to receive the cutting blade. Guillotine cutting typically produces relatively smooth paper edges; however, guillotine cutting is generally impractical for high speed, large volume cutting applications.

[0026] In reverse die cutting, a cutting blade is fixed in an upright position protruding from a housing located beneath the paper to be cut. With the blade fixed and the paper in a cutting position above the blade, a contact plate is lowered against the top of the paper and presses the paper against the edge of the cutting blade causing the blade to cut the paper.

[0027] The papers and the folders and other die cut articles formed therefrom, having exposed edges have been observed to exhibit a significantly reduced tendency to cut the skin of persons handling the folders as compared to prior art-papers and die cut paper articles such as folders. That is, the edges of the papers are less likely to cause cutting or abrasion of the skin if the fingers or other portions of the body are inadvertently drawn against an exposed edge of the material.

[0028] Without being bound by theory, it is believed the improvement in cut resistance derives from the combination of an increased caliper and a decreased density as compared to prior art papers and the effect of these attributes on how the paper reacts to cutting operations. As noted above, folder blanks are typically die cut. When die cutting blanks for conventional folders from prior art papers having a relatively small caliper and a relatively high density, it is believed that the die blade initially creates a clean cut through a portion of the thickness of the paper. However, before the die blade can complete a clean cut through the paper, the remainder of the paper thickness "bursts" or fractures in a relatively jagged and irregular manner. As a consequence, the resultant edge of the folder is jagged and includes a large number of very small, but very sharp paper shards. Contact with these small jagged sharp edges and shards is believed to be a primary cause of paper cut incidents.

[0029] While the resultant paper edges from die cutting are more rough and jagged than from, say, guillotine cutting, die cutting techniques are more easily implemented in large-scale, high speed manufacturing, and are therefore favored greatly in modern practice.

[0030] Fig. 1 illustrates four samples of a conventional paper which have been cut by different techniques. The foremost sample in the micrograph is a paper which has been guillotine cut. The two samples depicted in the center of the micrograph are cut by a lab bench die cutter described in further detail hereinafter. The final sample, in the background of the micrograph, is cut by a conventional, production scale die cutter. As may be seen, the die cut conventional papers exhibit considerable roughness about the edges of the paper samples.

[0031] However, it has been determined that paper according to the invention having a relatively high caliper and relatively low density has a considerably reduced tendency to fracture or burst prematurely when being die cut. The die blade is apparently allowed to complete a clean cut through the paper thickness and, consequently, the resultant edge exhibits significantly fewer jagged irregularities and shards which produce paper cuts. Therefore, folders for example made according to the invention exhibit a significantly reduced tendency to cause paper cuts as they are being handled.

[0032] The differences in the resultant die cut paper edges is dramatically illustrated in Fig. 2 which depicts on the right a die-cut edge of paper formed according to the invention and to the left a die-cut edge of a conventional paper of substantially the same basis weight. The inventive paper includes about 2 wt% expanded microspheres and has a caliper of about 0.381 mm (15 mils) and a density of about 0.559 g/cm³ (8.7 lb/3000 ft²/mil). The conventional paper does not include any microspheres and has a caliper of about 0.279 mm (11 mils) and a density of about 0.726 g/cm³ (11.3 lb/3000 ft² /mil). It may be seen that the edge of the paper according to the inventive use is significantly smoother in appearance and has a more beveled corner profile. It is believed that these differences account for the reduction in cutting tendency.

[0033] The following nonlimiting examples illustrate various additional aspects of the invention. Unless otherwise indicated, temperatures are in degrees Celsius, percentages are by weight and the percent of any pulp additive or moisture is based on the oven-dry weight of the total amount of material.

Example 1

[0034] A series of papers were formed from a mixture of about 40% softwood pulp and about 60% hardwood pulp and having a Canadian Standard Freeness of about 450 and incorporating amounts of expandable microspheres and being calendered to a variety of differing calipers. The resultant papers containing the expanded microspheres were then tested to determine the likelihood of an edge cutting a person's fingers while being handled. In place of actual human skin, the tests were performed using a rubberized finger covered by a latex glove material which served as an artificial "skin".

[0035] The samples for examination were die cut using a laboratory die cutter 20 illustrated in Fig. 3. The cutter includes a bottom housing 22 having a recess 24. A cutting blade 26 is mounted in a supporting block 28 and the block is fixed in the recess 24 so that the cutting blade projects upward.

[0036] The die cutter 20 also includes an upper housing 30 which is held in alignment with the lower housing by a plurality of bolts or rods 32 which are received in a corresponding plurality of holes in the upper housing 30. Over the cutting blade 26, the upper housing includes a contact surface 34. The paper sample 36 to be cut is placed in the gap between the cutting blade 26 and the contact surface 34. The contact surface 34 is then pressed downward by a hydraulic ram 38 or by other suitable driving means so that the paper sample 36 is pressed against the cutting blade and cut / burst in two.

[0037] The cutting tendencies of the edges of the paper samples were evaluated in a testing procedure referred to hereinafter as the "Cutting Index 30" test (with "30" indicating the number of replicates of the test performed). The Cutting Index 30 test uses an apparatus similar to that depicted diagrammatically in Figs. 4 and 5. The testing apparatus 50 includes a frame 52 which supports a paper sample clamping device 54 and suspends the clamping device 54 from above. The clamping device 54 is suspended about a pivot point 56 which allows the angle of the clamping device 54 to vary relative to horizontal. In this manner, the paper may be contacted against the simulated finger at different contact angles. The paper sample 60 to be tested is held in the clamping device 54 in a substantially upright position.

[0038] The testing apparatus 50 also includes a simulated finger 62 which may be drawn against the edge of the paper sample 60 in the apparatus. For instance, the finger 62 may be removably affixed to a movable base 64 which slides along a rail or track 66 by means of hydraulic actuation so that the finger 62 is drawn into contact with the edge of the paper sample 60. After the sample contacts the finger, the latex is examined to determine if a cut is produced and the cuts are then characterized according to size.

[0039] The simulated finger is preferably formed from an inner rod of metal or stiff plastic, which is covered by a somewhat flexible material such as a neoprene rubber and the neoprene layer is preferably covered by a latex layer such as a finger from a latex glove. In this manner, the finger roughly simulates the bone, muscle, and skin layers of an actual finger. While the latex and neoprene structure does not exhibit the exact same tendency to be cut as an actual finger, it is believed that a relatively high incidence of cuts in this structure will generally correlate to a relatively high incidence of cuts in an actual finger and a relatively low incidence of cuts in this structure will generally correlate to a relatively low incidence of cuts in an actual finger.

[0040] In the experiments described herein, neoprene rubber layer employed has a hardness of about Shore A 50, the latex "skin" is about 0.102 mm (0.004 inches) thick, and the latex skin is attached to the neoprene using double-sided tape. In order to better simulate skin, the latex is also allowed to condition by exposure to an elevated temperature of about 125°C for a period of about 6 hours prior to testing. Because latex is a naturally occurring substance, latexes and products produced therefrom exhibit some degree of variation from batch to batch with respect to certain properties such as moisture content. It was found that by conditioning the latex at the elevated temperature for about 6 hours, the resultant latex skins exhibited a more uniform set of properties and accordingly the reproducibility of test results improved.

[0041] The paper samples employed are cut to a size of about 1 inch by six inches and a die cut edge is aligned in the bottom of the clamping device to contact the finger. The simulated finger is then drawn against the paper edge, then stopped and the latex skin is examined to determine if a cut has occurred and if so, the magnitude or size of the cut.

[0042] A total of 30 replicates were performed for each paper sample. The results were as follows:

Table I

Sample ID (WMCf)	% Expancel (Wt %)	Basis weight (lb/3000ft ²) g/cm ²	Final Caliper (mils) mm	Density (lb/ 3000ft ² /mil) g/cm ³	Total Cuts	Cutting Index
1A	0	(127) 0.021	(11.9) 0.302	(10.7) 0.687	19	45
2	2	(108) 0.018	(12.0) 0.305	(9.0) 0.578	15	34
3	3	(108) 0.018	(12.7) 0.325	(8.5) 0.546	17	29
6A	0	(148) 0.024	(12.1) 0.307	(12.3) 0.79	22	56
6B	0	(182) 0.03	(14.5) 0.368	(12.6) 0.809	18	30
6C	0	(200) 0.033	(16.2) 0.412	(12.4) 0.796	13	16
124	2	(131) 0.021	(15.8) 0.401	(8.3) 0.533	7	15
143	2	(143) 0.023	(17.0) 0.432	(8.4) 0.539	3	5

EP 1 381 734 B1

[0043] In addition to measuring the number of cuts (out of 30 replicates), the size of each cut was characterized on a 1 to 5 scale with 1 being "very small" and 5 being "large". Using this data, a "Cutting Index" was determined by summing the products of the number of cuts in each size category by the severity of the cut on the 1 to 5 scale. These results are shown in Table II:

Table II

Sample ID	Total Cuts	Large (5)	Med+ (4)	Med (3)	Small (2)	V. Small (1)	Cutting Index
1A	19	0	3	5	7	4	45
2	15	0	1	3	10	1	34
3	17	0	0	1	10	6	29
6A	22	0	4	8	6	4	56
6B	18	0	0	6	0	12	30
6C	13	0	0	0	3	10	16
124	7	0	0	3	2	2	15
143	3	0	0	0	2	1	5

[0044] As may be seen in samples 1- 3 and 6A, the density of the papers was varied by addition of varying amounts of expanded microspheres while the paper calipers were held approximately constant at about 0.305 mm (12 mils). These samples demonstrate that a reduction of density associated with inclusion of microspheres leads to a corresponding reduction in the number and severity of cuts produced by the paper.

[0045] In sample 6A - 6C, the paper density was held approximately constant at about 0.803 g/cm³ (12.5 lb/3000ft²/mil) while the caliper of the papers was varied. The results demonstrate a clear correlation between increasing caliper and decreasing cuts and cut severity in a paper containing the microspheres.

[0046] Finally, in samples 124 and 143, papers were produced containing microspheres and employing both a reduced density and a high caliper at the same time. The results were quite dramatic with number of cuts and the weight average cuts both being reduced to extremely low levels. Thus, it appears that while both caliper increase and density reduction in association with addition of microspheres may individually reduce cutting to some degree, the combination of the two appears to provide a synergistic reduction in cutting which is surprising and quite unexpected.

Example 2

[0047] A similar set of tests were conducted using a series of papers formed from a second pulp furnish, again formed from a mixture of about 40% softwood pulp and about 60% hardwood pulp and having a Canadian Standard Freeness of about 450. In these tests, two sets of papers were produced, with each set of papers having approximately the same basis weight. For one group of papers, the basis weight was on the order of about 0.021 g/cm² (130 lb/3000 ft²) and for the second group, the basis weight was about 0.025 g/cm² (150 lb/3000ft²). Within each group, various amounts of microspheres were added and the resultant paper caliper varied. Again, 30 replicates of each sample were tested for cutting tendency. The results are shown in Tables III and IV.

Table III

Sample ID	% Expancel (Wt%)	Basis weight (lb/3000ft ²) g/cm ²	Final Caliper (Mils) mm	Density (lb/ 3000ft ² /mil) g/cm ³	Total Cuts	Cutting Index
1	0	(129) 0.021	(12.1) 0.307	(10.7) 0.687	21	77
3	2	(133) 0.022	(15.5) 0.394	(8.58) 0.551	15	34
4	3	(128) 0.021	(17.2) 0.437	(7.46) 0.479	10	16
5	0	(153) 0.025	(13.8) 0.351	(11.1) 0.713	25	80
7	2	(149) 0.024	(14.6) 0.371	(10.2) 0.655	16	36
8	3	(150) 0.025	(18.4) 0.467	(8.15) 0.523	7	12

EP 1 381 734 B1

[0048] These results show a clear trend toward decreases in total cuts as well as the weighted average cuts with increasing amount of microspheres where the basis weight is held about the same. It is seen that increasing the amount of microspheres while holding the basis weight the same can be said to result in an increased caliper, decreased density, and decreased number and severity of cuts.

Table IV

Sample ID	Total Cuts	Large (5)	Med+ (4)	Med (3)	Small (2)	V. Small (1)	Cutting Index
1	21	7	5	5	3	1	77
3	15	0	2	1	8	3	34
4	10	0	0	0	6	4	16
5	25	2	9	6	8	0	80
7	16	0	0	4	12	0	36
8	7	0	0	0	5	2	12

Example 3

[0049] A similar set of tests were conducted using a series of papers formed from a third pulp furnish including about 35% softwood fibers and about 65% hardwood fibers. Again, 30 replicates of each sample were tested for cutting tendency. The results are shown in Tables V.

Table V

Sample ID	% Expancel (Wt. %)	Basis weight (lb/3000ft ²) g/cm ²	Final Caliper (Mils)m/m	Density (lb/3000ft ² /mil) g/cm ³	Total Cuts	Cutting Index
124 lb control	0	(129) 0.021	(11.39) 0.289	(11.34) 0.728	28	116
143 lb control	0	(148) 0.024	(11.57) 0.294	(12.76) 0.819	30	95
4	2	(128) 0.021	(14.83) 0.377	(8.61) 0.553	15	21
6	2	(125) 0.02	(15.21) 0.386	(8.22) 0.528	7	9
7	2	(124) 0.02	(14.94) 0.38	(8.28) 0.532	5	5
8	2	(125) 0.02	(15.08) 0.383	(8.27) 0.531	15	15
9	2	(125) 0.02	(14.56) 0.37	(8.62) 0.553	8	9

[0050] In these tests, the papers containing expanded microspheres were produced to provide a target basis weight of about 0.02 g/cm² (124 lb/3000 ft²) and compared to two controls formed with no microspheres and having basis weights of 0.02 g/cm² (124 lb/3000 ft²) and (0.023 g/cm² (143 lb/3000ft²) respectively. The expanded microsphere samples again showed dramatic reductions in cutting tendency as compared to the control papers. The total number of cuts was reduced by about 50% or more in each case and the reductions in average weighted cuts was reduced further still.

Claims

1. Use of a paper material comprising a paper web including cellulosic fibers and expanded microspheres, the paper web having a density of from (0.449 to 0.778/cm³ (7.0 to 12.0 lb/3000²/mil) and a caliper after calendering of from 0.279 to 0.457 mm (11.0 to 18.0 mils) wherein the microspheres have an expanded diameter of from 30 to 60 micrometer for reverse die cutting the web to provide at least one edge having a reduced tendency to cut human skin.
2. The use of Claim 1 wherein the paper web has a density of from 0.481 to 0.5788/cm³ (7.5 to 90.0lb/3000ft²/mil)
3. The use of Claim 1 wherein the paper web has a caliper of 0.356 to 0.406 mm (14.0 to 16.0 mils)

4. The use of Claim 1 wherein the expanded microspheres in the papers web comprise synthetic polymeric microspheres and comprise from 0.5 to 5.0 wt. % of the total weight of the web on a dry basis.
- 5 5. The use of Claim 1 wherein the expanded microspheres in the piper web comprise synthetic polymeric microspheres and comprise from 1.0 to 2.0 wt. % of the total weight of the web on a dry basis.
6. The use of Claim 1 wherein the paper web has a basis weight of from 0.013 to 0.049/cm² 80lb/3000ft² to 300lb/3000ft²
- 10 7. The use of Claim 1 wherein the paper web has a basis weight of from 0.02 to 0.025/cm² (120lb/3000ft² to 150lb/3000ft²)
- 15 8. The use of Claim 1 wherein the expanded microspheres in the paper web comprise microspheres made from a material selected from the group consisting of methyl methacrylate, ortho-chlorostyrene, polyortho-chlorostyrene, polyvinbenzyl chloride, acrylonitrile, vinylidene chloride, para-tert-butyl styrene, vinyl acetate, butyl acrylate styrene, methacrylic acid, vinylbenzyl chloride and combinations of two or more of the foregoing.
9. The use of Claim 1 wherein the fibers in the paper web comprise from 30 to 100 % by weight dry basis softwood fibers and from 70 to 0% by weight dry basis hardwood fibers.
- 20 10. The use of Claim 1 wherein the microspheres are dispersed within the furnish in an unexpanded state and subsequently expand as the paper web dries.
11. The use of Claim 1 wherein the paper material exhibits a Cutting Index of less than 40 when analyzed according to the Cutting Index 30 test.
- 25 12. The use of any one of the preceding claims wherein the paper material is a file folder or jacket.

Patentansprüche

- 30 1. Verwendung eines Papiermaterials, umfassend eine Papierbahn, die Cellulosefasern und expandierte Mikrokügelchen einschließt, wobei die Papierbahn eine Dichte von 0,449 bis 0,77 g/cm³ (7,0 bis 12,0 lb/3000 ft²/mil) und eine Dicke nach Kalandrieren von 0,279 bis 0,457 mm (11,0 bis 18,0 mils) aufweist, wobei die Mikrokügelchen einen expandierten Durchmesser von 30 bis 60 Mikrometer aufweisen, zum umgekehrten Stempelschneiden (reverse die cutting) der Bahn, um mindestens eine Kante mit einer verringerten Tendenz zum Schneiden menschlicher Haut bereitzustellen.
- 35 2. Die Verwendung nach Anspruch 1, wobei die Papierbahn eine Dichte von 0,482 bis 0,578 g/cm³ (7,5 bis 9,0 lb/3000 ft²/mil) besitzt.
- 40 3. Die Verwendung nach Anspruch 1, wobei die Papierbahn eine Dicke von 0,356 bis 0,406 mm (4,0 bis 16,0 mils) besitzt.
- 45 4. Die Verwendung nach Anspruch 1, wobei die expandierten Mikrokügelchen in der Papierbahn synthetische polymere Mikrokügelchen umfassen und 0,5 bis 5,0 Gew.-% des Gesamtgewichts der Bahn auf Trockenbasis umfassen.
5. Die Verwendung nach Anspruch 1, wobei die expandierten Mikrokügelchen in der Papierbahn synthetische polymere Mikrokügelchen umfassen und 1,0 bis 2,0 Gew.-% des Gesamtgewichts der Bahn auf Trockenbasis umfassen.
- 50 6. Die Verwendung nach Anspruch 1, wobei die Papierbahn ein Flächengewicht von 0,013 bis 0,049 g/cm² (80 lb/3000 ft² bis 300 lb/3000 ft²) besitzt.
7. Die Verwendung nach Anspruch 1, wobei die Papierbahn ein Flächengewicht von 0,02 bis 0,025 g/cm² (120 lb/3000 ft² bis 150 lb/3000 ft²) besitzt.
- 55 8. Die Verwendung nach Anspruch 1, wobei die expandierten Mikrokügelchen in der Papierbahn Mikrokügelchen umfassen, die aus einem Material hergestellt sind, das aus der Gruppe ausgewählt ist, die aus Methylmethacrylat, ortho-Chlorstyrol, polyortho-Chlorstyrol, Polyvinylbenzylchlorid, Acrylnitril, Vinylidenchlorid, para-tert-Butylstyrol,

EP 1 381 734 B1

Vinylacetat, Butylacrylat, Styrol, Methacrylsäure, Vinylbenzylchlorid und Kombinationen aus zwei oder mehreren der Vorstehenden besteht.

- 5 9. Die Verwendung nach Anspruch 1, wobei die Fasern in der Papierbahn 30 bis 100 Gew.-% Weichholzfaser auf Trockenbasis und 70 bis 0 Gew.-% Hartholzfaser auf Trockenbasis umfassen.
10. Die Verwendung nach Anspruch 1, wobei die Mikrokügelchen in dem Stoffeintrag in einem nicht expandierten Zustand dispergiert sind und anschließend während des Trocknens der Papierbahn expandieren.
- 10 11. Die Verwendung nach Anspruch 1, wobei das Papiermaterial bei Analyse gemäß dem Schneideindex-30-Test einen Schneideindex von weniger als 40 besitzt.
12. Die Verwendung nach einem der vorstehenden Ansprüche, wobei das Papiermaterial ein Ordner oder eine Hülle ist.

Revendications

- 20 1. Utilisation d'une matière de papier comprenant une nappe de papier comprenant des fibres cellulosiques et des microsphères expansées, la nappe de papier ayant une masse volumique de 0,449 à 0,77 g/cm³ (7,0 à 12,0 livres/3000 pied²/mil) et une épaisseur après calandrage de 0,279 à 0,457 mm (11,0 à 18,0 mils) dans laquelle les microsphères ont un diamètre expansé de 30 à 60 micromètres, pour une découpe à l'emporte-pièce inversée de la nappe pour fournir au moins un bord ayant une tendance réduite à couper la peau humaine.
- 25 2. Utilisation selon la revendication 1, dans laquelle la nappe de papier a une masse volumique de 0,482 à 0,578 g/cm³ (7,5 à 9,0 livres/3000 pied²/mil).
3. Utilisation selon la revendication 1, dans laquelle la nappe de papier a une épaisseur de 0,356 à 0,406 mm (4,0 à 16,0 mils).
- 30 4. Utilisation selon la revendication 1, dans laquelle les microsphères expansées dans la nappe de papier comprennent des microsphères polymères synthétiques et représentent de 0,5 à 5,0 % en poids du poids total de la nappe sur une base sèche.
- 35 5. Utilisation selon la revendication 1, dans laquelle les microsphères expansées dans la nappe de papier comprennent des microsphères polymères synthétiques et représentent de 1,0 à 2,0 % en poids du poids total de la nappe sur une base sèche.
- 40 6. Utilisation selon la revendication 1, dans laquelle la nappe de papier a un poids de base de 0,013 à 0,049 g/cm² (80 livres/3000 pied² à 300 livres/3000 pied²).
7. Utilisation selon la revendication 1, dans laquelle la nappe de papier a un poids de base de 0,02 à 0,025 g/cm² (120 livres/3000 pied² à 150 livres/3000 pied²).
- 45 8. Utilisation selon la revendication 1, dans laquelle les microsphères expansées dans la nappe de papier comprennent des microsphères faites d'une matière choisie dans le groupe consistant en méthacrylate de méthyle, ortho-chlorostyrène, polyortho-chlorostyrène, chlorure de polyvinylbenzyle, acrylonitrile, chlorure de vinylidène, para-tert-butyl styrene, acétate de vinyle, acrylate de butyle, styrène, acide méthacrylique, chlorure de vinylbenzyle et des combinaisons d'au moins deux des précédents.
- 50 9. Utilisation selon la revendication 1, dans laquelle les fibres dans la nappe de papier représentent de 30 à 100 % en poids sur une base sèche de fibres de bois tendre et de 70 à 0 % en poids sur une base sèche de fibres de bois dur.
10. Utilisation selon la revendication 1, dans laquelle les microsphères sont dispersées à l'intérieur de la composition dans un état non expansé et s'expandent ultérieurement alors que la nappe en papier sèche.
- 55 11. Utilisation selon la revendication 1, dans laquelle la matière de papier présente un Indice de Coupure inférieur à 40 lorsqu'elle est analysée selon l'essai d'Indice de Coupure 30.

- 12.** Utilisation de l'une quelconques des revendications précédentes, dans laquelle la matière de papier est une chemise de classement ou une jaquette.

5

10

15

20

25

30

35

40

45

50

55

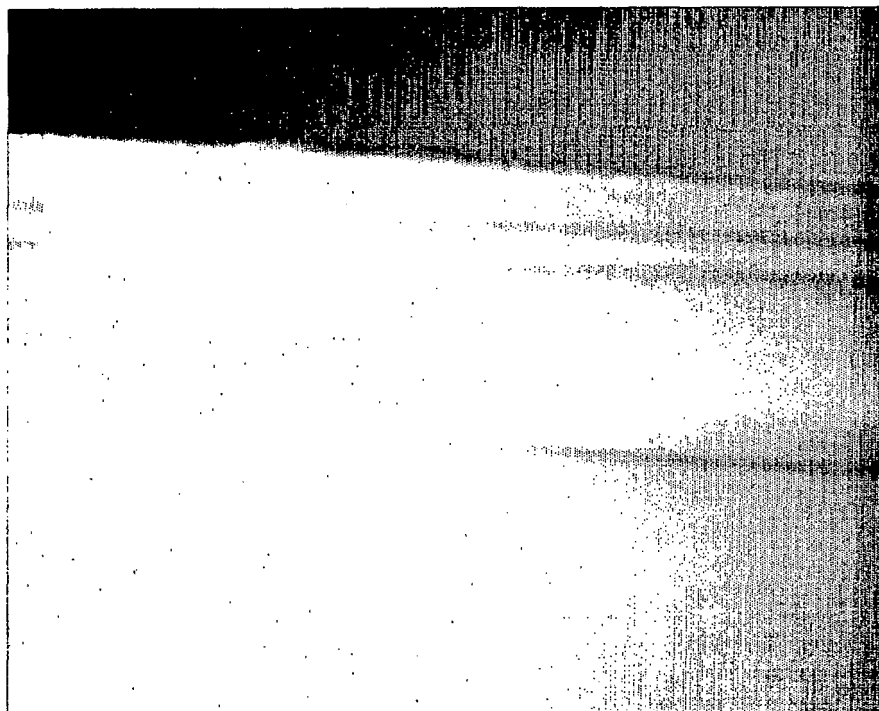


FIG. 1

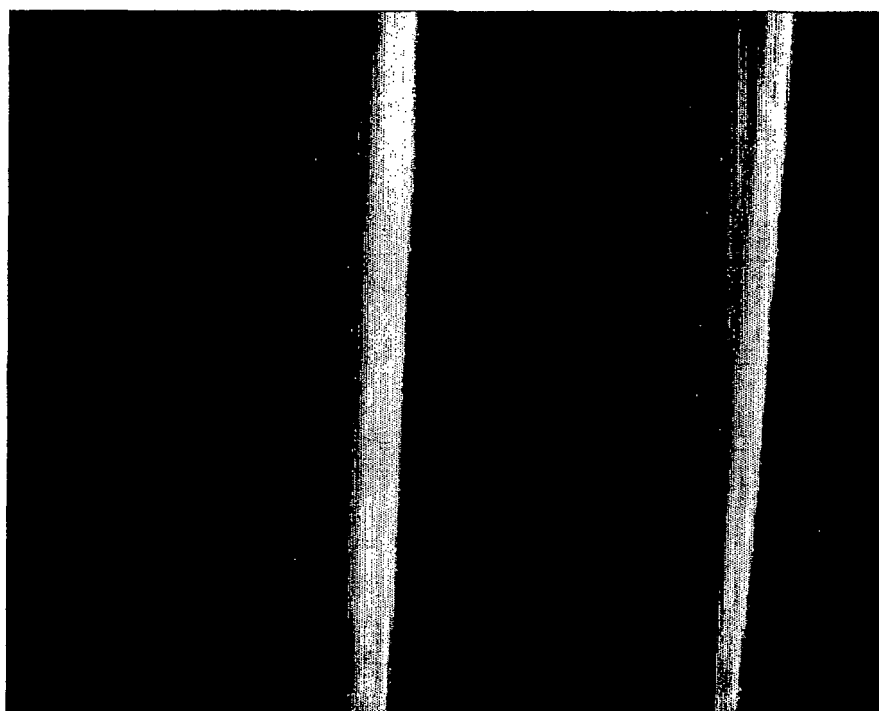


FIG. 2

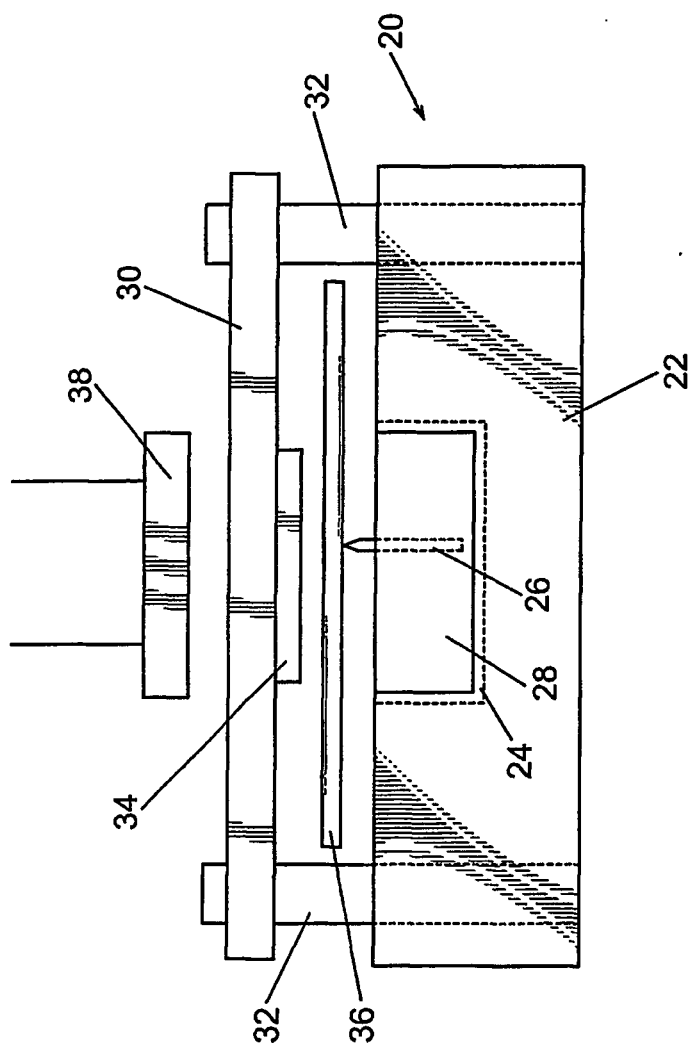


Fig. 3

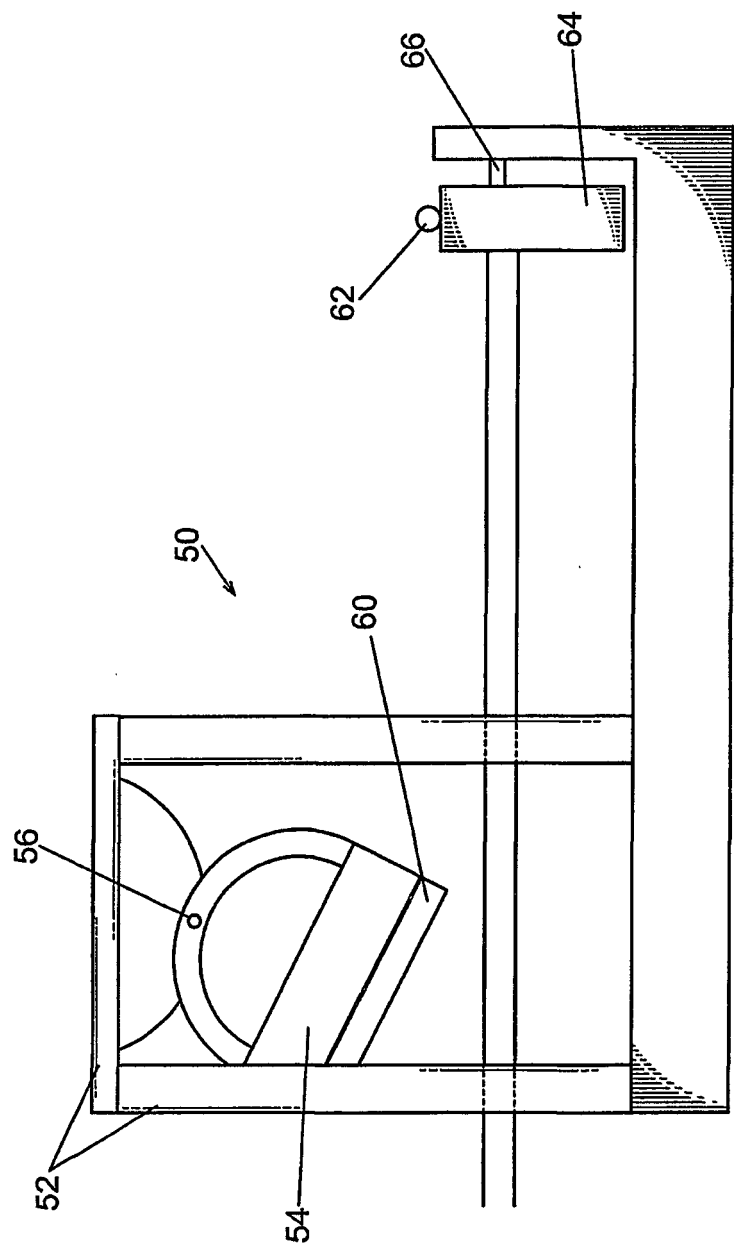


Fig. 4

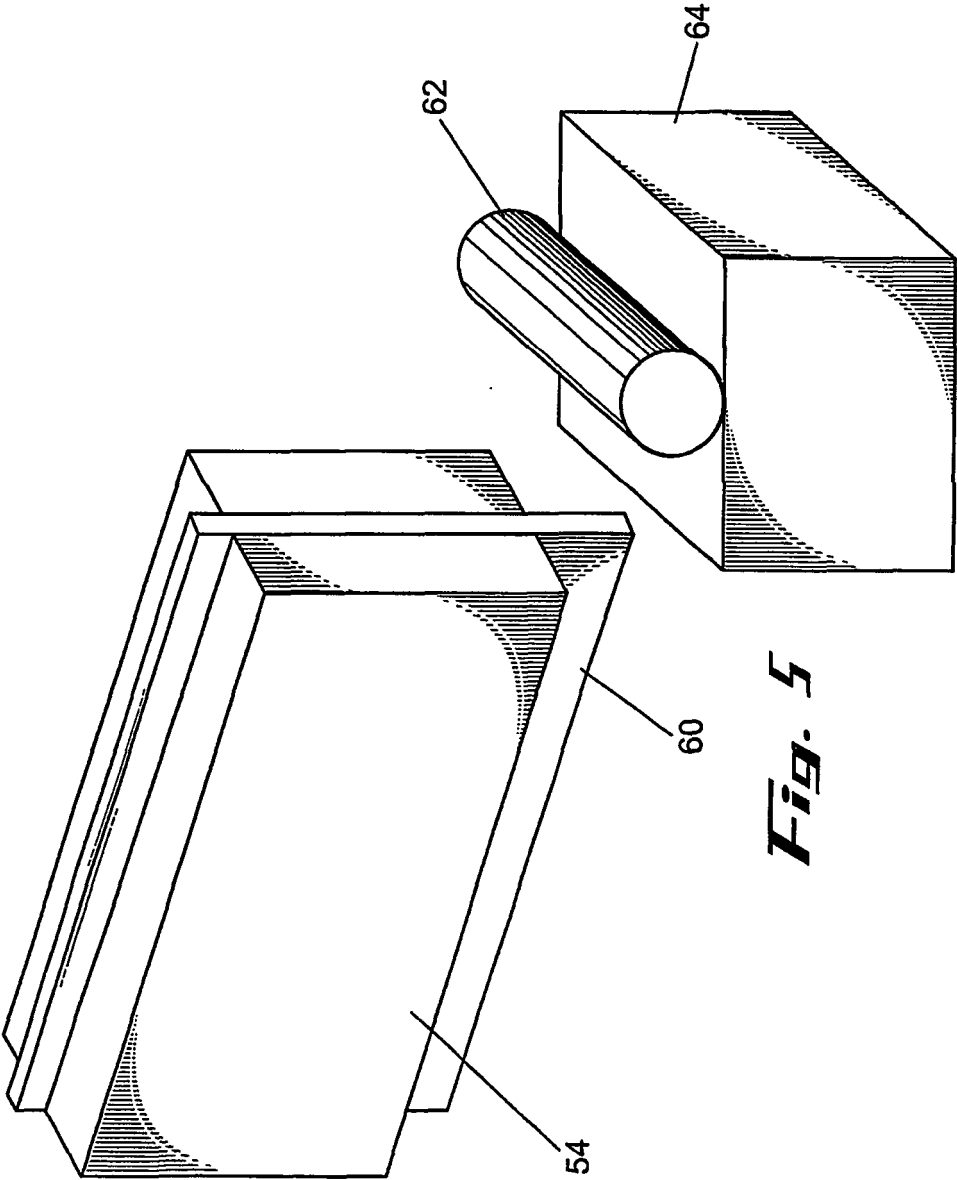


Fig. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3293114 A [0003]
- US 09770340 B [0014]