
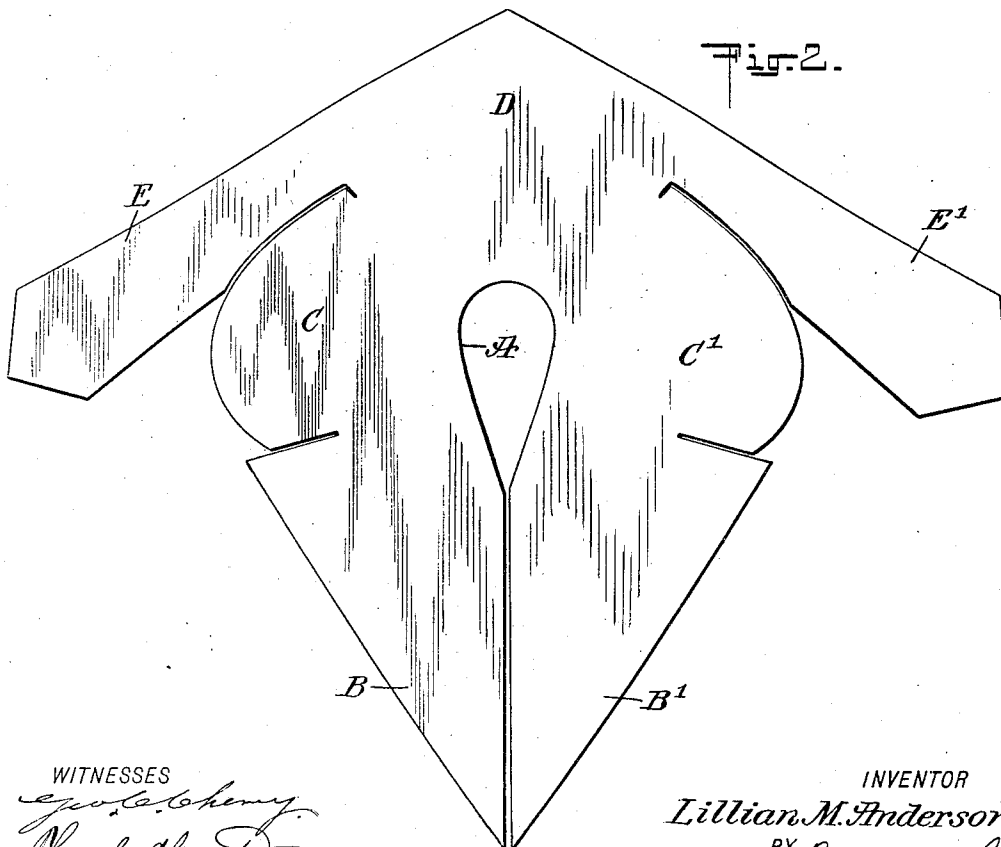


No. 894,096.

PATENTED JULY 21, 1908.

L. M. ANDERSON.
DRESSING SACK.

APPLICATION FILED MAR. 18, 1908.

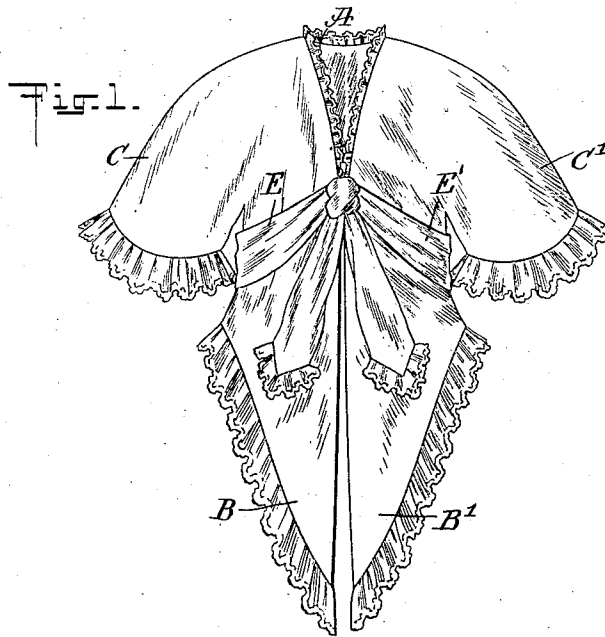

WITNESSES
John A. Cheney
Reed H. Hooten

INVENTOR
Lillian M. Anderson
BY *Mum Co*
ATTORNEYS

UNITED STATES PATENT OFFICE.

LILLIAN M. ANDERSON, OF NEW YORK, N. Y.

DRESSING-SACK.

No. 894,096.

Specification of Letters Patent.

Patented July 21, 1908.

Application filed March 16, 1908. Serial No. 421,357.

To all whom it may concern:

Be it known that I, LILLIAN M. ANDERSON, a citizen of the United States, and a resident of the city of New York, borough of Manhattan, in the county and State of New York, have invented a new and Improved Dressing-Sack, of which the following is a full, clear, and exact description.

This invention relates to women's wearing apparel, and its object is to provide a new and improved dressing sack which is simple in construction, ornamental in appearance and easily put on or removed whenever desired.

The invention consists of novel features and parts and combinations of the same, which will be more fully described hereinafter and then pointed out in the claims.

A practical embodiment of the invention is represented in the accompanying drawings forming a part of this specification, in which similar characters of reference indicate corresponding parts in both views.

Figure 1 is a front elevation of the improvement; and Fig. 2 is a plan view of the blank for forming the dressing sack.

The dressing sack, as illustrated in the drawings, is preferably cut from a single piece of suitable fabric material, to form a neck A, split or open at the front, with a view to permit conveniently placing the garment in position on the wearer's body. The split front portions of the neck A terminate in downwardly hanging front flaps B, B', and from the sides of the neck A extend sidewise shoulder portions C, C', while the rear of the neck A terminates in the back D, from the sides of which extend the tying bands E, E'. When the dressing sack is placed in position, the neck A encircles the neck of the wearer, while the shoulder portions C, C' overlie the wearer's shoulders, and the front flaps B, B' hang down loosely at the front and the back D hangs down loosely at the rear. The user now takes hold of the tying bands E, E' and passes the same under the wearer's arms to the front and over the front flaps B, B', and then draws the tying bands E, E' as tight as desired, to practically close the front split portions of the neck A, and to hold the dressing sack firmly in position. The tying bands E, E' are now tied into a knot, as illustrated in Fig. 1.

The edges of the various parts of the dressing sack may be trimmed with lace or other material to suit the taste of the user. As the

shoulder portions C, C' of the dressing sack only overlie the wearer's shoulders, it is evident that the wearer has perfect freedom of the arms, to utilize the same for any desired manipulations. It will also be noticed that the dressing sack fits nicely on the body, is securely held in place, and can be easily put on or removed at will.

Having thus described my invention, I claim as new and desire to secure by Letters Patent:

1. A dressing sack, comprising a neck split at the front, shoulder flaps extending from the sides of the neck, a back extending from the rear of the neck, front flaps forming a continuation of the front split portions of the said neck, and tying bands extending from the sides of the said back and adapted to be passed under the arms of the wearer and over the said front flaps, to be tied together at the front into a bow.

2. A dressing sack formed from a single piece of fabric material, cut to form a split neck terminating at the sides in shoulder flaps, terminating at the rear in a back flap having integral tying bands at the sides, and front flaps extending integrally from the front split portions of the said neck.

3. A dressing sack having a neck split or open at the front, tapering front flaps extending from the front split portions of the neck, shoulder portions extending from the sides of the neck to overlie the shoulders, a back tapering to a point and of less length than the front flaps, and tying bands extending from the sides of the back and adapted to be passed under the arms of the wearer and over the front flaps and tied together into a bow, the whole being formed from a single piece of material.

4. A dressing sack open at the front and having front flaps, each tapering to a point, shoulder portions to overlie the shoulders only, a back tapering to a point and of less length than the front flaps, and tying bands extending from the back and adapted to be passed to the front over the front flaps and tied together.

In testimony whereof I have signed my name to this specification in the presence of two subscribing witnesses.

LILLIAN M. ANDERSON.

Witnesses:

THEO. G. HOSTER,
EVERARD B. MARSHALL.