



(51) International Patent Classification:

G03G 15/10 (2006.01) G03G 13/10 (2006.01)
G03G 15/06 (2006.01)

(21) International Application Number:

PCT/US2015/042289

(22) International Filing Date:

27 July 2015 (27.07.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HEWLETT-PACKARD INDIGO B.V.**
[NL/NL]; Startbaan 16, 1187 XR Amstelveen (NL).

(72) Inventor; and

(71) Applicant (for US only): **SABO, David** [US/US]; 16399
W Bernardo Dr., San Diego, California 92127-1899 (US).

(74) Agents: **LEMMON, Marcus** et al.; Hewlett-Packard
Company, Intellectual Property Administration, 3404 E.
Harmony Road, Mail Stop 35, Fort Collins, Colorado
80528-9599 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

Published:

— with international search report (Art. 21(3))

(54) Title: CONDUCTIVE PLASTIC STRUCTURE

(57) Abstract: In one example, an electrically conductive structure in-
cludes an elongated substantially flat single piece of plastic permeated with
conductive fibers including conductive fibers at a contact surface of the
piece. The piece of plastic includes a bend that defines two contact surfaces
angled with respect to one another near one end of the piece and a flexible
stem between the two contact surfaces and the other end of the piece.

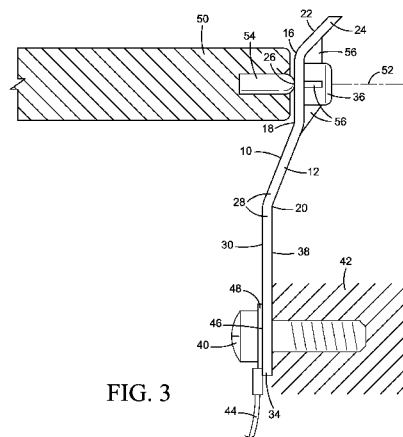


FIG. 3

CONDUCTIVE PLASTIC STRUCTURE

BACKGROUND

[0001] Liquid electro-photographic (LEP) printing uses a special kind of ink to form images on paper or other printable media. The LEP printing process involves placing an electrostatic charge pattern of the desired printed image on a photoconductor and developing the image by applying a thin layer of ink to the charged photoconductor. Charged particles in the ink cause the ink to adhere to the pattern of the desired image on the photoconductor. The ink pattern is transferred from the photoconductor to an intermediate transfer member and then from the intermediate transfer member to the paper. Ink is applied to the photoconductor with a “developer” roller. The developer roller is part of a unit with rollers and electrodes that use electric fields to form an ink layer on the developer roller which is then transferred to the photoconductor. Voltage is applied to each of the rotating rollers through a contact to stationary elements in the unit that are connected to a power supply.

DRAWINGS

[0002] Figs. 1 and 2 are front side and back side isometrics illustrating one example of a conductive plastic structure that can be used as an electrical contact to a roller.

[0003] Fig. 3 is a side elevation and partial section showing one example of the conductive structure of Figs. 1 and 2 implemented as an electrical contact to a roller.

[0004] Fig. 4 is a microscopic photograph illustrating the surface for one example of a plastic mix forming the conductive structure of Figs. 1 and 2.

[0005] Figs. 5-7 are side elevation and partial sections illustrating the assembly of Fig. 3 with the example conductive structure in different positions contacting the roller.

[0006] The same part numbers designate the same or similar parts throughout the figures.

DESCRIPTION

[0007] Currently, electrical contact with the developer rollers in LEP printers is made with a graphite or carbon/copper sintered brush that is spring loaded against the end of the roller. Brushes are susceptible to wear that can result in poor electrical contact. Also, the multiple pieces of a brush type contact increase complexity and cost. A new conductive structure has been developed for the electrical contact to the rollers in an LEP developer unit to help increase the reliability of the contact and to simplify assembly and lower cost. In one example, the new contact is an electrically conductive substantially flat single piece of plastic permeated with carbon fibers, including carbon fibers exposed at the contact surfaces of the piece. The mechanical properties of the carbon filled plastic and the ability to mold complex shapes enables a single piece that is deflected in the developer unit to provide a contact force against the end of the roller. The use of short, randomly oriented carbon fibers, for example, helps ensure good surface conductivity (i.e., low resistivity). In one specific implementation, polytetrafluoroethylene (PTFE) is added to the mix to improve durability and minimize wear.

[0008] This and other examples of the new conductive structure are not limited to developer rollers for LEP printing but may be implemented in other environments and for other applications. The examples shown and described herein illustrate but do not limit the scope of the patent, which is defined in the Claims following this Description.

[0009] Figs. 1 and 2 are front side and back side isometrics illustrating one example of a conductive plastic structure 10 that can be used as an electrical contact to a rotating member. Fig. 3 is a side elevation and partial section showing structure 10 installed as an electrical contact to a roller. Fig. 4 is a microscopic photograph illustrating the surface of conductive structure 10 in Figs. 1-3. Referring to Figs. 1-4, structure 10 is a single elongated substantially flat piece 12 of flexible plastic permeated with randomly oriented conductive carbon fibers 14. Carbon fibers 14 are visible in the photograph of Fig. 4. In this example, piece 12 includes bends 16, 18, and 20. Bend 16 makes the transition from a lead-in surface 22 at one end 24 of piece 12 to a contact

surface 26. Bend 18 makes the transition from contact surface 26 to a stem 28 region of piece 12.

[0010] Piece 12 in Figs. 1-3 may be injection molded or otherwise formed as a monolithic structure from a uniform mix of plastic and carbon fibers so that carbon fibers 14 will be exposed at all surfaces of the piece. Thus, Fig. 4 illustrates carbon fibers 14 at any surface location of piece 12. Each surface 22, 26 represents a region on the front side 30 of piece 12 to perform the respective function, as described below with reference to Figs. 5-8. Carbon fibers 14 are present at all surfaces of piece 12, specifically including contact surfaces 22 and 26.

[0011] In this example, structure 10 also includes a hole 32 in the other end 34 of piece 12 and a boss 36 protruding from back side 38 behind contact surface 26. Referring specifically to Fig. 3, a screw or other fastener 40 extends through hole 32 to fasten conductive structure 10 to a chassis 42. A wire or other stationary conductor 44 is connected to conductive structure 10 at a second contact surface 46 surrounding hole 32, for example with a ring terminal 48.

[0012] Structure 10 makes contact with a conductive roller 50 at surface 26. In this example, structure 10 contacts the end of roller 50 along the roller's axis or rotation 52. Also in this example, contact is made with roller 50 at surface 26 through a pin 54 inserted in the end of roller 50. As described in more detail below with reference to Figs. 5-8, stem 28 is flexed in the position shown in Fig. 3 to exert a contact force against roller 50 (through pin 54 in this example) and boss 36 forms a localized thicker region at contact surface 26 to maintain good contact even as piece 12 wears against a rotating pin 54. The parts of piece 12 at lead-in surface 22 and contact surface 26 may be buttressed against boss 36 with buttresses 56 to stiffen each surface 22, 26 against undesired flex.

[0013] The plastic mix used to make a conductive structure 10 includes a sufficiently high carbon content for low bulk resistivity to help minimize the voltage drop across piece 12. Testing indicates that a carbon content of at least 30% by weight for carbon fibers should be adequate to deliver sufficiently low bulk resistivity for a good electrical connection at voltage differences in the

range of 100 to 700, commonly found in a developer unit in an LEP printer. The plastic mix is formulated and processed to place carbon fibers at the surface of piece 12 for low surface resistivity to help deliver reliable electrical contact at surfaces 26 and 46.

[0014] Testing indicates that if the plastic flows too easily during injection molding, characteristic of a nylon 6 plastic mix for example, then a film with few or no carbon fibers can form on the surfaces of the part, significantly increasing surface resistivity even though bulk resistivity remains low. Accordingly, a less easy flowing plastic, a polycarbonate mix for example, may be desirable to help ensure the carbon fibers are exposed at the surface of the part for sufficiently low surface resistivity. Also, structure 10 may be "lubricated" to lower friction and wear at contact surface 26 by adding polytetrafluoroethylene (PTFE) to the mix. Thus, in one example, plastic piece 12 is injection molded with a polycarbonate mix that includes at least 30% by weight carbon fibers and at least 10% by weight polytetrafluoroethylene (PTFE). Other mixes are possible. For example, it may be possible to develop sufficiently low bulk and surface resistivity and still maintain adequate wear resistance using other plastics and/or other conductive additives.

[0015] Figs. 5-7 are side elevation and partial sections illustrating structure 10 in different positions to engage a roller 50 along its axis of rotation 52. In Fig. 5, roller 50 is being pressed down against lead-in surface 22, as indicated by direction arrow 58, for example to install a roller 50 in a developer unit in an LEP printer. Roller 50 moving down in the direction of arrow 58 displaces the end 24 of piece 12, as indicated by direction arrow 60 in Fig. 5, to flex stem 28, generating a contact force against the end of the roller (at pin 54).

[0016] In Fig. 6, roller 50 has reached the installed position with surface 26 contacting pin 54 at the urging of a flexed stem 28. Thus, piece 12 forms a cantilever flat spring at stem 28 to exert a contact force against the end of roller 50 along axis 52 at surface 26.

[0017] In Fig. 7, the friction between a rotating roller 50 (at pin 54) and contact surface 26 has worn through a portion of the thickness of piece 12. The

thicker region formed by boss 36 absorbs the wear to maintain good contact between the receding surface 26 and roller 50 (at pin 54).

[0018] To help illustrate the flexibility of the new conductive structure, piece 12 in Figs. 1-7 is formed in a complex shape specifically to replace an existing metal brush type contact used in the developer units in an LEP printer. Other configurations may be implemented and/or in other applications. A single molded piece of conductive plastic with low surface resistivity enables different shapes for a variety of implementations and applications as an electrical contact. Thus, the examples shown in the figures and described above illustrate but do not limit the scope of the patent. Other examples are possible. The foregoing description should not be construed to limit the scope of the following Claims.

[0019] "A" and "an" as used in the Claims means at least one.

CLAIMS

1. An electrically conductive structure, comprising an elongated substantially flat piece of plastic permeated with conductive fibers including conductive fibers exposed at a contact surface of the piece, the piece of plastic including:
 - a first end and a second end opposite the first end;
 - a bend that defines two contact surfaces angled with respect to one another near the first end; and
 - a flexible stem between the two contact surfaces and the second end.
2. The structure of Claim 1, where the piece of plastic is permeated with randomly oriented conductive carbon fibers including conductive carbon fibers exposed at all surfaces of the piece.
3. The structure of Claim 2, where the piece of plastic is a single piece of plastic made of a mix of polycarbonate, polytetrafluoroethylene and carbon fibers.
4. The structure of Claim 3, where the piece of plastic includes at least 30% by weight of carbon fibers and at least 10% by weight of polytetrafluoroethylene.
5. The structure of Claim 4, where the piece of plastic includes a boss protruding from a back side of the piece at a location of one of the two contact surfaces.
6. The structure of Claim 5, where the plastic piece includes a through hole near the second end and the stem is between the hole and the boss.
7. An electrically conductive plastic cantilever comprising a single flexible piece of plastic mixed with randomly oriented carbon fibers exposed at a contact surface of the piece.
8. The cantilever of Claim 7, where the piece of plastic includes a localized thicker region at a location where the carbon fibers are exposed and the cantilever will contact a rotating part.

9. The cantilever of Claim 7, where the piece of plastic of plastic is made of a mix of polycarbonate and carbon fibers.

10. The cantilever of Claim 9, where the piece includes at least 30% by weight of carbon fibers.

11. An assembly, comprising:
a conductive roller having an axis of rotation;
a stationary conductor; and
an electrically conductive flexible piece of plastic connecting the stationary conductor to the roller, the piece of plastic flexed to provide a contact force against one end of the roller along the axis of rotation.

12. The assembly of Claim 11, where the conductive piece of plastic comprises a single piece of molded plastic mixed with conductive carbon.

13. The assembly of Claim 12, where the conductive piece of plastic comprises a single piece of molded plastic mixed with conductive carbon and polytetrafluoroethylene.

14. The assembly of Claim 13, where the conductive carbon includes randomly oriented carbon fibers exposed at all surfaces of the piece.

15. The assembly of Claim 14, where the conductive piece of plastic comprises a single piece of plastic molded polycarbonate mixed with polytetrafluoroethylene and carbon fibers.

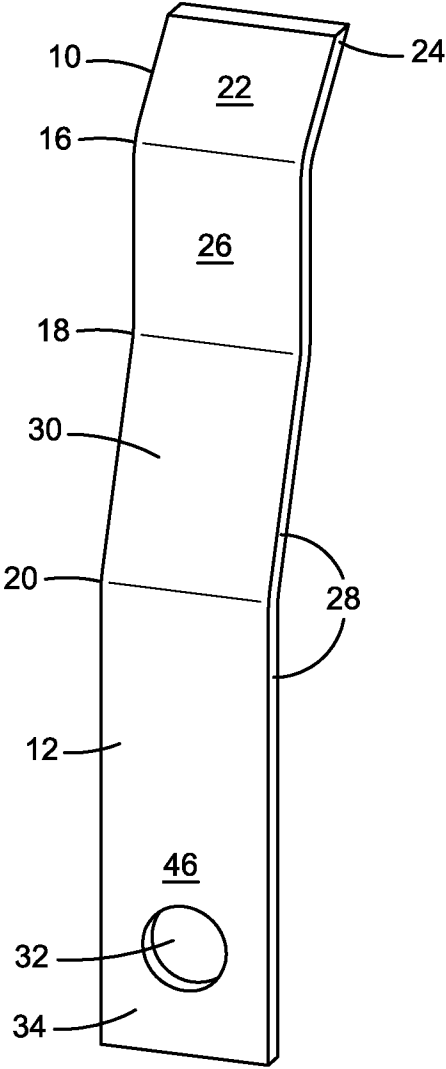


FIG. 1

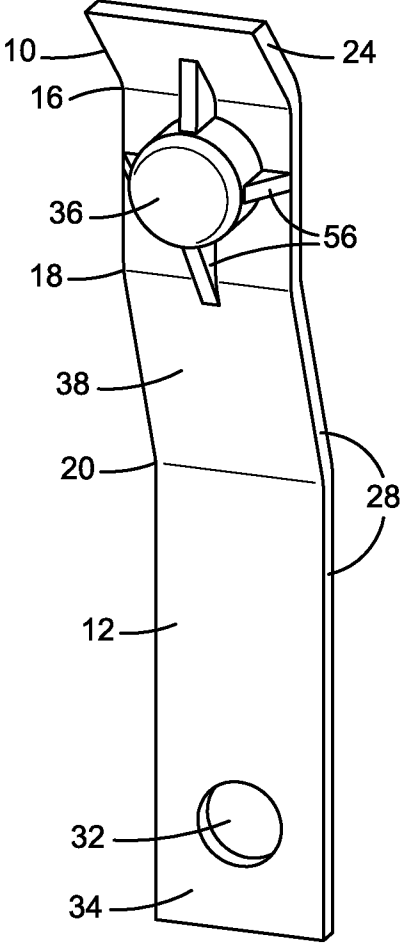


FIG. 2

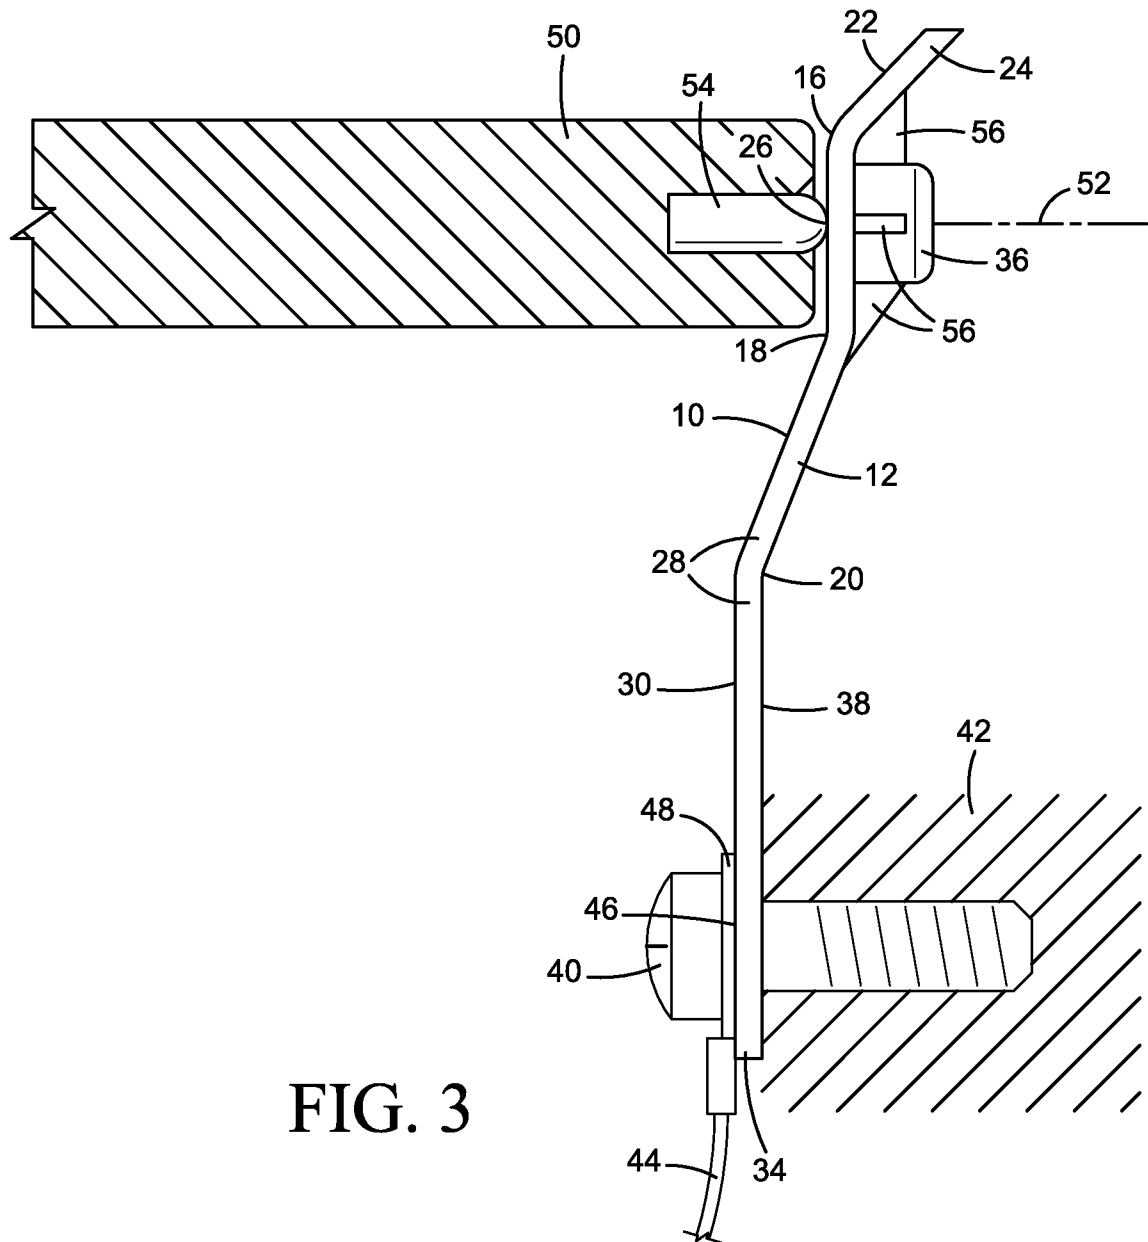


FIG. 3

3/4

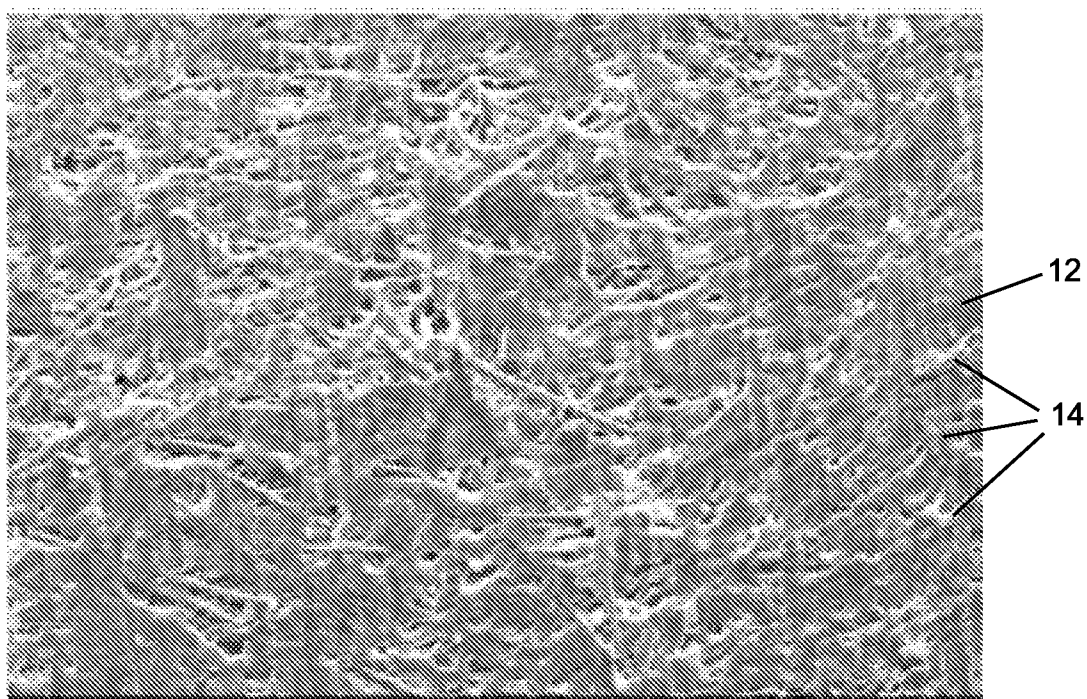


FIG. 4

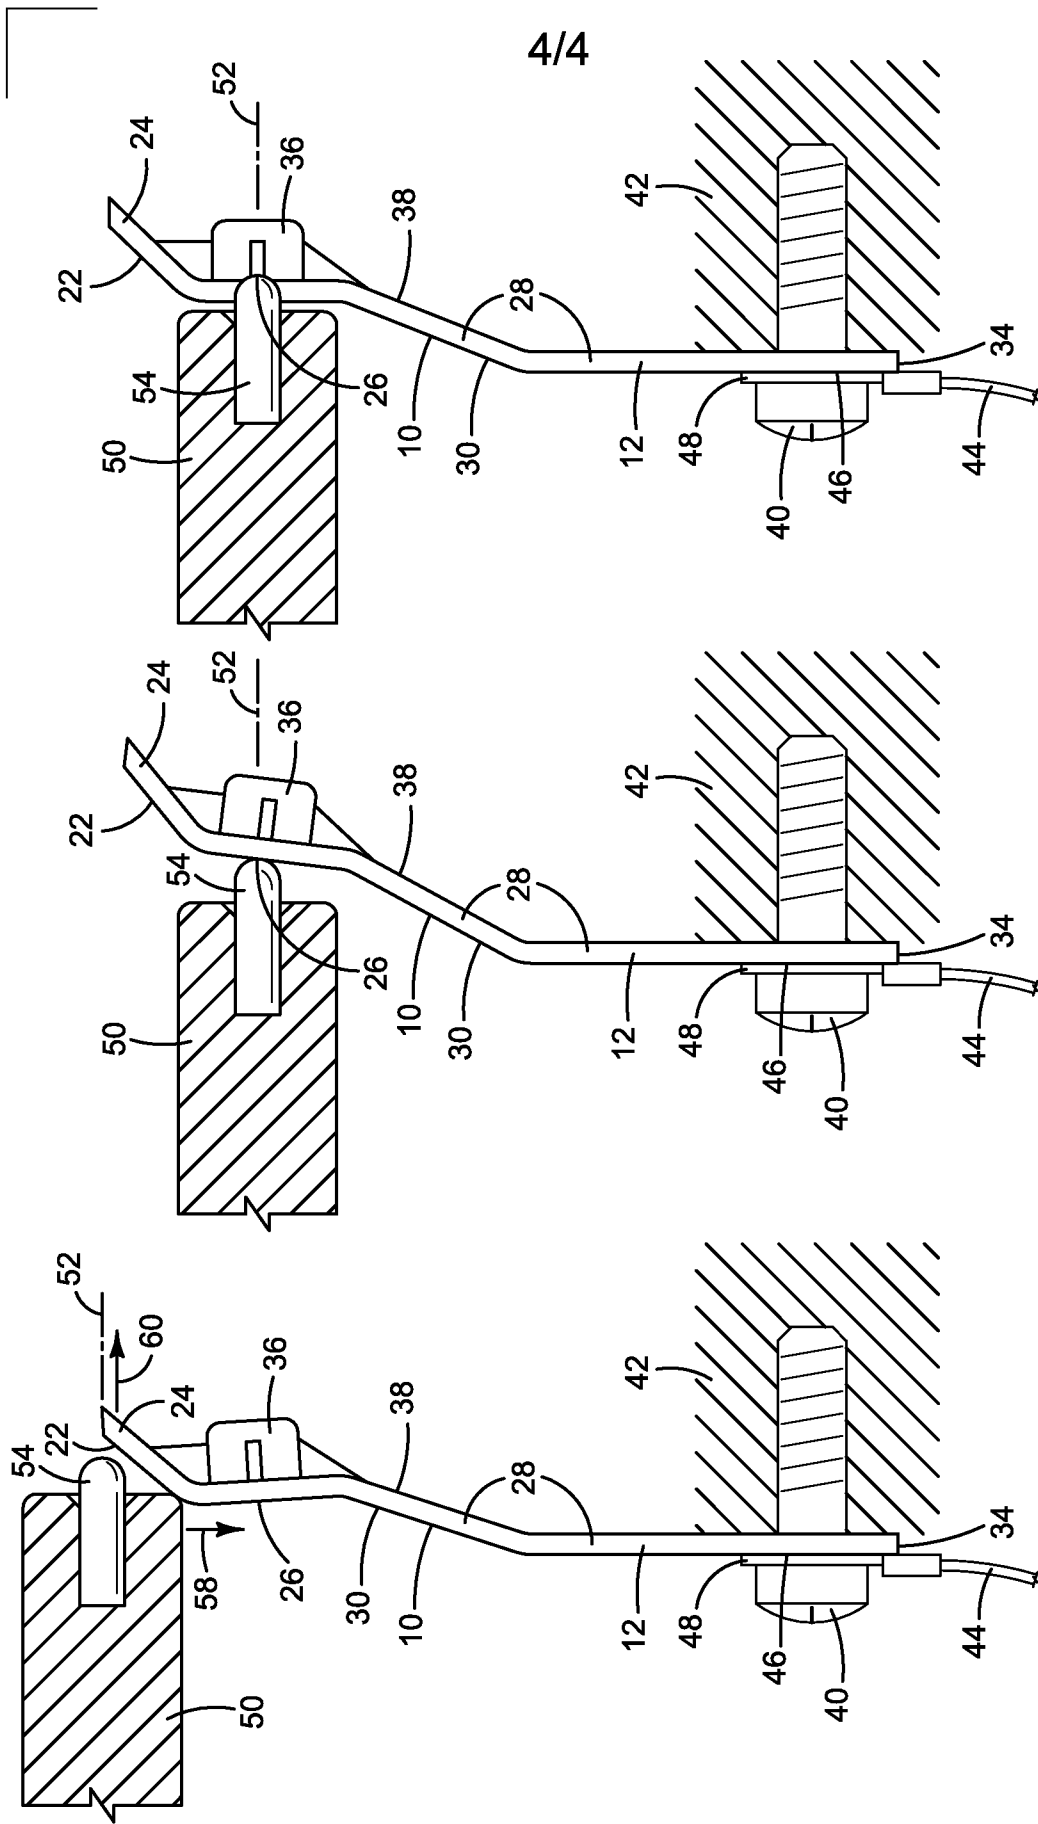


FIG. 7

FIG. 6

FIG. 5

A. CLASSIFICATION OF SUBJECT MATTER**G03G 15/10(2006.01)i, G03G 15/06(2006.01)i, G03G 13/10(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G03G 15/10; B05D 5/12; H01L 21/68; G03G 15/11; H01L 23/48; D06M 17/00; G03G 15/02; F16C 13/00; G03G 15/00; G03G 15/06; G03G 13/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: cantilever, conductive, flexible, carbon fiber, plastic, roller, and similar terms.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2063466 A2 (FORMFACTOR, INC.) 27 May 2009 See abstract; paragraphs [0019], [0025], [0094], [0119], and [0120]; claim 1; and figures 1B, 2B, 5B, and 7H	7,9-10
Y		1-6,8,11-15
Y	US 5,367,364 A (STEVEN B. MICHLIN et al.) 22 November 1994 See abstract; column 3, lines 49, 50; column 4, lines 5-8; column 4, lines 53-54; column 5, lines 46-48; column 6, lines 8-11; and figures 1, 4, and 6.	1-6,8,11-15
A	US 2010-0279086 A1 (SUNG MEE PARK et al.) 04 November 2010 See paragraphs [0011]-[0079]; claims 1-36; and figure 1.	1-15
A	US 5,812,908 A (ANDREW C. LAROCCA et al.) 22 September 1998 See column 12, lines 43-57; and figures 3A-3B.	1-15
A	JP 2003-050512 A (PFU LTD.) 21 February 2003 See paragraphs [0013]-[0020]; claims 1-2; and figures 1-4.	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 April 2016 (29.04.2016)

Date of mailing of the international search report

29 April 2016 (29.04.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsu-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

NHO, Ji Myong

Telephone No. +82-42-481-8528



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2063466 A2	27/05/2009	AU 1998-79592 A1	05/04/1999
		AU 1999-21072 A1	01/02/2000
		AU 2000-19337 A1	19/06/2000
		AU 2002-245156 A1	30/07/2002
		AU 2002-245156 A8	30/07/2002
		AU 6377796 A	11/12/1996
		CN 100461540 C	11/02/2009
		CN 100526901 C	12/08/2009
		CN 101017182 A	15/08/2007
		CN 101017182 C	15/08/2007
		CN 1045693 C	13/10/1999
		CN 1118099 C	13/08/2003
		CN 1134667 C	14/01/2004
		CN 1135268 A	06/11/1996
		CN 1135268 C	05/11/1996
		CN 1145802 C	14/04/2004
		CN 1151009 C	26/05/2004
		CN 1171167 A	21/01/1998
		CN 1171167 C	21/01/1998
		CN 1178271 C	01/12/2004
		CN 1191500 A	26/08/1998
		CN 1194692 A	30/09/1998
		CN 1194693 A	30/09/1998
		CN 1197443 C	13/04/2005
		CN 1197514 A	28/10/1998
		CN 1201161 C	11/05/2005
		CN 1203739 C	25/05/2005
		CN 1208368 A	17/02/1999
		CN 1208624 C	29/06/2005
		CN 1225724 A	11/08/1999
		CN 1272632 C	30/08/2006
		CN 1278308 A	27/12/2000
		CN 1307793 A	08/08/2001
		CN 1317224 A	10/10/2001
		CN 1328644 A	26/12/2001
		CN 1329749 A	02/01/2002
		CN 1495870 A	12/05/2004
		CN 1495870 C	12/04/2006
		CN 1561656 A	05/01/2005
		CN 1561656 C	10/01/2007
		CN 1702470 A	30/11/2005
		CN 1702470 C	30/11/2005
		CN 1722532 A	18/01/2006
		DE 69635083 T2	18/05/2006
		DE 69637818 D1	05/03/2009
		EP 0729652 A1	16/10/2002
		EP 0729652 B1	16/10/2002
		EP 0792462 A1	21/01/2004
		EP 0792462 B1	04/08/2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 0792463 A1	06/05/2004
		EP 0792463 B1	12/05/2004
		EP 0792517 A1	22/10/2003
		EP 0792517 B1	22/10/2003
		EP 0792519 A1	26/03/2003
		EP 0792519 B1	26/03/2003
		EP 0795200 A1	30/06/2004
		EP 0795200 B1	24/10/2007
		EP 0828582 A1	28/03/2001
		EP 0837750 A1	17/04/2002
		EP 0837750 B1	28/08/2002
		EP 0839321 A1	24/08/2005
		EP 0839321 B1	11/01/2006
		EP 0839322 A1	13/04/2005
		EP 0839323 A1	11/08/2004
		EP 0859686 A1	26/08/1998
		EP 0859686 A1	09/02/2005
		EP 0859686 A4	11/11/1998
		EP 0859686 B1	17/08/2005
		EP 0886894 A2	06/07/2005
		EP 0886894 B1	28/09/2005
		EP 0898712 A2	09/04/2003
		EP 0985231 A1	15/03/2000
		EP 1023469 A1	02/08/2000
		EP 1092338 A1	18/04/2001
		EP 1092338 B1	15/12/2004
		EP 1097617 A1	09/05/2001
		EP 1097617 B1	20/07/2005
		EP 1135693 A1	26/09/2001
		EP 1135693 B1	04/06/2003
		EP 1135794 A1	26/09/2001
		EP 1135794 B1	23/04/2008
		EP 1141735 A2	10/10/2001
		EP 1145612 A2	17/10/2001
		EP 1145612 A3	11/12/2002
		EP 1145612 B1	09/03/2005
		EP 1198001 A2	17/04/2002
		EP 1198001 A3	23/07/2008
		EP 1232828 A1	21/08/2002
		EP 1241481 A2	18/09/2002
		EP 1241481 A3	02/01/2004
		EP 1262782 A2	04/12/2002
		EP 1262782 A3	17/06/2009
		EP 1321978 A2	25/06/2003
		EP 1321978 A3	25/08/2004
		EP 1321978 B1	17/02/2010
		EP 1326079 A2	09/07/2003
		EP 1326079 A3	19/05/2004
		EP 1326079 B1	04/07/2007
		EP 1408337 A2	14/04/2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 1408337 A3	19/09/2007
		EP 1408338 A2	14/04/2004
		EP 1408338 A3	26/09/2007
		EP 1439397 A2	21/07/2004
		EP 1439397 A3	02/09/2009
		EP 1441232 A2	28/07/2004
		EP 1441232 A3	04/11/2009
		EP 1447846 A2	18/08/2004
		EP 1447846 A3	17/10/2007
		EP 1468776 A2	20/10/2004
		EP 1468776 A3	04/11/2009
		EP 1482314 A1	01/12/2004
		EP 1482314 B1	11/11/2009
		EP 1523229 A2	13/04/2005
		EP 1523229 A3	27/07/2005
		EP 1523229 B1	24/10/2007
		EP 1583406 A2	05/10/2005
		EP 1583406 A3	23/09/2009
		EP 1610132 A2	28/12/2005
		EP 1610132 A3	14/06/2006
		EP 1610132 B1	14/01/2009
		EP 1610375 A2	28/12/2005
		EP 1610375 A3	05/11/2008
		EP 1659410 A2	24/05/2006
		EP 1659410 A3	08/11/2006
		EP 2058667 A2	13/05/2009
		JP 2001-077250 A	23/03/2001
		JP 2001-156223 A	08/06/2001
		JP 2001-502851 A	27/02/2001
		JP 2001-516812 A	02/10/2001
		JP 2001-524258 A	27/11/2001
		JP 2001-526772 A	18/12/2001
		JP 2001-526833 A	18/12/2001
		JP 2002-231718 A	16/08/2002
		JP 2002-359269 A	13/12/2002
		JP 2002-509604 A	26/03/2002
		JP 2002-509639 A	26/03/2002
		JP 2002-509640 A	26/03/2002
		JP 2002-519872 A	02/07/2002
		JP 2002-520864 A	09/07/2002
		JP 2002-531836 A	24/09/2002
		JP 2002-531842 A	24/09/2002
		JP 2002-533738 A	08/10/2002
		JP 2003-031289 A	31/01/2003
		JP 2003-177144 A	27/06/2003
		JP 2003-179110 A	27/06/2003
		JP 2003-218180 A	31/07/2003
		JP 2003-232809 A	22/08/2003
		JP 2003-523073 A	29/07/2003
		JP 2004-251910 A	09/09/2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2004-336062 A	25/11/2004
		JP 2005-049336 A	24/02/2005
		JP 2005-252313 A	15/09/2005
		JP 2006-013526 A	12/01/2006
		JP 2006-084475 A	30/03/2006
		JP 2007-059931 A	08/03/2007
		JP 2007-132950 A	31/05/2007
		JP 2007-173846 A	05/07/2007
		JP 2007-201471 A	09/08/2007
		JP 2007-329491 A	20/12/2007
		JP 2008-014957 A	24/01/2008
		JP 2008-034861 A	14/02/2008
		JP 2008-046139 A	28/02/2008
		JP 2008-141211 A	19/06/2008
		JP 2008-203273 A	04/09/2008
		JP 2008-275646 A	13/11/2008
		JP 2010-249824 A	04/11/2010
		JP 2011-069829 A	07/04/2011
		JP 3157005 B2	16/04/2001
		JP 3157134 B2	16/04/2001
		JP 3178151 B2	18/06/2001
		JP 3294859 B2	24/06/2002
		JP 3378259 B2	17/02/2003
		JP 3386077 B2	10/03/2003
		JP 3387930 B2	17/03/2003
		JP 3566928 B2	15/09/2004
		JP 3608795 B2	12/01/2005
		JP 3648455 B2	18/05/2005
		JP 3723079 B2	07/12/2005
		JP 3727540 B2	14/12/2005
		JP 3754616 B2	15/03/2006
		JP 3759622 B2	29/03/2006
		JP 3939467 B2	04/07/2007
		JP 3949377 B2	25/07/2007
		JP 3996172 B2	24/10/2007
		JP 4084180 B2	30/04/2008
		JP 4092361 B2	28/05/2008
		JP 4150695 B2	17/09/2008
		JP 4160693 B2	01/10/2008
		JP 4160809 B2	08/10/2008
		JP 4163922 B2	08/10/2008
		JP 4188546 B2	26/11/2008
		JP 4389209 B2	24/12/2009
		JP 4540577 B2	08/09/2010
		JP 4588721 B2	01/12/2010
		JP 4598356 B2	15/12/2010
		JP 4741626 B2	03/08/2011
		KR 10-0210691 B1	15/07/1999
		KR 10-0252457 B1	15/04/2000
		KR 10-0266389 B1	15/09/2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		KR 10-0269706 B1	16/10/2000
		KR 10-0278093 B1	15/01/2001
		KR 10-0278342 B1	15/01/2001
		KR 10-0299465 B1	27/10/2001
		KR 10-0312872 B1	12/12/2001
		KR 10-0324059 B1	17/04/2002
		KR 10-0324064 B1	22/06/2002
		KR 10-0335165 B1	04/05/2002
		KR 10-0335166 B1	04/05/2002
		KR 10-0335167 B1	04/05/2002
		KR 10-0335168 B1	04/05/2002
		KR 10-0355972 B1	12/10/2002
		KR 10-0366746 B1	09/01/2003
		KR 10-0366747 B1	09/01/2003
		KR 10-0394205 B1	06/08/2003
		KR 10-0399210 B1	26/09/2003
		KR 10-0408948 B1	03/04/2004
		KR 10-0423683 B1	22/03/2004
		KR 10-0429755 B1	03/05/2004
		KR 10-0430208 B1	03/05/2004
		KR 10-0431916 B1	17/05/2004
		KR 10-0460470 B1	28/02/2005
		KR 10-0460471 B1	08/12/2004
		KR 10-0517256 B1	16/12/2005
		KR 10-0522070 B1	18/10/2005
		KR 10-0548103 B1	02/02/2006
		KR 10-0554324 B1	24/02/2006
		KR 10-0556638 B1	03/03/2006
		KR 10-0577131 B1	10/05/2006
		KR 10-0577132 B1	09/05/2006
		KR 10-0580405 B1	16/05/2006
		KR 10-0623099 B1	13/09/2006
		KR 10-0674534 B1	25/04/2007
		KR 10-1999-0021980 A	25/03/1999
		KR 10-2001-0024022 A	26/03/2001
		KR 10-2001-0053283 A	25/06/2001
		KR 10-2003-0096425 A	31/12/2003
		KR 10-2006-0087616 A	02/08/2006
		TW 404033 A	01/09/2000
		TW 408408 A	11/10/2000
		TW 450017 A	11/08/2001
		TW 473562 A	21/01/2002
		TW 548756 A	21/08/2003
		TW 578346 A	01/03/2004
		TW 580744 A	21/03/2004
		TW 589462 A	01/06/2004
		TW 1241870 B	11/10/2005
		US 5476211 A	19/12/1995
		US 5579518 A	26/11/1996
		US 5601740 A	11/02/1997

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 5741668 A	21/04/1998
		US 5772451 A	30/06/1998
		US 5773780 A	30/06/1998
		US 5806181 A	15/09/1998
		US 5820014 A	13/10/1998
		US 5829128 A	03/11/1998
		US 5832601 A	10/11/1998
		US 5852871 A	29/12/1998
		US 5864946 A	02/02/1999
		US 5878486 A	09/03/1999
		US 5884398 A	23/03/1999
		US 5900738 A	04/05/1999
		US 5912046 A	15/06/1999
		US 5917707 A	29/06/1999
		US 5926951 A	27/07/1999
		US 5974662 A	02/11/1999
		US 5983493 A	16/11/1999
		US 5994152 A	30/11/1999
		US 6023103 A	08/02/2000
		US 6029344 A	29/02/2000
		US 6032356 A	07/03/2000
		US 6033935 A	07/03/2000
		US 6042712 A	28/03/2000
		US 6043563 A	28/03/2000
		US 6049976 A	18/04/2000
		US 6064213 A	16/05/2000
		US 6090261 A	18/07/2000
		US 6110823 A	29/08/2000
		US 6150186 A	21/11/2000
		US 6168974 B1	02/01/2001
		US 6184053 B1	06/02/2001
		US 6184587 B1	06/02/2001
		US 6215196 B1	10/04/2001
		US 6215670 B1	10/04/2001
		US 6232149 B1	15/05/2001
		US 6242803 B1	05/06/2001
		US 6246247 B1	12/06/2001
		US 6252175 B1	26/06/2001
		US 6274823 B1	14/08/2001
		US 6279227 B1	28/08/2001
		US 6330164 B1	11/12/2001
		US 6336269 B1	08/01/2002
		US 6429029 B1	06/08/2002
		US 6442831 B1	03/09/2002
		US 6475822 B2	05/11/2002
		US 6476333 B1	05/11/2002
		US 6482013 B2	19/11/2002
		US 6483328 B1	19/11/2002
		US 6520778 B1	18/02/2003
		US 6525555 B1	25/02/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 6534856 B1	18/03/2003
		US 6538214 B2	25/03/2003
		US 6551844 B1	22/04/2003
		US 6615485 B2	09/09/2003
		US 6624648 B2	23/09/2003
		US 6627483 B2	30/09/2003
		US 6642625 B2	04/11/2003
		US 6644982 B1	11/11/2003
		US 6655023 B1	02/12/2003
		US 6664628 B2	16/12/2003
		US 6669489 B1	30/12/2003
		US 6685817 B1	03/02/2004
		US 6690185 B1	10/02/2004
		US 6701612 B2	09/03/2004
		US 6705876 B2	16/03/2004
		US 6727580 B1	27/04/2004
		US 6741085 B1	25/05/2004
		US 6778406 B2	17/08/2004
		US 6788094 B2	07/09/2004
		US 6807734 B2	26/10/2004
		US 6818840 B2	16/11/2004
		US 6825052 B2	30/11/2004
		US 6835898 B2	28/12/2004
		US 6836962 B2	04/01/2005
		US 6838893 B2	04/01/2005
		US 6887723 B1	03/05/2005
		US 6913468 B2	05/07/2005
		US 6937037 B2	30/08/2005
		US 6948941 B2	27/09/2005
		US 6956174 B2	18/10/2005
		US 7059047 B2	13/06/2006
		US 7061257 B2	13/06/2006
		US 7063541 B2	20/06/2006
		US 7064566 B2	20/06/2006
		US 7073254 B2	11/07/2006
		US 7078926 B2	18/07/2006
		US 7082682 B2	01/08/2006
		US 7084656 B1	01/08/2006
		US 7086149 B2	08/08/2006
		US 7140883 B2	28/11/2006
		US 7142000 B2	28/11/2006
		US 7169646 B2	30/01/2007
		US 7200930 B2	10/04/2007
		US 7202677 B2	10/04/2007
		US 7217580 B2	15/05/2007
		US 7225538 B2	05/06/2007
		US 7345493 B2	18/03/2008
		US 7347702 B2	25/03/2008
		US 7352196 B2	01/04/2008
		US 7534654 B2	19/05/2009

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5367364 A	22/11/1994	None	
US 2010-0279086 A1	04/11/2010	CA 2669657 A1 CA 2669657 C CA 2673501 A1 CA 2673501 C CN 101535558 A CN 101535558 B CN 101542039 A CN 101542039 B EP 2084324 A1 EP 2084324 A4 EP 2084324 B1 EP 2094905 A1 EP 2094905 B1 EP 2094905 B9 JP 2010-509108 A JP 2010-513084 A JP 5352470 B2 KR 10-0945051 B1 KR 10-0955338 B1 KR 10-0956885 B1 KR 10-0956886 B1 KR 10-0956887 B1 KR 10-0957643 B1 KR 10-0957644 B1 KR 10-0959938 B1 KR 10-0959939 B1 KR 10-0968954 B1 KR 10-0991527 B1 KR 10-0991528 B1 KR 10-0991529 B1 KR 10-0991530 B1 KR 10-0991531 B1 KR 10-0991532 B1 KR 10-0991533 B1 KR 10-2008-0043730 A RU 2009-118193 A RU 2449069 C2 US 2009-0291604 A1 US 8003198 B2 WO 2008-060101 A1 WO 2008-075915 A1	22/05/2008 25/06/2013 26/06/2008 11/08/2015 16/09/2009 05/09/2012 23/09/2009 07/12/2011 05/08/2009 19/05/2010 04/12/2013 02/09/2009 15/01/2014 05/03/2014 25/03/2010 30/04/2010 27/11/2013 05/03/2010 29/04/2010 11/05/2010 11/05/2010 11/05/2010 13/05/2010 13/05/2010 26/05/2010 26/05/2010 14/07/2010 04/11/2010 04/11/2010 04/11/2010 04/11/2010 04/11/2010 04/11/2010 04/11/2010 19/05/2008 20/12/2010 27/04/2012 26/11/2009 23/08/2011 22/05/2008 26/06/2008
US 5812908 A	22/09/1998	JP 10-333507 A JP 4245687 B2	18/12/1998 25/03/2009
JP 2003-050512 A	21/02/2003	None	