HU000028145T2

(19) **HU**

(11) Lajstromszám: **E 028 145**

(13) **T2**

MAGYARORSZÁG
Szellemi Tulajdon Nemzeti Hivatala

EURÓPAI SZABADALOM
SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 09 003045**
(22) A bejelentés napja: **2004. 03. 03.**

(96) Az európai bejelentés bejelentési száma:
EP 20040003045
(97) Az európai bejelentés közzétételi adatai:
EP 2066130 A1 **2009. 06. 03.**
(97) Az európai szabadalom megadásának meghirdetési adatai:
EP 2066130 B1 **2015. 09. 02.**

(51) Int. Cl.: ***H04N 19/61*** *(2006.01)*
H04N 195/73 *(2006.01)*
H04N 195/77 *(2006.01)*
H04N 19/58 *(2006.01)*

(30) Elsőbbségi adatok:
20030013198 **2003. 03. 03.** **KR**

(72) Feltaláló(k):
Soh, Yoon-Seong, Seoul 137-724 (KR)
Jeon, Byeong-Moon, Seoul 137-724 (KR)

(73) Jogosult(ak):
LG Electronics Inc., Seoul 150-721 (KR)

(74) Képviselő:
ADVOPATENT Szabadalmi és Védjegy Iroda, Budapest

(54) **Eljárás referenciakép kiválasztására**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 066 130 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
02.09.2015 Bulletin 2015/36

(21) Application number: **09003045.3**

(22) Date of filing: **03.03.2004**

(51) Int Cl.:
H04N 19/61 *(2014.01)* ***H04N 19/58*** *(2014.01)*
H04N 19/577 *(2014.01)* ***H04N 19/573*** *(2014.01)*

(54) **Method of selecting a reference picture**

Verfahren zum Auswählen eines Bezugsbilds

Procédé de sélection d'une image de référence

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **03.03.2003 KR 20030013198**

(43) Date of publication of application:
03.06.2009 Bulletin 2009/23

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
04716800.0 / 1 582 069

(73) Proprietor: **LG Electronics Inc.**
Seoul 150-721 (KR)

(72) Inventors:
- **Soh, Yoon-Seong**
  Seoul 137-724 (KR)
- **Jeon, Byeong-Moon**
  Seoul 137-724 (KR)

(74) Representative: **Diehl & Partner GbR**
Patentanwälte
Erika-Mann-Strasse 9
80636 München (DE)

(56) References cited:
- **JVT: "Study of Final Committee Draft of Joint Video Specification (ITU-T Rec. H.264 ISO/IEC 14496-10 AVC)" JOINT VIDEO TEAM (JVT) OF ISO/IEC MPEG & ITU-T VCEG(ISO/IEC JTC1/SC29/WG11 AND ITU-T SG16 Q6), no. JVT-F100, 16 February 2003 (2003-02-16), pages I-XV, 1-226, XP030005665 Awaji, JP**
- **NILSSON: "Reference picture buffering text changes" JOINT VIDEO TEAM (JVT) OF ISO/IEC MPEG & ITU-T VCEG(ISO/IEC JTC1/SC29/WG11 AND ITU-T SG16 Q6), no. JVT-E149r5, 18 October 2002 (2002-10-18), pages I-XX,1-207, XP030005566 Geneva, Switzerland**
- **WANG: "MB adaptive field/frame coding for interlace sequences" JOINT VIDEO TEAM JVT OF ISO/IEC MPEG AND ITU-T VCEG, no. JVT-D108, 26 July 2002 (2002-07-26), XP030005380 Klagenfurt, Austria**
- **CHAD FOGG PIXONICS ET AL: "Adaptive Field/ Frame Block Coding Experiment Proposal" ITU-T, SG 16 Q6, VIDEO CODING EXPERTS GROUP VCEG, no. VCEG-N76, 24 September 2001 (2001-09-24), - 27 September 2001 (2001-09-27) pages 1-7, XP030003323 Santa Barbara, CA,USA**
- **WIEGAND: "Multi-picture handling" JOINT VIDEO TEAM JVT OF ISO/IEC MPEG AND ITU-T VCEG, no. JVT-D018, 26 July 2002 (2002-07-26), XP030005293 Klagenfurt, Austria**
- **WIEGAND: "Multi-picture handling" JOINT VIDEO TEAM JVT OF ISO/IEC MPEG AND ITU-T VCEG, [Online] no. JVT-D018.ppt, 26 July 2002 (2002-07-26), XP002505619 Klagenfurt, Austria Retrieved from the Internet: URL:http://wftp3.itu.int/av-arch/jvt-site/2002_07_Klagenfurt/JVT-D018r1_FrameFieldNumbering.ppt> [retrieved on 2008-11-25]**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 066 130 B1

Description

Technical Field

[0001] The present invention relates to a method for coding a moving picture, and more particularly, to a method for coding interlaced moving picture into frame picture having frame/field macroblock in a moving picture coding system that uses multiple reference pictures.

Background Art

[0002] Moving picture coding system compensates for motion using motion vector information. In case of moving picture coding system that uses multiple reference picture, reference picture index information as well as motion vector information is required for motion compensation. The reference picture index is a value that is used to distinguish multiple reference pictures from each other. A coder transfers the reference picture index to a decoder, and the decoder performs motion compensation from reference picture that is indicated by the reference picture index.

[0003] Generally, scanning methods are classified into a progressive scanning and an interlaced scanning. In case of the progressive scanning, an image of one frame consists of data that are sampled at the same time. In case of the interlaced scanning, an image of one frame consists of data that are sampled at different times, and the samples are alternated line by line.

[0004] The interlaced image of a frame is divided into a top field and a bottom field. In the interlaced scanning, one frame is divided into two field images. In this specification, an image is treated based on unit of picture. A frame or a field may be allocated to the picture.

[0005] Three coding methods for an interlaced moving picture are proposed. A first coding method is a field picture coding method which performs a coding process, considering each field as an independent picture at a picture or slice level. A second coding method is the frame picture coding method which performs a coding process after combining two fields into one frame at a picture or slice level. A third coding method is a frame picture coding method with frame/field macroblock, which performs a coding process by combining two fields into one frame and selecting a frame mode or a field mode at a macroblock level.

[0006] In the third coding method, two vertically adjacent macroblocks are bound into a pair and the coding is performed in unit of macroblock pair. In FIG. 1, numbers assigned in the macroblock pairs indicate macroblock addresses that are used to distinguish the macroblocks from each other.

[0007] Here, frame macroblock is a macroblock which is coded at upper and lower macroblocks of the macroblock pair in unit of frame. In other words, each macroblock is coded in unit of frame after two fields are combined into one frame.

[0008] Meanwhile, field macroblock is a macroblock that is coded at upper and lower macroblocks of macroblock pair in unit of field. The macroblock pair is divided into top and bottom field components and each field is coded independently. At this time, the macroblock pairs are rearranged so that the upper and lower macroblocks may respectively contain only top field component and only bottom field component. The upper macroblock is called a top field macroblock and the lower macroblock is called a bottom field macroblock.

[0009] Reference buffer for storing multiple reference pictures are configured in unit of frame. In the frame picture coding, all reference pictures are considered as units of frame in which two fields are combined into one frame, and one picture among the reference frame pictures is used for motion compensation. Accordingly, values are allocated to the reference picture indexes in unit of frame.

[0010] The reference picture index for P frame is obtained by sorting all the reference frames in an order reverse to a coding order and then sequentially allocating an index, which is increased by one, to the sorted reference frames. The reference picture index for B frame is classified into list 0 and list 1 and is determined based on a display order of the reference frame.

[0011] First, in case of the reference frame list 0, indexes are allocated in a reverse order to the reference frames whose display order lags behind the B frame, and then, the remaining indexes are allocated in the display order to the reference frames whose display order leads the B frame. In case of the reference frame list 1, in contrast to the reference frame list 0, indexes are allocated in the display order to the reference frames whose display order leads the B frame, and then, the remaining indexes are allocated in a reverse order to the reference frame whose display order lags behind the B frame. FIG. 2 shows a reference picture index for P frame when a size of the reference buffer is 5, and FIG. 3 shows the reference picture index lists 0 and 1 for B frame.

[0012] In the field picture coding, the fields of all reference pictures are considered as independent pictures and one of the reference field pictures is used for motion compensation. Accordingly, values are allocated to the reference picture indexes in unit of field. At this time, the reference fields are combined in the unit of frame, and then, the reference picture indexes in each field of the P frame are sorted in an order reverse to a coding order of the frame. Then, index values that are increased by one are alternately allocated in an order that starts from a reference field having parity equal to a

current picture to a reference field having parity different from the current picture, while visiting the sorted reference frames in sequence.

[0013] In addition, in case of the reference picture index lists 0 and 1 for each field of B frame, all the reference fields are combined in unit of frame and then a reference frame is sorted in the same manner as a method of determining reference frame index of B frame. Thereafter, the indexes that are increased by one are alternately allocated in an order that starts from a reference field having parity equal to a current picture to a reference field having parity different from the current picture, while visiting the sorted reference frames in sequence.

[0014] FIG. 4 shows reference picture indexes of top and bottom fields of P frame when a size of reference buffer is 5, and FIG. 5 shows reference picture index lists 0 and 1 of top and bottom fields of B frame that can be used as a reference.

[0015] Documents JVT-D108 of the Joint Video Team .(JVT) of ISO/IEC MPEG & ITU-T VCEG and VCEG-N76 of ITU-T Q.6 SG16 both disclose to assign a number to fields of reference pictures.

[0016] According to document JVT-D108, the numbers are assigned such that the lower number is assigned to the same field parity.

[0017] According to VCEG-N76 a code number starting from the value "0" which is incremented by values of "1" is assigned to fields of previously decoded frames, starting with the last decoded same-parity field and continuing with the last decoded opposite-parity field before resuming by the last-but-one decoded same-parity field.

[0018] In order to improve coding efficiency, the moving picture coding system using multiple reference pictures provides a function of reordering the reference picture indexes before decoding a picture or a slice. It is arbitrarily reordering the reference picture indexes'so as to enhance the coding efficiency after determining initial reference picture index for the frame and field pictures. FIG. 6 shows a result of determining initial reference picture index for P frame and arbitrarily reordering indexes according to the above-described method.

[0019] When the moving picture coding system using the multiple reference pictures codes an interlaced moving picture into a frame picture, having frame/field macroblock, all the reference pictures for the frame macroblock are considered as frame unit and one of the reference frame pictures must be used for motion compensation. In addition, and fields of all the reference pictures for the field macroblock are considered as independent pictures and one of the reference field pictures must be used for motion compensation.

[0020] Accordingly, in the frame picture coding that selects the frame/field coding modes at the macroblock level, it is necessary to allocate values to the reference picture index in frame unit or field unit according to the coding mode of each macroblock.

Disclosure of the Invention

[0021] Accordingly, the present invention is directed to a method for coding a moving picture that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0022] An object of the present invention is to provide a method for coding a moving picture, which efficiently provides reference picture information used for motion compensation by determining the reference picture index differently according a coding mode of macroblock when interlaced moving picture is coded with a frame picture having frame/field macroblocks in a moving picture coding system using multiple reference pictures. The above object is solved by the combination of features of the independent claim.

[0023] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims thereof as well as the appended drawings.

[0024] There is provided a method for coding a moving picture in a moving picture coding system using multiple reference picture, a method for setting a reference index, when an interlaced moving picture is coded into a frame picture having frame/field macroblock. The method comprising: (a) determining reference picture index of frame unit at a picture (or slice) level; and (b) determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level.

[0025] The method comprises (a) determining reference picture index of frame unit at a picture (or slice) level; and (b) determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level.

[0026] When determining reference picture index of frame unit at a picture (or slice) level according to a method described above, all reference pictures are considered in unit of frame.

[0027] When determining reference picture index of frame unit at a picture (or slice) level according to a method described above, reference picture index for P frame is determined by sorting the reference frames in an order reverse to a coding order and allocating index values to the sorted reference frames while sequentially visiting the sorted reference frames.

[0028] When determining reference picture index of frame unit at a picture (or slice) level according to a method

described above, reference picture index for B frame is determined based on a display order of the reference frame.

[0029] When determining reference picture index of frame unit at a picture (or slice) level according to a method described above, in case of a reference frame list 0 for B frame, indexes are allocated in a reverse order to reference frames whose display orders are lower than the B frame and the remaining indexes are allocated in a display order to reference frames whose display orders are higher than the B frame; and in case of a reference frame list 1 for, B frame, indexes are allocated in the display order to reference frames whose display orders are higher than the B frame and the remaining indexes are allocated in the reverse order to reference frames whose display orders are lower than the B frame.

[0030] When determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level, the reference picture index is determined according to the coding mode of the macroblock while coding macroblock pair with respect to the reference picture index of frame unit.

[0031] When determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level, the frame macroblocks use the reference picture indexes of frame unit.

[0032] When determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level, the reference frame stored in a reference buffer is configured with field pair having parities opposite to each other.

[0033] There is provided a method for coding an interlaced moving picture into a frame picture having frame/field macroblock in a moving picture coding system using multiple reference picture, wherein a reference picture index of the frame macroblock is determined at a macroblock level by determining the reference picture index of frame unit at a picture (or slice) level and the reference picture index of frame unit is used.

[0034] There is provided a method for coding an interfaced moving picture into a frame picture having frame/field macroblock in a moving picture coding system using multiple reference picture, wherein a reference picture index of the frame macroblock is determined at a macroblock level by determining the reference picture index of frame unit at a picture (or slice) level and respectively allocating a lower index and a higher index to a top reference field and a bottom reference field while sequentially visiting the reference frames according to an order of reference picture index of frame unit, the top and bottom field indexes being giving by an equation:

```
top reference field index = 2 × picture index of
reference frame;
```

and

```
bottom reference field index = 2 × picture index of
reference frame + 1.
```

[0035] There is provided a method for setting a reference index when an interlaced moving picture is coded into a frame picture having frame/field macroblock comprising: (a) determining reference picture index of frame unit at a picture (or slice) level; and (b) determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblook level, wherein in the step (b), regardless of top and bottom field macroblocks of a current field macroblock, a lower index is allocated to the top reference field and a higher index is allocated to the bottom reference field while sequentially visiting the reference frames in an order of the reference picture indexes, the top and bottom reference field indexes being given by an equation:

```
top reference field index = 2 × picture index of
reference frame;
```

and

```
bottom reference field index = 2 × picture index of
reference frame + 1.
```

[0036] There is provided a method for setting a reference index when an interlaced moving picture is coded into a frame picture having frame/field macroblock comprising: (a) determining reference picture index of frame unit at a picture (or slice) level; and (b) determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level, wherein in the step (b), regardless of top and bottom field macroblocks of a current field macroblock, a lower index is allocated to the bottom reference field and a. higher index is allocated to the top reference field while sequentially visiting the reference frames in an order of the reference picture indexes, the top and bottom reference field indexes being given by an equation:

```
top reference field index = 2 × picture index of
reference frame + 1;
```

and

```
bottom reference field index = 2 × picture index of
reference frame.
```

[0037] There is provided a method for coding an interlaced moving picture into a frame picture having frame/field macroblock in a moving picture coding system using multiple reference picture, wherein a reference picture index of the frame macroblock is determined at a macroblock level by determining the reference picture index of frame unit at a picture (or slice) level and respectively allocating a lower index and a higher index to a bottom reference field and a top reference field while sequentially visiting the reference frames according to an order of reference picture index of frame unit, the top and bottom reference field indexes being given by an equation:

```
top reference field index = 2 × picture index of
reference frame + 1;
```

and

```
bottom reference field index = 2 × picture index of
reference frame.
```

[0038] There is provided a method for coding an interlaced moving picture into a frame picture having frame/field macroblock in a moving picture coding system using multiple reference picture, wherein a reference picture index of the frame macroblock is determined at a macroblock level by determining the reference picture index of frame unit at a picture (or slice) level and alternately allocating indexes, which are increased by one, to reference fields, starting from a reference field having parity equal to a current field to reference field having parity different from the current field while sequentially visiting the reference frames according to an order of reference picture index of frame unit in the field macroblock.

[0039] There is provided a method for setting a reference index when an interlaced moving picture is coded into a frame picture having frame/field macroblock comprising: (a) determining reference picture index of frame unit at a picture (or slice) level; and (b) determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level, wherein in the step (b), indexes that are increased by one are alternately allocated to reference fields, starting from the reference field having a parity equal to the current field to the reference field having a parity different from the current field, while sequentially visiting the reference frames according to a reference picture index order of the picture (or slice) level.

[0040] There is provided a method for coding an interlaced moving picture into a frame picture having frame/field macroblock in a moving picture coding system using multiple reference picture, wherein a reference picture index of the frame macroblock is determined at a macroblock level by determining the reference picture index of frame unit at a picture (or slice) level allocating a lower index to a reference field close to a current field in view of time and allocating higher index to a reference field far from the current field in view of time while sequentially visiting the reference frames according to an order of reference picture index of frame unit, the indexes of the reference fields being given by an equation:

index of the reference field close to the current field = 2 × picture index of reference frame;

and

index of the reference field far from the current field = 2 × picture index of reference frame + 1.

[0041] The're is provided a method for setting a reference index when an interlaced moving picture is coded into a frame picture having frame/field macroblock comprising: (a) determining reference picture index of frame unit at a picture (or slice) level; and (b) determining reference picture index according to a coding mode of the macroblock on the basis of the reference picture index of frame unit at a macroblock level, wherein in the step (b), regardless of the top and bottom field macroblocks of a current field macroblock, a lower index is allocated to reference field close to the current field in view of time and a higher index is allocated to reference field for from the current field in view of time while sequentially visiting the reference frames in an order of the reference picture indexes, the reference field indexes being given by an equation:

reference field index close to the current field = 2 × picture index of reference frame;

and

reference field index far from the current field = 2 × picture index of reference frame + 1.

Brief Description of the Drawings

[0042] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0043] In the drawings:

FIG. 1 shows macroblock pair in frame picture having general frame/field macroblock;

FIG. 2 shows reference picture indexes of P frame coding in a moving picture coding system according to the related art;

FIG. 3 shows the reference picture index lists 0 and 1 of B frame coding in a moving picture coding system according to the related art;

FIG. 4 shows reference picture indexes in a coding Of top and bottom fields of P frame in a moving picture coding system according to the related art;

FIG. 5 shows reference picture index lists 0 and 1 in a coding of top and bottom fields of B frame in a moving picture coding system according to the related art;

FIG. 6 shows reference picture indexes reordered in a coding of P frame in a moving picture coding system according to the related art;

FIG. 7 shows reference picture indexes of P frame and B frame having frame macroblock in a moving picture coding

system according to the present invention;

FIG. 8 shows reference picture indexes of P frame and B frame having field macroblock in a moving picture coding system according to the present invention (case 1);

FIG. 9 shows reference picture indexes of P frame and B frame having field macroblock in a moving picture coding system according to the present invention (case 2);

FIG. 10 shows reference picture indexes of P frame having field macroblock in a moving picture coding system according to the present invention (case 3);

FIG. 11 shows reference picture indexes of B frame having field macroblock in a moving picture coding system according to the present invention (case 3); and

FIG. 12 shows reference picture indexes of P frame and B frame having field macroblock in a moving picture coding system according to the present invention (case 4).

Best Mode for Carrying Out the Invention

[0044] Hereinafter, preferred embodiments of the present invention will be described in detail with reference to accompanying drawings.

[0045] When an interlaced moving picture is coded into frame picture having frame/field macroblock, a moving picture coding system using multiple reference pictures must performs a motion compensation from a reference frame in order for frame coding in the frame macroblock. In other words, all reference pictures must be considered as frame unit. The moving picture coding system, however, must performs a motion compensation from a reference field in order for a field coding in the field macroblock. In other words, all reference pictures must be considered as field unit.

[0046] Accordingly, the frame pictures having frame/field macroblock must use indexes having different structures at macroblock level. For example, the frame macroblock uses a reference picture index of frame unit and the field macroblock uses a reference picture index of field unit. It should be considered that the reference picture indexes can be reordered at a picture or slice level.

[0047] Therefore, the frame picture having frame/field macroblocks should consider the reference picture in frame unit at a picture or slice level and have the reordered reference picture indexes of frame unit. It is necessary to determine reference picture index according to a coding mode of macroblock based on the reference picture indexes of the frame unit at the macroblock level.

[0048] The present invention provides a method for determining reference picture index in frame picture having frame/field macroblock. The method includes a process of determining reference picture index at a picture (or slice) level and a process of determining reference picture index at a macroblock level.

[1] Determination of Reference Picture Index at Picture (or Slice) Level

[0049] All the reference pictures are considered in frame unit at a picture or slice level and reference picture indexes of frame unit are calculated.

[0050] In the method or determining a reference picture index for P frame, reference frames are sorted in an order reverse to a coding order and indexes are allocated while visiting the sorted reference frames in sequence.

[0051] Reference picture indexes for B frame are determined based on a display order of the reference frames. First, in case of a reference frame list 0, indexes are allocated in a reverse order to reference frames whose display orders are lower than the display order of the B frame and the remaining indexes are allocated in the display order to reference frames whose display order are higher than the display order of the B frame.

[0052] In case of a reference frame list 1, in contrast to the reference frame list 0, indexes are allocated in the display order to reference frames whose display orders are higher than the B frame and the remaining indexes are allocated in a reverse order to reference frames whose display orders are lower than the B frame. When the reference picture indexes are reordered so as to enhance a coding efficiency, the reference picture indexes of frame unit are reordered.

[2] Determination of Reference Picture Index at Macroblock Level

[0053] The reference picture index is modified according to the coding mode of the macroblock while performing a coding in unit of macroblock pair with respect to the reference picture indexes of frame unit, which are obtained at the picture (or slice) level. This process will be described below.

[2.1] Case of Frame Macroblock

[0054] Since motion compensation must be performed to frame macroblocks from reference frame, the reference picture index should be frame unit. Accordingly, the reference picture indexes of frame unit, which are obtained at the picture (or slice) level, are used.

[0055] Reference frame stored in a reference buffer should be configured with field pair having parities opposite to each other. FIG. 7 shows reference picture indexes for frame macroblock in P frame and B frame when a size of the reference buffer is 5.

[2.2] Case of Field Macroblock

[0056] Since motion compensation must be performed to field macroblocks from reference field, the reference picture index should be field unit. In this case, field pair having parities opposite to each other is also present in the reference buffer. Accordingly, each reference frame is divided into two fields while sequentially visiting the reference frame according to the reference picture indexes of frame unit, which are obtained at the picture (or slice) level. Then, the reference picture indexes are newly allocated to each field. The reference picture indexes for two fields of each reference frame are allocated in various methods (Cases 1 to 4).

(Case 1)

[0057] Regardless of the top and bottom field macroblocks of a current field macroblock, a lower index is allocated to the top reference field and a higher index is allocated to the bottom reference field while sequentially visiting the reference frames in an order of the reference picture indexes, which are obtained at the picture (or slice) level.

[0058] In other words, the top and bottom reference field indexes can be given by an equation below.

$$\text{Top reference field index} = 2 \times \text{picture index of reference frame}$$

$$\text{Bottom reference field index} = 2 \times \text{picture index of reference frame} + 1$$

[0059] FIG. 8 shows reference picture indexes for field macroblocks of P frame and B frame.

(Case 2)

[0060] Regardless of the top and bottom field macroblocks of a current field macroblock, a lower index is allocated to the bottom reference field and a higher index is allocated to the top reference field while sequentially visiting the reference frames in an order of the reference picture indexes, which are obtained at the picture (or slice) level.

[0061] In other words, the top and bottom reference field indexes can be given by an equation below.

$$\text{Top reference field index} = 2 \times \text{picture index of reference frame} + 1$$

$$\text{Bottom reference field index} = 2 \times \text{picture index of reference frame}$$

[0062] Fig. 9 shows reference picture indexes for field macroblocks of P frame and B frame.

(Case 3)

[0063] Indexes that are increased by one are alternately allocated to reference fields, starting from the reference field having a parity equal to the current field to the reference field having a parity different from the current field, while sequentially visiting the reference frames according to a reference picture index order of the picture (or slice) level. FIGs. 10 and 11 show reference picture indexes.for the field macroblocks of P frame and B frame.

(Case 4)

[0064] Regardless of the top and bottom field macroblocks of a current field macroblock, a lower index is allocated to reference field close to the current field in view of time and a higher index is allocated to reference field far from the current field in view of time while sequentially visiting the reference frames in an order of the reference picture indexes of the picture (or slice) level.

[0065] In other words, the reference field indexes can be given by an equation below.

$$\text{Reference field index close to the current field} = 2 \times \text{picture index of reference frame}$$

$$\text{Reference field index far from the current field} = 2 \times \text{picture index of reference frame} + 1$$

[0066] In FIG. 12, there are shown reference picture indexes for field macroblock of P frame and B frame.

[0067] While the present invention has been described and illustrated herein with reference to the preferred embodiments thereof, it will be apparent to those skilled in the art that various modifications and variations can be made. Thus, it is intended that the present invention covers the modifications and variations of this invention that come within the scope of the appended claims and their equivalents.

Industrial Applicability

[0068] According to a coding a moving picture method of the present invention, when a moving picture coding system using multiple reference pictures codes an interlaced moving picture into a frame picture having frame/field macroblock, the moving picture coding system efficiently provides reference picture information used for motion compensation by differently determining reference picture index according to coding modes of macroblocks.

Claims

1. A method of coding a current field macroblock, comprising:

obtaining a reference frame picture list including multiple reference frame pictures;
determining a reference frame picture index of the multiple reference frame pictures in the reference frame picture list based on display order information for the multiple reference frame pictures, reference frame picture index numbers being allocated in a display order to reference frame pictures whose display order is higher than a display order of a current frame picture and remaining reference frame picture index numbers being allocated in a reverse order to reference frame pictures whose display order is lower than the display order of the current frame picture, wherein the current frame picture includes the current field macroblock;
reordering the reference frame picture index allocated to each reference frame picture in the reference frame picture list;
obtaining a reference field picture index associated with the current frame picture including the current field macroblock by alternately allocating reference field picture indexes that are increased by one to reference field pictures, starting from a first reference field picture having a parity equal to a parity of a field picture containing the current field macroblock to a second reference field picture having a parity different from the parity of the field picture containing the current field macroblock, while starting from a reference field picture index value of

"0" and a reference frame picture having a reference frame picture index value of "0" and sequentially visiting the multiple reference frame pictures according to an order of the reference frame picture index, such that the reference field picture index is related to the reference frame picture index according to following equations:

$$\text{reference field picture index} = \text{reference frame picture index} * 2$$

when using a field having a same parity as the current field macroblock; and

$$\text{reference field picture index} = \text{reference frame picture index} * 2 + 1$$

when using a field having a different parity as the current field macroblock; and
performing motion compensation using a reference field picture indicated by the reference field picture index when coding the current field macroblock.

Patentansprüche

1. Verfahren zum Codieren eines aktuellen Feld-Makroblocks, Folgendes umfassend:

Erhalten einer Referenzframebildliste mit mehreren Referenzframebildern;
Bestimmen eines Referenzframebildindex der mehreren Referenzframebilder in der Referenzframebildliste auf der Grundlage von Anzeigereihenfolgeinformationen für die mehreren Referenzframebilder, wobei Referenzframebildindexnummern in einer Anzeigereihenfolge Referenzframebildern zugeordnet werden, deren Anzeigereihenfolgenummer größer ist als die Anzeigereihenfolgenummer eines aktuellen Framebilds und wobei verbleibende Referenzframebildindexnummern in einer umgekehrter Reihenfolge Referenzframebildern zugeordnet werden, deren Anzeigereihenfolgenummer kleiner ist als die Anzeigereihenfolgenummer des aktuellen Framebilds, wobei das aktuelle Framebild den aktuellen Feld-Makroblock umfasst;
Neusortieren des Referenzframebildindex, der jedem Referenzframebild in der Referenzframebildliste zugeordnet ist;
Erhalten eines Referenzfeldbildindex, der mit dem aktuellen Framebild einschließlich des aktuellen Feld-Makroblocks verbunden ist, durch abwechselndes Zuordnen von um Eins erhöhten Referenzfeldbildindices zu Referenzfeldbildern, anfangend bei einem ersten Referenzfeldbild mit einer Parität; die einer Parität eines Feldbilds entspricht, das den aktuellen Feld-Makroblock enthält, bis hin zu einem zweiten Referenzfeldbild mit einer Parität, die sich von der Parität des Feldbilds unterscheidet, das den aktuellen Feld-Makroblock enthält, wobei bei einem Referenzfeldbildindexwert von "0" und einem Referenzframebild mit einem Referenzframebildindexwert von "0" begonnen wird und die mehreren Referenzframebilder nach einer Reihenfolge des Referenzframebildindex sequentiell durchlaufen werden, sodass der Referenzfeldbildindex nach den folgenden Gleichungen mit dem Referenzframebildindex verbunden ist:

$$\text{Referenzfeldbildindex} = \text{Referenzframebildindex} * 2$$

bei Einsatz eines Felds mit derselben Parität wie der aktuelle Feld-Makroblock; und

$$\text{Referenzfeldbildindex} = \text{Referenzframebildindex} * 2 + 1$$

bei Einsatz eines Felds mit einer anderen Parität als der des aktuellen Feld-Makroblocks; und
Durchführen von Bewegungskompensierung unter Einsatz eines Referenzfeldbilds, das durch den Referenzfeldbildindex angezeigt wird, beim Codieren des aktuellen Feld-Makroblocks.

Revendications

1. Procédé de codage d'un macrobloc de champ actuel, comprenant :

obtenir une liste d'images de référence en trames incluant de multiples images de référence en trames ;
déterminer un indice d'image de référence en trames des multiples images de référence en trames dans la liste d'images de référence en trames sur la base d'informations d'ordre d'affichage pour les multiples images de référence en trames, des numéros d'indice d'image de référence en trames étant affectés dans un ordre d'affichage à des images de référence en trames dont l'ordre d'affichage est plus élevé qu'un ordre d'affichage d'une image en trames actuelle et les numéros d'indice d'image de référence en trames restants étant affectés dans un ordre inverse aux images de référence en trames dont l'ordre d'affichage est moins élevé que l'ordre d'affichage de l'image en trames actuelle, dans lequel l'image en trames actuelle inclut le macrobloc de champ actuel ;
réordonner l'indice d'image de référence en trames affecté à chaque image de référence en trames dans la liste d'images de référence en trames ;
obtenir un indice d'image de champ de référence associé à l'image en trames actuelle incluant le macrobloc de champ actuel en affectant alternativement à des images de champ de référence des indices d'image de champ de référence qui sont augmentés de un, en débutant par une première image de champ de référence ayant une parité égale à une parité d'une image de champ contenant le macrobloc de champ actuel jusqu'à une seconde image de champ de référence ayant une parité différente de la parité de l'image de champ contenant le macrobloc de champ actuel, tout en débutant par une valeur d'indice d'image de champ de référence de "0" et par une image de référence en trames ayant une valeur d'indice d'image de référence en trames de "0" et examiner séquentiellement les multiples images de référence en trames en fonction d'un ordre de l'indice d'image de référence en trames, de telle sorte que l'indice d'image de champ de référence est lié à l'indice d'image de référence en trames d'après les équations suivantes :

$$\text{indice d'image de champ de référence} = \text{indice d'image de référence en trames} * 2$$

en utilisant un champ ayant la même parité que le macrobloc de champ actuel ; et

$$\text{indice d'image de champ de référence} = \text{indice d'image de champ de référence} * 2 + 1$$

en utilisant un champ ayant une parité différente du macrobloc de champ actuel ; et
effectuer une compensation de mouvement en utilisant une image de champ de référence indiquée par l'indice d'image de champ de référence en codant le macrobloc de champ actuel.

Fig.1

(related art)

0	2	4	6
1	3	5	7
8	10	12	14
9	11	13	15

FIG.2
(related art)

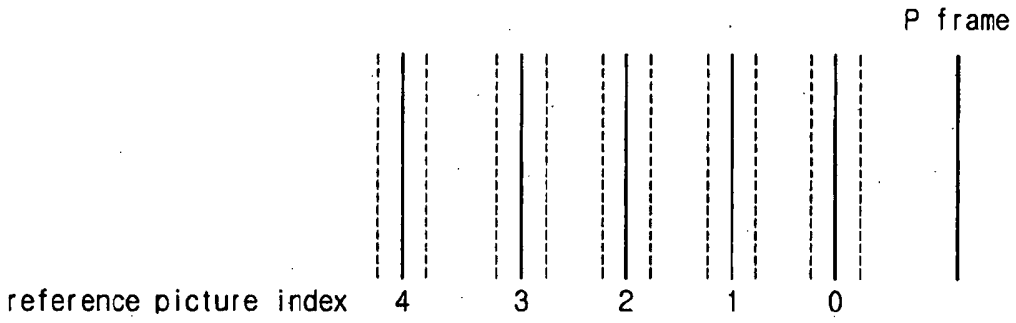


FIG. 3
(related art)

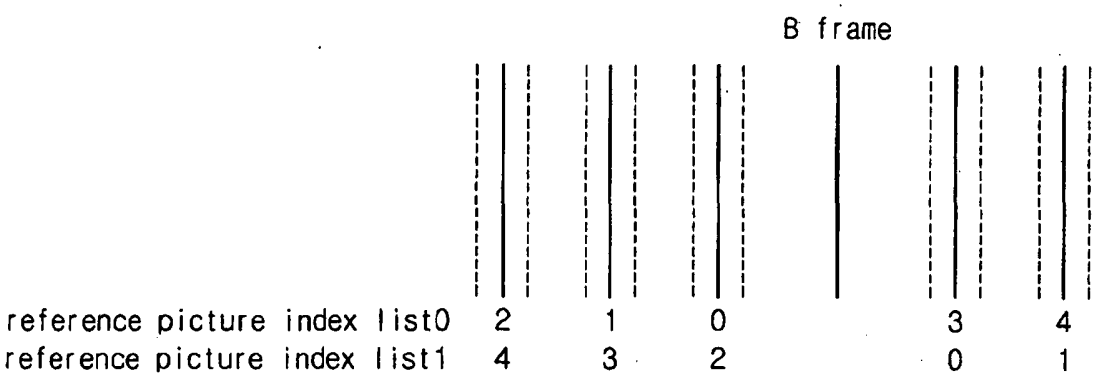


FIG. 4
(related art)

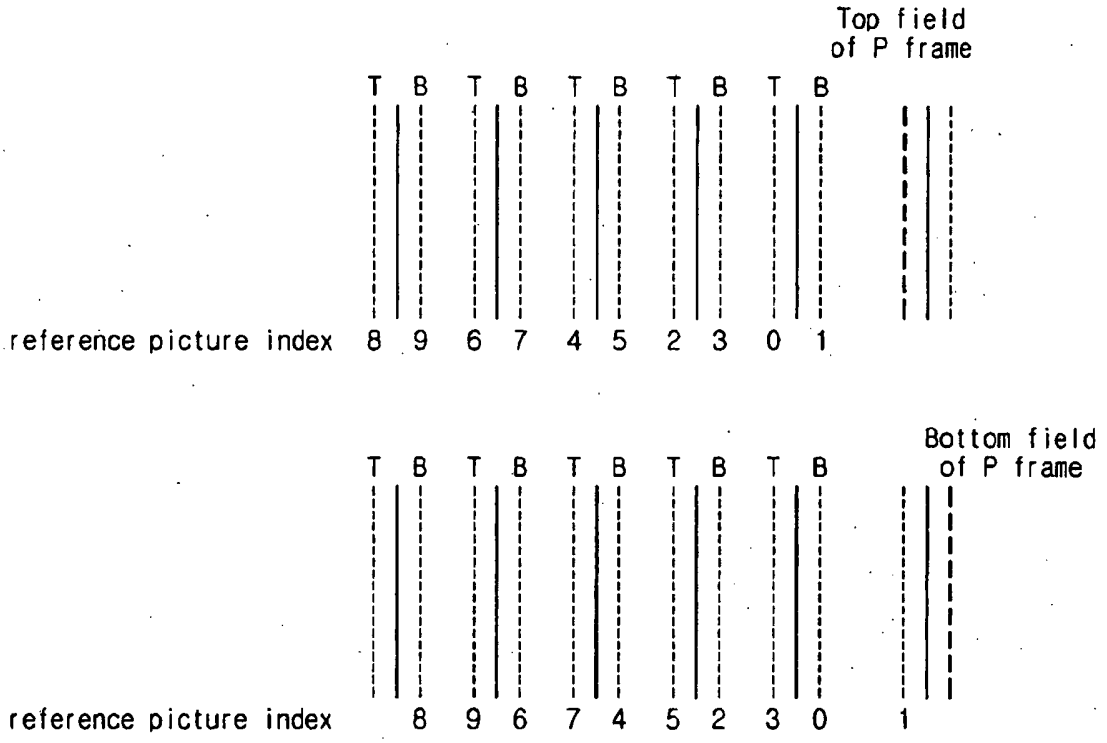


FIG. 5
(related art)

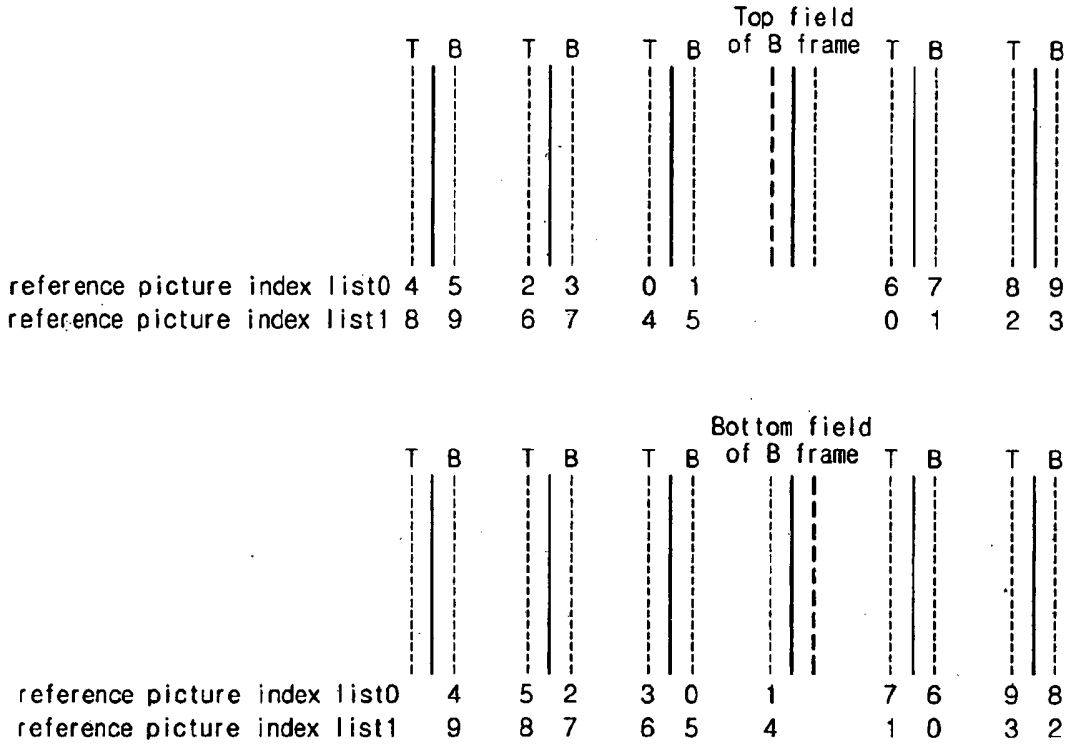


FIG. 6
(related art)

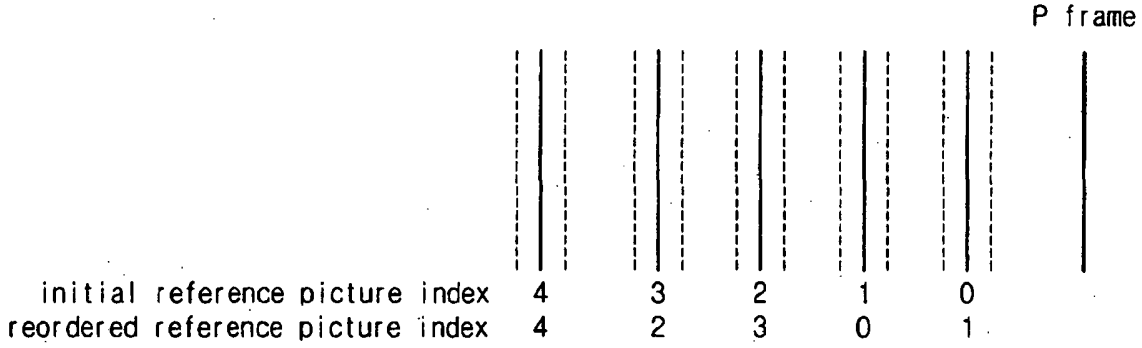


FIG. 7

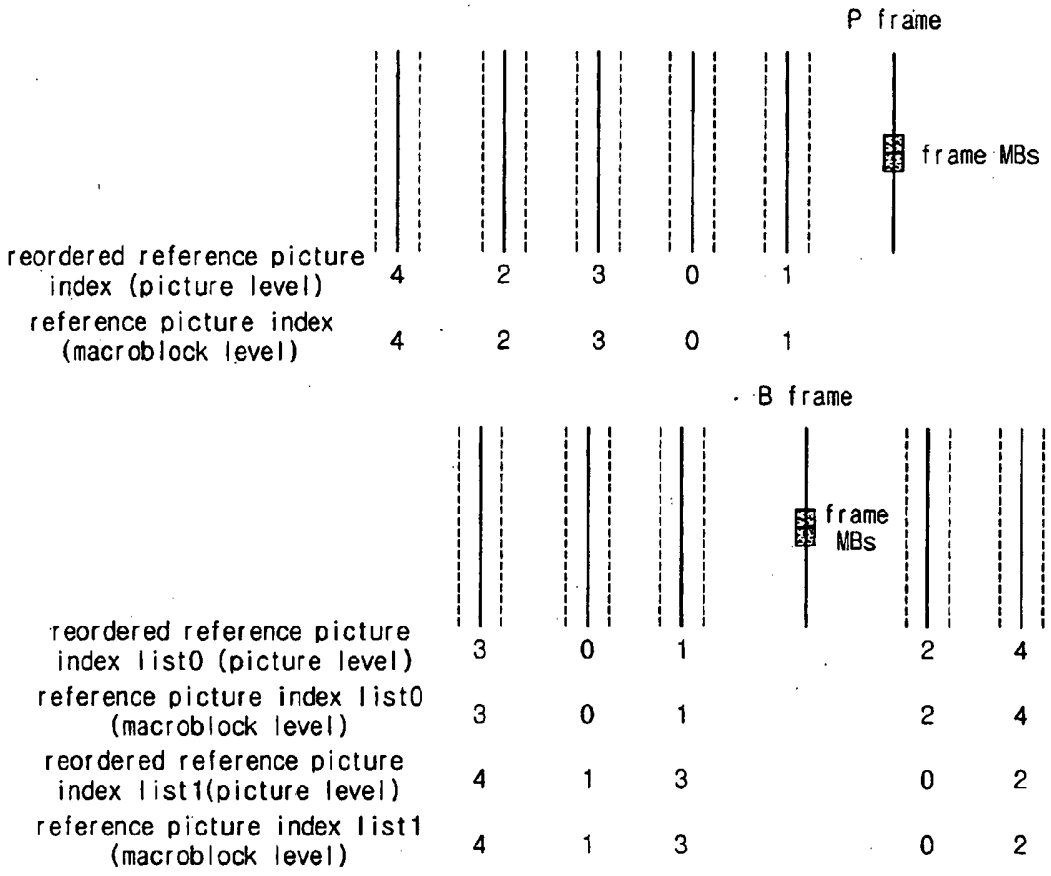

P frame
frame MBs
reordered reference picture index (picture level)
4 2 3 0 1
reference picture index (macroblock level)
4 2 3 0 1
B frame
frame MBs
reordered reference picture index list0 (picture level)
3 0 1 2 4
reference picture index list0 (macroblock level)
3 0 1 2 4
reordered reference picture index list1(picture level)
4 1 3 0 2
reference picture index list1 (macroblock level)
4 1 3 0 2

FIG. 8

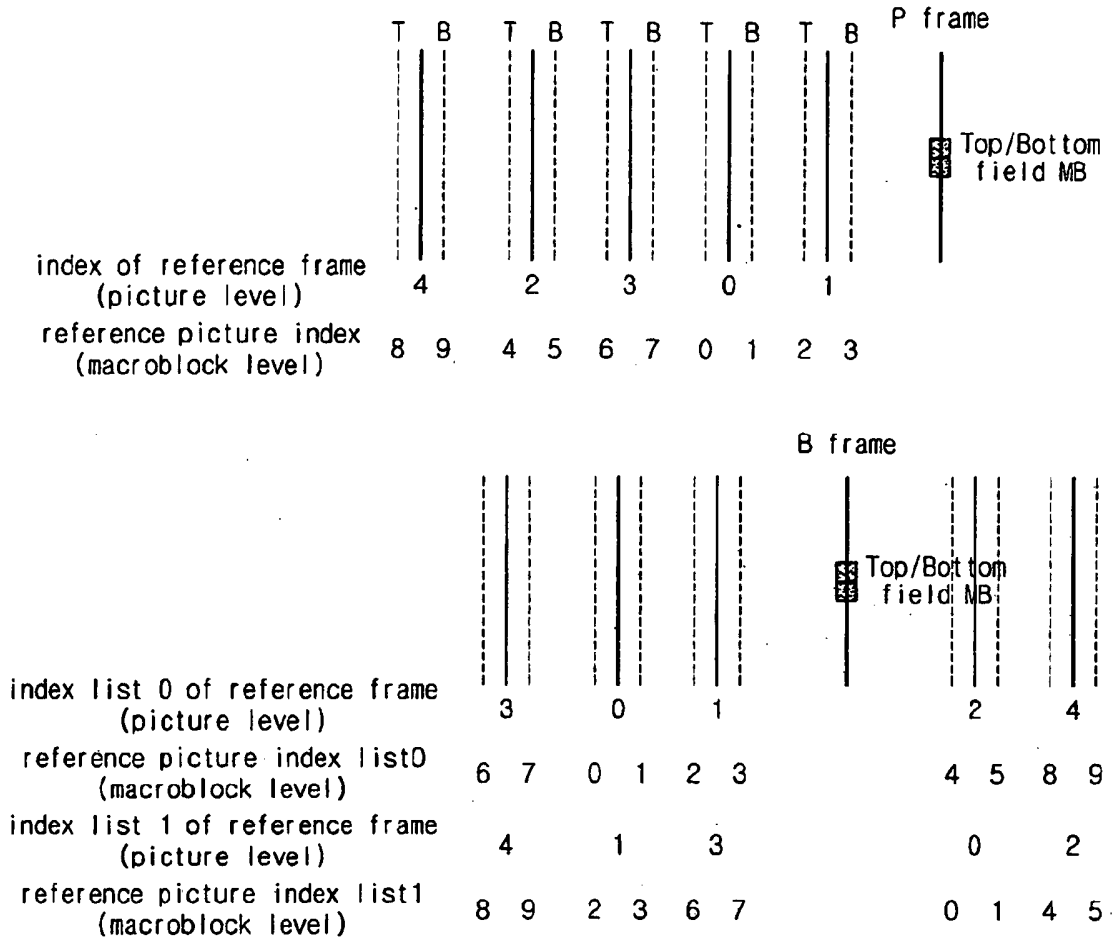

T B T B T B T B T B
P frame
Top/Bottom field MB
index of reference frame (picture level)
4 2 3 0 1
reference picture index (macroblock level)
8 9 4 5 6 7 0 1 2 3
B frame
Top/Bottom field MB
index list 0 of reference frame (picture level)
3 0 1 2 4
reference picture index list0 (macroblock level)
6 7 0 1 2 3 4 5 8 9
index list 1 of reference frame (picture level)
4 1 3 0 2
reference picture index list1 (macroblock level)
8 9 2 3 6 7 0 1 4 5

FIG. 9

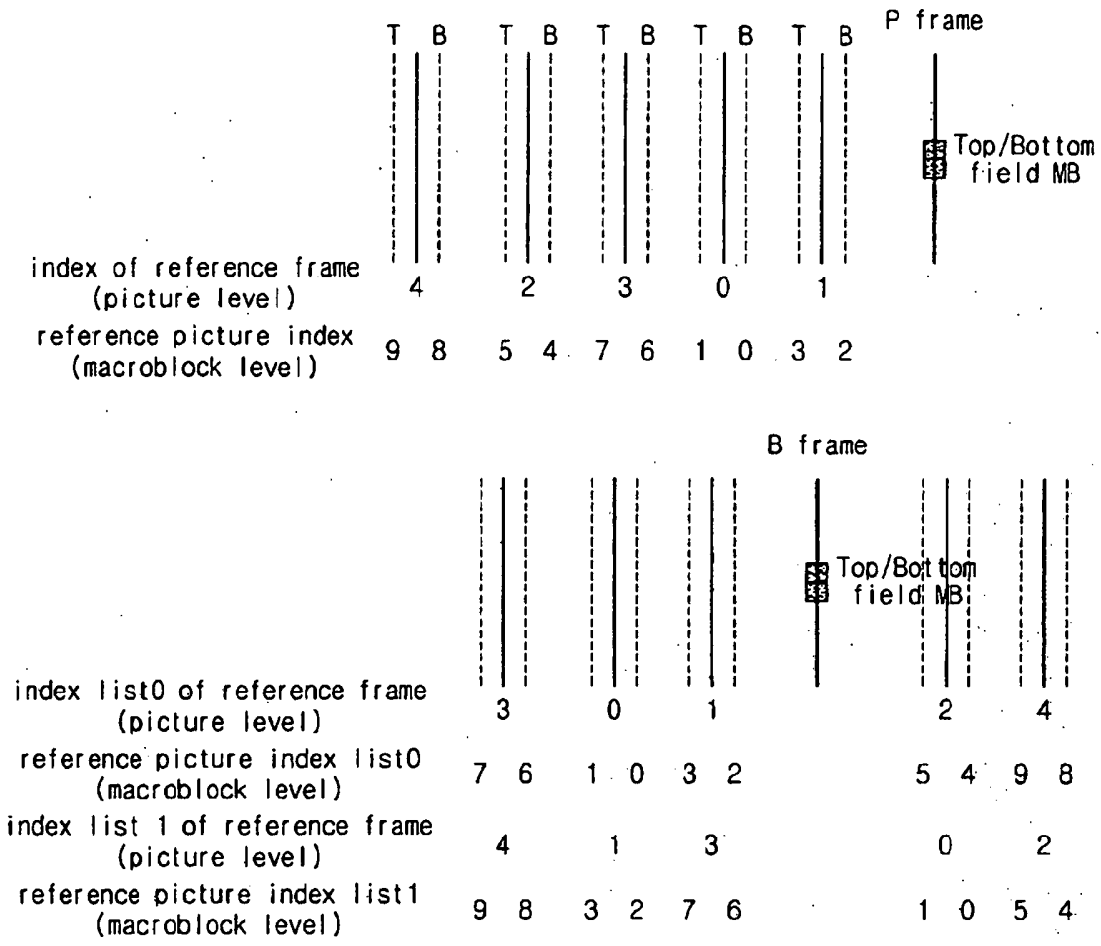

T B T B T B T B T B
P frame
Top/Bottom field MB
index of reference frame (picture level)
4 2 3 0 1
reference picture index (macroblock level)
9 8 5 4 7 6 1 0 3 2
B frame
Top/Bottom field MB
index list0 of reference frame (picture level)
3 0 1 2 4
reference picture index list0 (macroblock level)
7 6 1 0 3 2 5 4 9 8
index list 1 of reference frame (picture level)
4 1 3 0 2
reference picture index list1 (macroblock level)
9 8 3 2 7 6 1 0 5 4

FIG. 10

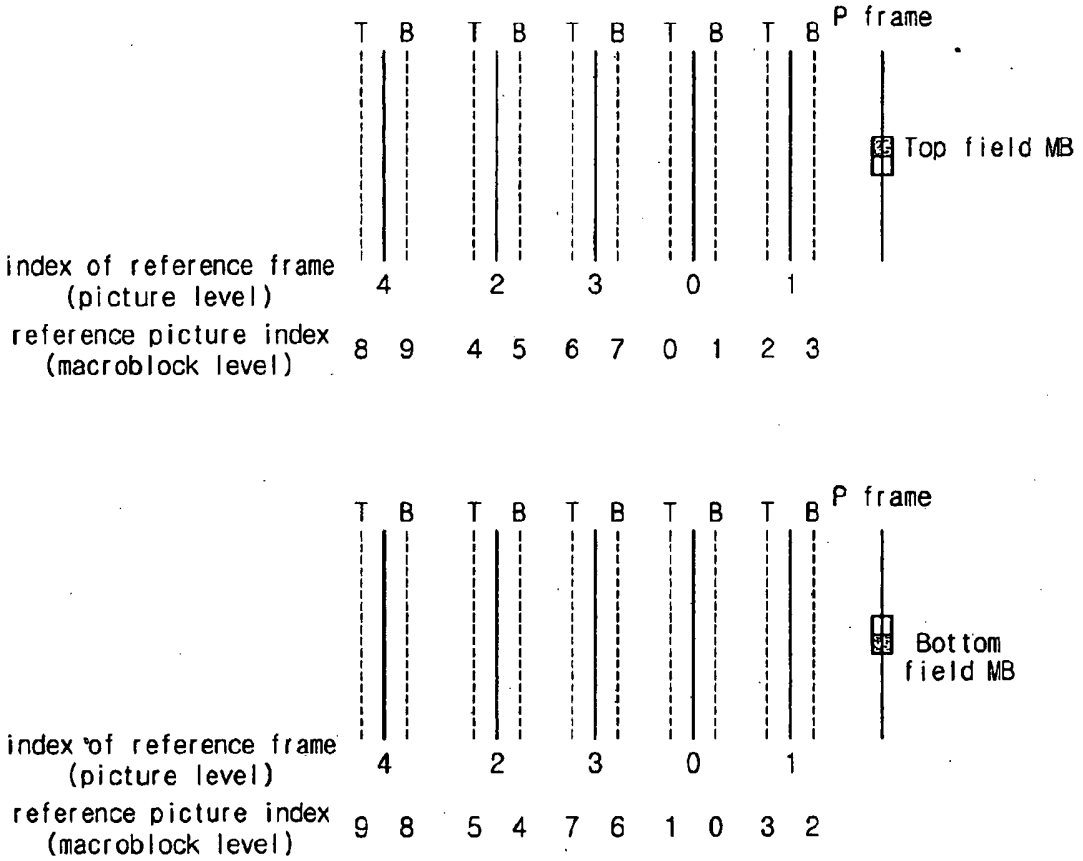

T B T B T B T B T B
P frame
Top field MB
index of reference frame (picture level)
4 2 3 0 1
reference picture index (macroblock level)
8 9 4 5 6 7 0 1 2 3
T B T B T B T B T B
P frame
Bottom field MB
index of reference frame (picture level)
4 2 3 0 1
reference picture index (macroblock level)
9 8 5 4 7 6 1 0 3 2

FIG. 11

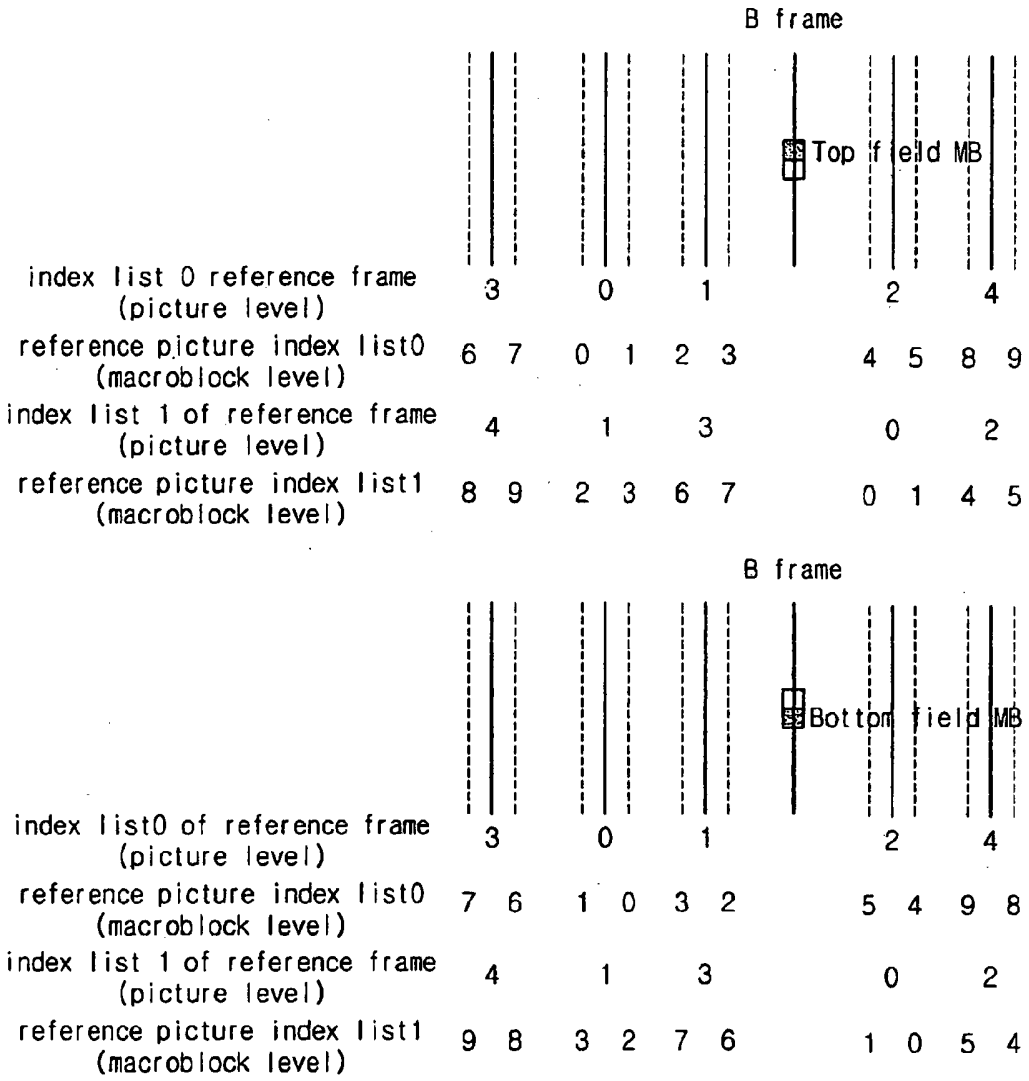
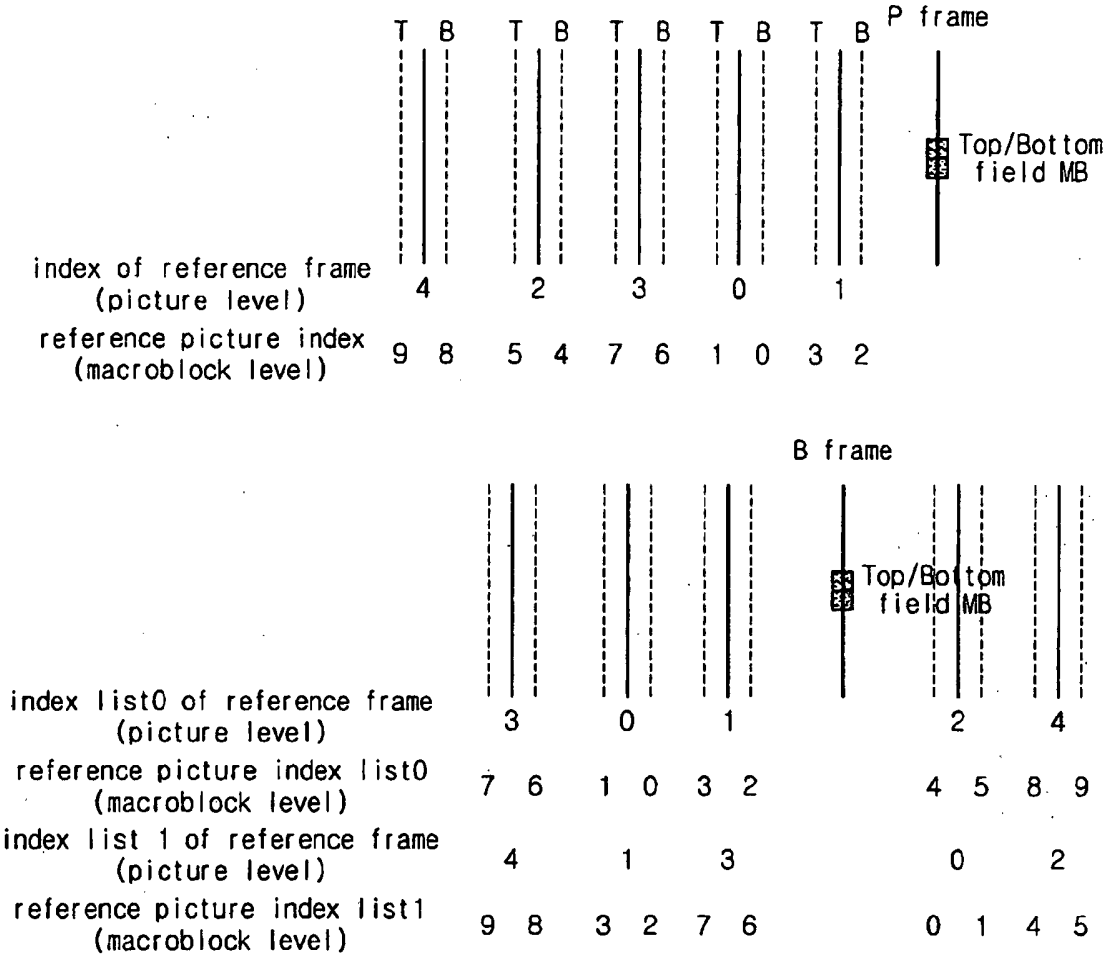

B frame
Top field MB
index list 0 reference frame (picture level)
3 0 1 2 4
reference picture index list0 (macroblock level)
6 7 0 1 2 3 4 5 8 9
index list 1 of reference frame (picture level)
4 1 3 0 2
reference picture index list1 (macroblock level)
8 9 2 3 6 7 0 1 4 5
B frame
Bottom field MB
index list0 of reference frame (picture level)
3 0 1 2 4
reference picture index list0 (macroblock level)
7 6 1 0 3 2 5 4 9 8
index list 1 of reference frame (picture level)
4 1 3 0 2
reference picture index list1 (macroblock level)
9 8 3 2 7 6 1 0 5 4

FIG. 12


T B T B T B T B T B P frame
Top/Bottom field MB
index of reference frame (picture level)
4 2 3 0 1
reference picture index (macroblock level)
9 8 5 4 7 6 1 0 3 2
B frame
Top/Bottom field MB
index list0 of reference frame (picture level)
3 0 1 2 4
reference picture index list0 (macroblock level)
7 6 1 0 3 2 4 5 8 9
index list 1 of reference frame (picture level)
4 1 3 0 2
reference picture index list1 (macroblock level)
9 8 3 2 7 6 0 1 4 5

EP 2 066 130

ELJÁRÁS REFERENCIAKÉP KIVÁLASZTÁSÁRA

Szabadalmi igénypontok

1. Eljárás aktuális félkép(field)-makroblokk kódolására, amely eljárásban:

megállapítunk egy referenciaegészkép-listát, amely több referencia-egészképet (frame picture) tartalmaz;

a több referencia-egészkép megjelenítési sorrendjére vonatkozó információk alapján a referenciaegészkép-listában meghatározzuk a több referencia-egészkép referenciaegészkép-indexét, referenciaegészkép-indexszámokat megjelenítési sorrendben rendelünk hozzá azokhoz a referencia-egészképekhez, amelyek megjelenítési sorszáma nagyobb, mint egy aktuális egészkép megjelenítési sorszáma, és a többi referencia-egészkép-indexszámot fordított sorrendben rendeljük hozzá azokhoz a referencia-egészképekhez, amelyek megjelenítési sorszáma kisebb, mint az aktuális egészkép megjelenítési sorszáma, amely aktuális egészkép tartalmazza az aktuális félkép-makroblokkot;

a referenciaegészkép-listában átrendezzük az egyes referencia-egészképekhez hozzárendelt referenciaegészkép-indexet;

az aktuális félkép-makroblokkot tartalmazó aktuális egészképhez tartozó referenciafélkép-indexet úgy állapítjuk meg, hogy referencia-félképekhez váltakozva eggyel növekvő referenciafélkép-indexeket rendelünk hozzá, egy első

referencia-félképtől kezdve, amelynek paritása egyenlő az aktuális félkép-makroblokkot tartalmazó félkép paritásával, egy második referencia-félképig, amelynek paritása különbözik az aktuális félkép-makroblokkot tartalmazó félkép paritásától, miközben „0" referenciafélkép-index értéktől és egy „0" referenciaegészkép-index értékkel rendelkező referencia-egészképtől indulunk, és a több referencia-egészképet a referenciaegészkép-index sorrendjének megfelelően vesszük sorra, úgyhogy a referenciafélkép-index a következő egyenletek szerinti kapcsolatban van a referenciaegészkép-indexszel:

referenciafélkép-index = referenciaegészkép-index * 2

ha olyan félképet használunk, amelynek ugyanaz a paritása, mint az aktuális félkép-makroblokknak; és

referenciafélkép-index = referenciaegészkép-index * 2 + 1

ha olyan félképet használunk, amelynek más a paritása, mint az aktuális félkép-makroblokknak; és

a referenciafélkép-index által jelzett referencia-félkép használatával mozgáskompenzálást végzünk, amikor kódoljuk az aktuális félkép-makroblokkot.

A meghatalmazott:

ADVOPATENT
SZABADALMI ÉS VÉDJEGY IRODA
1235 Budapest, Pf. 180.
2.