



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
13.10.2010 Bulletin 2010/41

(51) Int Cl.:
B65D 77/20 (2006.01) B65D 85/38 (2006.01)

(21) Application number: **10007152.1**

(22) Date of filing: **08.04.2005**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR

- **Hirst, Neil**
London EC1R 0QU (GB)
- **Langgner, Tanja**
London EC1R 0QU (GB)

(30) Priority: **23.09.2004 GB 0421190**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
05732812.2 / 1 799 585

(71) Applicant: **Bausch & Lomb Incorporated**
Rochester, NY 14604-2701 (US)

(74) Representative: **Carpmael, Robert Maurice Charles**
Marks & Clerk LLP
90 Long Acre
London WC2E 9RA (GB)

(72) Inventors:
• **Roche, Eoin**
Waterford (IE)

Remarks:

This application was filed on 12-07-2010 as a divisional application to the application mentioned under INID code 62.

(54) **Contact lens package and package assembly**

(57) A single package (10) for a contact lens includes a flange (13) with a well (16) formed therein for holding a contact lens (20) in solution (22) and a curved tongue portion (13a) extending in a direction away from said well (16). A flexible cover sheet (18) extends over the flange (13) and is sealed about the perimeter (16a) of the well (16) to seal the lens (20) and solution (22) in the well (16). The cover sheet (18) may be easily peeled from the flange (13) by a user to access the lens (20) held therein.

First and second support (24, 26) structures are formed opposite each other and extend generally perpendicularly from the flange (13). A package assembly (50) is also disclosed including a second package (10) configured substantially the same as a first package (10) wherein the first and second packages (10) may be releasably attached to each other with the first and second support structures (24, 26) of each in meshing engagement with each other.

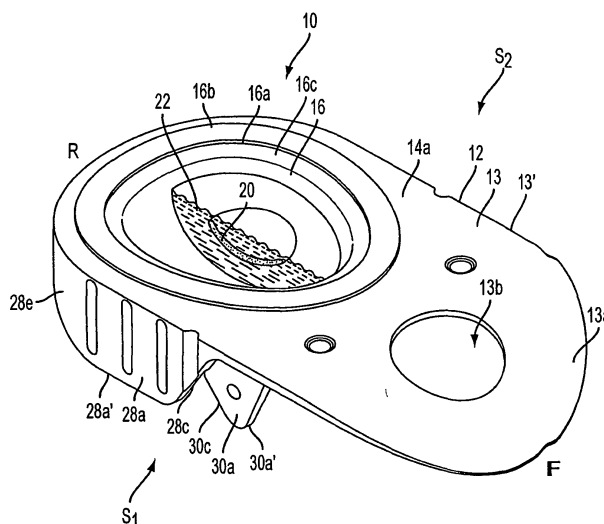


FIG. 1A

Description

Background of the Invention

[0001] The present invention relates to packaging and more particularly relates to a novel package and package assembly for contact lenses.

[0002] Soft contact lenses have been increasing in popularity ever since they were first introduced in the 1970's. Improved manufacturing methods have led to reduced manufacturing costs to the point where disposable contact lenses are an economically viable and attractive alternative for the consumer. This, coupled with very strong competition in the contact lens market, creates the need for innovative, inexpensive, and easy to use disposable packages in which soft contact lenses may be individually packaged, safely shipped and stored until ready to use by the consumer, at which time the contact lens is removed from the package which is then discarded.

[0003] Contact lenses are very small, delicate articles which must be handled with great care from the time they are manufactured to the time they are used and ultimately discarded. Once manufactured, they are inspected and packaged for shipping to the consumer, usually in the hydrated state. A popular contact lens package which is especially designed for packaging single contact lenses is the so-called "blister pack" which generally comprises a molded, rigid, plastic container having a planar top surface with a concave-shaped well formed therein and wherein a single contact lens is placed with a quantity of storage fluid. A flexible cover is sealed about the perimeter of the top surface of the container whereupon the blister packs are boxed and shipped to the consumer who peels back the flexible cover to retrieve the lens. An example of a disposable contact lens blister package may be seen in commonly owned U.S. Pat. No. 5,722,536.

[0004] Contact lenses which are frequently replaced by the consumer (e.g., daily, weekly) have become very popular since they do not need to be cleaned and sterilized as often as contact lenses used in a traditional wearing regime. Consumers of frequent replacement lenses of course need to maintain a larger supply of lenses on hand than do consumers of contact lenses using a traditional wearing regime. It is thus desirable to maintain as small a package as possible while making it easy for the consumer to open the package and retrieve the lens, while also having a package wherein a plurality of such packages may be easily and unobtrusively carried by the consumer (e.g., in a pocket, purse or suitcase). Efficient shipping and subsequent handling of a plurality of disposable contact lens packages by the consumer are thus very important packaging design criteria, especially for frequent replacement lenses.

Summary of the Invention

[0005] A disposable package and package assembly are disclosed for contact lenses. A single package comprises a flange with a well formed therein for holding a contact lens in solution. A flexible cover sheet extends over the flange and is sealed about the perimeter of the well to seal the lens and solution in the well. The cover sheet may be easily peeled from the flange by a user to access the lens held therein. First and second support structures are formed opposite each other and extend generally perpendicularly from the flange. The support structures are configured to stably support the package on a flat surface such as a table.

[0006] Each support structure includes a major wall and a minor wall lying in generally spaced, parallel planes to each other although the major and minor walls may interconnect or touch along one or more points thereof. In a preferred embodiment, the minor wall is located inwardly of a respective major wall.

[0007] A package assembly is also disclosed including a second package configured substantially the same as a first package wherein the first and second packages may be releasably attached to each other with the first and second support structures of each in meshing engagement with each other.

Brief Description of the Drawing

[0008]

Figure 1A is a perspective view of a package according to a preferred embodiment of the invention;
 Figure 1B is the view of Fig. 1A showing the cover sheet attached thereto;
 Figure 1C is the view of Fig. 1B showing the cover sheet partially lifted from the package;
 Figure 1D is a fragmented, cross-sectional view of the package well and raised surface surrounding the well;
 Figure 2 is a front elevational view of Fig. 1A;
 Figure 3 is a rear elevational view thereof;
 Figure 4 is a side elevational view of Fig. 1B;
 Figure 5 is a side elevational view opposite Figure 4;
 Figure 6 is a top plan view of Fig. 1A;
 Figure 7 is a bottom plan view thereof;
 Figure 8 is a perspective view showing a package assembly comprising first and second packages removably attached together;
 Figure 9 is a front elevational view thereof;
 Figure 10 is a rear elevational view thereof;
 Figure 11 is a side elevational view thereof;
 Figure 12 is a side elevational view thereof opposite the view of Figure 11;
 Figure 13 is a top plan view thereof;
 Figure 14 is a bottom plan view thereof; and
 Figure 15 is a side elevational, cross-sectional view taken generally along the line 15-15 in Fig. 14.

Detailed Description

[0009] Referring to the drawing, there is seen in Figures 1-7 a first contact lens package designated generally by the reference numeral 10. Package 10 includes a base member 12 preferably formed of a plastic material such as polypropylene, for example, although other materials may be used as desired. Base member 12 is preferably formed by an injection molding process as a unitary piece. For the purpose of providing points of reference herein, the reference letter "F" denotes what is considered the front of the package 10, "R" denotes what is considered the rear of the package, and S_1 and S_2 denote what is considered the opposite sides of the package (Fig. 1). Base member 12 includes a flange 13 having a top surface 14a and opposite bottom surface 14b (Fig. 7). Flange 13 extends from the perimeter 16a of a well 16, the well being appropriately shaped and sized to hold a contact lens 20 and a quantity of solution 22 therein in sealed containment by a cover sheet 18 (Figs. 1B, 1C, 4 and 5) until ready for use. A raised surface 16b is formed about well perimeter 16a against which cover sheet 18 is sealed (usually with the application of pressure and/or heat) with the remaining cover sheet portions remaining unsealed. As seen best in Figs. 1A and 1D, a ledge 16c is formed between raised surface 16b and well perimeter 16a. Should raised surface 16b compress during the sealing operation, it may spread as indicated at 16b'. By providing ledge 16c, lens 20 may be slid out of well 16 without encountering spread portion 16b' and potential damage to the lens is thereby averted.

[0010] In the preferred embodiment shown and described herein, flange 13 has an outer perimeter 13' preferably having substantially straight, parallel, opposite sides S_1 and S_2 , and curved front and rear portions F and R having opposite ends F' and R' defined along the maximum length L_{MAX} of base member 12 (Figs. 3 and 6). When placed on a flat surface such as surface 40 (Figs. 4 and 5), it is preferred that front end F' contacts the flat surface 40 while rear end R' is raised relative thereto (see Fig. 3).

[0011] In one aspect of the invention, well 16 is dimensioned to substantially center lens 20 therein while at the same time provide a configuration which intuitively informs a user how to slide the lens 20 from well 16. More particularly, well 16 is substantially symmetrical about the x and y axes and the radius of curvature R_1 along the x axis is larger than the radius of curvature R_2 of the y axis. Well 16 including well perimeter 16a tapers inwardly about axis x from the center of the well 16 (where x and y intersect) toward front portion F to create a narrowing slope. A user seeing this narrowing slope will intuitively slide lens 20 along the slope and out of the well 16.

[0012] In a preferred aspect of the invention, well 16 is dimensioned to substantially center lens 20 therein while at the same time provide a configuration which intuitively informs a user how to slide the lens 20 from well

16. More particularly, well 16 is substantially symmetrical about the x axis and the perimeter 16a tapers inwardly about axis x from the center of the well 16 (where x and y intersect) towards front portion F to create a narrowing slope and an overall egg-shaped appearance to well 16. A user seeing this narrowing slope will intuitively slide lens 20 along the slope and out of the well 16. The egg-shaped bottom of the well is slightly flattened and the radius of curvature of the sidewall is substantially the same completely around the perimeter.

[0013] In another aspect of the invention, base member 12 includes first and second support structures 24, 26 extending from the flange 13 and located opposite each other (Fig. 2). Each support structure 24, 26 includes a major wall 28a,b and a minor wall 30a,b, respectively. Major wall 28a,b lies in a generally spaced, parallel plane to a respective minor wall 30a,b, although they may overlap, touch or interconnect at one or more points such as at 32a, b thereof (see Fig. 7). In a preferred embodiment, each minor wall 30a, b tapers inwardly and terminates at a rounded point 30a', b'. In a further preferred embodiment, each major wall 28a, b includes in a linear edge 28a', b' which supports base member 12 when placed on a flat surface 40 such as a table (see Figs. 4 and 5). In yet a further preferred embodiment, major wall 28a, b includes a sloped side edge 28c, d, respectively, which forms an angle "a" with the adjacent side edge 30c, 30d of minor wall 30a, b, respectively, when viewed from the side. In a further embodiment, linear edge 28a', b' blends into a curved wall portion 28e, f, respectively, the bottom edge of which extends upward toward flange 13 and terminates at rear end R'.

[0014] Referring to Fig. 7, one or more ribs 35a-d may be formed on the inwardly facing surface of major walls 28a and 28b to increase the rigidity and strength thereof.

[0015] In a further preferred embodiment, flange 13 curves slightly downwardly at the front portion F of the package 10 to form a "tongue" portion 13a. It is preferred that well 16 has a length L_1 that is about the same as the length L_2 of tongue portion 13a as viewed from above (Fig. 6), although this may vary as desired. The curvature of tongue portion 13a allows a user to grasp it between an index finger and thumb, the index finger pressing against the underside of tongue portion 13a and the thumb resting on the top surface of the tongue portion 13a. The tongue portion 13a curves gently about the roundness of the finger and the finger may further abut up against the minor wall portions 30a, 30b to provide a secure yet comfortable hold on the package using either the right or left hand. Cover sheet 18 extends in covering relation over substantially the entirety of flange 13, including tongue portion 13a (Figs. 1B, 4 and 5). To remove lens 20 from well 16, a user first lifts cover 18 at front portion F (Fig. 1C) and then peels cover sheet 18 from raised surface 16b. This may be easily accomplished by using one hand to grasp and pull cover sheet 18 while simultaneously stabilizing base member 12 with the other hand as described above.

[0016] In another aspect of the invention, tongue portion 13a may include a through hole 13b wherein the unsealed portions of cover sheet 18 extending thereover may be pressed to form a recessed dimple 18a within through hole 13b (see Figs. 4 and 5). This creates an interference fit between the unsealed portions of cover sheet 18 and flange tongue 13a which helps maintain the unsealed portions of cover sheet 18 in place over tongue portion 13a during storage of lens 20 in well 16. When a user wishes to open package 10, the user presses a finger from beneath and up against recessed dimple 18a to disengage dimple 18a from through hole 13b. Cover sheet 18 may then be easily lifted away from flange 13 and peeled off raised surface 16b to expose well 16 and lens 20 contained therein.

[0017] The package 10 has been designed to create a center of gravity closer to rear portion R than to front portion F. This is particularly useful during manufacturing operations where temporary vertical stacking of packages 10 is required (all in the same orientation). When stacked in this manner (not shown), the support structures of the upper package rests on the flange 13 of the lower package yet the tongue portions remain spaced from each other. If the center of gravity were closer to front portion F, the upper package may tip and create an unstable stack of packages. By making the center of gravity closer to the rear portion R, the front of the packages do not tip and the stack is stable.

[0018] In yet another aspect of the invention, a package assembly 50 is disclosed comprising first and second packages 10, 100 which may be releasably attached to one another in nesting relationship (see Figs. 8-15). Parts of package 100 which correspond to parts on first package 10 have been increase by a factor of 100. Since second package 100 is essentially identical to first package 10, detailed description of the parts of second package 100 is not deemed necessary.

[0019] To releasably attach first and second packages 10, 100 together, the bottom surfaces thereof 14b, 114b are placed in facing relation with the wells 16, 116 of each placed in side-by-side relation. In this orientation, first package 10 is rotated 180° relative to second package 110. The support structures 24, 26 and 124, 126 of each package are placed in meshing engagement with the angled edge 28c, 28d of each major wall 28a, 28b of the first package 10 lying in abutting relation to the angled edges 128c, 128d of each major wall 128a, 128b of the second package 110, respectively. The minor walls 30a, 30b of first package 10 are in coplanar, yet spaced relation and located inwardly of major walls 28a, 28b, 128a, 128b, respectively (i.e., toward a respective well 16, 116). The minor walls 28a, 28b and 128a, 128b are hidden from view when the packages 10, 100 are attached together (see Figs. 8, 11 and 12). The frictional contact between the meshing support structures of packages 10, 110 are such that the packages may be handled as a single unit, yet are easily separated at time of use.

[0020] In the preferred embodiment, when in this nest-

ed configuration of packages 10 and 110, the perimeter (as defined by the major walls, major wall curved portions and front and rear ends of each attached package) of the package assembly 50 is completely closed as seen best in Figs. 8-12. To form a completely closed perimeter, the lower-most edges of the entire perimeter of first package 10 are configured so that they align in closely abutting relation with the lower-most edges of the entire perimeter of second package 110. This is accomplished by making the curvature of the front F of a package the reverse profile of the curvature of the rear R of the same package. As such, by rotating one package 180° with respect a second, inverted package, the front F of one package 10 matches the profile of the rear R of the attached package 100 and vice-versa. The combined packages form a package assembly 50 which is easy to handle and attractive, and easy to use.

STATEMENTS OF INVENTION

[0021]

1. A package for a contact lens comprising:

- a) a base having a flange;
- b) a well formed in said base, said flange extending from the perimeter of said well, said well configured for holding a contact lens and quantity of solution therein;
- c) first and second support structures extending substantially opposite each other from said flange, said first and second support structures each including a major wall and a minor wall, said major and minor walls lying in spaced, parallel planes.

2. The package of clause 1 wherein said minor wall is located inwardly of a respective major wall.

3. The package of clause 2 wherein said package is a first package and further comprising a second package in substantially the same configuration as said first package whereby said second package may be releasably attached to said first package with said first and second support structures of said first package in meshing engagement with said first and second support structures of said second package, respectively.

4. The package of clause 3 wherein when said first and second packages are in meshing engagement, said major walls of each package lie in coplanar, abutting relation.

5. The package of clause 2 and further comprising a cover sheet sealed about the perimeter of said well and lying in contacting, covering relation to said flange.

6. The package of clause 1 wherein said flange includes a curved tongue portion extending in a direction away from said well.

7. The package of clause 6 wherein said tongue portion includes a through hole.

8. The package of clause 7 and further comprising a cover sheet sealed about the perimeter of said well, said cover sheet extending over said flange including said tongue portion and said hole. 5

9. The package of clause 8 wherein said cover sheet extends at least partially within said hole.

10. The package of clause 1 wherein said minor wall and a respective major wall at least partially overlap. 10

11. The package of clause 10 wherein said minor wall is substantially triangularly shaped.

12. A package for a contact lens comprising:

- a) a base; 15
- b) a curved well having a perimeter formed in said base, said well being symmetrical about perpendicular x and y axes, the radius of curvature along the x axis being larger than the radius of curvature along the y axis, said well perimeter tapering inwardly about said x axis from a point where the x and y axes intersect to provide a narrowing slope along which a user may slide and retrieve the lens from the well. 20

13. A package for a contact lens comprising: 25

- a) a base;
- b) a curved well having a perimeter formed in said base, said well being symmetrical about one axis, the well perimeter tapering inwardly about said axis to form an egg-shaped perimeter to provide a narrowing slope along which a user may slide and retrieve the lens from the well, the well having a bottom and a sidewall extending from the bottom to the perimeter which has substantially the same radius of curvature completely around the perimeter. 30

14. The package of clause 12 or clause 13, and further comprising a flange extending outwardly from said well and first and second support structures extending substantially opposite each other from said flange, said first and second support structures each including a major wall and a minor wall, said major and minor walls lying in spaced, parallel planes. 35

15. The package of clause 14 wherein said minor wall is located inwardly of a respective major wall.

16. The package of clause 14 wherein said package is a first package and further comprising a second package in substantially the same configuration as said first package whereby said second package may be releasably attached to said first package with said first and second support structures of said first package in meshing engagement with said first and second support structures of said second package, respectively. - 40

17. The package of clause 16 wherein when said 45

first and second packages are in meshing engagement, said major walls of each package lie in coplanar, abutting relation.

18. The package of clause 14 and further comprising a cover sheet sealed about the perimeter of said well and lying in contacting, covering relation to said flange.

19. The package of clause 14 wherein said flange includes a curved tongue portion extending in a direction away from said well.

20. The package of clause 19 wherein said tongue portion includes a through hole.

21. The package of clause 20 and further comprising a cover sheet sealed about the perimeter of said well, said cover sheet extending over said flange including said tongue portion and said hole.

22. The package of clause 21 wherein said cover sheet extends at least partially within said hole.

23. The package of clause 14 wherein said minor wall and a respective major wall at least partially overlap.

24. The package of clause 14 wherein said minor wall is substantially triangularly shaped.

25. A package for a contact lens comprising:

- a) a base having a flange;
- b) a well formed in said base, said flange extending from the perimeter of said well, said well configured for holding a contact lens and quantity of solution therein;
- c) a raised surface surrounding said well;
- d) a cover sheet placed in covering relation over said well and said flange and secured to said raised surface with pressure and/or heat, said raised surface forming a spread portion; and
- e) a ledge formed between said raised surface and said well to accommodate said spread portion thereby preventing the lens from striking the spread portion upon removal of said lens from said well. 45

26. A package for a contact lens comprising:

- a) a base having a flange;
- b) a well formed in said base, said flange extending from the perimeter of said well, said well configured for holding a contact lens and quantity of solution therein; said flange including a curved tongue portion extending in a direction away from said well;
- c) a through hole formed in said tongue portion; and
- d) a cover sheet sealed about the perimeter of said well, said cover sheet having unsealed portions extending over said flange including said tongue portion and said hole, said cover sheet unsealed portions extending at least partially within said hole to create an interference fit be-

tween said cover sheet unsealed portions and said flange.

Claims

1. A package (10) for a contact lens (20) comprising:

- a) a base (12) having a flange (13);
- b) a well (16) formed in said base (12), said flange (13) extending from the perimeter (16a) of said well (16), said well (16) configured for holding a contact lens (20) and quantity of solution (22) therein; and
- c) a cover sheet (18) sealed about the perimeter (16a) of said well (16); **characterised in that:**
- d) said flange includes a curved tongue portion extending in a direction away from said well.

2. A package (10) according to claim 1, wherein said cover sheet (18) is lying in contacting, covering relation to said flange (13).

3. A package (10) according to any one of the preceding claims, wherein said tongue portion (13a) includes a through hole (13b).

4. A package (10) according to claim 3, said cover sheet (18) extending over said flange (13) including said tongue portion (13a) and said hole (13b).

5. A package (10) according to claim 4 wherein said cover sheet (18) extends at least partially within said hole (13b).

6. A package (10) according to claim 3, wherein said cover sheet (18) has unsealed portions extending over said flange (13), including said tongue portion (13a) and said hole (13b), said cover sheet unsealed portions extending at least partially within said hole (13b) to create an interference fit between said cover sheet unsealed portions and said flange (13).

7. A package (10) according to any one of the preceding claims, further comprising a raised surface (16b) surrounding said well (16) and a ledge (16c) formed between said raised surface (16b) and said well (16), the cover sheet (18) being placed in covering relation over said well (16) and said flange (13) and secured to said raised surface (16b) with pressure and/or heat, said raised surface (16b) forming a spread portion (16b'), and the ledge (16c) accommodating said spread portion (16b') thereby preventing the lens (20) from striking the spread portion (16b') upon removal of said lens (20) from said well (16).

8. A package (10) according to any one of the preceding claims, wherein the well (16) is a curved well having

a perimeter (16a) formed in said base (12), said well (16) being symmetrical about perpendicular x and y axes, the radius of curvature (R_1) along the x axis being larger than the radius of curvature (R_2) along the y axis, said well perimeter (16a) tapering inwardly about said x axis from a point where the x and y axes intersect to provide a narrowing slope along which a user may slide and retrieve the lens (20) from the well (16).

9. A package (10) according to any one of claims 1 to 7, wherein the well (16) is a curved well having a perimeter (16a) formed in said base (12), said well (16) being symmetrical about one axis, the well perimeter (16a) tapering inwardly about said axis to form an egg-shaped perimeter (16a) to provide a narrowing slope along which a user may slide and retrieve the lens (20) from the well (16), the well (16) having a bottom and a sidewall extending from the bottom to the perimeter (16a) which has substantially the same radius of curvature completely around the perimeter (16a).

10. A package (10) according to any one of the preceding claims, wherein first and second support structures (24, 26) extend substantially opposite each other from said flange (13), said first and second support structures (24, 26) each including a major wall (28a, 28b) and a minor wall (30a, 30b), said major and minor walls lying in spaced, parallel planes.

11. A package (10) according to claim 10, wherein said minor wall (30a, 30b) is located inwardly of a respective major wall (28a, 28b).

12. A package (10) according to claim 10 or claim 11, wherein said package (10) is a first package (10) and further comprising a second package (100) in substantially the same configuration as said first package (10) whereby said second package (100) may be releasably attached to said first package (10) with said first and second support structures (24, 26) of said first package (10) in meshing engagement with said first and second support structures (124, 126) of said second package (100), respectively.

13. A package (10) according to claim 12, wherein when said first and second packages (10, 100) are in meshing engagement, said major walls (28a, 28b, 128a, 128b) of each package (10, 100) lie in coplanar, abutting relation.

14. A package (10) according to any one of claims 10 to 13, wherein said minor wall (30a, 30b) and a respective major wall (28a, 28b) at least partially overlap.

15. A package (10) according to any one of claims 10 to 14, wherein said minor wall (30a, 30b) is substan-

tially triangularly shaped.

5

10

15

20

25

30

35

40

45

50

55

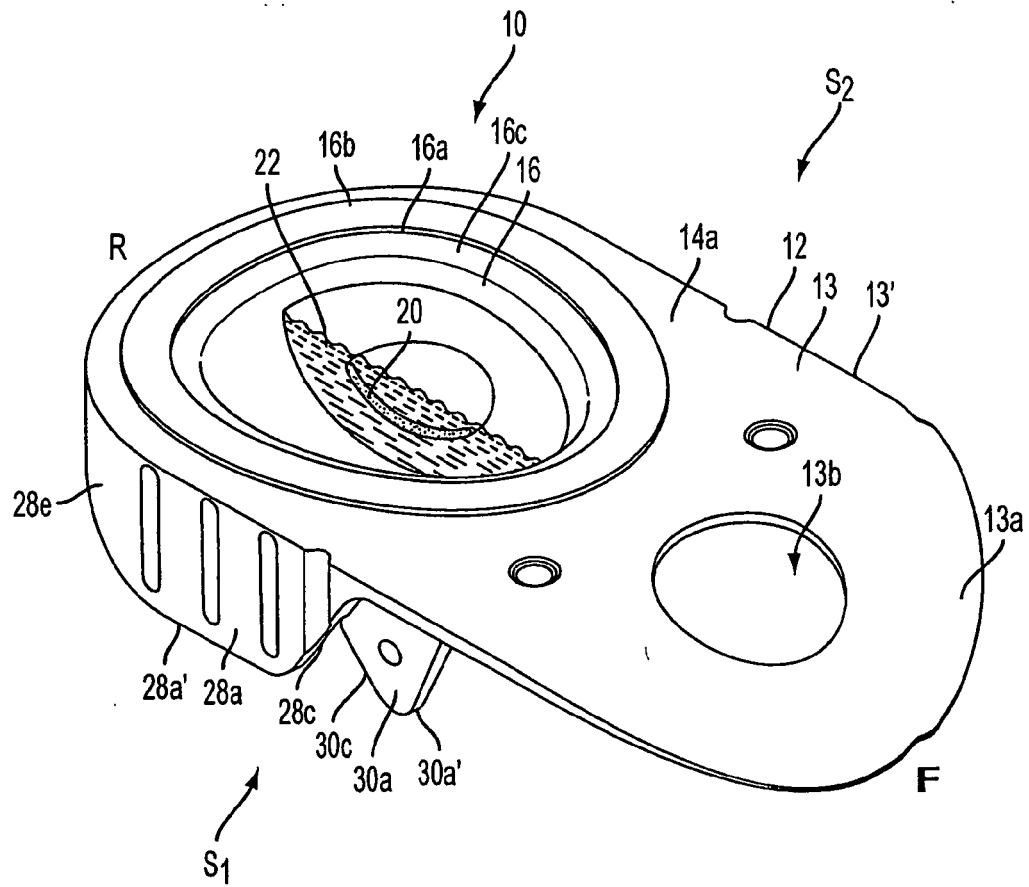


FIG. 1A

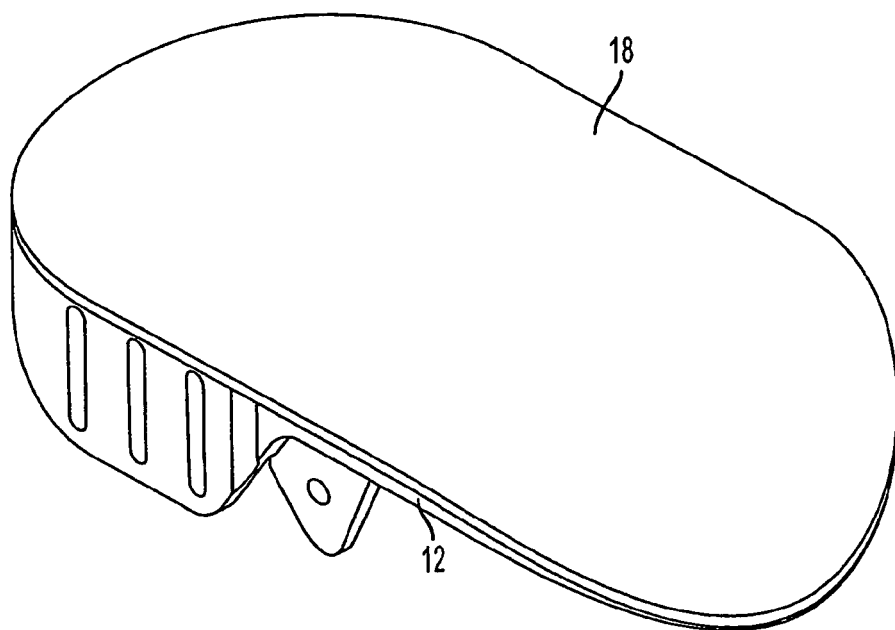


FIG. 1B

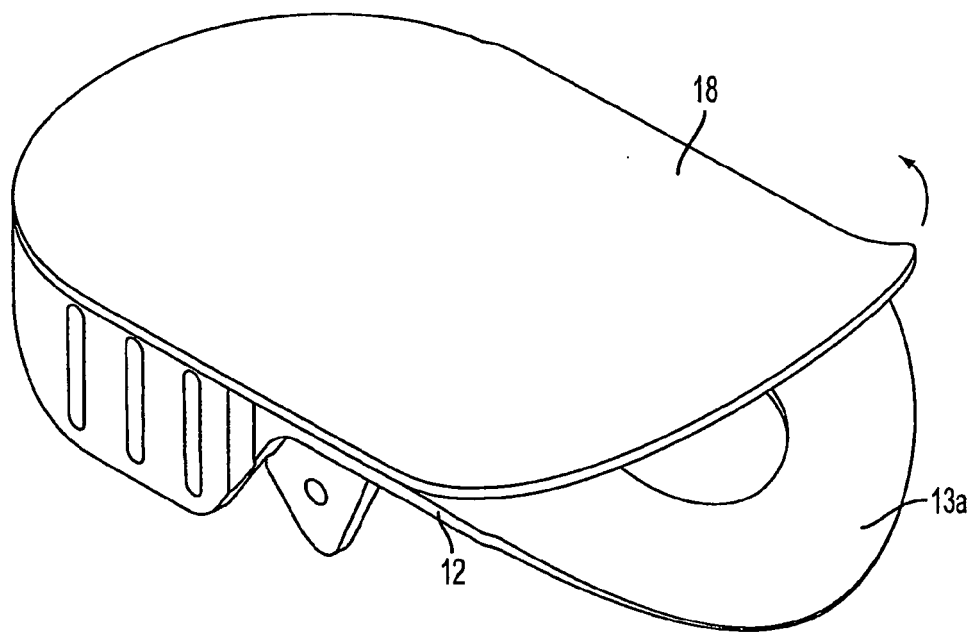


FIG. 1C

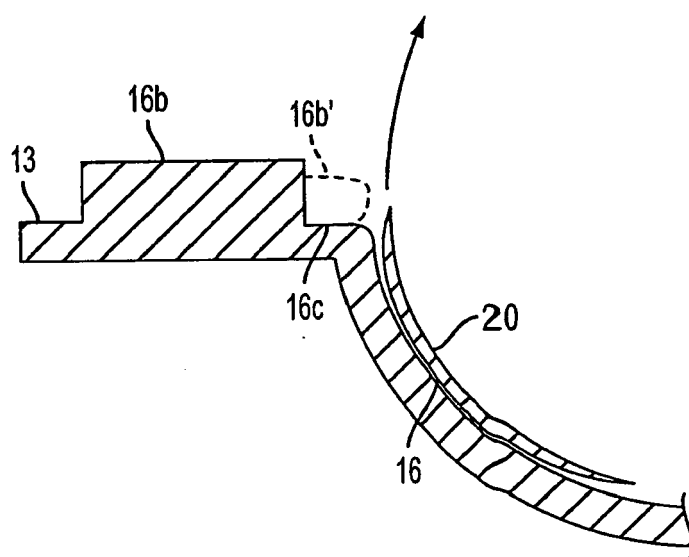


FIG. 1D

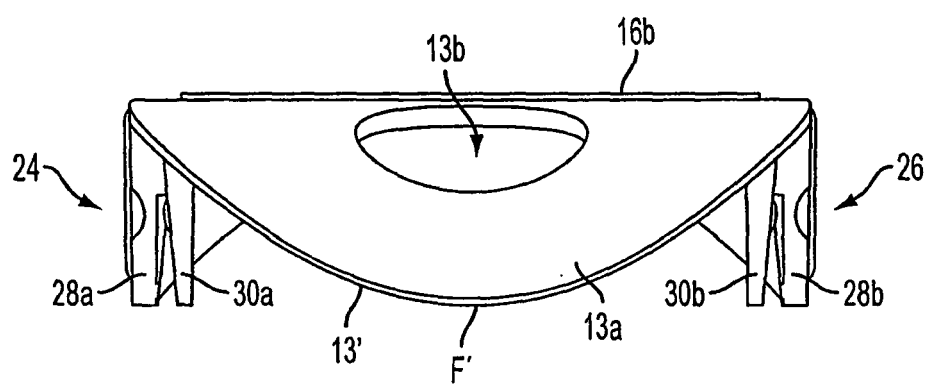


FIG. 2

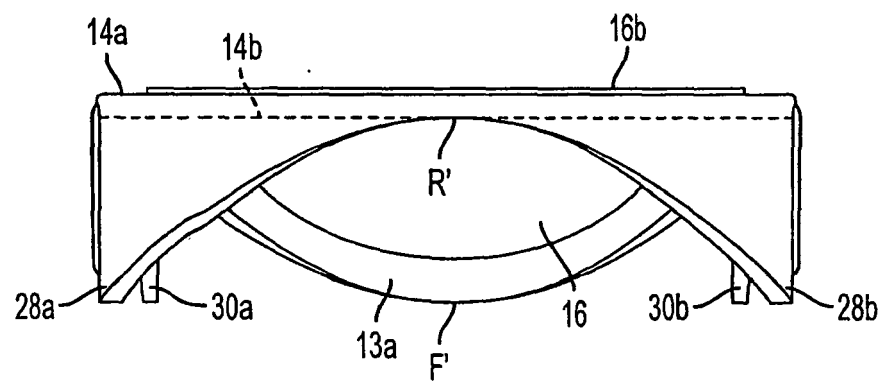


FIG. 3

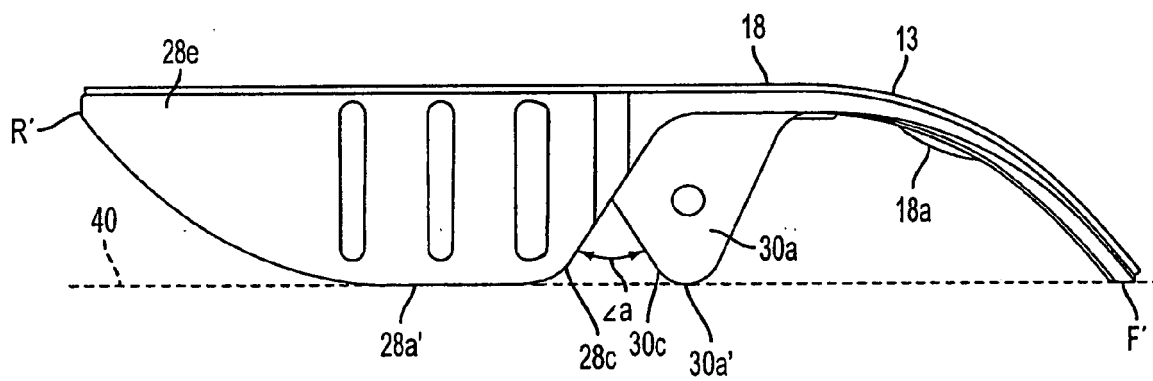


FIG. 4

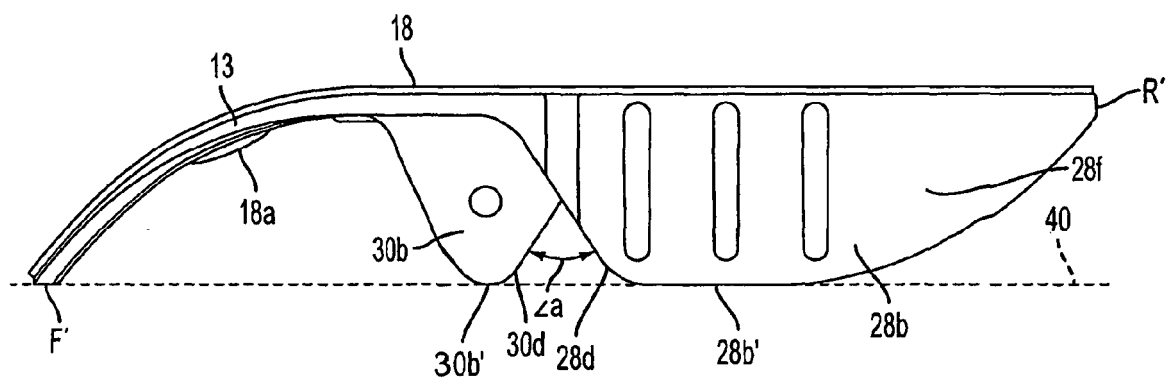


FIG. 5

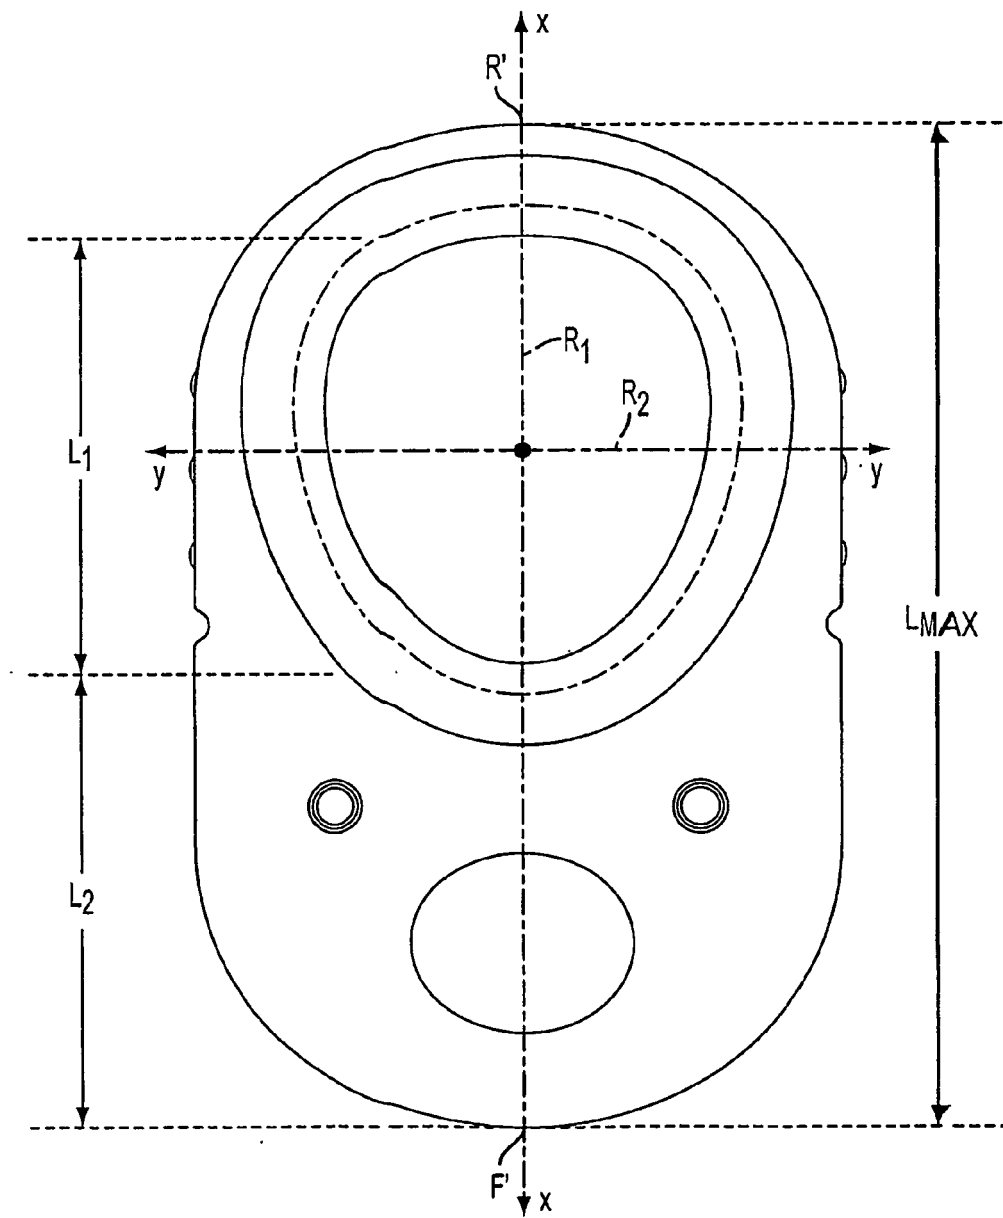


FIG. 6

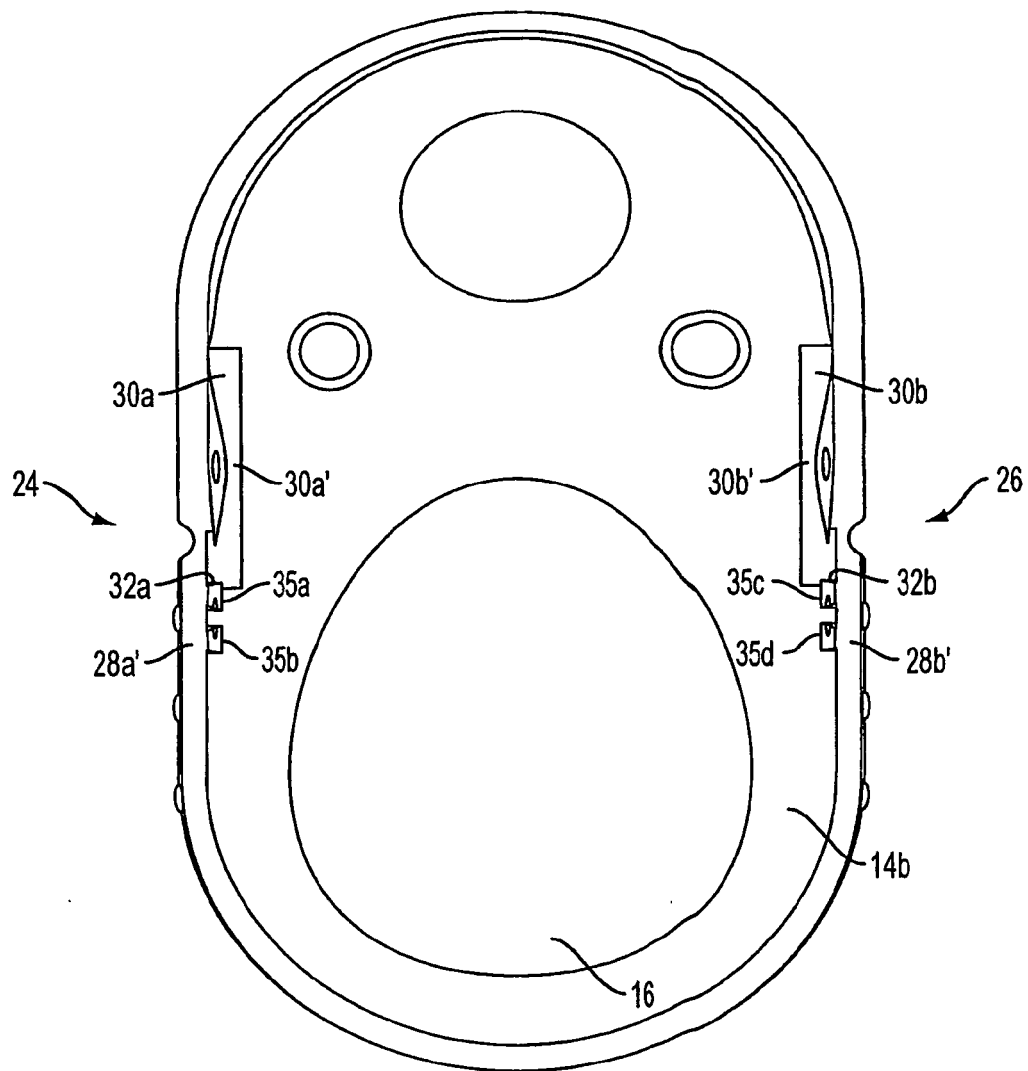
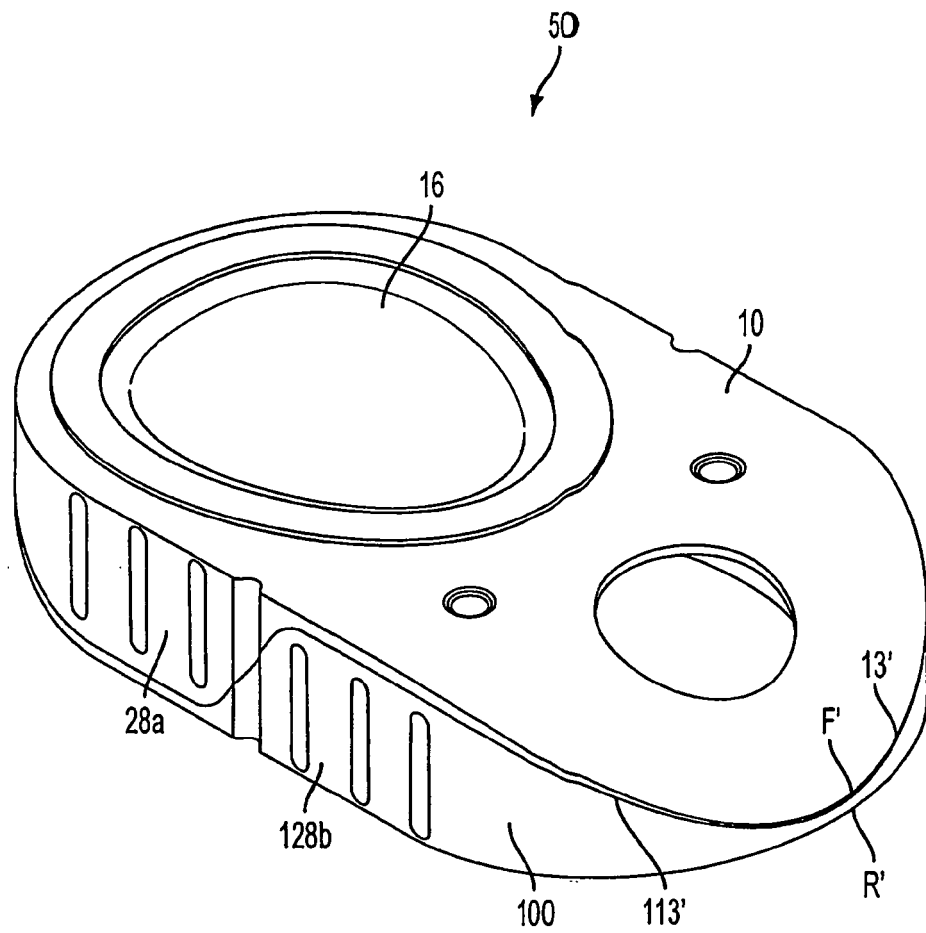


FIG. 7



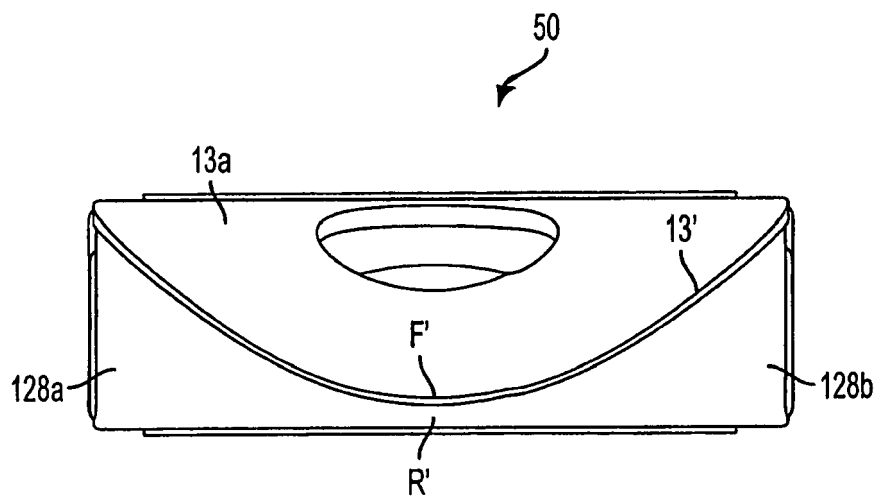


FIG. 9

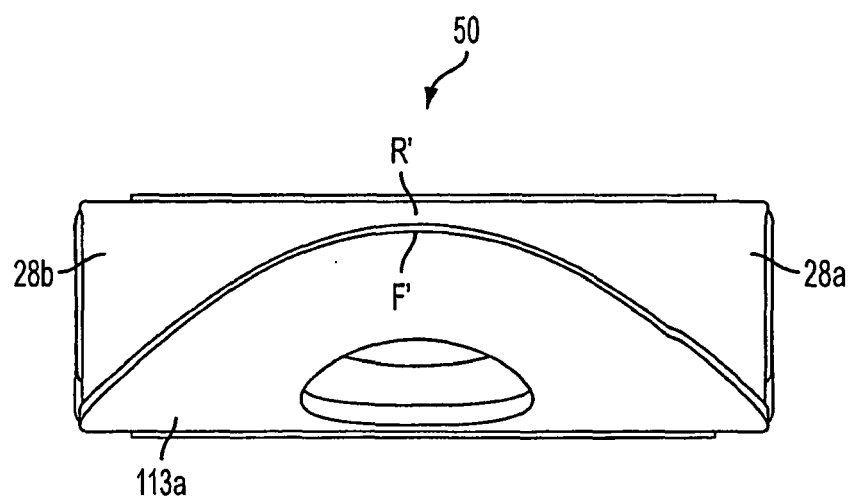


FIG. 10

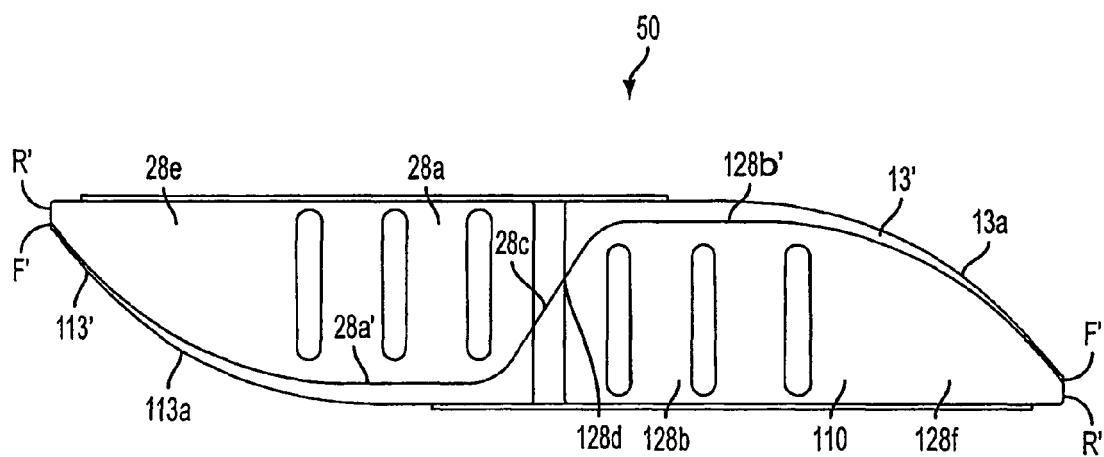


FIG. 11

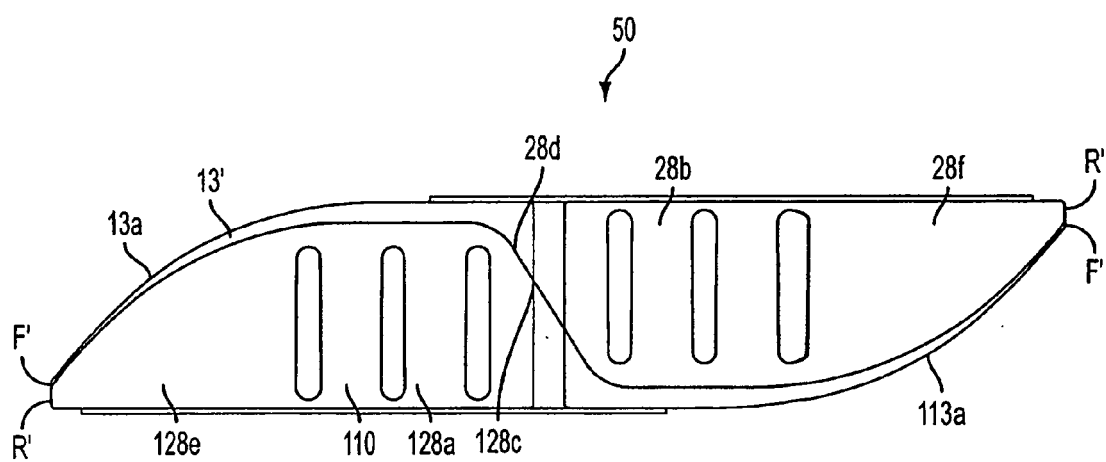


FIG. 12

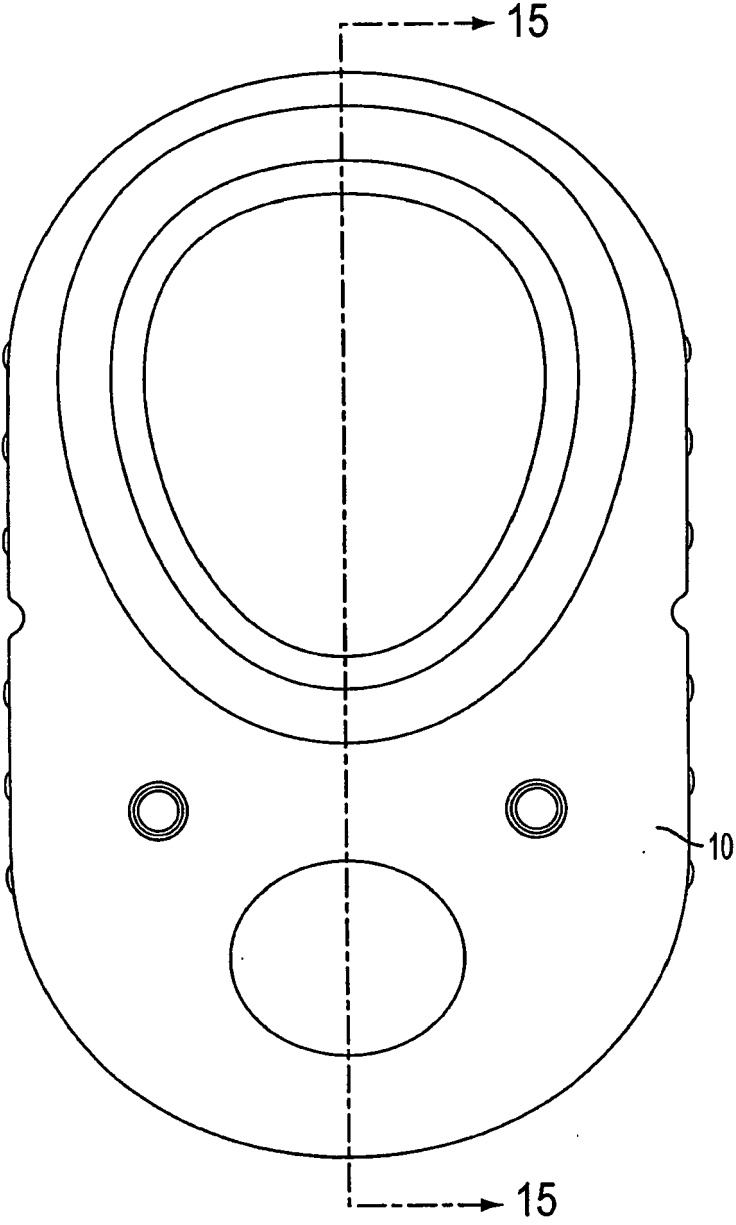


FIG. 13

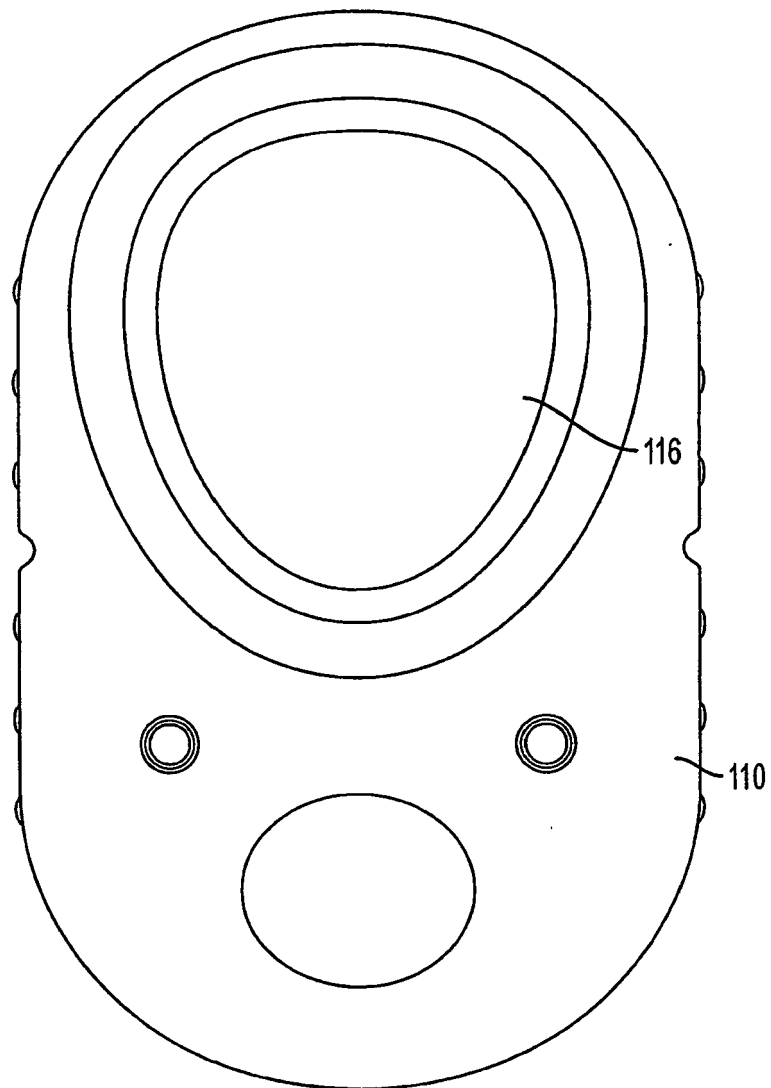


FIG. 14

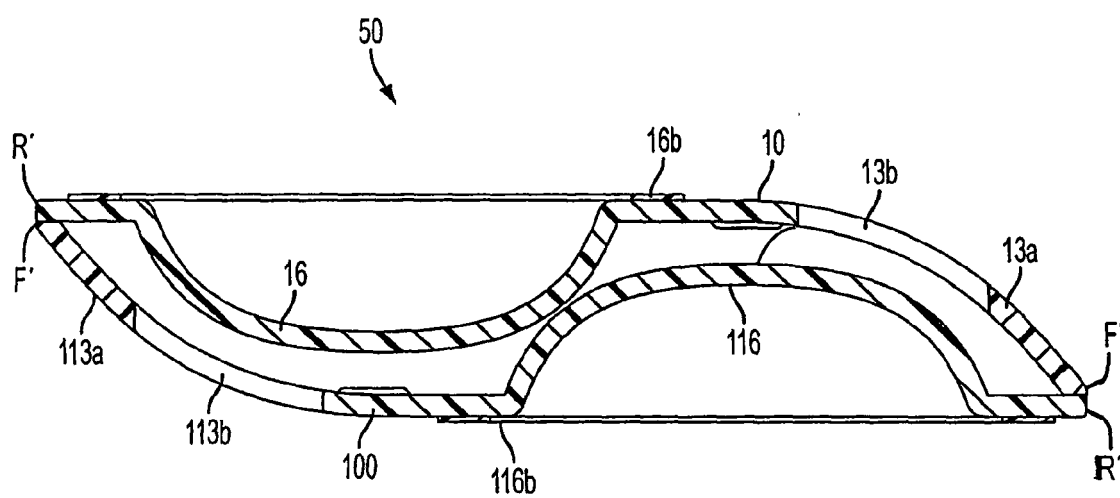


FIG. 15



EUROPEAN SEARCH REPORT

Application Number
EP 10 00 7152

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 023 852 A2 (JOHNSON & JOHNSON VISION PRODUCTS, INC; JOHNSON & JOHNSON VISION CARE,) 2 August 2000 (2000-08-02) * paragraph [0004]; figures 1-4 *	1,2	INV. B65D77/20 B65D85/38
X	EP 1 284 110 A2 (JOHNSON & JOHNSON VISION CARE I [US]) 19 February 2003 (2003-02-19) * paragraph [0008]; figures 1-4 *	1,2,7	
X	EP 1 277 416 A2 (MENICON CO., LTD) 22 January 2003 (2003-01-22) * paragraph [0078] - paragraph [0083]; figures 1-26 *	1,2,8,9	
X	US 5 467 868 A (ABRAMS RICHARD [US] ET AL) 21 November 1995 (1995-11-21) * column 2, line 52 - column 5, line 25; figures 1-3 *	1-3,7	
X	US 5 609 246 A (BORGHORST SHARLA [DE] ET AL) 11 March 1997 (1997-03-11) * column 2, line 17 - column 5, line 29; figures 1-7 *	1-4	TECHNICAL FIELDS SEARCHED (IPC) A45C B65D
A	EP 0 469 419 A2 (MILES INC; BAYER CORPORATION) 5 February 1992 (1992-02-05) * column 4, line 48 - column 6, line 8; figures 1-8 *	1-15	
A,D	US 5 722 536 A (PIERCE ET AL) 3 March 1998 (1998-03-03) * column 1, line 60 - column 2, line 4; figures 1-10 *	1-15	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 13 August 2010	Examiner Fitterer, Johann
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 3
EPO FORM 1503 03.82 (P04C01)



Application Number

EP 10 00 7152

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing claims for which payment was due.

☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due and for those claims for which claims fees have been paid, namely claim(s):

☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

☒ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

☐ The present supplementary European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims (Rule 164 (1) EPC).

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number

EP 10 00 7152

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-6

A package for a contact lens comprising a base having a flange, said flange including a curved tongue portion, a well formed in said base, and a cover sheet, wherein said tongue portion includes a through hole.

2. claim: 7

A package for a contact lens comprising a base having a flange, said flange including a curved tongue portion, a well formed in said base, and a cover sheet, wherein a raised surface surrounds said well.

3. claims: 8, 9

A package for a contact lens comprising a base having a flange, said flange including a curved tongue portion, a well formed in said base, and a cover sheet, wherein said well has a specific shape.

4. claims: 10-15

A package for a contact lens comprising a base having a flange, said flange including a curved tongue portion, a well formed in said base, and a cover sheet, wherein first and second support structures extend from said flange.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 00 7152

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-08-2010

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1023852	A2	02-08-2000	AU 769276 B2	22-01-2004
			AU 6537899 A	03-08-2000
			BR 0000010 A	05-09-2000
			CA 2292197 A1	29-07-2000
			CN 1264053 A	23-08-2000
			DE 69912732 D1	18-12-2003
			DE 69912732 T2	23-09-2004
			HK 1027725 A1	02-07-2004
			JP 4145453 B2	03-09-2008
			JP 2000238840 A	05-09-2000
			KR 20000052581 A	25-08-2000
			SG 89312 A1	18-06-2002
			TW 482736 B	11-04-2002
			US 6029808 A	29-02-2000
EP 1284110	A2	19-02-2003	BR 0203164 A	27-05-2003
			CA 2397042 A1	09-02-2003
			CN 1406836 A	02-04-2003
			JP 2003175969 A	24-06-2003
			KR 20030014641 A	19-02-2003
			SG 118150 A1	27-01-2006
			TW 575513 B	11-02-2004
			US 2003029736 A1	13-02-2003
EP 1277416	A2	22-01-2003	DE 60206110 D1	20-10-2005
			DE 60206110 T2	13-07-2006
			JP 2003024123 A	28-01-2003
			US 2005218012 A1	06-10-2005
			US 2003057111 A1	27-03-2003
US 5467868	A	21-11-1995	AT 181649 T	15-07-1999
			AU 669232 B2	30-05-1996
			AU 5241793 A	30-06-1994
			BR 9305156 A	26-07-1994
			CA 2111741 A1	22-06-1994
			CN 1091385 A	31-08-1994
			CZ 9302809 A3	19-10-1994
			DE 69325499 D1	05-08-1999
			DE 69325499 T2	16-12-1999
			EP 0604177 A2	29-06-1994
			FI 935744 A	22-06-1994
			GR 93100514 A	31-08-1994
			HK 1003432 A1	28-04-2000
			HU 67230 A2	28-03-1995
			IL 108077 A	10-01-1997
			JP 3464260 B2	05-11-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 00 7152

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-08-2010

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5467868	A		JP 6296514 A	25-10-1994
			NO 934715 A	22-06-1994
			NZ 250453 A	20-12-1996
			PH 30467 A	28-05-1997
			SG 50403 A1	20-07-1998
			ZA 9309544 A	20-06-1995

US 5609246	A	11-03-1997	AT 156767 T	15-08-1997
			AU 694986 B2	06-08-1998
			AU 1771895 A	09-11-1995
			CA 2148434 A1	05-11-1995
			CN 1126166 A	10-07-1996
			CZ 9501130 A3	13-12-1995
			DE 59500496 D1	18-09-1997
			DK 680895 T3	23-03-1998
			ES 2105861 T3	16-10-1997
			FI 952113 A	05-11-1995
			GR 3024937 T3	30-01-1998
			HK 1001587 A1	26-06-1998
			HU 73709 A2	30-09-1996
			IL 113515 A	15-06-1998
			JP 2711243 B2	10-02-1998
			JP 7322911 A	12-12-1995
			NO 951716 A	06-11-1995
			NZ 272043 A	24-03-1997
			PL 308393 A1	13-11-1995
			ZA 9503539 A	06-11-1995

EP 0469419	A2	05-02-1992	AT 136232 T	15-04-1996
			AU 633218 B2	21-01-1993
			CA 2043464 A1	03-02-1992
			DE 69118458 D1	09-05-1996
			DE 69118458 T2	08-08-1996
			DK 0469419 T3	05-08-1996
			ES 2085384 T3	01-06-1996
			GR 3020204 T3	30-09-1996
			JP 3181941 B2	03-07-2001
			JP 4256446 A	11-09-1992

US 5722536	A	03-03-1998	AU 714259 B2	23-12-1999
			AU 1705297 A	28-08-1997
			BR 9707410 A	13-04-1999
			CA 2245916 A1	14-08-1997
			CN 1212608 A	31-03-1999
			DE 69701516 D1	27-04-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 00 7152

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-08-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5722536 A		DE 69701516 T2	27-07-2000
		EP 0884962 A1	23-12-1998
		ES 2145571 T3	01-07-2000
		HK 1016442 A1	09-02-2001
		JP 3221684 B2	22-10-2001
		JP 11508172 T	21-07-1999
		WO 9728716 A1	14-08-1997

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5722536 A [0003]