




(22) Date de dépôt/Filing Date: 2015/08/31	(51) Cl.Int./Int.Cl. <i>E21B 43/12</i> (2006.01), <i>E21B 43/24</i> (2006.01)
(41) Mise à la disp. pub./Open to Public Insp.: 2017/02/28	(72) Inventeur/Inventor: LASTIWKA, MARTIN, CA
(45) Date de délivrance/Issue Date: 2019/02/26	(73) Propriétaire/Owner: SUNCOR ENERGY INC., CA
	(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : SYSTEMES ET METHODE DE CONTROLE DE PRODUCTION D'HYDROCARBURES
(54) Title: SYSTEMS AND METHOD FOR CONTROLLING PRODUCTION OF HYDROCARBONS

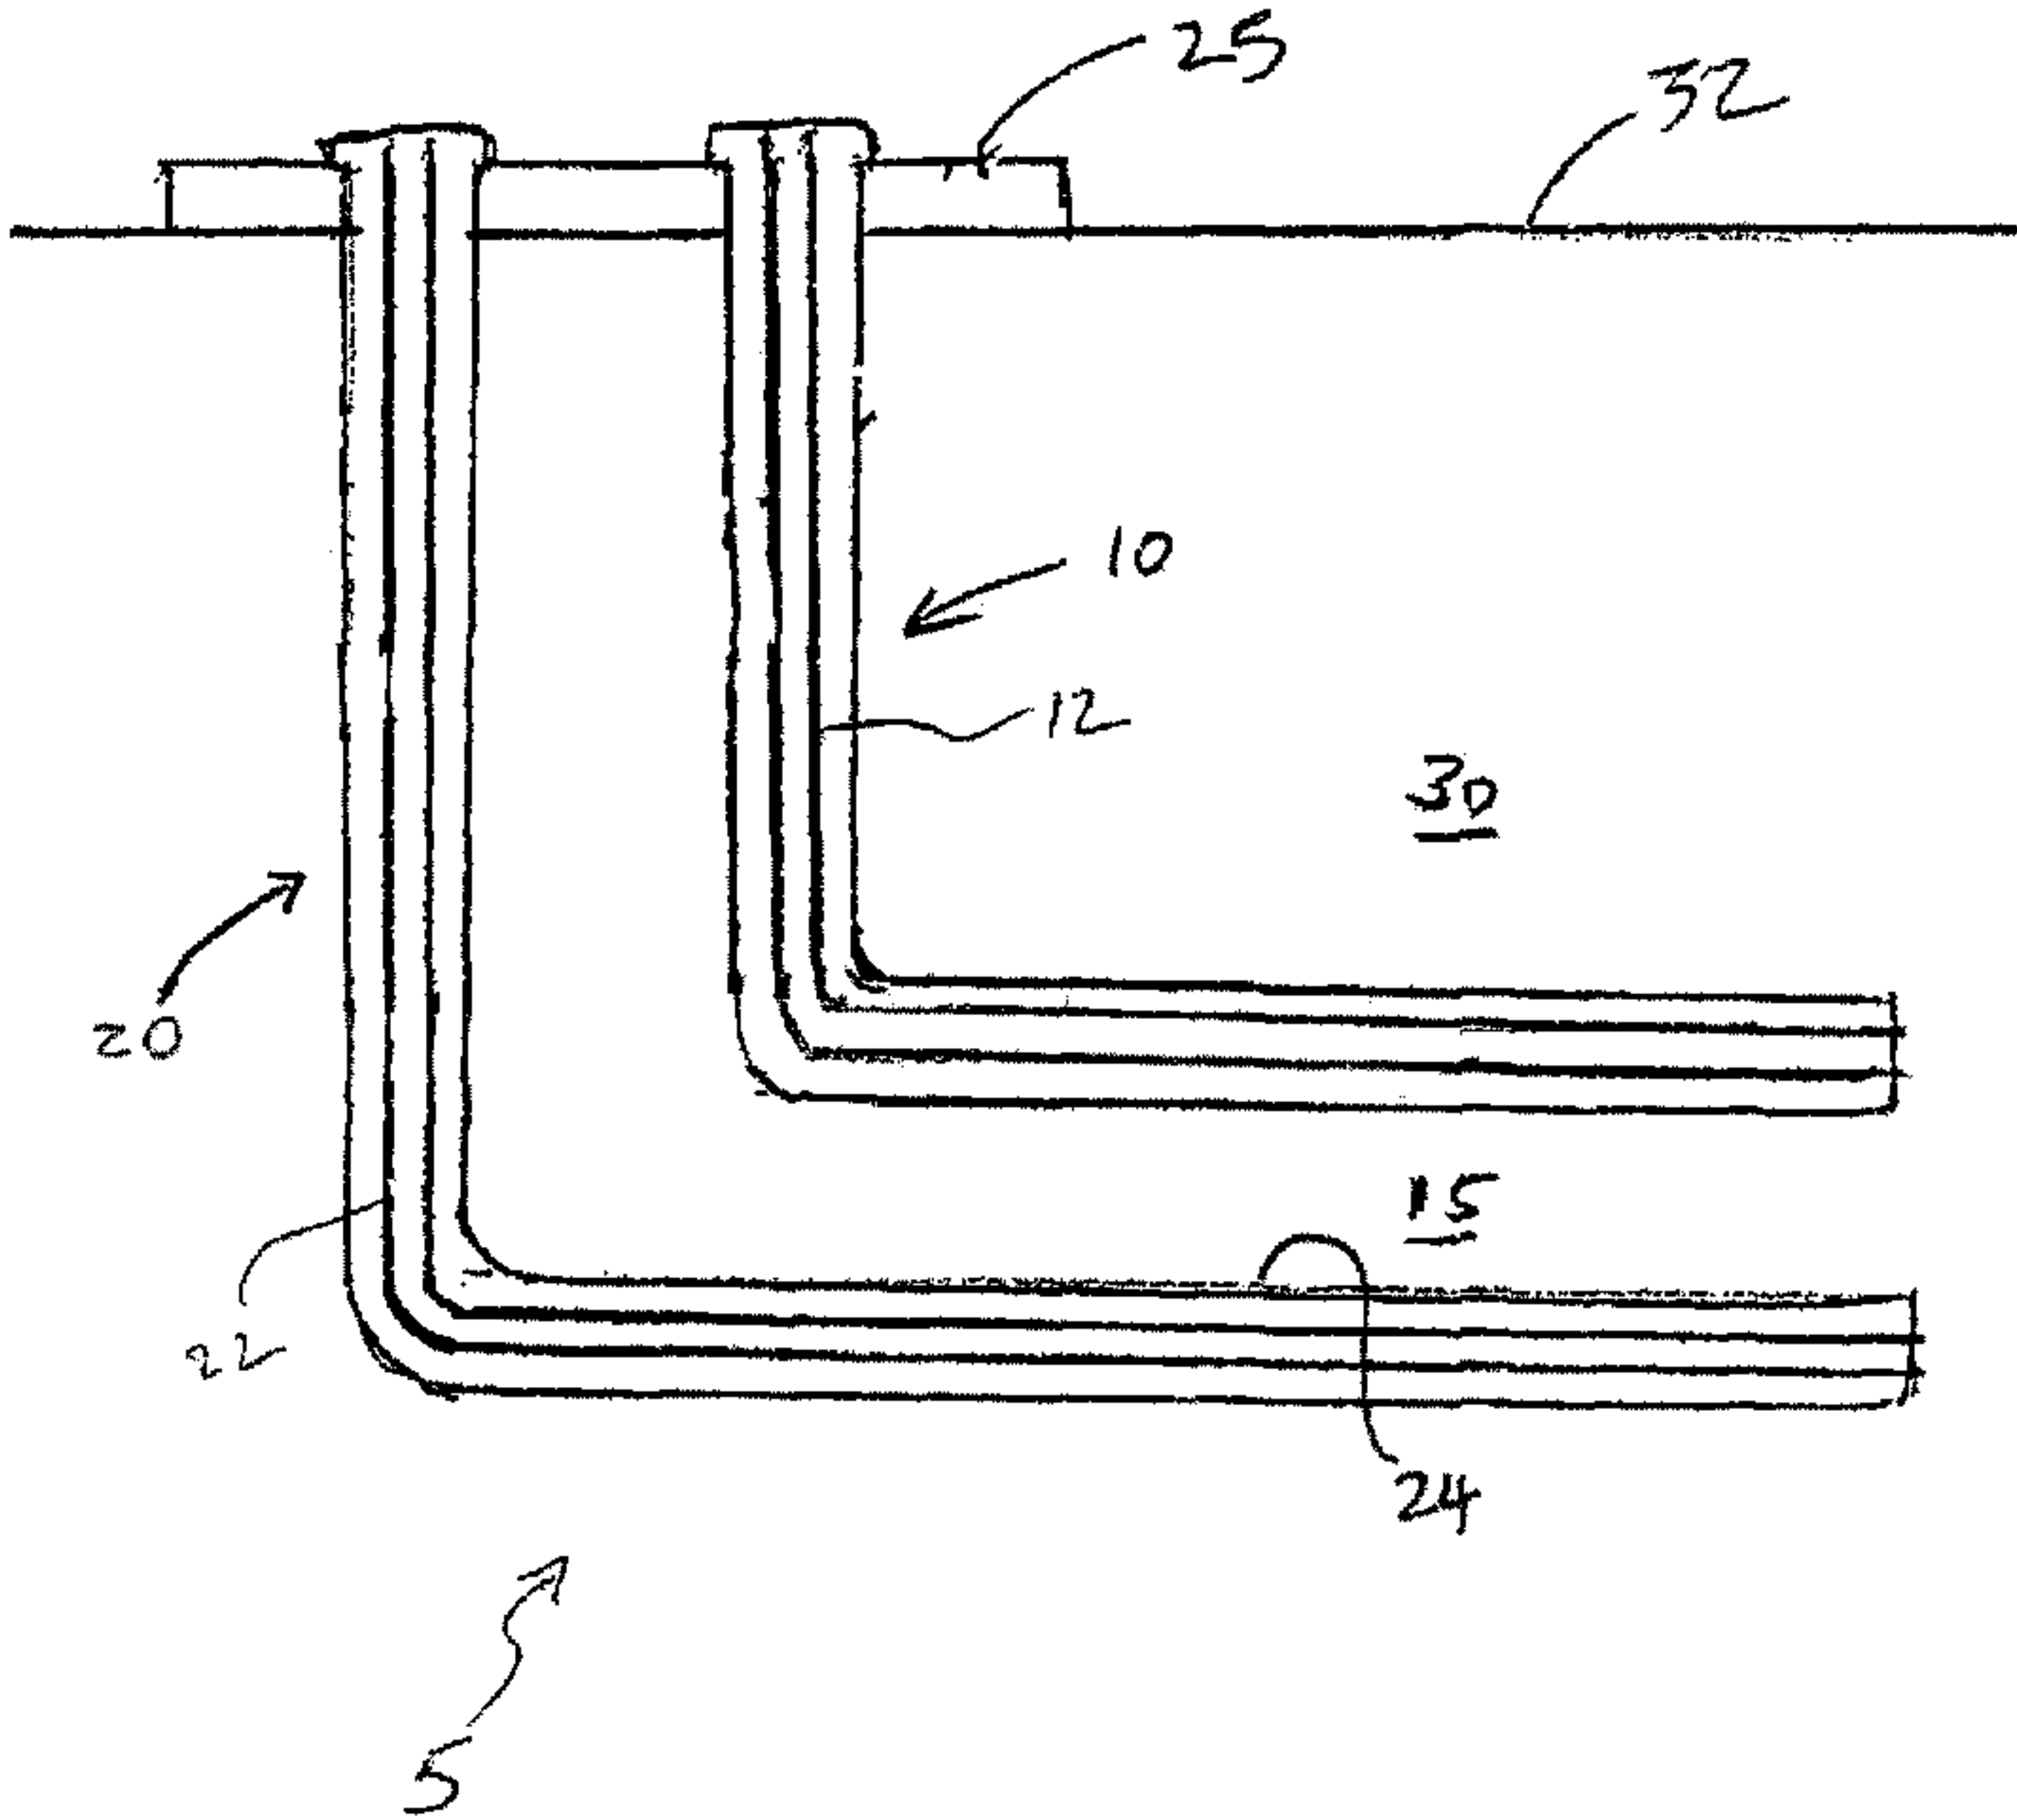

(57) **Abrégé/Abstract:**
There is provided systems and methods for controlling the inflow of materials into a production well during recovery of hydrocarbons from a hydrocarbon-containing reservoir. The system includes a flow control device configured to limit steam flow and hot water flow from the hydrocarbon-containing reservoir.

ABSTRACT

There is provided systems and methods for controlling the inflow of materials into a production well during recovery of hydrocarbons from a hydrocarbon-containing reservoir. The system includes a flow control device configured to limit steam flow and hot water flow from the hydrocarbon-containing reservoir.

SYSTEMS AND METHOD FOR CONTROLLING PRODUCTION OF HYDROCARBONS

FIELD

[0001] The present disclosures relates to systems and methods for regulating the rate of production of components of fluids from a hydrocarbon-containing reservoir.

BACKGROUND

[0002] Steam-Assisted Gravity Drainage ("SAGD") uses a pair of wells to produce hydrocarbons from a hydrocarbon containing reservoir. Typically the well pair includes two horizontal wells vertically spaced from one another, with the upper well used to inject steam into the reservoir (the "injection well") and the lower well to produce the hydrocarbon (the "production well"). The steam operates to generate a steam chamber in the reservoir, and heat from the steam operates to lower the viscosity of the hydrocarbon, allowing for gravity drainage, and thereby production from the production well. The produced fluids typically include a mixture of hydrocarbons and water, including water formed from the condensing of the steam (referred to as "produced water").

[0003] In some cases, however, steam is produced along with the hydrocarbon mixture. In such cases, the injected steam has not been provided with sufficient time and opportunity to supply its heat for purposes of mobilizing the hydrocarbons within the reservoir. Such heat is, therefore, wasted, resulting in less than desirable steam-to-oil ratios. Similar concerns also exist when relatively hot water is produced with the reservoir fluids. In these circumstances, production rate may need to be reduced so as to avoid damaging the liner, pump or other equipment with the incoming steam or hot water that flashes and becomes steam. This may be necessary even if it means that some parts of the well remains cold.

[0004] Another concern is with solid particulates which may become entrained within the produced steam. These may contribute to erosion of downhole components used to conduct the produced fluids uphole.

SUMMARY

[0005] In one aspect, there is provided a system for the production of fluid from a hydrocarbon-containing reservoir, comprising: a production conduit for producing fluids from a hydrocarbon-containing reservoir; a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, including: an inlet for receiving fluid from the hydrocarbon-containing reservoir; an upstream fluid passage for conducting the fluid that has been received by the inlet; a first fluid passage branch disposed in fluid communication with the production conduit; a second fluid passage branch

disposed in fluid communication with the production conduit; wherein: the upstream fluid passage branches into at least the first and second fluid passage branches at a branching point, and wherein each one of the first and second fluid passage branches, independently, at least in part, extends from the branching point to the production conduit; an axis of the first fluid passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the upstream fluid passage that is extending to the branching point, and an axis of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the upstream fluid passage that is extending to the branching point.

[0006] In some implementations, the system wherein the axis, of the portion of the first fluid passage branch that is extending from the branching point, is substantially aligned, with the axis of the portion of the upstream fluid passage that is extending to the branching point.

[0007] In some implementations, the axis of the portion of the second fluid passage branch that is extending from the branching point, is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid passage that is extending to the branching point.

[0008] In some implementations, the resistance to fluid flow, that the first fluid passage branch is configured to provide, is greater than the resistance to fluid flow, that the second fluid passage branch is configured to provide, by a multiple of at least 1.1.

[0009] In some implementations, the length of the first fluid passage branch measured along the axis of the first fluid passage branch is greater than the length of the second fluid passage branch measured along the axis of the second fluid passage branch.

[0010] In some implementations, the length of the first fluid passage branch measured along the axis of the first fluid passage branch is greater than the length of the second fluid passage branch, measured along the axis of the second fluid passage branch by a multiple of at least two (2).

[0011] In some implementations, the branching of the fluid inlet passage portion into the first fluid passage branch and the second fluid passage branch is defined by a tee fitting.

[0012] In some implementations, an injection conduit for supplying a mobilizing fluid for effecting mobilization of hydrocarbons in the hydrocarbon-containing reservoir such that the mobilized hydrocarbons are conducted towards the production conduit.

[0013] In some implementations, the injection conduit and the production conduit define a SAGD well pair, such that the injection conduit is disposed within an injection well that is disposed above a production well within which the production conduit is disposed.

[0014] In some implementations, the injection conduit and the production conduit are disposed within the same well.

[0015] In some implementations, the flow control device further comprises a device-traversing fluid passage, wherein the device-traversing fluid passage includes the upstream fluid passage and the first fluid passage branch, and is further defined by a constricted passage portion, wherein at least a portion of the constricted passage portion is defined upstream of the branching point, wherein the cross-sectional flow area of the constricted passage portion is less than the cross-sectional flow area of a device-traversing fluid passage portion disposed upstream of the constricted passage portion.

[0016] In some implementations, the branching point is disposed within the constricted passage portion.

[0017] In some implementations, the cross-sectional flow area of a device-traversing fluid passage portion, that is disposed downstream of the constricted passage portion, is greater than the cross-sectional flow area of the constricted passage portion.

[0018] In some implementations, the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion.

[0019] In some implementations, the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion; and wherein the branching point is disposed downstream of the constricted passage portion such that the branching point is disposed within a device-traversing fluid passage portion having a cross-sectional flow area that is greater than the cross-sectional flow area of the constricted passage portion.

[0020] In another aspect, there is provided a system for the production of fluid from a hydrocarbon-containing reservoir, comprising: a production conduit for producing fluids from a hydrocarbon-containing reservoir; a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, including: an inlet for receiving fluid from the hydrocarbon-containing reservoir; a device-traversing fluid passage extending from the inlet to the production conduit, including: an upstream fluid passage for conducting the fluid that has been received by the inlet; a first fluid passage branch disposed in fluid communication with the production conduit; a second fluid passage branch disposed in fluid communication with the production conduit; a constricted passage portion having a cross-sectional area that is less than a cross-sectional flow area upstream of the constricted passage portion; wherein: the upstream fluid passage portion branches into at least the first and second fluid passage branches at a branching point, and wherein each one of the first and second fluid passage branches, independently, at

least in part, extends from the branching point to the production conduit; an axis of the fluid passage branch that is extending from the branching point is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the upstream fluid passage that is extending to the branching point, an axis of the portion of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the upstream fluid passage that is extending to the branching point; and at least a portion of the constricted passage portion is defined upstream of the branching point.

[0021] In some implementations, the branching point is disposed within the constricted passage portion.

[0022] In some implementations, a cross-sectional flow area of the device-traversing fluid passage portion, that is disposed downstream of the constricted passage portion, is greater than the cross-sectional flow area of the constricted passage portion.

[0023] In some implementations, the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion.

[0024] In some implementations, the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion; and wherein the branching point is disposed downstream of the constricted passage portion such that the branching point is disposed within a device-traversing fluid passage portion having a cross-sectional flow area that is greater than the cross-sectional flow area of the constricted passage portion.

[0025] In some implementations, the axis, of the portion of the first fluid passage branch that is extending from the branching point, is substantially aligned with the axis of the portion of the upstream fluid passage that is extending to the branching point.

[0026] In some implementations, the axis, of the portion of the second fluid passage branch that is extending from the branching point, is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid passage that is extending to the branching point.

[0027] In some implementations, the branching of the fluid inlet passage portion into the first fluid passage branch and the second fluid passage branch is defined by a tee fitting.

[0028] In some implementations, an injection conduit for supplying a mobilizing fluid for effecting mobilization of hydrocarbons such that the mobilized hydrocarbons are conducted towards the production conduit.

[0029] In some implementations, the injection conduit and the production conduit define a SAGD well pair, such that the injection conduit is disposed within an injection well above a production well within which the production conduit is disposed.

[0030] In some implementations, the injection conduit and the production conduit are disposed within the same well.

[0031] In another aspect, there is provided a method of producing heavy oil from a hydrocarbon-containing reservoir, comprising: providing an injection conduit and a production conduit within the hydrocarbon-containing reservoir; providing a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, the flow control device including: an inlet for receiving fluid from the hydrocarbon-containing reservoir; an upstream fluid passage for conducting fluid that has been received by the inlet from the hydrocarbon-containing reservoir; a first fluid passage branch disposed in fluid communication with the production conduit; a second fluid passage branch disposed in fluid communication with the production conduit; wherein: the upstream fluid passage branches into at least the first and second fluid passage branches at a branching point; an axis of the first fluid passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the upstream fluid passage that is extending to the branching point, and an axis of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the upstream fluid passage that is extending to the branching point, injecting steam into the reservoir via the injection conduit such that mobilized bitumen is generated; and such that: (a) a reservoir fluid mixture, including heavy oil and condensed steam, is produced through the production conduit and is conducted through the production conduit upstream of the fluid flow control device; (b) steam is conducted through the branching point of the fluid flow control device to generate a Venturi effect; and in response to the Venturi effect, inducing flow of at least a fraction of the produced reservoir fluid mixture from the production conduit and through the second fluid passage branch to the branching point for admixing with at least a fraction of the steam such that an admixture flow is generated and conducted through the first fluid passage branch; and recovering at least the heavy oil from the production well.

[0032] In another aspect, there is provided a system for the production of fluid from a hydrocarbon-containing reservoir, comprising: a production conduit for producing fluids from a hydrocarbon-containing reservoir; a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production well, including: an inlet for receiving fluid from the hydrocarbon-containing reservoir; an upstream fluid conducting passage for conducting the fluid received by the inlet; a flow dampening chamber; a fluid connector passage branch effecting fluid communication between the upstream fluid conducting passage and the flow dampening chamber; a production conduit-connecting passage branch extending to the production conduit, and effecting fluid communication between the upstream fluid conducting passage and the production conduit; wherein: the upstream fluid-conducting passage

branches into at least the fluid connector passage branch and the production conduit-connecting passage branch at a downstream branching point; an axis of fluid connector passage branch is disposed at an obtuse angle of greater than 165 degrees relative to the an axis of the portion of the upstream fluid conducting passage that is extending to the branching point; and an axis of the production conduit-connecting passage branch is disposed at an angle of between 45 degrees and 135 degrees relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point;

[0033] In some implementations, the axis of the portion of the fluid connector passage branch that is extending from the downstream branching point, is disposed in substantial alignment with the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point; and wherein the axis, of the portion of the well-connecting passage branch that is extending from the downstream branching point, is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point.

[0034] In some implementations, the flow dampening chamber includes a dimension, extending along the axis of the portion of the fluid connector passage branch that is extending from the branching point, equivalent to at least one (1) diameter of the upstream fluid conducting passage.

[0035] In some implementations, the flow dampening chamber includes a diameter that is equivalent to at least one (1) diameter of the upstream fluid conducting passage.

[0036] In another aspect, there is provided a method of producing bitumen from a hydrocarbon-containing reservoir, comprising: providing an injection conduit and a production conduit within the hydrocarbon-containing reservoir; providing a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, the flow control device including: an inlet for receiving fluid from the hydrocarbon-containing reservoir; an upstream fluid conducting passage for conducting the fluid received by the inlet; a flow dampening chamber; a fluid connector passage branch effecting fluid communication between the upstream fluid conducting passage and the flow dampening chamber; a production conduit-connecting passage branch extending to the production conduit, and effecting fluid communication between the upstream fluid-conducting passage and the production conduit; wherein: the upstream fluid-conducting passage branches into at least the fluid connector passage branch and the production conduit-connecting passage branch at a downstream branching point; an axis of fluid connector passage branch is disposed at an obtuse angle of greater than 165 degrees relative to the an axis of the portion of the upstream fluid conducting passage that is extending to the branching point; and an axis of the production conduit-connecting passage branch is disposed at an angle of between 45 degrees and 135 degrees relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point;

injecting steam into the reservoir such that a reservoir fluid mixture is generated and introduced to the upstream fluid conducting passage of the flow control device; conducting at least steam of the introduced reservoir fluid mixture to the flow dampening chamber, via the upstream fluid conducting passage, so as to effect a reduction in the kinetic energy of the steam; and conducting the dampened steam to the production conduit through the production conduit-connecting passage branch.

[0037] In some implementations, the axis of a portion of the fluid connector passage branch that is extending from the downstream branching point, is disposed in substantial alignment with the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point; and wherein the axis of the portion of the production conduit-connecting passage branch that is extending from the downstream branching point is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point.

[0038] In some implementations, the conducted reservoir fluid mixture fraction includes solid particulate and the solid particulate is entrained with the steam that is conducted to the flow dampening chamber.

[0039] In another aspect, there is provided a system for the production of fluid from a hydrocarbon-containing reservoir, comprising: a production conduit for producing fluids from a hydrocarbon-containing reservoir; a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, including: an inlet for receiving reservoir fluid from the hydrocarbon-containing reservoir; a device-traversing fluid passage extending from the inlet to the production conduit, for conducting the received reservoir fluid, the device-traversing fluid passage including: an upstream fluid conducting passage; a downstream fluid conducting passage; wherein at least a portion of the downstream fluid conducting passage has a cross-sectional flow area that is greater than the cross-sectional flow area of the upstream fluid passage.

[0040] In some implementations, the entirety of the downstream fluid conducting passage has a cross-sectional flow area that is greater than the cross-sectional flow area of the upstream fluid conducting passage.

[0041] In some implementations, the device-traversing fluid passage consists of the upstream fluid conducting passage and the downstream fluid conducting passage.

[0042] In another aspect, there is provided a method of producing heavy oil from an oil sands reservoir, comprising: injecting steam into the reservoir such that heavy oil is mobilized, and a reservoir fluid mixture, including heavy oil and condensed hot water, is generated; conducting the reservoir fluid mixture through a constricted passage such that the hot water of the reservoir fluid mixture is accelerated, resulting in a concomitant pressure decrease sufficient to effect vaporization of at least a fraction of the

hot water; conducting the vaporized water through a fluid passage having a relatively larger cross-sectional flow area than the constricted fluid passage and to the production conduit; and recovering at least the heavy oil from the production conduit.

[0043] In another aspect, there is provided a system for the production of fluid from a hydrocarbon-containing reservoir, comprising: a production conduit for producing fluids from a hydrocarbon-containing reservoir; a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, including: an inlet for receiving fluid from the hydrocarbon-containing reservoir; a device-traversing fluid passage extending from the inlet to the production conduit, including: a first branching fluid passage for conducting the fluid that has been received by the inlet; a first fluid passage branch disposed in fluid communication with the production conduit; a constricted passage portion; a second fluid passage branch disposed in fluid communication with the production conduit; wherein: the first branching fluid passage branches into at least the first and second fluid passage branches at a first branching point, and wherein each one of the first and second fluid passage branches, independently, at least in part, extends from the first branching point to the production conduit; relative to the second fluid passage branch, the first fluid passage branch is configured to provide greater resistance to fluid flow; the first fluid passage branch has a cross-sectional flow area that is greater than the cross-sectional flow area of the portion of the device-traversing fluid passage that is disposed upstream of the first fluid passage; an axis of a portion of the first fluid passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the first branching fluid passage that is extending to the first branching point; an axis of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the first branching fluid passage that is extending to the first branching point; and at least a portion of the constricted passage portion is defined upstream of the first branching point, wherein the cross-sectional flow area of the constricted passage portion is less than the cross-sectional flow area of a device-traversing fluid passage portion that is disposed upstream of the constricted passage portion; a flow dampening chamber; wherein: the first fluid passage branch includes: a downstream branching fluid passage that branches at a second branching point into: a fluid connector passage branch that extends into the flow dampening chamber; and a production conduit-connecting passage branch that extends into the production conduit; wherein: an axis of the fluid connector passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of a portion of the downstream branching fluid passage that is extending to the second branching point, and an axis of the production conduit-connecting passage branch is disposed at an angle of between 45 degrees and 135 degrees relative to the axis of the portion of the downstream branching fluid passage that is extending to the second branching point.

BRIEF DESCRIPTION OF DRAWINGS

[0044] The preferred embodiments will now be described with the following accompanying drawings, in which:

[0045] Figure 1 is a schematic illustration of a well pair in an oil sands reservoir for implementation of a steam-assisted gravity drainage process;

[0046] Figure 2 is a schematic illustration of an interval of a production well, with a flow control device installed in production tubing, and showing material flows during the production phase of a SAGD operation;

[0047] Figure 2A is a schematic illustration of an interval of a production well, with a flow control device installed in production tubing, with a sand control feature disposed between the reservoir and the production tubing, and showing material flows during the production phase of a SAGD operation;

[0048] Figure 3 is a schematic illustration showing an embodiment of a flow control device installed in fluid communication with production tubing;

[0049] Figure 4 is a schematic illustration of a portion of an alternative embodiment of the flow control device illustrated in Figure 3, as installed in fluid communication with production tubing, showing the fluid passage branches extending from the branching point in different orientations relative to the embodiment illustrated in Figure 3;

[0050] Figure 5 is a schematic illustration of another alternative embodiment of the flow control device illustrated in Figure 3, as installed in fluid communication with production tubing, showing multiple branching points;

[0051] Figure 6 is a schematic illustration of another embodiment of a flow control device installed in fluid communication with production tubing, and showing material flows during an operational implementation of the system;

[0052] Figure 7 is a schematic illustration of an alternative embodiment of the flow control device illustrated in Figure 6, as installed in fluid communication with production tubing, showing the branching point disposed downstream from the constricted passage portion;

[0053] Figure 8 is a detailed view of a portion of the embodiment of the flow control device illustrated in Figure 7, showing the fluid passages branches extending from the branching point;

[0054] Figure 9 is a schematic illustration of a further embodiment of a flow control device installed within production tubing, and showing material flows during an operational implementation of the system;

[0055] Figure 10 is a schematic illustration of a portion of an alternative embodiment of the flow control device illustrated in Figure 7, showing the fluid passages extending from the branching point;

[0056] Figure 11 is a schematic illustration of a further embodiment of a flow control device installed within production tubing; and

[0057] Figure 12 is a schematic illustration of an alternative embodiment of the flow control device illustrated in Figure 11, as installed in fluid communication with production tubing;

[0058] Figure 13 is a schematic illustration of a further embodiment of a flow control device installed within production tubing, incorporating various aspects illustrated in Figure 1 to 12; and

[0059] Figure 14 is a schematic illustration of a further embodiment of a flow control device installed within production tubing, incorporating aspects illustrated in Figures 9 and 12.

DETAILED DESCRIPTION

[0060] Referring to Figure 1, there is provided a system 5 for producing bitumen from a hydrocarbon-containing reservoir 30, such as an oil sands reservoir 30.

[0061] For illustrative purposes below, an oil sands reservoir from which bitumen is being produced using Steam-Assisted Gravity Drainage ("SAGD") is described. However, it should be understood, that the techniques described could be used in other types of hydrocarbon containing reservoirs and/or with other types of thermal recovery methods that use steam or other gases.

[0062] A reservoir fluid-comprising mixture is produced from an oil sands reservoir using a SAGD well pair. Referring to Figure 1, in a typical SAGD well pair, the wells are spaced vertically from one another, such as wells 10 and 20, and the vertically higher well, i.e., well 10, is used for steam injection the SAGD operation, and the lower well, i.e., well 20, is used for producing bitumen. During the SAGD operation, steam injected through the well 10 (typically referred to as the "injection well") is conducted into the reservoir 30. The injected steam mobilizes the bitumen within the oil sands reservoir 30. The mobilized bitumen and steam condensate drains through the interwell region 15 by gravity to the well 20 (typically referred to as the "production well"), collects in the well 20, and is surfaced through tubing or by artificial lift to the surface 32, where it is produced through a wellhead 25.

[0063] In some embodiments, for example, the SAGD operation may be conducted using a single well within which are disposed separate conduits (e.g., tubing) for effecting the injection and the production.

[0064] In the implementation shown, a cased-hole completion is provided, and includes a casing run into both of the injection and production wells 10, 20. The casing may be cemented to the oil sands reservoir for effecting zonal isolation. A liner may be hung from the last section of casing. The liner can be made from the same material as the casing, but, unlike the casing, the liner does not extend back to the wellhead. The liner is slotted or perforated to effect fluid communication with the oil sands reservoir.

Fluid conducting tubing 22 (or multiple tubing strings) can be installed within the casing of the injection well 10. The fluid conducting tubing 22 is provided for injecting steam into the oil sands reservoir 30.

[0065] Fluid conducting tubing (or multiple tubing strings) can also be installed within the casing of the production well 20. The fluid conducting tubing or "production conduit 22", is provided for conducting fluid, including bitumen, that has been received from the oil sands reservoir 30, to the surface 32, thereby effecting production of bitumen.

[0066] During the production phase of the SAGD operation, steam is injected into the well 10 via the injection conduit 22, and conducted through a liner 24, of the production well 20 into the oil sands reservoir 30. The injected steam mobilizes the bitumen within the oil sands reservoir 30. The mobilized bitumen and steam condensate drains through the interwell region, by gravity to the production well 10, through the liner 24, and is then conducted through the production conduit 22 to the surface 32. Artificial lift may be used to help conduct the fluids received within the production conduit 22 to the surface 32.

[0067] In some cases, uncondensed steam may also be conducted to the production well 20. This is undesirable, as the uncondensed steam represents wasted heat energy. Because the steam has not condensed, this means that heat energy of the injected steam has not been used, as originally intended, for mobilizing and promoting the production of bitumen. Similar concerns exist when hot water is conducted to the production well. In these circumstances, and amongst other things, production rate may need to be reduced so as to avoid damaging the liner, pump or other equipment with the incoming steam or hot water that flashes and becomes steam. This may be necessary even if it means that some parts of the well remains cold. An additional concern with produced steam is that solid particulates may be entrained with the incoming uncondensed steam, and their introduction may lead to premature erosion of fluid conducting components of the production well 20.

[0068] In some cases, limiting production rate at a location within the well where hotter water is being produced may assist in achieving temperature uniformity (or conformance) as oil production may accelerate at other locations.

[0069] In this respect, a flow control device 100 is provided for regulating the flow of fluid being conducted from the oil sands reservoir 30 to the surface 32 via a well. Amongst other things, the flow control device 100 is provided for interfering with the mass flow rate, of a flowing gas (or gas-liquid mixture) relative to a liquids-only fluid for a given pressure differential across the device 100, or conversely, creating a greater pressure differential for gases (or gas-liquids) relative to liquids-only fluids for a given mass flow rate. The device 100 is especially effective when a phase change (liquid-to-gas) is possible under flowing conditions. In some embodiments, for example, the gas includes steam.

[0070] Steam content of the fluid being conducted into the production conduit 22 varies over time, and is based on, amongst other things, conditions within the reservoir. As well, at any given time, the steam content of fluid being conducted over the entire length of the production conduit 22 may vary from section to section. The flow control device 100 is configured to interfere with the flow of steam, or hot water at or near saturation conditions, from the reservoir 30 to the production conduit 22, and this regulatory function is triggered while steam is being conducted from the reservoir 30 to the production well 20. Referring to Figure 2, in the system 5, multiple flow control devices 100 may provide this regulatory function over multiple intervals 26 of the production well 20. The flow control device 100 is installed in ports 28 of the production conduit 22, and are thereby disposed in fluid communication with the flow passage within the production conduit 22. The flow control device is positioned within the annulus 21 between the production conduit 22 and the slotted liner 24, and is configured to receive fluids conducted from the oil sands reservoir 30 and through the slotted liner 24. Multiple intervals 26 are isolated with, and defined between, spaced-apart packers 23 within the annulus 21 and extending between the production conduit 22 and the liner 24. In some embodiments, for example, for each of these intervals 26, fluid communication is effected with the production conduit 22 through two ports 28 provided in the production conduit 22, each one of these ports 28 having four flow control devices 100 installed within them. The flow paths of the fluids being produced from the reservoir 30 are indicated by reference numeral 29. Referring to Figure 2A, alternatively, the flow control devices 100 may be built into the liner, and such flow control devices may include some form of sand control 27 disposed along the producing portion of the production conduit 22, between the flow control device 100 and the reservoir 30. In some embodiments, for example, the devices 100 are built into a tubular, which is placed inside of a slotted liner or other type of sand screen. The flow area between the sand control and the devices 100 would be isolated in sections along the well 20, such that flow from the sections would be directed towards certain devices 100 only. This allows the distribution of fluid production to be controlled (to a certain extent), and limits the impact of any low-subcool/saturated liquids, or even gas phases present, to that section where such fluids enter the well 20.

[0071] The flow control device 100, its various aspects and its various implementations, will now be described.

[0072] The flow control device 100 may include an inlet 102 for receiving fluid from the oil sands reservoir 30. The fluid may include hydrocarbons, including bitumen, steam condensate and, in some cases, uncondensed steam. The flow control device 100 is configured to selectively interfere with the flow of steam, received by the inlet 102, from the oil sands reservoir 30 to the production conduit 22.

[0073] In one aspect, and referring to Figures 3 and 4, the flow control device 100 includes an upstream fluid passage 104 for conducting the fluid that has been received by the inlet 102, and the upstream fluid passage 104 portion branches into at least a first fluid passage branch 106 and a second fluid passage branch 108 at a branching point 110. Each one of the first and second fluid passage branches 106, 108, independently, at least in part, extends from the branching point 110 to the production tubing, and is configured to conduct fluid from the branching point 110 to the production conduit 22. In the illustrated embodiment, each one of the first and second fluid passage branches, independently, extends from the branching point 110 to the production conduit 22.

[0074] The second fluid passage branch 108 is disposed at a substantial angle (for example, greater than 45 degrees) from the axis of the nozzle such that higher-Reynolds number flows bypass this path, while lower Reynolds number flows change direction and pass through it. In some embodiments, for example, the flow path within second fluid passage branch 108 is reduced in length relative to the first fluid passage branch 106. The reduced total flow path length through this second fluid passage branch 108 leads to a reduced pressure drop. When configured for given operating conditions, higher-velocity gases and liquids entrained therein would bypass this exit and incur the pressure drop associated with the primary exit and full path length of the device 100, while higher-viscosity and lower-velocity fluids (e.g. single-phase liquids) would make use, at least partially, of the second fluid passage branch 108. In this way, subcooled liquids would incur less pressure drop relative to gas-liquid mixtures or gas-only fluids.

[0075] In this respect, the ray 106A that is extending from the branching point 110:

(a) along the axis 106B of the portion of the first fluid passage branch 106 that is extending from the branching point 110, and

(b) in the direction in which at least a fraction of the fluid, that has been received by the inlet from the hydrocarbon-containing reservoir, and which the first fluid passage branch 106 is configured to conduct towards the production conduit 22, is being conducted within the first fluid passage branch 106 when the fluid is being received by the inlet,

is disposed at an obtuse angle “XI” of greater than 165 degrees (including 180 degrees) relative to the ray 104A, that is extending to the branching point 110:

(a) along the axis 104B of the portion of the upstream fluid passage 104 that is extending from the branching point 110, and

(b) in the direction in which the fluid, that has been received from the hydrocarbon-containing reservoir by the inlet, and which the upstream fluid passage 104 is configured to conduct towards the production conduit 22, is being conducted within the upstream fluid passage 104 when the fluid is received by the inlet.

[0076] In some of these embodiments, for example, the axis 106B, of the portion of the first fluid passage branch 106 that is extending from the branching point, is aligned, or substantially aligned, with the axis 104B of the portion of the upstream fluid passage 104 that is extending to the branching point 110.

[0077] The axis 108A, of the portion of the second fluid passage branch 108 that is extending from the branching point 110, is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis 104A of the portion of the upstream fluid passage 104 that is extending to the branching point 110. In some of these embodiments, for example, the axis, of the portion of the second fluid passage branch that is extending from the branching point, is disposed orthogonally, or substantially orthogonally, relative to the axis of the portion of the upstream fluid passage that is extending to the branching point.

[0078] By configuring the relative orientation of the fluid passages 104, 106, 108 in this manner, where the fluid being conducted within the upstream fluid passage 104 includes steam, and when the fluid reaches the branching point 110, the steam, by virtue of its momentum and relatively low viscosity, has a tendency to remain flowing in the same or substantially the same direction. This means that the steam (and also any hydrocarbons, such as bitumen, that may be entrained within the steam) has a tendency to continue flowing into the first fluid passage branch 106, rather than changing direction to enter the second fluid passage branch 108. In contrast, liquid fluids being conducted through the upstream fluid passage 104, such as those including hydrocarbons such as bitumen, are flowing at lower rates and are, typically, characterized with higher viscosities. As a result, the flow of the liquid fluid is more likely to be diverted into the second fluid passage branch 108.

[0079] The flow control device 100 is further configured such that, relative to the second fluid passage branch 108, the first fluid passage branch 106 is configured to provide greater resistance to fluid flow. In this respect, because the steam is conducted through the first fluid passage branch 106 (as explained above), the steam is subjected to greater interference to flow. In this respect, resistance to the

flow of steam from the oil sands reservoir 30 and into the production conduit 22, is effected by the flow control device 100.

[0080] In some embodiments, for example, the resistance to fluid flow, which the first fluid passage branch is configured to provide, is greater than the resistance to fluid flow, which the second fluid passage branch is configured to provide, by a multiple of at least 1.1, such as at least 1.3, or such as at least 1.5.

[0081] In some embodiments, for example, the length of the first fluid passage branch 104, measured along the axis 106B of the first fluid passage branch 106, is greater than the length of the second fluid passage branch 108, measured along the axis 108B of the second fluid passage branch. In some of these embodiments, for example, the length of the first fluid passage branch 106, measured along the axis 106B of the first fluid passage branch, is greater than the length of the second fluid passage branch 108, measured along the axis 108B of the second fluid passage branch, by a multiple of at least two (2), such as at least three (3), or such as at least four (4), or such as at least five (5).

[0082] In some embodiments, for example, additional branching points 110a, 110b may be disposed downstream of the branching point 110, and within the first fluid passage branch 106, for receiving fluid from a preceding branching point upstream, as illustrated in Figure 5. Such additional branching points 110a, 110b are configured, similarly to the branching point 110, to branch into fluid passages having relative orientations as those described above. Such additional branching points 110a, 110b may provide for a more robust design, being tolerant to different flow parameters of the fluid received by the upstream fluid passage. In this respect, in some operational implementations, for example, liquid may be carried over with steam that enters the fluid passage 106, in cases where the liquid is characterized by one or more of relatively low viscosity, relatively high velocity, or relatively high density.

[0083] In some embodiments, for example, the branching of the upstream fluid passage portion 104 into the first fluid passage branch 100 and the second fluid passage branch 108 is defined by a tee fitting. In some embodiments, for example, the upstream fluid passage 104 extends from the inlet 102 to the branching point 110, such that the inlet 102 defines the inlet of the upstream fluid passage 104.

[0084] In a related aspect, a method is provided of producing bitumen from an oil sands reservoir 30, the method including providing a SAGD well pair 10, 20 and the above-described flow control device 100. Steam is injected into an interwell region 15 between the injection well 110 and the production well 20 such that a first admixture, including bitumen, liquid water, and steam, is generated; and such that at least a fraction of the first admixture is received by the inlet 102 of the flow control device 100. Flow of the received first admixture is conducted by the inlet fluid passage 104 and is then distributed between at least the first and second fluid passage branches 106, 108 within the flow control device 100. In this

respect, the steam tends to flow through the first fluid passage branch 106, and liquid fluids, including hydrocarbons, such as bitumen, tend to flow through the second fluid passage branch 106.

[0085] In another aspect, the second fluid passage branch 108 can operate as an inlet into the device 110 when the pressure near or in the nozzle is lower than the pressure downstream of the device within the production conduit 22. This effect occurs when fluid velocities through the nozzle reach a certain threshold, creating a favourable pressure gradient. The influx of additional fluid in from the secondary outlet will lead to a greater flow rate (and as a consequence pressure drop) through the primary path and outlet.

[0086] In this respect, and referring to Figures 6 to 8, the flow control device 100 may, in some operational implementations, be used with effect that reservoir fluid being produced downhole from the flow control device 100, and being conducted uphole by the production conduit 22, is induced to mix with any steam that may be flowing through the branching point 110, in response to the Venturi effect. Under upset conditions, uncondensed steam (or hot water that has flashed to steam) could be flowing through the branching point 110, and this configuration of the flow control device 100, and its relationship to the production conduit 22 further mitigates the risk of having the steam entering the production conduit 22 under these circumstances. Because the produced fluid, being induced to admix with the steam in response to the Venturi effect, is relatively cooler than the steam, the admixing effects cooling of the steam, which, ultimately, increases the flow path length and, therefore, the pressure drop associated with producing fluids with steam, thereby interfering with steam production, which could have resulted if the steam was conducted to the production conduit 22 at a hotter temperature.

[0087] Under some operating conditions:

- (a) a reservoir fluid mixture is produced through the production well 20 and is conducted through the production well 20 upstream of the flow control device 100; and
- (b) steam is conducted across the branching point 110 to generate a Venturi effect.

[0088] Because of the above-described relative orientations of the fluid passages 104, 106, 108, and because steam (either uncondensed steam that has entered the flow control device 100 or hot water that has entered the flow control device and flashed within the passage 104) is being conducted within the upstream fluid passage 104, when the steam reaches the branching point 100, the steam, by virtue of its momentum and relatively low viscosity, has a tendency to remain flowing in the same or substantially the same direction. This means that the steam has a tendency to continue flowing into the first fluid passage branch 106, rather than changing direction to enter the second fluid passage branch 108. The flowing steam generates a suction pressure at the branching point 100, inducing flow of the produced fluid, being conducted through the production conduit 22, via the second fluid passage branch 108, to the

branching point 100, such that the steam is admixed with the produced fluid, resulting in cooling of the steam, and the admixture is conducted downstream through the first fluid passage branch 106.

[0089] The fluid passages 104, 106 are co-operatively configured so as to enable the steam being conducted through the branching point to generate the Venturi effect. In this respect, the upstream fluid passage 104 (upstream of the branching point 110) has a cross-sectional flow area that is greater than the cross-sectional flow area of a connecting fluid passage (a "constricted passage portion 111") which joins the upstream fluid passage 104 to the first fluid passage branch 106. By flowing steam from the upstream fluid passage 104 (having a wider cross-section) through the narrower cross-sectional flow area of the connecting fluid passage, the pressure of the steam decreases and, concomitantly, the steam is accelerated. By virtue of the pressure decrease, a suction pressure is generated at the branching point 110 which is sufficient to induce flow of the produced fluid through the second fluid passage branch 108 and into the branching point 110. The produced fluid is admixed with the steam to produce an admixture which is then conducted from the branching point 110 and to the first fluid passage branch 106.

[0090] In this respect, and again referring to Figures 6 and 8, in some embodiments, for example, the flow control device 100 further includes a Venturi effect-inducing fluid passage 103. The Venturi effect-inducing fluid passage 103 includes the upstream fluid passage 104 and the first fluid passage branch 106, and is further defined by the constricted passage portion 111, wherein at least a portion of the constricted passage portion 111 is disposed upstream of the branching point 110. The cross-sectional flow area of the constricted passage portion 111 is less than the cross-sectional flow area of the portion 109 of the device-traversing fluid passage 105 that is disposed upstream of the constricted passage portion 111.

[0091] In some embodiments, for example, the cross-sectional flow area of the portion 109 of the Venturi effect-inducing fluid passage 103, that is disposed downstream of the constricted passage portion 111, is greater than the cross-sectional flow area of the constricted passage portion 111. In such embodiments, for example, as the admixture is conducted through the wider cross-sectional flow area of the portion 109 of the device-traversing fluid passage 105 that is disposed downstream of the constricted passage portion (the "downstream fluid passage 109"), the admixture decelerates, and, concomitantly, increases in pressure. Without configuring such portion 109 of the Venturi effect-inducing fluid passage 103 to have a cross-sectional flow area that is greater than the cross-sectional flow area of the constricted fluid passage 111, fluid flow through the downstream fluid passage 109 would be relatively higher and experience higher pressure drop due to frictional losses. As such, a greater fraction of the available pressure would be dedicated to overcoming these frictional losses, resulting in a relatively higher pressure at the branching point 110, and thereby reducing the driving force available for the Venturi effect and, consequently, the ability to induce fluid from the production well to admix with steam at the branching point 110.

[0092] With respect to those embodiments where the cross-sectional flow area of the downstream fluid passage 109 is greater than the cross-sectional flow area of the constricted passage portion 111, in some of these embodiments, for example, the branching point 110 is disposed within the constricted passage portion 111, such that the first fluid passage branch 106 is disposed downstream of the constricted passage portion 111 (see Figure 6). As a consequence, the cross-sectional flow area of the first fluid passage branch 106 is greater than the cross-sectional flow area of the constricted passage portion 111.

[0093] Also with respect to those embodiments where the cross-sectional flow area of the downstream fluid passage 109 is greater than the cross-sectional flow area of the constricted passage portion 111, in some of these embodiments, for example, and referring to Figure 7 the branching point 110 is disposed downstream of the constricted passage portion 111 (and, as a necessary incident, as is the first fluid passage branch 106). As a consequence, the branching point 110 is disposed within a portion of the Venturi effect-inducing fluid passage 103 (i.e. the downstream fluid passage 109) having a cross-sectional flow area that is greater than the cross-sectional flow area of the constricted passage portion 111 (and also, as a necessary incident, the first fluid passage branch 106 has a cross-sectional flow area that is greater than the cross-sectional flow area of the constricted passage portion 111).

[0094] In another aspect, the flow control device 100 is configured to reduce the device's susceptibility to erosion. A flow-dampening chamber 112 is placed upstream of the primary outlet of the device. The chamber 112 has an opening which functions as both entrance and exit to the fluid. The chamber 112 and its opening are oriented such that flow path enters the chamber, where the fluid decelerates, and then exits the chamber and leads towards the primary outlet. The deceleration allows the fluid path to change direction towards the outlet while preventing potential erosive wear from the high-velocity fluids and/or any entrained solid particles. Further, it is expected that liquids and/or solids would accumulate within the chamber, dampening the impact of the main flow on the chamber walls and further reducing the likelihood of erosion. This concept may be applied to any situation where a change in direction or a deceleration of fluids is required and erosive wear is a concern (for example in pipe elbows).

[0095] In this respect, and referring to Figures 9 and 10, the flow control device 100 is provided with a flow dampening chamber 112. In some embodiments, for example, the flow dampening chamber 112 includes a stagnant chamber. The flow dampening chamber 112 is provided for dissipating energy of steam being conducted from the oil sands reservoir 30 and into the production well 20, and to mitigate or limit erosion that may be effected within the production conduit 22 by the entering steam.

[0096] The flow control device 100 includes an inlet 102 for receiving fluid from the hydrocarbon-containing reservoir 20. The flow control device 100 also defines a device-traversing fluid passage 105 for conducting fluid received by the inlet 102 from the hydrocarbon-containing reservoir 30. The device-traversing fluid passage 105 extends from the inlet 102 to the production conduit 22. The device-traversing fluid passage 105 includes an upstream fluid conducting passage 114 and a production conduit connecting passage 116. In some embodiments, for example, the device-traversing fluid passage 105 consists of the upstream fluid conducting passage 114 and the production conduit connecting passage 116.

[0097] At a downstream branching point 118, the upstream fluid conducting passage 114 branches into at least the production conduit connecting passage 116 and a fluid connector passage branch 120. The well-connecting passage branch 116 extends from the branching point 118 to the production conduit 22 and is provided for effecting fluid communication between the branching point 118 and the production conduit 22, and thereby conducting fluid from the branching point 118 to the production conduit 22. The fluid connector passage branch 120 extends from the branching point 118 to the flow dampening chamber 112 for effecting fluid communication between the device-traversing fluid passage 105 and the flow dampening chamber 112.

[0098] Referring to Figure 9, the ray 120A that is extending from the branching point 118:

(a) along the axis 120B of the portion of the fluid connector passage branch 120 that is extending from the branching point 118, and

(b) in the direction in which at least a fraction of the fluid, that has been received by inlet 102 from the hydrocarbon-containing reservoir, and which the fluid connector passage branch 120 is configured to conduct towards the flow dampening chamber 112, is being conducted within the fluid connector passage branch 120 when the fluid is being received by the inlet 102,

is disposed at an obtuse angle "X2" of greater than 165 degrees (including 180 degrees) relative to the ray 114A, that is extending to the branching point 118:

(a) along the axis 114B of the portion of the upstream fluid conducting passage 114 that is extending from the branching point 118, and

(b) in the direction in which the fluid, that has been received by the inlet 102 from the hydrocarbon-containing reservoir, and which the upstream fluid conducting passage 114 is configured to conduct towards the flow dampening chamber 112, is being conducted within the upstream fluid conducting passage 114 when the fluid is received by the inlet 102.

[0099] In some of these embodiments, for example, the axis 120B of the portion of the fluid connector passage branch 120 that is extending from the branching point 118, is disposed in alignment, or substantial alignment, with the axis 114B of the portion of the upstream fluid conducting passage 114 that is extending to the downstream branching point 118.

[00100] The axis 116B, of the portion of the production well connecting passage 116 that is extending from the downstream branching point 118, is disposed at an angle of between 45 degrees and 135 degrees relative to the axis 114B of the portion of the upstream fluid conducting passage 114 that is extending to the downstream branching point 118. In some embodiments, for example, the axis 116B, of the portion of the production conduit connecting passage 116 that is extending from the downstream branching point 118, is disposed orthogonally, or substantially orthogonally, relative to the axis 114B of the portion of the upstream fluid conducting passage 114 that is extending to the downstream branching point 118.

[00101] In some embodiments, for example, the flow dampening chamber 112 includes a dimension, extending along the axis 120B of the portion of the fluid connector passage branch 120 that is extending from the branching point 118, equivalent to at least one (1) diameter of the upstream fluid conducting passage 114. In some of these embodiments, for example, this dimension is at least 1.5 diameters of the upstream fluid conducting passage 114, such as at least two (2) diameters of the upstream fluid conducting passage 114.

[00102] In some embodiments, for example, the flow dampening chamber 112 includes a diameter that is equivalent to at least one (1) diameter of the upstream fluid conducting passage 114. In some of these embodiments, for example, the diameter of flow dampening chamber 112 is at least 1.5 diameters of the upstream fluid conducting passage 114, such as at least two (2) diameters of the upstream fluid conducting passage 114.

[00103] By configuring the relative orientation of the fluid passages 114, 116, 120 in this manner, where the fluid being conducted within the upstream fluid conducting passage 114 includes uncondensed steam, and when the fluid reaches the branching point 118, the uncondensed steam, by virtue of its momentum and relatively low viscosity, has a tendency to remain flowing in the same or substantially direction. This means that the uncondensed steam has a tendency to continue flowing into the flow dampening chamber 112, rather than changing direction to enter the well connecting passage. As a result, the steam flows into the flow dampening chamber 112, loses energy, eventually reversing its direction and exiting the chamber 112, and then proceeding to flow to the production conduit 22 via the production conduit connecting passage 116. The dampening of the steam flow further contributes to the restricting of stream flow from the oil sands reservoir 30 to the production well 20, and also mitigates erosion, including that which may be caused by entrained particulate solids. Any solids within the fluid that reaches the flow dampening chamber 112 may accumulate within the chamber 112, thereby

providing additional erosion protection from impacting particulate solids. Like the uncondensed steam, entrained solids will also have a tendency to flow into the dampening chamber 112: Once in the dampening chamber, the solids will accumulate within the dampening chamber 112 or exit the chamber 112 at a reduced velocity.

[00104] In a related aspect, there is provided a method of producing bitumen from an oil sands reservoir 30, the oil sands reservoir having a SAGD well pair 10, 20, and the flow control device 100 being installed in fluid communication with the production well 20 of the SAGD well pair. Steam is injected into the reservoir 30 such that mobilization of the bitumen is effected. Under upset conditions, uncondensed steam may enter the flow control device 100 through the inlet 102 and is conducted to the formation fluid conducting passage 114. At least a fraction of the received reservoir fluid mixture fraction is conducted to the flow dampening chamber 112, via the formation fluid conducting passage 114, so as to effect a reduction in the mass flow rate of the conducted reservoir fluid mixture fraction. The energy-reduced reservoir fluid mixture fraction is then conducted to the production conduit 22, enabling recovery of any entrained bitumen through the production well 20.

[00105] In another aspect, the device 100 is configured to effect a pressure drop through the use of a nozzle followed by a frictional-path geometry, placed in series. The nozzle creates a dynamic pressure drop primarily by accelerating the fluid, while the frictional-path geometry creates a pressure drop through viscous shear.

[00106] The nozzle is sized such that a liquid that is at saturated or near-saturated conditions will incur some phase change to gas on account of the pressure drop within the nozzle. The frictional-path geometry is sized such that minimal pressure drop will occur for single-phase liquid flow for the design mass flow rate, however more significant pressure drop will occur when a lower-density (and thus higher-velocity) gas phase is present.

[00107] As such, under certain operating conditions, gas evolves from the liquid at the nozzle and creates a greater pressure drop both through the nozzle and the frictional-path geometries, when compared with the pressure drop for a single-phase liquid flow at the same mass flow rate.

[00108] This implementation includes the sequence of any nozzle or orifice that creates a dynamic pressure drop, followed in series by a geometry that is designed to create a frictional-path or wall-shear-based pressure drop.

[00109] In this respect, referring to Figures 11 and 12, the flow control device 100 is configured such that, when the fluid received by the flow control device 100 includes hot water, the hot water becomes vaporized, and relatively significant interference is provided to the resulting steam flow through the flow control device 100. On the other hand, when the fluid received by the flow control device 100 is liquid

(for example, liquid including condensed water and bitumen) at a relatively lower temperature, relatively less interference is provided to the flow of such liquid through the flow control device 100.

[00110] In this respect, the flow control device 100 includes an inlet 102 for receiving reservoir fluid from the oil sands reservoir 20, and a device-traversing fluid passage 105 extending from the inlet to the production conduit 22. The device-traversing fluid passage 105 is provided for conducting the received reservoir fluid to the production conduit 22. In some embodiments, for example the inlet 102 defines the inlet of the device-traversing fluid passage 105.

[00111] The device-traversing fluid passage 105 includes an upstream fluid conducting passage 124 and a downstream fluid conducting passage 126. In some embodiments, for example, and specifically referring to Figure 11, the device-traversing fluid passage 105 consists of the upstream fluid conducting passage 124 and the downstream fluid conducting passage 126.

[00112] The downstream fluid conducting passage 126 has a cross-sectional flow area that is greater than the cross-sectional flow area of the upstream fluid passage 124. In this respect, the upstream fluid passage 124 is relatively more constricted than the downstream fluid passage 126. By flowing relatively hot water through the relatively constricted upstream fluid passage 124, the conducted hot water is accelerated, resulting in a concomitant pressure decrease sufficient to effect vaporization of at least a fraction of the flowing hot water. As the vaporized hot water (i.e. steam) is conducted through the wider cross-sectional flow area of the downstream fluid conducting passage 126, the admixture decelerates, and, concomitantly, increases in pressure, and experiences flow resistance while being conducted through the downstream fluid conducting passage 126. Because the downstream fluid conducting passage 126 has a relatively larger cross-section flow area, if the fluid received by the inlet 102 is liquid (for example, liquid including condensed steam and bitumen) at a relatively lower temperature, the downstream fluid conducting passage 126 does not provide significant flow resistance to the liquid flow and the liquid is conducted through the downstream fluid conducting passage at an acceptable rate.

[00113] In a related aspect, there is provided another method of producing bitumen from an oil sands reservoir. The method includes injecting steam into the reservoir 30 such that bitumen is mobilized, and a reservoir fluid mixture, including hot water, is generated. The reservoir fluid mixture is conducted through a constricted passage such that the conducted hot water is accelerated, resulting in a concomitant pressure decrease sufficient to effect vaporization of at least a fraction of the conducted hot water. The vaporized water is then conducted through a downstream fluid passage, having a relatively larger cross-sectional flow area than the constricted fluid passage, and to the production well.

[00114] In some embodiments of the flow control device 100, the above-described aspects may be combined, as illustrated in Figure 13 and 14. In It is understood that two or more of the above-described aspects may be combined to provide a flow control device 100 for use with the production conduit 22.

[00115] In the above description, for purposes of explanation, numerous details are set forth in order to provide a thorough understanding of the present disclosure. However, it will be apparent to one skilled in the art that these specific details are not required in order to practice the present disclosure. Although certain dimensions and materials are described for implementing the disclosed example embodiments, other suitable dimensions and/or materials may be used within the scope of this disclosure. All such modifications and variations, including all suitable current and future changes in technology, are believed to be within the sphere and scope of the present disclosure.

CLAIMS

1. A system for the production of fluid from a hydrocarbon-containing reservoir, comprising:
a production conduit for producing fluids from a hydrocarbon-containing reservoir;
a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, including:
 - an inlet for receiving fluid from the hydrocarbon-containing reservoir;
 - an upstream fluid passage for conducting the fluid that has been received by the inlet;
 - a first fluid passage branch disposed in fluid communication with the production conduit;
 - a second fluid passage branch disposed in fluid communication with the production conduit;wherein:
 - the upstream fluid passage branches into at least the first and second fluid passage branches at a branching point, and wherein each one of the first and second fluid passage branches, independently, at least in part, extends from the branching point to the production conduit;
 - an axis of the first fluid passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the upstream fluid passage that is extending to the branching point, and
 - an axis of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the upstream fluid passage that is extending to the branching point.
2. The system as claimed in claim 1,
wherein the axis, of the portion of the first fluid passage branch that is extending from the branching point, is substantially aligned, with the axis of the portion of the upstream fluid passage that is extending to the branching point.
3. The system as claimed in claim 1 or 2;

wherein the axis, of the portion of the second fluid passage branch that is extending from the branching point, is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid passage that is extending to the branching point.

4. The system as claimed in any one of claims 1 to 3;

wherein the resistance to fluid flow, that the first fluid passage branch is configured to provide, is greater than the resistance to fluid flow, that the second fluid passage branch is configured to provide, by a multiple of at least 1.1.

5. The system as claimed in any one of claims 1 to 4;

wherein the length of the first fluid passage branch measured along the axis of the first fluid passage branch is greater than the length of the second fluid passage branch measured along the axis of the second fluid passage branch.

6. The system as claimed in any one of claims 1 to 4;

wherein the length of the first fluid passage branch measured along the axis of the first fluid passage branch is greater than the length of the second fluid passage branch, measured along the axis of the second fluid passage branch by a multiple of at least two (2).

7. The system as claimed in any one of claims 1 to 6;

wherein the branching of the fluid inlet passage portion into the first fluid passage branch and the second fluid passage branch is defined by a tee fitting.

8. The system as claimed in any one of claims 1 to 7, further comprising:

an injection conduit for supplying a mobilizing fluid for effecting mobilization of hydrocarbons in the hydrocarbon-containing reservoir such that the mobilized hydrocarbons are conducted towards the production conduit.

9. The system as claimed in claim 8;

wherein the injection conduit and the production conduit define a SAGD well pair, such that the injection conduit is disposed within an injection well that is disposed above a production well within which the production conduit is disposed.

10. The system as claimed in claim 8;

wherein the injection conduit and the production conduit are disposed within the same well.

11. The system as claimed in any one of claims 1 to 10;

wherein the flow control device further comprises a device-traversing fluid passage, wherein the device-traversing fluid passage includes the upstream fluid passage and the first fluid passage branch, and is further defined by a constricted passage portion, wherein at least a portion of the constricted passage portion is defined upstream of the branching point, wherein the cross-sectional flow area of the constricted passage portion is less than the cross-sectional flow area of a device-traversing fluid passage portion disposed upstream of the constricted passage portion.

12. The system as claimed in claim 11;

wherein the branching point is disposed within the constricted passage portion.

13. The system as claimed in claim 11 or 12;

wherein the cross-sectional flow area of a device-traversing fluid passage portion, that is disposed downstream of the constricted passage portion, is greater than the cross-sectional flow area of the constricted passage portion.

14. The system as claimed in claim 13;

wherein the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion.

15. The system as claimed in claim 11;

wherein the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion;

and wherein the branching point is disposed downstream of the constricted passage portion such that the branching point is disposed within a device-traversing fluid passage portion having a cross-sectional flow area that is greater than the cross-sectional flow area of the constricted passage portion.

16. A system for the production of fluid from a hydrocarbon-containing reservoir, comprising:

a production conduit for producing fluids from a hydrocarbon-containing reservoir;

a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, including:

an inlet for receiving fluid from the hydrocarbon-containing reservoir;

a device-traversing fluid passage extending from the inlet to the production conduit, including:

- an upstream fluid passage for conducting the fluid that has been received by the inlet;
- a first fluid passage branch disposed in fluid communication with the production conduit;
- a second fluid passage branch disposed in fluid communication with the production conduit;
- a constricted passage portion having a cross-sectional area that is less than a cross-sectional flow area upstream of the constricted passage portion;

wherein:

- the upstream fluid passage portion branches into at least the first and second fluid passage branches at a branching point, and wherein each one of the first and second fluid passage branches, independently, at least in part, extends from the branching point to the production conduit;
- an axis of the fluid passage branch that is extending from the branching point is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the upstream fluid passage that is extending to the branching point,
- an axis of the portion of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the upstream fluid passage that is extending to the branching point; and
- at least a portion of the constricted passage portion is defined upstream of the branching point.

17. The system as claimed in claim 16;

wherein the branching point is disposed within the constricted passage portion.

18. The system as claimed in claim 16 or 17;

wherein a cross-sectional flow area of the device-traversing fluid passage portion, that is disposed downstream of the constricted passage portion, is greater than the cross-sectional flow area of the constricted passage portion.

19. The system as claimed in claim 18;

wherein the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion.

20. The system as claimed in claim 16;

wherein the first fluid passage branch is disposed downstream of the constricted passage portion such that the cross-sectional flow area of the first fluid passage branch is greater than the cross-sectional flow area of the constricted passage portion;

and wherein the branching point is disposed downstream of the constricted passage portion such that the branching point is disposed within a device-traversing fluid passage portion having a cross-sectional flow area that is greater than the cross-sectional flow area of the constricted passage portion.

21. The system as claimed in any one of claims 16 to 20,

wherein the axis, of the portion of the first fluid passage branch that is extending from the branching point, is substantially aligned with the axis of the portion of the upstream fluid passage that is extending to the branching point.

22. The system as claimed in any one of claims 16 to 21;

wherein the axis, of the portion of the second fluid passage branch that is extending from the branching point, is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid passage that is extending to the branching point.

23. The system as claimed in any one of claims 16 to 22;

wherein the branching of the fluid inlet passage portion into the first fluid passage branch and the second fluid passage branch is defined by a tee fitting.

24. The system as claimed in any one of claims 16 to 23, further comprising:

an injection conduit for supplying a mobilizing fluid for effecting mobilization of hydrocarbons such that the mobilized hydrocarbons are conducted towards the production conduit.

25. The system as claimed in claim 24;

wherein the injection conduit and the production conduit define a SAGD well pair, such that the injection conduit is disposed within an injection well above a production well within which the production conduit is disposed.

26. The system as claimed in claim 25;

wherein the injection conduit and the production conduit are disposed within the same well.

27. A method of producing heavy oil from a hydrocarbon-containing reservoir, comprising:
providing an injection conduit and a production conduit within the hydrocarbon-containing reservoir;
providing a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, the flow control device including:

an inlet for receiving fluid from the hydrocarbon-containing reservoir;

an upstream fluid passage for conducting fluid that has been received by the inlet from the hydrocarbon-containing reservoir;

a first fluid passage branch disposed in fluid communication with the production conduit;

a second fluid passage branch disposed in fluid communication with the production conduit;

wherein:

the upstream fluid passage branches into at least the first and second fluid passage branches at a branching point;

an axis of the first fluid passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the upstream fluid passage that is extending to the branching point, and

an axis of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the upstream fluid passage that is extending to the branching point

injecting steam into the reservoir via the injection conduit such that mobilized bitumen is generated;
and such that:

(a) a reservoir fluid mixture, including heavy oil and condensed steam, is produced through the production conduit and is conducted through the production conduit upstream of the fluid flow control device;

(b) steam is conducted through the branching point of the fluid flow control device to generate a Venturi effect; and

in response to the Venturi effect, inducing flow of at least a fraction of the produced reservoir fluid mixture from the production conduit and through the second fluid passage branch to the branching point for admixing with at least a fraction of the steam such that an admixture flow is generated and conducted through the first fluid passage branch; and

recovering at least the heavy oil from the production well.

28. A system for the production of fluid from a hydrocarbon-containing reservoir, comprising:

a production conduit for producing fluids from a hydrocarbon-containing reservoir;

a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production well, including:

an inlet for receiving fluid from the hydrocarbon-containing reservoir;

an upstream fluid conducting passage for conducting the fluid received by the inlet;

a flow dampening chamber;

a fluid connector passage branch effecting fluid communication between the upstream fluid conducting passage and the flow dampening chamber;

a production conduit-connecting passage branch extending to the production conduit, and effecting fluid communication between the upstream fluid conducting passage and the production conduit;

wherein:

the upstream fluid-conducting passage branches into at least the fluid connector passage branch and the production conduit-connecting passage branch at a downstream branching point;

an axis of fluid connector passage branch is disposed at an obtuse angle of greater than 165 degrees relative to the an axis of the portion of the upstream fluid conducting passage that is extending to the branching point; and

an axis of the production conduit-connecting passage branch is disposed at an angle of between 45 degrees and 135 degrees relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point.

29. The system as claimed in claim 28;

wherein the axis of the portion of the fluid connector passage branch that is extending from the downstream branching point, is disposed in substantial alignment with the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point;

and wherein the axis, of the portion of the well-connecting passage branch that is extending from the downstream branching point, is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point.

30. The system as claimed in claim 28 or 29;

wherein the flow dampening chamber includes a dimension, extending along the axis of the portion of the fluid connector passage branch that is extending from the branching point, equivalent to at least one (1) diameter of the upstream fluid conducting passage.

31. The system as claimed in any one of claims 28 to 30;

wherein the flow dampening chamber includes a diameter that is equivalent to at least one (1) diameter of the upstream fluid conducting passage.

32. A method of producing bitumen from a hydrocarbon-containing reservoir, comprising:

providing an injection conduit and a production conduit within the hydrocarbon-containing reservoir;

providing a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, the flow control device including:

an inlet for receiving fluid from the hydrocarbon-containing reservoir;

an upstream fluid conducting passage for conducting the fluid received by the inlet;

a flow dampening chamber;

a fluid connector passage branch effecting fluid communication between the upstream fluid conducting passage and the flow dampening chamber;

a production conduit-connecting passage branch extending to the production conduit, and effecting fluid communication between the upstream fluid-conducting passage and the production conduit;

wherein:

the upstream fluid-conducting passage branches into at least the fluid connector passage branch and the production conduit-connecting passage branch at a downstream branching point;

an axis of fluid connector passage branch is disposed at an obtuse angle of greater than 165 degrees relative to the an axis of the portion of the upstream fluid conducting passage that is extending to the branching point; and

an axis of the production conduit-connecting passage branch is disposed at an angle of between 45 degrees and 135 degrees relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point;

injecting steam into the reservoir such that a reservoir fluid mixture is generated and introduced to the upstream fluid conducting passage of the flow control device;

conducting at least steam of the introduced reservoir fluid mixture to the flow dampening chamber, via the upstream fluid conducting passage, so as to effect a reduction in the kinetic energy of the steam; and

conducting the dampened steam to the production conduit through the production conduit-connecting passage branch.

33. The system as claimed in claim 28;

wherein the axis of a portion of the fluid connector passage branch that is extending from the downstream branching point, is disposed in substantial alignment with the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point;

and wherein the axis of the portion of the production conduit-connecting passage branch that is extending from the downstream branching point is disposed substantially orthogonally relative to the axis of the portion of the upstream fluid conducting passage that is extending to the downstream branching point.

34. The system as claimed in claim 28 or 29;

wherein the conducted reservoir fluid mixture fraction includes solid particulate and the solid particulate is entrained with the steam that is conducted to the flow dampening chamber.

35. A system for the production of fluid from a hydrocarbon-containing reservoir, comprising:

a production conduit for producing fluids from a hydrocarbon-containing reservoir;

a flow control device for regulating the flow of fluid from the hydrocarbon-containing reservoir to the production conduit, including:

an inlet for receiving fluid from the hydrocarbon-containing reservoir;

a device-traversing fluid passage extending from the inlet to the production conduit, including:

a first branching fluid passage for conducting the fluid that has been received by the inlet;

a first fluid passage branch disposed in fluid communication with the production conduit;

a constricted passage portion;

a second fluid passage branch disposed in fluid communication with the production conduit;

wherein:

the first branching fluid passage branches into at least the first and second fluid passage branches at a first branching point, and wherein each one of the first and second fluid passage branches, independently, at least in part, extends from the first branching point to the production conduit;

relative to the second fluid passage branch, the first fluid passage branch is configured to provide greater resistance to fluid flow;

the first fluid passage branch has a cross-sectional flow area that is greater than the cross-sectional flow area of the portion of the device-traversing fluid passage that is disposed upstream of the first fluid passage;

an axis of a portion of the first fluid passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of the portion of the first branching fluid passage that is extending to the first branching point;

an axis of the second fluid passage branch is disposed at an angle of between 45 degrees and 135 degrees, relative to the axis of the portion of the first branching fluid passage that is extending to the first branching point; and

and at least a portion of the constricted passage portion is defined upstream of the first branching point, wherein the cross-sectional flow area of the constricted passage portion is less than the cross-sectional flow area of a device-traversing fluid passage portion that is disposed upstream of the constricted passage portion;

a flow dampening chamber;

wherein:

the first fluid passage branch includes:

a downstream branching fluid passage that branches at a second branching point into:

a fluid connector passage branch that extends into the flow dampening chamber; and


a production conduit-connecting passage branch that extends into the production conduit;

wherein:

an axis of the fluid connector passage branch is disposed at an obtuse angle of greater than 165 degrees relative to an axis of a portion of the downstream branching fluid passage that is extending to the second branching point, and

an axis of the production conduit-connecting passage branch is disposed at an angle of between 45 degrees and 135 degrees relative to the axis of the portion of the downstream branching fluid passage that is extending to the second branching point.

1/15

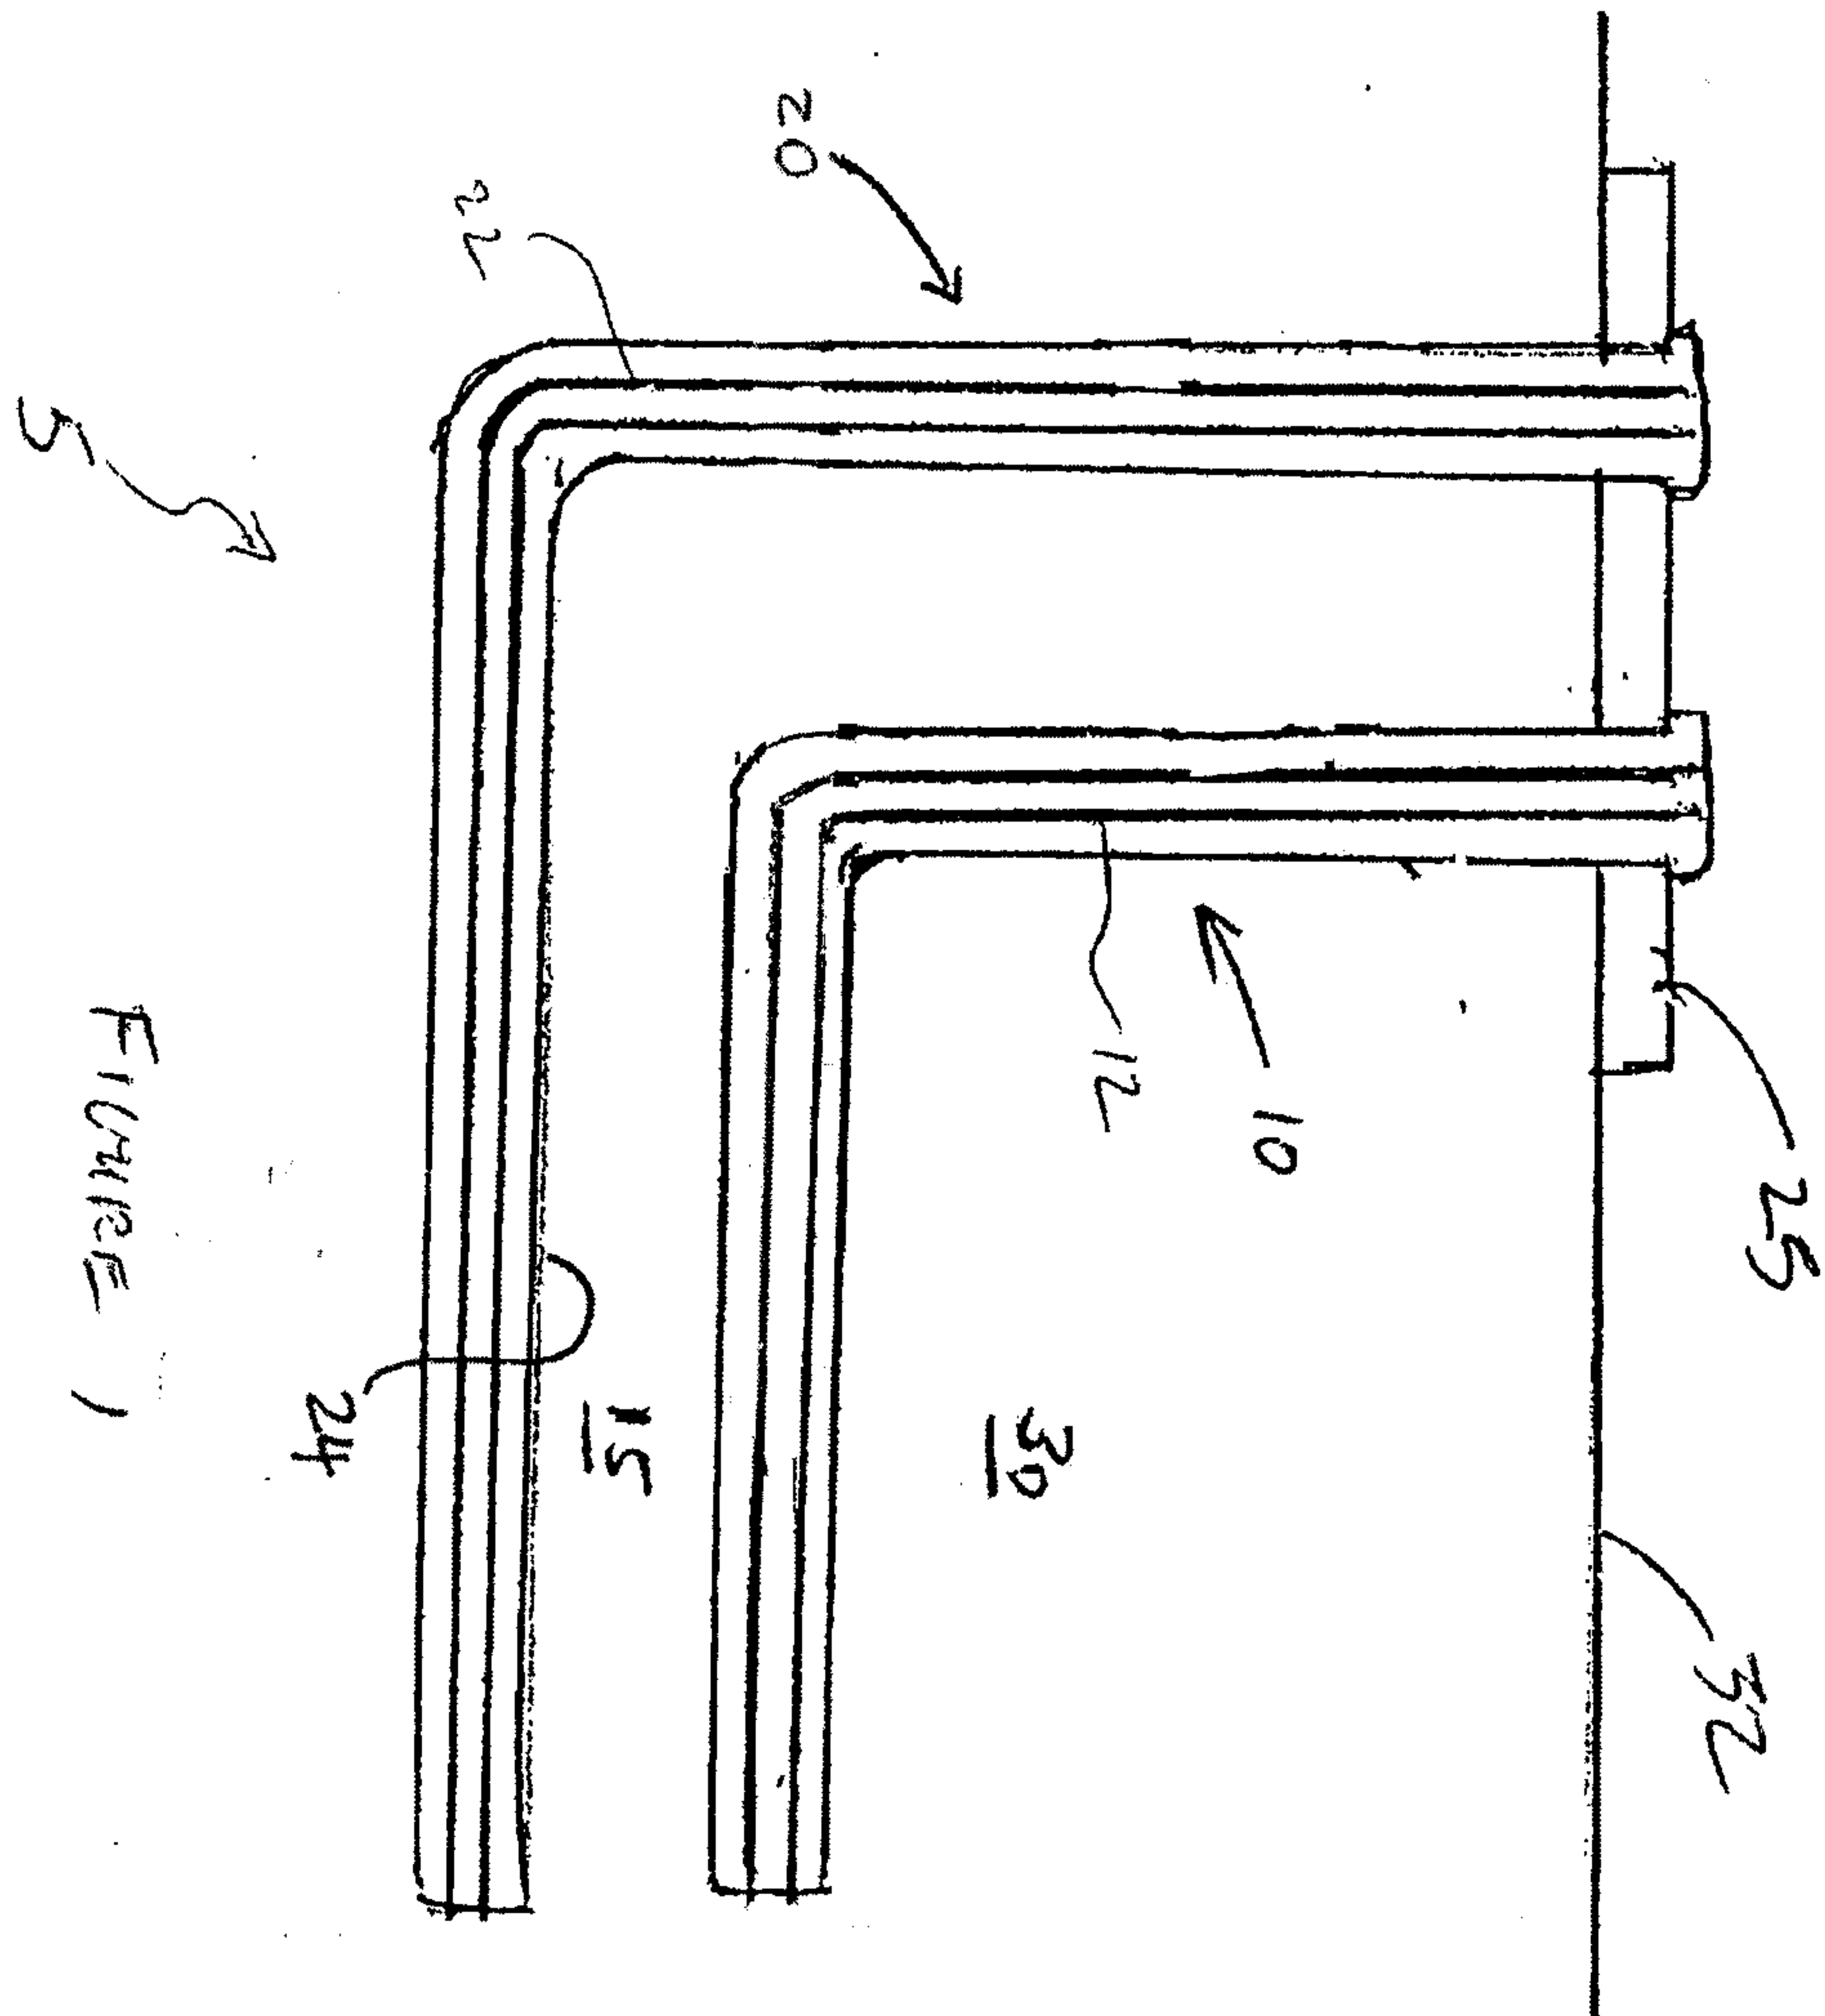


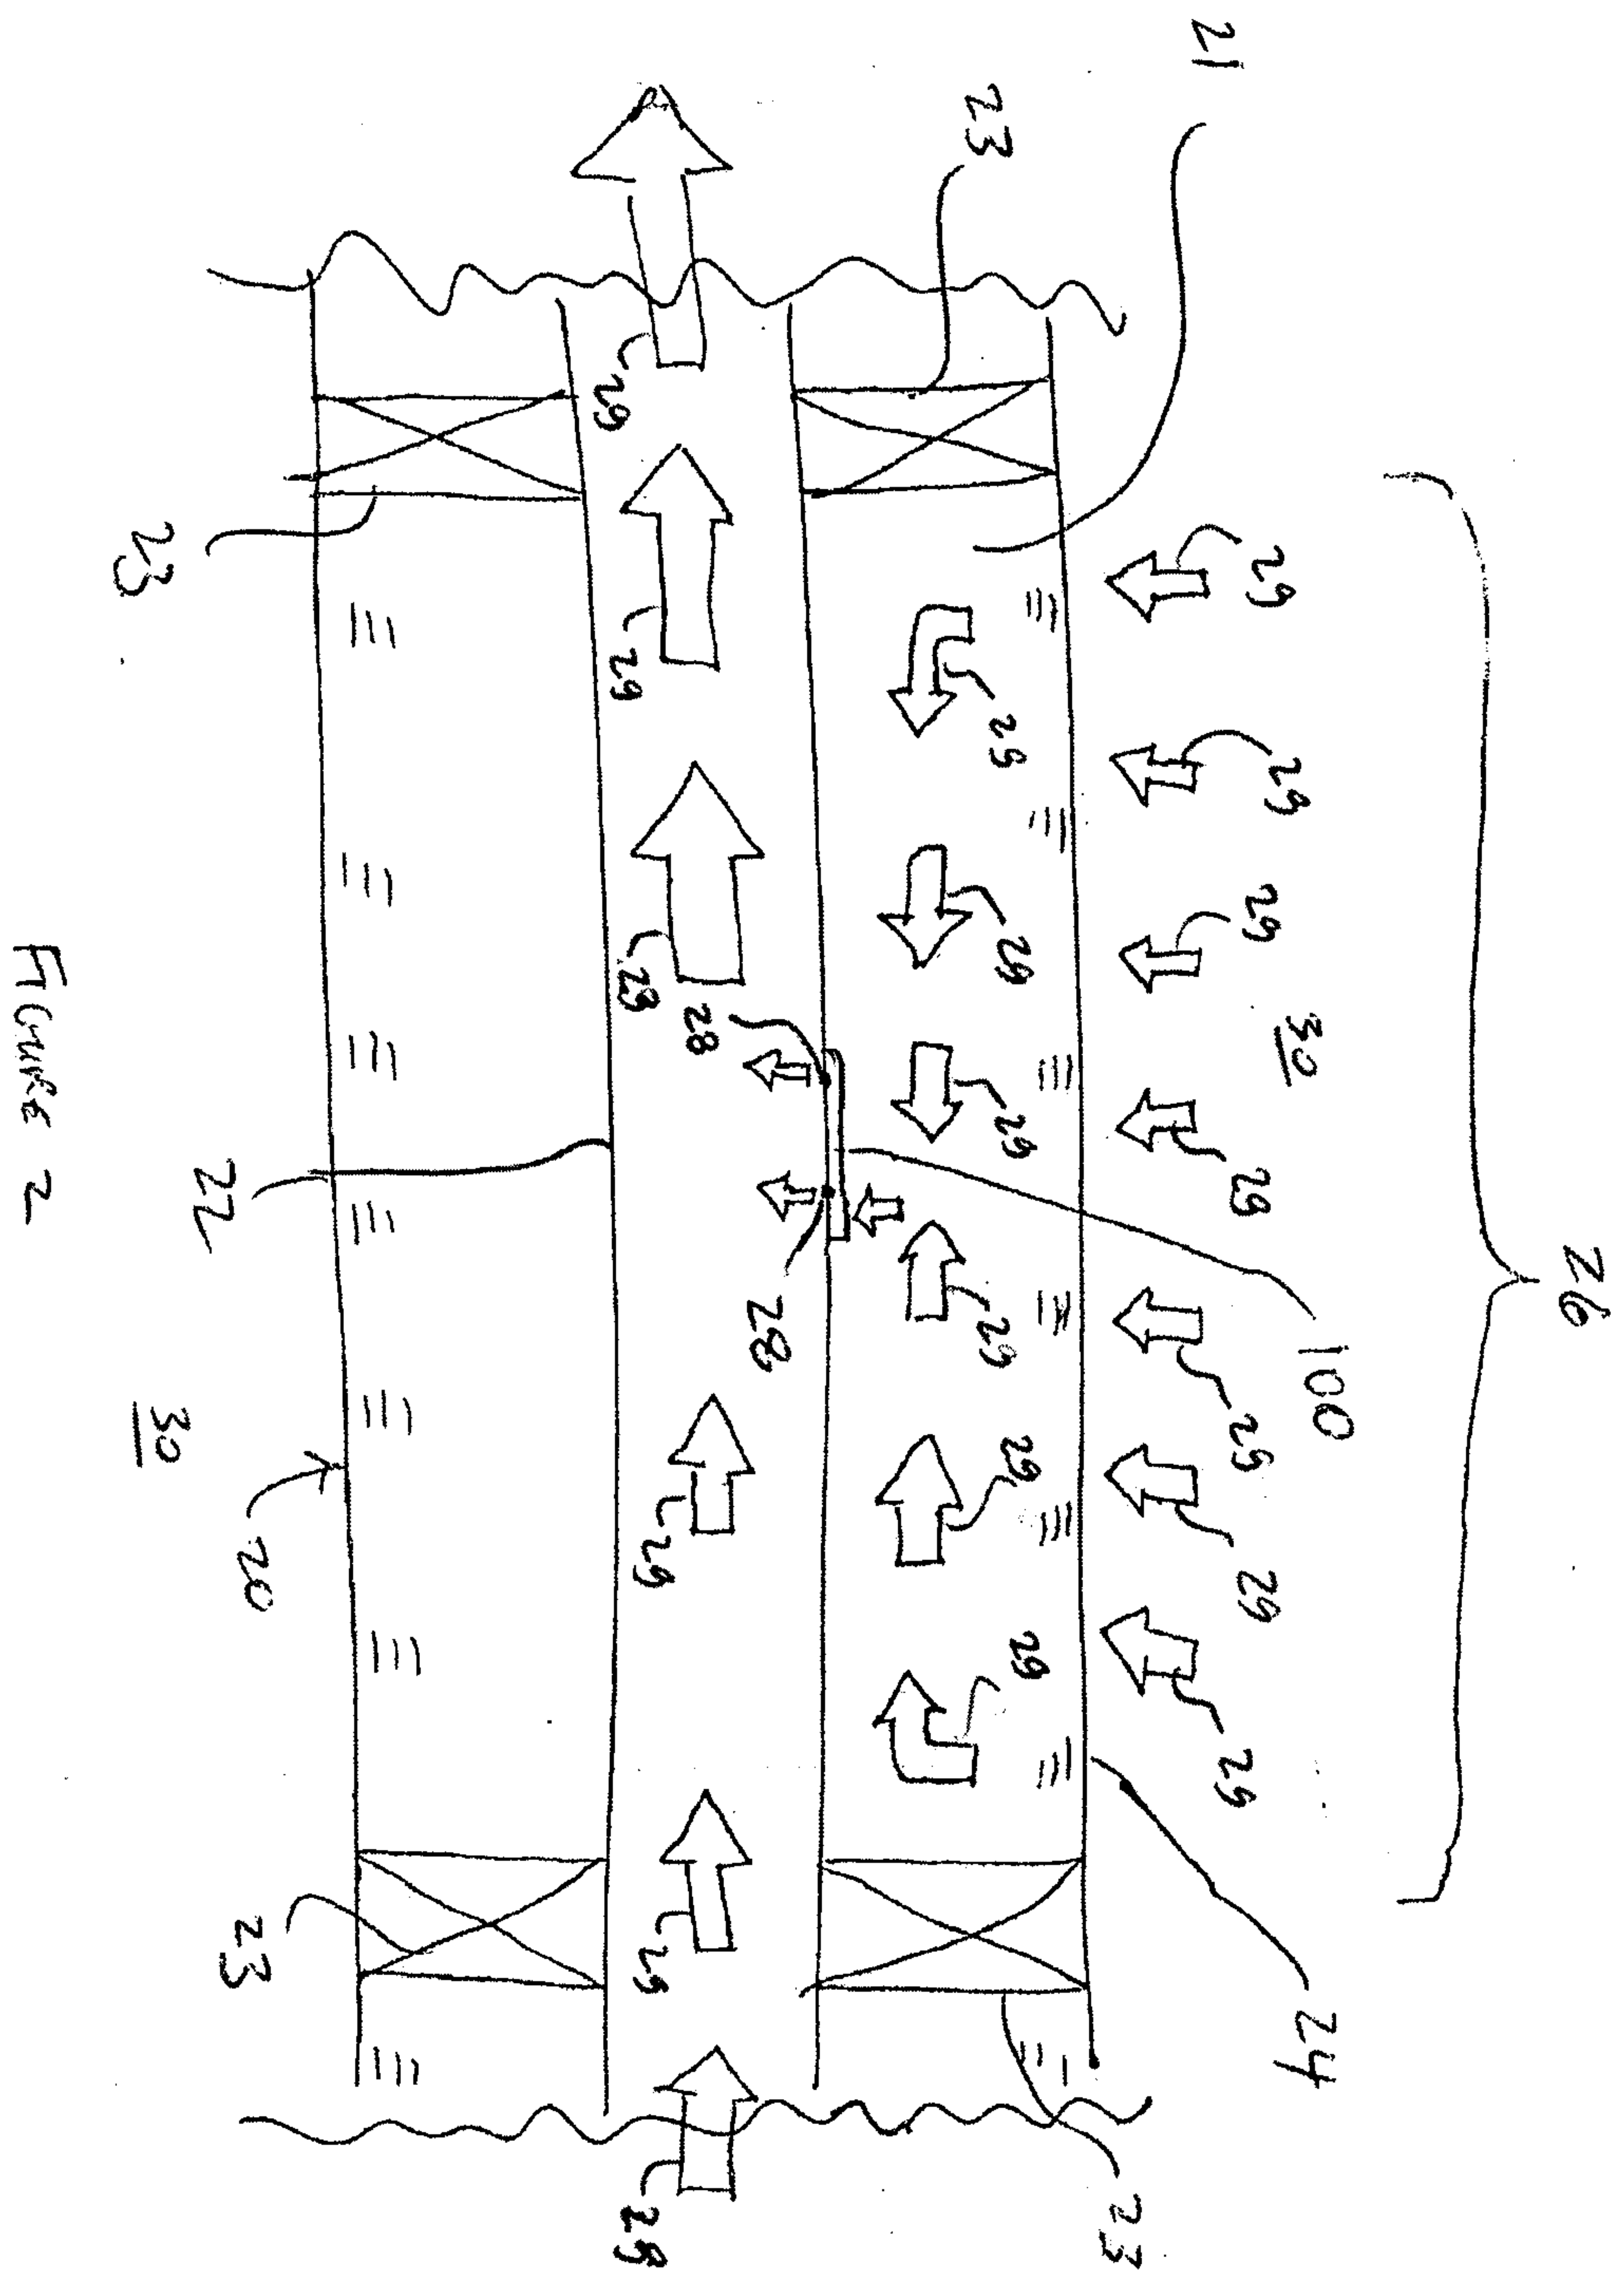



FIGURE 2

3/15

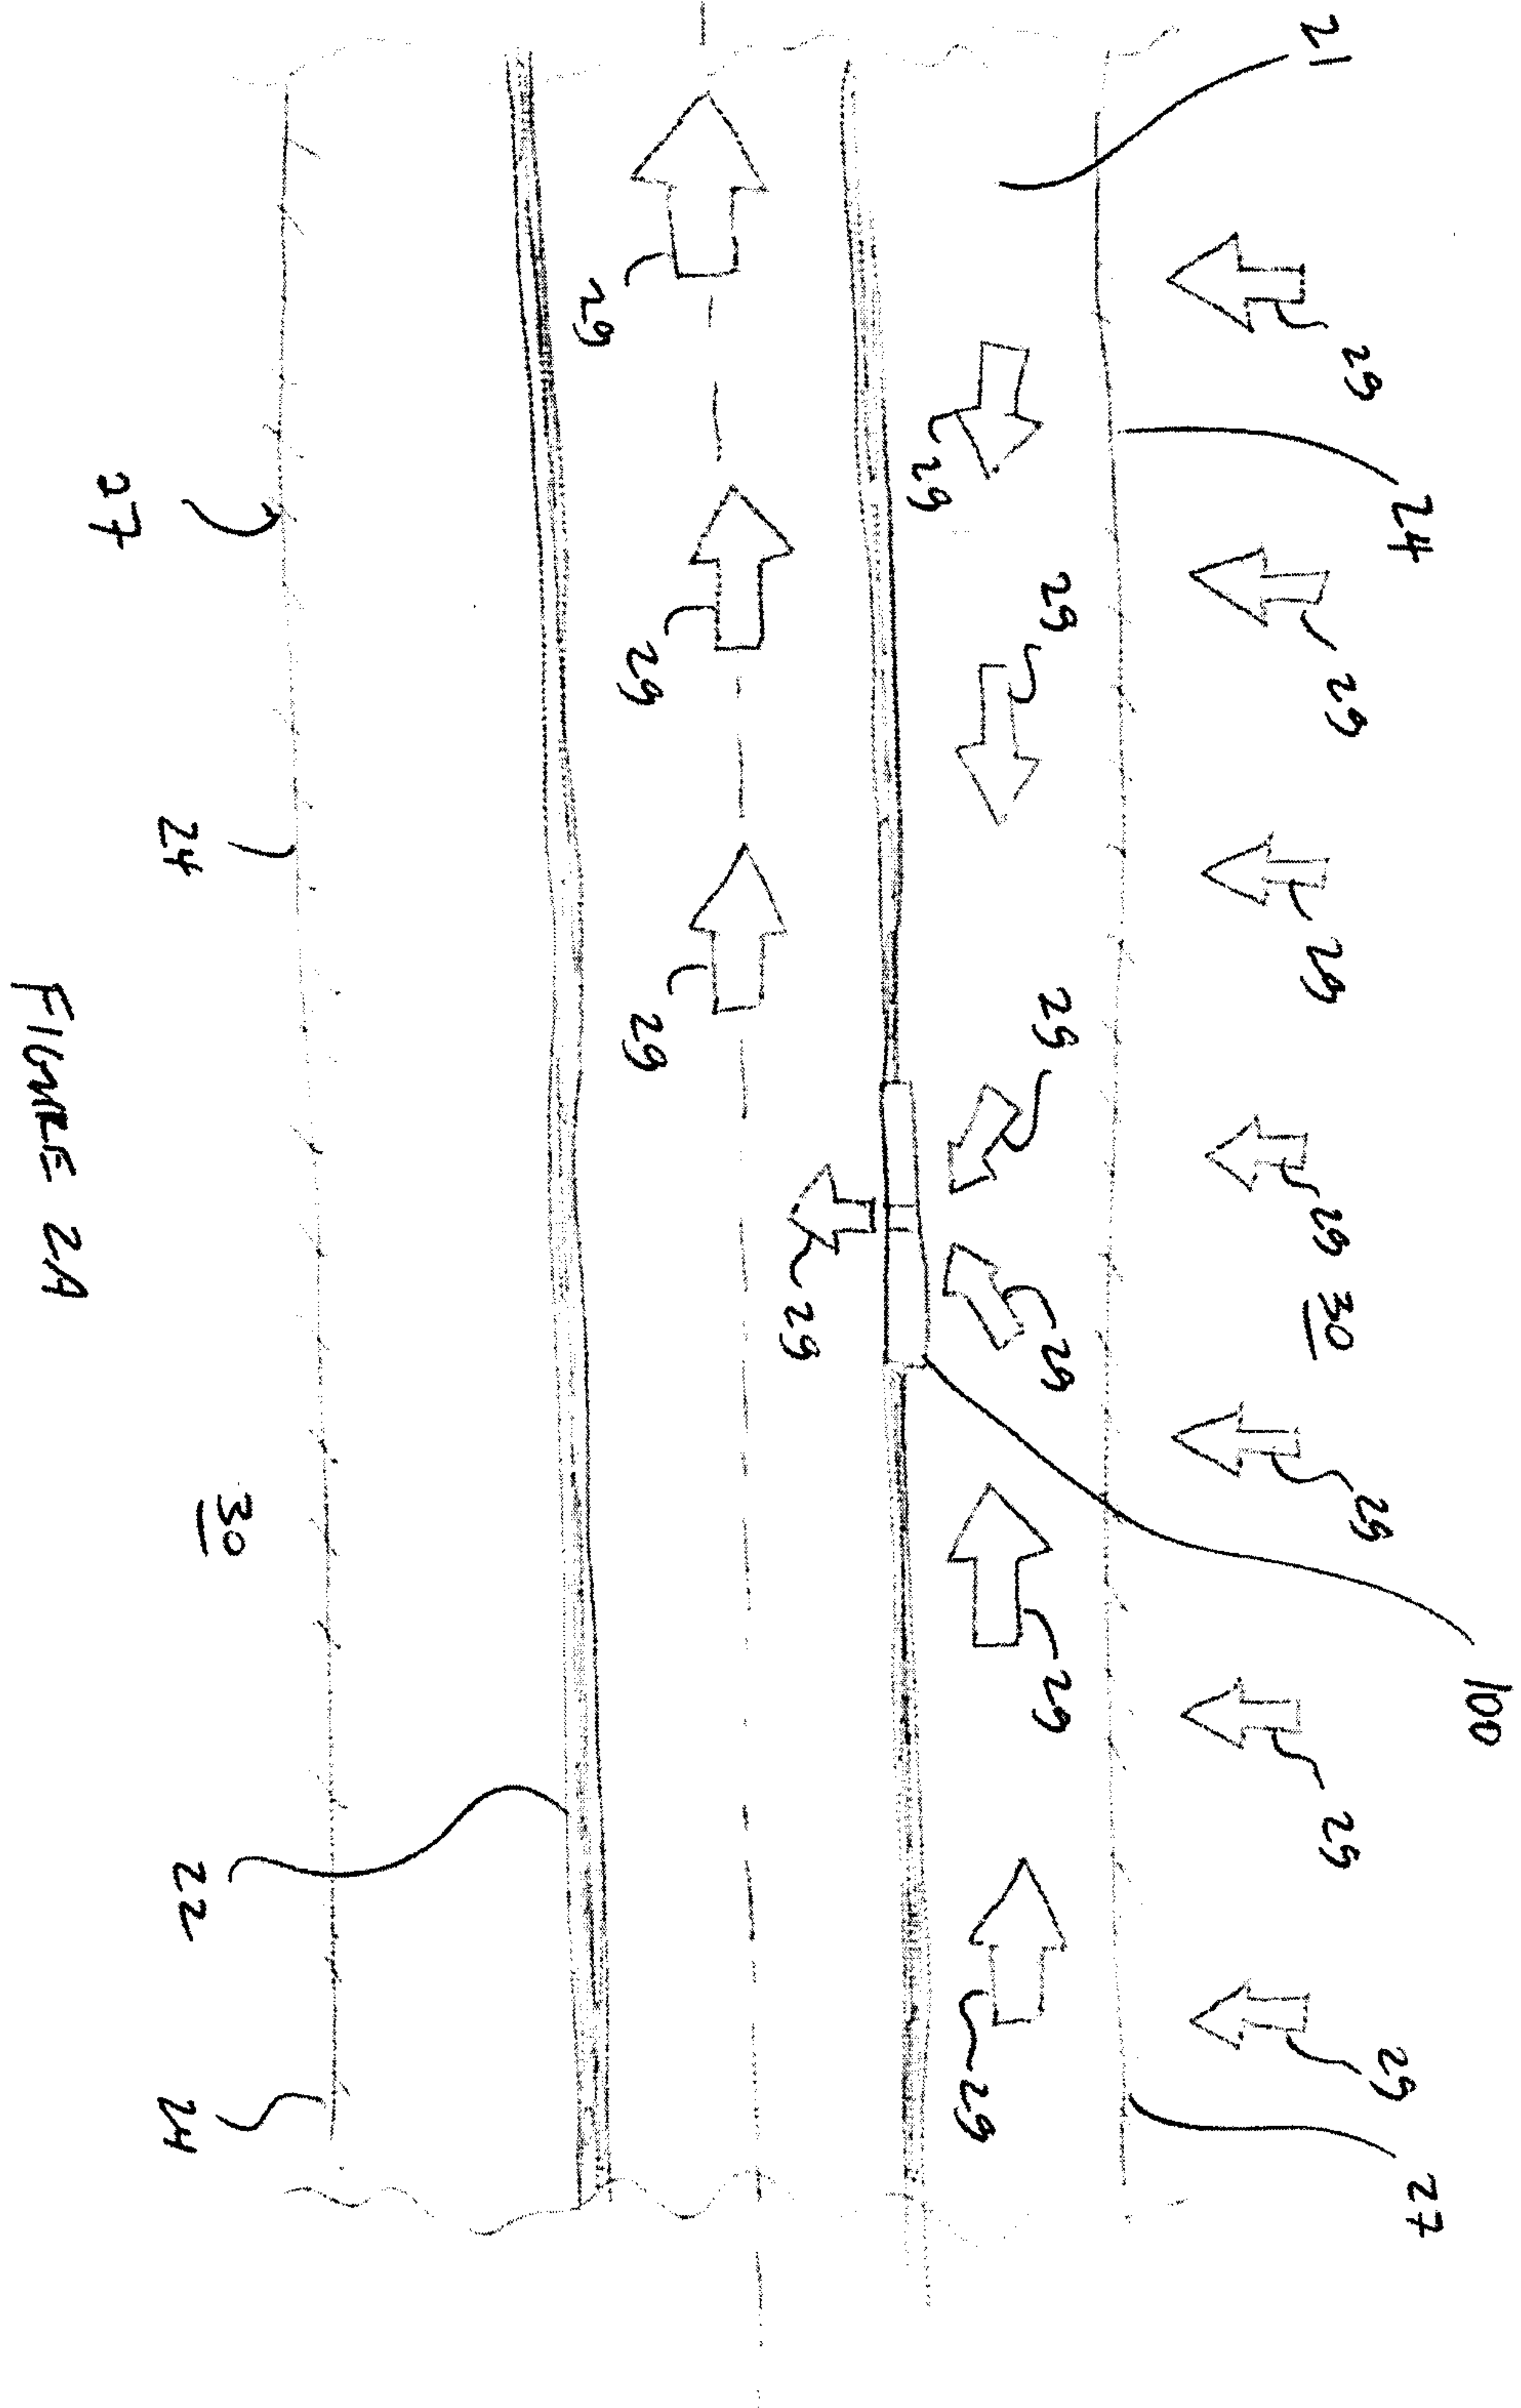

4/15

FIGURE 3

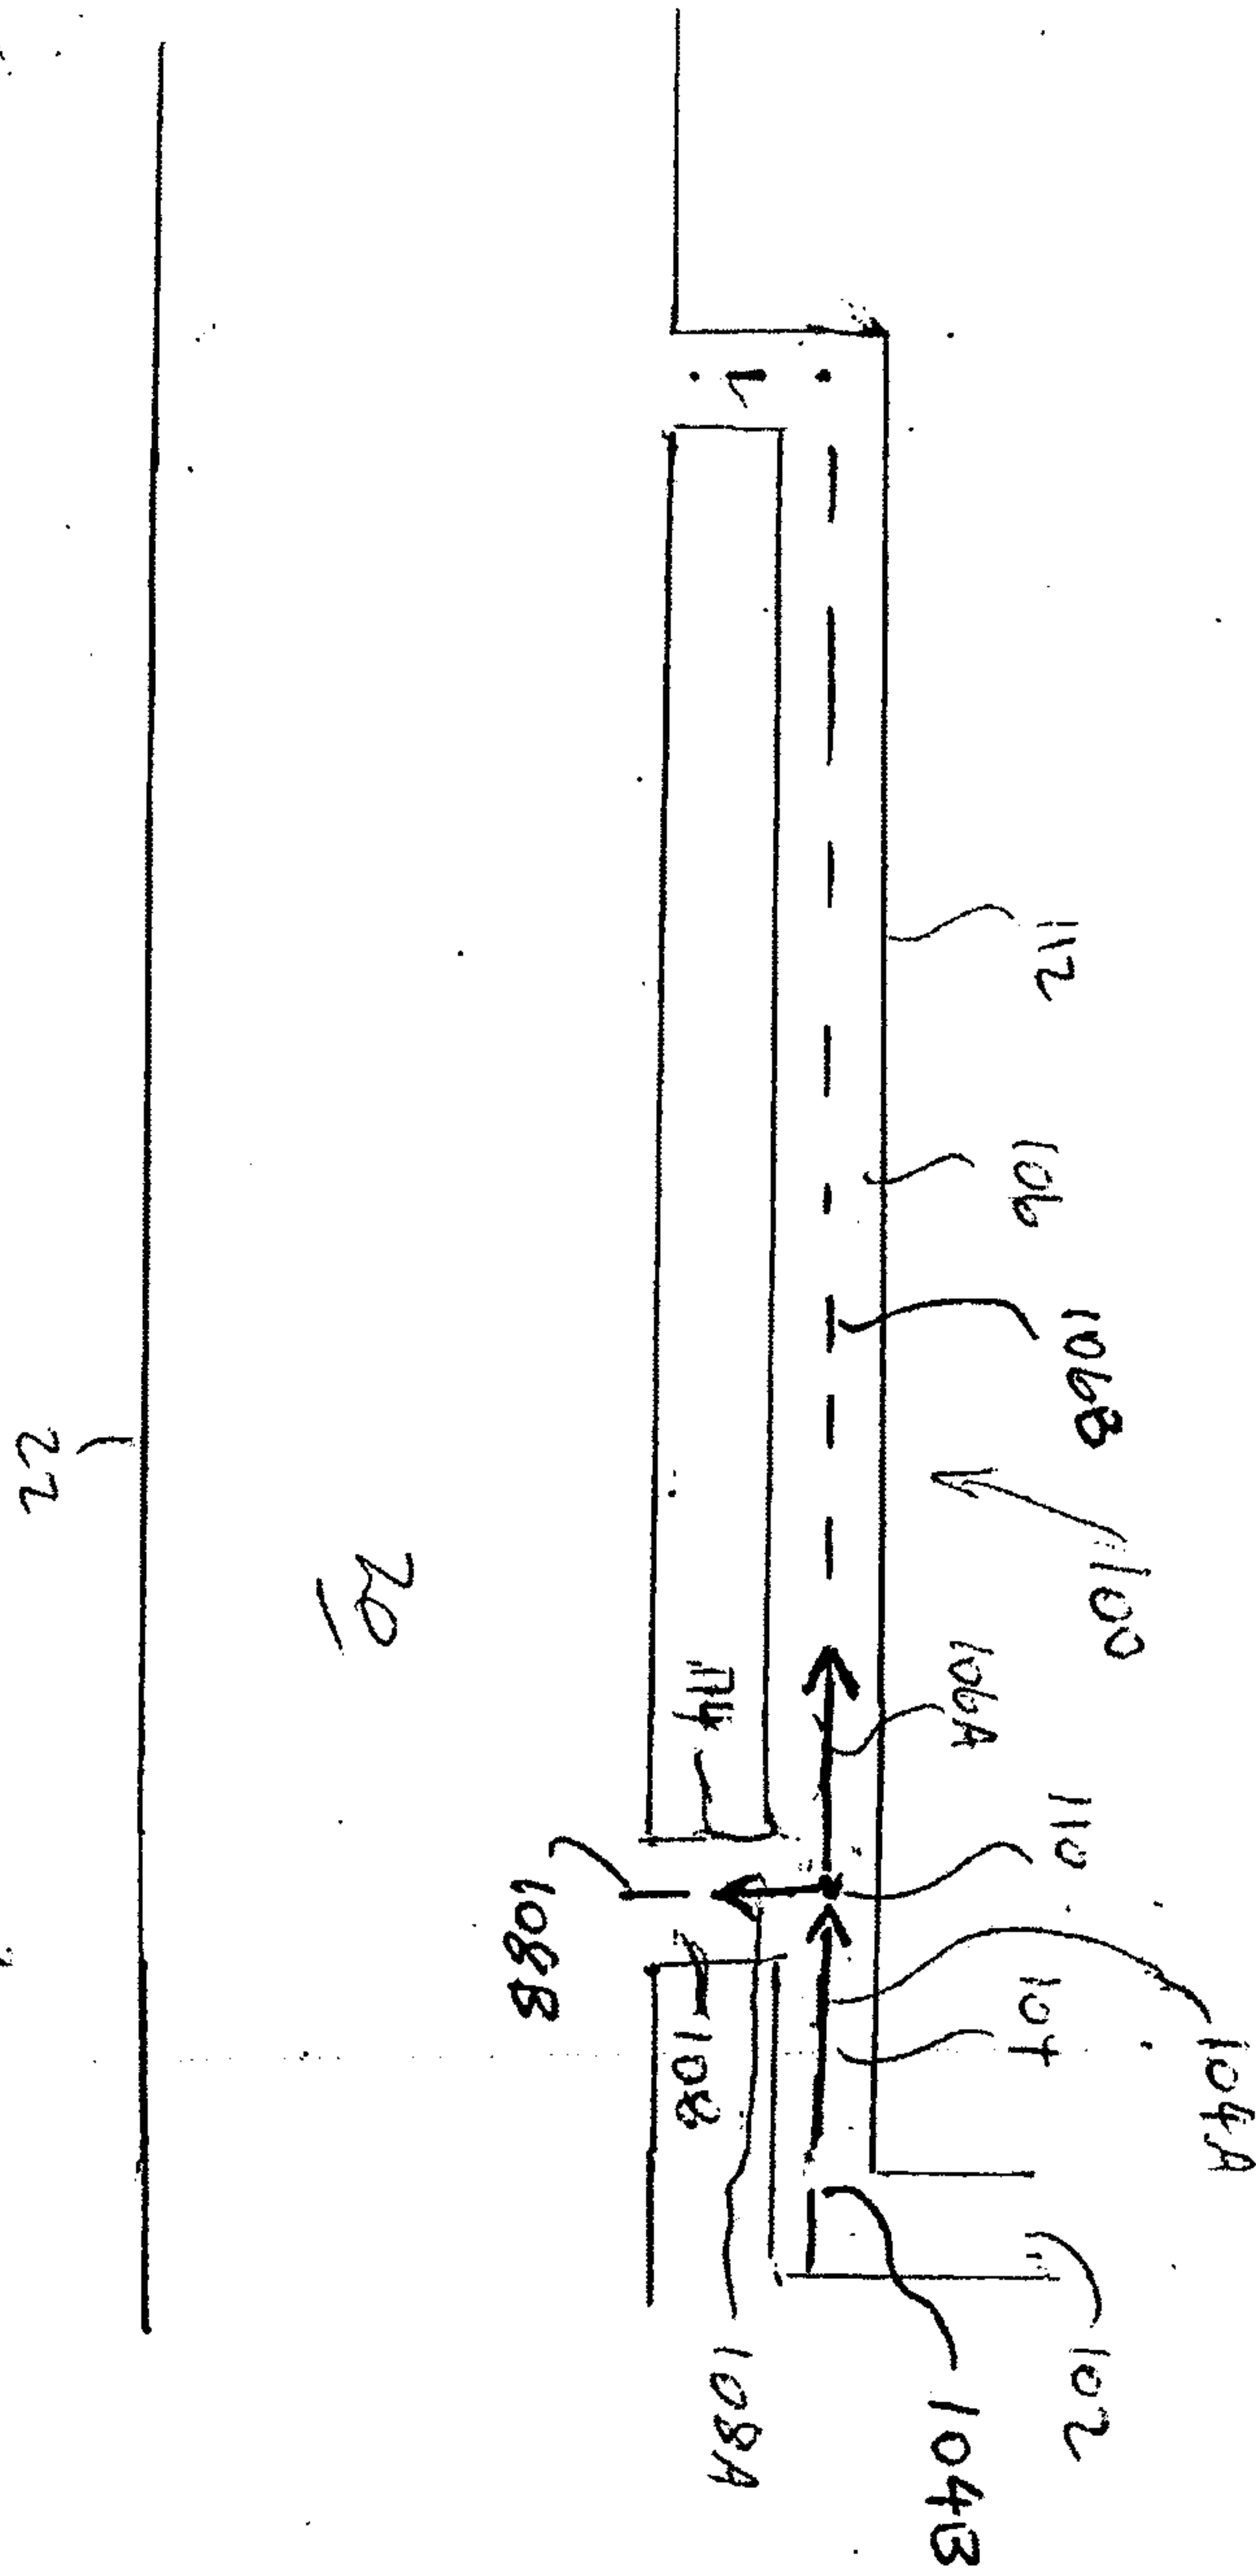

5/15


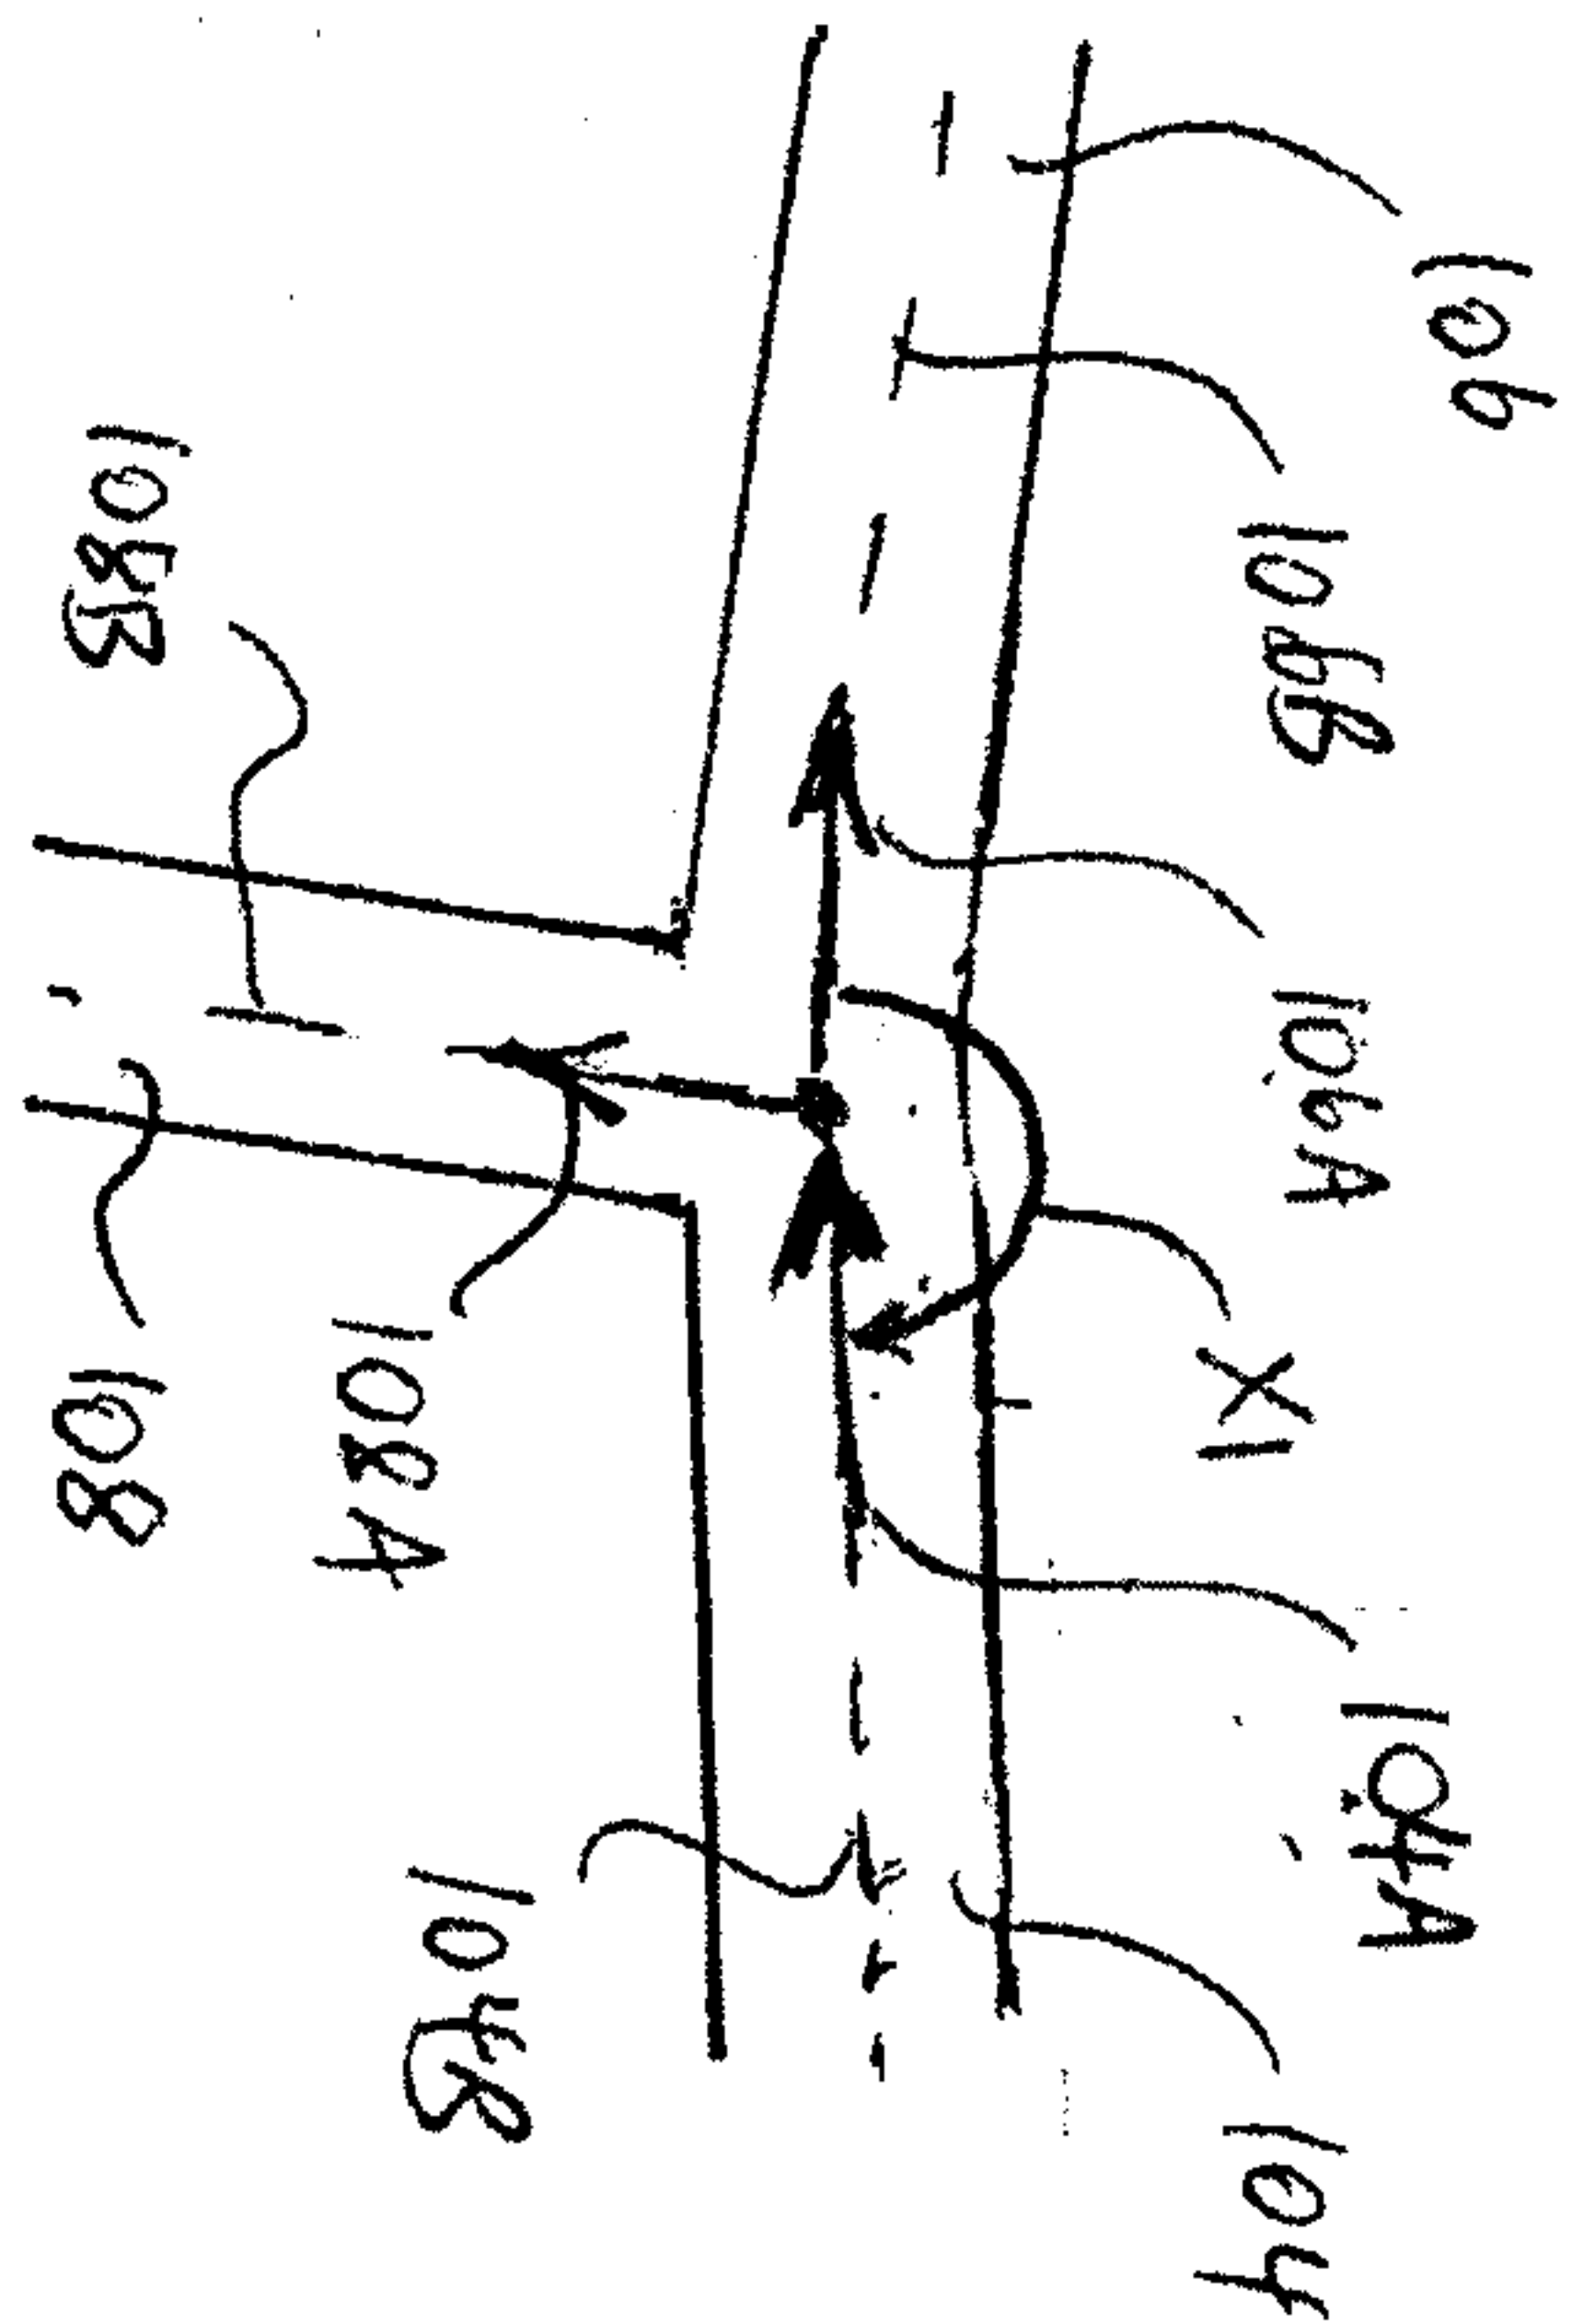


FIGURE 4

6/15

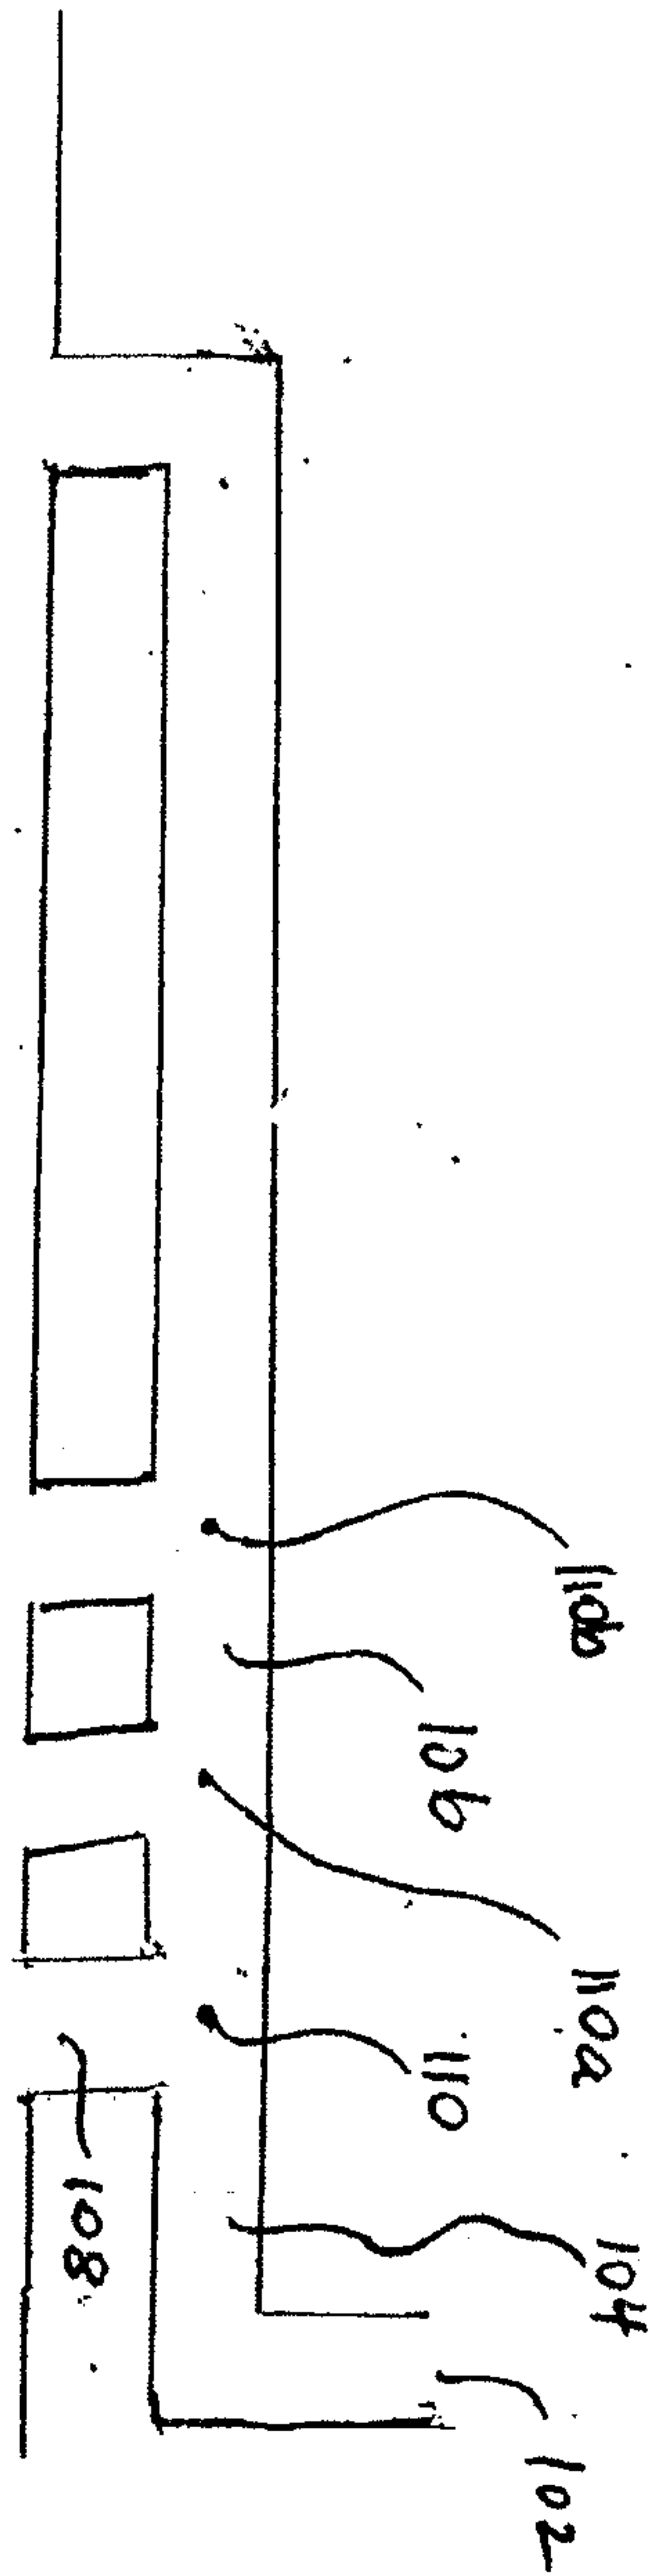


20

22

FILED


7/15.

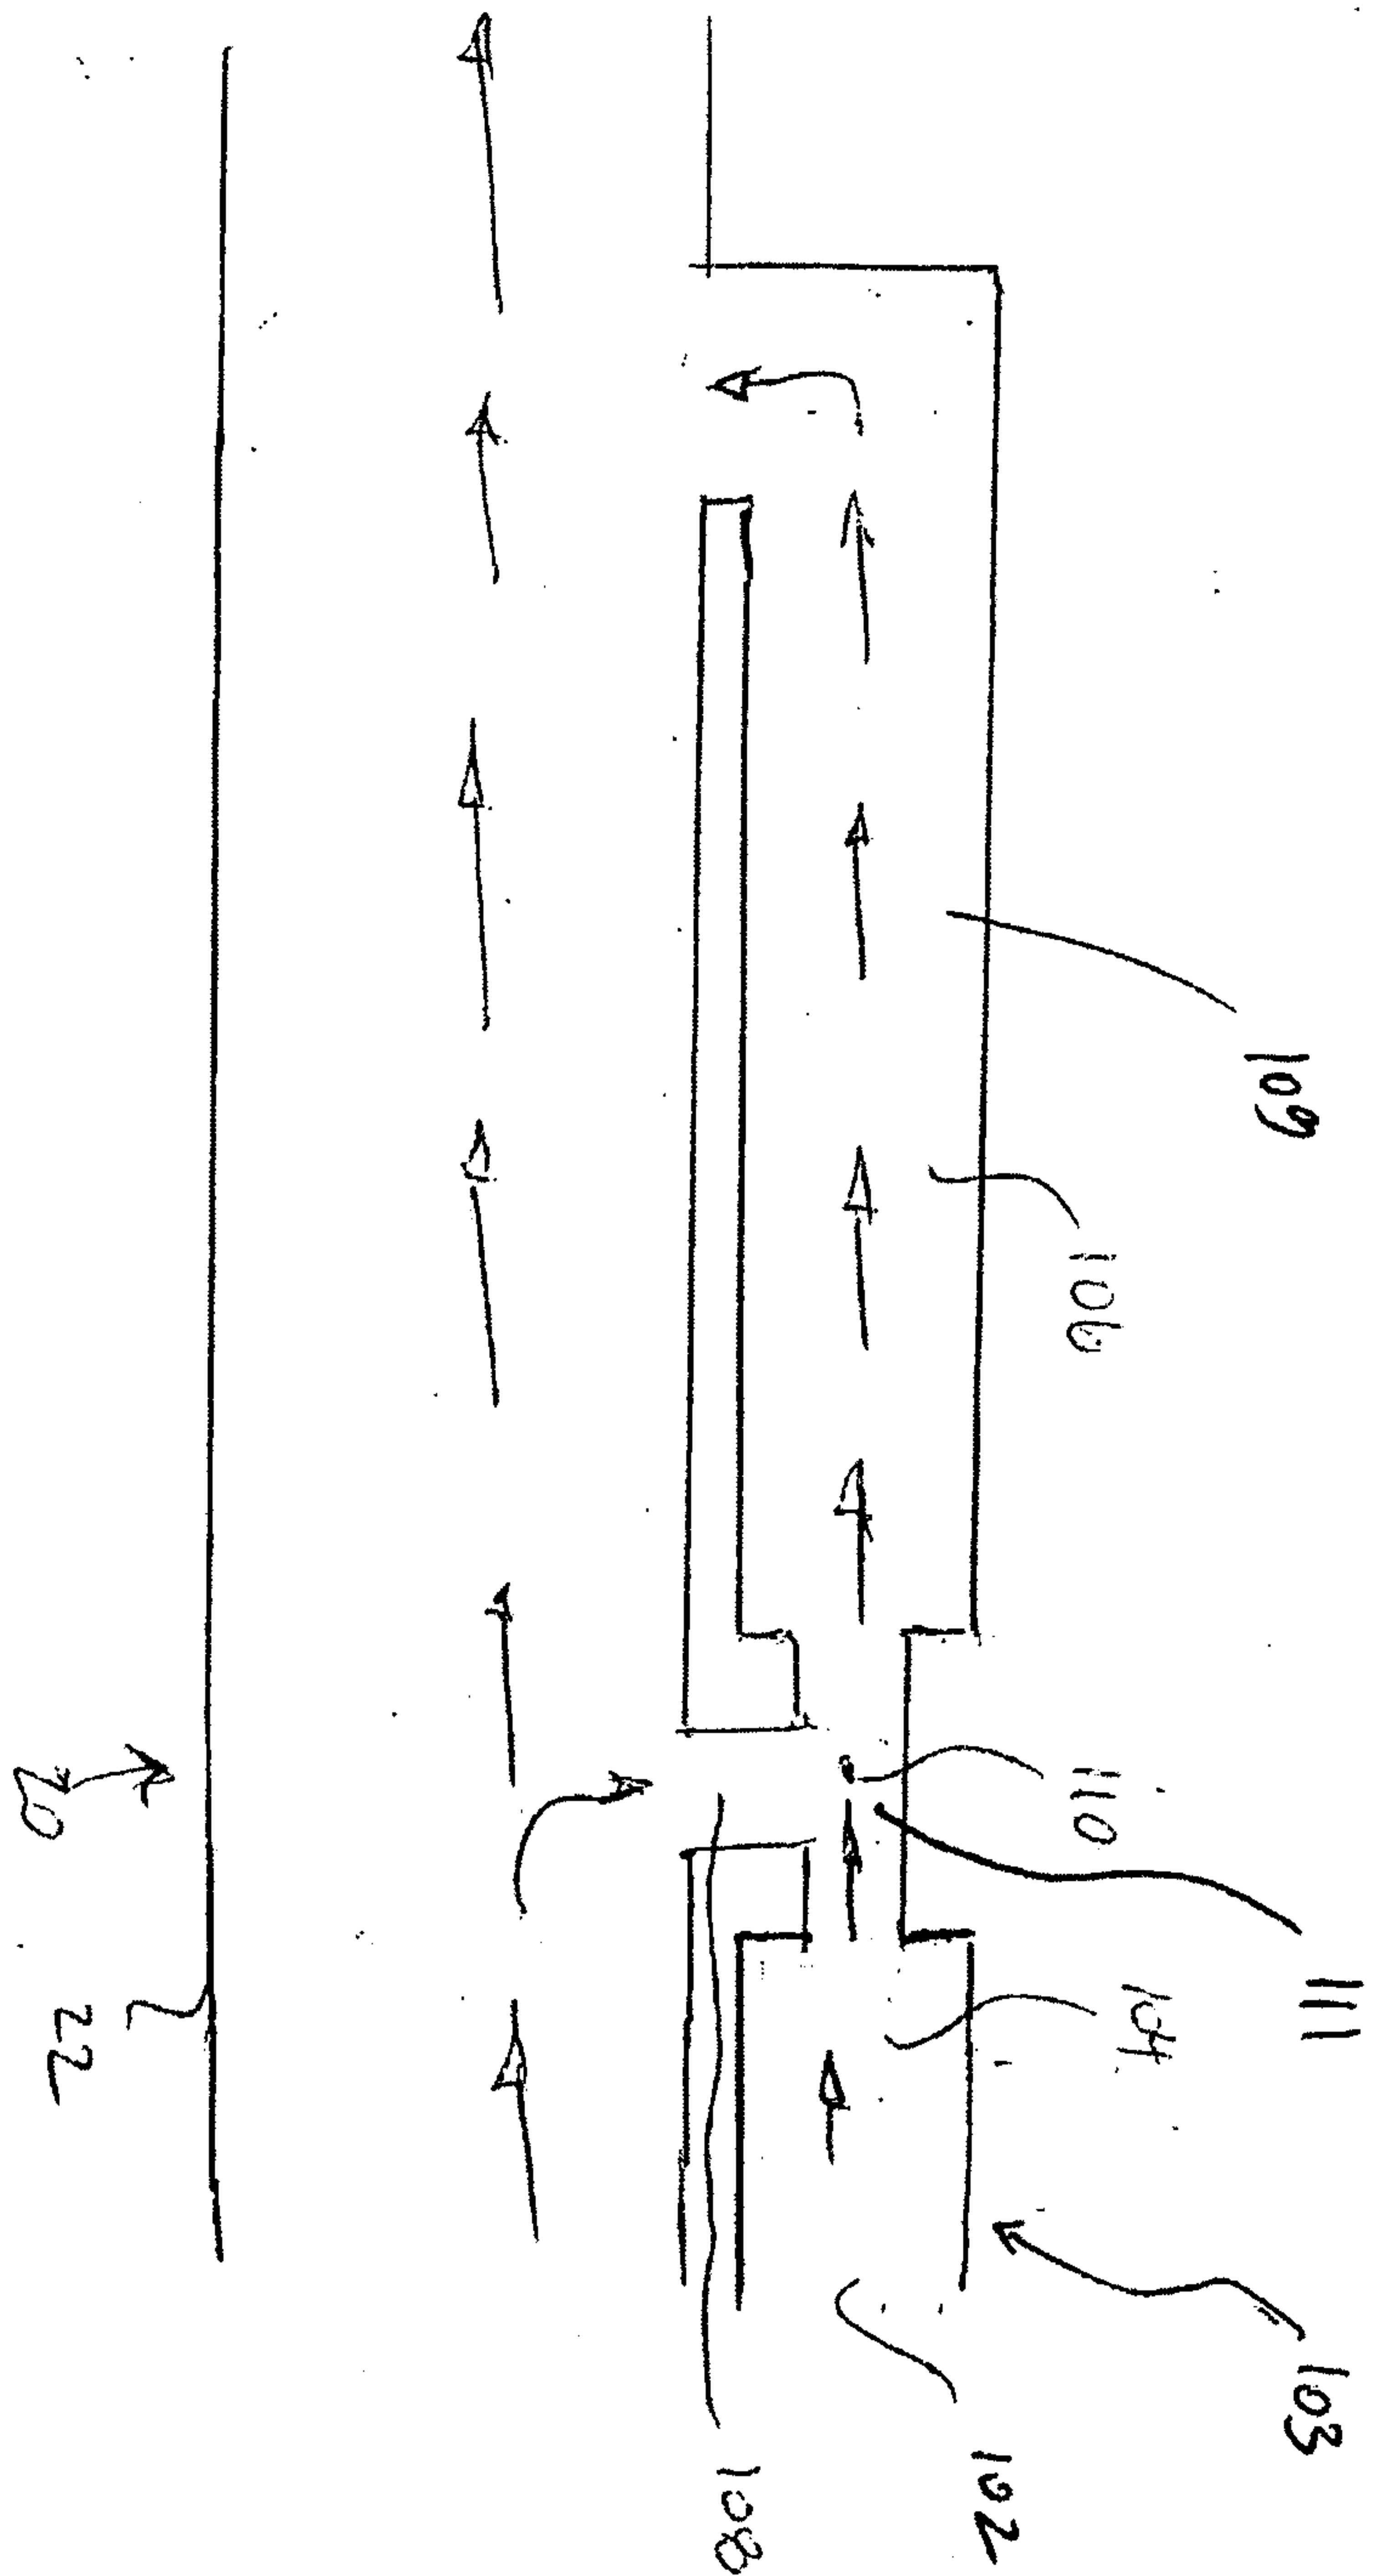

Time 6

8/15

FIGURE 7

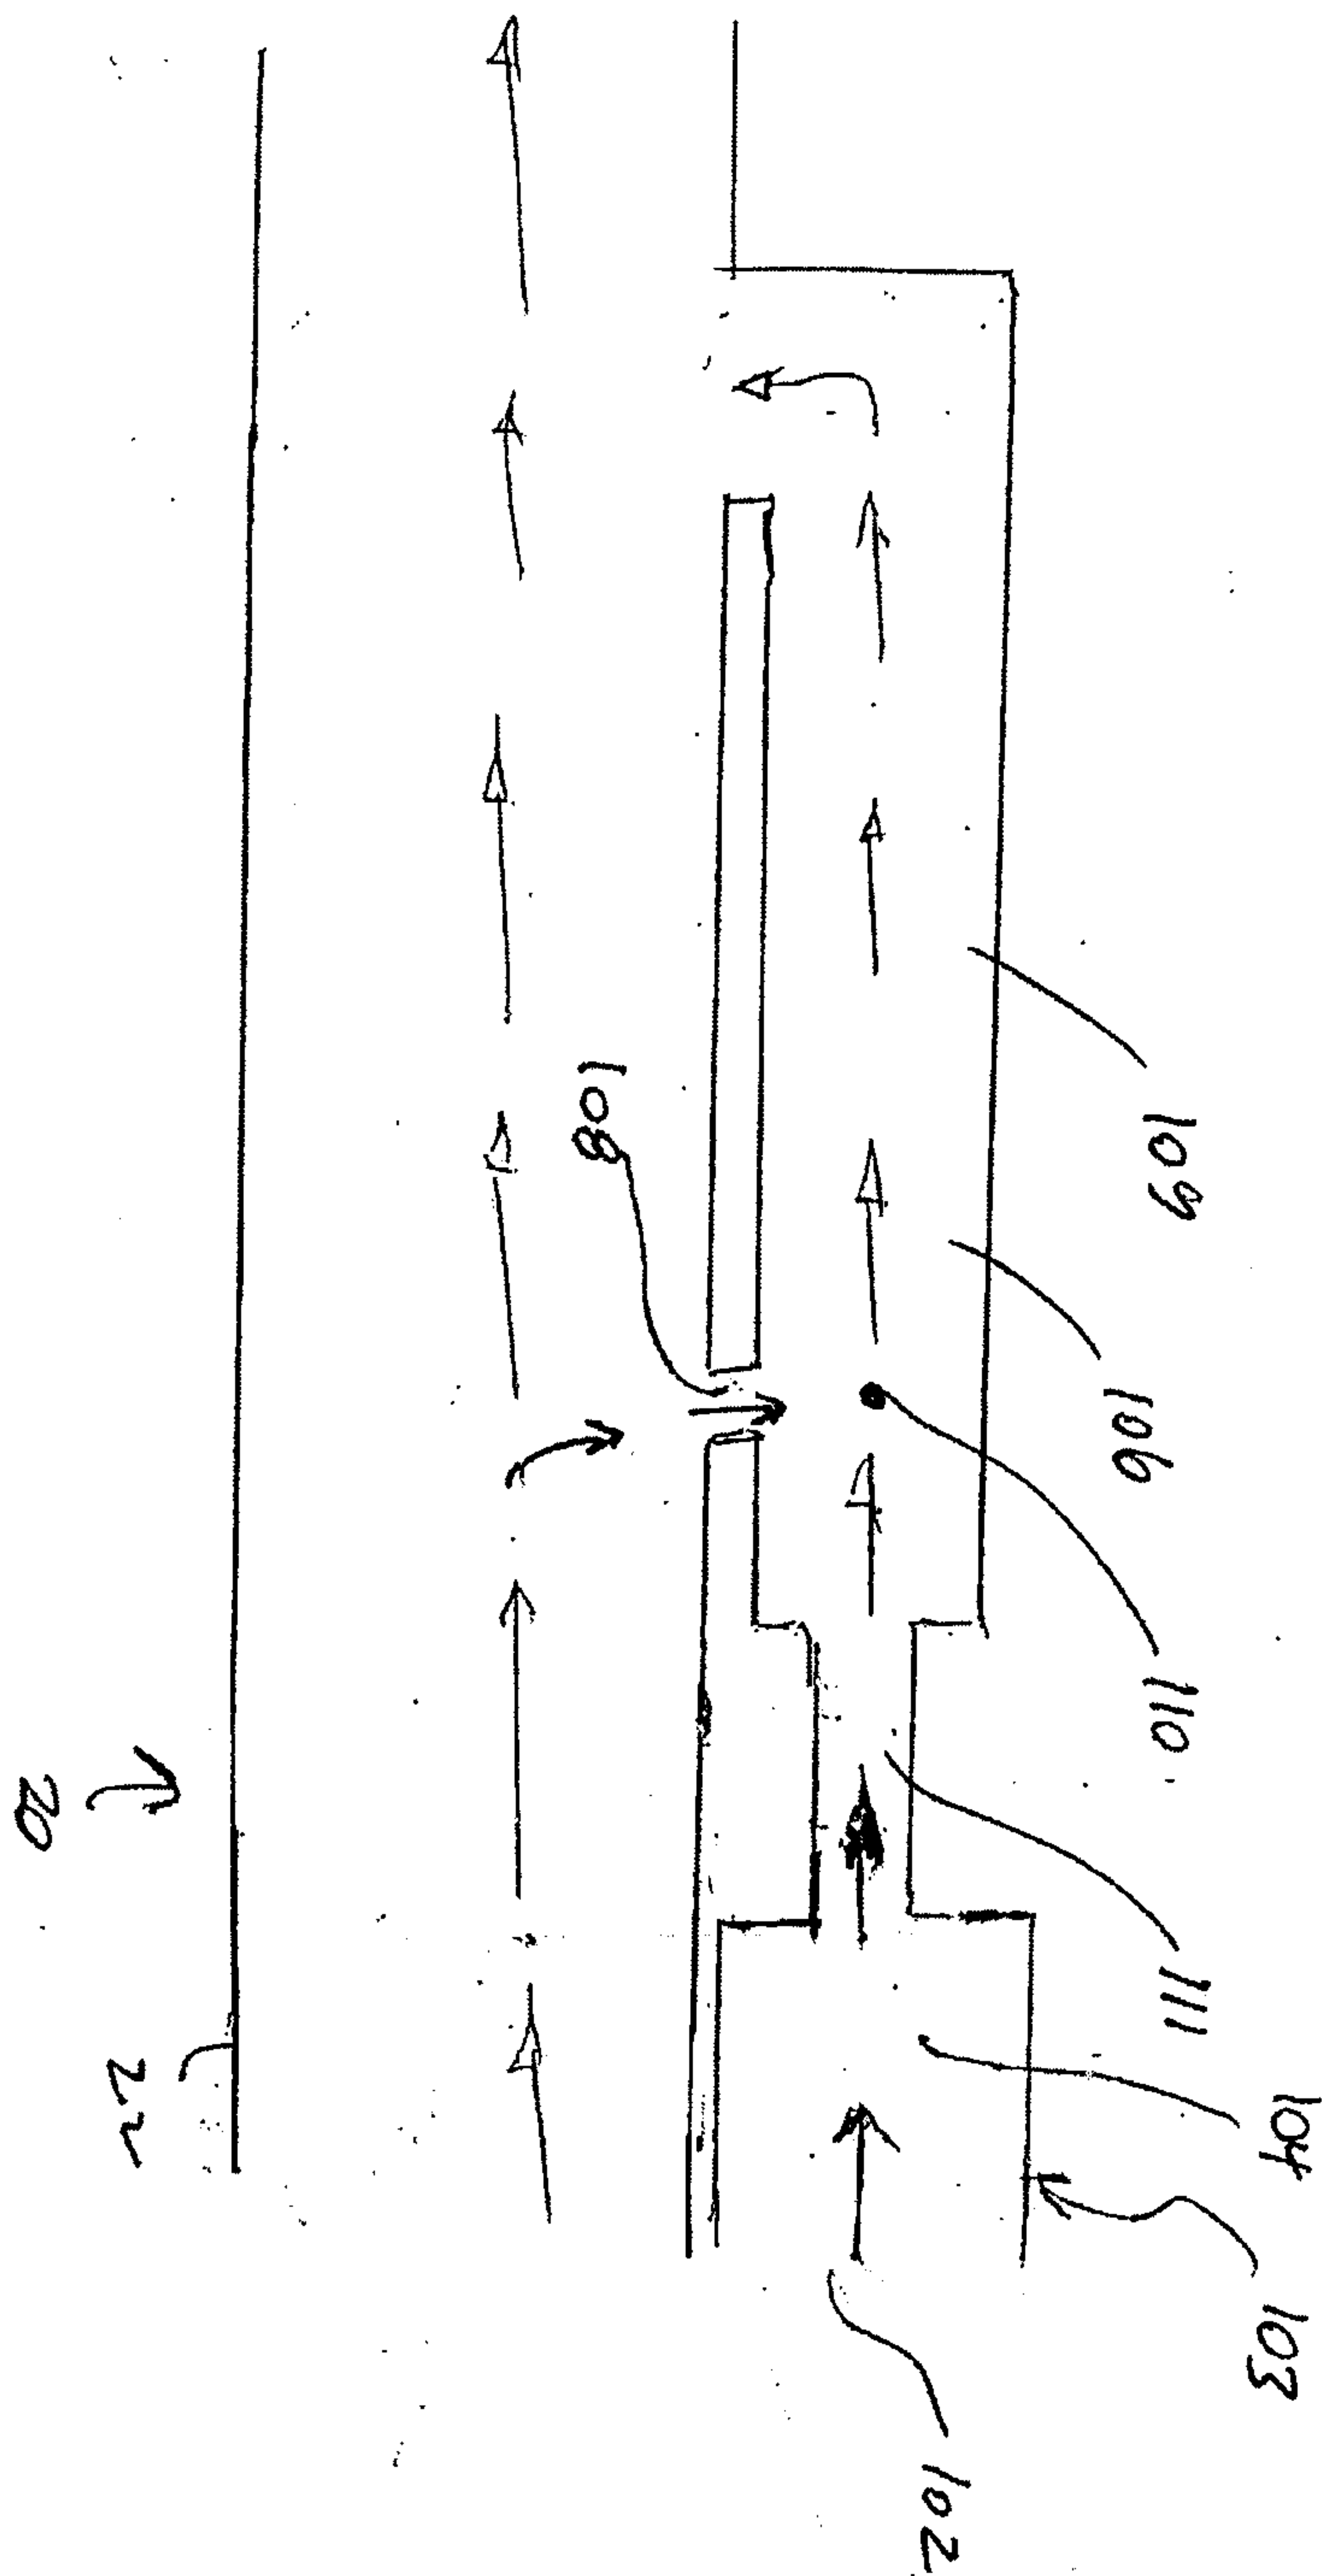

9/15

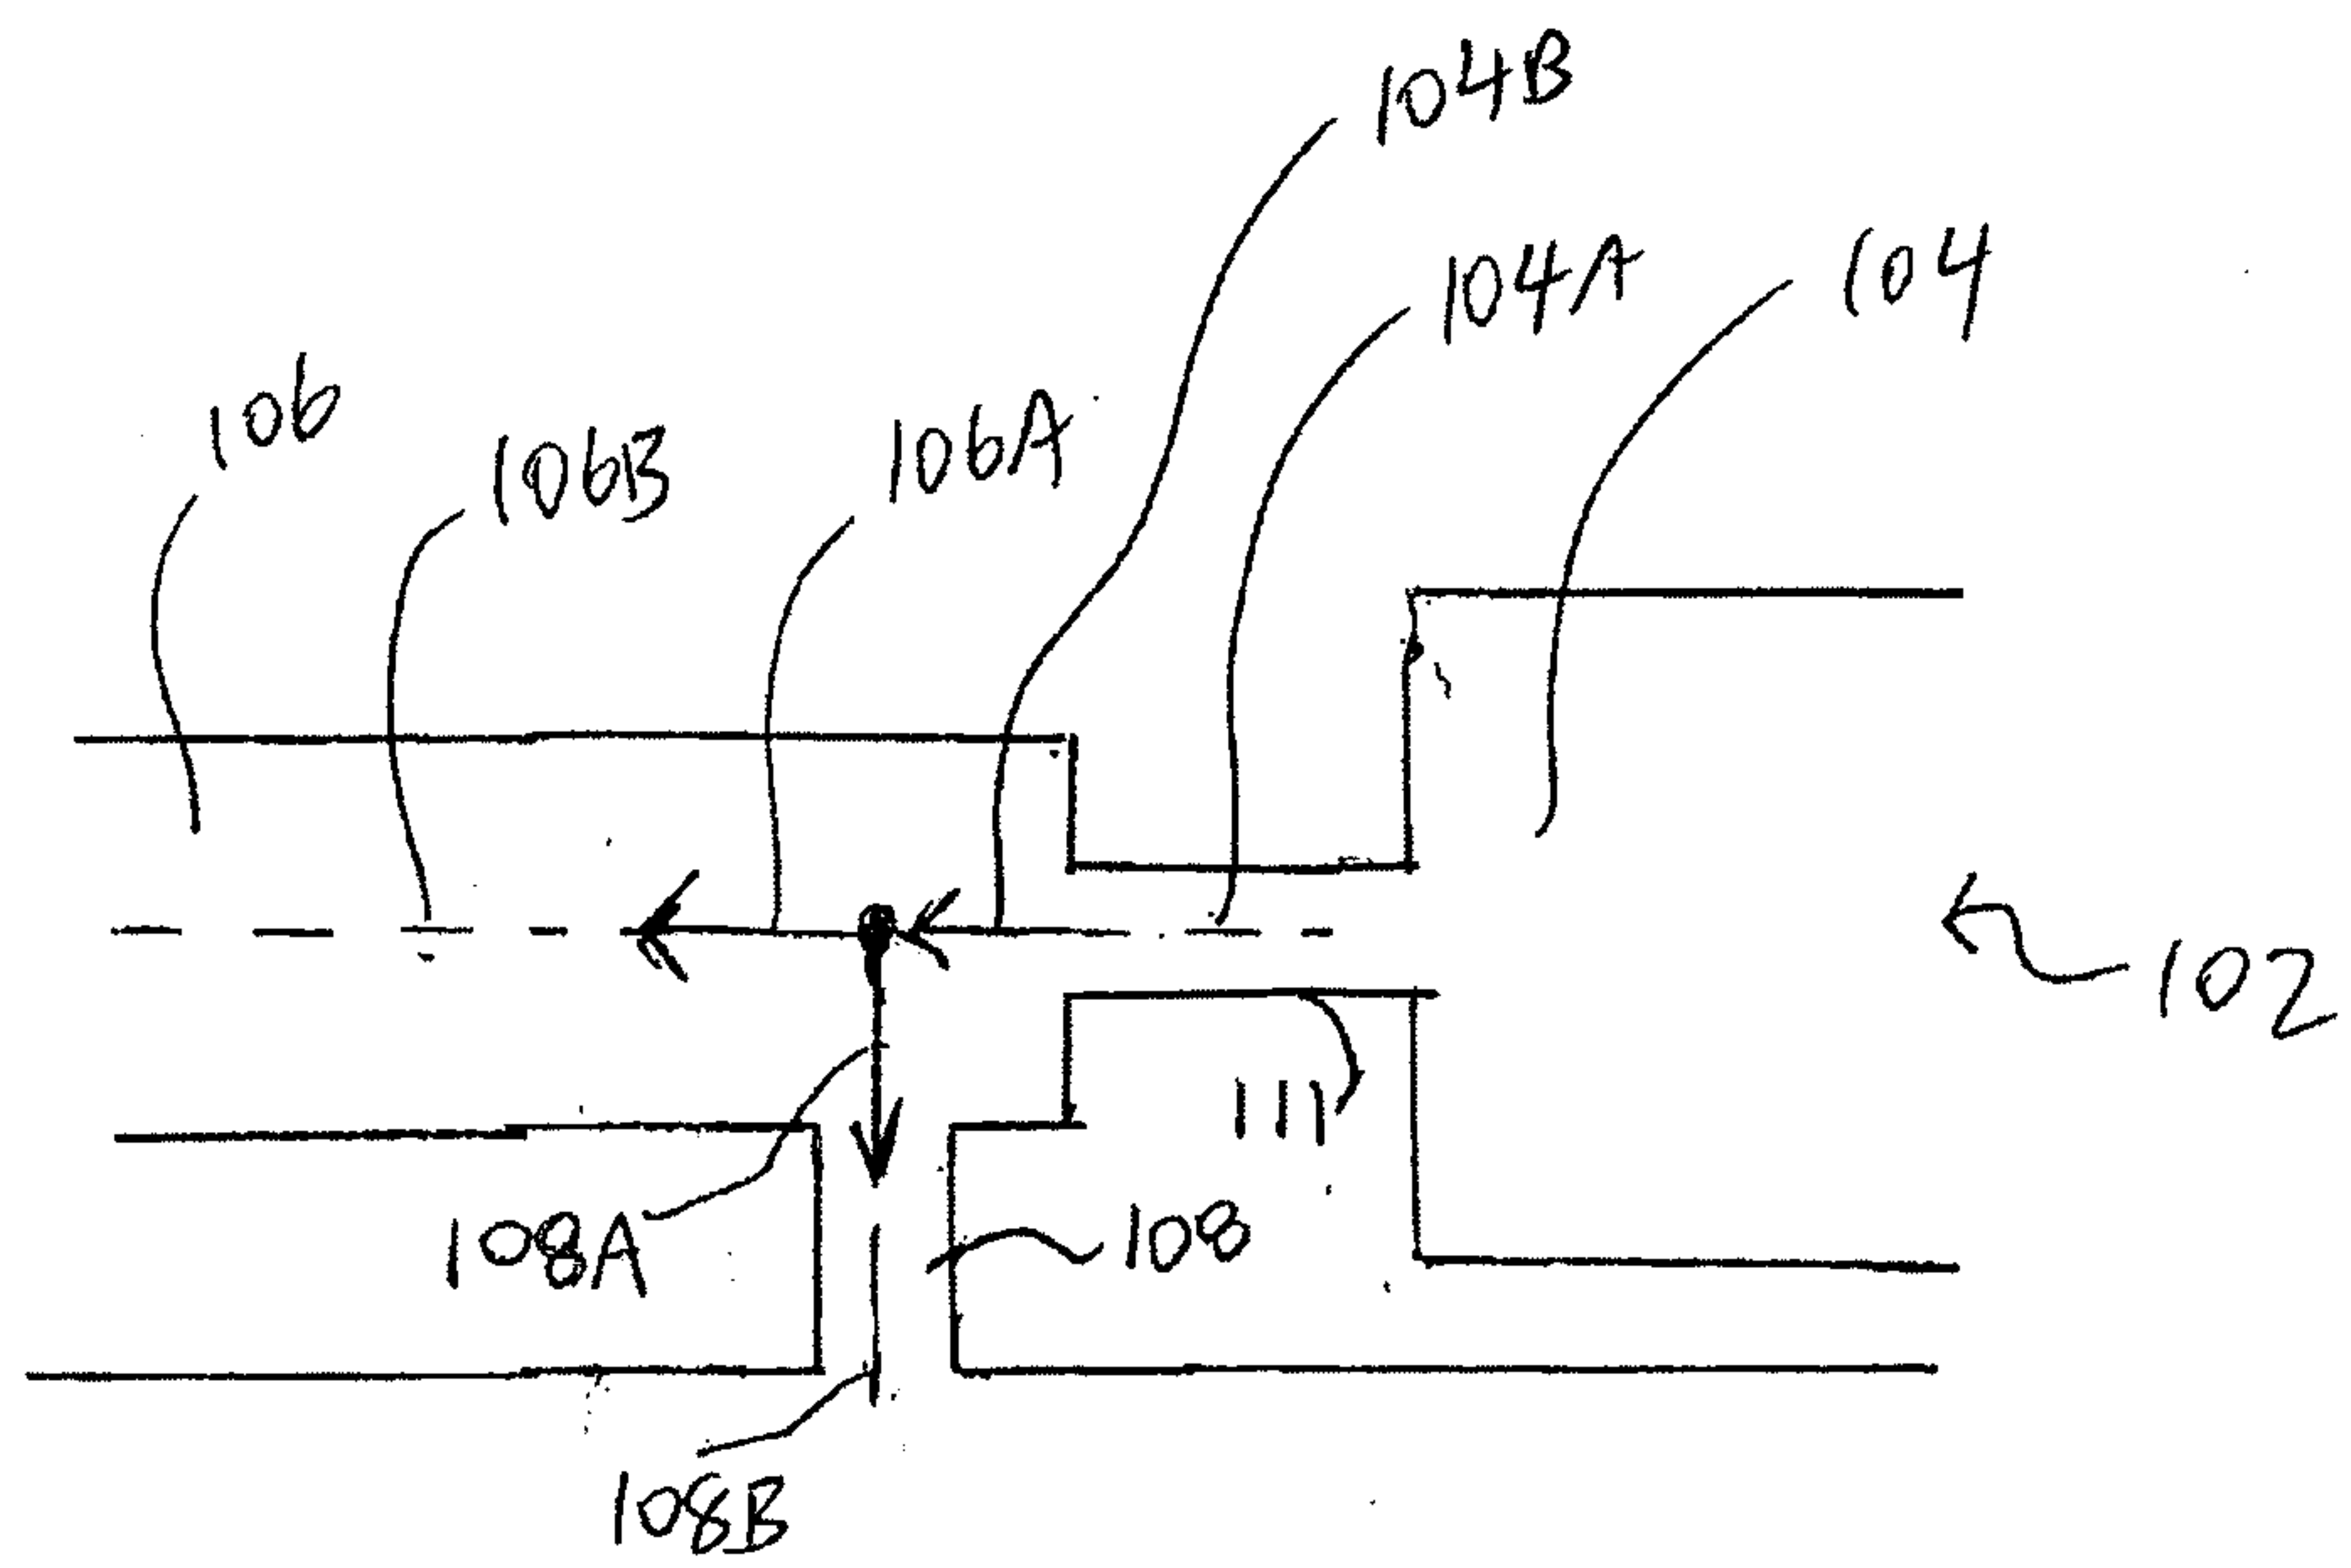


FIGURE 8

20
22

10/15

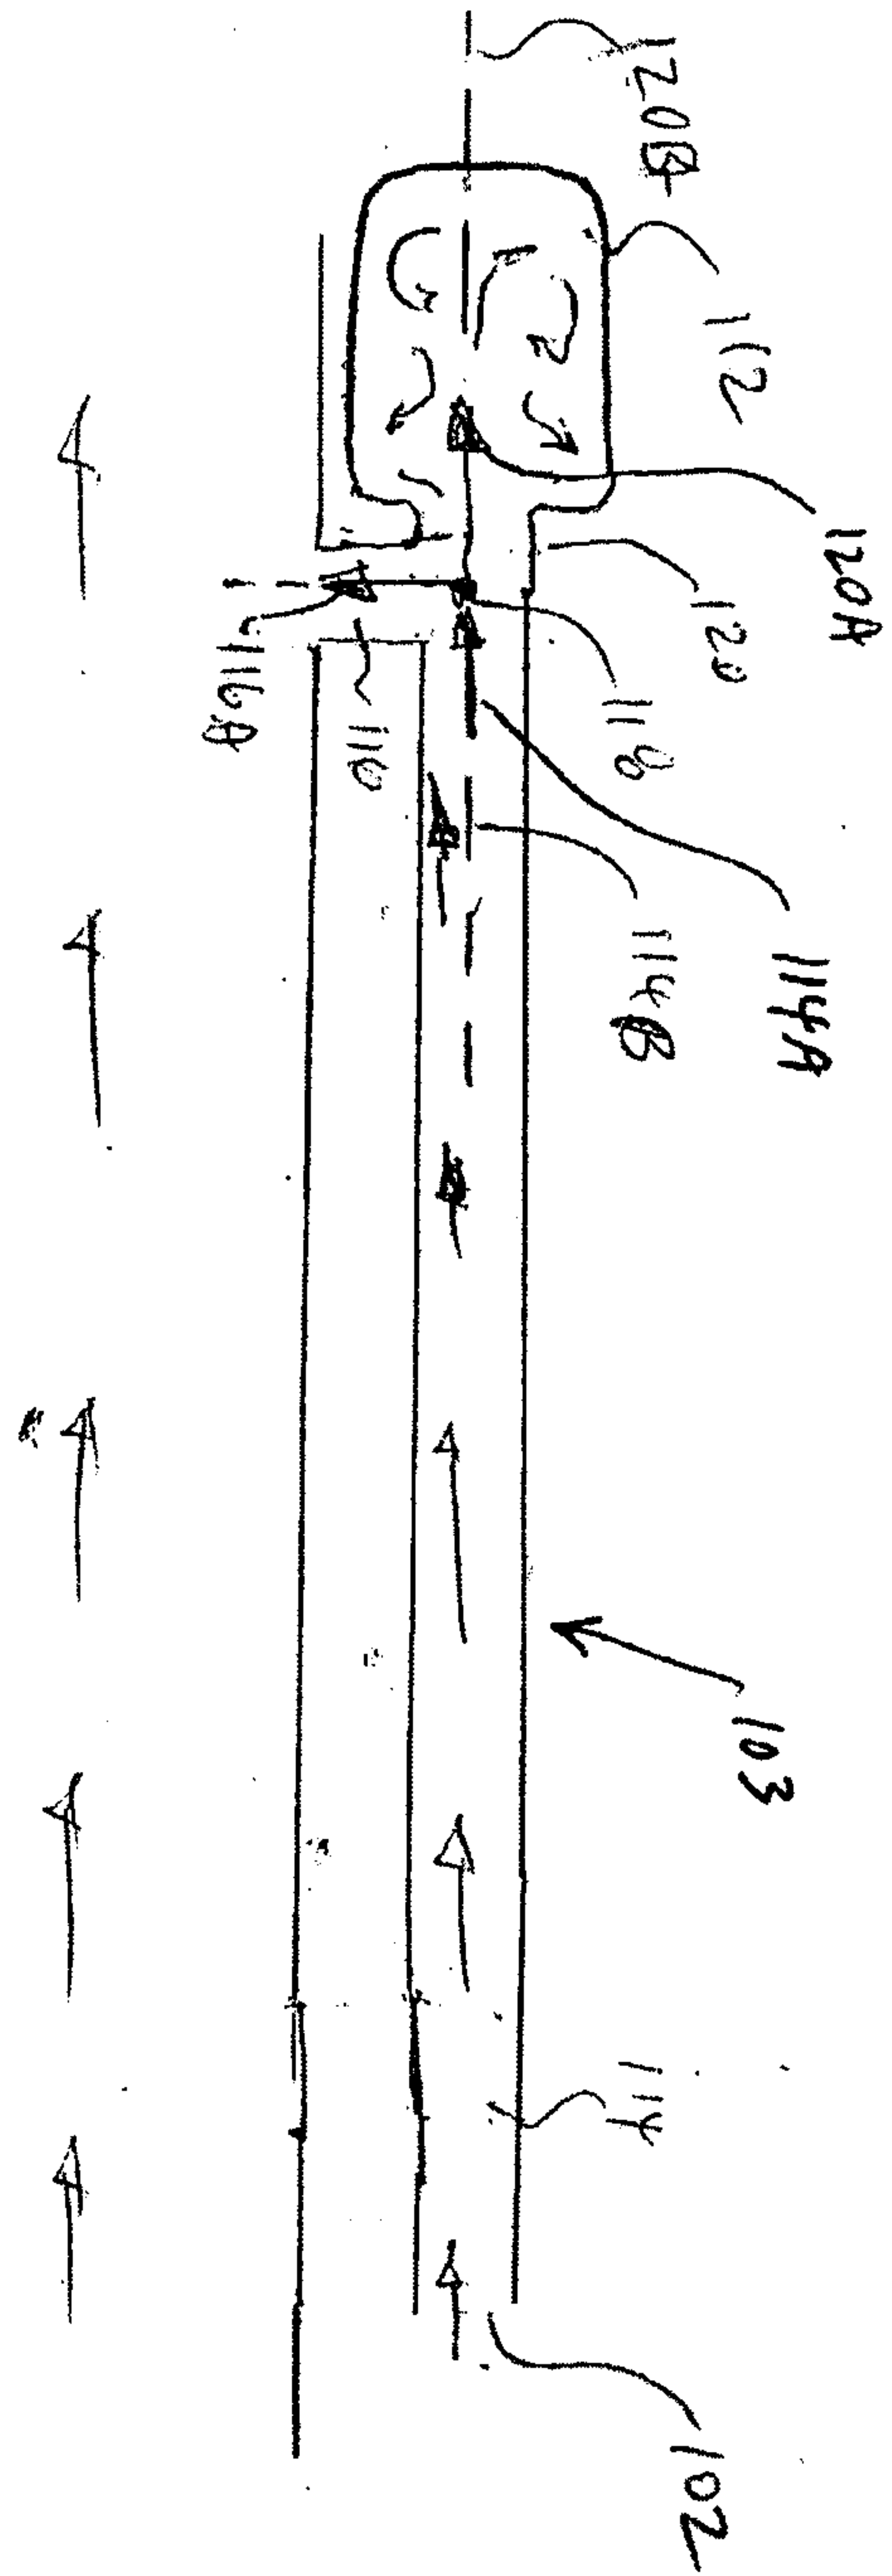


FIGURE 9

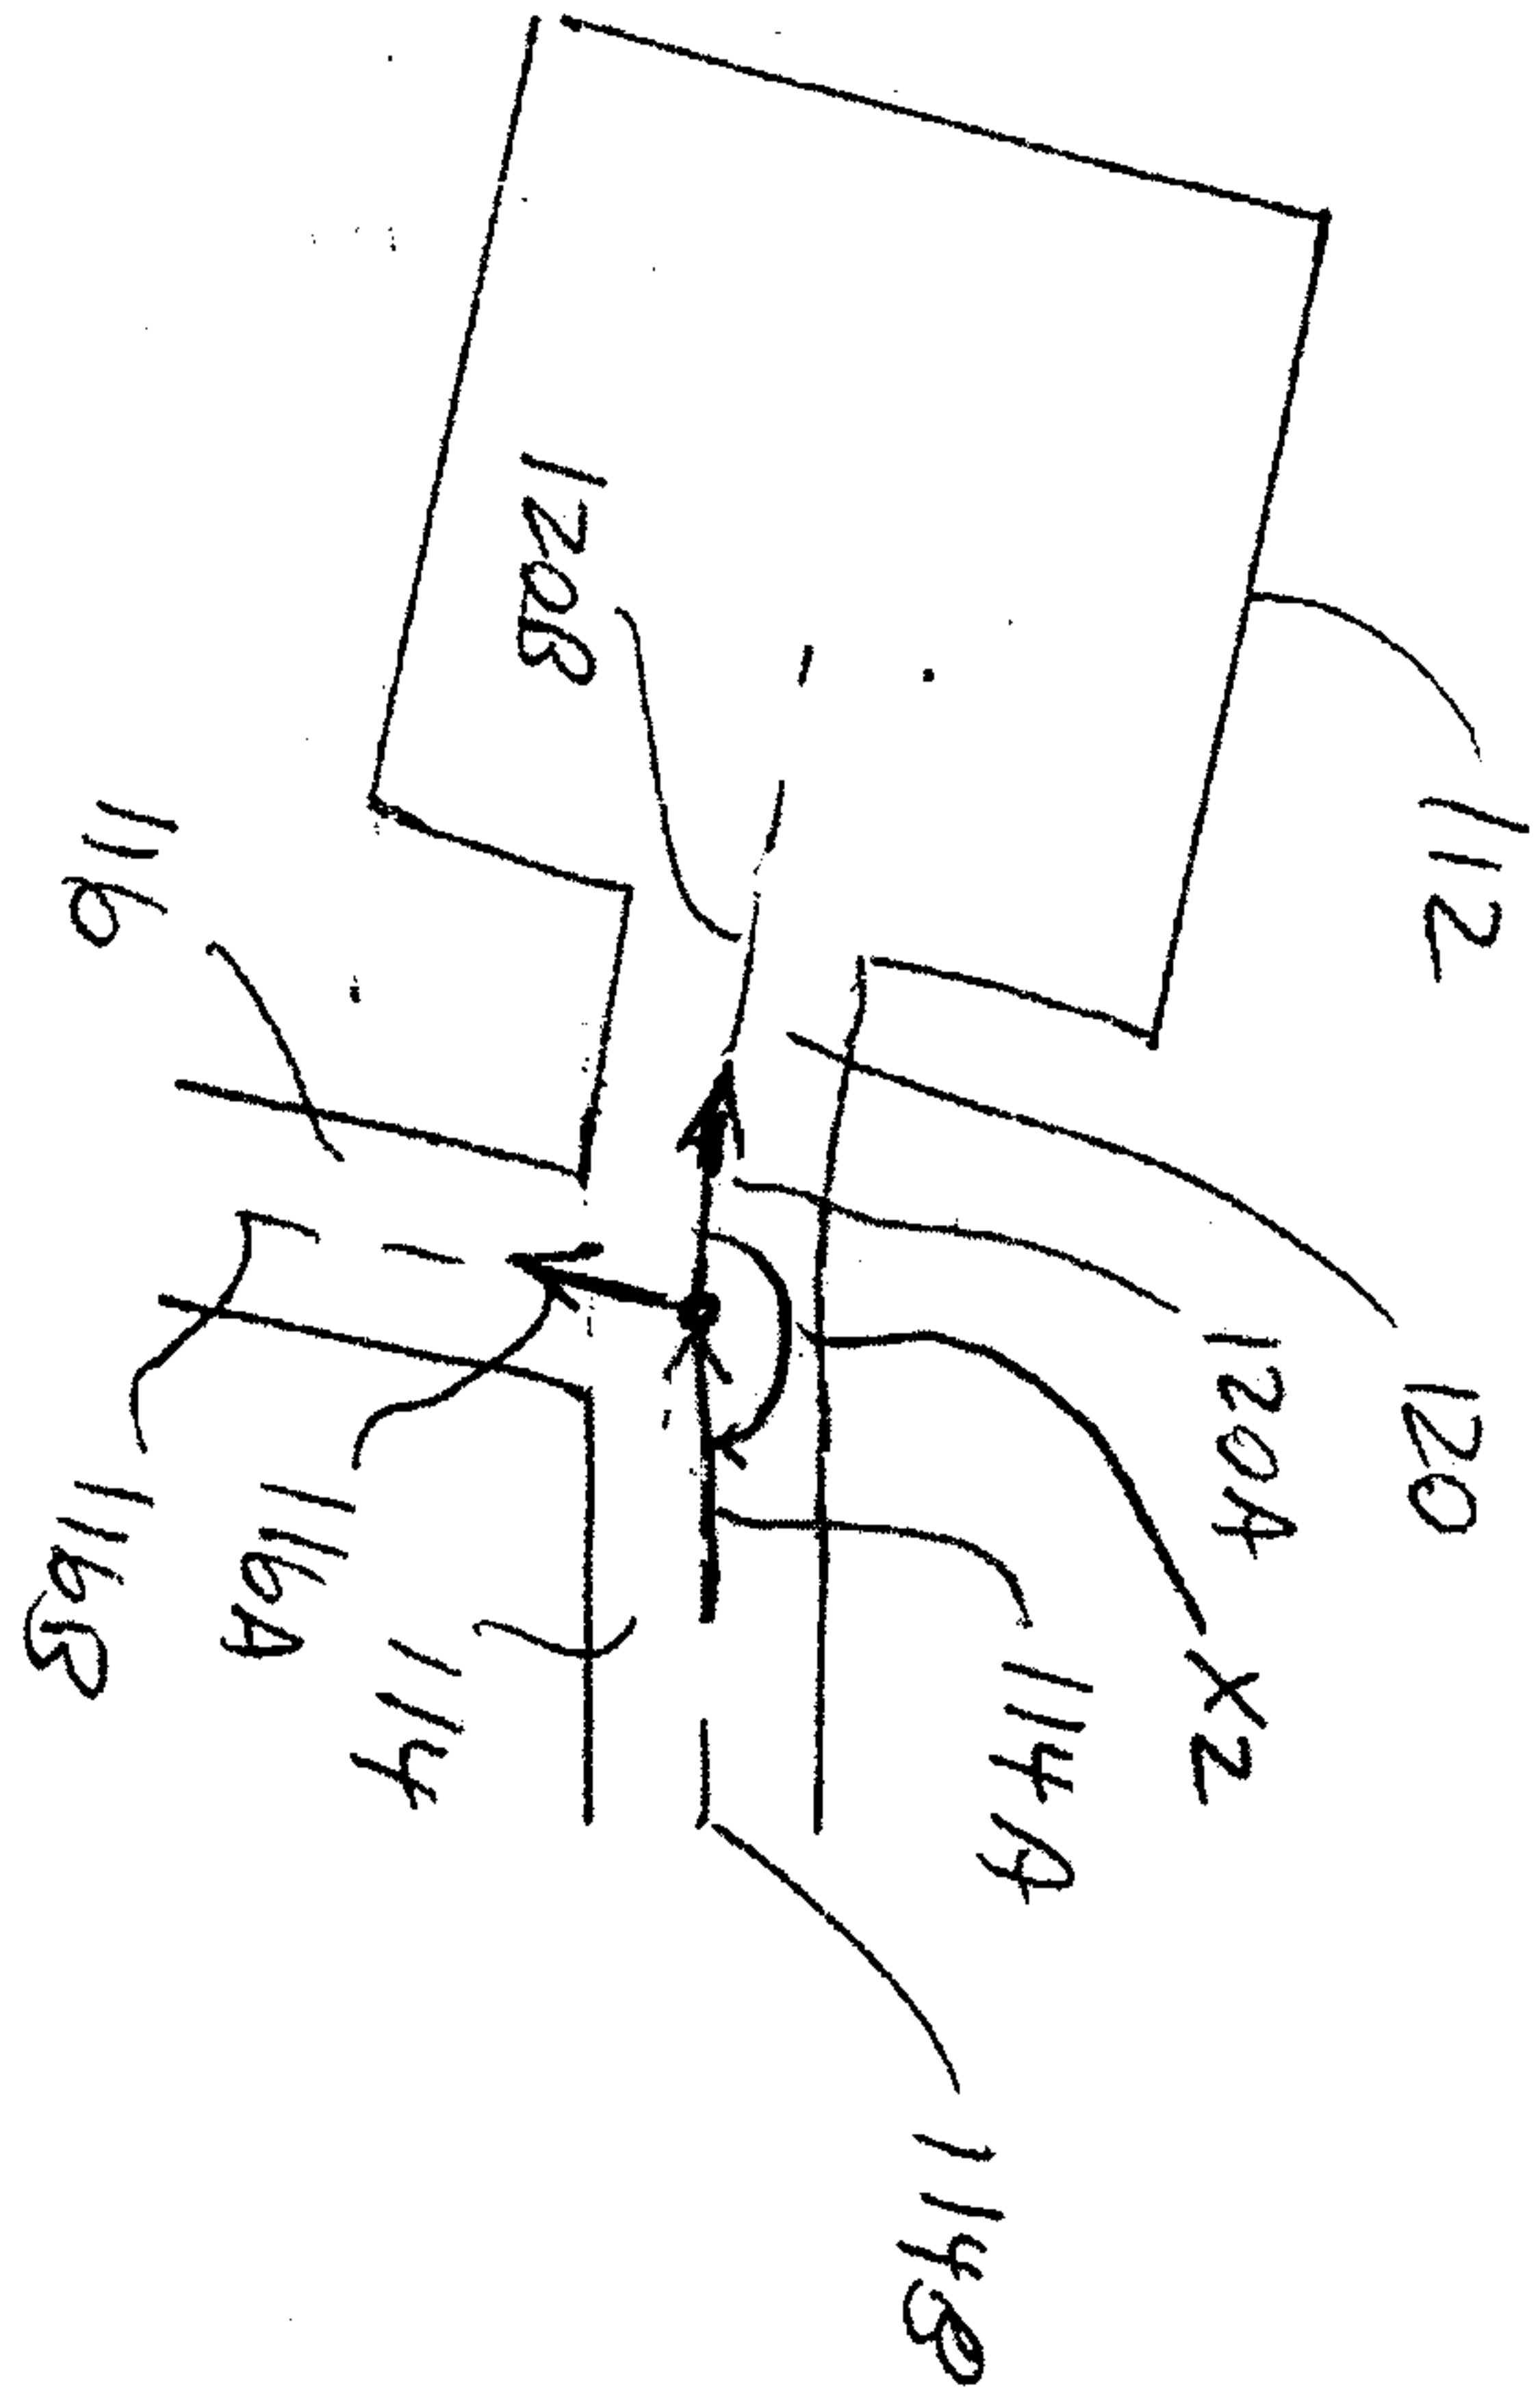


Figure 10

12/15


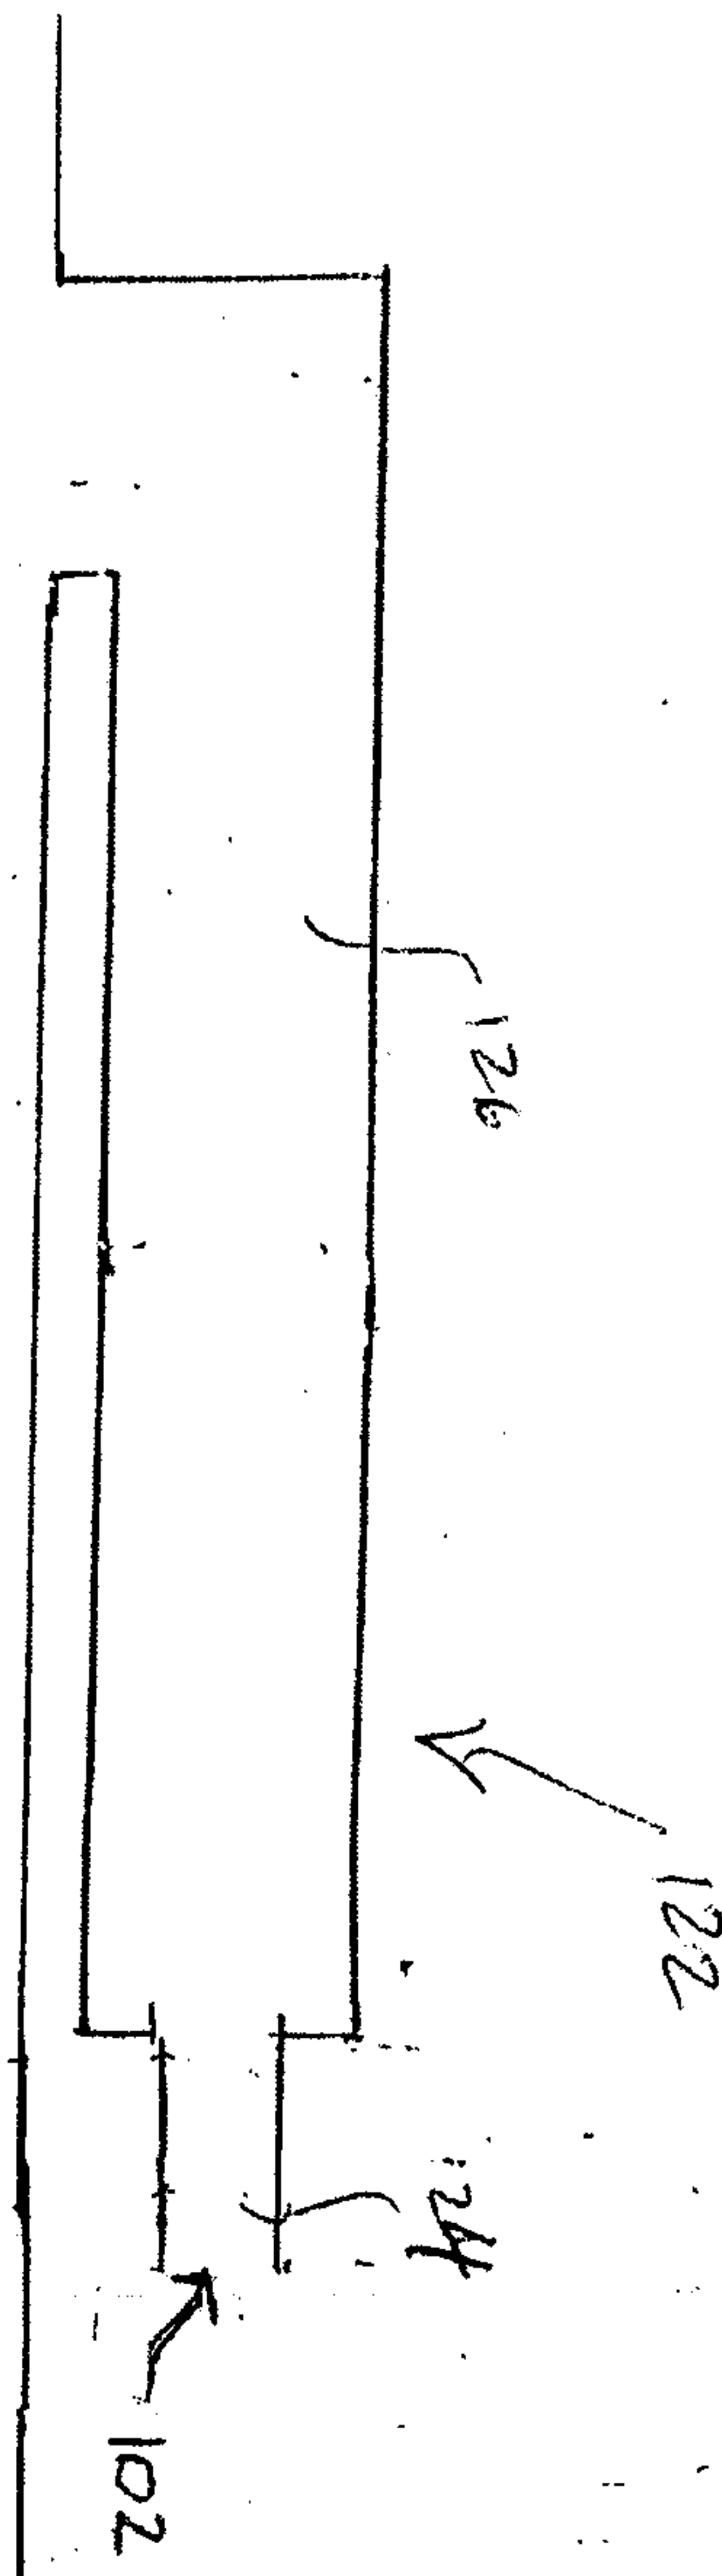


FIGURE 11

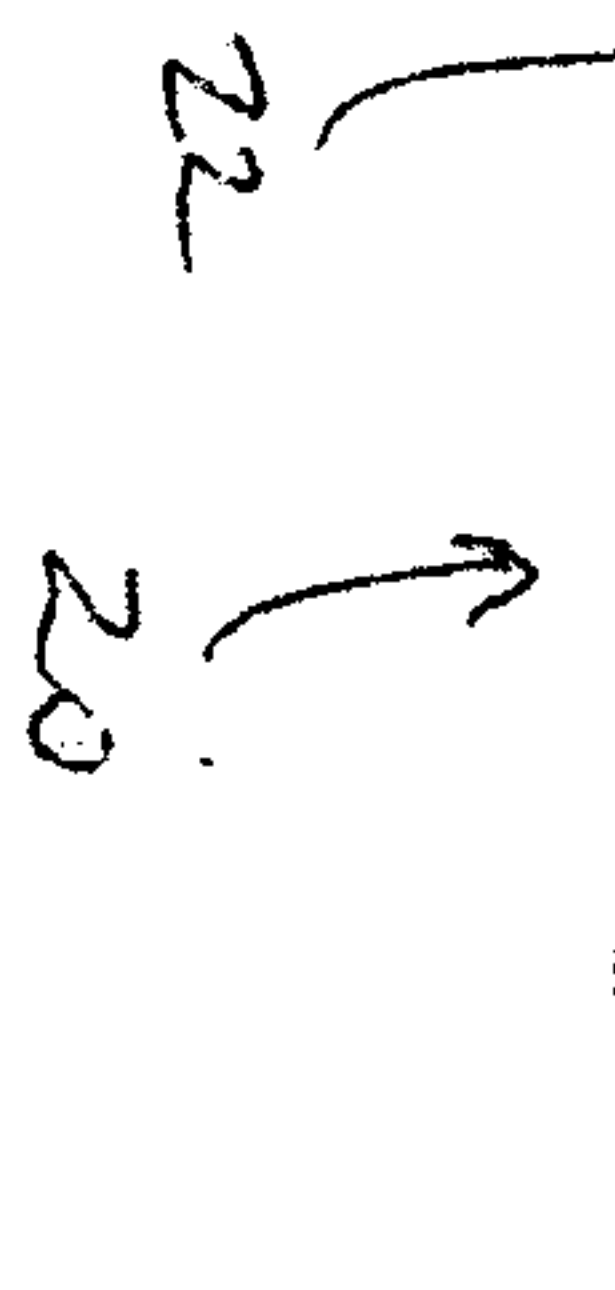

13/15

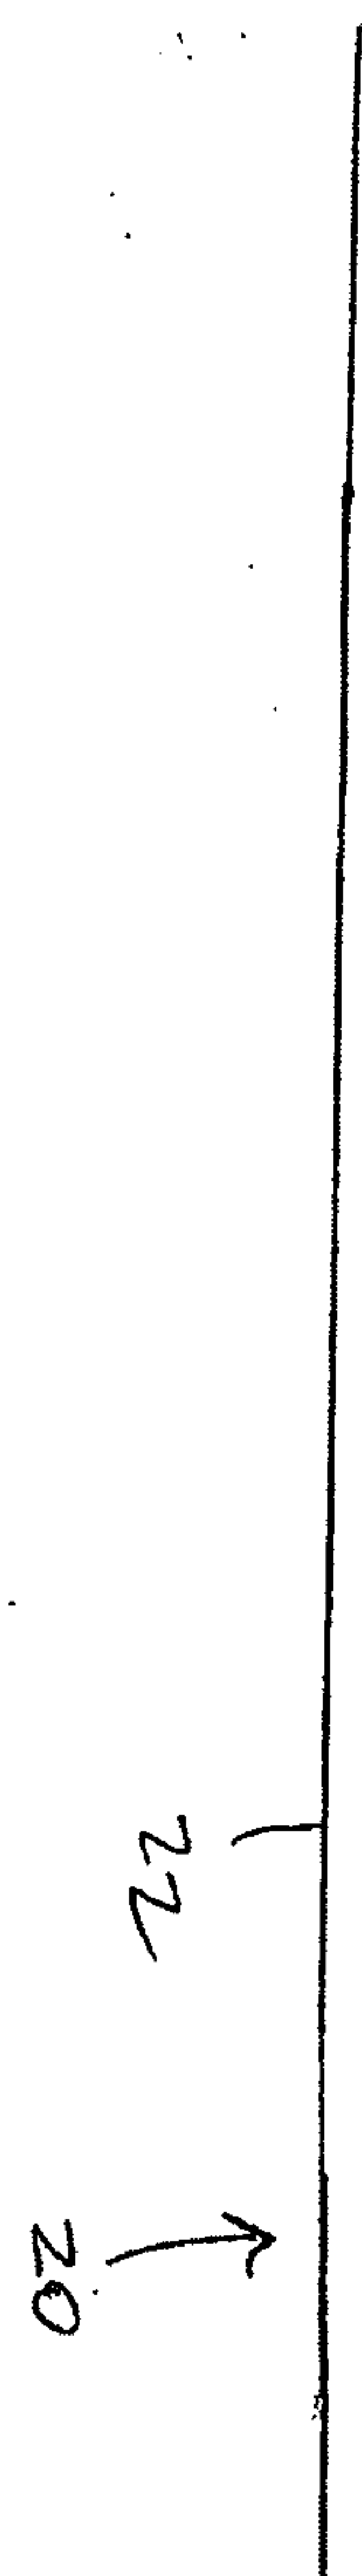
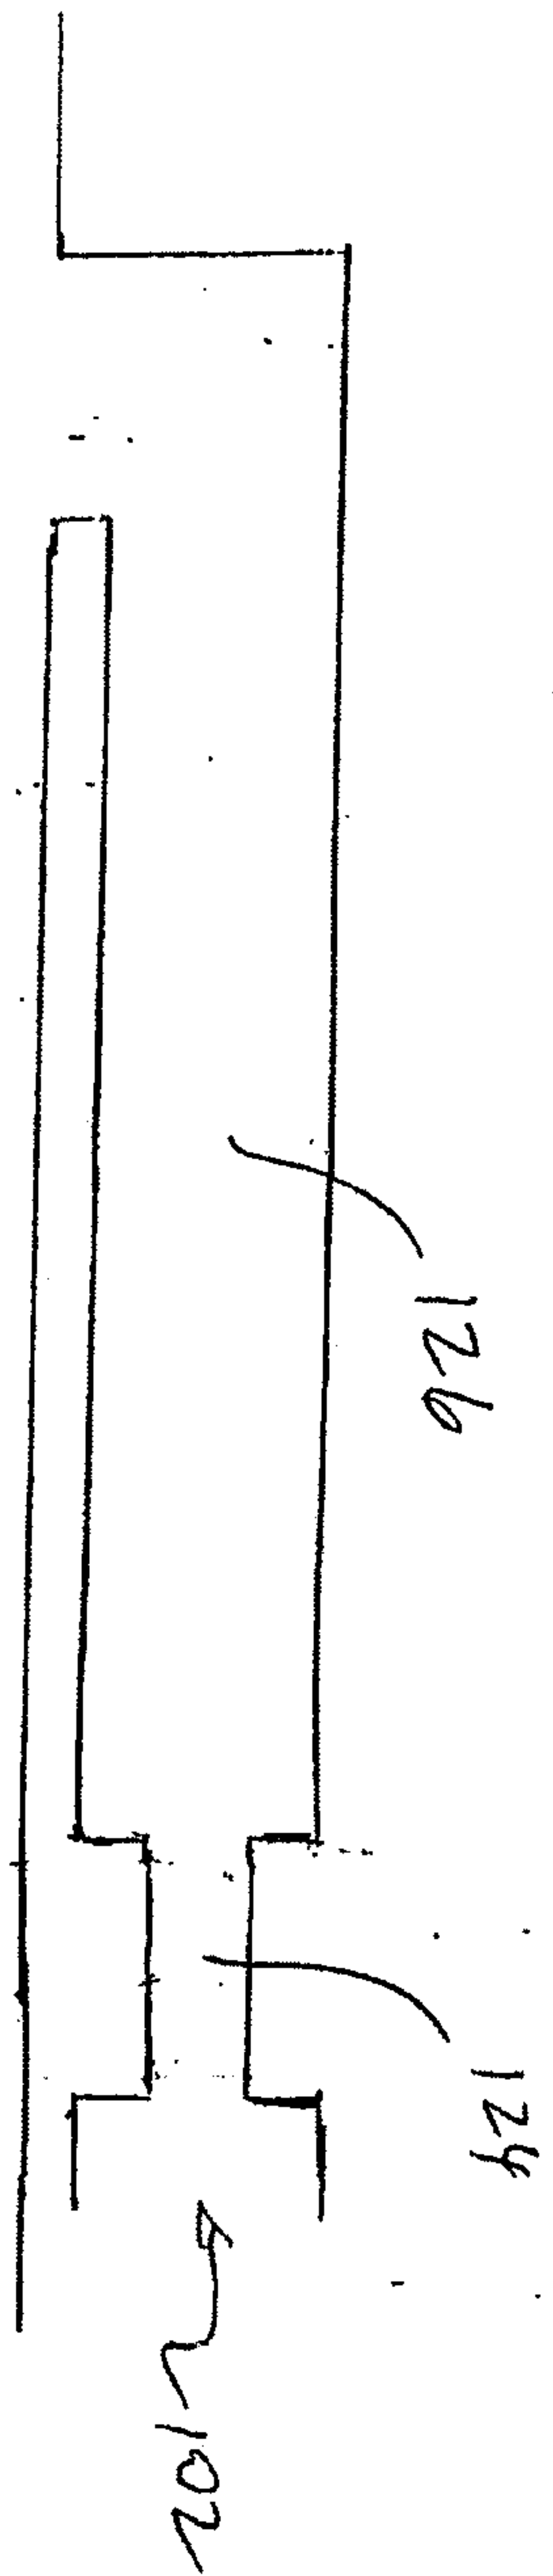


FIGURE 12


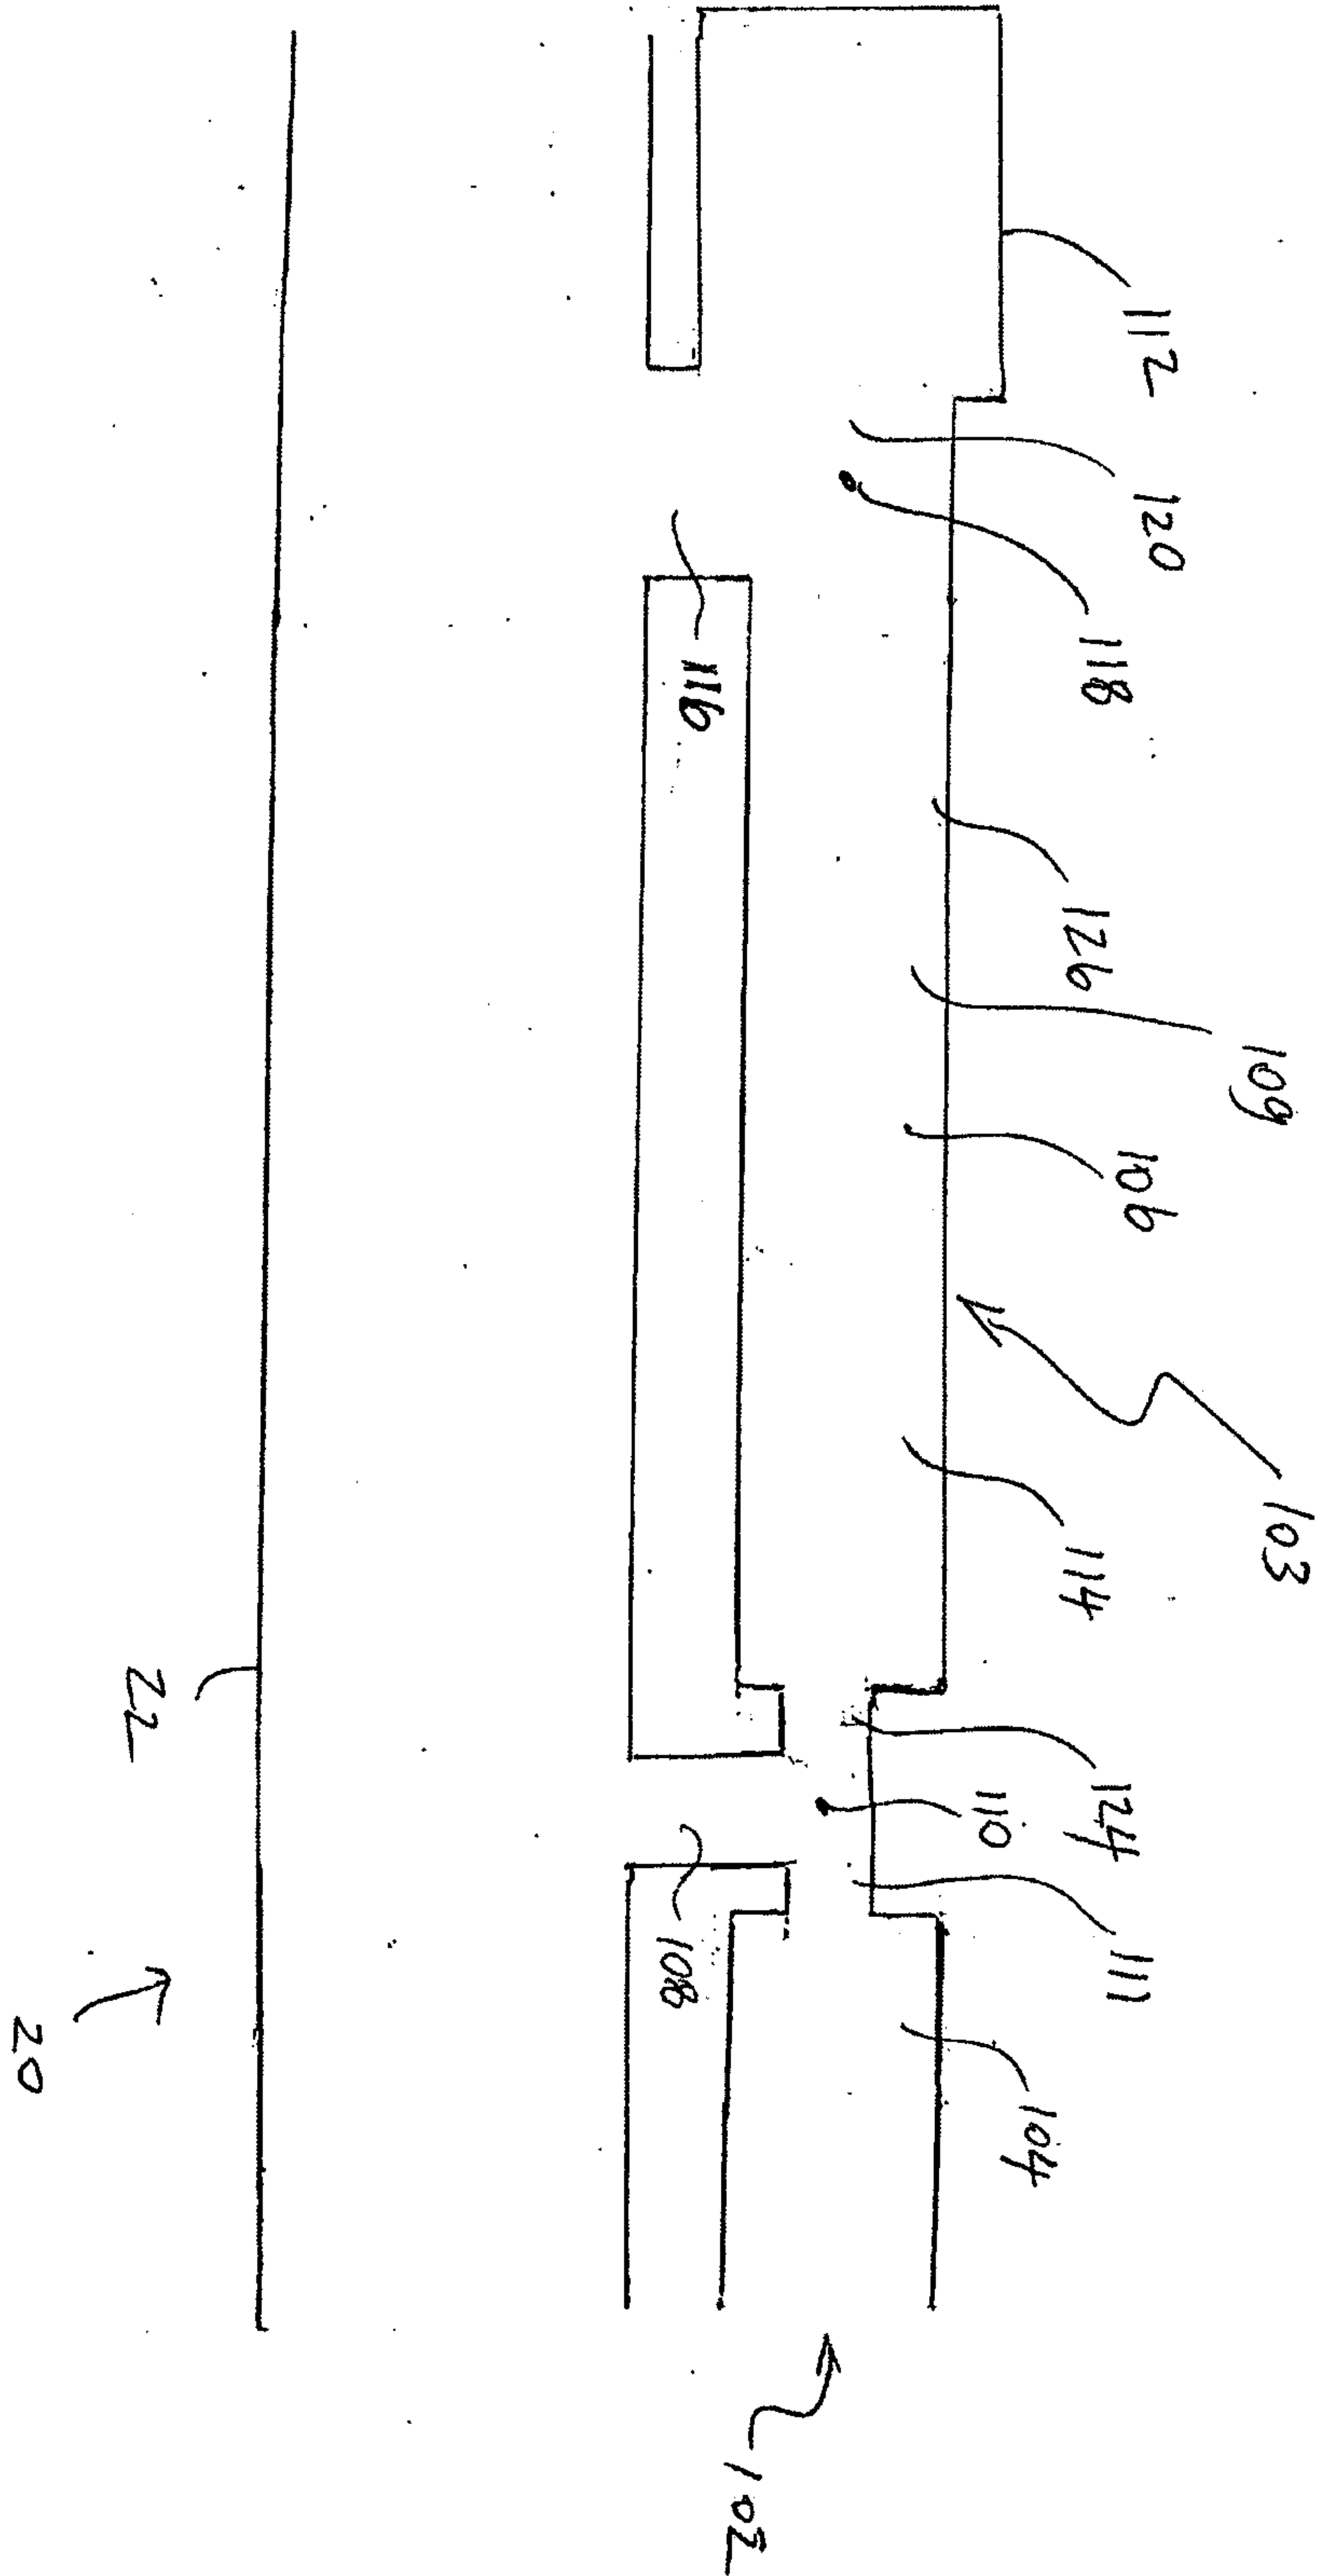


FIGURE 13



File # 14

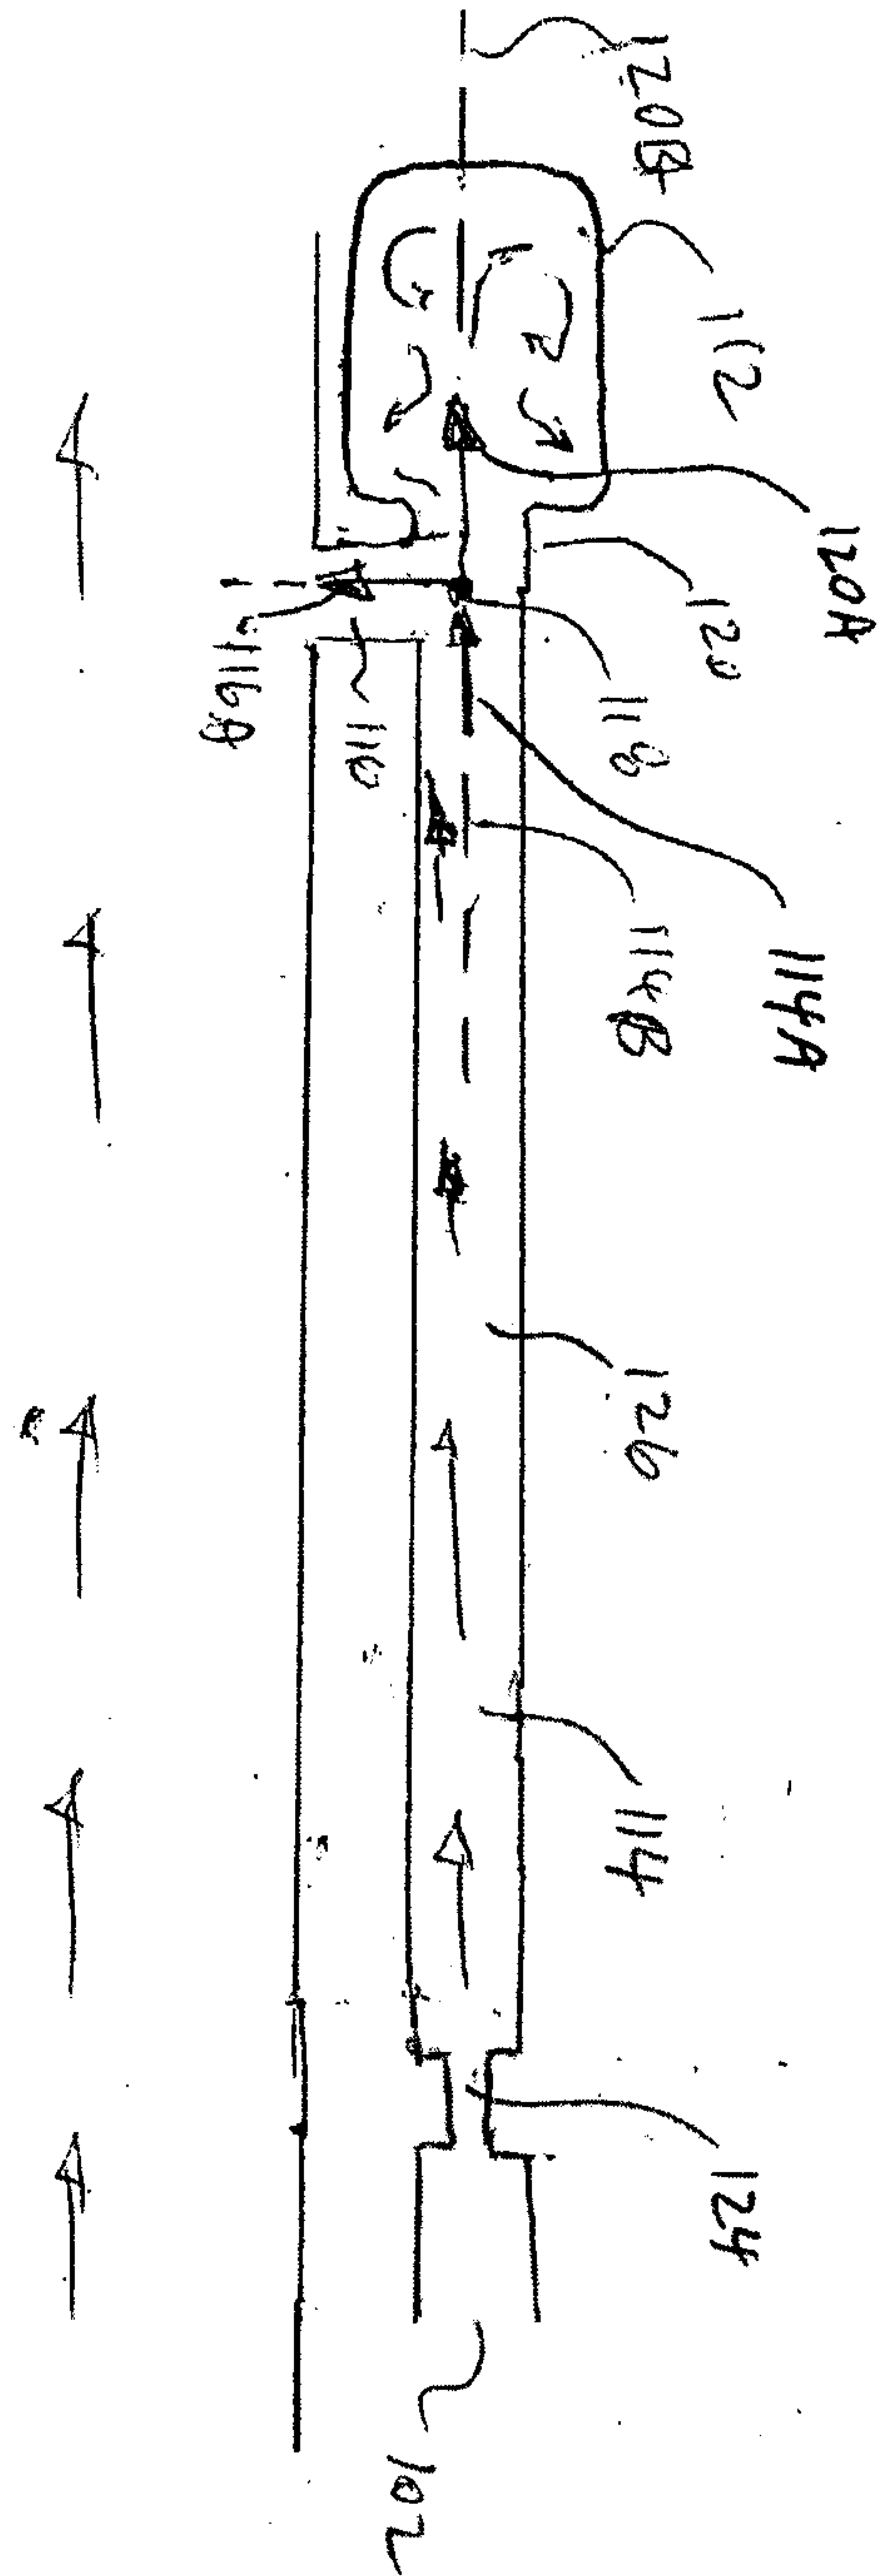