(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 114 342 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
14.07.2010 Bulletin 2010/28

(21) Application number: **08708489.3**

(22) Date of filing: **31.01.2008**

(51) Int Cl.:
A61H 23/02 *(2006.01)* ***A61H 7/00*** *(2006.01)*

(86) International application number:
PCT/EP2008/051176

(87) International publication number:
WO 2008/107243 (12.09.2008 Gazette 2008/37)

(54) **Vibrating hair brush**

Vibrierende Haarbürste

Brosse à cheveux vibrante

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR

(30) Priority: **02.03.2007 US 713289**
02.03.2007 US 713400
02.10.2007 US 977072 P

(43) Date of publication of application:
11.11.2009 Bulletin 2009/46

(73) Proprietors:
- **Unilever PLC**
  London
  EC4Y 0DY (GB)
  Designated Contracting States:
  CY GB IE MT
- **Unilever N.V.**
  3013 AL Rotterdam (NL)
  Designated Contracting States:
  AT BE BG CH CZ DE DK EE ES FI FR GR HR HU IS IT LI LT LU LV MC NL NO PL PT RO SE SI SK TR

(72) Inventors:
- **TAGGART, Jeffrey, Silver**
  Mclean, Virginia 22101 (US)
- **KALMAN, Jeffrey, M.**
  Cleveland Heights, Ohio 44118 (US)
- **NOTTINGHAM, John, Richard**
  Bratenahl, Ohio 44108 (US)
- **SPIRK, John, Wilford**
  Gates Mills, Ohio 44040 (US)
- **TAPPER, Jay**
  Virginia 22101 (US)
- **NOTTINGHAM, Rachel, Marie**
  Cleveland Heights, Ohio 44108 (US)
- **MCNEELEY, Carolyn, Marie**
  Fairview Park, Ohio 44126 (US)
- **SKINNER, Richard**
  Bebington, Wirral Merseyside CH63 3JW (GB)
- **WALL, Brian, Douglas**
  Bebington, Wirral Merseyside CH63 3JW (GB)
- **WIRE, Stephen, Lee**
  Bebington, Wirral Merseyside CH63 3JW (GB)

(74) Representative: **Newbould, Frazer Anthony et al**
Unilever Patent Group
Colworth Science Park
Sharnbrook
Bedford, MK44 1LQ (GB)

(56) References cited:
EP-A- 0 232 819
JP-A- 3 222 905
US-A- 3 794 050
US-A- 5 511 270

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 114 342 B1

Description

[0001] The present invention relates to a vibrating hairbrush with improved detangling capability.

[0002] U.S. Patent No. 3,517,235 to Flowers et al., discloses oppositely driven reciprocating hair brush units are intended to provide a brushing and massaging action whereby twisted hair is effectively unsnarled as the user traverses the hair with the brush. The brush disclosed is purported to provide improved efficiency in operation by effecting the counter-reciprocation of a pair of bristle units wherein the oppositely moving units are intended to effectively pull twisted hair apart as the brushing operation is performed. Unfortunately, such a reciprocating action has been found not to be as advantageous to a detangling operation due to its tendency to damage hair due to the shearing action of the simultaneously reciprocating bristle action.

[0003] U.S. Patent No. 2,465,250 discloses a vibratory hair brush comprising a horizontally mounted motor. The vibrations generated by the motor are translated into pulses in the bristle bearing portion of the device. The bristles are thus moved in a direction towards and away from the scalp during use. Over time, a beating motion to the scalp can become unpleasant to the user and provides only a limited effect in the actual detangling of the hair, having primarily a massaging purpose.

[0004] Another vibratory hair brush is disclosed in US 5 511 270.

[0005] Accordingly, there is a need for a vibrating hair brush for improved detangling of curled or twisted or knotted hair which operates in a selected plane for improved effectiveness in detangling with minimum hair damage and which is comfortable to a user during operation.

[0006] Accordingly, in a first aspect to the invention as claimed there is provided a vibrating hair brush for enhanced detangling of hair, comprising a head with a base and a bristle-bearing pad, the pad comprising a motor and a vibrating actuator for generating a vibration movement in the pad, the pad being pivotally attached to the base such that the pad pivots about a pivot axis which is substantially transverse the general longitudinal axis of the hair brush.

[0007] The rocking motion effected by the pad in the brush according to the present invention provides enough forward and backward movement in the bristles to effect detangling without significant movement towards and away from the user's scalp during use to cause discomfort during use. Accordingly, the brush is both effective and comfortable during use.

[0008] The general longitudinal axis of the brush is the axis which is perpendicular to the direction of brushing during use and will generally be along the long axis of the brush.

[0009] By transverse is meant that the pivot axis is orthogonal and in the same plane the general longitudinal axis of the brush.

[0010] Preferably, the vibrating movement is common to some of the bristles. Although detangling is effected by the vibrating bristles it is not envisaged that all the bristles need to vibrate and so some may be disposed to function in a conventional manner in addition to others which effect detangling through vibration.

[0011] More preferably, the bristle pad comprises a single support for all the bristles for common movement of the bristles. Having a single support for all the bristles provides for improved detangling since all the bristles will be vibrating in concert.

[0012] Preferably, the motor comprises a drive shaft which rotates in a direction orthogonal to the general plane of the bristle pad. Preferably, the vibrating actuator comprises an offset weight rotating in a plane generally parallel to the bristle pad. The offset weight rotating in a plane generally parallel to the bristle pad provides for the optimum vibration for detangling the hair without discomfort to the user.

[0013] The physics of how the vibration is generated are as follows:

[0014] With a mass rotating about an axis not coincident with its center of mass, the vibratory force, or Shaking Force, is described by $Fs=m*r*w^2$, where 'm' is the mass which is rotating, 'r' is the distance from the center of mass to the axis of rotation, and 'w' is the angular velocity (speed of rotation). In the present invention, the angular velocity, 'w', is relatively confined to a window predetermined by a set of experimental results which indicate the optimum detangling frequency.

[0015] Through knowledge obtained from experimentation and numerical models, we determined the Shaking Force required to achieve the performance we wanted given the additional constraints of user comfort and packaging. In reference to user comfort, we found that Shaking Forces exceeding a certain amount were undesirable to the user.

[0016] Preferably, the Shaking force at 40 Hz is from 3 to 5 N, more preferably from 3.5 to 4.5 N and most preferably from 3.9 to 4.1 N. The most preferred Shaking Force is around 4.03 Newtons.

[0017] Additionally, the isolator assembly needed to be of a minimum stiffness so that the head would not sag too much under its own weight when the brush was held upright and that the brush head did not move too much causing an intimidating look or an interference problem with the handle housing.

[0018] Also, the off-center weight could also not be placed too far from the isolator, or the brush would grow to an excessively tall appliance.

[0019] The dimensions of the weight were optimized for weight and also battery efficiency. Preferably, the weight is a cylinder. A cylinder provides the optimum vibration. Preferably, the cylinder has a diameter of from 10 to 20 mm, more preferably from 13 to 18 mm and most preferably around 16 mm. The final diameter of the cylindrical weight is preferably limited on the upper end so that the cylinder does not exceed the major diameter of the electric motor chosen. This was so that the weight

can be placed on the motor by the motor supplier during their assembly and easily dropped into the motor housing.

[0020] The cylinder height is thus determined after the diameter. Preferably, the cylinder height is from 3 to 8 mm, more preferably from 5 to 6 mm and especially preferably around 5.5 mm.

[0021] Preferably, the distance from the motor drive shaft (axis of rotation) to the center of cylinder is from 5 to 9 mm, more preferably from 6 to 8 mm and especially preferably around 7 mm.

[0022] Preferably, the operational angular velocity is from 32 Hz to 47 Hz. These angular velocities deliver the best detangling results as determined by consumer and empirical testing.

[0023] Preferably, the offset weight is mounted on a shaft of the motor assembly for causing an eccentric bias thereto resulting in the vibratory movement.

[0024] Preferably, the offset weight and motor assembly are fixed to the bristle pad.

[0025] Preferably, the base plate is attached to the bristle-bearing pad by an isolator. Preferably, the isolator is configured to translate a movement of the actuator to a circular or elliptical bristle pad vibrating movement, more preferably an elliptical movement. Preferably, the isolator is comprised of an elastomeric material such as styrene butadiene block copolymer or silicone elastomer. Alternatively, it may comprise sprung steel or other such resilient material.

[0026] Preferably, the isolator comprises a plate. Preferably, the plate comprises a central section which is fixed to the base and flexible ends at opposite sides of the central section in the general longitudinal axis of the brush, which are fixed to the pad. Preferably, the central section comprises from 20 to 50%, more preferably from 25 to 35% the overall width of the isolator. This provides the optimum translation of vibration from the motor to sufficient rocking of the pad to effect detangling of the hair without damaging the scalp.

[0027] Preferably, the pivot axis is located centrally within the central section of the isolator.

[0028] Preferably, the brush comprises a power supply in the handle. The power supply is connected to the motor by electrical wires. Preferably, electrical wires are passed from the handle to the base and into the pad from the sides and at opposite sides along the pivot axis in order to prevent the wires from being damaged during use of the brush through vibration.

[0029] Preferably, the hair brush includes a handle extending from the head portion in a handle axial direction. More preferably, this is within a plane generally parallel to bristle pad.

[0030] Preferably, the bristle pad vibrating movement is an elliptical movement having a longer elliptical axis in the handle axial direction.

[0031] Preferably, the isolator assembly is configured to inhibit vibratory movement in a direction perpendicular to the handle axial direction. Preferably, the isolator is fixed, preferably it is rigidly fixed, to the motor housing at its proximal and distal ends with regard to the handle of the brush.

[0032] Preferably, the isolator is fixed to the brush head at its sides transverse to the general longitudinal axis of the brush by way of connectors. Preferably, the connectors are less resilient than the remainder of the isolator. Such reduction in resilience can be effected by an increase in dimension or by the use of a different material. More preferably, the connectors extend along the sides of the isolator by from 10 to 70% of the overall length of the isolator. More preferably, the connectors have an average depth of from 110 to 300% the average depth of the isolator at the points of attachment to the bristle pad.

[0033] More preferably, the isolator is clamped into position from above and below the isolator at the connectors.

[0034] Preferably, the base is composed of two oppositely engaging members which clamp the isolator along the connectors. In such an embodiment at least one of the oppositely engaging members will have a recess conforming to the cross section of the connectors at the clamp point.

[0035] Preferably, the isolator assembly has a first stiffness in the handle axial direction and a second stiffness perpendicular to the handle axial direction, the first stiffness being less than the second stiffness.

[0036] Preferably, the bristles extend from the bristle pad in a direction generally perpendicular thereto for bristle movement corresponding to the bristle pad movement.

[0037] Preferably, the vibrating movement is in a frequency range 20 - 100 Hz more preferably from 30 to 65 Hz. In a hair brush according to the invention this frequency range provides the best detangling without discomfort to the user.

[0038] In a second aspect the invention as claimed provides a method for detangling hair comprising brushing the hair with a brush according to the first aspect of the invention.

[0039] In this description, it should be understood that the term "vibrating" should be understood to include oscillating and the term "brush" should be understood to include embodiments that might alternatively be described as combs.

[0040] Particular embodiments of the invention will now be described with reference to the following non-limiting drawings in which:

FIGURE 1 is a top planar view of one embodiment;

FIGURE 2 is a side planar view of the embodiment of Figure 1;

FIGURE 3 is a front planar view thereof;

FIGURE 4 is an exploded view of the embodiment of Figure 1;

FIGURE 5 is a top view with a top cover plate removed;

FIGURE 6 is a broken out sectional side view;

FIGURE 7 is a perspective view generally showing the embodiment in use by brushing a user's hair;

FIGURE 8 is a reference diagram of an elliptical plane;

FIGURE 9 is a flowchart of a method of operating the embodiment;

FIGURE 10 is a side elevation of a preferred isolator; and

FIGURE 11 is a view of the same isolator in perspective.

[0041] The subject embodiments of a vibrating hair brush provide a solution to the needs of better detangling hair with less effort and less damage to a user's hair while detangling. A positive experience is effectively provided to the user as a result of a less painful brushing operation for more enjoyable detangling of the hair than in previous systems. The hair is not being "ripped out" or damaged during the brush detangling, but is gently detangled with less pulling as a result of a lower frequency and gentler detangling operation with the subject vibrating detangling brush. The brush works out the tangles itself as a result of the particular vibratory movement, thereby avoiding the user having to substantially pull hair in an effort to accomplish the desired detangling. Hand fatigue is also substantially reduced during use.

[0042] With reference to FIGURES 1, 2 and 3, it can be seen that the subject embodiment comprises a handle portion **A** and brush head portion **B.** In this description, it should be understood that the term "brush" encompasses embodiments that might alternatively be described as combs. The handle portion is ergonomically configured for ease of use while being held in a user's hands. A longitudinal axis of handle **A** is generally along the lines C-C of Figure 1. The brush head portion **B** comprises a plurality of bristles **10** which normally extend from a bottom wall **12** of the head portion in a manner to engage and extend through the hair of a user. The illustrated embodiment shows a somewhat spherically configured bottom wall **12** as one species of an embodiment, but it is intended that other bottom wall configurations can be included as an alternative embodiment, such as flat or tubular. Bristle stiffness can vary from relatively stiff to soft, although it is preferred that they are relatively stiff; the bristles typically having a cantilevered beam stiffness of greater than about 100 Newton/meters when attached to the bristle pad.

[0043] As will be discussed herein in more detail, the head portion **B** is intended to vibrate and such vibratory movements are insulated from the handle portion **A** so that the vibrations are diminished in translation to the handle and a user's hand. For the avoidance of doubt, the term "vibrating movement" should be understood to include an oscillating or reciprocating movement. Accordingly, a brush head upper housing comprising a top wall **14** is spaced from the handle as at area **16** to accommodate the vibratory movement without tapping contact to the handle portion **A.**

[0044] With reference to FIGURES 4, 5 and 6, the subject brush includes a motor **20** operating an actuator **22** comprising an offset or counter weight relative to motor shaft **24** so that as the motor rotates the shaft, the weight **22** will cause an eccentric bias relative to the shaft inducing a vibrating movement of the motor and weight assembly. Such a movement will generally have a circular momentum in an actuator plane essentially parallel to a plane defined by the lines C-C and D-D of Figure 1. In this description, it should be understood that the term "brush" encompasses embodiments that might alternatively be described as combs.

[0045] An aspect of the subject embodiment includes the translating of the motor and weight circulatory vibratory motion into a curvilinear pattern, such as an elliptical movement, of the bristle pad in a particular plane of movement. An isolator elastomeric member **40** is affixed to the motor **20** and also affixed to the bristle pad assembly **10, 12, 14** so that the vibratory motion induced by the motor can be translated to the bristles **10.** The motor **20** is received within a cavity **42** of the bristle pad head portion sized to allow receipt of the motor **20** and the rotational movement of the offset weight **22** that causes the desired vibratory movement. The vibrations created by the off center weight are transmitted to the brush head **14** due to the motor and weight assembly being connected to the brush head by hard, stiff connections. The isolators **40** allow this motion to exist by letting the head move mostly independently from the handle by close receipt of the isolator ring lobes **50** within mating lobe cutouts **52** and the clamping of the lobes within the cutout **52** by sandwiching the lobes between the brush head **14** and upper motor cap **56.** The top wall **14** and cutouts **52** are affixed hard plastic pieces ultimately supporting the bristles **10.** The particular configuration of the isolator **40** is such that the lobes are closely received within the cutouts **52** and a webbing **60** includes a slot **62** for close mating reception of cap cutout **64** of fastening cap **56.** In addition, the end portions of the elastomeric lobes **50** and webbing **60** are also received within handle portion cutouts **70** so that the isolator **40** effectively isolates the vibratory movement of the head portion away from the handle portion **A.** As can be seen with reference to FIGURES 5 and 6, the head portion assembly thus can float within the handle portion **A** because the vibrating actuator and motor assembly including cap **56** is spaced from the interior wall **80** of the handle portion. Except for that portion of the elastomeric ring received within the handle cutouts **70,** the ring is affixed within the cutouts **70** when the upper

handle half **78** is fastened on to the lower handle half **76.** Other items shown within FIGURES 4 and 5 include a battery compartment **90** (although the device could also be a corded), electrical wire passage ways for the motor **92,** an on-off switch **94** and a switch pad **96.** A decorative cover **98** within the handle **78** covers the motor cap **56.**

[0046] Although in the illustrated embodiment, the isolator **40** is an elastomeric material, alternatives could include any spring structure capable of producing a similar result, such as an assembly of metal springs, plastic gaskets or other elastic members.

[0047] Another aspect of the elastic isolator **40** is that it is configured to translate the circular vibratory movement of the eccentric weight **22** into an elliptical movement in a plane generally parallel to the bristle pad. More particularly, it can be seen that the isolator **40** is not supported along the direction of the axis CC (Figure 1), but is supported along a line perpendicular to the axial direction (line D-D of Figure 1). The elastomer thus has a first stiffness in the handle axial direction and a second stiffness perpendicular to the handle axial direction, the first stiffness being less than the second stiffness. The effect of such a mounting assembly is that the vibratory movement of the motor and weight will be greater in a direction along the line C-C than along the line D-D. (See Figures 1 and 8) If a user's hair (see Figure 7) is mostly aligned with line D-D (see Figures 1 and 8), then the vibratory movement of the bristles **10** will be to effectively vibrate in a manner having a greater extent perpendicular to the hair's extending direction than along, i.e. parallel, to said direction. This tends to untangle twisted or knotted hair by the bristles separating the hairs by slightly pulling them apart, and even more slightly pushing and pulling the hair in its extending direction for better detangling the hair with less effort and less damage to the hair in the detangling process. A related benefit is that friction between the bristles and the hair, in particular the static friction, is reduced.

[0048] With reference to FIGURE 6, another aspect of the present embodiments is that the vibratory movement of the head portion **B** is in a curvilinear plane generally normal to a user's scalp to avoid vibrating the bristles into the scalp, which has been observed to result in an unpleasant sensation to a user. In the perspective view of FIGURE 6 the eccentric weight **22** is clearly seen as to how, upon rotation of the motor shaft, an eccentric bias is imposed on the motor **20** and thus also onto the isolator support member **40.** However, since the rotation of the weight **22** is merely in an actuator plane generally defined by the engagement line **82** between the upper and lower half shells **12, 14** of the head portion **B,** the resulting elliptical movement of the bristles **10** is in a plane generally parallel to the actuator plane.

[0049] Another aspect of the subject embodiments is that the vibratory movement is intended to operate in a frequency range generally lower than most prior art vibratory brushes. Empirical evidence has determined that highly effective detangling can occur with the vibrating bristles operating in a frequency range between 20 - 100 Hz and more preferably between 30 - 65 Hz, with the most efficient detangling of the hair, in terms of user effort required to pull the brush through hair, being either one of 42 Hz or 62 Hz. Thus, an improved method for detangling hair comprises brushing the hair with a brush having vibrating bristles operating in a frequency range between 20 to 100 Hz and disposed to operate in a curvilinear direction within a plane positioned generally parallel to a user's scalp, or possibly for longer hair (FIGURE 7), an extending plane of a user's hair as the hair extends from a user's scalp. The brushing comprises the bristles operating in an elliptical pattern having a first longer axis of movement in a direction perpendicular to a user's hanging or extending hair direction and a second shorter axial movement parallel to the user's hanging or extending hair direction.

[0050] With reference to FIGURES 7 to 9, a method of operating the present brush embodiment for enhanced detangling of hair comprises turning on the brush so that the bristles vibrate **120** in the desired elliptical plane parallel to the bristle pad plane **82** (Figure 6). The brush is then aligned **122** in a position relative to the user's hair so that the extending direction of the hair is generally aligned with axial direction D-D of the brush head, i.e., where the ellipse major axis is perpendicular to the hair direction. Brushing of the hair along the extending direction of the hair will thus provide a detangling effect that is more efficient in the hair detangling with less user effort to pull out the tangles and with minimum fatigue to the user's hand.

[0051] For hair that does not normally hang such as shown in FIGURE 7, i.e., very curly hair that may extend fairly outwardly from the user's scalp, similar principles apply except that the user's brushing of the hair comprises a pulling along the length of the hair, or a picking thereof, to induce the hair's extending direction outwardly from the scalp, instead of falling therefrom. The present invention is particularly useful with such hair and with hair that is long (i.e. beyond chin length) and with hair that is dry or damaged.

[0052] Figure 10 shows an isolator (40) which, when fixed inside the head of the hair brush, is attached to the bristle bearing pad (14) such that movement of the isolator (40) results in movement of the bristle bearing pad (14). The motor (not shown) inside the pad results in vibration of the isolator which, because it is fixed along the connectors (60) results in sufficient movement (arrows B') of the ends (B) to effect enough rocking (arrows C) to detangle hair without harming the scalp. Detangling the hair is effected by movement in the D direction while scalp discomfort is effected by movement in the E direction.

[0053] Figure 11 shows an isolator which is preferred in the present invention. The isolator has a central section A and flexible end portions B. The end portions are attached to the pad (not shown) at points (123) while the central portion is attached to the base at points (124).

The central portion is thus fixed and does not rock while the flexible ends are capable of rocking when the motor causes vibration.

[0054] The subject embodiments have also been described with reference to the brushing of human hair, but the subject brush can also be employed to untangle other things such as animal or pet hair or even tangled strands of other materials than hair.

[0055] The exemplary embodiment has been described with reference to the preferred embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the exemplary embodiment be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims.

Claims

1. A vibrating hair brush for enhanced detangling of hair, comprising a head (8) with a base (14) and a bristle-bearing pad (12), the pad comprising a motor (20) and a vibrating actuator for generating a vibration movement in the pad, **characterised in that** the pad being pivotally attached to the base such that the pad can pivot about a pivot axis which is substantially transverse the general longitudinal axis of the hair brush.

2. Brush according to claim 1 wherein the actuator is disposed for generating a vibrating movement of the pad such that the pad rocks about the pivot axis.

3. The hair brush of claim 1 or 2 wherein the bristle pad comprises a single support for all the bristles for common movement of the bristles.

4. The hair brush of any preceding claim wherein the vibrating actuator comprises an offset weight rotating in a plane generally parallel to the bristle pad.

5. The hair brush of claim 4 wherein the offset weight is mounted on a shaft of the motor assembly for causing an eccentric bias thereto resulting in the vibratory movement.

6. The hair brush of claim 5 wherein the offset weight and motor assembly are fixed to the bristle pad.

7. The hair brush of any preceding claim wherein the bristle pad is connected to the base plate by an isolator assembly configured to translate a movement of the actuator to an elliptical bristle pad vibrating movement.

8. The hair brush of any preceding claim wherein the handle extends from the head in a handle axial direction which is within a plane generally parallel to bristle pad.

9. The hair brush of claim 8 wherein the bristle pad vibrating movement is an elliptical movement having a longer elliptical axis in the handle axial direction.

10. The hair brush of claim 8 or 9 wherein the isolator assembly is configured to inhibit vibratory movement in a direction perpendicular to the handle axial direction.

11. The hair brush of any of claims 8-10 wherein the isolator assembly has a first stiffness in the handle axial direction and a second stiffness perpendicular to the handle axial direction, the first stiffness being less than the second stiffness.

12. The hair brush of any preceding claim wherein the bristles extend from the bristle pad in a direction generally perpendicular thereto.

13. The hair brush of any preceding claim wherein the vibrating movement is in a frequency range 20 - 100 Hz.

14. The hair brush of claim 13 wherein the frequency is in the frequency range 30 to 65 Hz.

15. A method for detangling hair comprising brushing the hair with a brush according to any preceding claim.

Patentansprüche

1. Vibrierende Haarbürste zum besseren Entwirren von Haar, die einen Kopf (8) mit einer Basis (14) und einem Kissen (12), das Borsten trägt, umfasst, wobei das Kissen einen Motor (20) und einen vibrierenden Aktor zum Erzeugen einer Vibrationsbewegung in dem Kissen umfasst, **dadurch gekennzeichnet, dass** das Kissen an der Basis schwenkbar befestigt ist, derart, dass das Kissen um eine Schwenkachse schwenken kann, die zu der allgemeinen Längsachse der Haarbürste im Wesentlichen quer verläuft.

2. Bürste nach Anspruch 1, wobei der Aktor dazu ausgelegt ist, eine Vibrationsbewegung des Kissens in der Weise zu erzeugen, dass das Kissen um die Schwenkachse kippt.

3. Haarbürste nach Anspruch 1 oder 2, wobei das Borstenkissen einen einzigen Träger für alle Borsten für eine gemeinsame Bewegung der Borsten umfasst.

4. Haarbürste nach einem vorhandenen Anspruch, wobei der vibrierende Aktor ein versetztes Gewicht um-

fasst, das sich in einer zu dem Bürstenkissen im Allgemeinen parallelen Ebene dreht.

5. Haarbürste nach Anspruch 4, wobei das versetzte Gewicht an einer Welle der Motoranordnung montiert ist, um darauf eine exzentrische Vorbelastung auszuüben, die die Vibrationsbewegung zur Folge hat.

6. Haarbürste nach Anspruch 5, wobei das versetzte Gewicht und die Motoranordnung an dem Bürstenkissen befestigt sind.

7. Haarbürste nach einem vorhergehenden Anspruch, wobei das Bürstenkissen mit der Basisplatte durch eine Isolatoranordnung verbunden ist, die konfiguriert ist, um eine Bewegung des Aktors in eine elliptische Bürstenkissen-Vibrationsbewegung zu überführen.

8. Haarbürste nach einem vorhergehenden Anspruch, wobei sich der Griff von dem Kopf in einer axialen Richtung des Griffs erstreckt, die in einer zu dem Bürstenkissen im Allgemeinen parallelen Ebene liegt.

9. Haarbürste nach Anspruch 8, wobei die Bürstenkissen-Vibrationsbewegung eine elliptische Bewegung ist, deren Ellipsenhauptachse in der axialen Griffrichtung orientiert ist.

10. Haarbürste nach Anspruch 8 oder 9, wobei die Isolatoranordnung konfiguriert ist, um eine Vibrationsbewegung in einer Richtung senkrecht zu der axialen Griffrichtung zu verhindern.

11. Haarbürste nach einem der Ansprüche 8-10, wobei die Isolatoranordnung in der axialen Griffrichtung eine erste Steifigkeit hat und senkrecht zu der axialen Griffrichtung eine zweite Steifigkeit hat, wobei die erste Steifigkeit geringer ist als die zweite Steifigkeit.

12. Haarbürste nach einem vorhergehenden Anspruch, wobei sich die Bürsten von dem Bürstenkissen in einer hierzu im Allgemeinen senkrechten Richtung erstrecken.

13. Haarbürste nach einem vorhergehenden Anspruch, wobei die Vibrationsbewegung in einem Frequenzbereich von 20 bis 100 Hz liegt.

14. Haarbürste nach Anspruch 13, wobei die Frequenz im Frequenzbereich von 30 bis 65 Hz liegt.

15. Verfahren zum Entwirren von Haar, das das Bürsten des Haars mit einer Bürste nach einem vorhergehenden Anspruch umfasst.

Revendications

1. Brosse à cheveux vibrante pour le démêlage amélioré des cheveux, comprenant une tête (B) avec une base (14) et un coussinet supportant des poils (12), le coussinet comprenant un moteur (20) et un actionneur vibrant pour générer un mouvement de vibration dans le coussinet, **caractérisée en ce que** le coussinet est fixé de manière pivotante à la base de sorte que le coussinet peut pivoter autour d'un axe de pivot qui est sensiblement transversal par rapport à l'axe longitudinal général de la brosse à cheveux.

2. Brosse selon la revendication 1, dans laquelle l'actionneur est disposé pour générer un mouvement de vibration du coussinet de sorte que le coussinet se balance sur l'axe de pivot.

3. Brosse à cheveux selon la revendication 1 ou 2, dans laquelle le coussinet de poils comprend un seul support pour tous les poils pour le mouvement commun des poils.

4. Brosse à cheveux selon l'une quelconque des revendications précédentes, dans laquelle l'actionneur vibrant comprend un poids décalé tournant dans un plan généralement parallèle au coussinet de poils.

5. Brosse à cheveux selon la revendication 4, dans laquelle le poids décalé est monté sur un arbre de l'ensemble de moteur afin de provoquer une sollicitation excentrique par rapport à celui-ci, se traduisant par le mouvement vibratoire.

6. Brosse à cheveux selon la revendication 5, dans laquelle le poids décalé et l'ensemble de moteur sont fixés sur le coussinet de poils.

7. Brosse à cheveux selon l'une quelconque des revendications précédentes, dans laquelle le coussinet de poils est raccordé à la plaque de base par un ensemble isolant configuré pour transformer un mouvement de l'actionneur en un mouvement vibrant elliptique du coussinet de poils.

8. Brosse à cheveux selon l'une quelconque des revendications précédentes, dans laquelle la poignée s'étend à partir de la tête dans une direction axiale de la poignée qui est dans un plan généralement parallèle au coussinet de poils.

9. Brosse à cheveux selon la revendication 8, dans laquelle le mouvement vibrant du coussinet de poils est un mouvement elliptique ayant un axe elliptique plus long dans la direction axiale de la poignée.

10. Brosse à cheveux selon la revendication 8 ou 9, dans laquelle l'ensemble isolant est configuré pour empêcher le mouvement vibratoire dans une direction perpendiculaire à la direction axiale de la poignée.

11. Brosse à cheveux selon l'une quelconque des revendications 8 à 10, dans laquelle l'ensemble isolant a une première rigidité dans la direction axiale de la poignée et une seconde rigidité perpendiculaire à la direction axiale de la poignée, la première rigidité étant inférieure à la seconde rigidité.

12. Brosse à cheveux selon l'une quelconque des revendications précédentes, dans laquelle les poils s'étendent à partir du coussinet de poils dans une direction généralement perpendiculaire à celui-ci.

13. Brosse à cheveux selon l'une quelconque des revendications précédentes, dans laquelle le mouvement vibratoire est de l'ordre de 20 - 100 Hz.

14. Brosse à cheveux selon la revendication 13, dans laquelle la fréquence est de l'ordre de 30 à 65 Hz.

15. Procédé pour démêler des cheveux comprenant l'étape consistant à brosser les cheveux avec une brosse selon l'une quelconque des revendications précédentes.

Fig.1.

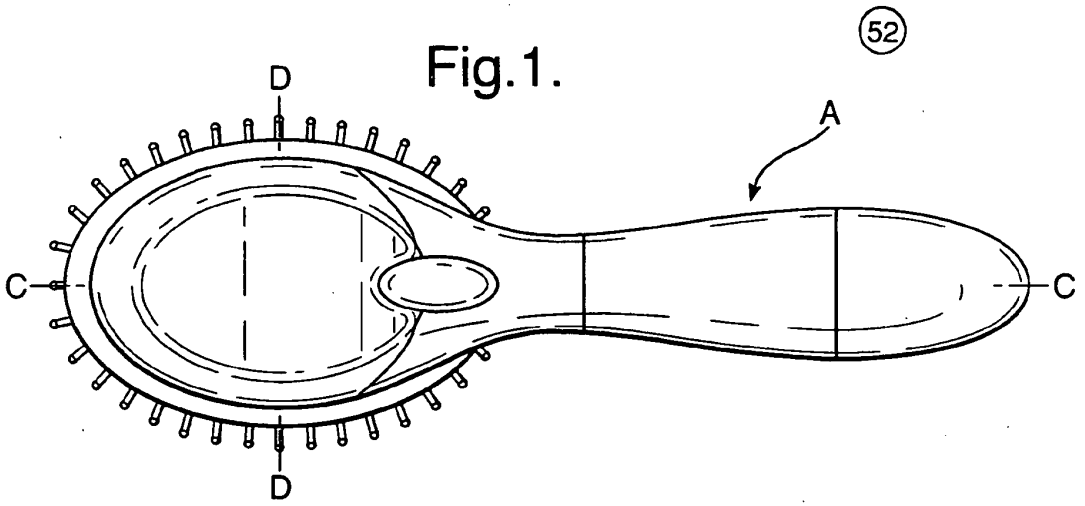


Fig.2.

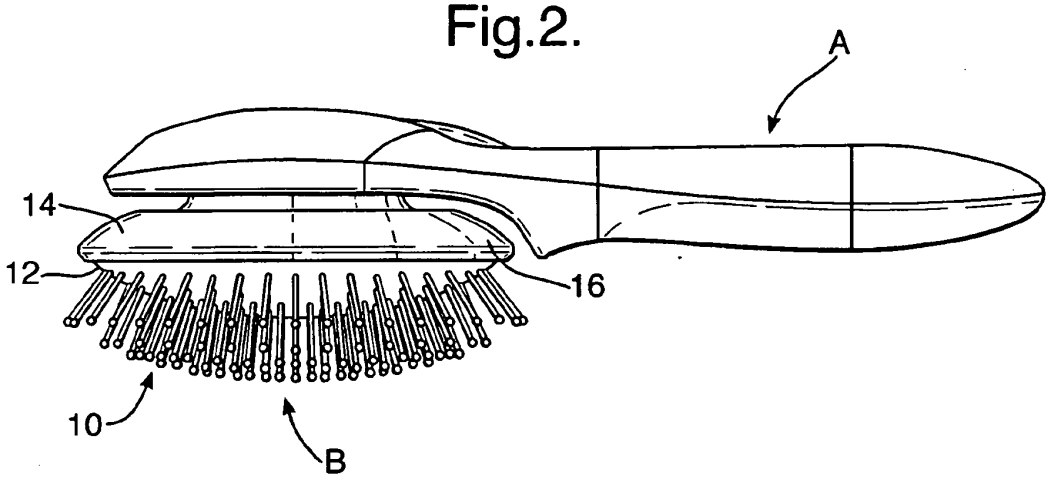


Fig.3.

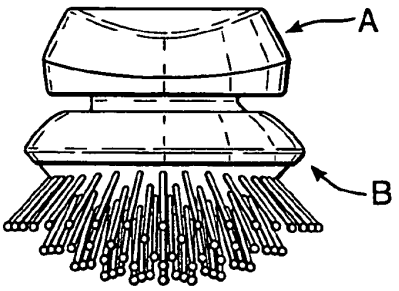


Fig.4.

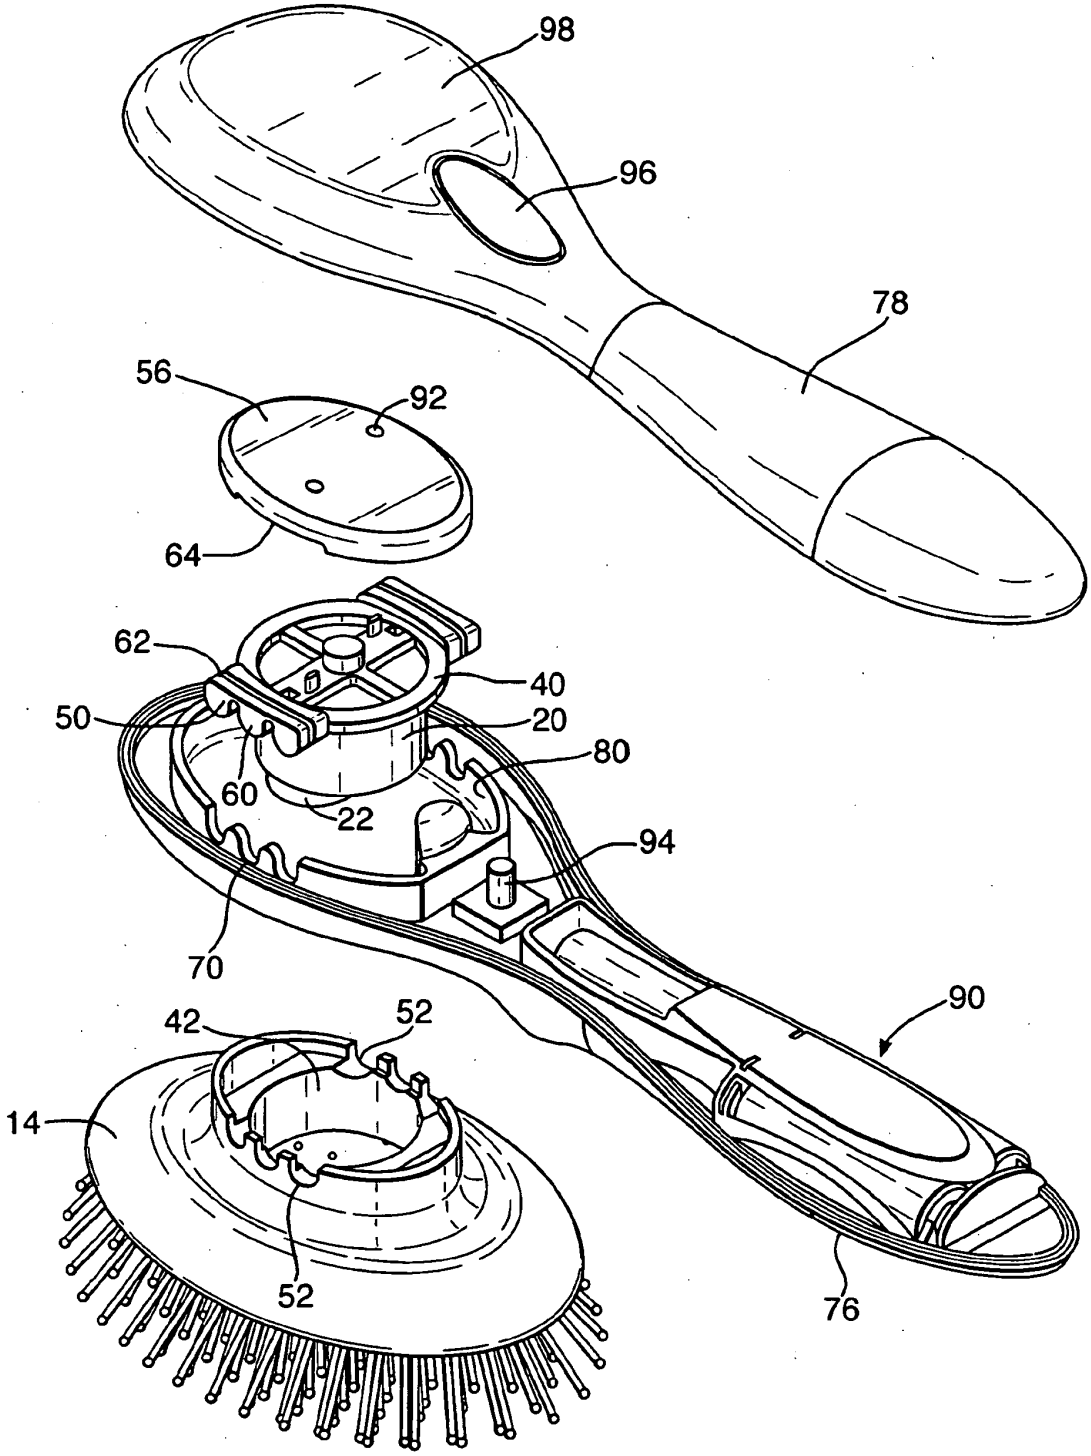


Fig.5.

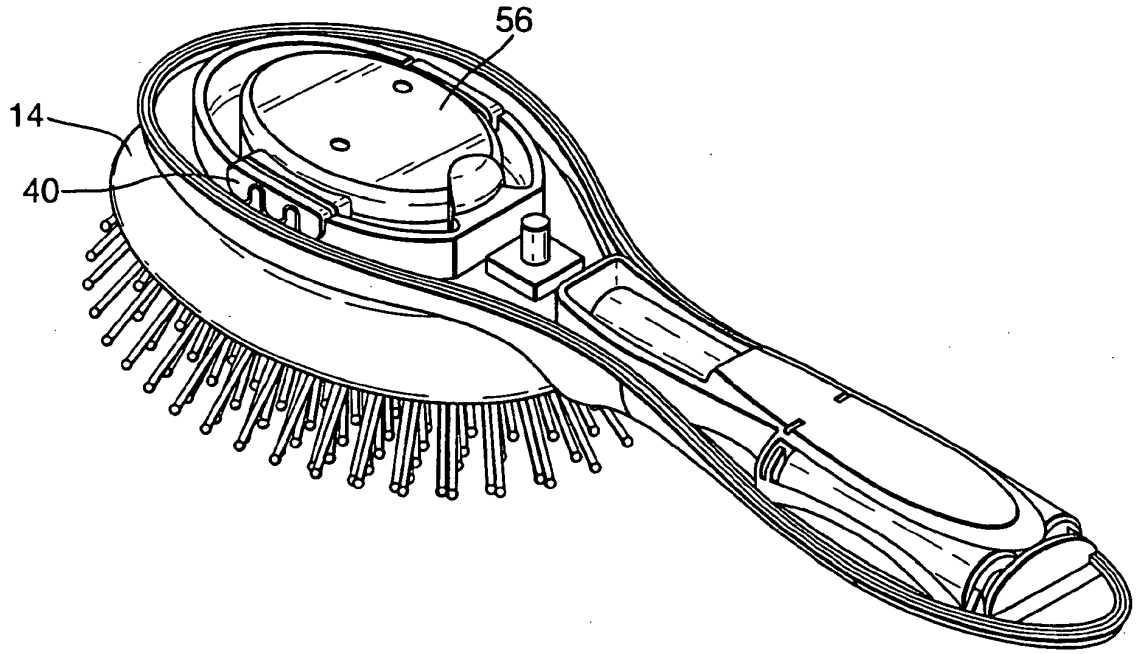


Fig.6.

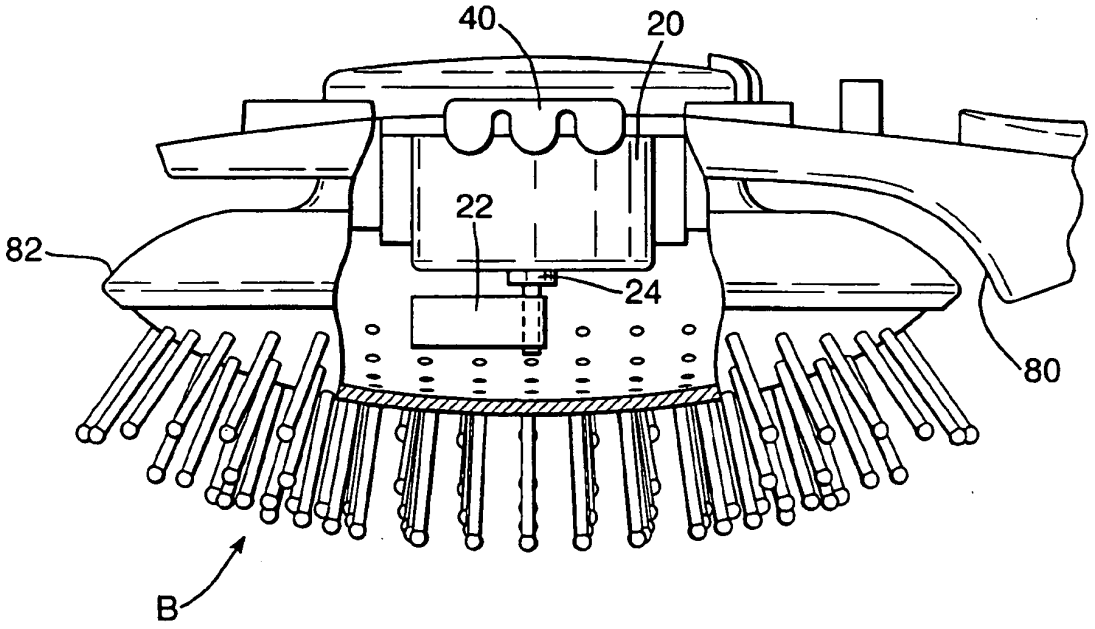


Fig.7.

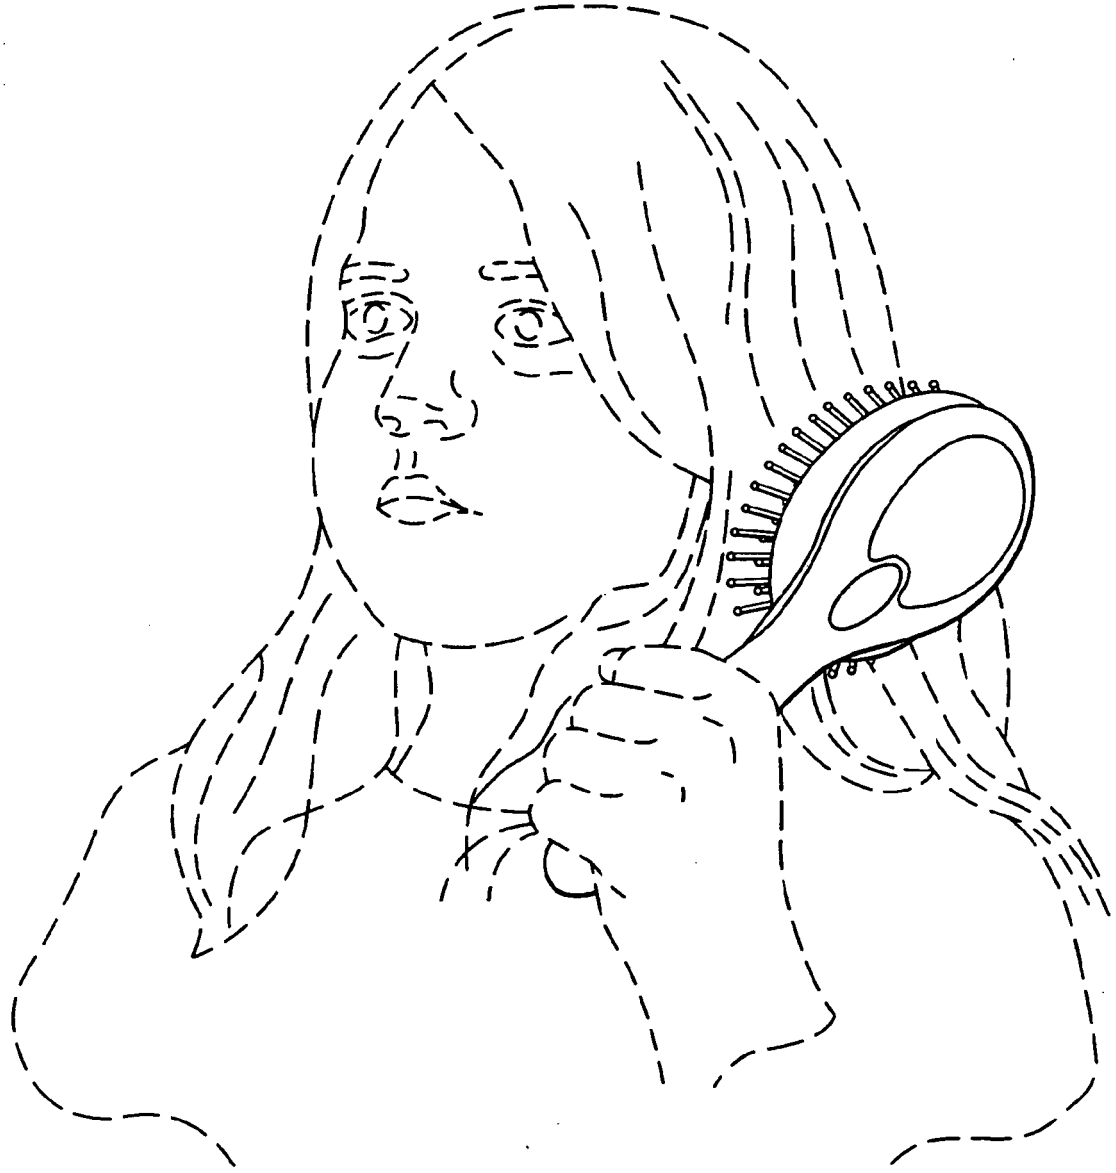


Fig.8.

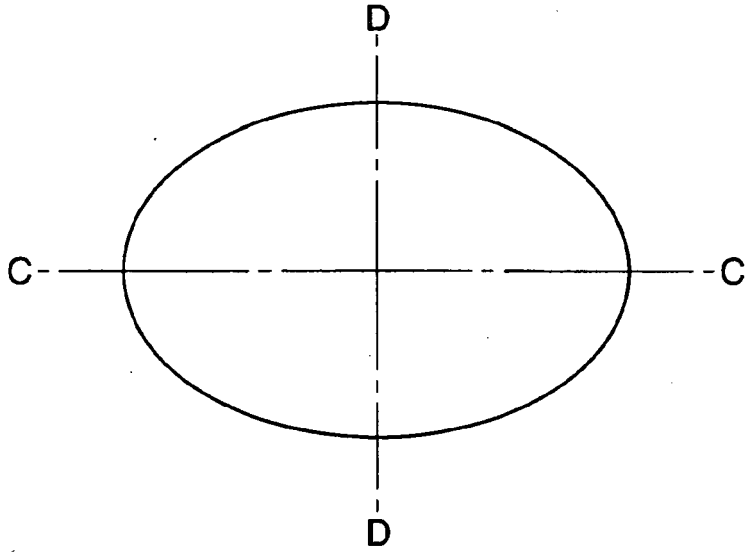

D
C
C
D

Fig.9.

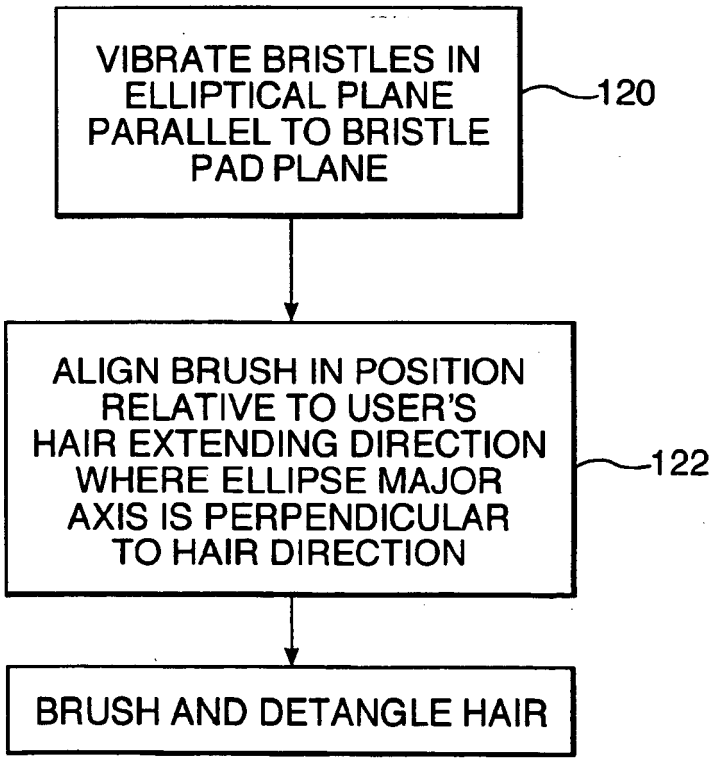
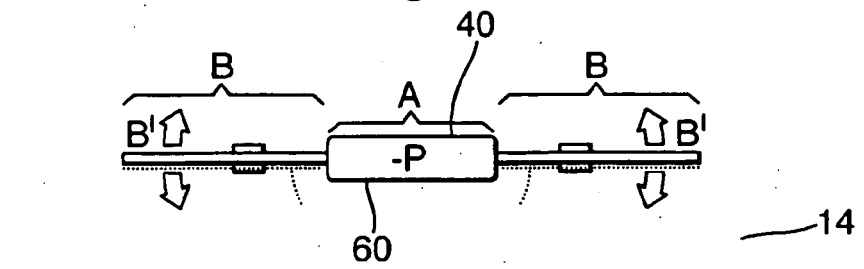

VIBRATE BRISTLES IN ELLIPTICAL PLANE PARALLEL TO BRISTLE PAD PLANE
120
ALIGN BRUSH IN POSITION RELATIVE TO USER'S HAIR EXTENDING DIRECTION WHERE ELLIPSE MAJOR AXIS IS PERPENDICULAR TO HAIR DIRECTION
122
BRUSH AND DETANGLE HAIR

Fig.10.



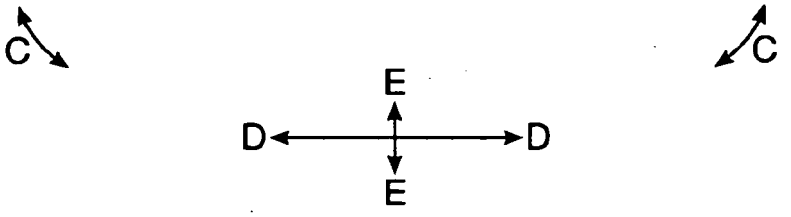
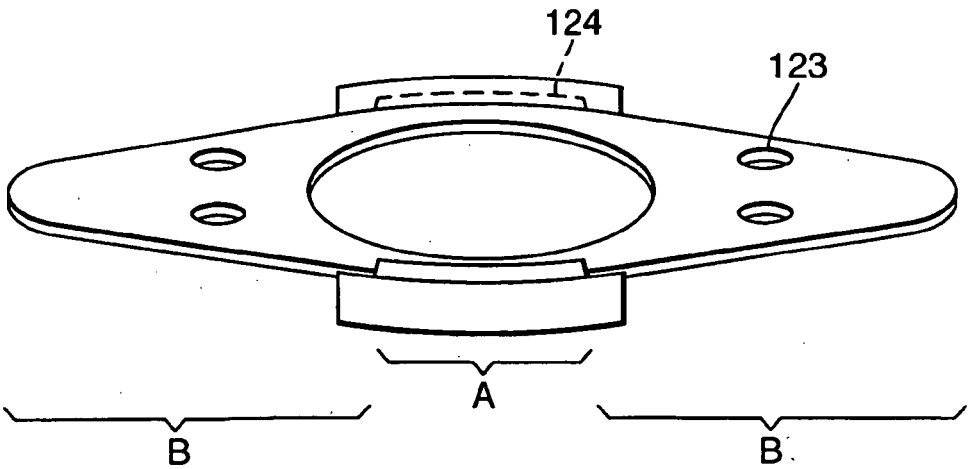


Fig.11.



REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3517235 A, Flowers **[0002]**
- US 2465250 A **[0003]**
- US 5511270 A **[0004]**