

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65G 39/09		A1	(11) International Publication Number: WO 96/16884
			(43) International Publication Date: 6 June 1996 (06.06.96)
(21) International Application Number: PCT/AU95/00758 (22) International Filing Date: 15 November 1995 (15.11.95) (30) Priority Data: PM 9791 1 December 1994 (01.12.94) AU (71) Applicant (for all designated States except US): JLV INDUSTRIES PTY. LTD. [AU/AU]; 85 McCoy Street, Myaree, W.A. 6154 (AU). (72) Inventor; and (75) Inventor/Applicant (for US only): SEALEY, Derek, Alfred [AU/AU]; 47 Rudall Way, Padbury, W.A. 6025 (AU). (74) Agents: HARWOOD, Errol, John et al.; Wray & Associates, Primary Industry House, 239 Adelaide Terrace, Perth, W.A. 6000 (AU).		(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG). Published With international search report.	

(54) Title: END CAP ASSEMBLY FOR A ROLLER TUBE OF A CONVEYOR ROLLER

(57) Abstract

An end cap assembly (10) for a roller tube (76) of a conveyor roller (78) comprising an end cap body (12) proportioned to press fit within an end of the roller tube (76), a bearing means retained between the end cap body (12) and a shaft (74) of the conveyor roller (78) and a seal means (16) provided about the shaft (74) and abutting an outer surface (18) of the end cap body (12) so as to restrict the passage of dust and other materials into the bearing means (14).

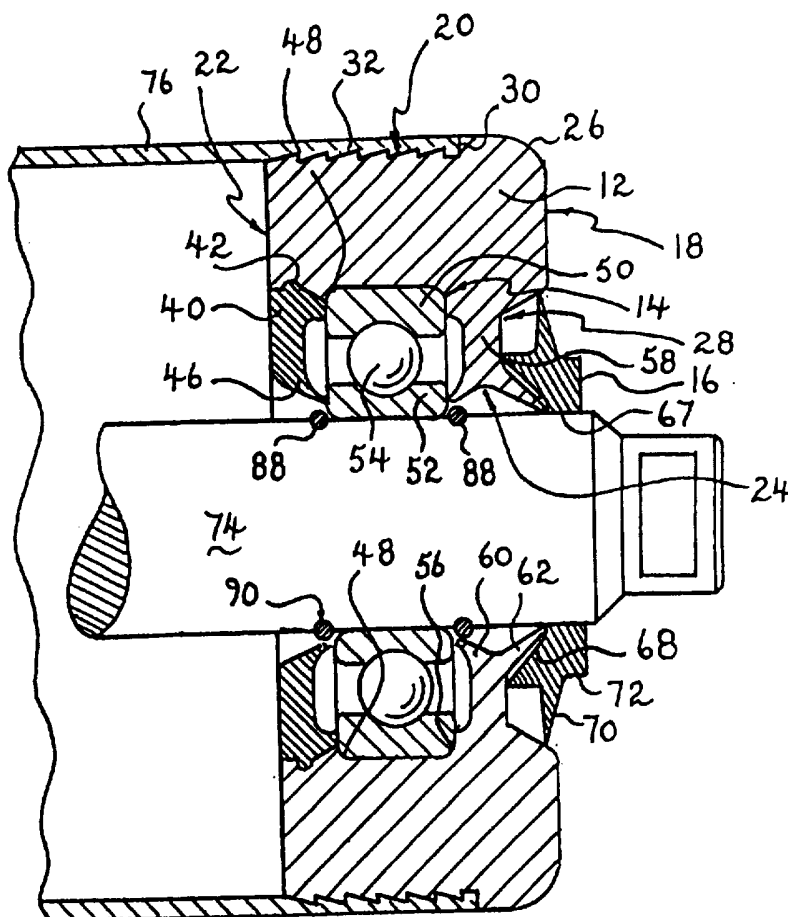

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MD	Republic of Moldova	TJ	Tajikistan
DE	Germany	MG	Madagascar	TT	Trinidad and Tobago
DK	Denmark	ML	Mali	UA	Ukraine
ES	Spain	MN	Mongolia	US	United States of America
FI	Finland			UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

TITLE

"END CAP ASSEMBLY FOR A ROLLER TUBE OF A CONVEYOR ROLLER"

FIELD OF THE INVENTION

5

THIS INVENTION relates to an end cap assembly for a roller tube of a conveyor roller. More particularly, the end cap assembly is of the form incorporating bearings for rotatably mounting the end cap and a roller tube on a shaft.

10 DISCUSSION OF THE PRIOR ART

At present, end cap assemblies for idler rollers comprise a large number of component parts, possibly 24 separate parts in some instances. Typical end cap assemblies also have problems associated with vibration or conveyor rattle which can be transferred by the steel casing of the roller bearings in the end cap assembly and in turn to a shaft held therein. Such vibration is known to have a peening effect on the shaft which is undesirable.

A further consequence of the vibration or conveyor rattle is noisy operation. A still further problem associated with the prior art is the need for establishing and maintaining an effective seal in the end cap assembly against dust entering the bearing or the roller.

The end cap assembly for a roller tube of a conveyor roller has as one object thereof to substantially overcome the above problems associated with the prior art.

BRIEF DESCRIPTION OF THE INVENTION

30 In accordance with the present invention there is provided an end cap assembly for a roller tube of a conveyor roller characterised by comprising an end cap body proportioned to press fit within an end of the roller tube, a bearing means

- 2 -

retained between the end cap body and a shaft of the conveyor roller and a seal means provided about the shaft and abutting an outer surface of the end cap body so as to restrict the passage of dust and other materials into the bearing means.

5

Preferably, the seal means is press fitted about the shaft whereby upon rotation thereof the seal means rotates with respect to the end cap body.

10 The end cap body preferably has a generally annular form having an inner collar portion arranged to abut in a flexible manner the shaft projecting therethrough. Still preferably, the bearing means is retained between the end cap body and the shaft at least in part by way of an annular retaining means that may be snap fitted to the end cap body to hold the bearing means between it and the inner collar portion.

15

In accordance with another aspect of the present invention there is provided a method for the refurbishment of an existing roller tube of a conveyor roller characterised by comprising the steps of cutting the existing roller tube around its circumference adjacent an end cap thereof, removing the end cap assembly and
20 replacing same with an end cap assembly comprising an end cap body proportioned to press fit within the cut end of the roller tube, a bearing means retained between the end cap body and a shaft of the conveyor roller tube such that an outer race thereof moves with the end cap body and its inner race moves with the shaft and a seal means press fitted about the shaft and abutting an outer
25 surface of the end cap body.

Preferably, the seal means rotates with the shaft and abuts flexibly and resiliently the outer surface of the end cap body in a sliding manner.

30 Still preferably, the end cap body contains at least one aperture therein allowing passage of fluid from within the roller tube through the end cap body.

DESCRIPTION OF THE DRAWINGS

The present invention will now be described, by way of example only, with reference to one embodiment thereof and the accompanying drawings, in which:

5

Fig. 1 is a perspective view of an unmodified conveyor roller having a prior art end cap assembly fitted thereto;

10

Fig. 2 is a perspective view of the conveyor roller of Fig. 1 after having the roller tube thereof cut about its circumference and having the end cap assembly removed from about the shaft;

Fig. 3 is an exploded perspective view of the conveyor roller of Fig. 2 to which an end cap assembly in accordance with the present invention is being fitted;

15

Figure 4 is a perspective view of the conveyor roller of Fig. 2 to which an end cap assembly of the present invention has been fitted;

Fig. 5 is a cross-sectional view of an end cap assembly of the present invention fitted to an end of a conveyor roller; and

Fig. 6 is an exploded cross-sectional view of the end cap assembly of Fig. 5, having the bearing means removed therefrom.

20

DESCRIPTION

In Figs. 5 and 6 there is shown an end cap assembly 10 comprising an end cap body 12 of generally annular configuration, a bearing means 14 and an annular seal means, for example an annular seal ring 16.

25

The end cap body 12 comprises an outer surface 18, a recessed peripheral surface 20, an inner surface 22 and an inner collar portion 24. The outer surface 18 has a smooth outer edge 26 and a central annular channel 28. The peripheral surface 20 has a shoulder 30 provided therein between the smooth edge 26 and a substantially flat face 32.

30

- 4 -

The inner surface 22 is substantially flat but has provided therein a recess 34. The recess 34 forms two sealing portions 36 and 38 in which a retaining means 40 and the bearing means 14 respectively are located, as best seen in Fig. 6.

- 5 The retaining means 40 is provided in the form of an annular ring and having provided thereon a raised rib 42 to provide positive location thereof in a complimentary recess 44 of the sealing portion 36. A pair of annular arms 46 extend outwardly from the retaining means 40. The seating portions 36 and 38 are separated by a shoulder 48 against which the retaining means 40 is held but
10 over which the bearing means 14 may pass.

- The bearing means 14 comprises an outer race 50, an inner race 52 and a single row of ball bearings 54 held therebetween in known manner. The arms 46 of the retaining means 40 abut resiliently and flexibly the inner race 52 and the outer
15 race 50.

- The inner collar portion 24 of the end cap body 12 comprises an inner shoulder 56 and a neck portion 58 projecting therefrom and in part defined by the channel 28. The neck portion 58 has a pair of arms 60 and 62 projecting therefrom. The
20 arm 60 projects inwardly and abuts the inner race 52 of the bearing means 14. The outer race 50 abuts the inner shoulder 56. The arm 62 projects outwardly but away from the neck portion 58. The arm 62 defines the narrowest aperture 64 of the substantially annular end cap body 12.

- 25 The annular seal ring 16 has an aperture 66 described by a central surface 67. A recessed inner surface describes an angled shoulder 68. A peripheral flange 70 extends from a peripheral face 72 of the ring 16. The flange 70 flexibly abuts the channel 28. The central surface 67 is press fitted over a shaft 74 whereas the flat face 32 of the peripheral surface 20 is press fitted within a roller tube 76. The
30 shoulder 30 of the peripheral surface 20 abuts an outer end of the roller tube 76. The space defined between the arms 60 and 62 and the shaft 74 contains a quantity of grease for lubrication. A further quantity of grease is provided in the

- 5 -

space defined by the arm 60, the bearing means 14 and the neck portion 58, also for lubrication purposes. A still further quantity of grease is provided in the space defined by the angled shoulder 68 and the neck portion 58. In addition to the lubrication of the bearing means 14 and the various seals created by the arms 60 and 62 and the angled shoulder 68 the grease acts to trap and prevent the ingress of dust.

The inner race 52 of the bearing means 14 is held in position on the shaft 74 through the use of an industrial adhesive in combination with a pair of circlips 88 provided adjacent thereto. The circlips 88 are located in a pair of channels 90 about the shaft 74. It is envisaged that the pair of circlips 88 be provided at one end only of the shaft 74.

An inner surface 84 of the conveyor roller 78 has provided thereabout a number of annular barbs 86. The flat face 32 of the peripheral surface 20 is able to deform and be held in position on the roller 78. The barbs 86 are oriented to prevent the end cap body 12 pulling free of the roller 78.

In Fig. 1 there is shown the roller tube 76 of a conveyor roller 78 having a prior art end cap assembly 80 fitted about the shaft 74. In Fig. 2 there is shown the end cap assembly 80 exploded into its various components. Further, a portion 82 of the roller tube 76 adjacent the end cap assembly is shown cut away about the circumference of the roller tube 76.

In Figs. 3 and 4 there is shown the fitting of the end cap assembly 10 of the present invention to the conveyor roller 78.

In use, the end cap assembly 10 of the present invention operates by allowing the end cap body 12 to rotate with relation to the shaft 74 through the action of the bearing means 14. The inner race 52 of the bearing means 14 is fitted to the shaft 74 and held by an appropriate industrial adhesive. As such, the roller tube

- 6 -

76 to which the end cap body 12 is fitted may rotate with respect to the shaft 74 as is required in the normal operation of the conveyor roller 78.

As has been noted above, the retaining means is held within the seating portion
5 36 thereby positively locating the bearing means 14 within the seating portion 38 against the shoulder 56 and arm 60 of the end cap body 12. The annular seal ring 16 is press fitted through central surface 67 to the shaft 74 whereby the angled shoulder 68 and the peripheral flange 70 thereof form a flexible and rotatable seal against the channel 28 of the outer surface 18 of the end cap body
10 12.

The arm 62 of the neck portion 58 of the end cap body 12 forms a flexible rotatable seal against the shaft 74, as can be best seen in Figure 6. This feature in combination with the action of the seal ring 16 and the action of the arm 60 of
15 the neck portion 58 serves to prevent dust and other foreign material entering into the bearing means 14. In addition, the retaining means 40 and its positive location of the bearing means 14 through the action of arms 46 serves also to prevent material entering the bearing means 14 from the inside of the conveyor roller 78.

20

It is envisaged that each of the end cap body 12, the seal ring 16 and the retaining means 40 may be formed of a polyurethane thereby making the end cap assembly 10 particularly light but also providing the arms 46, the arms 60 and 62, and the flange 70 with a particular degree of resilience and flexibility allowing a
25 degree of resilience to be exercised in the creation of the various sealing effects within the end cap assembly 10 of the present invention.

The refurbishment of an existing conveyor roller 78 is achieved by the cutting of the roller tube 76 at a point along its circumference adjacent the existing end cap
30 assembly 80, as can be seen in Figures 1 and 2. Once this laser cutting step has been completed the end cap assembly 80 is removed from the shaft 74, as is seen specifically in Fig. 2. The end cap assembly 10 of the present invention

- 7 -

may then be fitted about the shaft 74 and the end cap body 12 press fitted within the roller tube 76, as is shown in Fig. 5.

5 The bearings and the shaft of a conveyor roller 78 are consequently able to be serviced. Further, the polyurethane material used in the construction of the end cap assembly 10 absorbs a large proportion of the vibration or conveyor rattle which may be transferred from the roller tube 76 to the bearing means 14 and the shaft 74 thereby causing a peening effect. There is also a consequent reduction in the level of sound or noise produced during normal operation of the roller
10 conveyor 78.

The provision of the smooth edge 26 to the end cap body 12 and effectively to the roller tube 76 is advantageous in that it prevents unnecessary wear on a conveyor belt running on the roller tube 76. It is envisaged that a breather hole or aperture (not shown) may be provided in the end cap body 12 passing from the
15 inner surface 22 to the outer surface 18 thereof. This breather hole will allow the passage of condensed fluid from within the conveyor roller 78 to drain therefrom. It is further envisaged that the two end cap assemblies 10 required on each conveyor roller 78 may be coloured differently to indicate which thereof has
20 provided therein the breather hole. Only that situated at the lower end of the conveyor roller 78 will require the breather hole.

The end cap assembly 10 of the present invention provides an end cap assembly comprising far less components than that of the prior art with a number of integral
25 dust seals and which further allows refurbishment of existing conveyor rollers 78.

Modifications and variations such as would be apparent to the skilled addressee upon a reading of the specification are considered to fall within the scope of the present invention.

CLAIMS

1. An end cap assembly for a roller tube of a conveyor roller characterised by comprising an end cap body proportioned to press fit within an end of the roller tube, a bearing means retained between the end cap body and a shaft of the conveyor roller and a seal means provided about the shaft and abutting an outer surface of the end cap body so as to restrict the passage of dust and other materials into the bearing means.
2. An end cap assembly according to claim 1, characterised in that the seal means is press fitted about the shaft whereby upon rotation thereof the seal means rotates with respect to the end cap body.
3. An end cap assembly according to claim 1 or 2, characterised in that the end cap body has a generally annular form having an inner collar portion arranged to abut in a flexible and resilient manner the shaft of the conveyor projecting therethrough.
4. An end cap assembly according to claim 3, characterised in that the bearing means is retained between the end cap body and the shaft of the conveyor at least in part by way of an annular retaining means that is fitted to the end cap body to hold the bearing means between it and the inner collar portion of the end cap body.
5. An end cap assembly according to claim 4, characterised in that the retaining means comprises in part a raised rib and a pair of annular arms projecting therefrom, the rib being proportioned for snap fitting engagement with the end cap body and the arms being proportioned to each resiliently and flexibly engage one of either an inner or outer race of the bearing means.

- 9 -

6. An end cap assembly according to any one of the preceding claims, characterised in that the end cap body has an outer surface in which is defined an annular channel, the seal means projecting at least in part into the channel.
- 5 7. An end cap assembly according to any one of the preceding claims, characterised in that the seal, means is provided in the form of an annular seal ring having at least one shoulder or flange flexibly abutting the end cap body.
8. An end cap assembly according to any one of the preceding claims,
10 characterised in that the end cap body comprises in part a recessed peripheral surface for receiving thereon the roller tube.
9. An end cap assembly according to any one of claims 5 to 8 characterised
15 in that the bearing means is located in a recess adjacent the inner collar portion of the end cap body and against an inner shoulder and an arm thereof such that the shoulder abuts the outer race of the bearing means and the arm abuts the inner race of the bearing means.
10. An end cap assembly according to claim 9, characterised in that the inner
20 collar portion of the end cap body defines in part a neck portion having a pair of arms projecting therefrom, one of these arms abutting the inner race of the bearing means whilst the other arm abuts the shaft of the conveyor.
11. An end cap assembly according to claim 10, characterised in that a space
25 defined between the arms of the neck portion and the shaft of the conveyor contains a quantity of grease to provide lubrication and a further barrier against dust entering the bearing means.
12. An end cap assembly according to any one of claims 7 to 11,
30 characterised in that a space is defined between the shoulder or flange of the seal means and the end cap body, the space containing a quantity of grease to provide lubrication and a further barrier against dust entering the bearing means.

13. An end cap assembly according to any one of the preceding claims, characterised in that the bearing means is provided in the form of a single row roller bearing.

5

14. An end cap assembly according to any one of the preceding claims, characterised in that the end cap body contains at least one aperture therein to allow passage of fluid from within the roller tube through the end cap body.

10 15. A method for the refurbishment of an existing roller tube of a conveyor roller characterised by comprising the steps of cutting the existing roller tube around its circumference adjacent an end cap thereof, removing the end cap assembly and replacing same with an end cap assembly comprising an end cap body proportioned to press fit within the cut end of the roller tube, a bearing
15 means retained between the end cap body and a shaft of the conveyor roller tube such that an outer race thereof moves with the end cap body and its inner race moves with the shaft and a seal means press fitted about the shaft and abutting an outer surface of the end cap body.

20 16. A method according to claim 15, characterised in that the seal means rotates with the shaft of the conveyor roller and abuts flexibly and resiliently the outer surface of the end cap body in a sliding manner.

25 17. A conveyor roller characterised by comprising a roller tube and at least one end cap assembly according to any one of claims 1 to 14.

18. An end cap assembly substantially as hereinbefore described with reference to Figs. 3 to 6.

30 19. A method for the refurbishment of an existing roller tube substantially as hereinbefore described with reference to Figs. 1 to 6.

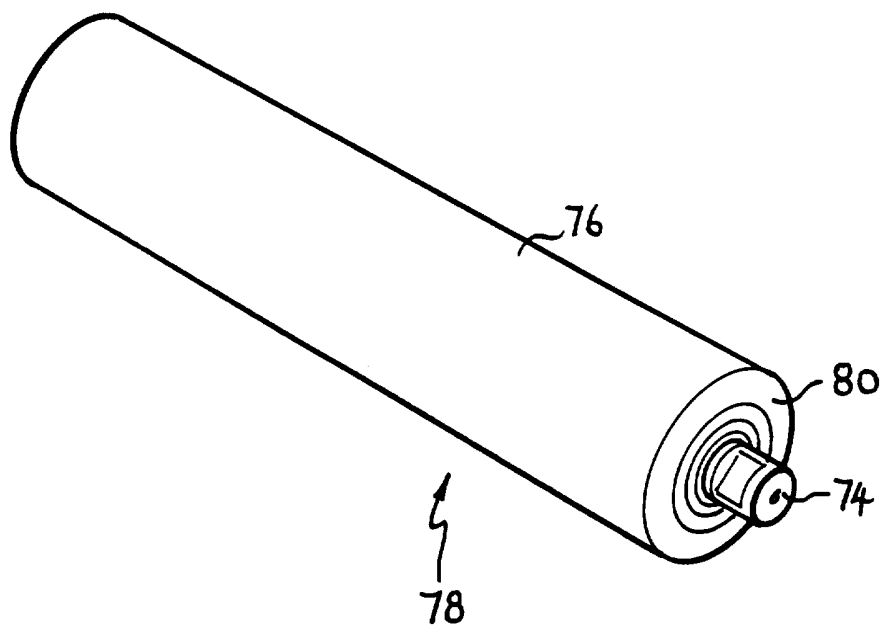


Fig. 1

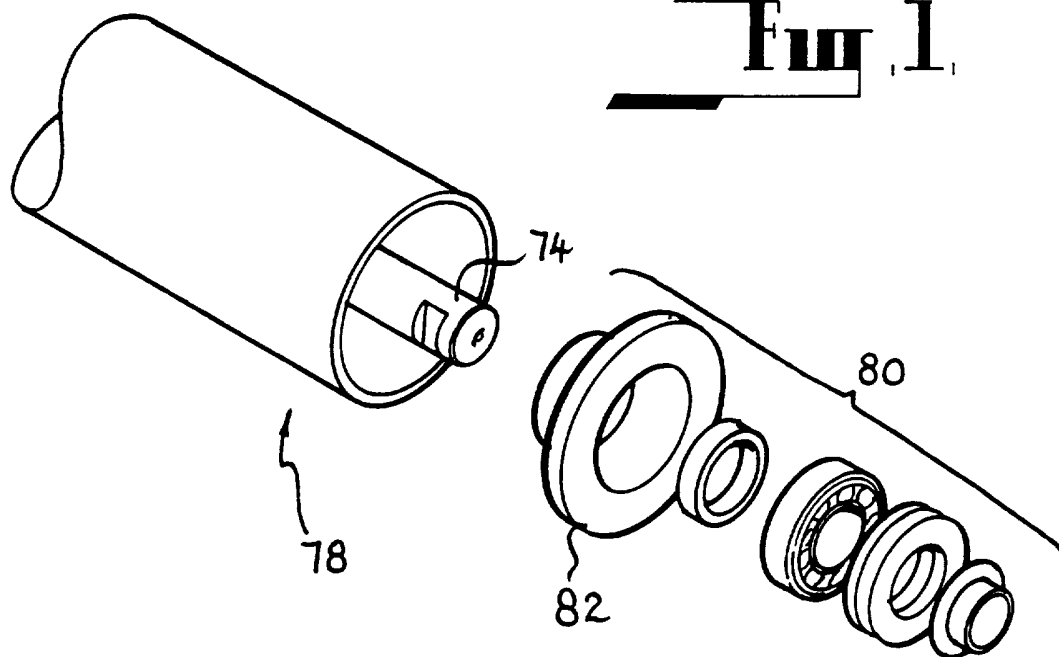


Fig. 2

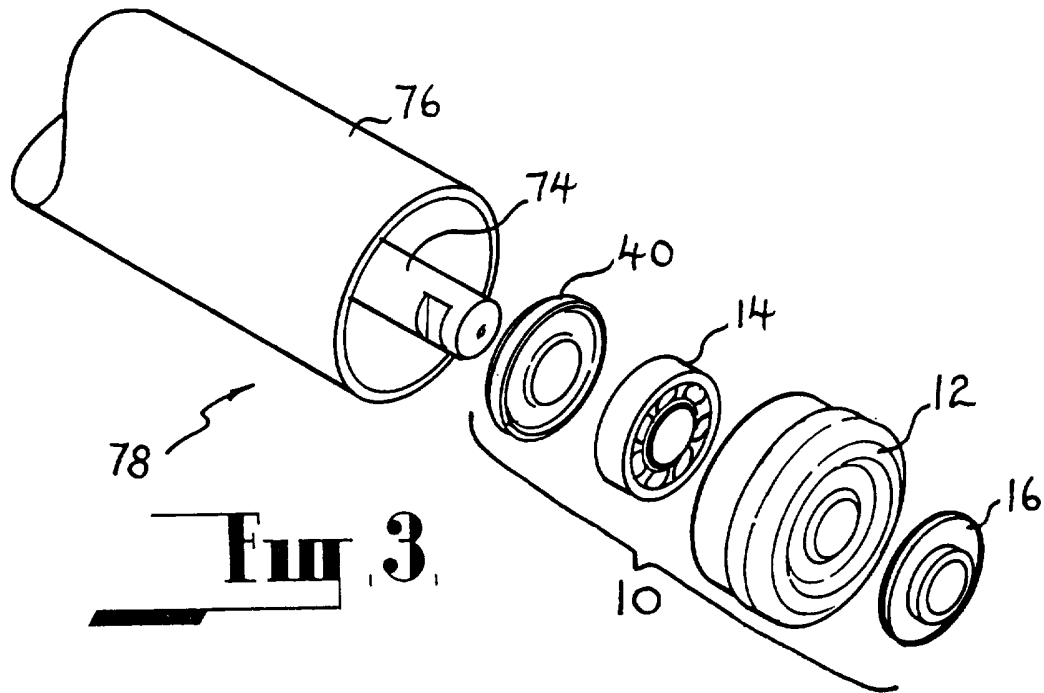


Fig. 3.

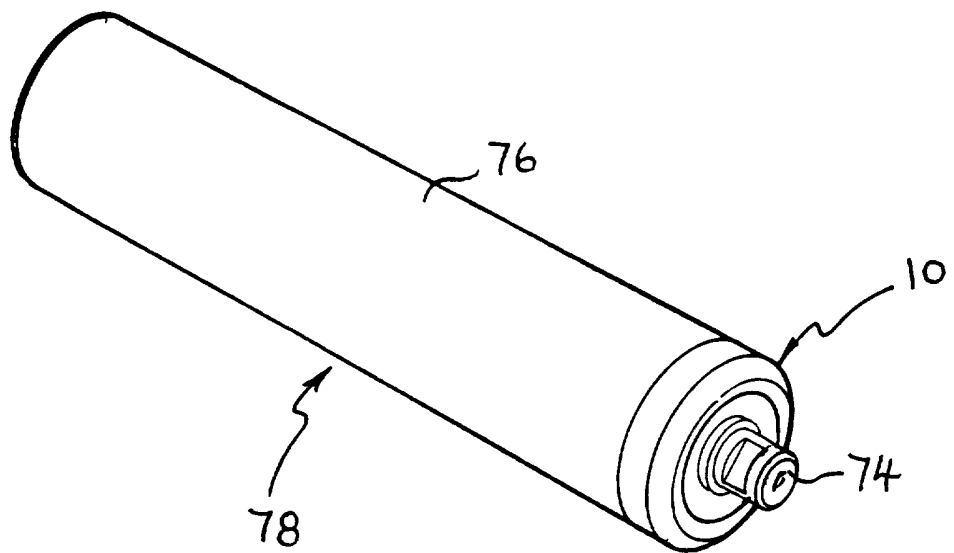
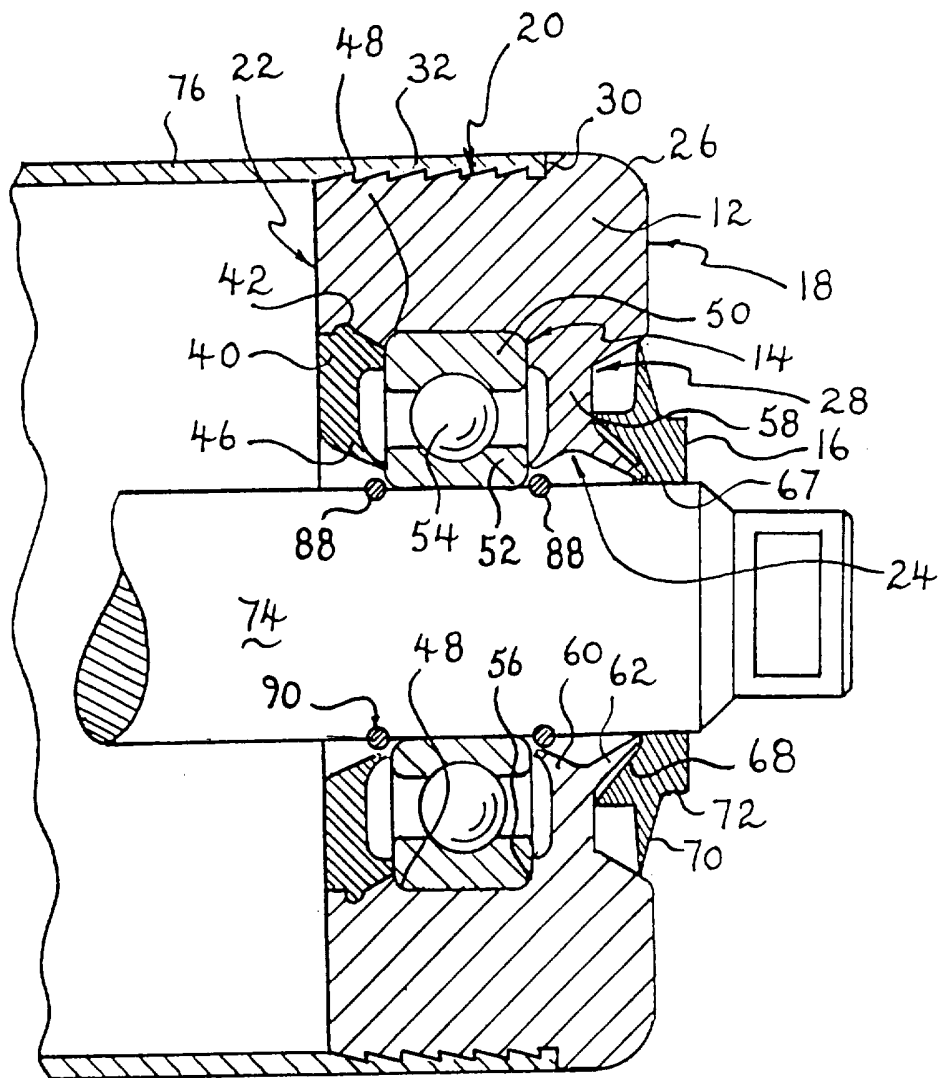
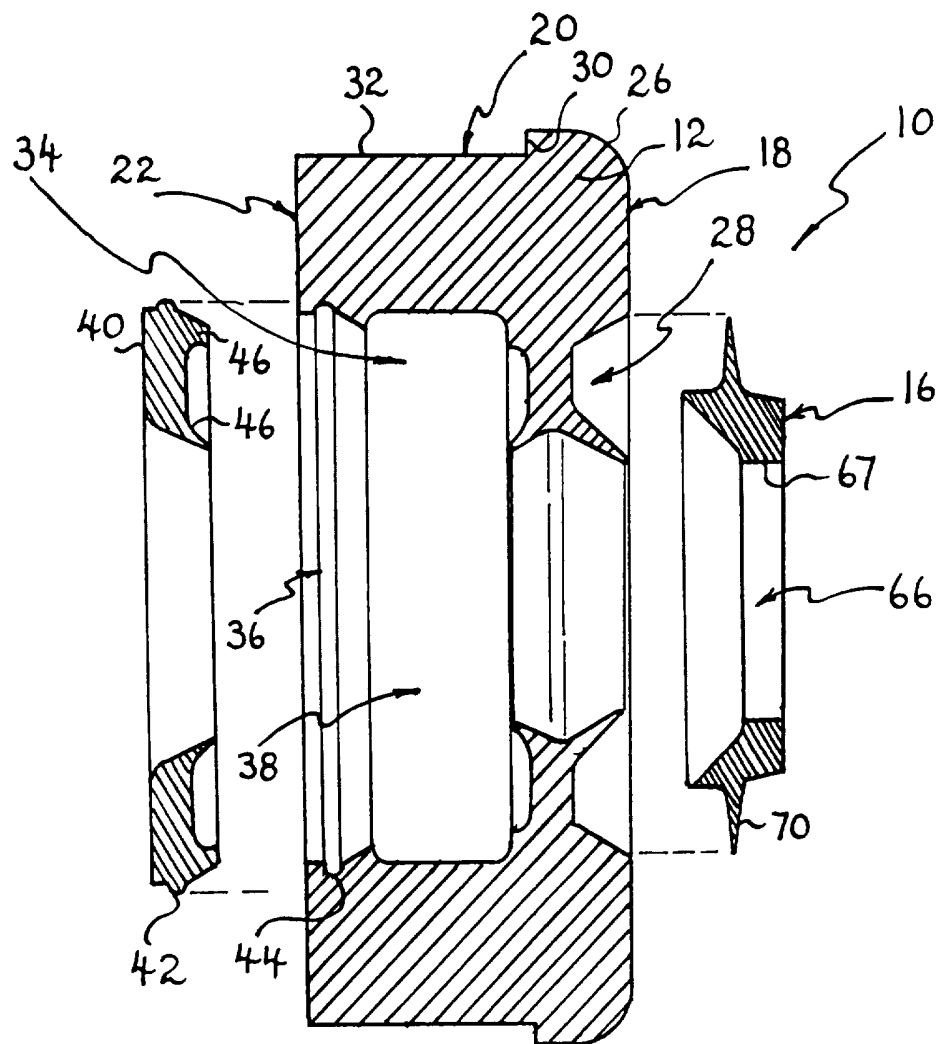


Fig. 4.

3/4

**Fig. 5**

4/4

**Fig. 6**

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/AU 95/00758

A. CLASSIFICATION OF SUBJECT MATTER

Int Cl⁶: B65G 39/09

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC B65G 39/09

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
AU: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
DERWENT
JAPIO

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	AU 70620/74 (484143) B (INTERROLL FORDERTECHNIK GmbH & CO. KG.) 8 January 1976 entire document entire document	1,2,6-9,12-19 3
X Y	US 3610387 A (STEIN) 5 October 1971 entire document entire document	1-3,6-8,13-15,17-19 9,12,16
X Y	GB 2030659 A (LINDERGGER) 10 April 1980 entire document entire document	1,6-9,13-19 2,3,12

☒ Further documents are listed in the continuation of Box C

☒ See patent family annex

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
12 January 1996

Date of mailing of the international search report

5 FEB 1996

Name and mailing address of the ISA/AU
AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION
PO BOX 200
WODEN ACT 2606
AUSTRALIA Facsimile No.: (06) 285 3929

Authorized officer

Greg Powell

Telephone No.: (06) 283 2308

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 95/00758

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 1591194 A (C.J.R. FYSON & SON LIMITED) 17 June 1981	1,2,6-8,13-19 3,9,12
Y	entire document	
X	AU 36602/68 A (McCULLAGH) 22 October 1970	1,2,6-8,13-19 3,9,12
Y	entire document	
P.X	AU 60741/94 A (PRECISMECA GESELLSCHAFT FUR FORDERTECHNIK MBH) 2 March 1995	1,2,6,7,13-19 3,8,9,12
P.Y	entire document	
A	AU 40008/78 (521734) B (TOYE) 29 April 1982	
	entire document	
A	AU 35194/93 A (FABRICA DE ACO PAULISTA LTDA) 29 September 1994	
	entire document	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No.
PCT/AU 95/00758

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
AU	70620/94	AT	4828/74	BE	816958	BR	7406148
		CA	1031715	CH	576905	DE	2338950
		DK	4092/74	ES	428872	FR	2239400
		GB	1441716	IT	1017499	JP	50111776
		NL	7407266	NO	742770	SE	7409881
		US	3957147	ZA	7404683		
US	3610387	DE	1756340	FR	1590771	GB	1206844
GB	2036059	AU	50899/79	CA	1143397	DE	2938393
		FR	2437545	JP	55047061	US	4277114
		ZA	7805451				
GB	1591194						
AU	36602/68						
AU	60741/94	CA	2130654	DE	4327988	EP	639722
		FI	943520	US	5393549		
AU	40008/78						
AU	35194/93						
							END OF ANNEX