

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/114708 A1

(51) International Patent Classification⁷: **H04Q 7/38**,
H04B 7/26

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BEARD, Timothy
Giles. COOPER, David Edward.**

(21) International Application Number:
PCT/JP2004/002303

(74) Agent: **WASHIDA, Kimihito**; 5th Floor, Shintoshicenter Bldg., 24-1, Tsurumaki 1-chome, Tama-shi, Tokyo, 2060034 (JP).

(22) International Filing Date: 26 February 2004 (26.02.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
0314093.6 18 June 2003 (18.06.2003) GB

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka, 5718501 (JP).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: EXTENDED DYNAMIC RESOURCE ALLOCATION FOR PACKET DATA TRANSFER

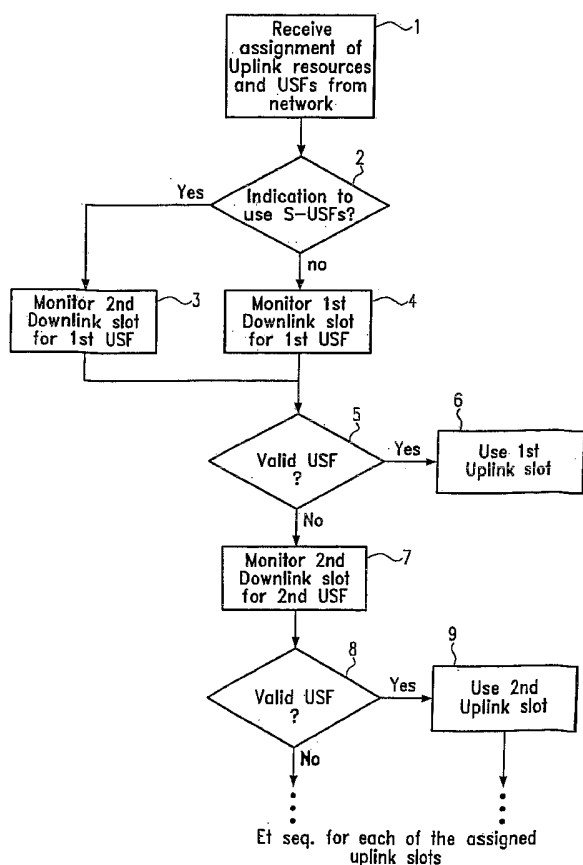

(57) Abstract: A method for control of packet data transmissions in a TDMA wireless network to provide for additional choices in the allocation of communication channels. The fixed relationship in the timing of the downlink allocation signalling and subsequent uplink transmission is altered for certain classes of mobile station to avoid physical constraints. Examples of variations in USF signalling in GPRS are given.



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION

EXTENDED DYNAMIC RESOURCE ALLOCATION
FOR PACKET DATA TRANSFER

5

Technical Field

This invention relates to multiple access communication systems and in particular it relates to dynamic resource allocation in time division multiple access systems.

10

Background Art

In Multiple access wireless systems such as GSM, a number of mobile stations communicate with a network. The allocation of physical communication channels for use by the mobile stations is fixed. A description of the GSM system may be found in The GSM System for Mobile Communications by M. Mouly and M. B. Pautet, published 1992 with the ISBN reference 2-9507190-0-7.

With the advent of packet data communications over Time Division Multiple Access (TDMA) systems, more flexibility is required in the allocation of resources and in particular in the use of physical communication channels. For packet data transmissions in General Packet Radio Systems (GPRS) a number of Packet Data CHannels (PDCH) provide the physical communication links. The time division is by frames of 4.615 ms duration and each frame has eight consecutive 0.577 ms slots. A description of the GPRS system may be found in (3GPP TS 43.064

v5.1.1). The slots may be used for uplink or downlink communication. Uplink communication is a transmission from the mobile station for reception by the network to which it is attached. Reception by the mobile station of a transmission
5 from the network is described as downlink.

In order to utilise most effectively the available bandwidth, access to channels can be allocated in response to changes in channel conditions, traffic loading, Quality of Service and subscription class. Owing to the continually
10 changing channel conditions and traffic loadings a method for dynamic allocation of the available channels is available.

The amounts of time that the mobile station receives downlink or transmits uplink may be varied and slots allocated accordingly. The sequences of slots allocated for reception
15 and transmission, the so-called multislot pattern is usually described in the form RXTY. The allocated receive (R) slots being the number X and the allocated transmit slots (T) the number Y.

A number of multislot classes, one through to 45, is
20 defined for GPRS operation and the maximum uplink (Tx) and downlink (Rx) slot allocations are specified for each class.

In a GPRS system, access to a shared channel is controlled by means of an Uplink Status Flag (USF) transmitted on the downlink to each communicating mobile station (MS). In GPRS two
25 allocation methods are defined, which differ in the convention about which uplink slots are made available on receipt of a USF. The present invention relates to a particular allocation method,

in which an equal number " N " of PDCH's, a "PDCH" representing a pair of uplink and downlink slots corresponding to each other on a 1-1 basis, are allocated for potential use by the MS. The uplink slots available for actual use by a particular mobile station sharing the uplink channel are indicated in the USF. The USF is a data item capable of taking 8 values V0- V7, and allows uplink resources to be allocated amongst up to 8 mobiles where each mobile recognises one of these 8 values as 'valid', i.e. conferring exclusive use of resources to that mobile. A particular mobile station may recognise a different USF value on each of the slots assigned to that mobile station. In the case of the extended dynamic allocation method, for example, reception of a valid USF in the slot 2 of the present frame will indicate the actual availability for transmission of transmit slots 2... N in the next TDMA frame or group of frames, where N is the number of allocated PDCHs. Generally for a valid USF received at receiver slot n , transmission takes place in the next transmit frame at transmit slots n , $n+1$ et seq. to the allocated number of slots (N). For the extended dynamic allocation method as presently defined these allocated slots are always consecutive.

The mobile station is not able instantly to switch from a receive condition to a transmit condition or vice versa and the time allocated to these reconfigurations is known as turnaround time. It is also necessary for the mobile station, whilst in packet transfer mode, to perform neighbourhood cell measurements. The mobile station has continuously to monitor

all Broadcast Control Channel (BCCH) carriers as indicated by the BA(GPRS) list and the BCCH carrier of the serving cell. A received signal level measurement sample is taken in every TDMA frame, on at least one of the BCCH carriers. (3GPP TS 45.008v5
5 10.0). The turnaround and measurement times guaranteed by the network for a mobile station depend on the multislot class to which the mobile claims conformance (3GPP TS 45.002v5.9.0 Annex B).

The neighbour cell measurements are taken prior to
10 re-configuration from reception to transmission or prior to re-configuration from transmission to reception.

A mobile station operating in extended dynamic allocation mode presently must begin uplink transmission in the Tx timeslot corresponding to the Rx timeslot in which the first valid USF
15 is recognised. That is to say that there is a fixed relationship in the timing of the downlink allocation signalling and subsequent uplink transmission. Owing to the physical limitations of single transceiver mobile stations some desirable multislot configurations are not available for use.

20 These restrictions reduce the availability of slots for uplink transmissions thereby reducing the flow of data and the flexibility of response to changing conditions. There is a need therefore to provide a method with which to enable the use of those multislot configurations currently unavailable for
25 Extended Dynamic Allocation.

Disclosure of Invention

It is an object of this invention to reduce the restrictions affecting extended dynamic allocation with minimal effect on the existing prescript. This may be achieved by altering the fixed relationship in the timing of the downlink allocation signalling and subsequent uplink transmission for
5 certain classes of mobile station.

In accordance with the invention there is a method for controlling uplink packet data transmissions and a mobile station operating in accordance with the method as set out in
10 the attached claims.

Brief Description of Drawings

Figure 1 illustrates the GPRS TDMA frame structure showing the numbering convention used for uplink (UL) and
15 downlink (DL) timeslots;

Figure 2 illustrates a prior art 4 slot steady state allocation R1T4;

Figure 3 illustrates a 5 slot steady state allocation R1T5 prohibited in the prior art;

20 Figure 4 illustrates a 5 slot steady state allocation R1T5 enabled by the method of the present invention;

Figure 5 illustrates a shifted USF applied to a class 7 MS with 3 uplink slots allocated;

Figure 6 illustrates a class 7 MS with 2 uplink slots
25 allocated;

Figure 7 is a flow diagram for the implementation of shifted USF in a mobile station;

Figure 8 illustrates a transition from one uplink slot to five uplink slots for a class 34 MS; and

Figure 9 illustrates a transition from four to five uplink slots for a class 34 MS.

5

Best Mode for Carrying Out the Invention

In this embodiment, the invention is applied to a GPRS wireless network operating in accordance with the standards applicable to multislot classes.

10

In figure 1 the GPRS TDMA frame structure is illustrated and shows the numbering convention used for uplink (Tx) and downlink (Rx) timeslots. It should be noted that in practice Tx may be advanced relative to Rx due to timing advance (TA), although this is not shown in the illustration. Thus in practice the amount of time between the first Rx and first Tx of a frame may be reduced a fraction of a slot from the illustrated value of 3 slots due to timing advance.

15

Two successive TDMA frames are illustrated with downlink (DL) and uplink (UL) slots identified separately. The slot positions within the first frame are shown by the numerals 0 through to 7 with the transmission and reception slots offset by a margin of three slots. This is in accordance with the convention that the first transmit frame in a TDMA lags the first receive frame by an offset of 3 (thus ordinary single slot GSM can be regarded as a particular case in which only slot 1 of transmit and receive is used).

20

25

The remaining figures conform to the illustration of

figure 1 but the slot numbering has been removed for extra clarity. The shaded slots are those allocated for the particular states and the arrowed inserts indicate the applicable measurement and turnaround intervals. The hashed slots indicate reception of a valid USF and the timeslot in which that USF is received. As mentioned above, constraints are imposed by the need to allow measurement and turnaround slots and the prescript for these in 3GPP TS 45.002 Annex B limits dynamic allocation as shown in table 1.

10

Table 1

Multislot class	Maximum number of slots			Minimum number of slots			
	Rx	Tx	Sum	T_{ta}	T_{tb}	T_{ra}	T_{rb}
7	3	3	4	3	1	3	1
34	5	5	6	2	1	1	1
39	5	5	6	2	1	$1+t_0$	1
45	6	6	7	1	1	1	t_0

T_{ta} is the time needed for the MS to perform adjacent cell signal level measurement and get ready to transmit.

T_{tb} is the time needed for the MS to get ready to transmit

T_{ra} is the time needed for the MS to perform adjacent cell signal level measurement and get ready to receive.

T_{rb} is the time needed for the MS to get ready to receive

It should be noted that in practice the times T_{ta} and T_{tb} may be reduced by a fraction of a slot due to timing advance.

t_0 is 31 symbol periods timing advance offset

20

With reference to figure 2, a steady state single downlink and 4 uplink slot allocation for a class 34 mobile station is illustrated. The turnaround and measurement periods for this class are shown in table 1 as Tra, Trb and Ttb each having one slot and Tta having two slots. These periods can be accommodated for this allocation when a valid USF is received in time slot 0.

When the allocation of uplink slots extends to five, however, a constraint arises as indicated in the illustration of figure 3 which is for a class 34 mobile station with an allocation of one downlink and five uplink slots.

The constraint occurs at the position indicated by 'A' because no time is allowed for the changeover from transmit to receive (Trb). In the downlink time slot 0 a valid USF is received and the following two slots provide for Tta. In accordance with the invention, for this embodiment the mobile has uplink slots assigned in the usual way, through the use of USF_TN0...USF_TN7 Information Elements in Packet Uplink Assignment and Packet Timeslot Reconfigure messages. The network sends the USF, however, for both first and second assigned timeslots on the downlink PDCH associated with the second assigned timeslot.

Considering by way of example a class 34 MS with an assignment of 5 uplink slots (TN0 - TN4) as discussed above where the network sends USF_TN0 on timeslot 1 rather than timeslot 0. This arrangement is illustrated in figure 4 where it can be seen that slots marked 'B' and 'C' provide for turnaround

times T_{ra} and T_{rb} respectively.

An allocation by the network of 4 uplink slots to the MS will be signalled by the sending of USF_TN1 on timeslot 1. The characters of the two signals USF_TN0 and USF_TN1 must differ
5 and must be distinguishable by the mobile station.

It is not necessary to add extra information elements to indicate when the Shifted USF mechanism is to be used, as it may be made implicit in the timeslot allocations for the particular multislot class of the mobile station. Therefore no
10 increase in signalling overhead would be required.

With reference to figure 5, another example of an allocation enabled by implementation of a shifted USF is illustrated in figure 5. The application is a class 7 MS with three uplink slots allocated. The USF on downlink slot 1
15 allocating the 3 uplink slots indicates that the first uplink slot available is uplink slot 0 rather than the usual slot 1. This provides for the T_{tb} and T_{ra} periods (as required by table 1) and as indicated in figure 5 at D and E respectively. The allocation would not previously have been available for want
20 of a sufficient period for T_{ra} .

The 2 slot allocation illustrated in figure 6 reverts to normal operation i.e. the USF is not shifted. There are no physical constraints in normal allocations for this 2 slot arrangement of figure 6 and the standard USF in time slot 1
25 allocates uplink slots beginning with uplink slot number 1.

Alternatively it may be convenient to apply positive signalling of the shift in position of the uplink allocation

and an implementation of a shifted USF in a mobile station operating extended dynamic allocation is illustrated in figure 7. It should be noted that the indication (2) in figure 7 may be explicit (i.e. extra signalling) or implicit (automatic for particular multislot class configuration). With reference to
5 figure 7, the mobile station receives at 1 an assignment of uplink resources and USF's from the network. If at 2, an indication to use a shifted USF is detected then, for the first USF, the second downlink slot is monitored (3) otherwise the
10 first downlink slot is monitored (4). In either case, when a valid USF has been received at 5 then uplink transmissions are initiated in the first uplink slot from the mobile station (6). When no valid USF has been received at 5 then the second downlink slot is monitored for a second USF at 7 and if valid (8) then
15 uplink transmissions are initiated in the second uplink slot (9).

In the examples illustrated in figures 2 to 6 the allocations are steady state such that the allocations shown are maintained from frame to frame. The invention is not
20 restricted to steady state allocations and may be applied also to control of uplink resources that change from one frame to another.

Examples of transitions are illustrated in figures 8 and 9. These figures each represent four consecutive frames but
25 have been split for presentation.

Figure 8 illustrates the transition from one uplink slot allocation to five uplink slots allocation, for a Class 34

mobile. The first (top) two frames show steady state operation with one slot and the next (bottom) two frames show the transitional frames. For this transition the slot location of the USF is changed.

5 Figure 9 illustrates the transition from four uplink slots to five uplink slots, for a Class 34 mobile. The first two frames show steady state operation with four slots and the next two frames show the transitional frames. For this transition the USF slot location is constant but the value of
10 the USF is changed.

In order to implement the invention in GPRS for example a table (Table 2) may be constructed for a Type 1 MS to allow extended dynamic allocation using the principles below:

In the case of extended dynamic allocation it is desirable
15 for the MS to be able to "transmit up to its physical slot limit"; specifically, the MS should be able to transmit the maximum number of slots possible according to the limitation of its multislot class, while continuing to receive and decode the USF value on exactly one slot and performing measurements. If it
20 is not possible to define a multislot configuration which permits the MS to "transmit up to its physical slot limit" using T_{ra} , but it would be possible by using T_{ta} , then T_{ta} shall be used.

If it is not possible to define a multislot configuration
25 for extended dynamic allocation which permits the MS to "transmit up to its physical slot limit" but it would be possible by using the shifted USF mechanism, then shifted USF shall be

used. In this case T_{ra} will be used as first preference, but if this is not possible T_{ta} will be used as second preference.

Table 2

5

Medium access mode	No of Slots	T_{ra} shall apply	T_{ta} shall apply	Applicable Multislot classes	Note
Uplink, Ext. Dynamic	1-3	Yes	-	1-12, 19-45	
	4	No	Yes	33-34, 38-39, 43-45	2
	5	Yes	-	34, 39	5
	5	No	Yes	44-45	2, 4
	6	No	Yes	45	5
Down + up, Ext. Dynamic	$d+u = 2-4$	Yes	-	1-12, 19-45	
	$d+u = 5, d > 1$	Yes	-	8-12, 19-45	
	$d = 1, u = 4$	No	Yes	30-45	2
	$d+u = 6, d > 1$	Yes		30-45	2, 3
	$d = 1, u = 5$	Yes		34, 39	5
	$d+u = 7, d > 1$	No	Yes	40-45	2, 4
	$d = 1, u = 6$	No	Yes	45	5
Note 1	Normal measurements are not possible (see 3GPP TS 45.008).				
Note 2	Normal BSIC decoding is not possible (see 3GPP TS 45.008).				
Note 3	TA offset required for multislot classes 35-39.				
Note 4	TA offset required for multislot classes 40-45.				
Note 5	Shifted USF operation shall apply (see 3GPP TS 44.060)				

CLAIMS

1. A method for controlling packet data transmissions in a TDMA communications system wherein transmitters and receivers
5 share channel resources dynamically for uplink and downlink operating periods and where downlink signals control subsequent uplink resource allocations in a fixed timing relationship; characterised by assignment of alternative timing relationships to increase the availability of uplink resources
10 when uplink resources are otherwise constrained by prescribed allocations of measurement and turnaround periods.
2. A method as in claim 1 where the time division for access is by consecutive frames of eight slots.
- 15 3. A method as in claim 1 or claim 2 where the assignment of an alternative timing relationship is by means of an alternative slot location for the controlling downlink signal.
- 20 4. A method as in claim 3 where the controlling downlink signal is delayed by one slot and the alternative timing relationship is a one slot reduction from the fixed timing relationship.
- 25 5. A method as in any preceding claim in which the communications system is a General Packet Radio System.

6. A method as in any preceding claim where the alternative timing relationships are applied automatically when the controlling downlink signal is received in an alternative slot location.

5

7. A method as in any preceding claim where the controlling downlink signal is a USF.

8. A method as in claims 1 to 5 where the alternative timing relationships are applied in response to a specific downlink signal.

10

9. A method as in claims 5 to 8 in which the multislot class of operation is class 7, 34, 39 or 45.

15

10. A method as in claims 5 to 9 in which slots are allocated for the measurement T_{ra} as default where the MS can transmit to its physical transmitter slot limit using T_{ra} otherwise slots are allocated for the measurement T_{ta} .

20

11. A mobile station operating in accordance with the method of claim 3 in which the response to receipt of a controlling downlink signal in an alternative slot location is automatically to apply an alternative timing relationship.

25

12. A mobile station operating in accordance with the method of claim 8 in which alternative timing relationships are applied

in response to a specific downlink signal.

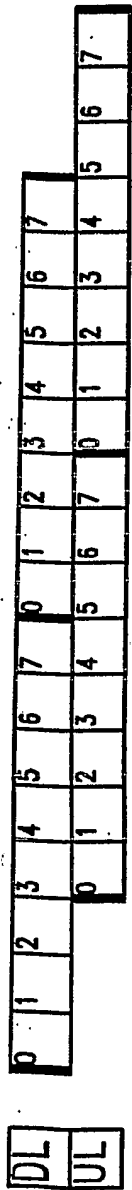


Fig.1



Fig.2





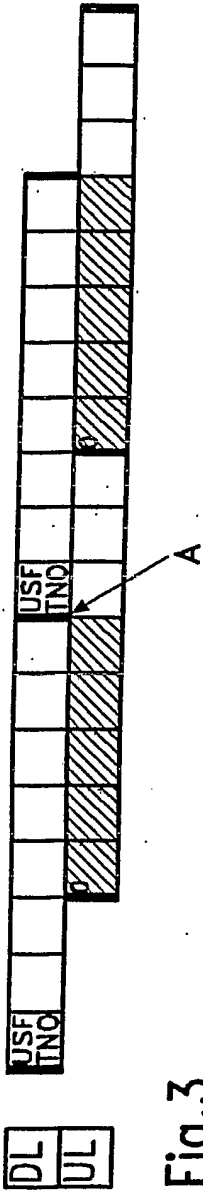


Fig.3

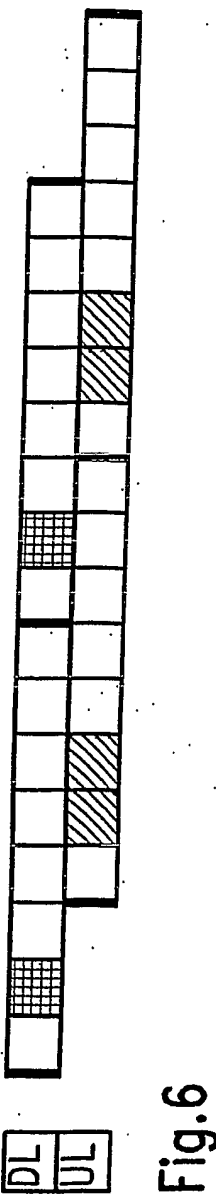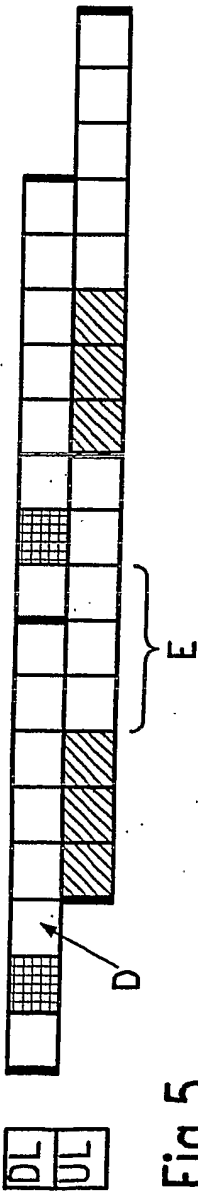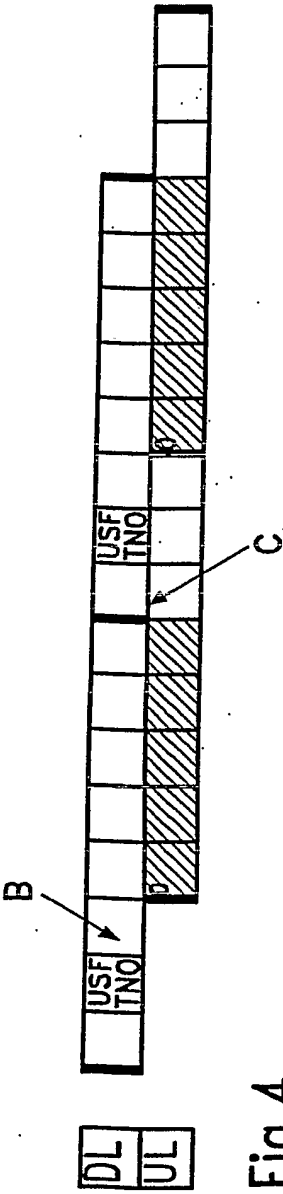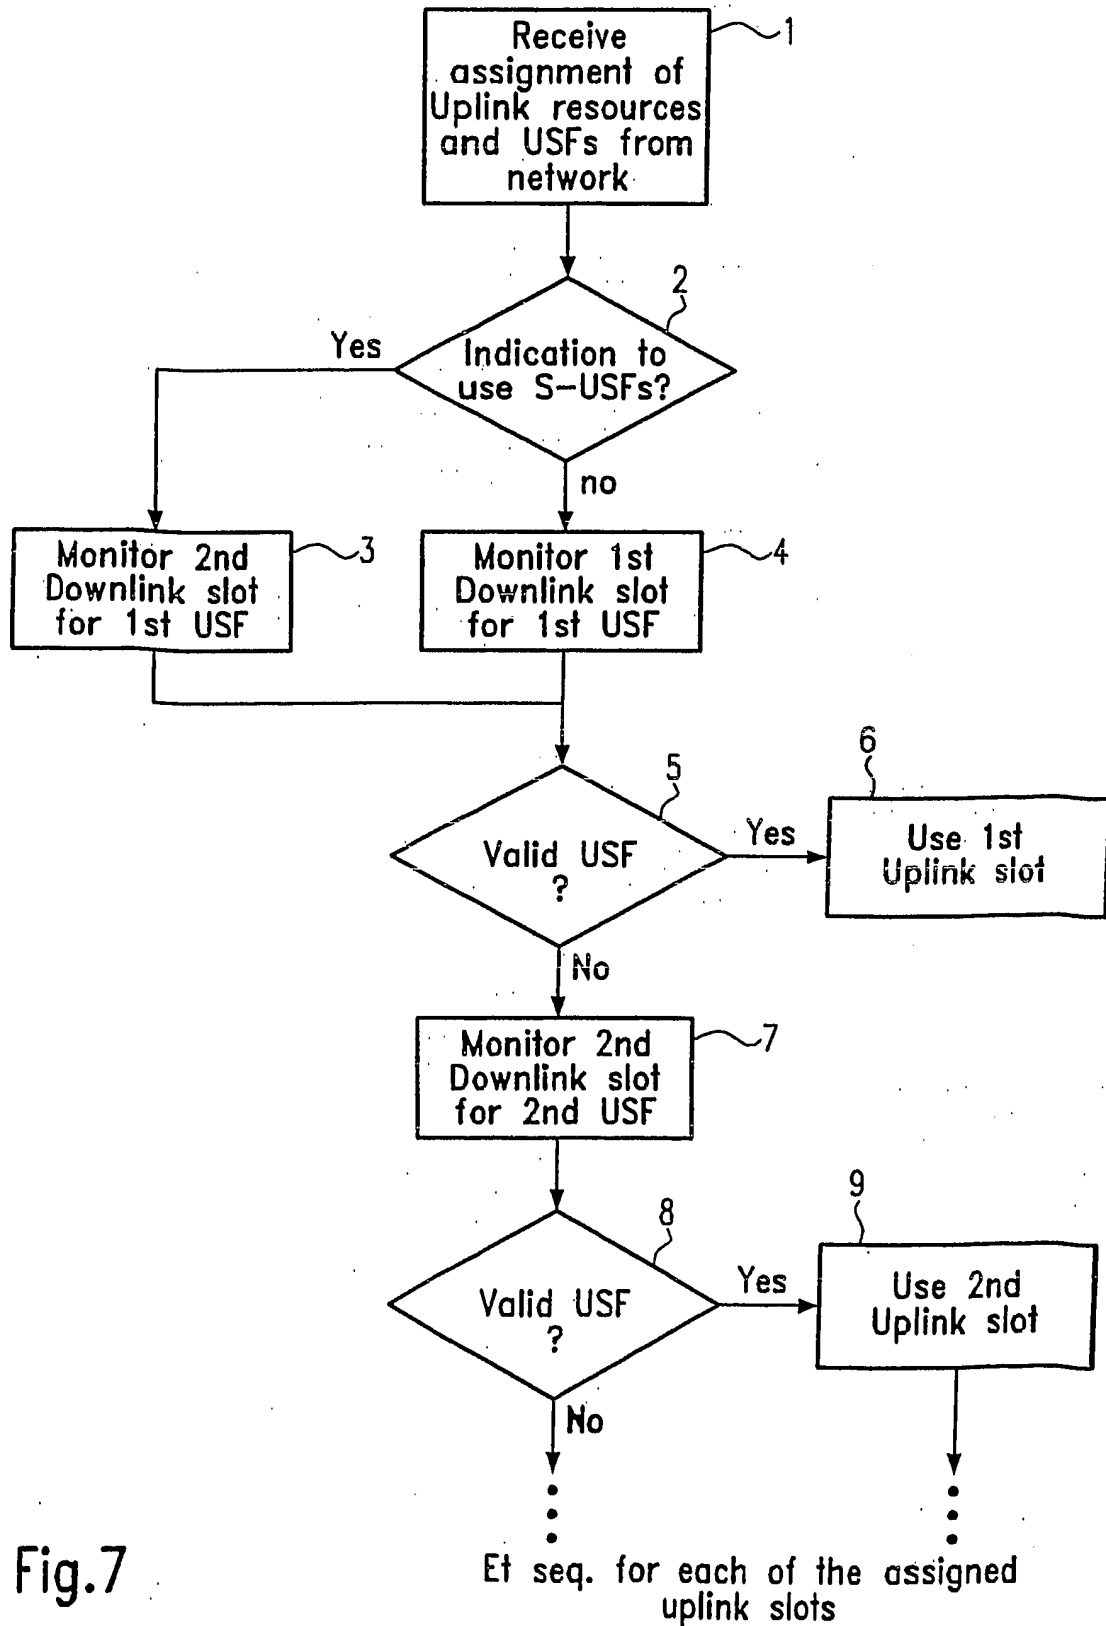

3/4



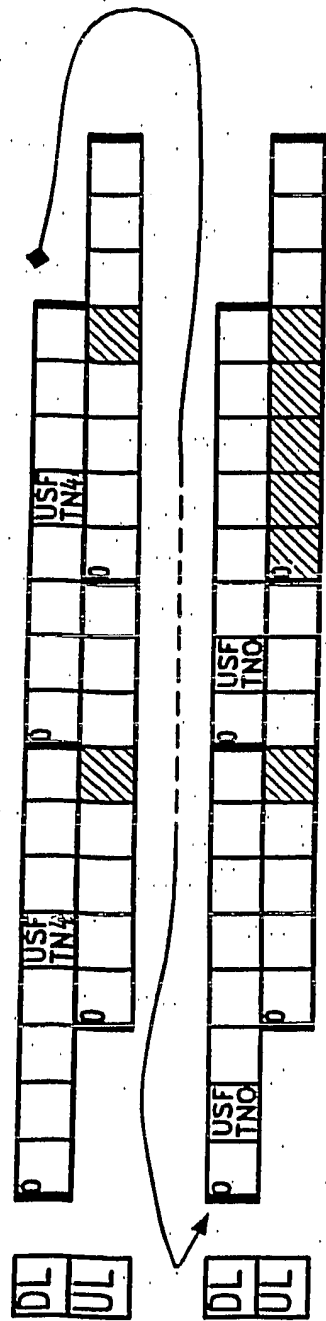


Fig. 8

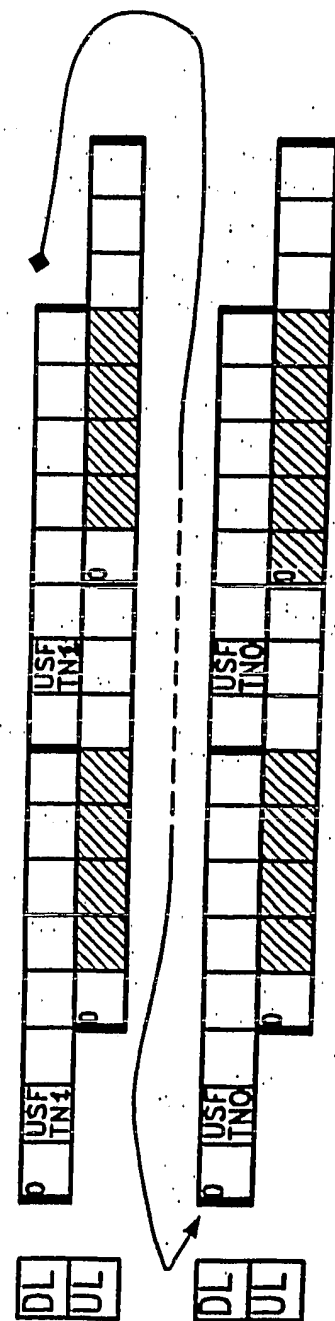


Fig. 9

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/JP2004/002303

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04Q7/38 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001/030956 A1 (GHOSHTAGORE UJJAL KUMAR ET AL) 18 October 2001 (2001-10-18) paragraph '0037! paragraph '0056! - paragraph '0074! paragraphs '0076!, '0079!; claim 1; figures 3-5	1-12
A	EP 0 644 702 A (ALCATEL BELL SDT SA) 22 March 1995 (1995-03-22) abstract column 2, line 54 - column 3, line 41 column 4, line 19 - line 38; claim 3 --- -/--	1-12

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

24 June 2004

Date of mailing of the international search report

01/07/2004

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Falò, L

INTERNATIONAL SEARCH REPORT

International Application No
PCT/JP2004/002303

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/155839 A1 (NISBET REX A) 24 October 2002 (2002-10-24) abstract paragraph '0005! - paragraph '0006! paragraph '0024! - paragraph '0028!; claim 1 -----	1-12
A	WO 02/51177 A (PARANTAINEN JANNE ;FORSSELL MIKA (FI); NOKIA CORP (FI)) 27 June 2002 (2002-06-27) page 3, line 16 -page 4, line 10 page 6, line 6 -page 8, line 16 -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP2004/002303

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2001030956	A1	18-10-2001	AU 2756201 A	16-07-2001
			WO 0150782 A2	12-07-2001
EP 0644702	A	22-03-1995	EP 0644702 A1	22-03-1995
			DE 69331142 D1	20-12-2001
			DE 69331142 T2	04-07-2002
			ES 2164063 T3	16-02-2002
US 2002155839	A1	24-10-2002	NZ 511155 A	20-12-2002
WO 0251177	A	27-06-2002	FI 20002810 A	21-06-2002
			AU 1924002 A	01-07-2002
			EP 1346585 A1	24-09-2003
			WO 0251177 A1	27-06-2002
			US 2004090948 A1	13-05-2004