



- (51) International Patent Classification:
B41J 2/04 (2006.01)
- (21) International Application Number:
PCT/IB2016/054026
- (22) International Filing Date:
5 July 2016 (05.07.2016)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data:
102015000031675 8 July 2015 (08.07.2015) IT
- (71) Applicant: **SYSTEM S.P.A.** [IT/IT]; Via Ghiarola Vecchia 73, 41042 Fiorano Modenese (IT).
- (72) Inventors: **STEFANI, Franco**; Viale Giacobazzi 25, 41049 Sassuolo (Modena) (IT). **OUASSIF, Mohamed**; Via Frascaro 15, 41028 Varana Serramazzone (Modena) (IT).
- (74) Agent: **CASADEI, Giovanni**; Bugnion S.p.a., Via Vellani Marchi 20, 41124 Modena (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AN ACTUATING DEVICE, IN PARTICULAR FOR INK JET PRINTHEADS WITH COOLING SYSTEM

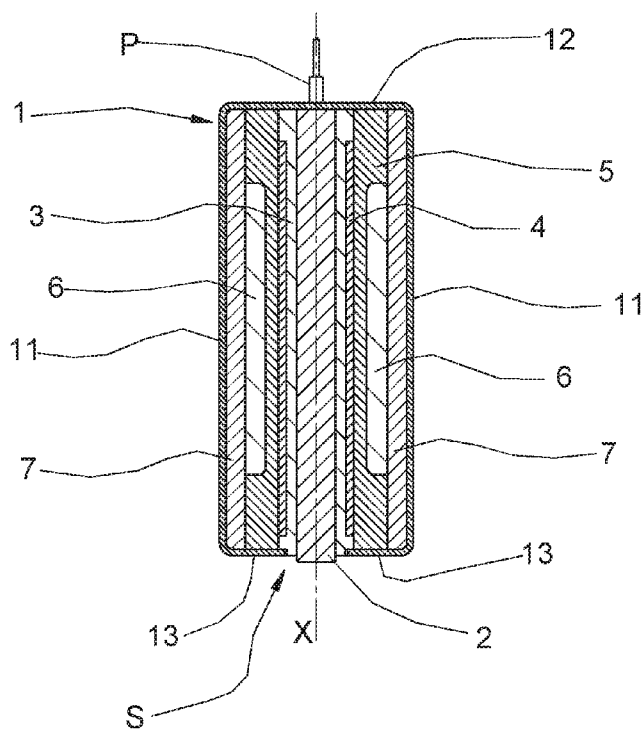


Fig.2

(57) Abstract: An actuator device, particularly for ink-jet heads, comprising: two or more electromagnetic actuators or solenoids (S), each comprising a ferromagnetic core (2), and a conductive winding or coil (4), arranged concentrically to the ferromagnetic core (2); a containment body (5), which encloses the electromagnetic actuators (S) and is provided with at least one cooling system (6).



Published:

— *with international search report (Art. 21(3))*

TITLE**An actuating Device, in particular for Ink Jet Printheads with
Cooling System****DESCRIPTION**

The present invention relates to an actuating device, particularly for ink-jet printheads.

The ink-jet printheads, in particular those destined to the decoration of ceramic tiles, comprise a plurality of actuator devices that have the function to control opening and closing of the individual nozzles intended for ejecting glaze, in order that the ejection of glaze droplets needed to obtain the desired decoration, can be accurately controlled.

An actuator device typically comprises a plurality of solenoids equal to one another, arranged parallel to one another and side by side on a common middle plane. Each solenoid includes a ferromagnetic core inserted concentrically into a coil, the feeding of which allows to produce an electromagnetic field that causes the movement of the core between at least two extreme positions. In the two extreme positions of the core, there are generally defined an open position and a closed position of a printhead nozzle.

A serious drawback of known actuator devices is constituted by the high temperatures that are reached during the operation of the solenoids, which temperatures determine a considerable deterioration of individual solenoids performances.

A further drawback of known devices is related to the fact that electromagnetic fields produced by solenoids interfere with each other, producing unwanted induction of the closest solenoids. This goes to the detriment of the proper control of the individual solenoids which tend to be influenced by control signals received by the proximate solenoids. To reduce the mutual interference between the solenoids, it is necessary to maintain a certain distance therebetween, whereby the overall size of the actuator device is increased.

The object of the present invention is to provide an actuator device, in particular but not exclusively intended for an ink-jet printhead, which allows to overcome the drawbacks of the currently available devices.

An advantage of the actuator device according to the present invention is that it allows to consistently reduce the working temperature of individual solenoids.

A further advantage of the actuator device according to the present invention is that it allows to consistently reduce the mutual electromagnetic interference between the various solenoids.

Further characteristics and advantages of the present invention will better emerge from the detailed description that follows of a preferred embodiment of the invention, illustrated by way of non-limiting example in the accompanying figures in which:

- figure 1 shows an overall schematic view of the actuator device according to the present invention;
- Figures 1a and 1b show two views in vertical elevation of the actuator device of Figure 1
- Figure 2 shows a view in section according to the plane A-A of Figure 1b;
- Figure 3 shows a sectional view according to the plane B-B of Figure 1b;
- figure 4 shows a view in section according to the C-C plane of Figure 1a;
- Figure 5 shows a view in section according to the plane D-D of Figure 1a.

The actuator device according to the present invention comprises two or more solenoids (S), each comprising a coil (4) that is wound in a cylindrical spiral about a longitudinal axis (X). Each coil can be fed via a connector (P) shown in figure 2.

Each solenoid (S) includes a ferromagnetic core (2), inserted concentrically in the respective coil (4). The ferromagnetic core (2), preferably of a cylindrical shape, is subject to a force that tends to move it along the longitudinal axis (X) by effect of the electromagnetic field

produced by the coil (4), and in turn produces a magnetic field. In the preferred embodiment of the actuator device according to the present invention, the core (2) is held stationary and exploits the magnetic field for movingly actuating a shutter element (not shown) of a printhead nozzle. In other embodiments, the coil (2) may instead be movable along the longitudinal axis (X) between at least a first and a second working position, by effect of the controlled electric feeding of the coil (4). The coil (4) is wound about a tubular-shaped spool (3), internally of which the core (2) is placed. The longitudinal axis (X) of the core (2) coincides substantially with the longitudinal axis (X) of the coil (4) and of the spool (3).

In the preferred use of the actuator device for the control of an ink-jet printhead, each core (2) then acts, with its own magnetic field, on a shutter of a printhead nozzle. The electric feeding of the coil (4) causes, by way of example, an opening condition of a printhead nozzle, whereas non-feeding of the coil (4) leads to a closing condition thereof.

In the embodiment shown, the actuator device comprises eight solenoids (S) aligned along a same mean plane (T). Of course the number of solenoids (S) may vary.

The solenoids (S) are parallel to each other, i.e. the longitudinal axes (X) of the coils (4) are parallel to one another. Preferably the solenoids (S) are equal to one another.

The solenoids (S) are inserted into a containment body (5). In particular, each solenoid (S) is inserted in the respective cavity which is formed within the containment body (5). These cavities are open at the ends thereof, both for allowing insertion of the solenoids (S), and for allowing the cores (2) to protrude outside of the containment body (5), in order to control the displacement of a respective printhead shutter or another member.

Preferably, the containment body (5) is provided with at least one cooling conduit (6), internally of which a cooling fluid is made to flow. Such a cooling conduit (6) is formed on an outer lateral surface of the containment body (5). Preferably the conduit (6) is delimited at least partly by an outer

cover (7) that is sealingly connected to the outer lateral surface of the containment body (5). Alternatively the conduit (6) may be obtained entirely within the containment body (5), so as to lap the solenoids (S) without communicating with the same. The cooling conduit (6) extends substantially between two planes parallel to the mean plane (T) and laps the compartments wherein the solenoids (S) are inserted inside of the containment body (5).

As shown in figures 2,3,4, the conduit (6) laps the solenoids (S).

In the preferred embodiment the conduit (6) exhibits a development with opposing lugs, with the rectilinear portions (61) being parallel to the solenoid (S). In the preferred embodiment the actuator device comprises two conduits (6) arranged at two opposite side surfaces of the containment body (5), on opposite sides of the solenoids (S), each delimited by an outer cover (7). Preferably, the two conduits (6) are connected at their ends to a common inlet conduit and to a common outlet conduit, but may alternatively be provided with independent feeding and outlet.

The presence of the cooling conduit/s (6), allows to drastically reduce the temperature of the solenoids (S), keeping it well below the temperatures at which the operation of the devices currently available occurs. This allows to improve performance and accuracy of each solenoid (S).

Advantageously, the actuator device comprises an insulator element (1) for each solenoid (S). Each insulator element (1) is made of a magnetic material and extends at least partially in the vicinity or by side of a respective solenoid (S). An example of a suitable material for obtaining insulators elements is permalloy.

The use of an insulator element (1) for each solenoid (S) can greatly reduce the interference between the coils (4) of the various solenoids (S). This enables to reduce the distance between the solenoids (S), by reducing the size of the actuator device. Additionally, the use of an insulator element (1) for each solenoid (S) allows to also reduce interference between the two adjacent actuators devices, thereby allowing

to reduce the distance therebetween also in this case.

In the preferred embodiment of the actuator device, each insulator element (1) comprises two parallel and opposed longitudinal portions (11). The two longitudinal portions (11) are joined together by a transverse portion (12). As shown in Figure 2, each insulator element (1) is basically U-shaped. The preferred conformation of the insulator elements (1) maximizes the beneficial shielding effects with respect to electromagnetic fields generated by each solenoid (S), thus reducing in a consistent manner interference between the solenoids (S). The longitudinal portions (11) preferably comprise an end portion (13) that is oriented perpendicularly to the longitudinal axis (X) and terminates near the core (2).

Preferably each solenoid (S) is placed in the space between the longitudinal portions (11) of the respective insulator element (1). In particular, the insulator elements (1) are arranged outside of the containment body (5). Furthermore, the insulator elements (1) are shaped such that the longitudinal portions (11) are situated at a pre-determined distance from the respective solenoid (S). This distance may be chosen according to the characteristics of the electromagnetic field generated by the solenoids (S), in order to reduce as much as possible interference between the solenoids (S) themselves. The longitudinal portions (11) are arranged outside of the external covers (7).

Preferably each insulator element (1) is further shaped so that the electromagnetic core (2) of the respective solenoid (S) is arranged at a pre-determined distance from the transverse portion (12), at least at one of its ends. This allows to further reduce the mutual interference between the solenoids (S). This allows to further reduce electromagnetic interferences between the various solenoids (S).

CLAIMS

1. An actuator device, in particular for ink-jet printheads, comprising:
two or more electromagnetic actuators or solenoids (S), each comprising a
ferromagnetic core (2) and a conductor winding or coil (4), arranged
5 concentrically to the ferromagnetic core (2);
a containment body (5), which encloses the solenoids (S);
characterized in that the containment body (5) is provided with at least
one cooling conduit (6).
2. An actuator device according to claim 1, wherein the cooling
10 conduit (6) is formed on an outer lateral surface of the containment body
(5).
3. An actuator device according to claim 2, wherein the cooling
conduit (6) is delimited at least partly by an outer cover (7).
4. An actuator device according to claim 1, wherein the conduit (6)
15 laps the solenoids (S).
5. An actuator device according to claim 1, wherein the conduit (6)
exhibits a development with opposing lugs, with rectilinear portions (61)
that are parallel to the solenoids (S).
6. An actuator device according to claim 1, comprising two conduits
20 (6) arranged at two opposite side surfaces of the containment body (5), on
opposite sides of the solenoids (S), each delimited by an outer cover (7).
7. An actuator device according to claim 1, comprising an insulator
element (1) for each solenoid (S), wherein each insulator element (1) is
made of a magnetic material and is disposed at least partially in proximity
25 of a respective ferromagnetic core (2).
8. An actuator device according to claim 7, wherein each insulator
element (1) comprises two longitudinal portions (11) that are parallel and
opposite one to another.
9. An actuator device according to claim 8, in which each solenoid (S)
30 is placed in the space between the longitudinal portions (11) of the
respective insulator element (1).

10. An actuator device according to claim 9, wherein the longitudinal portions (11) are arranged at a pre-determined distance from the respective solenoid (S).

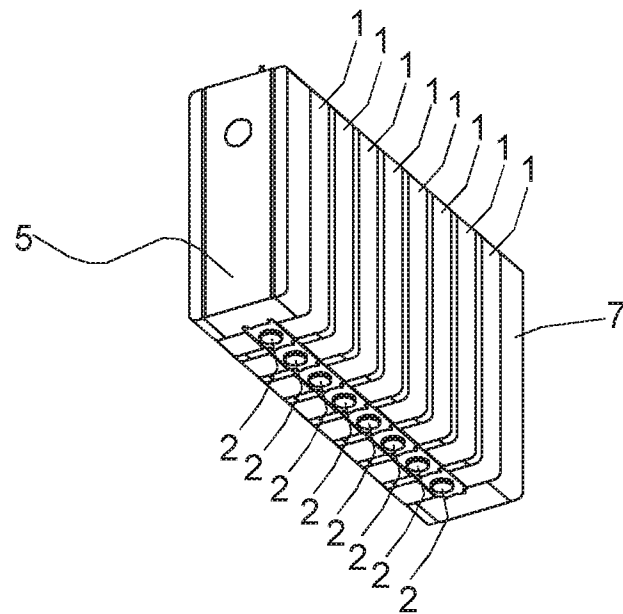


Fig. 1

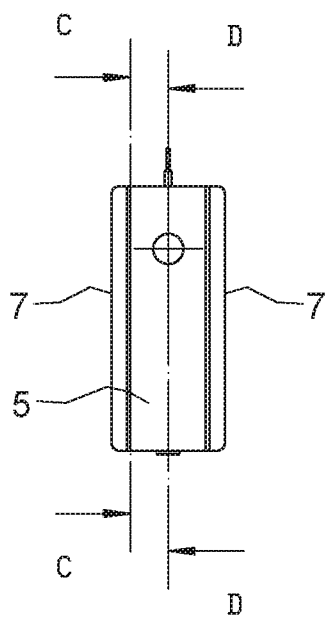


Fig. 1a

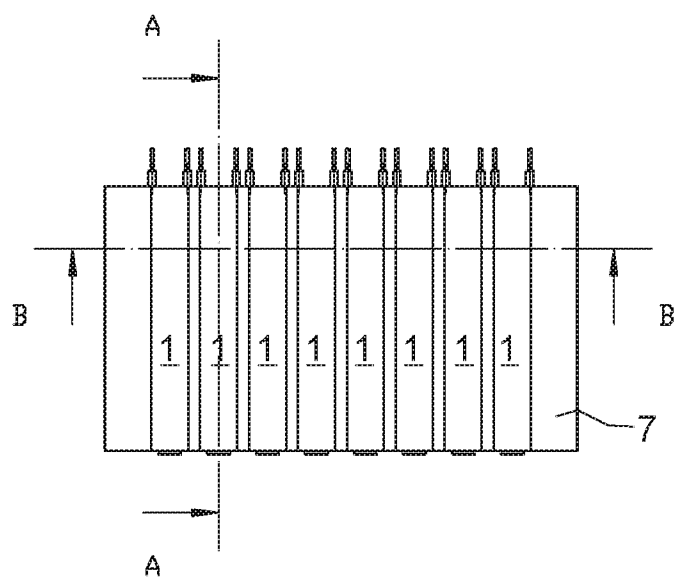


Fig. 1b

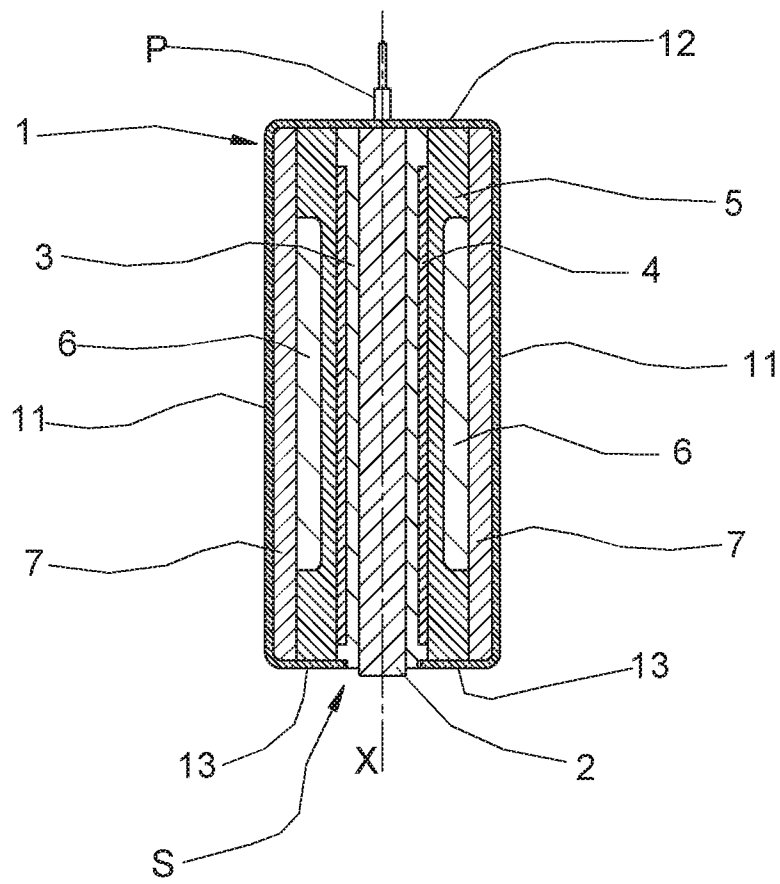


Fig.2

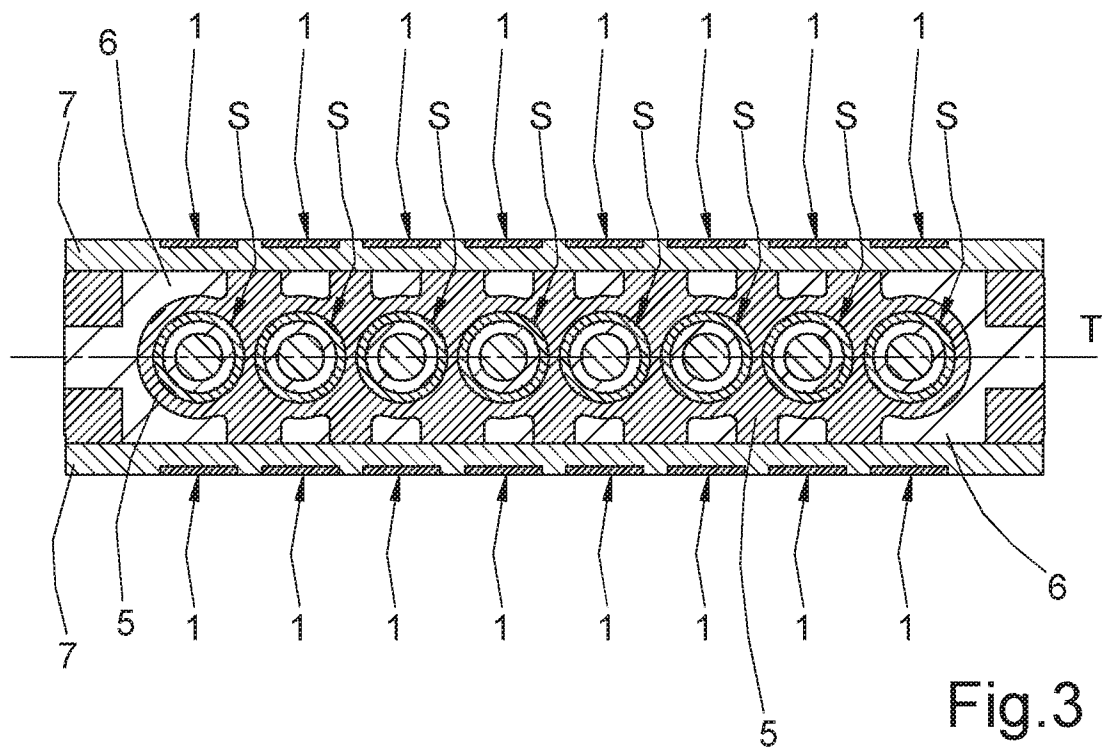


Fig.3

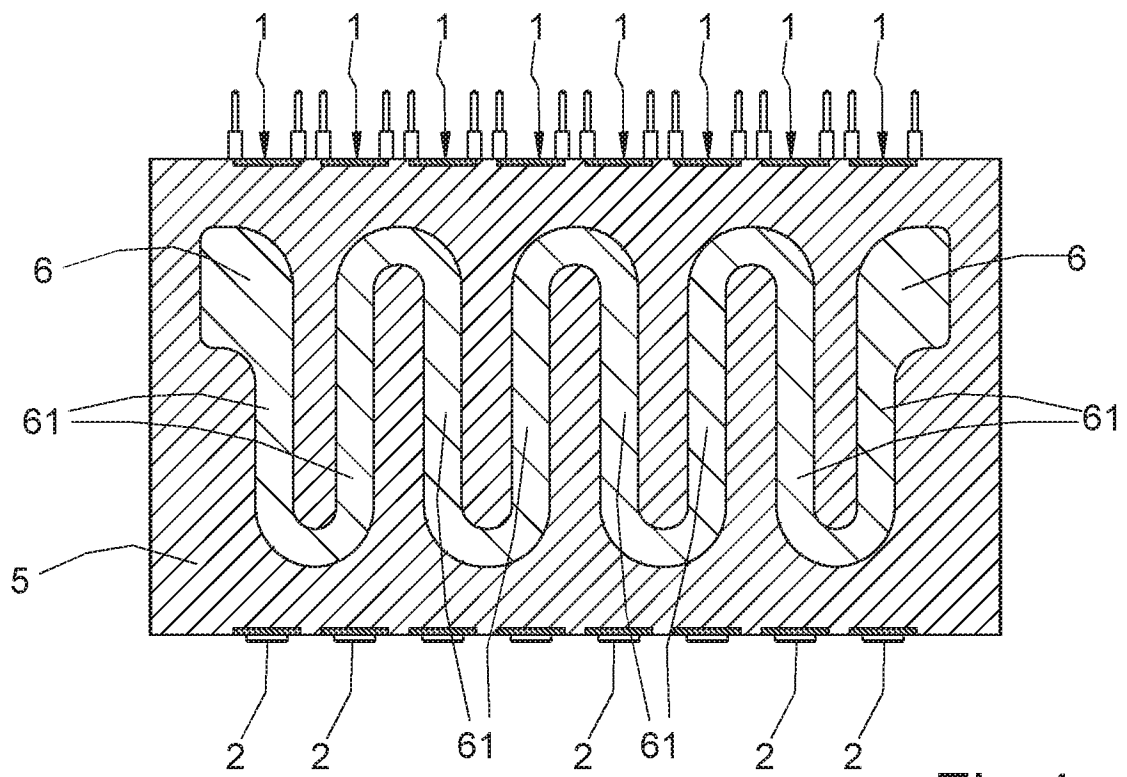


Fig. 4

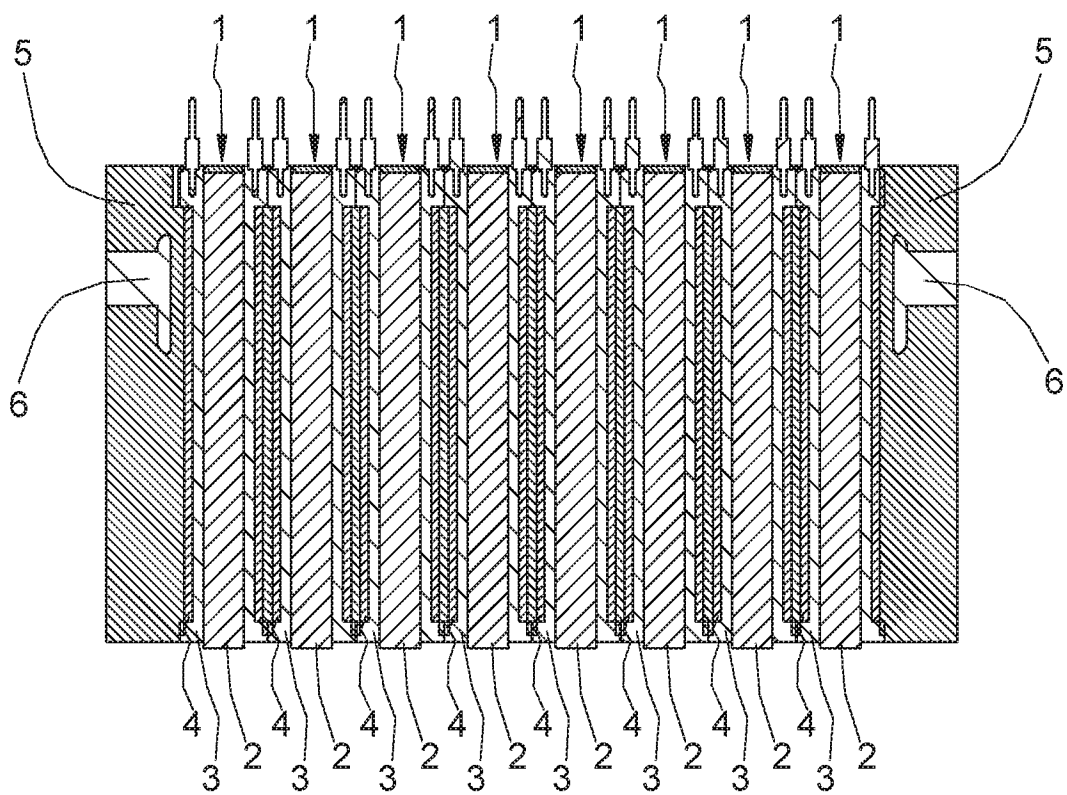


Fig.5

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2016/054026

A. CLASSIFICATION OF SUBJECT MATTER

INV. B41J2/04

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B41J B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/025260 A1 (MARUYAMA TERUO [JP]) 28 February 2002 (2002-02-28) paragraphs [0062], [0231], [0237]; figure 10	1-10
X	US 2010/170918 A1 (ACHRAINER JOHANN [AT]) 8 July 2010 (2010-07-08) paragraph [0015]; figure 2	1,4
X	WO 97/00174 A2 (TSCHIDA MARK J [US]) 3 January 1997 (1997-01-03) page 5, line 12 - line 17; figures 10,14 page 7, line 3 - line 8 page 40, line 30 - page 42, line 8	1-10
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 September 2016

Date of mailing of the international search report

22/09/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Bardet, Maude

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2016/054026

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2004/085738 A2 (WILLETT INT LTD [GB]; HORSNELL DAVID ANDREW [GB]; TOMLIN MATTHEW BRIAN) 7 October 2004 (2004-10-07) page 18, line 21 - page 19, line 10 page 9, line 1 - line 15 -----	1,4
A	WO 2004/048112 A1 (TEXDOT AB [SE]; ALBINSSON URBAN [SE]) 10 June 2004 (2004-06-10) page 4, line 3 - line 19 page 11, line 25 - page 12, line 17 -----	1-10
A	WO 2014/112381 A1 (PRIMEDOT KABUSHIKI KAISHA [JP]) 24 July 2014 (2014-07-24) figure 5 -----	1-10
A	EP 2 777 938 A1 (TECNO ITALIA S R L [IT]) 17 September 2014 (2014-09-17) paragraph [0036] -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2016/054026

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002025260 A1	28-02-2002	JP 2002021715 A US 2002025260 A1	23-01-2002 28-02-2002
US 2010170918 A1	08-07-2010	AT 520473 T CA 2690062 A1 CA 2690108 A1 CN 101711186 A CN 101784348 A EP 2002898 A1 EP 2162234 A2 EP 2162235 A1 IL 202426 A JP 5228039 B2 JP 2010528852 A JP 2010531213 A KR 20100021651 A KR 20100051786 A US 2010132612 A1 US 2010170918 A1 WO 2008151713 A2 WO 2008151714 A1	15-09-2011 18-12-2008 18-12-2008 19-05-2010 21-07-2010 17-12-2008 17-03-2010 17-03-2010 30-06-2014 03-07-2013 26-08-2010 24-09-2010 25-02-2010 18-05-2010 03-06-2010 08-07-2010 18-12-2008 18-12-2008
WO 9700174 A2	03-01-1997	EP 0837776 A2 US 5793392 A WO 9700174 A2	29-04-1998 11-08-1998 03-01-1997
WO 2004085738 A2	07-10-2004	CN 1795101 A CN 101264698 A DE 602004003801 T2 EP 1606118 A2 US 2006238587 A1 WO 2004085738 A2	28-06-2006 17-09-2008 11-10-2007 21-12-2005 26-10-2006 07-10-2004
WO 2004048112 A1	10-06-2004	AU 2003265200 A1 EP 1565320 A1 SE 0203515 A WO 2004048112 A1	18-06-2004 24-08-2005 28-05-2004 10-06-2004
WO 2014112381 A1	24-07-2014	CN 104918712 A EP 2946840 A1 JP 5629866 B1 US 2016023233 A1 WO 2014112381 A1	16-09-2015 25-11-2015 26-11-2014 28-01-2016 24-07-2014
EP 2777938 A1	17-09-2014	EP 2777938 A1 ES 2567474 T3	17-09-2014 22-04-2016