



(51) International Patent Classification:
H01L 21/677 (2006.01)

(21) International Application Number:
PCT/US2017/060949

(22) International Filing Date:
09 November 2017 (09.11.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
15/348,967 10 November 2016 (10.11.2016) US

(71) Applicant: **APPLIED MATERIALS, INC.** [US/US];
3050 Bowers Avenue, Santa Clara, California 95054 (US).

(72) Inventors: **BONECUTTER, Luke W.**; 812 Timber Trail,
Cedar Park, Texas 78613 (US). **BLAHNIK, David T.**; 2802
Quanah Drive, Round Rock, Texas 78681 (US). **REUTER,
Paul B.**; 8900 Spicebrush Drive, Austin, Texas 78759 (US).

(74) Agent: **DUGAN, Brian M.** et al.; Dugan & Dugan, PC,
245 Saw Mill River Road, Suite 309, Hawthorne, New York
10532 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) Title: SYSTEMS, APPARATUS, AND METHODS FOR AN IMPROVED LOAD PORT

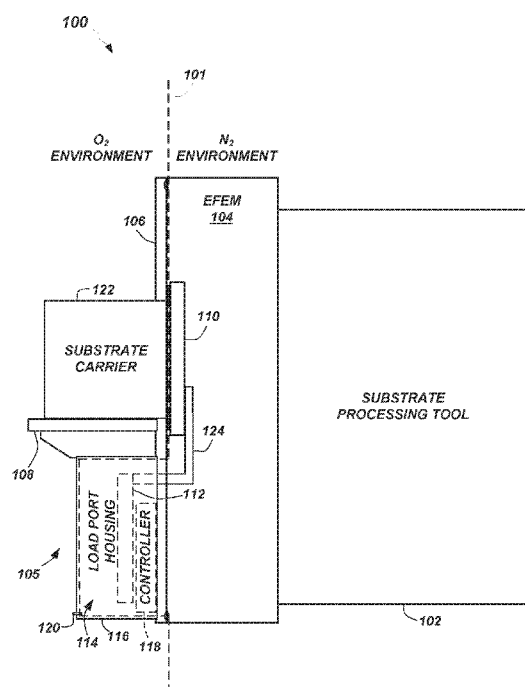


FIG. 1B

(57) Abstract: Embodiments provide systems, apparatus, and methods for an improved load port that includes a frame supporting a dock and a carrier opener; an elevator operable to raise and lower the carrier opener; an isolation compartment within which the elevator is operable to move, the isolation compartment including a volume isolated from a volume of an equipment front end module (EFEM); and a purge supply within the isolation compartment operable to purge the isolation compartment of reactive gas trapped within the isolation compartment. Numerous additional aspects are disclosed.

**SYSTEMS, APPARATUS, AND METHODS FOR
AN IMPROVED LOAD PORT**

RELATED APPLICATION

[001] This claims priority from U.S. Non-Provisional Patent Application No. 15/348,967, filed November 10, 2016, entitled "SYSTEMS, APPARATUS, AND METHODS FOR AN IMPROVED LOAD PORT" (Attorney Docket No. 24538-04/USA), which is hereby incorporated herein by reference in its entirety for all purposes.

FIELD

[002] The present application relates to electronic device manufacturing systems, and more specifically to systems, apparatus, and methods for an improved load port for such systems.

BACKGROUND

[003] Oxygen from a cleanroom can have deleterious effects on substrates (e.g., semiconductor wafers) such as oxidation. Thus, substrates are typically stored in sealed carriers and/or kept in a non-reactive gas (e.g., nitrogen) environment. Electronic device processing systems use load ports coupled to equipment front end modules (EFEMs) or factory interfaces between the cleanroom and the processing tools. Operators or material handling systems can load substrate carriers onto the load ports so the substrates can be loaded into and removed from the processing systems. The cleanrooms have oxygen environments for the operators while the EFEM for the processing systems typically have nitrogen environments to protect the substrates. Ideally, the EFEM provides a barrier to keep oxygen out of the processing system

but in some cases, the load port may contribute to oxygen contamination. Thus systems, apparatus, and methods including an improved load port are desired.

SUMMARY

[004] In some embodiments, a load port system is provided. The load port system includes a frame supporting a dock and a carrier opener; an elevator operable to raise and lower the carrier opener; an isolation compartment within which the elevator is operable to move, the isolation compartment including a volume isolated from a volume of an equipment front end module (EFEM); and a purge supply within the isolation compartment operable to purge the isolation compartment of reactive gas trapped within the isolation compartment.

[005] In some other embodiments, a load port is provided. The load port includes an isolation compartment for an elevator defined by a housing and a frame, the isolation compartment including a volume isolated from a volume of an equipment front end module (EFEM) couplable to the load port; and a purge supply within the isolation compartment operable to purge the isolation compartment of reactive gas trapped within the isolation compartment.

[006] In yet other embodiments, a method for purging an equipment front end module (EFEM) system is provided. The method includes flooding an EFEM with a gas non-reactive to substrates to be passed through the EFEM system; and purging an isolation compartment of a load port coupled to the EFEM of reactive gas trapped within the isolation compartment using a non-reactive gas supply disposed within the isolation compartment.

[007] Still other features, aspects, and advantages of embodiments will become more fully apparent from the following detailed description, the appended claims, and the accompanying drawings by illustrating a number of example embodiments and implementations, including the best mode contemplated for carrying out the embodiments. Embodiments may

also be capable of other and different applications, and its several details may be modified in various respects, all without departing from the scope of the disclosed embodiments. Accordingly, the drawings and descriptions are to be regarded as illustrative in nature, and not as restrictive. The drawings are not necessarily drawn to scale. The description is intended to cover all modifications, equivalents, and alternatives falling within the scope of the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[008] FIGs. 1A and 1B are block diagrams depicting an example of an electronic device processing system according to some embodiments.

[009] FIG. 2A is a front isometric view diagram depicting an example load port with a lower housing installed according to some embodiments.

[0010] FIG. 2B is a front isometric view diagram depicting an example load port with a lower housing removed according to some embodiments.

[0011] FIG. 3 is a rear isometric view diagram depicting an example load port according to some embodiments.

[0012] FIG. 4 is a rear plan view diagram depicting an example load port according to some embodiments.

[0013] FIG. 5 is a flowchart illustrating an example method of purging an electronic device processing system according to some embodiments.

DETAILED DESCRIPTION

[0014] Embodiments described herein provide systems, apparatus, and methods for an improved load port to an equipment front end module (EFEM) for an electronic device manufacturing system. An EFEM typically provides an enclosed environment filled with a gas (e.g., nitrogen) that is not reactive with substrates to be loaded into a processing tool. The EFEM includes a robot that enables transfer of substrates between the cleanroom environment (e.g., from within sealed substrate carriers via a load port) and the interior of the processing system. In use, the EFEM is ideally maintained in a positive pressure, nitrogen-only environment. However, an airtight seal is not continuously maintained between the cleanroom and the EFEM. For example, during maintenance, oxygen is introduced into the EFEM to allow personnel to safely enter. Afterward, the EFEM is again flooded with nitrogen to force out remaining oxygen.

[0015] The inventors have determined that conventional load ports coupled to EFEMs can trap oxygen which can remain in an isolation compartment of the load port and the oxygen can slowly leak out into the EFEM, particularly when the carrier opener of the load port is opened and lowered during substrate transfer from a docked substrate carrier. The isolation compartment is an enclosed volume within the lower portion of the load port within which an elevator translates up and down to lower and raise the carrier opener of the load port when opening a substrate carrier. The isolation compartment is in fluid communication with the EFEM and the movement of the elevator can push trapped oxygen out of the isolation compartment into the EFEM. In addition, slow leaking of oxygen from the isolation compartment of the load port after the EFEM has been flooded with nitrogen is particularly problematic because the oxygen, which is reactive with

substrate materials, can contaminate substrates moved through the EFEM. Embodiments solve this problem by providing a dedicated nitrogen purge supply within the isolation compartment of the load port that is operative to force out the trapped oxygen so the oxygen can be removed when the EFEM is flooded with nitrogen. In some embodiments, a fan within the isolation compartment is used to force oxygen out of the load port, with or without the dedicated nitrogen purge supply. In some embodiments, a fan within the EFEM is used to pull oxygen out of the load port, with or without the dedicated nitrogen purge supply.

[0016] Turning to FIGs. 1A and 1B, block diagrams of an example electronic device processing system 100 according to some embodiments is shown. FIG. 1B depicts the same system 100 as FIG. 1A but includes a vertical dashed line 101 demarcating the boundary between an oxygen (e.g., reactive) environment and a nitrogen (e.g., non-reactive) environment. The system 100 includes a substrate processing tool 102 coupled to an EFEM 104. The EFEM 104 is coupled to a load port 105 which includes a frame 106 supporting a docking tray 108, an carrier opener 110, an elevator 112, and an isolation compartment 114 surrounded by a load port housing 116. The load port housing 116 also encloses a control components board supporting a controller 118, and an isolation compartment purge supply 120.

[0017] The docking tray 108 is adapted to receive a substrate carrier 122 (e.g., a front opening unified pod (FOUP)). The substrate carrier 122 is accessed via the carrier opener 110 which is lowered out of the way via the elevator 112 that moves the carrier opener 110 up and down in the EFEM 104, carried by an elevator arm 124 that extends from the elevator 112 in the isolation compartment 114. The isolation compartment 114 contains the elevator 112. Note that the

volume enclosed by load port housing 116, *i.e.*, the isolation compartment 114, is in fluid communication with the EFEM 104 due to an opening (See FIG. 3, 302) for moving elements that extend through the frame 106.

[0018] As illustrated by the vertical dashed line 101 in FIG. 1B, elements on the left side of the system 100 may be maintained in an oxygen environment, *e.g.*, a cleanroom, while elements on the right side of the system 100 are ideally maintained in a non-reactive gas (*e.g.*, nitrogen) environment. A gas is selected to be non-reactive relative to the substrate.

[0019] In operation, the EFEM 104 is initially flooded with nitrogen to force out oxygen. However, oxygen gets trapped in the isolation compartment 114 and is purged using the dedicated isolation compartment purge supply 120 disposed within the isolation compartment 114. Alternatively or additionally, isolation compartment 114 (*i.e.*, the volume enclosed by the load port housing 116) is purged using a fan disposed within the load port housing 116 or is drawn out using a fan or vacuum source within the EFEM 104 adjacent the isolation compartment 114. Once the oxygen has been flushed out of the EFEM 104, a substrate carrier 122 can be docked at the load port 105 to deliver or receive substrates to or from the substrate processing tool 102. The carrier opener 110 is lowered via elevator 112. The substrates are inserted into or removed from the substrate carrier 122 via a robot (not shown) and then the carrier opener 110 is raised to reseal the substrate carrier 122. Shown in phantom in FIGs. 1A and 1B, the controller 118 (including a programmed processor and memory storing processor executable instructions) within the load port housing 116 can be coupled to each of the active components to control operation thereof.

[0020] In some embodiments, the purge supply 120 within the isolation compartment 114 is disposed at a lower end of the isolation compartment 114 and arranged to force trapped reactive gas up out of the isolation compartment 114. In some embodiments, the purge supply 120 within the isolation compartment 114 is disposed at an upper end of the isolation compartment 114 and arranged to force trapped reactive gas down out of the isolation compartment 114. In some embodiments, the isolation compartment 114 includes a vent opening disposed at an end of the isolation compartment 114 opposite the purge supply 120. The vent opening can include a one-way check valve to allow gas out of the isolation compartment but not back in. In some embodiments, the purge supply 120 can be replaced with a fan disposed in any of the arrangements described above for the purge supply 120.

[0021] FIGs. 2A and 2B depict front isometric views of an example embodiment of a load port 105. Note that in FIG. 2A, the load port housing 116 is installed and in FIG. 2B, the load port housing 116 has been removed. Also note that in FIGs. 2A & 2B, as well as in FIGs. 3 and 4, the same reference numeral is used to reference the same component even when a different view of the component is shown. In FIG. 2B, the control components board 202 mentioned above with respect to FIGs. 1A and 1B, is visible.

[0022] FIG. 3 depicts a back isometric view and FIG. 4 depicts a back plan view of the example embodiment of a load port 105. The opening 302 to the isolation compartment 114 is clearly shown in these drawings. The volume within the isolation compartment 114 is partially isolated from the volume within the EFEM 104 (FIG. 1) but due to the opening 302 for the elevator arm 124, the isolation compartment 114 is in fluid communication with the EFEM 104. Note that the opening 302 is minimized in order minimize particle migration into the

EFEM 104 environment. Thus, there are two volumes separated by opening 302, the EFEM 104 environment and the isolation compartment 114 volume. Because there is only a small opening 302 connecting the two volumes, reactive gas is trapped inside the isolation compartment 114 volume unless a purge supply 120 is introduced. If trapped oxygen is not purged from the isolation compartment 114, oxygen leaks out into the volume within the EFEM 104, particularly when the elevator 112 moves through the isolation compartment 114 to lower or raise the carrier opener 110.

[0023] In some embodiments, the isolation compartment purge supply 120 provides a non-reactive gas (e.g., nitrogen) at a rate within the range of approximately 10 to approximately 100 lpm and at a pressure within the range of approximately .5 in WC to approximately 3 in WC. Other ranges are possible. In some embodiments, an EFEM purge supply (not shown) provides a non-reactive gas (e.g., nitrogen) at a rate within the range of approximately 20 lpm to approximately 1000 lpm and at a pressure within the range of approximately .5 in WC to approximately 3 in WC. Other ranges are possible. In alternative embodiments that include a fan, a fan can be selected that moves of approximately 10 to approximately 100 lpm of gas.

[0024] Turning now to FIG. 5, a flowchart depicting an example method 500 of embodiments is provided. Initially, the substrate processing tool 102 side of the system 100 (i.e., the EFEM 104) is flooded with a non-reactive gas (e.g., nitrogen) to force out oxygen (502). Concurrently or after a delay, oxygen trapped in the isolation compartment 114 is purged using the dedicated isolation compartment purge supply 120 (504). Alternatively or additionally, a fan is used to purge the isolation compartment 114 of any trapped oxygen. After the oxygen has been flushed out of the isolation

compartment 114 and the EFEM 104, a substrate carrier 122 can be docked at the load port 105 (506). Alternatively, a substrate carrier 122 can be docked at the load port 105 and then the isolation compartment 114 and the EFEM 104 are purged before opening the substrate carrier 122. The carrier opener 110 opens the substrate carrier 122 and is then lowered via elevator 112 with the door of the substrate carrier 122 (508). Substrates are inserted into or removed from the substrate carrier 122 and then the carrier opener 110 is raised to reseal the substrate carrier 122 (510).

[0025] Numerous embodiments are described in this disclosure, and are presented for illustrative purposes only. The described embodiments are not, and are not intended to be, limiting in any sense. The presently disclosed embodiments are widely applicable to numerous other embodiments, as is readily apparent from the disclosure. One of ordinary skill in the art will recognize that the disclosed embodiments may be practiced with various modifications and alterations, such as structural, logical, software, and electrical modifications. Although particular features of the disclosed embodiments may be described with reference to one or more particular embodiments and/or drawings, it should be understood that such features are not limited to usage in the one or more particular embodiments or drawings with reference to which they are described, unless expressly specified otherwise.

[0026] The present disclosure is neither a literal description of all embodiments nor a listing of features of the embodiments that must be present in all embodiments. The present disclosure provides, to one of ordinary skill in the art, an enabling description of several embodiments. Some of these embodiments may not be claimed in the present application, but may nevertheless be claimed in one or more

continuing applications that claim the benefit of priority of the present application.

[0027] The foregoing description discloses only example embodiments. Modifications of the above-disclosed apparatus, systems and methods which fall within the scope of the claims will be readily apparent to those of ordinary skill in the art. Accordingly, while the embodiments have been disclosed in connection with exemplary embodiments thereof, it should be understood that other embodiments may fall within the intended spirit and scope, as defined by the claims.

CLAIMS

What is claimed is:

1. A load port system comprising:

a frame supporting a dock and a carrier opener;

an elevator operable to raise and lower the carrier opener;

an isolation compartment within which the elevator is operable to move, the isolation compartment including a volume isolated from a volume of an equipment front end module (EFEM); and

a purge supply within the isolation compartment operable to purge the isolation compartment of reactive gas trapped within the isolation compartment.

2. The system of claim 1 further including a housing mounted on the frame and, together with the frame, defining the volume of the isolation compartment wherein the purge supply enters the isolation compartment through the housing.

3. The system of claim 1 wherein the purge supply within the isolation compartment is operable to purge the isolation compartment with a gas that is non-reactive with substrates to be passed through the factory interface door.

4. The system of claim 3 wherein the trapped reactive gas is oxygen and the non-reactive purge gas is nitrogen.

5. The system of claim 1 wherein the purge supply within the isolation compartment is disposed at a lower end of the isolation compartment and arranged to force trapped reactive gas up out of the isolation compartment.

6. The system of claim 1 wherein the purge supply within the isolation compartment is disposed at an upper end of the isolation compartment and arranged to force trapped reactive gas down out of the isolation compartment.

7. The system of claim 1 wherein the isolation compartment includes an opening disposed on a side of the isolation compartment opposite the purge supply.

8. A load port comprising:

an isolation compartment for an elevator defined by a housing and a frame, the isolation compartment including a volume isolated from a volume of an equipment front end module (EFEM) couplable to the load port; and

a purge supply within the isolation compartment operable to purge the isolation compartment of reactive gas trapped within the isolation compartment.

9. The load port of claim 8 wherein the purge supply enters the isolation compartment through the housing.

10. The load port of claim 8 wherein the purge supply within the isolation compartment is operable to purge the isolation compartment with a gas that is non-reactive with substrates to be passed through the EFEM.

11. The load port of claim 10 wherein the trapped reactive gas is oxygen and the non-reactive purge gas is nitrogen.

12. The load port of claim 8 wherein the purge supply within the isolation compartment is disposed at a lower end of the isolation compartment and arranged to force trapped reactive gas up out of the isolation compartment.

13. The load port of claim 8 wherein the purge supply within the isolation compartment is disposed at an upper end of the isolation compartment and arranged to force trapped reactive gas down out of the isolation compartment, and wherein the isolation compartment includes an opening disposed at a side of the isolation compartment opposite the purge supply.

14. A method for purging an equipment front end module (EFEM) system, the method comprising:

flooding an EFEM with a gas non-reactive to substrates to be passed through the EFEM system;

purging an isolation compartment of a load port coupled to the EFEM of reactive gas trapped within the isolation compartment using a non-reactive gas supply disposed within the isolation compartment; and

supplying the non-reactive gas supply to the isolation compartment through a housing defining the isolation compartment.

15. The method of claim 14 wherein the purge supply within the isolation compartment is disposed at a lower end of the isolation compartment and purging the trapped reactive gas includes forcing the trapped reactive gas up out of the isolation compartment.

17

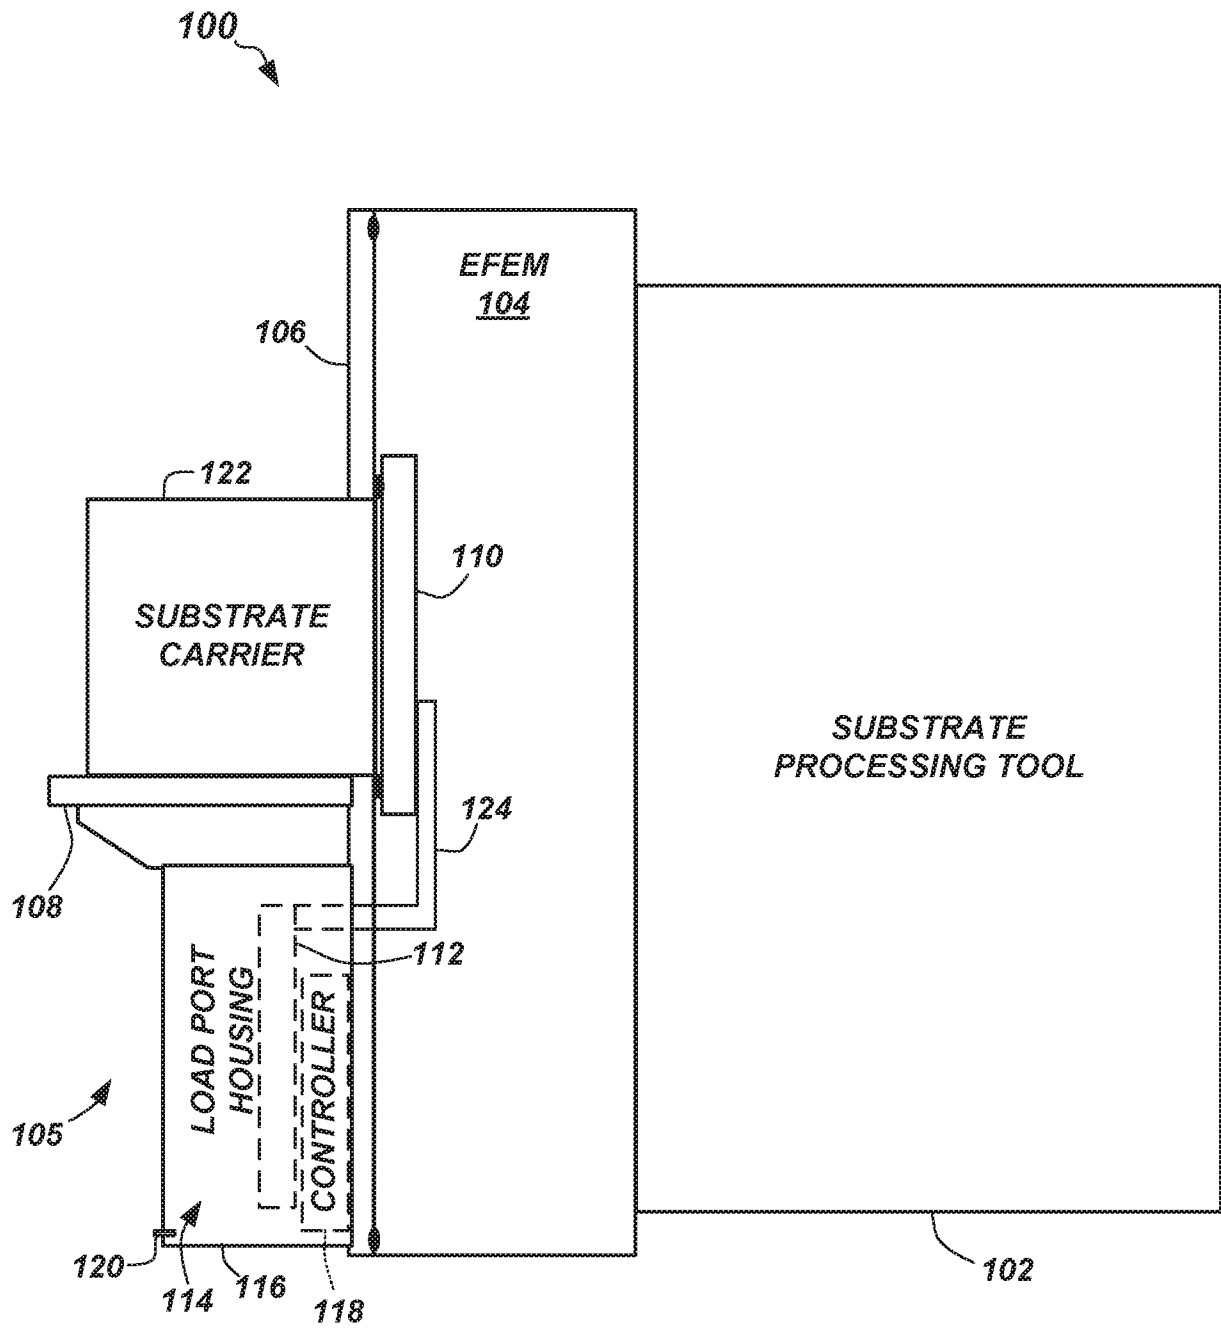


FIG. 1A

2/7

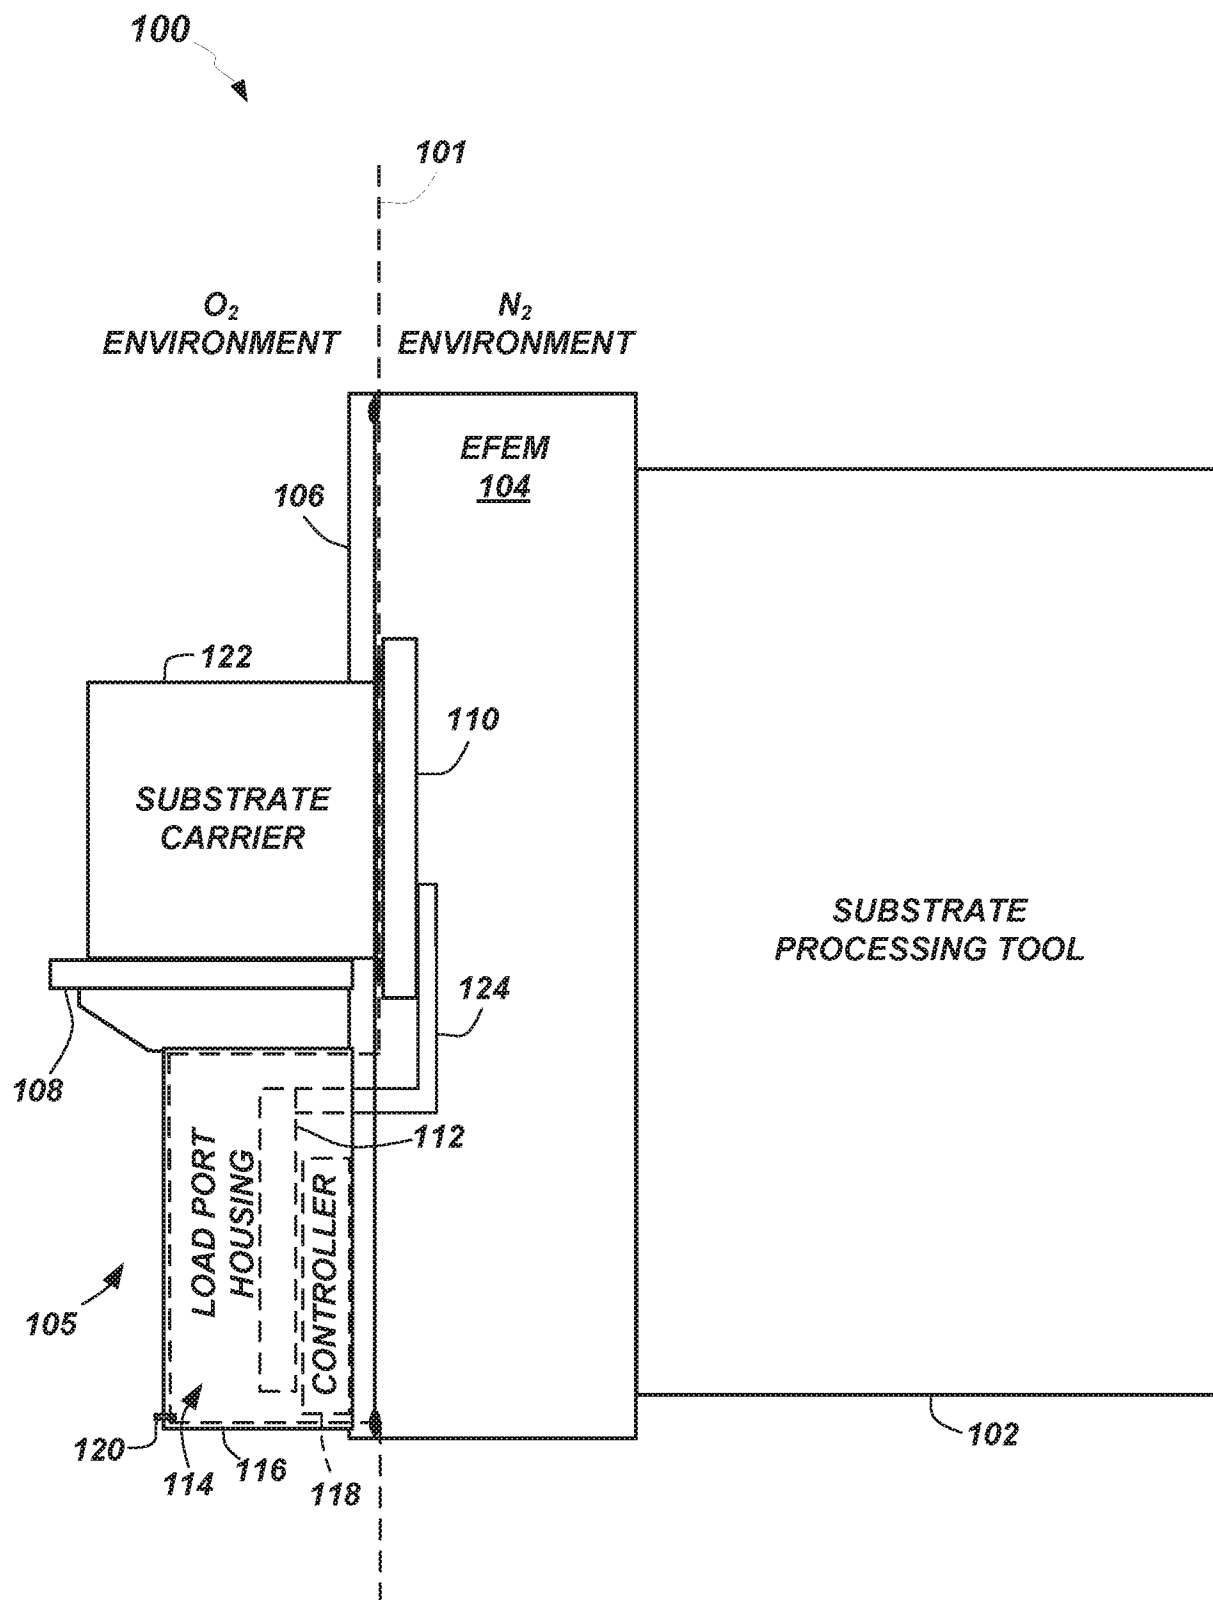


FIG. 1B

3/7

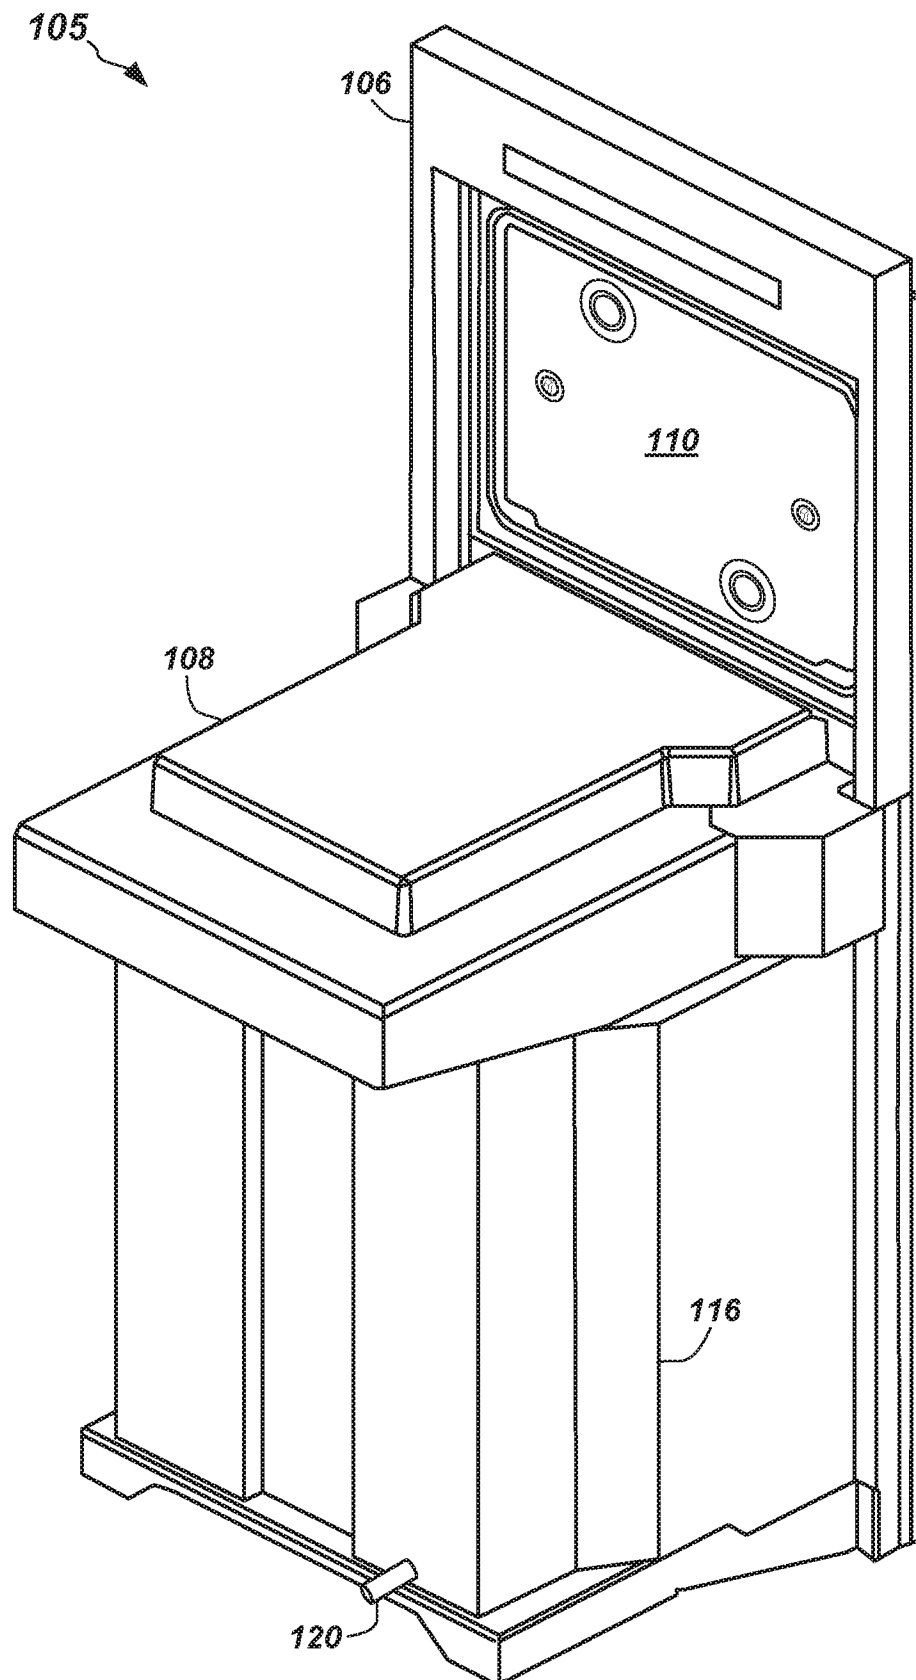


FIG. 2A

4/7

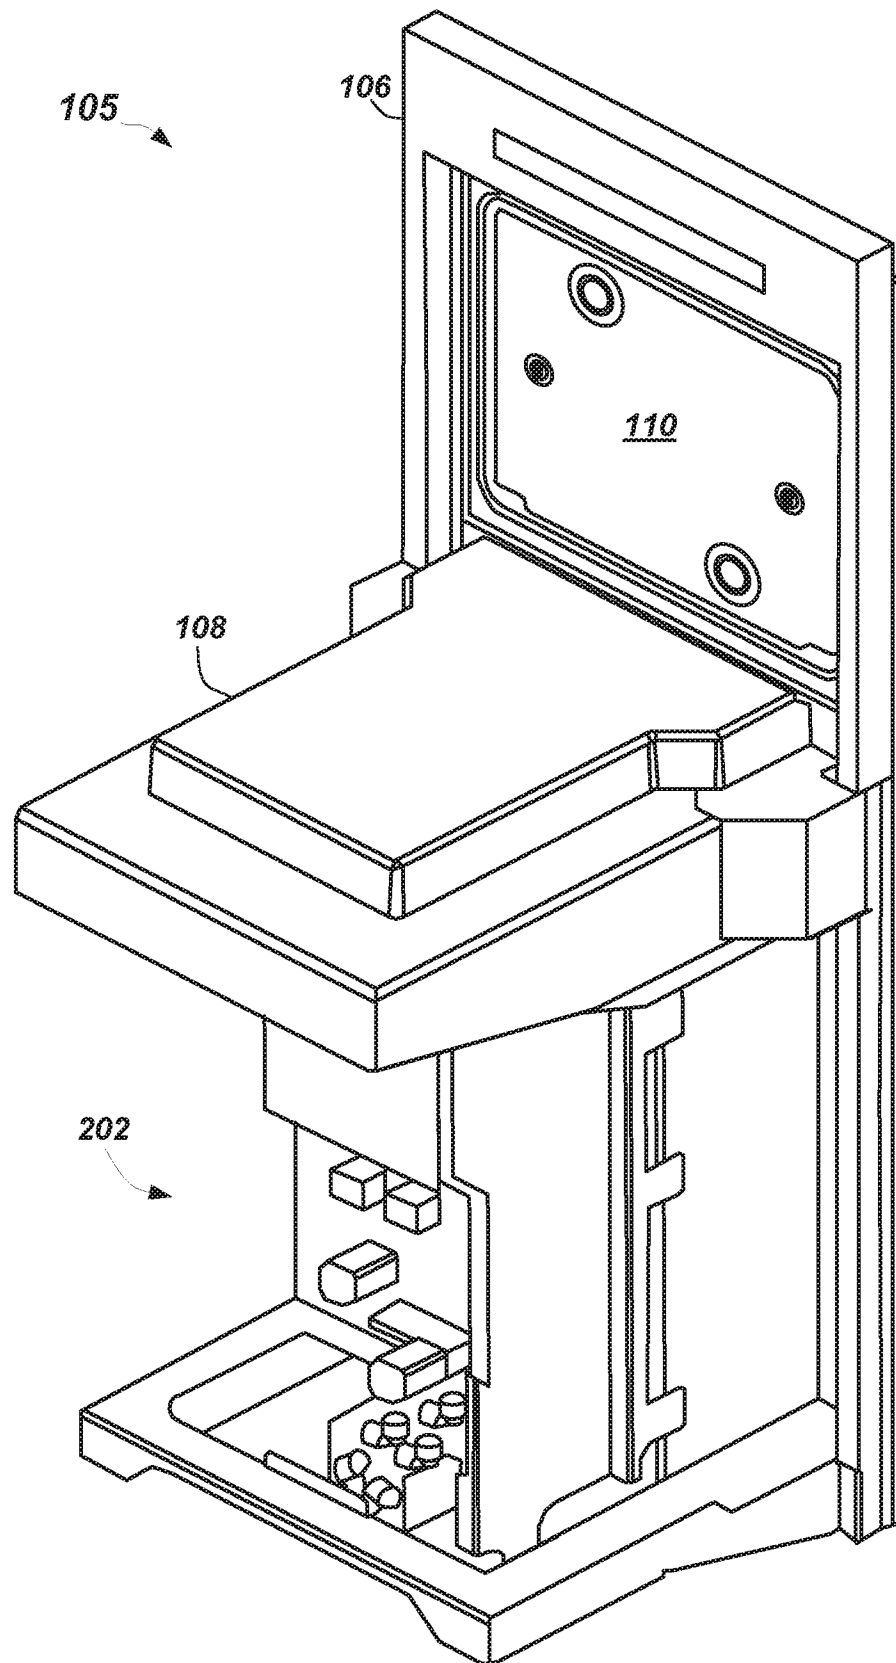


FIG. 2B

5/7

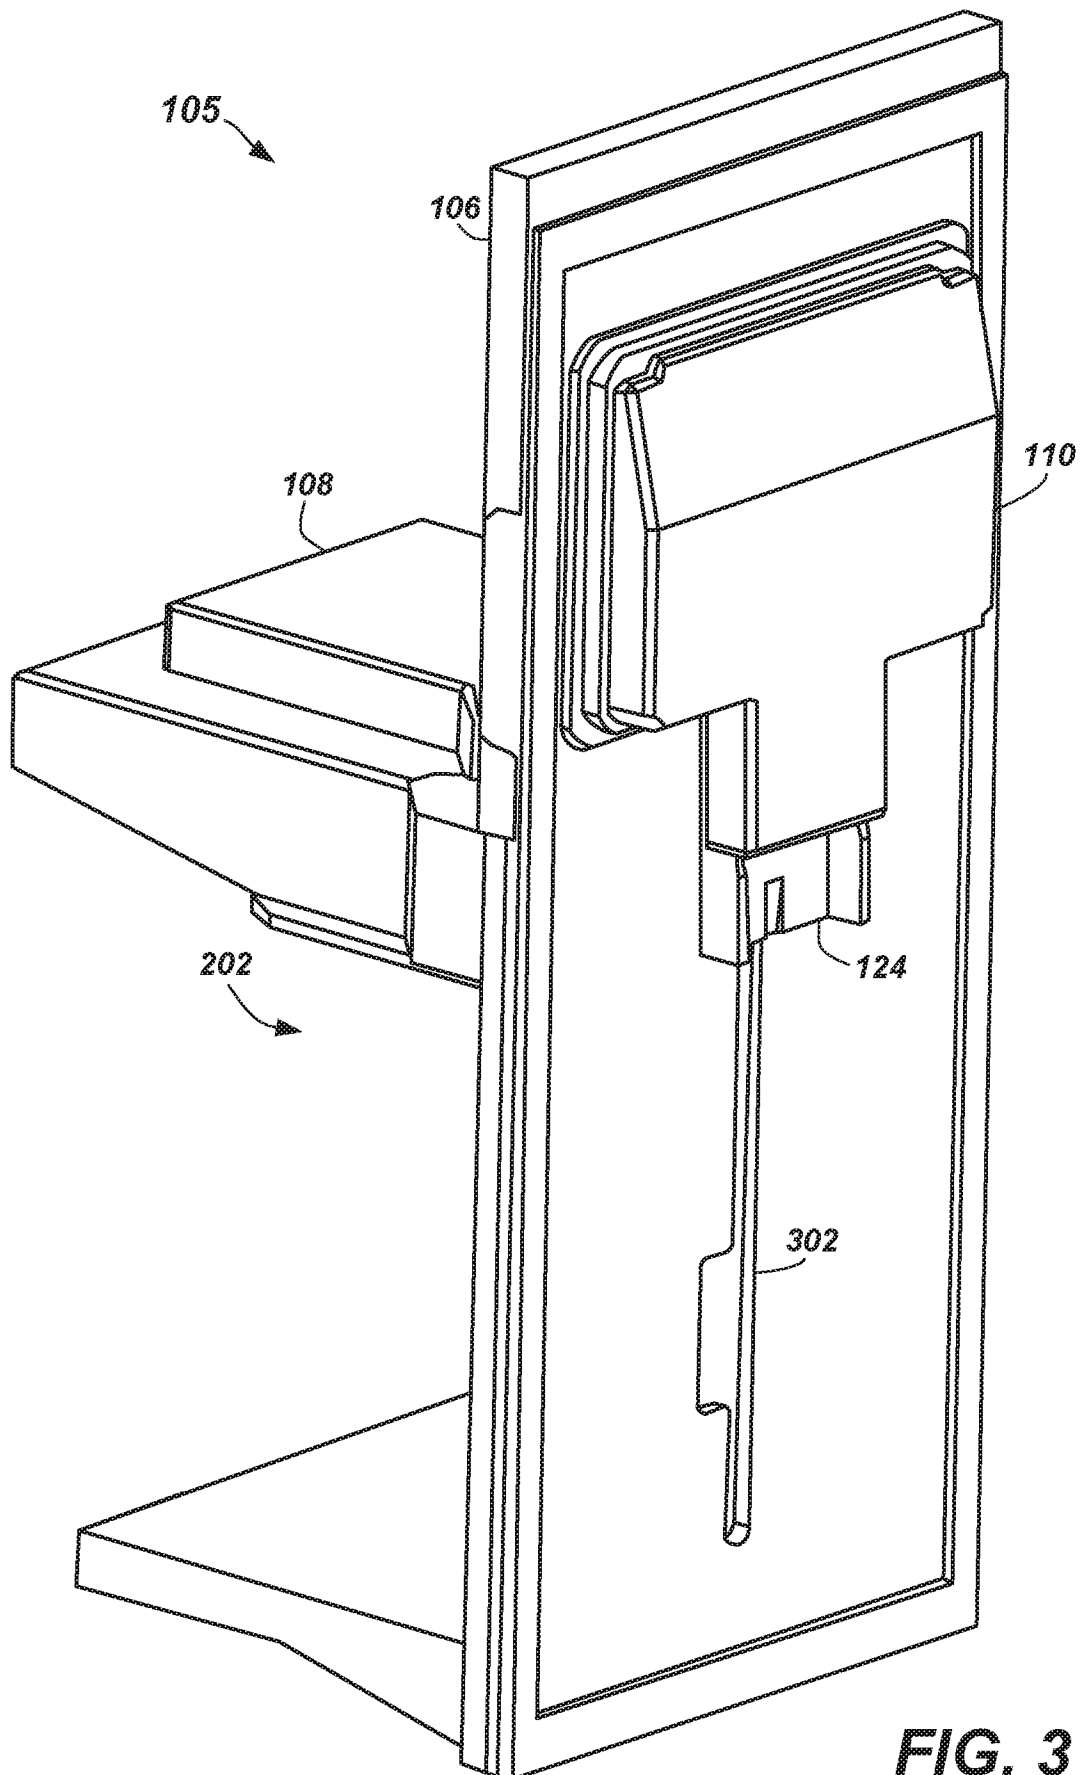
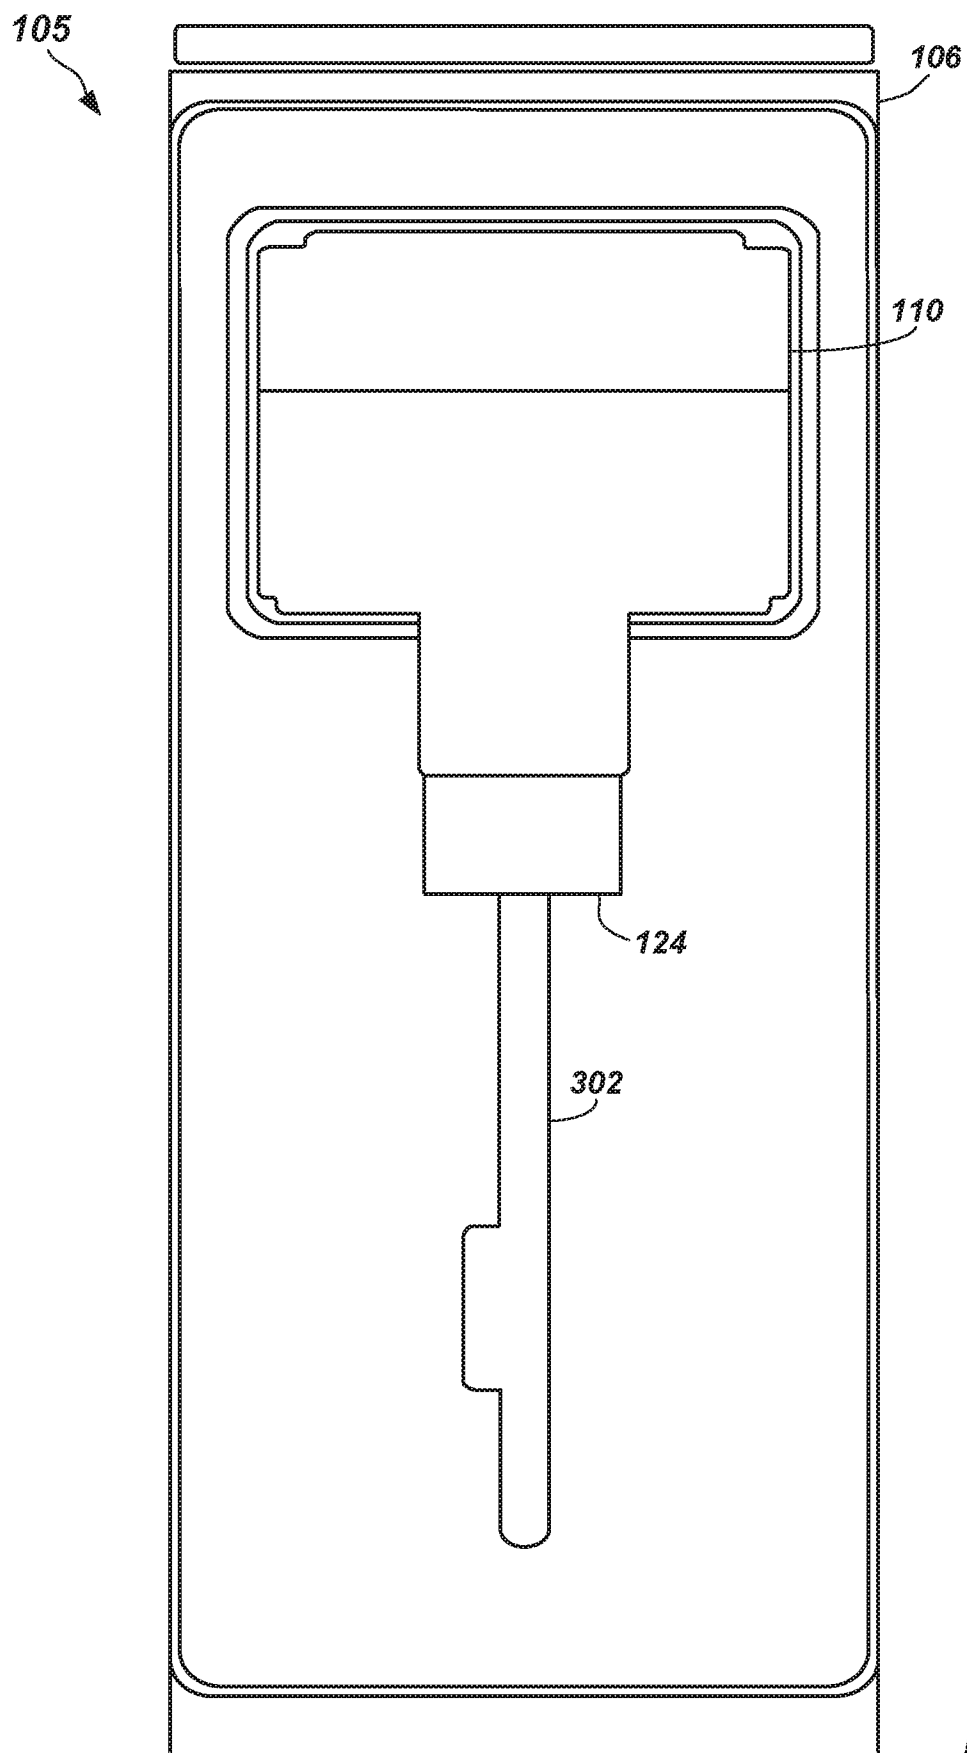
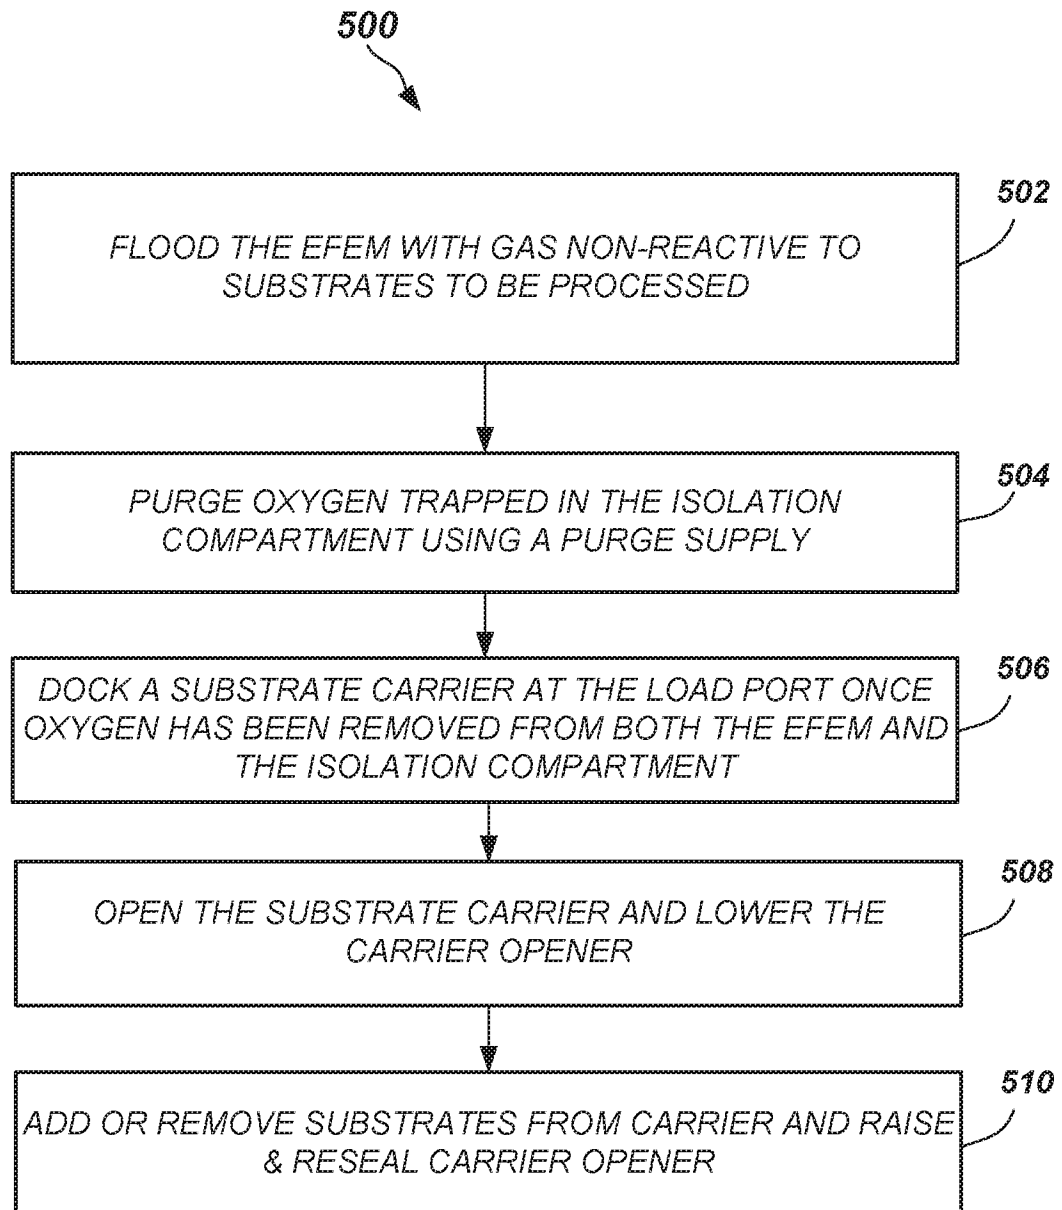


FIG. 3

6/7

**FIG. 4**

7/7

**FIG. 5**

A. CLASSIFICATION OF SUBJECT MATTER**H01L 21/677(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 21/677; B65G 49/07; H01L 21/67; B65B 31/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: load port, frame, dock, isolation, purge, reactive, EFEM

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003-0031537 A1 (TOKUNAGA, KENJI) 13 February 2003 See paragraphs [0023], [0046]-[0047], [0060], [0081]; and figures 1-2.	1-6, 8-12, 14-15
Y		7, 13
Y	US 2015-0162229 A1 (HIRATA CORPORATION) 11 June 2015 See paragraph [0044]; and figure 4.	7, 13
A	US 2014-0369793 A1 (BROOKS AUTOMATION, INC.) 18 December 2014 See paragraphs [0032]-[0036]; and figures 3-4.	1-15
A	US 2012-0261031 A1 (OKABE, TSUTOMU) 18 October 2012 See paragraphs [0067]-[0069]; and figure 5.	1-15
A	WO 2015-023591 A1 (APPLIED MATERIALS, INC.) 19 February 2015 See paragraphs [0053]-[0056]; and figures 5A-5B.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 February 2018 (20.02.2018)

Date of mailing of the international search report

21 February 2018 (21.02.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/060949

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003-0031537 A1	13/02/2003	JP 2003-045933 A JP 3880343 B2 KR 10-2003-0011536 A US 6817822 B2	14/02/2003 14/02/2007 11/02/2003 16/11/2004
US 2015-0162229 A1	11/06/2015	JP 2006-135016 A JP 4891538 B2 US 2007-0066204 A1 US 9620399 B2	25/05/2006 07/03/2012 22/03/2007 11/04/2017
US 2014-0369793 A1	18/12/2014	CN 101511713 A CN 101511713 B EP 1901983 A2 EP 1901983 B1 JP 2009-509316 A JP 2013-153188 A JP 2014-225695 A JP 5657203 B2 JP 5732698 B2 JP 5978261 B2 KR 10-1313231 B1 KR 10-2008-0033355 A TW 200733289 A TW I433248 B US 2007-0009345 A1 US 8821099 B2 WO 2007-008677 A2 WO 2007-008677 A3	19/08/2009 17/07/2013 26/03/2008 04/03/2015 05/03/2009 08/08/2013 04/12/2014 21/01/2015 10/06/2015 24/08/2016 30/09/2013 16/04/2008 01/09/2007 01/04/2014 11/01/2007 02/09/2014 18/01/2007 13/11/2008
US 2012-0261031 A1	18/10/2012	JP 2007-180516 A JP 2007-180517 A JP 2008-135791 A JP 4278676 B2 JP 4301456 B2 JP 4666183 B2 KR 10-0772791 B1 KR 10-0799411 B1 KR 10-2007-0057003 A KR 10-2007-0057036 A TW 200735256 A TW 200739790 A TW I324371 B TW I336505 A TW I336505 B US 2007-0151619 A1 US 2007-0151620 A1 US 2010-0212775 A1 US 2012-0060972 A1 US 7726353 B2	12/07/2007 12/07/2007 12/06/2008 17/06/2009 22/07/2009 06/04/2011 01/11/2007 30/01/2008 04/06/2007 04/06/2007 16/09/2007 16/10/2007 01/05/2010 21/01/2011 21/01/2011 05/07/2007 05/07/2007 26/08/2010 15/03/2012 01/06/2010

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/060949

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015-023591 A1	19/02/2015	US 7841371 B2	30/11/2010
		US 8082955 B2	27/12/2011
		US 8375998 B2	19/02/2013
		US 8413693 B2	09/04/2013
		CN 105453246 A	30/03/2016
		JP 2016-527732 A	08/09/2016
		KR 10-2016-0043027 A	20/04/2016
		TW 201519355 A	16/05/2015
		US 2015-0045961 A1	12/02/2015