




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B63B 25/00</b>		A1	(11) International Publication Number: <b>WO 98/14362</b>
(21) International Application Number: <b>PCT/US97/17484</b>		(43) International Publication Date: <b>9 April 1998 (09.04.98)</b>	
(22) International Filing Date: <b>26 September 1997 (26.09.97)</b>		(81) Designated States: AU, BR, CA, CN, IL, JP, KR, MX, NO, NZ, PL, RU, SG, TR, VN, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(30) Priority Data: 08/724,364	1 October 1996 (01.10.96)	US	Published <i>With international search report.</i>
(71) Applicant: ENRON LNG DEVELOPMENT CORP. [US/US]; 1400 Smith Street, Houston, TX 77002 (US).			
(72) Inventors: STENNING, David, G.; 611-46 Avenue S.W., Calgary, Alberta T2S 1B9 (CA). CRAN, James, A.; 625 Sifton Boulevard S.W., Calgary, Alberta T2T 2K8 (CA).			
(74) Agent: ROBINS, W., Ronald; Vinson & Elkins, L.L.P., 1001 Fannin Street, 2300 First City Tower, Houston, TX 77002-6760 (US).			

## (54) Title: SHIP BASED GAS TRANSPORT SYSTEM

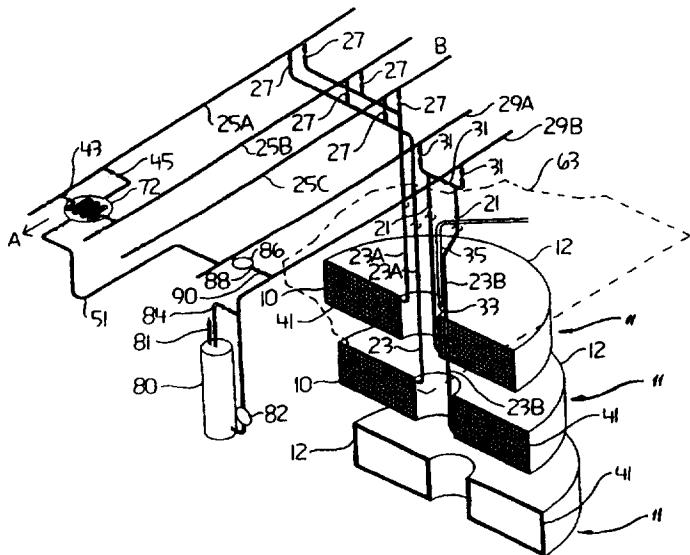

## (57) Abstract

A gas storage system (11) formed of a continuous pipe (10) wound in plural layers, each layer having plural loops. The pipe may be distributed within a container (12), which may serve as a carousel for winding the pipe and as a gas containment device. When containers, each containing a continuous pipe, are stacked upon each other, the weight of upper containers may be born by the walls (16, 18) of lower containers, thus preventing lower layers of pipe from suffering stresses due to crushing by upper layers. A method of transporting gas to a gas distribution facility including obtaining a supply of gas at a gas supply point remote from the gas distribution facility, injecting the gas into a continuous pipe bent to form plural layers, each layer including plural loops of pipe, transporting the continuous pipe along with the gas to the gas distribution facility preferably in a ship (62) and discharging the gas.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE OF THE INVENTION:

Ship Based Gas Transport System

NAME(S) OF INVENTOR(S):

5 James A. Cran  
David G. Stenning

FIELD OF THE INVENTION

10 This invention relates to apparatus and methods for the transport and storage of fluids; more particularly, this invention relates to the transport and storage of compressed gases such as natural gas.

BACKGROUND OF THE INVENTION

15 This is a continuation-in-part application of United States patent application 08/550,080 filed October 30, 1995.

20 In the parent application a ship based gas transportation system in which a plurality of cylinders are organized into cells of 3 to 30 cylinders per cell was also disclosed. A manifold and valve system was described for connecting the cylinders to on shore loading and off-loading terminals.

25 The amount of equipment and the complexity of the inter-connection of the manifolding and valving system in the ship based gas transportation system bears a direct relation to the number of individual cylinders carried on-board the transport ship. Accordingly, in large ships

there is a significant expense associated with the manifolding and valving connecting the gas cylinders. Thus, the need has arisen to find a storage system for compressed gas that can both contain larger quantities of 5 compressed gas and simplify the system of complex manifolds and valves.

#### SUMMARY OF THE INVENTION

A gas storage system, particularly adapted for 10 transportation of large quantities of compressed gas on board a ship, includes a large storage volume provided by coils of substantially continuous pipe. The use of long lengths of continuous pipe for gas storage leads to a significantly reduced cost as less interconnecting 15 equipment is required between gas storage containers.

There is therefore provided, in accordance with the present invention, a gas storage system formed of a continuous pipe. The continuous pipe is preferably packed or coiled into a container. In one aspect of the invention, 20 the continuous pipe is wound in plural layers, each layer having plural loops. The continuous pipe, however, may be distributed within a container in a variety of configurations. The container for the coiled pipe may serve several functions. First, the container may act as 25 a carousel for winding the pipe. Second, the container may serve as a means for lifting the pipe. Third, the container may serve as a gas containment device for the atmosphere surrounding the continuous pipe.

When containers, each containing a continuous pipe, are stacked upon each other the weight of upper containers may be born by the walls of lower containers, thus preventing the lower layers of pipe from having to 5 withstand the crushing forces from the weight of the upper layers of pipe, with the resulting induced stresses that reduce the acceptable gas pressure values.

In accordance with a further aspect of the invention, there is provided a method of transporting gas 10 to a gas distribution facility including obtaining a supply of gas at a gas supply point remote from the gas distribution facility, injecting the gas into a continuous pipe bent to form plural layers, each layer including plural loops of pipe, transporting the continuous pipe 15 along with the gas to the gas distribution facility preferably in a ship and discharging the gas at the gas distribution facility. It is preferred that cooling of the continuous pipe storage system during discharging at the gas distribution facility be conserved in the gas storage 20 system so that during subsequent filling at the gas supply point the continuous pipe is initially cool.

The transported gas may be cooled during discharging by reducing pressure of the gas adiabatically, circulating a storable fluid against the flow of the gas in 25 a heat exchanger and then circulating the storable fluid into the continuous pipe gas storage system.

Cold in the gas may be preserved by piping the cold gas through a heat exchanger against, for example, a

flow of sea water, and then storing the chilled sea water on the ship. Gas being filled into the continuous pipe storage system at a gas supply point may then be cooled using the cooled sea water.

5        The gas storage system of the present invention which uses continuous pipe wound to largely fill an enclosed volume has several advantages. First, the pipe diameter may be made smaller than 12 inches, thus increasing fracture toughness and decreasing the probability and severity of failure. Second, the technology for the continuous production of lengths of pipe is well known, particularly in the oil industry, thereby facilitating production of the continuous pipe. Third, complicating design features such as large domes, typically 10 welded to the ends of cylinders are not required. Fourth, fewer control valves, pressure relief valves and related equipment are required when continuous pipe is used as compared to using many cylinders. This leads to a reduction in cost. Fifth, the use of continuous lengths of 15 relatively small diameter pipe may also permit more cold to be retained in the pipe steel after the gas is discharged, as compared with larger diameter cylinders. This retention of cold in the pipe steel facilitates re-filling the continuous pipe storage system with gas of the gas supply 20 point.

25        These and other aspects of the invention are described in the detailed description of the invention and claimed in the claims that follow.

BRIEF DESCRIPTION OF THE DRAWINGS

There will now be described preferred embodiments of the invention, with reference to the drawings, by way of illustration only and not with the intention of limiting 5 the scope of the invention, in which like numerals denote like elements and in which:

Fig. 1 shows an exemplary coiled continuous pipe gas storage system according to the invention adapted for the transportation of gas by ship;

10 Fig. 2A is a perspective view of a continuous pipe coiled in accordance with a first embodiment of the invention;

15 Fig. 2B is a perspective view of a continuous pipe gas storage system in accordance with a second embodiment of the invention;

Fig. 3 is a perspective view, partly in section, showing continuous pipe wound in a container according to an embodiment of the invention, and demonstrating both cubic and hexagonal packing;

20 Fig. 4 is a plan view of continuous pipe wound with minimum radius turns to fill a rectangular container;

Fig. 5 is a perspective view of continuous pipe in U-shaped loops lying back to back to form a single layer;

25 Fig. 6 is a plan view of a ship, partly cut away, with spool containers containing continuous pipe, in which the containers are oriented with vertical axes and are packed in a cubic pattern between transverse bulkheads;

Fig. 7 is a plan view of a ship, partly cut away, with spool containers containing continuous pipe, in which the containers are oriented with vertical axes and are packed in a hexagonal pattern within semi-hexagonal bulkheads;

Fig. 8 is a plan view of a ship with hexagonally packed containers with three rows of containers within semi-hexagonal bulkheads;

Fig. 9 is a cross-section through five spool containers stacked upon each other with continuous pipe wound around the spool (not all the pipes are shown);

Fig. 10 is a top plan view of the base of a container in accordance with one embodiment of the invention;

Fig. 10A is a section through a container for use in accordance with the invention;

Fig. 11A is a radial section through the base of the container of Fig. 11;

Fig. 11B is a section through the base of a container perpendicular to the section of Fig. 11A;

Fig. 11C is a radial view of the base of the container of Fig. 10;

Fig. 12 is a side elevation view of a side wall of the container of Fig. 10; and

Fig. 13 is a schematic of a system for the conservation of cold in gas discharged from, for example, a ship.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

A loop of pipe is defined herein to mean a length of pipe that turns back on itself, so that fluids travelling within the pipe turn more than 90°. A layer of pipe is defined herein to mean a set of pipes that are spaced laterally from each other and that occupy a band whose thickness is approximately equal to the diameter of one of the pipes. In operation, a layer may be horizontal, vertical or at any angle there between.

It is understood that the material employed to make the continuous pipe used in practising the invention will be ductile and not brittle at operational fluid transport pressures and temperatures, and that the material is impervious to gas stored within the continuous pipe. It will also be understood that while very long lengths of pipe are ideal, it may be necessary to make intermediate connections between long pipe sections to facilitate manufacturing. The continuous pipe may be fabricated from any normal grade of steel, for example X70, but the pipe steel may also be quenched and tempered for increased strength after all welding is complete. Alternatively, the continuous pipe may also be wrapped with high tensile steel wire.

An exemplary gas storage device 11 is shown in Fig. 3. Multiple gas storage devices 11 are shown in Fig. 1.

The gas storage device 11 of the present invention is made by distributing or coiling a continuous

pipe 10 within a container 12 in plural layers, each layer being formed of plural loops of pipe. Any openings in the continuous pipe 10 that allow flow of gas into or out of the pipe 10, such as at the ends of the pipe 17, 19, are 5 provided with valves, for example, valves 21 in Fig. 1. The valves allow the continuous pipe 10 to be sealed for the storage and transportation of gas. Each length of pipe 10 should also be provided with a pressure safety valve (not shown) to allow release of gas over a preset pressure.

10 The container 12 has a base 14, an outer containment side wall 16, an inner containment side wall 18 and a top 20. The inner containment side wall 18 forms a central core, when the container is shaped in the form of a spool. The container 12 may also provide a carousel 15 function, namely it may provide a support into which the continuous pipe 10 may be wound and then lifted, thus making the pipe easier to handle and load, for example in a ship. In addition, the container 12 distributes the load of the continuous pipe 10 to the outside walls of 20 underlying containers 12, such as the stack of containers 12 illustrated in Fig. 9, in which the weight of the continuous pipe 10 is born by the side walls 16 and 18.

25 Ends 17, 19 of the continuous pipe 10 preferably extend through a gas tight aperture in the interior wall 18 of the container 12. As shown in Fig. 1 vertical pipes 23A may be connected to the ends 17 of the continuous pipe 10 to connect them to high, medium or low pressure manifolds 25A, 25B, 25C respectively for charging the continuous pipe

10 with gas at a gas supply point and discharging gas from the continuous pipe 10 at a gas distribution facility. The manifolds 25A, 25B and 25C are preferably on the deck 63 of a ship, while the containers 12 are stored in the hold.

5 Valves 27 on the pipes 23A may be used for control of the flow of gas from the manifolds 25A-25C to and from the continuous pipes 10. Vertical pipes 23B may be connected to the ends 19 to connect them to high and low pressure fluid lines 29A and 29B. Valves 31 on lines 23B may be used to 10 control fluid flow into and out of the continuous pipes 10. Alternatively, the ends 17, 19 may extend through the exterior wall 16 of the container 12 instead of through the interior wall 18.

The base 14, side walls 16 and 18 and top 20 of 15 the container 12 are preferably sealed so as to be air tight. This air tight seal provides the container 12 with a containment function in relation to fluids carried by the continuous pipe 10 or the container 12 or both. The container 12 may also be filled with a supporting matrix of 20 material, such as a dry inert powder, a cement, a liquid, such as water, or a conventional mud such as is used in drilling wells. The supporting matrix material may have a specific gravity greater than 1, to assist in supporting the load of the continuous pipe 10. Filling the container 25 12 with a supporting matrix may be particularly advantageous where the specific gravity of the pipe and stored gas combination is about equal to the specific gravity of the supporting matrix. In this instance, more

layers of continuous pipe 10 may be stacked upon each other without increasing the risk of exceptional stresses on the inside walls of the continuous pipe.

Alternately, in cases where the continuous pipe 10 does not need support, the container 12 may be filled with a dry inert gas such as nitrogen, air or exhaust gases. Preferably, a fan or like means (not shown) can be provided to circulate the atmosphere within the container 12 by means of ducting (not shown) which enters and exits the container 12 via sealed apertures (not shown). It is also preferable that the atmosphere in the container 12 be periodically tested for the presence of escaping gas.

For example, acoustic monitors may also be placed in the containers 12. Such acoustic monitors will sense either the noise made by the leaking gas or the sound of the crystalline metal in the continuous pipe 10 if a fault occurs and subsequently grows in the pipe steel. In addition, the atmosphere within the container and external to the continuous pipe 10 may be sniffed with commonly available sniffing equipment to detect the presence of leaking gas.

It is believed that leaks in the continuous pipe 10 will start small. Once detected, the affected coil of the continuous pipe 10 will be promptly emptied and the leak repaired. Should the leak grow rapidly to a significant size, the pressure will rise inside the container 12. The walls of the container 12, for example, the upper wall of the central core, should be provided with

conventional rupture disks or collapsible panels 33, set to open before the pressure inside the container 12 reaches a level where it might damage some other part of the walls of the container 12. The gas flow from such a rapid leak will 5 then be conducted away by ventilation ducts 35 and vented via a chimney of approved height. It is believed that such double containment of pressurized gas will be, and also be recognized by regulatory agencies, as exceedingly safe so that lower values for the safety factor of the pipe 10 relative to bursting may be used with regulatory approval.

Referring now to Fig. 2A, the continuous pipe may be coiled on the base 14 of the container 12 in alternating layers from the outside to the inside and from the inside to the outside. Layer 11A in Fig. 2A is coiled from the 15 inside to the outside, while layer 11B is coiled from the outside to the inside on top of layer 11A. In this manner, the continuous pipe 10 can be installed in the container 12 by winding the pipe around the central core defined by the inner wall 18, preferably beginning with the inside and 20 ending at the outside. Many layers of continuous pipe 10 may be wound on the core as the lower layers of pipe 10 are capable of supporting the upper layers of pipe without the risk of the pipe 10 suffering significantly increased stress in addition to that due to the internal pressure of 25 pressurized gas. The maximum number of layers of pipe that may be supported on any given layer of pipe is, readily found from pipe strength calculations. As an example, a 6 inch outside diameter pipe may be wound in a 40 ft wide

container about 10 feet high, hence with about 20 layers and about 30 loops (each loop consisting in this case of one 360° loop of pipe), resulting in a length of continuous pipe in the order of 9 miles. The central core may be in 5 the order of 10 ft wide for a 6 inch pipe. Pipe outside diameters of between 1 inch and 10 inches are preferred. The size of the inner core of the container 12 depends on the minimum bend of the pipe, which in turn depends on the temperature at which the continuous pipe is bent and the 10 material from which the continuous pipe is made. For example, cold bending of continuous pipe made from X70 welded plate steel results in about a 10 D (diameter of pipe) minimum radius. Hot bending may reduce the minimum radius to 3D.

15                   Winding continuous pipe in the manner shown in Fig. 2A results in partial cubic and partial hexagonal packing as shown in Fig. 3, which shows a section through the layers of continuous pipe. In cubic packing, each pipe section abuts four other pipe sections, one above, one 20 below and one on each side. In cubic packing the pipe 10 fills about 78.5% of the space in the container 12. In hexagonal packing, each pipe section has six point contact with adjacent pipe. This results in an approximately 90.7% space fill of the container 12. Hexagonal packing is 25 superior to cubic packing both in terms of space filling and in terms of reducing the effect of transverse crushing forces on the circumferential stress of lower parts of the pipe 10. In the case of the coil shown in Figs. 1 and 3,

perfectly cubic and perfectly hexagonal packing occurs along lines at 90° to each other. If the axes of perfect hexagonal packing are rotated slowly around the coil, then it is believed possible to obtain an average packing density of about 84.6%.

As shown in the embodiment in Fig. 2A if the axis of the coil is vertically oriented in use, it can be assured that fluids in the continuous pipe 10 will drain to one end of the pipe, for example end 13 shown. The base 14 of the container 12 need not be flat but may be raised or lowered in the center, for example to form either a pyramidal or conical shape to facilitate drainage of fluids from the continuous pipe. In the case of a raised central portion of the base 14 of the container 12, the valved end of the pipe 10 should be at the outside of the container 12.

In the embodiment shown in Fig. B, the pipe 10 is wound on a core 22. Winding proceeds axially from one end plate 24 to the other end plate 26. This forms a reel type of winding. The core 22 and end plates 24 and 26 together form a support for the continuous pipe 10. The same winding considerations apply to the embodiment of Fig. 2B as for Fig. A.

In the embodiment of Fig. 4, straight sections 32 alternate with bends 34 to form in this case a square, but rectangles, hexagons or other polygonal shapes could also be formed. The same winding considerations apply as for the embodiment of Fig. 2A. Such an embodiment could be used to

fill the entire hold of a ship. However, a configuration with straight and bent sections is harder to wind, and thus is preferred when justified by significantly improved packing of coils in the ship's hold.

5        Perfect hexagonal packing may be obtained with pipe distributed within, for example, a rectangular container, such as the hold of a ship, in the manner shown in Fig. 5. Each layer of pipe 42 is formed of loops 44 that are U-shaped, with straight sections 46 alternating with 10      bends 48. The pipe is thinned at the bends by rolling the pipe in conventional manner and then bending it into 180° bends. Additional layers may be formed in the manner illustrated by end 49 of the continuous pipe which overlies the underlying layer in a hexagonal packing pattern. End 47 15      is flanged to receive a valve (not shown). While this embodiment has the advantage of hexagonal packing, gas flow will be restricted in the continuous pipe at the bends, making a preferred embodiment when charging and discharging 20      of gas into the continuous pipe is desired to be at a relatively slow rate.

25      Continuous pipe wound in a container with a coil, as for example shown in Fig. 2A, where the coil has a vertical axis, may be transported in a hold 60 of a ship 62 as shown in Figs. 6, 7 and 8. A ship's hold may be, for example, about 100 ft wide and 700 ft long, and is preferably sealed with a controlled atmosphere, similar to the sealing of the containers 12. The containers 12 may be side by side in a cubic pattern as shown in Fig. 6. This

results in space utilization of about 75.4% for twenty-eight 50 ft. diameter containers 12. The containers 12 may also be arranged in a two row or three row hexagonal pattern as shown in Figs. 7 and 8. The holds 60 in Figs. 7 and 8 respectively are separated by hexagonal bulkheads 64, 66. In Fig. 7, the space utilization for twenty six 53.6 ft. containers is about 81.25% and in Fig. 8 for fifty seven 36.603 ft. diameter containers is about 79.81%. Preferably, the containers 12 will be stacked in the ship's hold as shown in Fig. 9, for example with a stack of five containers 12 each about 11 ft high to a total height of about 55 ft. The total height of the stack of containers 12 is limited by considerations of ship stability. Alternatively, the containers 12 may be oriented with their axes horizontal. In a further alternative, the ship's hold may be contoured to form a cylindrical base in which a coil or coils having a horizontal axis parallel to the ship's longitudinal axis may be rested. While a single coil extending the length of the ship may be advantageous, it may be difficult for some shipyards to install. Installing several smaller coils connected serially, each comprising several layers and having a horizontal axis, may be easier for some shipyards to manage without damaging the continuous pipe 10.

The containers 12 are preferably stacked, such that there are for example about five containers 12 stacked as illustrated in Fig. 9, with walls 16, 18 of lower containers 12 supporting the upper containers. The

containers 12 may be constructed in any of various ways, so long as they are capable of supporting and containing the continuous pipe 10. As illustrated in Figs. 10-12, the container 12 may be formed of 24 vertical columns 52 on the 5 inside and 24 vertical columns 53 on the outside, the outside vertical columns 53 being topped with a box ring beam 54 and spaced at 36 inch center to center spacings. The base or floor 14 of the container 12 is supported by 24 I-beams 56 covered with plates 58. The I-beams 56 connect 10 respective ones of the inner columns 52 and the outer columns 53. As an example, the outer columns 53 may be formed of a 12 x 4 web with 8 x 6 flanges, with the inner columns 52 having slightly smaller flanges. The floor I-beams 56 may have a 12 x 3 web and 8 x 7 flanges. The walls 15 16, 18 and floor 14 are covered with flat plates 58, 59 and sealed so as to be impervious to fluid in the container. The containers 12 so formed are preferably provided with a lid 20 as shown in Fig. 3, and sealed during operation. Except for the top container, the lid of the next lower 20 container 12 may be provided by the base of the container 12 above.

Where multiple continuous pipes 10 are transported together, they may be connected together serially such that all of the continuous pipes 10 in a 25 ship's hold, for example, may be circulated with gas at the same time and such that a pig may be run through them in one pass for inspection and cleaning services. The

continuous pipes 10 in the ship's hold may be provided with a controlled atmosphere and with insulated walls.

When transport is completed, the continuous pipes 10 in a ship's hold may then be connected to an on-shore or 5 off-shore buoy terminal by high, intermediate and low pressure manifolds 25A, 25B and 25C (Fig. 1) as also described in co-pending application 08/550,080 filed October 30, 1995, the content of which is herein incorporated by reference.

10 Gas being supplied to the pipes 10 may be refrigerated before being pumped into the continuous pipes 10. For cold transportation, it is preferred that the containers 12 be insulated with insulation 41 applied to all external walls of the containers 12.

15 For use in transporting gas, for example natural gas, from a gas supply point, for example an on shore terminal or an off-shore buoy, to a distant gas distribution facility, for example another on shore terminal or an offshore buoy, a gas supply must first be 20 provided at the gas supply point. For example, gas could be transported to the on-shore or off-shore gas supply point by a pipeline. The gas is then compressed into the continuous pipes 10, and, for example, stacked in a ship 62 as shown in Figs. 6, 7 or 8 through manifolds 25A, 25B and 25C (Fig. 1) at a pressure for example of about 3000 psi. This pressure could be ramped, for example from 800 psi to 25 1500 psi and then from 1500 psi to 3000 psi to make compression more efficient. The continuous pipes 10 are

then transported, for example by the ship 62, to the distant gas distribution facility, where the gas is discharged through the manifolds 25A, 25B and 25C.

Preferably, the gas is discharged at the gas distribution facility in a manner that cools the continuous pipe 10. This may be achieved, for example, by allowing the gas to expand out of the pipes 10, in a rolling procedure in which a first pipe 10 is emptied, initially through the high pressure manifold 25A, then the medium pressure manifold 25B and then the low pressure manifold 25C. When the first pipe 10 is emptying through the medium pressure manifold 25B, the next pipe 10 may be emptied through the high pressure manifold 25B, and so on until all pipes 10 are emptied. The expansion of the gas in the continuous pipes 10 cools the continuous pipe, for example down to 0°F, but not lower than the temperature at which the pipe itself becomes brittle. The cooled pipe may then be transported back to the remote gas supply point to charge the pipes again with gas. Since the pipes are already cooled, a greater weight of gas may be charged while filling the pipes at the gas supply point to a given pressure. For maximal advantage from this manner of operation, the pipes 10, containers 12 and the ship's hold 60 may be covered with insulation 41. Cooling of the continuous pipe 10 may be enhanced by dropping the pressure in a heat exchanger on the deck of the ship against either inert gas which can be circulated through the containers 12 but outside the pipes 10, or medium pressure gas which can

be expanded and circulated through the continuous pipes 10 which already have been emptied. In addition, refrigeration may be used to cool the gas before injection into the continuous pipes 10.

5           Gas in the continuous pipes 10 may be discharged by injecting a non-corrosive non-aqueous incompressible fluid that is not miscible with the gas (for example a liquid hydrocarbon having more than about 7 carbon atoms in the case of natural gas storage and transportation) at one  
10          end of the continuous pipe 10 and forcing gas out of the other end. Such a liquid may be stored in a liquid storage container 80 and forced into the pipes 10 through high and low pressure fluid supply lines 29A and 29B using pump 82. The storage container 80 may be connected via line 81 to  
15          augment the ship's fuel supply (not shown) since after use the fluid will contain dissolved gas which will come out of the solution inside the container 80.

20          In a similar manner, the pipes 10 may be charged by filling the pipe with a high pressure gas at one end from for example the manifold 25A and pushing the incompressible liquid out of the pipes 10 at the other end at a constant pressure. The pushed pressurized liquid may then be passed through an energy removal unit 86 such as a turbine to generate electricity or refrigeration on a line  
25          88 controlled by valve 90 connecting the high and low pressure fluid supply lines 29A and 29B, and then used for filling the next in a series of continuous pipes 10 by injecting it into the bottom of the next pipe. Once filling

of the continuous pipes 10 is completed, the liquid is returned via line 29A and line 84 to the liquid storage container 80. When filling the pipe 10 it is first filled with an incompressible liquid. The continuous outflow of  
5 the incompressible liquid should be regulated with valves, for example valves 31, and the energy removal unit 86 to maintain the incoming gas approximately constant pressure, thus avoiding unnecessary heat gain due to the expansion and recompression of the gas while filling the continuous  
10 pipe 10.

During discharging of the gas at the gas distribution facility, when the gas is first discharged, it may be discharged through the high pressure line 25A to shore (in direction A). End B of the lines 25A, 25B and 25C  
15 may be connected to other containers 12 in other holds of the ship. A part of the high pressure gas in line 25A may be directed through valve 43 and heat exchanger 72 to medium pressure line 25B. The gas adiabatically reduces pressure through the heat exchanger 72 and cools. In  
20 addition, a part of the high pressure gas from line 25A may be recirculated back to the continuous pipes 10 through valve 45, the heat exchanger 72, line 51 and line 29A without a reduction in pressure. However, as the gas directed from the high pressure line 25A to line 25B is  
25 reduced in pressure, with a drop for example in the order of 1500 psi, it cools the gas directed back to the continuous pipes 10 through the heat exchanger 72. This cooling may be substantial, and may cool the gas to -50°F

or lower. As the pressure drops in the pipes, the lines 25A, 25B and 25C may be sequentially selected to discharge the gas from the pipes. After cooling, the ship 62 may return to the gas supply point loading facility for another 5 load of gas, with the pipes 10 remaining cold.

It is expected that by cooling the continuous pipes 10 with cold gas from the heat exchanger 72, the continuous pipes 10 on the return journey will have a temperature in the order of -50°F. After loading the pipes 10 with gas, and returning to the discharge point, the temperature of the gas in the pipes 10 will increase to about 0°F. It is desirable to recover this cold from the gas during discharge of the gas at the gas distribution facility. For that purpose, referring to Fig. 13, as the 15 gas is being discharged from the continuous pipes 10 through lines 25A, 25B or 25C and ship-to-shore connections using on-shore compressors 90 the gas is piped through a heat exchanger 92 against a flow, preferably countercurrent, of a suitable transportable fluid such as sea water. The sea water is pumped through the heat 20 exchanger 92 with for example a pump 94. During discharge of the gas, the sea water is pumped from the sea at 93 through the heat exchanger 92 and line 95 into storage tanks on board the ship, which may for example be insulated 25 ballast tanks 96 located within the double hull or double bottom of the ship. In this way, the sea water is cooled, but not to the point at which ice is formed, and forms a store of high heat capacity cold fluid. During subsequent

filling of the pipes 10 at the loading facility, again using on-shore compressors, the cold sea water may be pumped from the ballast tanks 96 through the heat exchanger 92 and back to the sea, thus cooling any gas flowing 5 through the lines 25A, 25B and 25C into the pipes 10. A ship may carry in the order of 17,000 tons of gas for the loaded voyage to the gas distribution facility, and may carry in its ballast tanks 10,000-15,000 tons of cooled sea water on the return voyage back to the gas supply point.

10 This aspect of the invention may be used particularly advantageously with the continuous pipe coils 10, but may also be used with other gas storage containers, such as straight cylinders as disclosed in our prior patent application. A cold gas storage container in this context 15 means a container whose temperature is below ambient temperatures (the temperature of the air through which the vehicle, for example the ship, moves), but is preferably much lower than ambient temperatures. In addition, where large volumes of gas are being transported by land, the 20 technique may also be used in principle, although the cold storage fluid may, in that instance, be some other fluid such as ordinary water.

25 Ships used for the transport of gas according to this invention should be double hulled and meet all safety requirements for the transportation of hazardous material.

It is expected that, for the transport of natural gas, about 95% of the gas can be discharged while reducing the pressure in the continuous pipes 10 to about 150 psi.

This amount of gas provides a heel or supply of undischarged gas which may be used as fuel for the ship's engines on the next leg of the ship's voyage back to the gas supply point.

5 Any safely transportable gas may be transported with the gas storage device of the invention, such as natural gas, town gas, chlorine, hydrogen, oxygen, nitrogen, argon, ethane and ethylene.

In a further embodiment, the storage device of  
10 the invention may be placed within a barge and moored close by a city together with a compressor and connected to a major gas supply pipeline to provide gas supply during hours of peak demand. During periods of low demand, the storage device may be replenished. The storage device could  
15 also be placed in a building on land or underground to provide a similar function, for example for the storage of natural gas for an electric power plant or town gas for a city. In smaller sizes, the storage device of the invention could be used to store compressed natural gas (CNG) in a  
20 CNG fuelling station for vehicles.

Having now disclosed the invention, it is understood that a person skilled in the art could make modifications to the disclosed invention without departing from the essence of the invention that is covered by the  
25 scope and meaning of the claims that follow.

We Claim:

1. A gas storage device, comprising:  
a container having a base and a containment side  
5 wall; and  
a substantially continuous pipe coiled within  
said container in plural layers, each of said plural layers  
including plural loops of pipe.
- 10 2. The gas storage device as defined in claim 1 in  
which said loops of pipe abut each other.
- 15 3. The gas storage device as defined in claim 2 in  
which said layers of pipe abut each other.
4. The gas storage device as defined in claim 3 in  
which said substantially continuous pipe is coiled within  
said container in a substantially hexagonal cross-sectional  
pattern.
- 20 5. The gas storage device as defined in claim 1 in  
which said container has a substantially central core and  
said substantially continuous pipe is wound about said  
substantially central core.
- 25 6. The gas storage device as defined in claim 5 in  
which said substantially central core has an axis, and said

axis of said substantially central core is substantially horizontal.

7. The gas storage device as defined in claim 5 in  
5 which said substantially central core has an axis, and said  
axis of said substantially central core is substantially  
vertical.

8. The gas storage device as defined in claim 5 in  
10 which each of said layers is formed of a substantially  
continuous spiral of pipe wound in one substantially radial  
direction to form a coil of pipe.

9. The gas storage device as defined in claim 1 in  
15 which said substantially continuous pipe is oriented in  
said container such that fluid drains to one end of said  
substantially continuous pipe.

10. The gas storage device as defined in claim 1 in  
20 which each of said loops of pipe are formed in a series of  
substantially U-shaped connections.

11. The gas storage device as defined in claim 10 in  
25 which each of said layers is formed of a series of  
connected substantially U-shaped sections, each of said  
connected substantially U-shaped sections having a bend  
between straight sections.

12. The gas storage device as defined in claim 10 in which said substantially continuous pipe has an outer diameter that is narrower at the bend than at the straight sections.

5

13. The gas storage device as defined in claim 1 further including plural containers, each of said plural containers including a base and a containment side wall, and wherein said substantially continuous pipe is distributed within each of said plural containers in plural layers, each of said plural layers including plural loops of pipe.

14. The gas storage device as defined in claim 13 in which each of said plural containers are stacked upon each other such that said containment side walls of said containers that are lower than other of said containers support the weight of the other containers.

20 15. The gas storage device as defined in claim 14 in which said containers are located in a hold of a ship.

16. The gas storage device as defined in claim 15 in which said substantially continuous pipes are connected 25 together serially.

17. The gas storage device as defined in claim 13 in which said containers are located in a hold of a ship.

18. The gas storage device as defined in claim 1 in which each container is sealable and means are provided to circulate an inert gas within said container.

5 19. The gas storage device as defined in claim 1 in which said container is a hold of a ship.

10 20. The gas storage device as defined in claim 1 in which said containment side wall is impervious to fluid stored in said substantially continuous pipe.

15 21. The gas storage device as defined in claim 1 in which said substantially continuous pipe is coiled within said container in a supporting matrix.

22. The gas storage device as defined in claim 21 in which said supporting matrix is a liquid.

20 23. The gas storage device as defined in claim 1 in which said substantially continuous pipe has an external diameter of less than 10 inches.

25 24. The gas storage device as defined in claim 23 in which said substantially continuous pipe has an external diameter of greater than 1 inch.

25. The gas storage device as defined in claim 1 in which said container is sealed and includes:

a rupture device; and

a duct to convey fluid escaping from container through said rupture device.

5 26. The gas storage device as defined in claim 1 in which the gas storage device is housed in a building on land to supply gas to vehicles.

27. A gas storage device, comprising:

10 a support;

a substantially continuous pipe distributed about said support in plural layers, each of said plural layers including plural loops of substantially continuous pipe;

15 said substantially continuous pipe having first and second ends, one of said first and second ends including a valve; and

gas stored under pressure within said substantially continuous pipe.

20 28. A method of transporting gas to a gas distribution facility, said method comprising the steps of:

obtaining a supply of gas at a gas supply point remote from the gas distribution facility;

25 injecting the gas into a substantially continuous pipe bent to form plural layers, each of said plural layers including plural loops of pipe;

transporting said substantially continuous pipe along with the gas to the gas distribution facility; and

discharging the gas at the gas distribution facility.

29. The method as defined in claim 28 in which said substantially continuous pipe is transported in a hold of a ship.

30. The method as defined in claim 28 further including the steps of:

10 discharging the gas at the gas distribution facility in a manner that cools said substantially continuous pipe; and

returning said cooled substantially continuous pipe to a gas supply point.

15

31. The method as defined in claim 30 in which discharging the gas at the gas distribution facility further includes the steps of:

20 adiabatically reducing pressure of the gas in a heat exchanger;

cooling a fluid passing through said heat exchanger; and

circulating said cooled fluid into said substantially continuous pipes.

25

32. The method as defined in claim 29 in which discharging the gas at the gas distribution facility further includes the steps of:

cooling a storable fluid with the gas; and  
storing said storable fluid on board the ship.

33. The method as defined in claim 32 in which  
5 cooling said storable fluid further includes the step of:  
piping the gas through a heat exchanger against  
a flow of said storable fluid to cool said storable fluid.

34. The method as defined in claim 32 further  
10 including the steps of:

returning said substantially continuous pipes and  
said cooled storable fluid to a gas supply point;  
cooling the gas obtained at the gas supply point  
with said cooled storable fluid;  
15 re-filling said substantially continuous pipes  
with gas.

35. A method of storing gas comprising the steps of:  
supplying gas when demand for the gas is low into  
20 a substantially continuous pipe bent to form plural layers,  
each of said plural layers including plural loops of pipe;  
storing the gas in said substantially continuous  
pipe; and

discharging the gas from said substantially  
25 continuous pipe when demand for the gas is high.

36. The method as defined in claim 35 in which said substantially continuous pipe is enclosed in a sealed container.

5 37. The method as defined in claim 35 in which the gas is stored in plural substantially continuous pipes, each substantially continuous pipe being bent to form plural layers, each of said plural layers including plural loops of pipe, and each substantially continuous pipe is  
10 enclosed in a sealed container.

38. The method as defined in claim 37 in which said substantially continuous pipes are charged serially.

15 39. A method of transporting gas to a gas distribution facility, said method comprising the steps of:  
obtaining a supply of gas at a gas supply point remote from the gas distribution facility;  
transporting the gas to the gas distribution  
20 facility in cold gas storage containers;  
discharging the gas at the gas distribution facility while conserving said cold of said gas storage containers; and  
returning said cold gas storage containers to  
25 said gas supply point.

40. The method as defined in claim 39 in which said cold storage containers are transported in a hold of a ship.

5 41. The method as defined in claim 40 in which discharging the gas at the gas distribution facility further includes the steps of:

adiabatically reducing pressure of the gas in a heat exchanger;

10 cooling a fluid passing through said heat exchanger; and

circulating said cooled fluid into said gas storage containers.

15 42. The method as defined in claim 40 in which discharging the gas at the gas distribution facility further includes the steps of:

cooling a storable fluid using the gas; and

20 storing said cooled storable fluid on board the ship.

43. The method as defined in claim 42 in which cooling said storable fluid further includes the step of:

25 piping the gas through a heat exchanger against a flow of said storable fluid to cool said storable fluid.

44. The method as defined in claim 42 further including the steps of:

returning said gas storage containers and said cooled storable fluid to a gas supply point;

re-filling said gas storage containers with gas;  
and

5 cooling the gas with said cooled storable fluid.

45. A gas storage device, comprising:

a container having a base and a containment side wall; and

10 a substantially continuous pipe coiled within said container.

46. The gas storage device as defined in claim 45 in which said substantially continuous pipe is coiled to fill 15 at least 78% of the space within said container.

47. The gas storage device as defined in claim 45 in which said substantially continuous pipe is coiled in layers.

20

48. The gas storage device as defined in claim 47 in which said layers of substantially continuous pipe abut each other.

25

49. The gas storage device as defined in claim 45 in which said substantially continuous pipe is coiled within said container in a substantially hexagonal cross-sectional pattern.

50. The gas storage device as defined in claim 45 in which said container has a substantially central core and said substantially continuous pipe is wound about said substantially central core.

5

51. The gas storage device as defined in claim 50 in which said substantially central core has an axis, and said axis of said substantially central core is substantially horizontal.

10

52. The gas storage device as defined in claim 50 in which said substantially central core has an axis, and said axis of said substantially central core is substantially vertical.

15

53. The gas storage device as defined in claim 47 in which each of said layers is formed of a substantially continuous spiral of pipe wound in one substantially radial direction to form a coil of pipe.

20

54. The gas storage device as defined in claim 45 in which said substantially continuous pipe is oriented in said container such that fluid drains to one end of said substantially continuous pipe.

25

55. The gas storage device as defined in claim 47 in which said substantially continuous pipe is coiled to form

loops and said loops of pipe are formed in a series of substantially U-shaped connections.

56. The gas storage device as defined in claim 55 in which each of said layers is formed of a series of substantially U-shaped connected sections, each of said substantially U-shaped connected sections having a bend between straight sections.

10 57. The gas storage device as defined in claim 55 in which said substantially continuous pipe has an outer diameter that is narrower at said bend than at said straight sections.

15 58. The gas storage device as defined in claim 45 further including plural containers, each of said plural containers including a base and a containment side wall wherein said substantially continuous pipe is packed within each of said plural containers.

20 59. The gas storage device as defined in claim 58 in which said plural containers are stacked upon each other such that said containment side walls of said containers that are lower than other of said containers support the weight of the other of said containers.

25 60. The gas storage device as defined in claim 59 in which said containers are located in a hold of a ship.

61. The gas storage device as defined in claim 60 in which said substantially continuous pipes are connected together serially.

5 62. The gas storage device as defined in claim 59 in which said containers are located in a hold of a ship.

10 63. The gas storage device as defined in claim 59 in which each of said containers is sealable and means are provided to circulate an inert gas within each of said containers.

64. The gas storage device as defined in claim 45 in which said container is a hold of a ship.

15 65. The gas storage device as defined in claim 45 in which said containment side wall is impervious to fluid stored in said substantially continuous pipe.

20 66. The gas storage device as defined in claim 45 in which said substantially continuous pipe is coiled within said container in a supporting matrix.

25 67. The gas storage device as defined in claim 66 in which said supporting matrix is a liquid.

68. The gas storage device as defined in claim 45 in which said substantially continuous pipe has an external diameter of less than 10 inches.

5 69. The gas storage device as defined in claim 68 in which said substantially continuous pipe has an external diameter of greater than 1 inch.

70. The gas storage device as defined in claim 45 in  
10 which said container is sealed and includes:

    a rupture device; and  
    a duct to convey fluid escaping from said container through said rupture device.

15 71. The gas storage device as defined in claim 45 in which the gas storage device is housed in a building on land to supply gas to vehicles.

72. A gas transport ship comprising:  
20      at least one hold having a base and a containment side wall; and

    a substantially continuous pipe coiled within said at least one hold in plural layers, each of said plural layers including plural loops of pipe.

25

73. The gas transport ship as defined in claim 72 in which said substantially continuous pipe is coiled with

said at least one hold in a substantially hexagonal cross-sectional pattern.

74. The gas transport ship as defined in claim 72 in  
5 which said substantially continuous pipe is oriented in  
said at least one hold such that fluid drains to one end of  
said substantially continuous pipe.

75. The gas transport ship as defined in claim 72 in  
10 which said containment side wall is impervious to fluid  
stored in said substantially continuous pipe.

76. The gas transport ship as defined in claim 72 in  
which the substantially continuous pipe is coiled within  
15 said at least one hold in a supporting matrix.

77. The gas transport ship as defined in claim 72 in  
which said at least one hold is sealed and includes:  
a rupture device; and  
20 a duct to convey fluid escaping from said container  
through said rupture device.

78. A gas transport ship comprising:  
at least one hold constructed and arranged to contain  
25 a plurality of gas storage devices;  
each of said gas storage devices including:  
a container having a base and a containment side  
wall; and

a substantially continuous pipe coiled within said container in plural layers, each of said plural layers including plural loops of pipe.

5 79. The gas transport ship as defined in claim 78 in which each of said plural gas storage devices are stacked upon each other such that said containment side walls of said containers that are lower than other of said containers support the weight of the other containers.

10

80. The gas transport ship as defined in claim 78 in which each of said plural gas storage devices is sealable and means are provided to circulate an inert gas within said containers.

15

81. A method of supplying gas to a gas distribution facility comprising the steps of:

conducting the gas from a gas well to a gas supply point;

20 obtaining a supply of gas at said gas supply point, said gas supply point being at a location remote from the gas distribution facility;

cooling and compressing the gas at said gas supply point;

25 injecting said cooled and compressed gas into a substantially continuous pipe bent to form plural layers, each of said plural layers including plural loops of pipe;

transporting said cooled and compressed gas in said substantially continuous pipe to the gas distribution facility; and

5 discharging said cooled and compressed gas at the gas distribution facility.

82. The method as defined in claim 81 wherein the substantially continuous pipe is contained within the hold of a ship.

10

83. A method of supplying gas to users comprising the steps of:

conducting the gas from a gas well to a gas supply point;

15 obtaining a supply of gas at said gas supply point, said gas supply point being at a location remote from the users;

cooling and compressing the gas at said gas supply point;


20 injecting said cooled and compressed gas into a substantially continuous pipe bent to form plural layers, each of said plural layers including plural loops of pipe;

25 transporting said cooled and compressed gas in said substantially continuous pipe to a gas distribution facility;

discharging said cooled and compressed gas at said gas distribution facility;

conducting the gas from said gas distribution facility to the users.

84. The method as defined in claim 83 wherein the 5 substantially continuous pipe is contained within the hold of a ship.

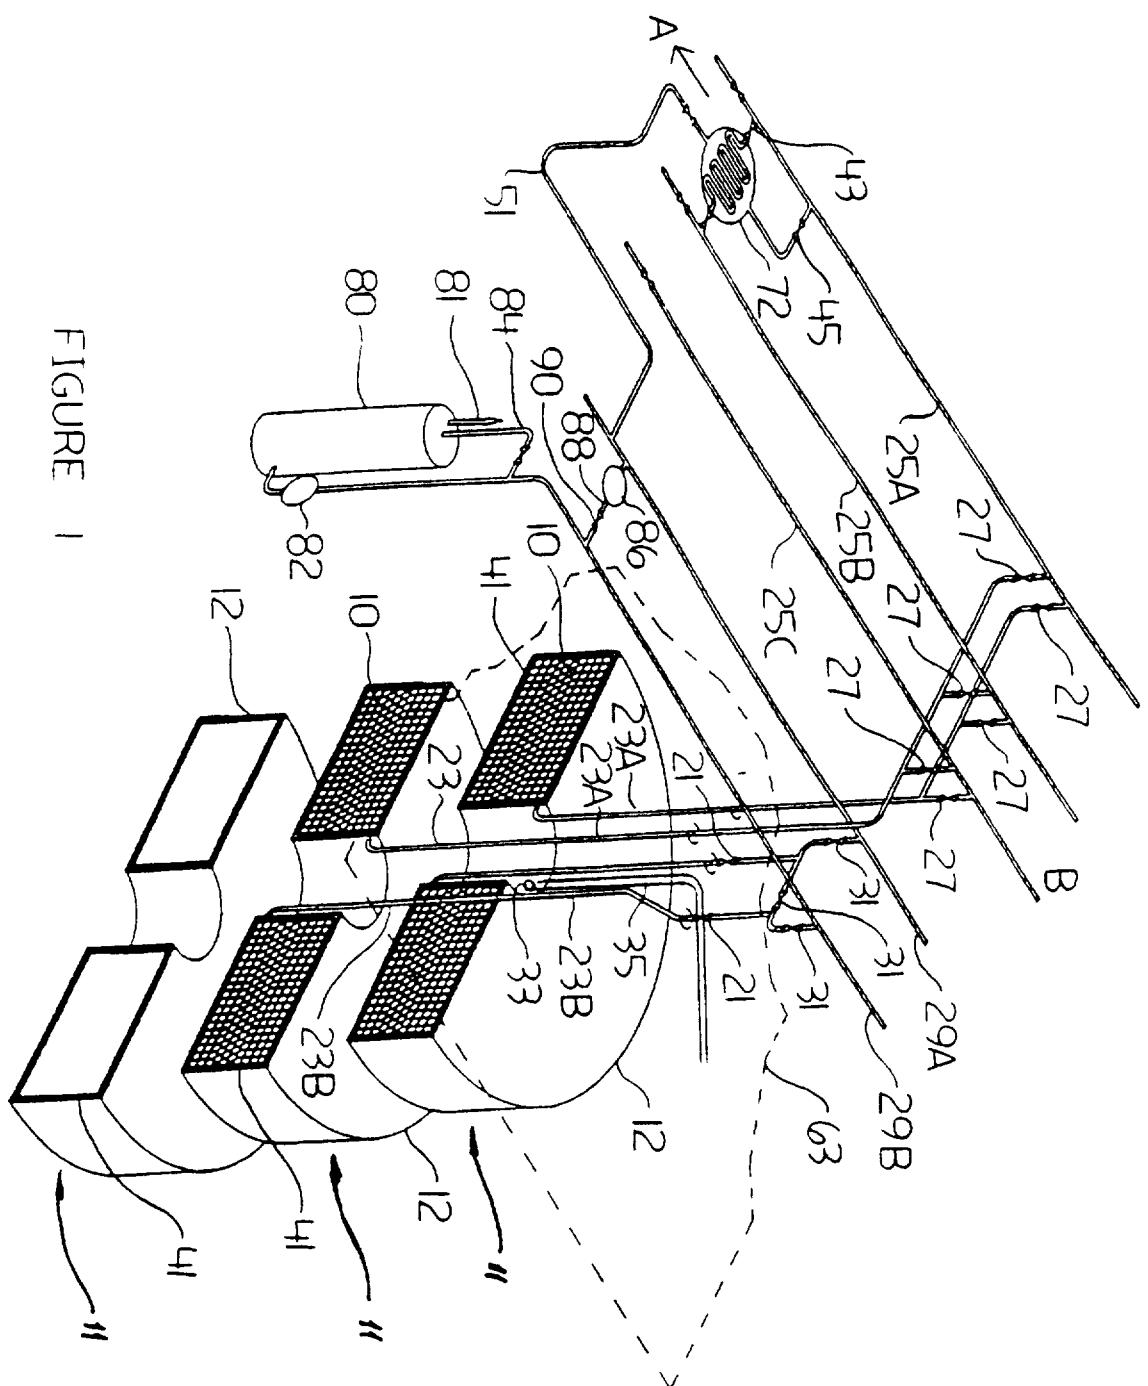

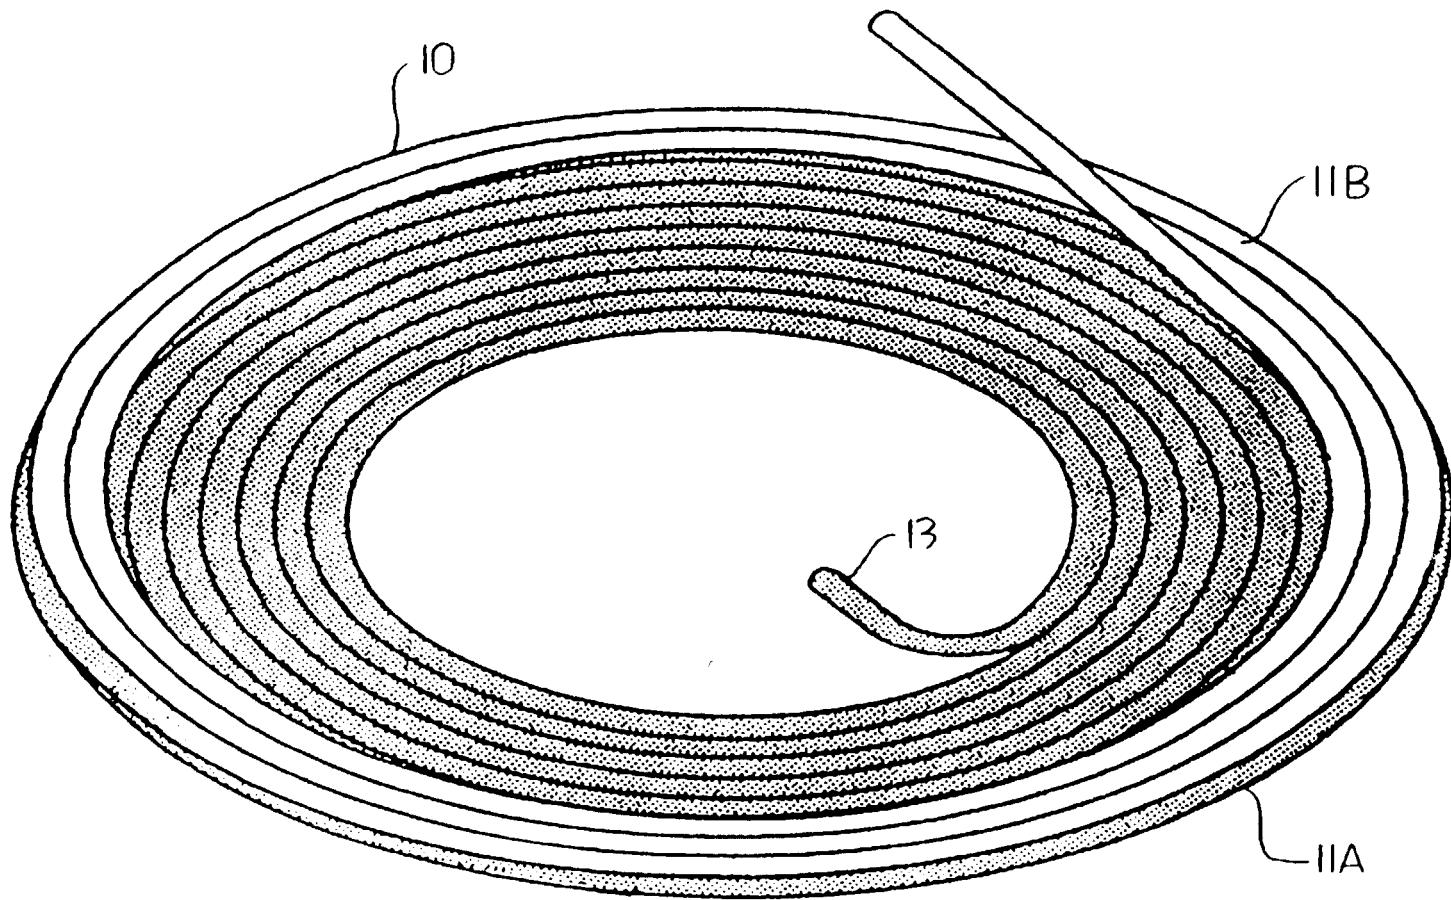


FIGURE 2A

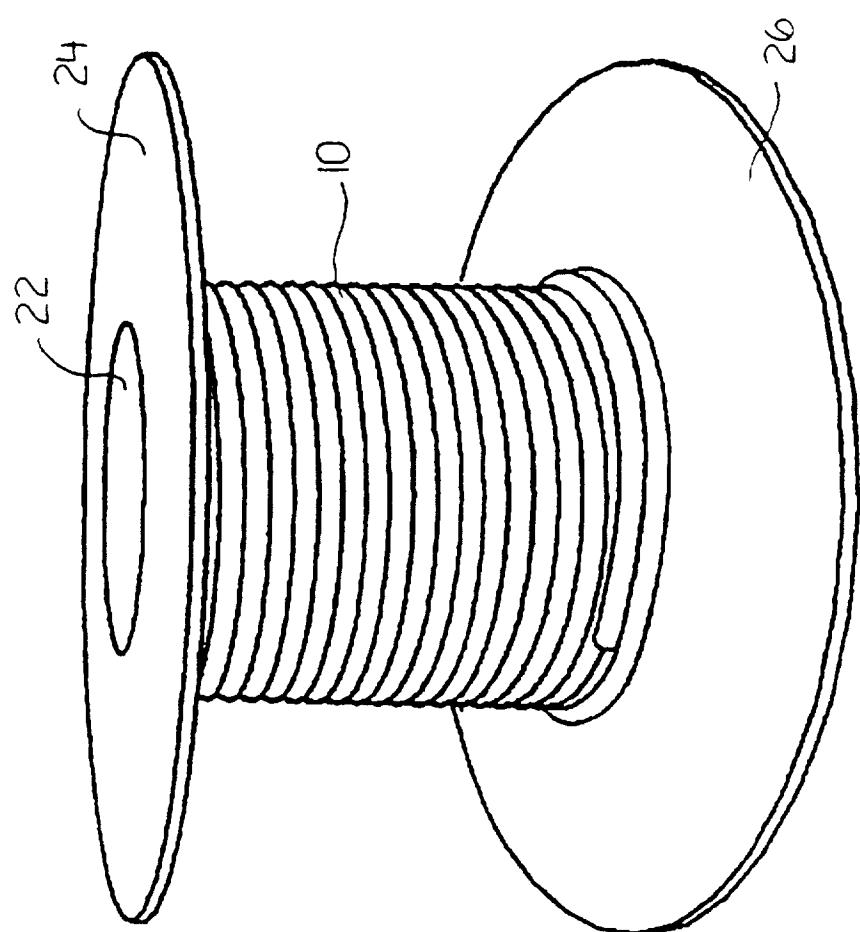


FIGURE 2B

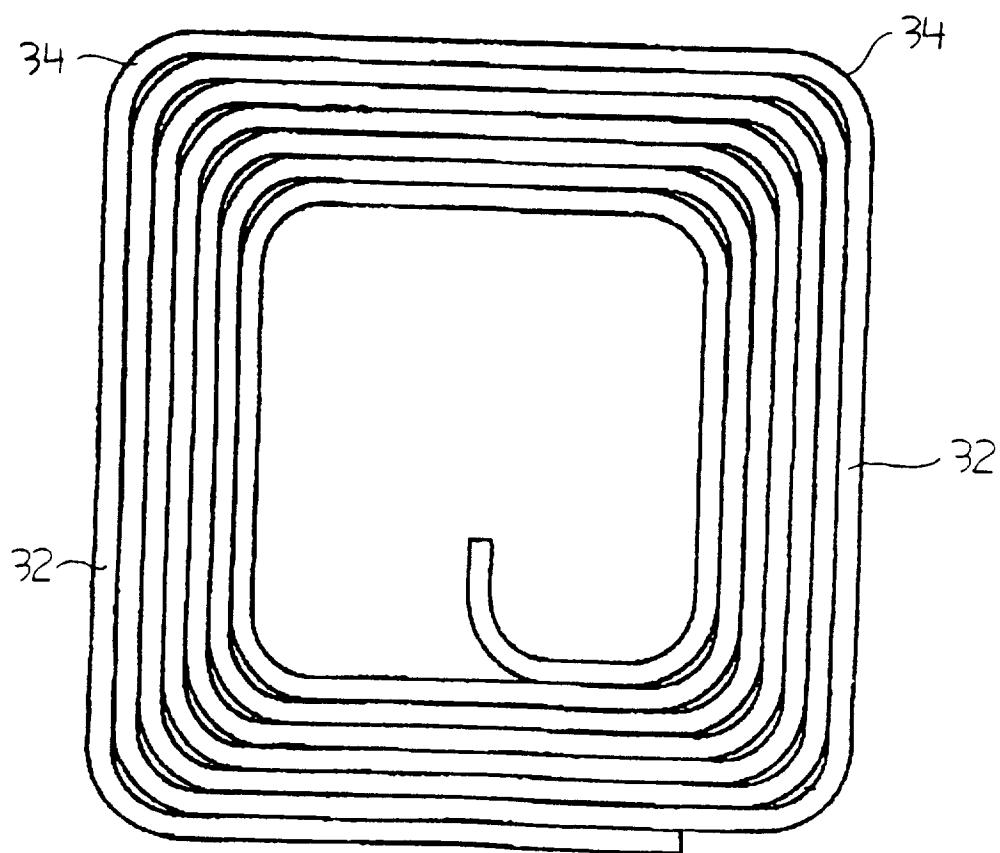
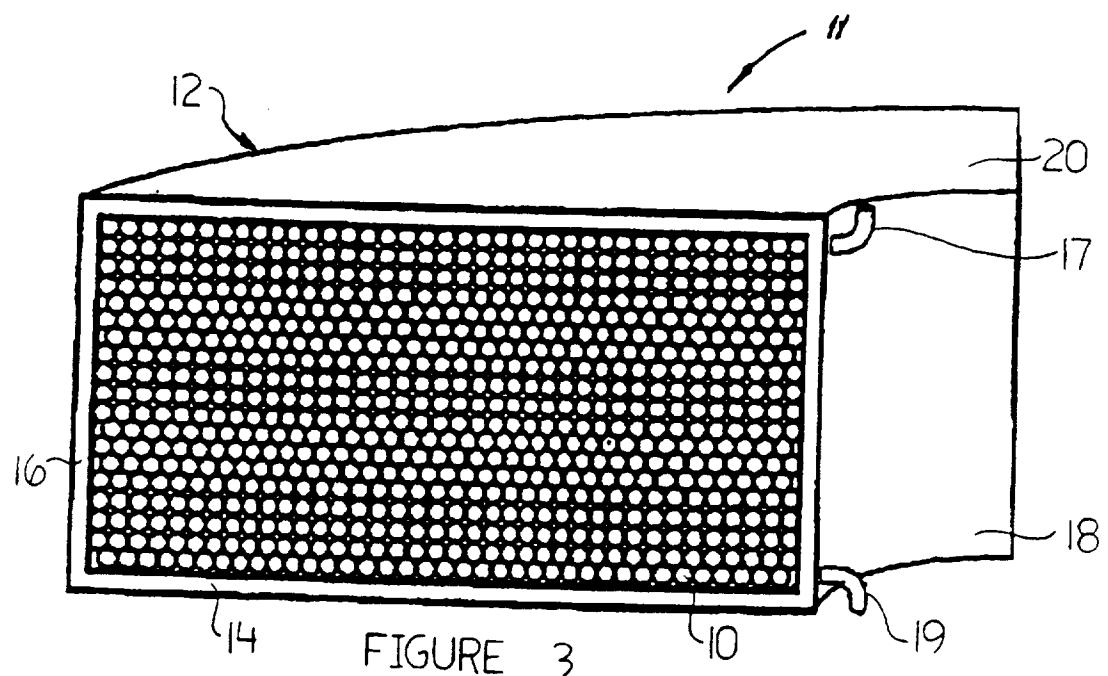


FIGURE 4

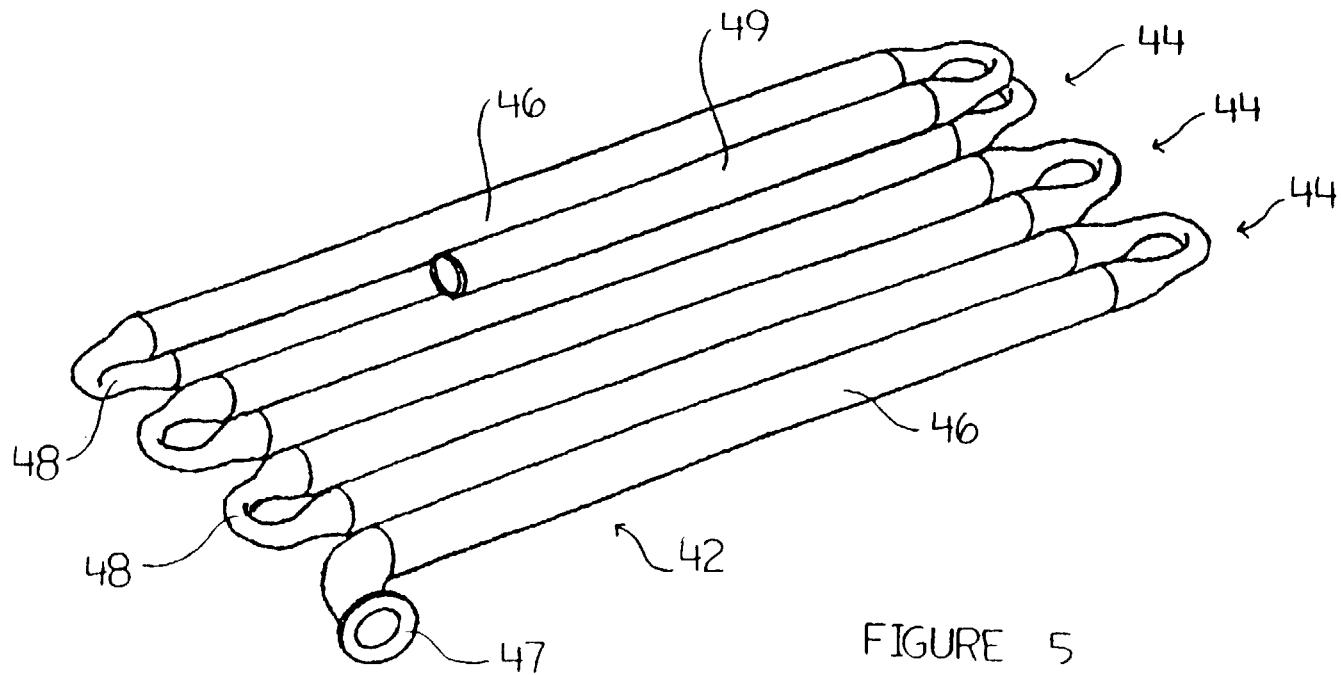


FIGURE 5

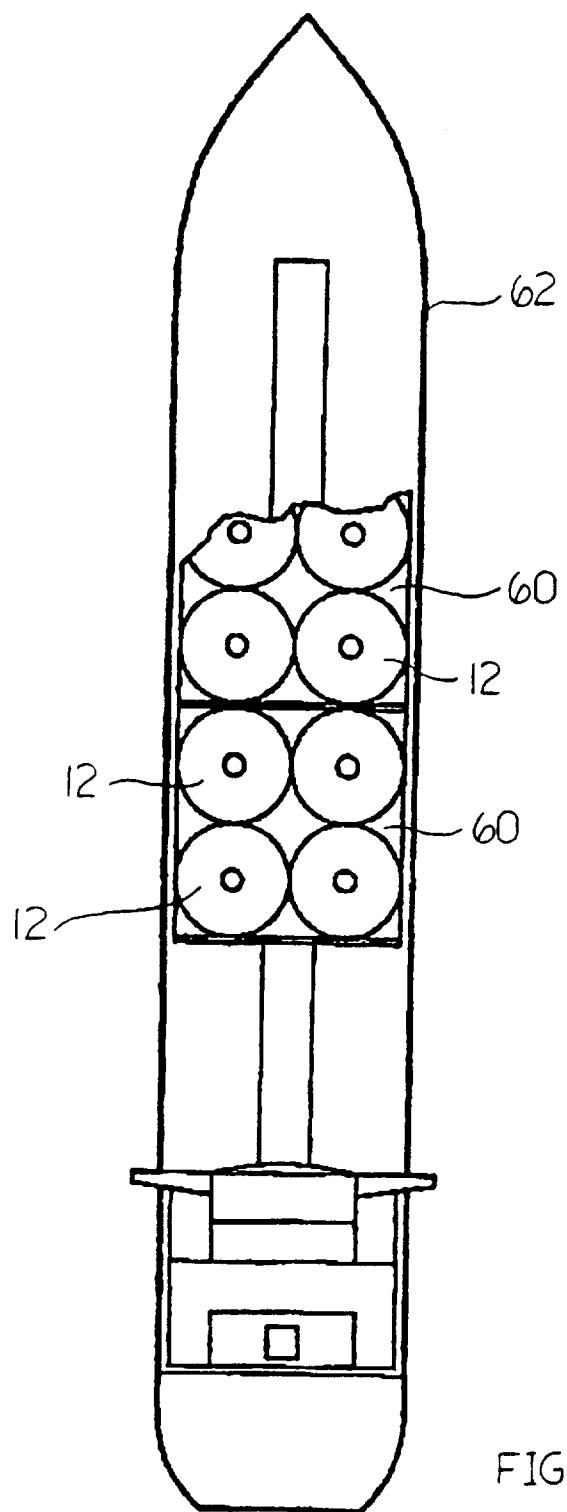


FIGURE 6

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/17484

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :B63B 25/00

US CL :114/72

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 114/72

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2,720,082 A (BRANDON) 11 October 1955, entire document.	1-3,5,7-10, 18-24,27,45-48,50,52-55, 64-70,72, 74-77
---		-----
Y		6, 35-37,51
A	US 4,873,828 A (LAING et al) 17 October 1989.	NONE
A	US 4,446,804 A (KRISTIANSEN et al) 08 May 1984.	NONE

 Further documents are listed in the continuation of Box C.  See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance		
"B" earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search	Date of mailing of the international search report
20 NOVEMBER 1997	18 DEC 1997

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer STEPHEN AVILA Telephone No. (703) 308-2578
---	---