




(86) **Date de dépôt PCT/PCT Filing Date:** 2008/01/10
(87) **Date publication PCT/PCT Publication Date:** 2008/07/31
(45) **Date de délivrance/Issue Date:** 2015/09/01
(85) **Entrée phase nationale/National Entry:** 2009/07/06
(86) **N° demande PCT/PCT Application No.:** US 2008/050692
(87) **N° publication PCT/PCT Publication No.:** 2008/091735
(30) **Priorité/Priority:** 2007/01/23 (US11/626,191)

(51) **Cl.Int./Int.Cl. H05H 1/34** (2006.01)
(72) **Inventeurs/Inventors:**
LINDSAY, JON W., US;
BARTLETT, BRENT R., US;
BRANDT, AARON D., US;
DUAN, ZHENG, US;
LIEBOLD, STEPHEN M., US
(73) **Propriétaire/Owner:**
HYPERTHERM, INC., US
(74) **Agent:** RICHES, MCKENZIE & HERBERT LLP

(54) **Titre : PARTIES DE COMPOSANT CONSOMMABLE POUR UNE TORCHE AU PLASMA**
(54) **Title: CONSUMABLE COMPONENT PARTS FOR A PLASMA TORCH**

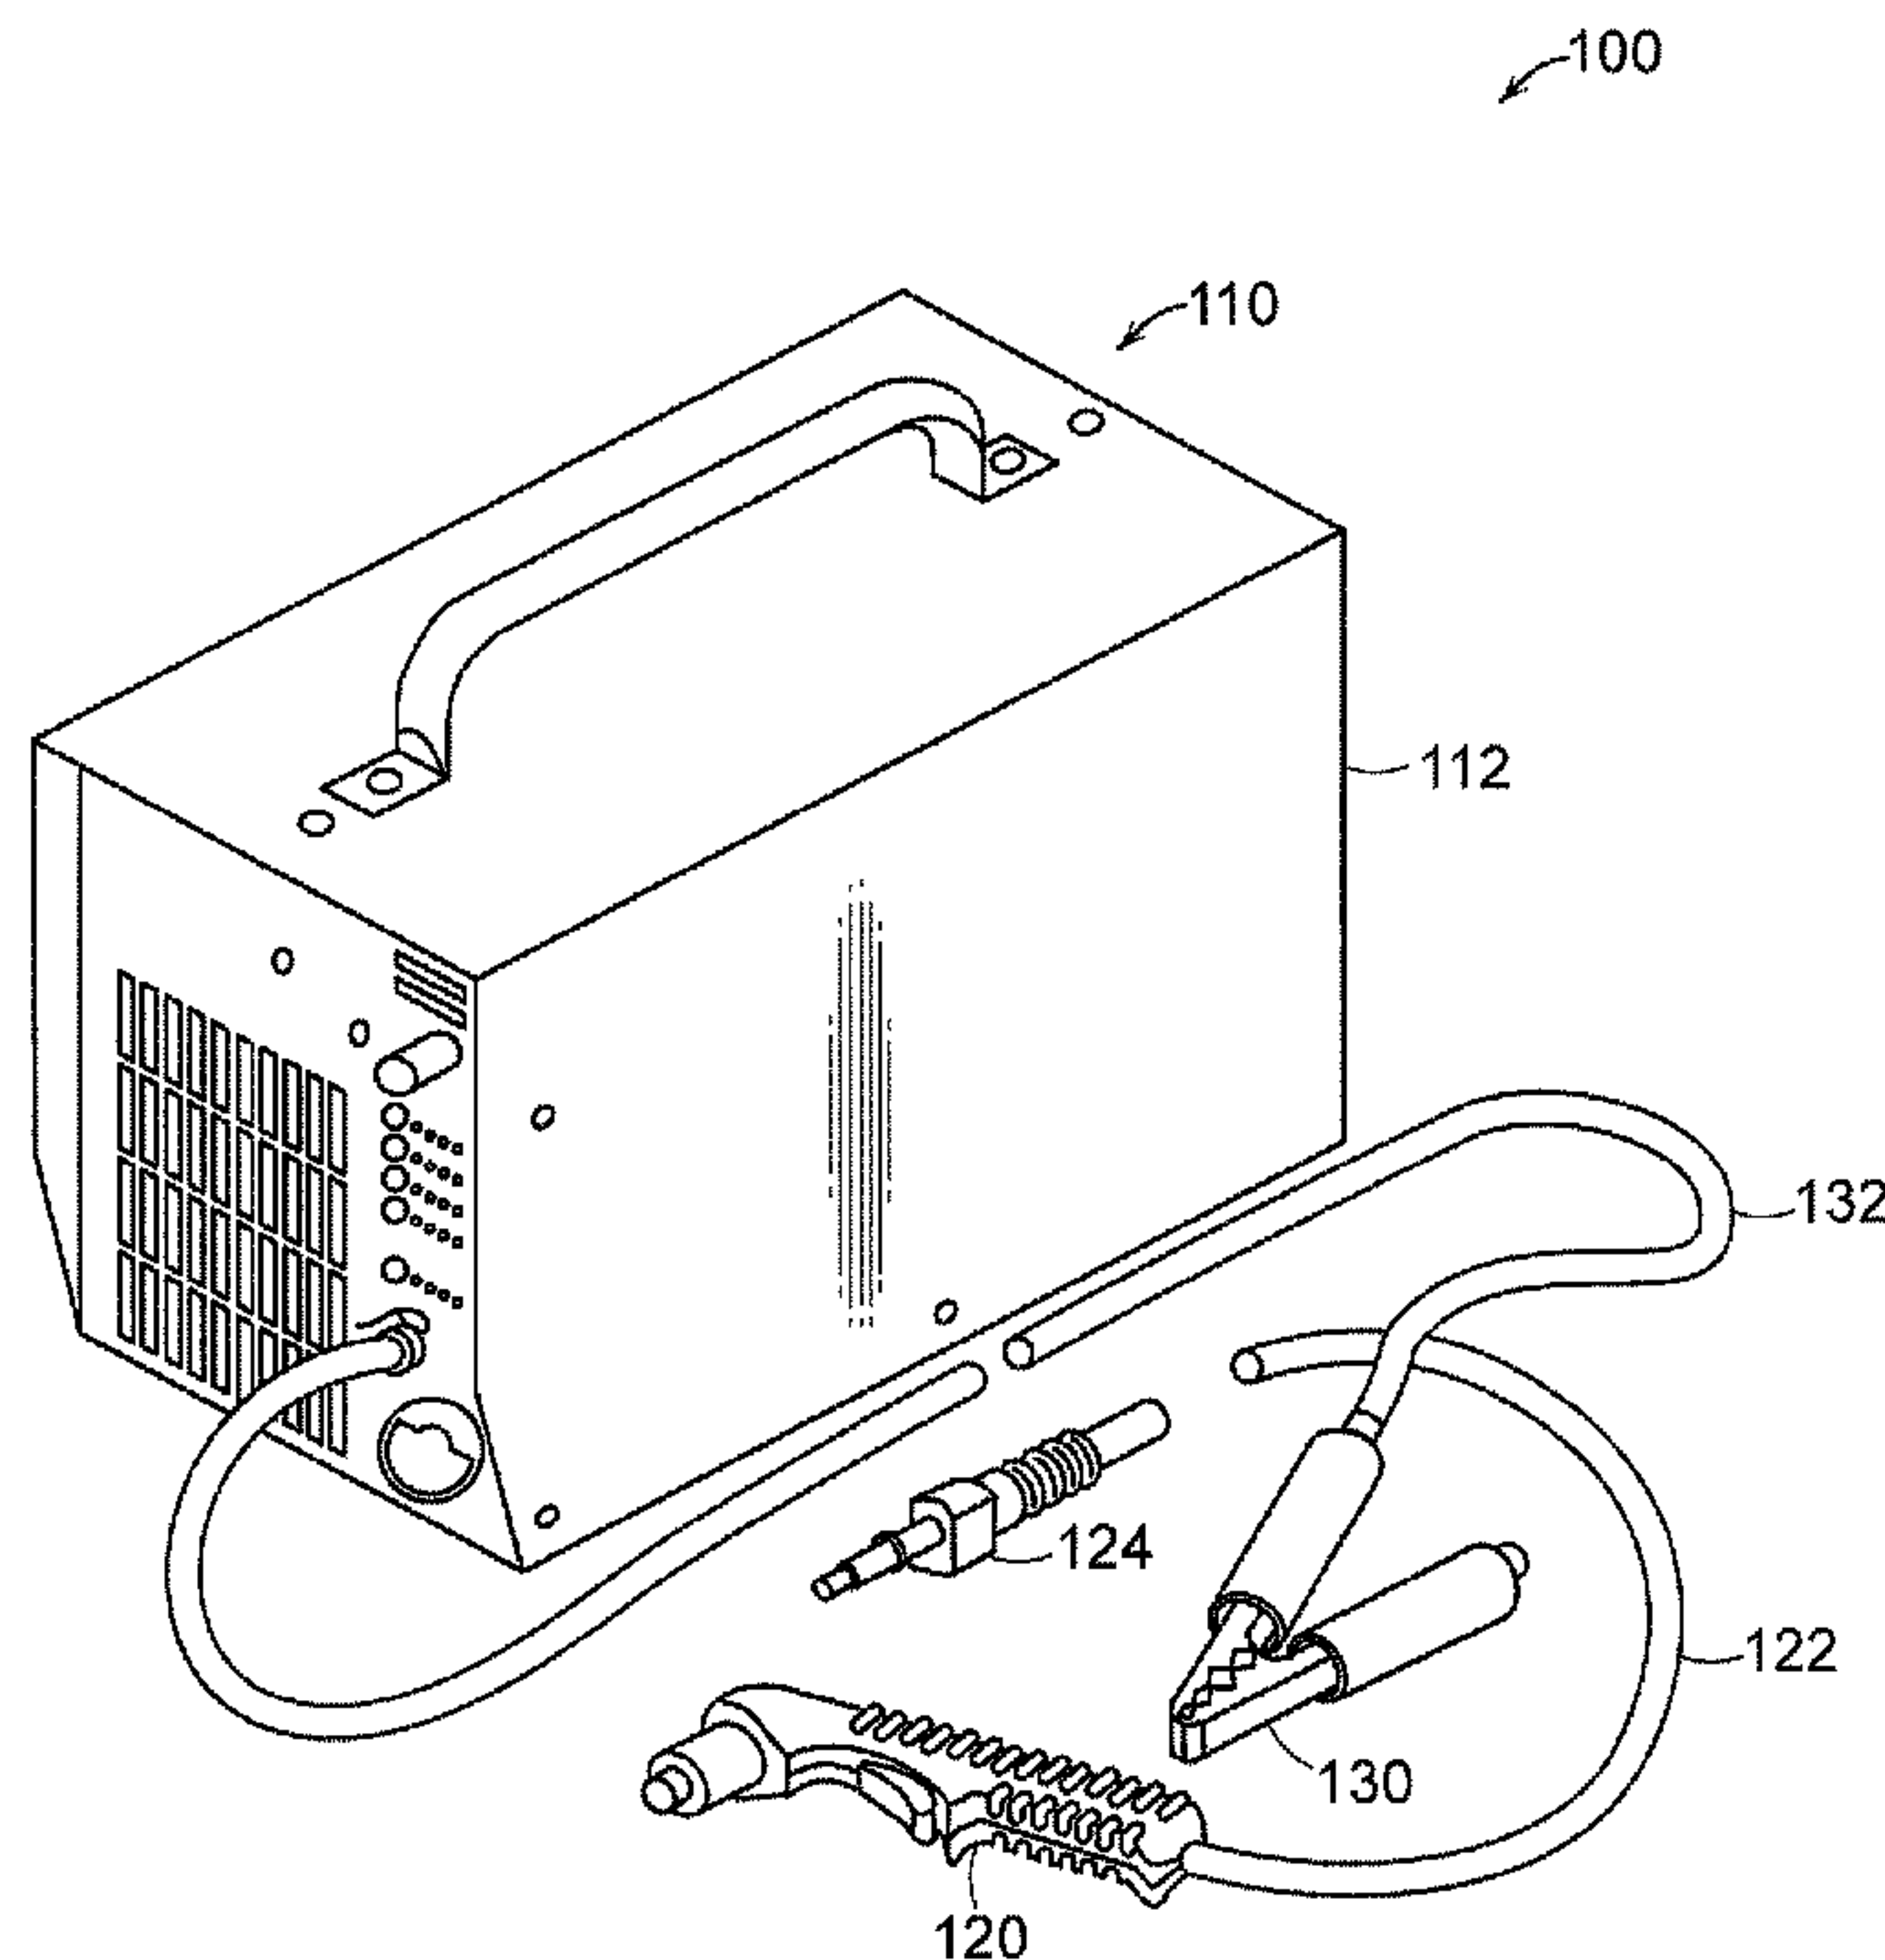

(57) **Abrégé/Abstract:**

A component for a plasma arc torch includes a body portion, a tapered surface on the body portion, the tapered surface including a compressible member that provides a disengagement force relative to the body portion, and an axially disposed surface on the body portion for coupling a mating surface on an adjacent structure of the torch. The component can be a nozzle and/or an electrode.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
31 July 2008 (31.07.2008)

PCT

(10) International Publication Number
WO 2008/091735 A1(51) International Patent Classification:
H05H 1/34 (2006.01)(21) International Application Number:
PCT/US2008/050692

(22) International Filing Date: 10 January 2008 (10.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/626,191 23 January 2007 (23.01.2007) US(71) Applicant (for all designated States except US): **HY-PERTHERM, INC.** [US/US]; Etna Road, P.o. Box 5010, Hanover, NH 03755 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LINDSAY, Jon, W.** [US/US]; Meadowbrook Village, Bldg.2, Apt.8, West Lebanon, NH 03784 (US). **BARTLETT, Brent, R.** [US/US]; 1147 Wrights Mountain Road, Bradford, VT 05033 (US). **BRANDT, Aaron, D.** [US/US]; 3 Tenley Drive, West Lebanon, NH 03784 (US). **DUAN, Zheng** [CN/US]; 15 Carriage Lane, Hanover, NH 03755 (US).**LIEBOLD, Stephen, M.** [US/US]; P.o. Box 1688, Grantham, NH 03753 (US).(74) Agent: **MARAIA, Joseph, M.**; Proskauer Rose LLP, One International Place, Boston, MA 02110 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONSUMABLE COMPONENT PARTS FOR A PLASMA TORCH

FIG. 3A

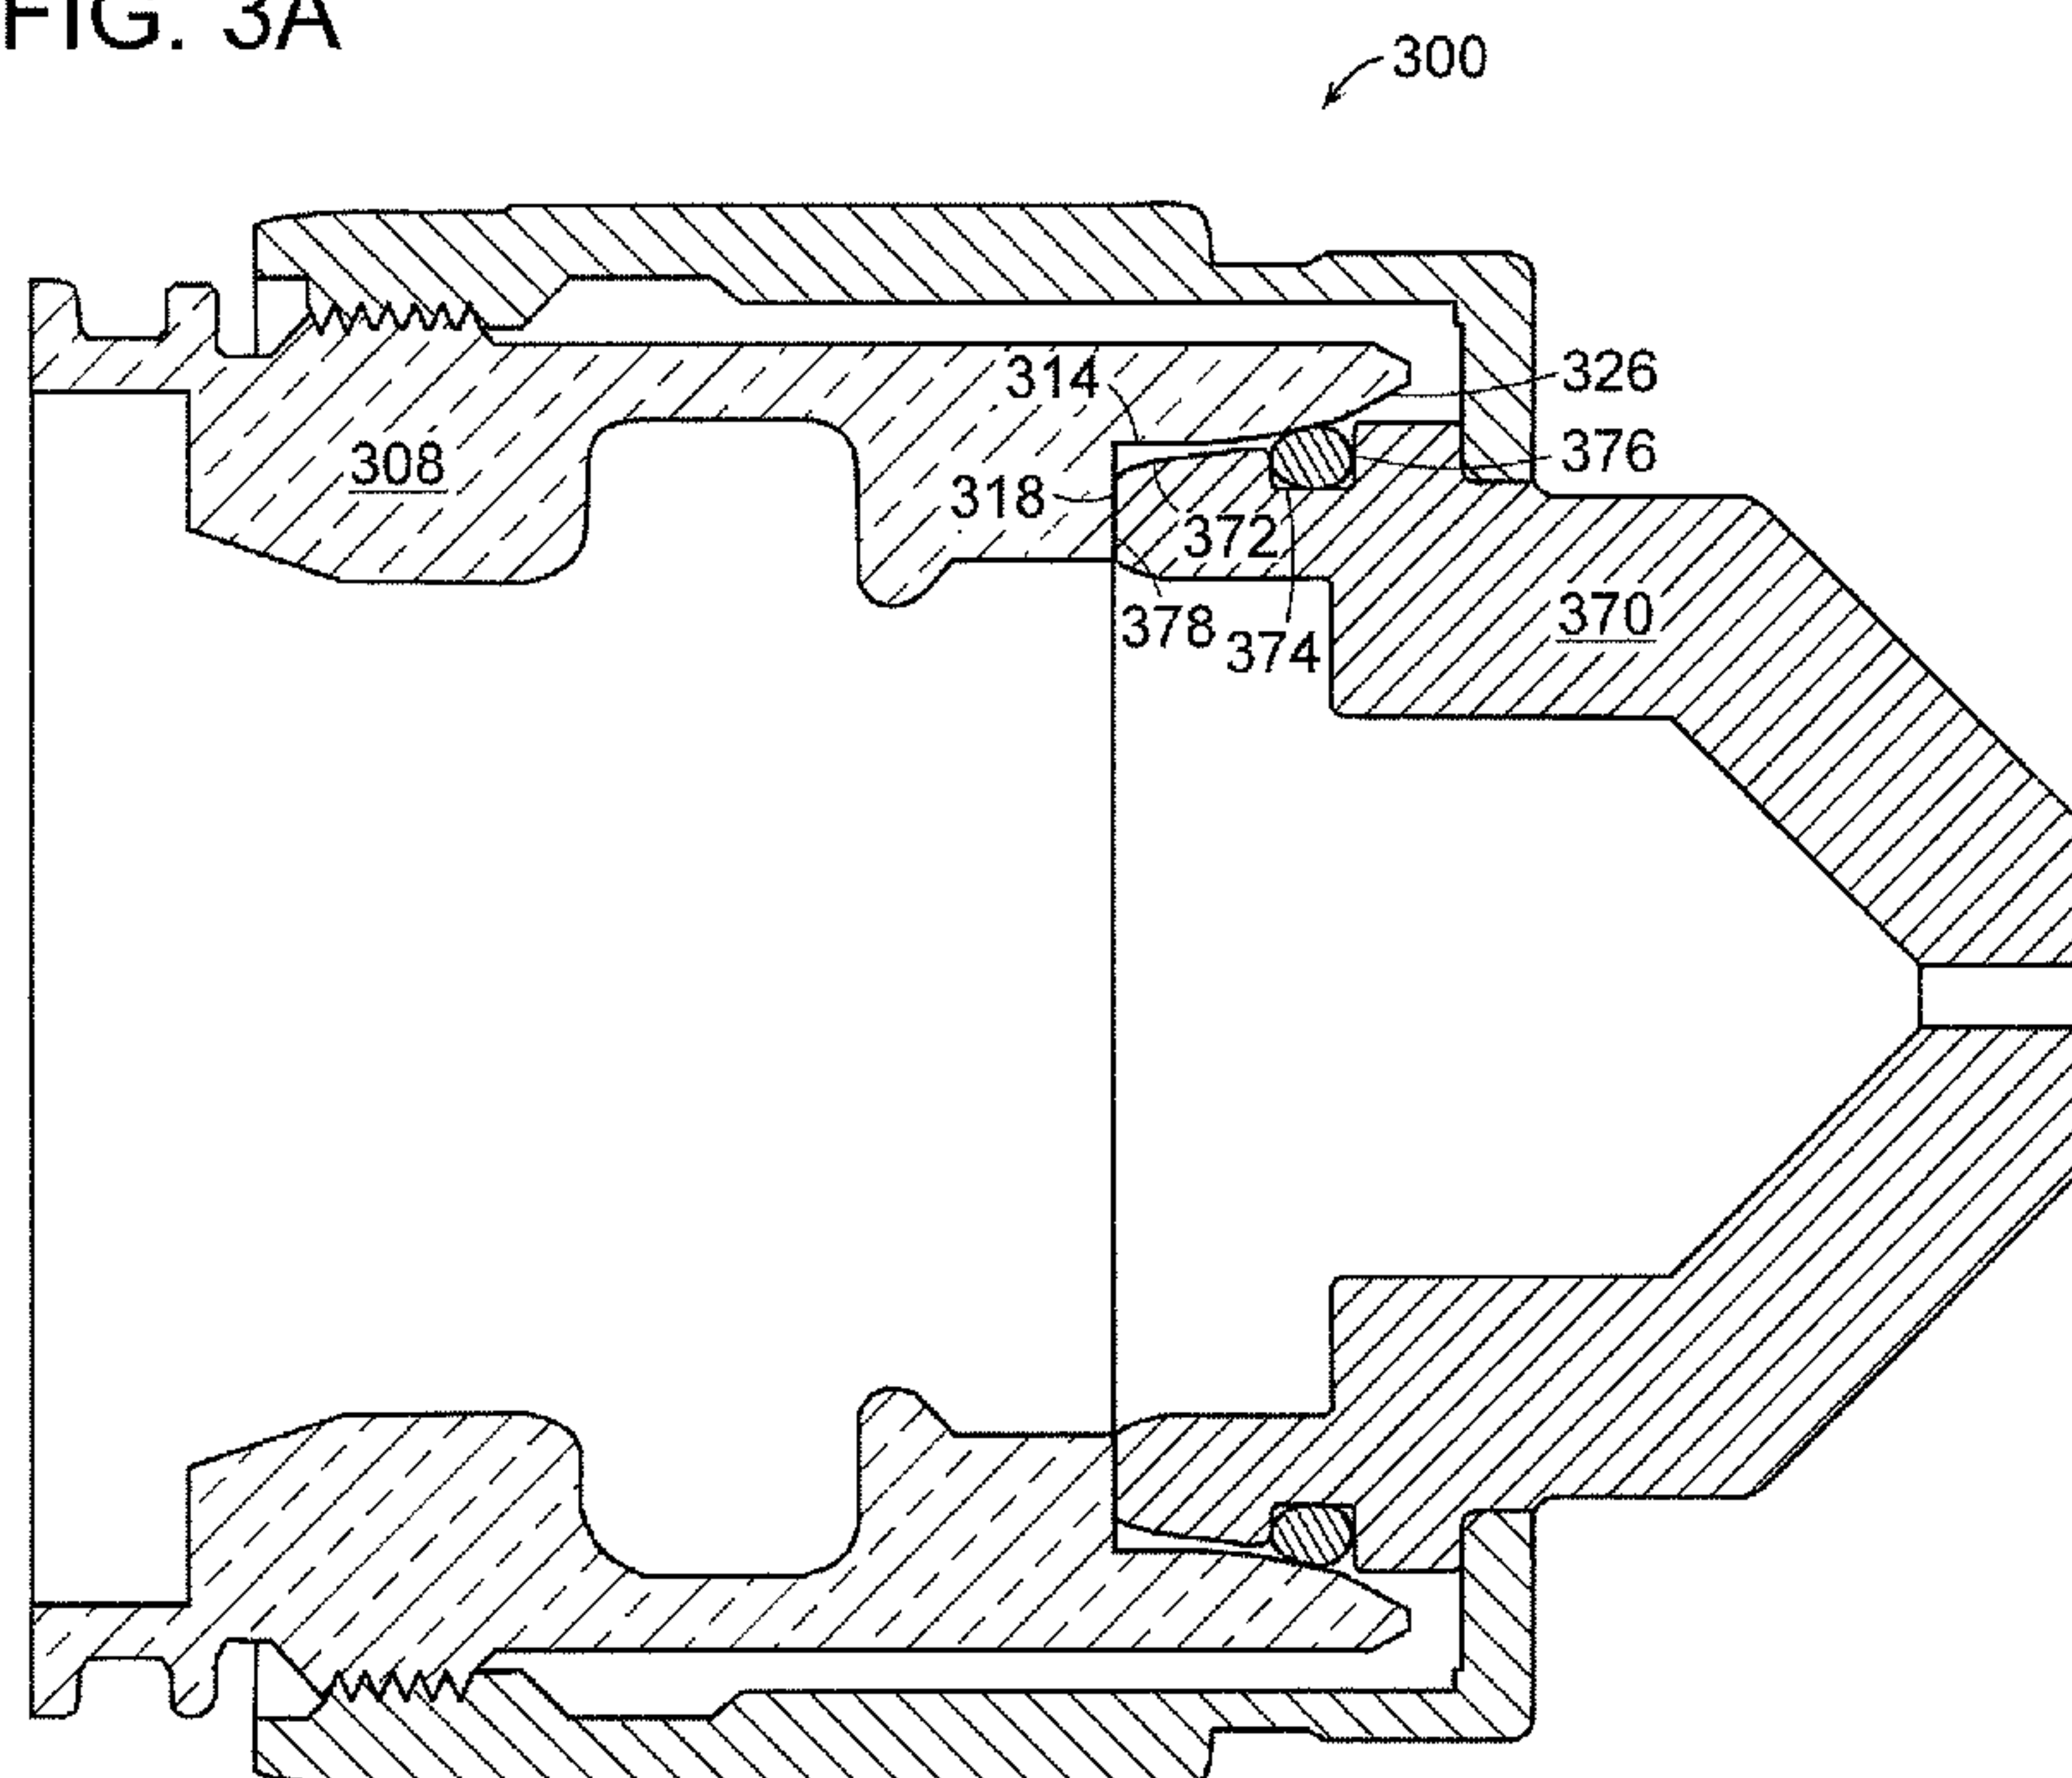

(57) Abstract: A component for a plasma arc torch includes a body portion, a tapered surface on the body portion, the tapered surface including a compressible member that provides a disengagement force relative to the body portion, and an axially disposed surface on the body portion for coupling a mating surface on an adjacent structure of the torch. The component can be a nozzle and/or an electrode.

WO 2008/091735 A1

WO 2008/091735 A1



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

CONSUMABLE COMPONENT PARTS FOR A PLASMA TORCH

BACKGROUND

Plasma arc torches are widely used in the cutting, welding, and heat treating of metallic materials. A plasma arc torch generally includes a cathode block with an electrode mounted
5 therein, a nozzle with a central exit orifice mounted within a torch body, electrical connections, passages for cooling and arc control fluids, a swirl ring to control fluid flow patterns in the plasma chamber formed between the electrode and nozzle, and a power supply. Sustaining a plasma arc causes the electrode, nozzle, swirl ring, and shield to wear requiring routine replacement; as such, the component parts are known as “consumables”.

10 Gas cooled plasma cutting torches exist which allow the consumable component parts to be changed without requiring tools. However, these gas cooled torches commonly use the same fluid (e.g. air) to support the cutting process and to cool the torch. Because only a single gas is used in such torches, there is less of a need to segregate the different gases between the various torch components (through the use of seals, o-rings, and the like). As a result of generally looser
15 alignment of the components, gas cooled torches tend to be generally easy to disassemble.

Liquid cooled torches, by comparison, require tight seals for segregating the different fluids/gases between the torch components. While these seals effectively control the fluid/gas flow between the different torch components, they also tend to hold the torch components tightly together. As a result, liquid cooled plasma cutting torches commonly require a specially
20 designed tool to install and remove each consumable component part. For example, a specially designed tool is needed to install and remove the electrode, while another specially designed tool is needed to install and remove the nozzle, etc.

SUMMARY

Various factors facilitate the need for these specially designed tools. One factor includes
25 the size of the consumable component part. For example, many consumable component parts have outside diameters less than 1 inch (2.54 cm) in size, making it difficult to generate enough torque to install and remove the consumable component parts by hand. Another factor includes precision alignment of the consumable component parts which requires small clearances between the mating diameters of the parts and the torch body. For example, part designs with tight radial
30 clearances frequently do not freely mate with the torch body. Yet another factor includes incorporating seals, such as O-ring seals, in the consumable component part designs for containing and separating the liquid coolant and the process gases. Installing or removing

consumable component parts with o-ring seals requires a force component to overcome the frictional drag force of the o-ring on the sealing surface.

These specially designed tools add cost to the system and complicate system usage. In addition, features must be added to the consumable component parts to interface with the tools
5 adding to the overall cost of the parts.

Accordingly, a need exists to provide low-cost, readily-manufacturable, and easily-replaceable consumable components in a plasma arc torch, where the alignment and concentricity of the consumable components in the plasma arc torch can be closely controlled.

A component for a plasma arc torch includes a body portion, a tapered surface on the
10 body portion, the tapered surface including a compressible member that provides a disengagement force relative to the body portion, and an axially disposed surface on the body portion for coupling to a mating surface on an adjacent structure of the torch. The component can be a nozzle and/or an electrode. The plasma arc torch can be liquid or gas cooled.

The compressible member can radially align the body portion with a central axis of the
15 torch. The compressible member can provide a seal between the body portion and the torch. The compressible member can be an O-ring.

In one embodiment, the tapered surface on the body portion can have a clearance in the range of 0.00001 inches (0.000254 mm) to a value above zero with respect to a respective tapered surface of the torch. In another embodiment, the tapered surface may be touching at a
20 point about the circumference of the body portion. The tapered surface can include a feature for receiving the compressible member, wherein the feature can be a recess defined by the body portion.

The axially disposed surface can be electrically coupled to the mating surface. The axially disposed surface can axially align the body portion in an axial position relative to the
25 adjacent structure of the torch.

In another embodiment, a tool-free plasma torch includes a torch body, an electrode coupled to the torch body, a nozzle coupled to the torch body, the nozzle having a tapered surface including a compressible member that provides a disengagement force relative to an adjacent tapered surface of the torch body, and an axially disposed surface for coupling a mating
30 surface on an adjacent structure of the torch body, and a retention cap coupled to the torch body to provide an engagement force for coupling the nozzle to the torch body. The electrode can further include a tapered surface including the compressible member for providing a

disengagement force relative to an adjacent tapered surface of the torch body and an axially disposed surface for coupling a mating surface on an adjacent structure of the torch body.

The tool-free plasma torch can further include a spring element disposed between the electrode and the nozzle for providing a coupling force between the electrode and the torch body.

- 5 The tool-free plasma torch can further include a swirl ring that includes a compressible member for providing a disengagement force relative to a tapered surface of the torch body. The spring element can be integrated with a swirl ring.

- The compressible members can align at least one of the electrode, the nozzle, and the swirl ring with a central axis of the torch. The electrode and the swirl ring can be fixedly
10 coupled to the torch body. The electrode and the nozzle can be electrically coupled to a cathode and an anode of the torch body, respectively. The shield can be hand tightened to the torch body.

- In another embodiment, a plasma torch component can include a body portion, a tapered surface on the body portion dimensioned to receive a compressible member that provides a disengagement force relative to the body portion, an axially disposed surface on the body portion
15 for aligning the body in an axial position relative to an adjacent structure of the torch and a mating surface for electrically coupling the component on the adjacent structure of the torch.

- In another embodiment, a plasma torch component can include a body portion having an axial length and a radial width, an axial stop for aligning the body portion in the direction of the axial length, and a tapered surface on the body portion dimensioned to engage a compressible
20 member, wherein when the component is assembled the compressible member creates a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the component radially and the axial direction of the force biases the component in an unassembled direction.

- In another embodiment, a plasma torch component can include a first component, an
25 axial stop for rigidly aligning the first component in an axial direction relative to a second component, and a radial stop for flexibly aligning the first component in a radial direction relative to the second component and for biasing the first component in the axial direction. The first component can be a plasma torch body.

- A method for aligning a first component in a plasma torch assembly, the first component
30 having an axial stop and a tapered surface for engaging a compressible member, the method can include slideably engaging the axial stop of the first component to a second component of the plasma torch assembly to position the second component in an axial direction and biasing the

compressible member against the tapered surface of the first component to radially align the first component to the second component.

In another embodiment, an assembly of plasma torch components can include a first component having an axial disposed surfaces and a tapered surface, a second component having an axial disposed surfaces, wherein the first component and the second component are aligned axially by their respective axial disposed surfaces, and a compression member aligning the first component and the second component radially, the compression member engaging the tapered surface such that the first component and the second component are biased in a direction of disassembly.

Advantages of the apparatus include high precision consumable component parts that are easily changeable without tools leading to reduce the overall system cost and ease of system usage.

Accordingly, in one aspect the present invention resides in a component for a plasma arc torch, comprising: a body portion having an axial length and a radial width; and a surface on the body portion dimensioned to engage a compressible member; characterized in that when the component is assembled the compressible member contacts an adjacent tapered surface of a torch body of the plasma arc torch to create a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the component radially and the axial direction of the force biases the component in an unassembled direction and enables the component to disengage from the plasma arc torch after a retaining cap is removed.

In another aspect the present invention resides in a plasma torch, comprising: a torch body; an electrode coupled to the torch body; a nozzle coupled to the torch body, the nozzle including: a surface dimensioned to engage a compressible member; and a retaining cap coupled to the torch body, the retaining cap providing an engagement force for coupling the nozzle to the torch body, characterized in that when the nozzle is assembled in the torch body the compressible member contacts an adjacent tapered surface of the torch body to create a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the nozzle to the torch body radially and the axial direction of the force biases the nozzle in an unassembled direction and enables the nozzle to disengage from the torch body when the retaining cap is removed.

4a

In a further aspect the present invention resides in a method for aligning a first component in a plasma torch assembly, the first component having an axial stop and a tapered surface for engaging a compressible member, the method comprising: slideably engaging the axial stop of the first component to a second component of the plasma torch assembly to position the second component relative to the first component in an axial direction; and biasing the compressible member against the tapered surface of the first component to radially align the first component to the second component, wherein the biasing creates a force having a radial direction that aligns the first component to the second component and an axial direction that biases the first component and the second component in an unassembled direction and enables the first component and the second component to become disengaged after a retaining cap is removed.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

FIG. 1 illustrates a plasma arc torch system;

FIG. 2 illustrates in simplified schematic form a plasma arc torch;

FIG. 3A is a simplified schematic diagram of a tool-free plasma arc torch;

FIG. 3B is an exploded view of the schematic diagram of FIG. 3A;

FIG. 4 is a schematic diagram of a tool-free plasma arc torch; and

FIG. 5 is a schematic diagram of another embodiment of the tool-free plasma arc torch of FIG. 4.

DETAILED DESCRIPTION

FIG. 1 illustrates a plasma arc torch system 100 representative of any of a variety of models of torch systems, including hand cutting and mechanized cutting systems. A power supply 110 provides continuously variable current output within a

4b

range (e.g. from about 20 to 40 amperes). This range can be lower or higher depending on the torch system, the thickness of the work piece and the desired cutting speeds. The variable power supply 110 allows for wide variations in cutting speeds for a given thickness of metal.

A torch body 120 configured for hand cutting is connected to the power supply 110 by a lead 122. The power supply 110 is enclosed by a housing 112. The lead 122 is connected to the power supply 110 by a strain relief system 124. The lead 122 provides the torch body 120 with a plasma gas from a gas source (not shown) and electrical power from the power supply 110 to
5 ignite and sustain a plasma arc. In one embodiment, air is used as the plasma gas, but other gases can be used to improve cut quality on metals such as stainless steel and aluminum. A clamp 130 connects to a workpiece 250 (FIG. 2) through a workpiece lead 132 to provide a return path for the current generated by the power supply 110.

FIG. 2 illustrates in simplified schematic form the plasma arc torch body of FIG. 1,
10 representative of any of a variety of models of torches. The torch body 120 is generally cylindrical with an exit orifice 200 for allowing a plasma arc 240, i.e. an ionized gas jet, to be created between the torch body 120 and a workpiece 250. The torch is used to pierce and cut metal, such as mild steel or other electrically-conducting materials, in a transferred arc mode. The torch operates with a reactive gas, such as oxygen or air, or a non-reactive gas, such as
15 nitrogen or argon, as the plasma gas to form the transferred plasma arc.

The torch body 120 supports an electrode 210 having an insert 212 in its lower end and a nozzle 220 spaced from the electrode 210. The nozzle 220 has a central orifice that defines the exit orifice 200. A swirl ring 230 is mounted to the torch body 120. In one embodiment, the swirl ring 230 has a set of radially offset (or canted) gas distribution holes 232 that impart a
20 tangential velocity component to the plasma gas flow causing it to swirl. This swirl creates a vortex that constricts the arc and stabilizes the position of the arc on the insert.

Referring to FIGS. 3A - 5, the assembly and disassembly of some of the torch components can be accomplished without the need for tools. For example, torch components that have typically included threads for engagement to adjacent components can be replaced by
25 components that slideably engage the other plasma torch components through the structures described in greater detail below.

FIGS. 3A and 3B show a simplified schematic and exploded diagram of a slidable nozzle 370 of a tool-free plasma arc torch 300. The slidable nozzle 370 is maintained in an assembled position through the use of a retention cap 302 that, when attached, holds the slidable nozzle to
30 an anode block 308 of the torch body 300. Conversely, when the retention cap 302 is removed, the slidable nozzle 370 can be removed without the need for any tools.

Moreover, a torch assembly, as shown in FIG. 4, can be created where a plurality of the torch components can be made to be slidably attached to the torch body, such that these

components are coupled to the torch through the retention cap 302. Again, once the retaining cap 302 is removed the slidably components can be unassembled without the need for tools. Because these components can be slidably assembled, there is no need for threads to be included in these components in order to assemble to them to the torch body. Thus, both assembly time
5 and manufacturing cost can be reduced.

As shown in FIGS. 3A and 3B, at least two torch components of a torch body are slidably coupled together such that in an assembled configuration, the two torch components (e.g., an anode 308 and a nozzle 370) are aligned in both a longitudinal direction and radial direction. The two torch components (308, 370) are also biased in an unassembled direction. The
10 combination of alignment and biasing can be achieved by a number of embodiments and configuration, including the configuration described immediately below.

As shown, the first torch component (308) and a second torch component (370) are aligned by a primary datum and a secondary datum with a compressible member (376) disposed between the two components (308, 370). The primary datum is an axial stop (318) in the first
15 component (308), such that when assembled, the primary datum of the first component (308) abuts a corresponding feature or axial stop (378) in the second component (370). The axial stop may be a lip or edge in the first component (308) that engages a similar lip or edge in the second component (370) to establish the relative position of the two components along a longitudinal axis. The axial stop may be a hard or rigid axial stop such as created by a metal-to-metal
20 contact.

The secondary datum may be established by a tapered surface (314) in the first component (308) that aligns the first component (308) and the second component (370) in the radial direction through the compressible member (376). In one embodiment, the compressible member (376) sits on the tapered surface (314) of the first component (308) and, when
25 assembled, is compressed between the first component (308) and the second component (370). During compression of the compression member (376), a compression vector is created having both an axial component (A) and a radial component (B).

The radial component (B) serves to align the first component (308) and the second component (370) radially. The axial component (A) serves to bias the first component (308) and
30 the second component (370) in an unassembled direction such that the two components (308, 370) freely disengage when the torch body (300) is being disassembled. The compression of the compressible member may also serve as a fluid seal between the first component (308) and second component (370). Because the secondary datum is positioned at the location of the

contact of the compressible member, the secondary datum may be flexible. It should also be noted that the secondary datum may still allow for contact at a single point between the first component (308) and the second component (370) and still perform the aligning and biasing functions. Through the use of two datums, the first component (308) and the second component
5 (370) are aligned in a manner that allows for ready disengagement and assembly.

FIG. 4 shows an embodiment of a lower body portion, or “working end” 400 of a liquid or gas cooled-type plasma arc torch as shown in FIGS. 1 and 2. The working end 400 has a centrally disposed longitudinal axis 302 and includes a cathode block 304, a torch insulator 306, and an anode block 308, each block having respective tapered alignment surfaces 310, 312, 314.
10 The cathode block 304 and the anode block 308 include respective axial stops 316, 318. In some embodiments, the tapered alignment surface 308, 314 of the cathode block 304 and the anode block 308 can include respective lead-ins 322, 326 for protecting consumable components from damage during installation. Further, the lead-ins 322, 326 are beneficial for component ejection by increasing axial force and reducing drag force on the components. The working end 400
15 further includes radially centered consumable components (an electrode 330, a swirl ring 350, a nozzle 370, and a shield 390). In some embodiments, each tapered alignment surface 308, 312, 314 can further include a compressible member (not shown) for providing a seal, a radial alignment force, and an axial disengagement force between the torch and the consumable components. In some embodiments, the torch is liquid or gas cooled.

20 The electrode 330 includes a tapered surface 332 for aligning with the first tapered alignment surface 310 of the working end 400 of the plasma arc torch. The tapered surface 322 includes a feature (e.g. a recess) 334 or is dimensioned to receive a compressible member 336. The compressible member 336, such as an O-ring, provides the following functions: 1) a seal between the electrode 330 and the plasma chamber to contain and separate process gases and
25 torch coolant; 2) a radial stop creating a radial alignment force for flexibly aligning the electrode 330 in the radial direction; and 3) an axial disengagement force between the working end 400 and the electrode 330 for biasing the electrode 330 in an unassembled direction. In some embodiments, the tapered surface 332 has an axial extent of less than about 0.5 inches (1.27 cm) and, in some embodiments, less than about 0.25 inches (0.635 cm). The electrode 330 further
30 includes an axial stop 338 for aligning the electrode 330 with the axial stop 316 of the cathode block 304. In some embodiments, the axial stops 316, 338 are rigidly coupled. Further, axial-to-axial stop 316, 338 allows for conduction of electrical current and thermal energy needed to

operate the torch. It should be understood that electrically coupling of the electrode 330 to the cathode block 304 can be accomplished in other manner known in the art.

During installation, as the electrode 330 is installed in the working end 400 of the plasma arc torch, the tapered surface 332 is guided by the first tapered alignment surface 310 until the compressible member 336 comes to rest against first tapered alignment surface 310. The lead-in 322 on the first tapered alignment surface 310 prevents the compressible member or O-ring 336 from being damaged. As shown, in one embodiment a nominal clearance of 0.002 inches is provided between the taper surface 332 and the first tapered alignment surface 310 to prevent binding during installation.

In some embodiments, a swirl ring 350 can be disposed between the electrode 330 and the nozzle 370. The swirl ring 350 controls the fluid flow patterns on the plasma chamber front between the electrode 330 and the nozzle 370. The swirl ring 350 includes at least one feature (e.g. a recess) 354 or is dimensioned to receive a respective compressible member 356 for aligning with the second tapered alignment surface 312 of the working end 400 of the plasma arc torch. The compressible member 356, such as an O-ring, provides the following functions: 1) a seal between the swirl ring 350 and the plasma chamber to contain and separate process gases and torch coolant; 2) a radial stop creating a radial alignment force for flexibly aligning the swirl ring 350 in the radial direction; and 3) an axial disengagement force between the working end 400 and the swirl ring 350 for biasing the swirl ring 350 in an unassembled direction. In some embodiments, a spring element 358 is disposed between the electrode 330 and the swirl ring 350 to provide an engagement force of the electrode 330 and the cathode block 304 during installation. It should be understood that the spring element 358 can be disposed between the swirl ring 350 and the nozzle 370, integrated with the swirl ring 350, or provided in any configuration that provides engagement force of the electrode 330 to the cathode block 304.

During installation, as the swirl ring 350 is installed in the working end 400 of the plasma arc torch, the compressible member 356 comes to rest against second tapered alignment surface 312. It should be understood a non-integrated spring element 358 can be installed before or after the installation of the swirl ring 350 or in replacement of the swirl ring 350.

The nozzle 370 includes a tapered surface 372 for aligning with the third tapered alignment surface 314 of the working end 400 of the plasma arc torch. The tapered surface 372 includes a feature (e.g. a recess) 374 or is dimensioned to receive a compressible member 356. The compressible member 376, such as an O-ring, provides the following functions: 1) a seal between the nozzle 370 and the plasma chamber to contain and separate process gases and torch

coolant; 2) a radial stop creating a radial alignment force for flexibly aligning the nozzle 370 in the radial direction; and 3) an axial disengagement force between the working end 400 and the nozzle 370 for biasing the nozzle 370 in an unassembled direction. In some embodiments, the tapered surface 372 has an axial extent of less than about 0.5 inches (1.27 cm). The nozzle 370
5 further includes an axial stop 378 for aligning the nozzle 370 with the axial stop 318 of the anode block 308. In some embodiments, the axial stops 318, 378 are rigidly coupled. Further, axial-to-axial stop 318, 378 allows for conduction of electrical current and thermal energy needed to operate the torch. It should be understood that electrically coupling of the nozzle 370 to the anode block 308 can be accomplished in other manner known in the art.

10 During installation, as the nozzle 370 is installed in the working end 400 of the plasma arc torch, the tapered surface 372 is guided by the third tapered alignment surface 314 until the compressible member 376 comes to rest against third tapered alignment surface 314. The lead-in 326 on the third tapered alignment surface 314 prevents the compressible member or O-ring 376 from being damaged. As shown, in one embodiment a nominal clearance of 0.002 inches is
15 provided between the taper surface 372 and the third tapered alignment surface 314 to prevent binding during installation.

A hand-threaded retaining cap 302 may be employed to couple the consumables components to the torch body. The retaining cap 302 causes a force to be placed on the nozzle 370, the swirl ring 350, and the electrode 330 (through the spring element 358) that causes the
20 longitudinal axis of these components to align with the torch axis 302. The force further seats these components with their respective counterparts of the working end 400 of the torch (e.g. the cathode block 304, the torch insulator 306, and the anode block 308).

The shield 390 is typically the outermost component of the working end 400 of the torch. In some embodiments, the shield 390 may be threadedly attached to the torch working end 400
25 or attached in a press-on configuration. In other embodiments, shield 390 may be connected to the torch body by retain cap 392. In such embodiments, the shield 390 may likewise include a tapered surface 372 for aligning with adjacent components. The tapered surface 372 may also include a feature (e.g. a recess) 374 to receive a compressible member 356. In some embodiments, the shield 390 may serve to function as the retaining cap thereby providing the
30 necessary force to seat the consumable components.

During torch operation, the electrode 330, the swirl ring 350, the nozzle 370, and the shield 390 are subjected to harsh conditions, including high temperatures and other physical stresses. Consequently, these components degrade over time and eventually must be replaced,

typically in the field. Prior techniques required the use of specialized tools to remove these components. In the above embodiment, the retaining cap 302 need only be removed by hand thereby allowing the axial component of the compression force on compressible members to assist in ejecting these components from the torch.

5 FIG. 4 demonstrates an embodiment incorporating both tool-free and conventional torch components. That is, some components may be conventional type threaded consumables and some components may be slidable as described above. This allows for a reduction cost for the components that are more likely to be replaced than others. That is, the consumable components closest to the plasma arc are more likely to wear and need replacement before the components
10 further from the plasma arc. For example, the electrode 330 and the nozzle 370 are more likely to wear before the shield 390, and the shield 390 is more likely to wear before the swirl ring 350, etc.

 In the embodiment, the electrode 330 is threadedly attached to the cathode block 304 eliminating the need for the spring element 358 (FIG. 3). The swirl ring 350, the nozzle 370, and
15 the shield 390 are each coupled to the “working end” 400 of the plasma arc torch as mentioned above.

 The electrode 330 includes a threaded surface 339 and a deformable surface, such as a lip. The threaded surface 339 engages a cooperating thread 319 of the cathode block 304. By threadedly attaching the electrode 330 to the cathode block 304, the electrode 304 is axially
20 aligned with the torch axis 302 and properly spaced from the nozzle 350 during torch operation. The engagement of the threaded surface 339 with the cooperating thread 319 also serves as an electrical connection to conduct the requisite current between the cathode block 304 and the electrode 330.

 In some embodiments, the swirl ring 350 may also include a threaded surface that
25 engages a cooperating threaded surface on the torch insulator 306. In general, however, the swirl ring 350 is simply captured in the working end 400 of the torch by the retention cap. In either configuration, it is desirable to center the swirl ring 350 about the electrode 330 so as to provide a concentric uniform annular plasma chamber to provide uniform gas flow therein and facilitate torch operation.

30 FIGS. 3 and 4 show each tapered surface as a linear taper surface, however it should be understood that each tapered surface can be any number of shapes, including contoured surfaces and arcs. In general, the shape of the “tapered” surface can be understood to be any shape such

that when two torch components are assembled, the tangent to the surface at the point of contact with compressible member is angled in the unassembled direction relative to the torch axis.

From the foregoing, it will be appreciated that the working end provides a simple and effective way to ensure the proper alignment of consumable components in the working end of a plasma arc torch. The problems of securing the critical alignments while operating under harsh field conditions, compounded by the need to replace components as they deteriorate from use, are largely eliminated. This avoids the unacceptable production errors affecting workpieces caused by improperly aligned apparatus and facilitates quick and easy replacement of the consumable components.

While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

CLAIMS

What is claimed is:

1. A component for a plasma arc torch, comprising:
 - a body portion having an axial length and a radial width; and
 - a surface on the body portion dimensioned to engage a compressible member;characterized in that when the component is assembled the compressible member contacts an adjacent tapered surface of a torch body of the plasma arc torch to create a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the component radially and the axial direction of the force biases the component in an unassembled direction and enables the component to disengage from the plasma arc torch after a retaining cap is removed.
2. The component of Claim 1, wherein the component is one of a nozzle, a shield, a swirl ring, or an electrode of the plasma arc torch.
3. The component of Claim 1, wherein the compressible member radially aligns the body portion with a central axis of the torch.
4. The component of Claim 1, wherein the surface on the body portion has a clearance in the range of 0.00001 to 0.002 inches (0.000254 to 0.0508 mm) with respect to the adjacent tapered surface of the torch body portion.
5. The component of Claim 1, wherein the compressible member provides a seal between the body portion and the body of the plasma arc torch.
6. The component of Claim 1, wherein the compressible member is an O-ring.
7. The component of Claim 1, wherein the surface of the body portion includes a feature for receiving the compressible member.

8. The component of Claim 7, wherein the feature on the surface of the body portion is a recess defined by the body portion.
9. The component of Claim 1, further comprising an axially disposed surface and a mating surface on the adjacent tapered surface of the torch body, wherein the axially disposed surface and the mating surface are electrically coupled.
10. The component of Claim 9, wherein the axially disposed surface axially aligns the body portion in an axial position relative to the adjacent tapered surface of the torch body.
11. A plasma torch, comprising:
 - a torch body;
 - an electrode coupled to the torch body;
 - a nozzle coupled to the torch body, the nozzle including:
 - a surface dimensioned to engage a compressible member; and
 - a retaining cap coupled to the torch body, the retaining cap providing an engagement force for coupling the nozzle to the torch body,
 - characterized in that when the nozzle is assembled in the torch body the compressible member contacts an adjacent tapered surface of the torch body to create a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the nozzle to the torch body radially and the axial direction of the force biases the nozzle in an unassembled direction and enables the nozzle to disengage from the torch body when the retaining cap is removed.
12. The plasma torch of Claim 11, wherein the electrode further includes:
 - a surface dimensioned to engage a compressible member, the compressible member providing a disengagement force relative to the adjacent tapered surface of the torch body; and
 - an axially disposed surface for coupling a mating surface on an adjacent structure of the torch body.

13. The plasma torch of Claim 12, further including a spring element disposed between the electrode and the nozzle for seating the electrode to the torch body when assembled.
14. The plasma torch of Claim 13, further comprising a swirl ring disposed between the electrode and the nozzle, the swirl ring including a compressible member for providing a disengagement force relative to the adjacent tapered surface of the torch body.
15. The plasma torch of Claim 14, wherein the spring element is integrated with the swirl ring.
16. The plasma torch of Claim 11, wherein the adjacent tapered surface has a clearance in the range of 0.00001 to 0.002 inches (0.000254 to 0.0508 mm) with respect to the nozzle.
17. The plasma torch of Claim 11, wherein the adjacent tapered surface of the torch body includes a lead-in feature for protecting the compressible members from damage during installation.
18. The plasma torch of Claim 11, wherein the compressible members align at least one of the electrode, the nozzle, and the swirl ring with a central axis of the torch.
19. The plasma torch of Claim 11, wherein the compressible member is an O-ring.
20. The plasma torch of Claim 11, wherein the electrode is fixedly coupled to the torch body.
21. The plasma torch of Claim 11, wherein the swirl ring is fixedly coupled to the torch body.

22. The plasma torch of Claim 11, wherein the electrode is electrically coupled to a cathode of the torch body and the nozzle is electrically coupled to an anode of the torch body.
23. The plasma torch of Claim 11, wherein the torch is liquid or gas cooled.
24. A component for a plasma arc torch, comprising:
 - means for providing a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the component to the plasma arc torch radially and the axial direction of the force biases the component in an unassembled direction and enables the component to disengage from the plasma arc torch after a retaining cap is removed; and
 - means for engaging respective mating surfaces of the component and the plasma arc torch,
 - wherein the means for providing a force contacts a tapered surface of a body of the plasma arc torch to create the force.
25. A plasma torch component, comprising:
 - a body portion having an axial length and a radial length;
 - a surface on the body portion dimensioned to receive a compressible member; and
 - a mating surface for electrically coupling the component on the adjacent structure of the torch;
 - characterized in that when the component is assembled the compressible member contacts an adjacent tapered surface of a torch body of the torch to create a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the component radially and the axial direction of the force biases the component in an unassembled direction and enables the component to disengage from the plasma arc torch after a retaining cap is removed.
26. A plasma torch component, comprising:
 - a body portion having an axial length and a radial width;

an axial stop for aligning the body portion in the direction of the axial length; and

a tapered surface on the body portion dimensioned to engage a compressible member, wherein when the component is assembled the compressible member creates a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the component radially and the axial direction of the force biases the component in an unassembled direction and enables the component to disengage from a plasma torch after a retaining cap is removed.

27. A plasma torch component, comprising:

a body having an axial length and a radial width;

an axial stop defining a primary datum for rigidly aligning the body in an axial direction relative to an adjacent structure; and

a radial stop defining a secondary datum for flexibly aligning the body in a radial direction relative to the adjacent structure and for biasing the body in the axial direction, the radial stop dimensioned to engage a compressible member and having a tapered surface,

characterized in that when the component is assembled the compressible member contacts the tapered surface of the radial stop to create a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the body radially and the axial direction of the force biases the body in an unassembled direction and enables the body to disengage from the adjacent structure after a retaining cap is removed.

28. The component of Claim 27, wherein the component is a plasma torch body.

29. A method for aligning a first component in a plasma torch assembly, the first component having an axial stop and a tapered surface for engaging a compressible member, the method comprising:

slideably engaging the axial stop of the first component to a second component of the plasma torch assembly to position the second component relative to the first component in an axial direction; and

biasing the compressible member against the tapered surface of the first component to radially align the first component to the second component, wherein the biasing creates a force having a radial direction that aligns the first component to the second component and an axial direction that biases the first component and the second component in an unassembled direction and enables the first component and the second component to become disengaged after a retaining cap is removed.

30. An assembly of plasma torch components, the assembly comprising:
- a first component having an axially disposed surface and a tapered surface;
 - a second component having an axially disposed surface, wherein the first component and the second component are aligned axially by their respective axially disposed surfaces; and
 - a compression member disposed between the first component and the second component,
- characterized in that when the first component and the second component are assembled the compressible member contacts the tapered surface to create a force having an axial direction and a radial direction, wherein the radial direction of the force aligns the first and second components radially and the axial direction of the force biases the first and second components in an unassembled direction and enables the first and second components to become disengaged after a retaining cap is removed.
31. A method for aligning a first component of a plasma torch and a second component of a plasma torch assembly, having a compressible member disposed between the two components, the method comprising:
- axially aligning the first component to the second component by a rigid primary datum;
 - radially aligning the first component to the second component by a flexible secondary datum, such that the compressible member aligns the first component and the second component radially and the compressible member axially biases the compressible member in an unassembled direction,

wherein the compressible member contacts the flexible secondary datum to create a force having an axial direction and a radial direction when the first and second components are assembled,

wherein the flexible secondary datum is established by a tapered surface of the first component, and

wherein the radial direction of the force aligns the first and second components radially and the axial direction of the force biases the first component in an unassembled direction and enables the first and second components to be disengaged after a retaining cap is removed.

1/6

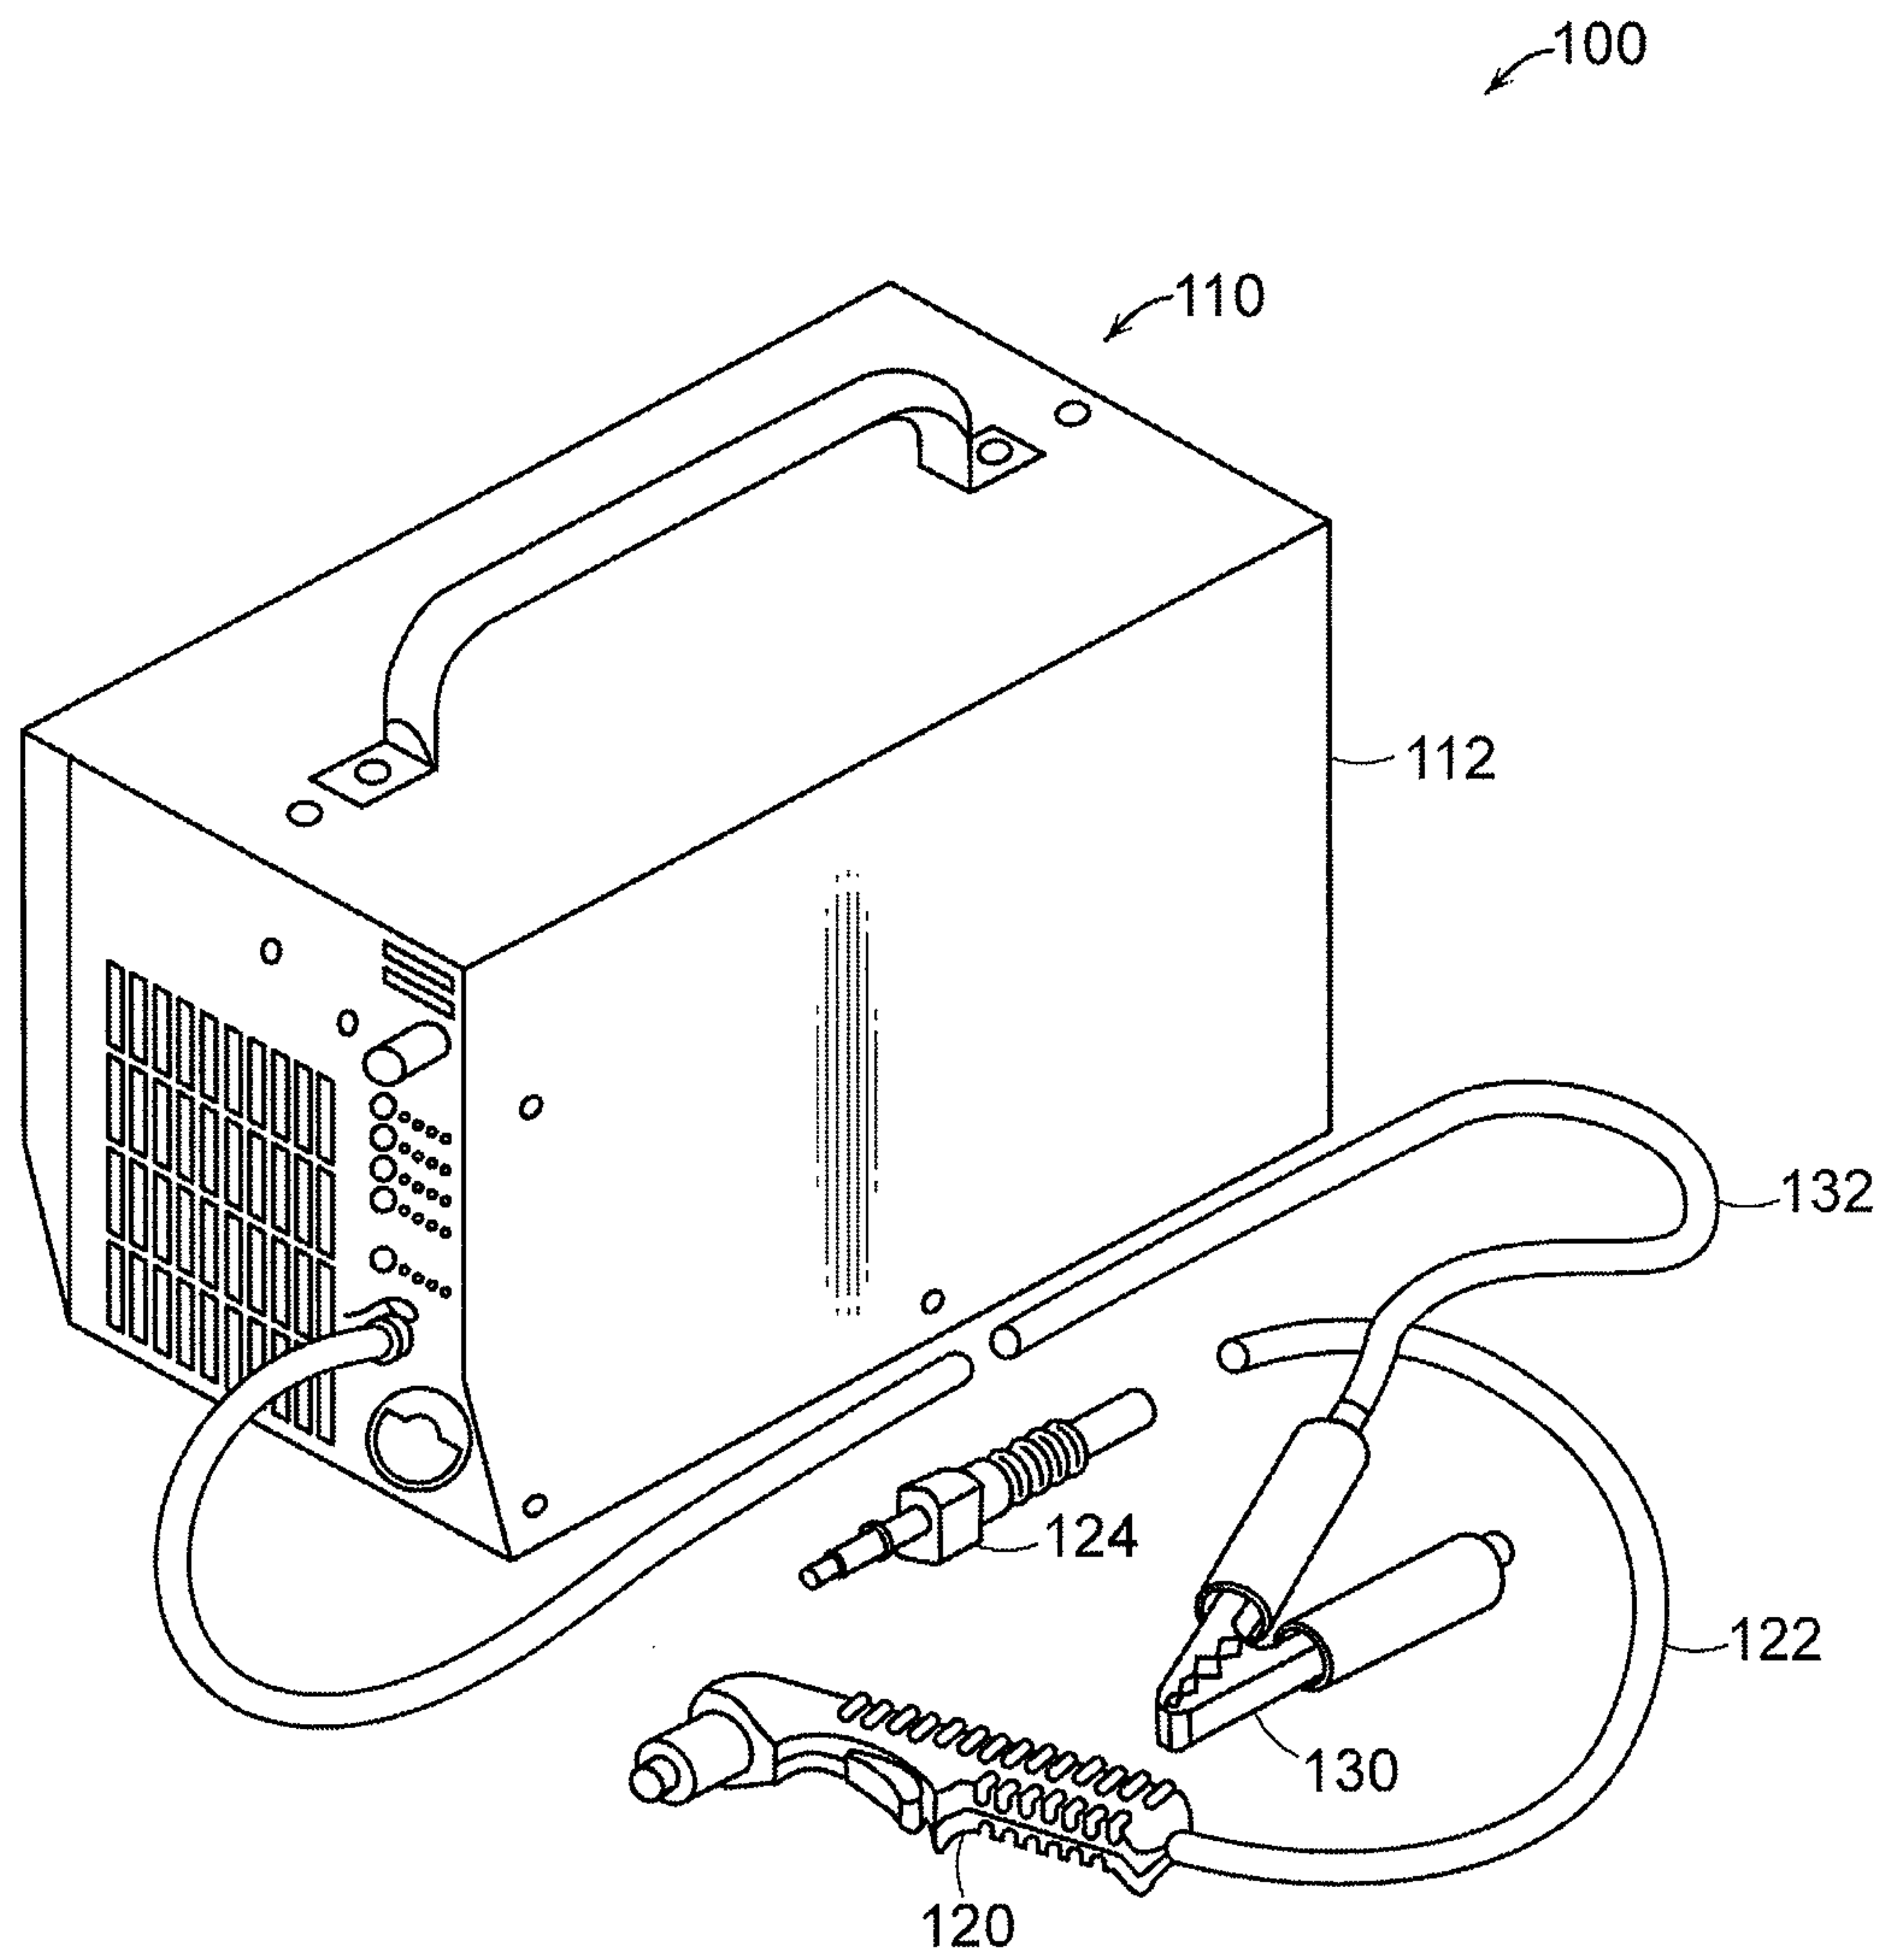


FIG. 1

2/6

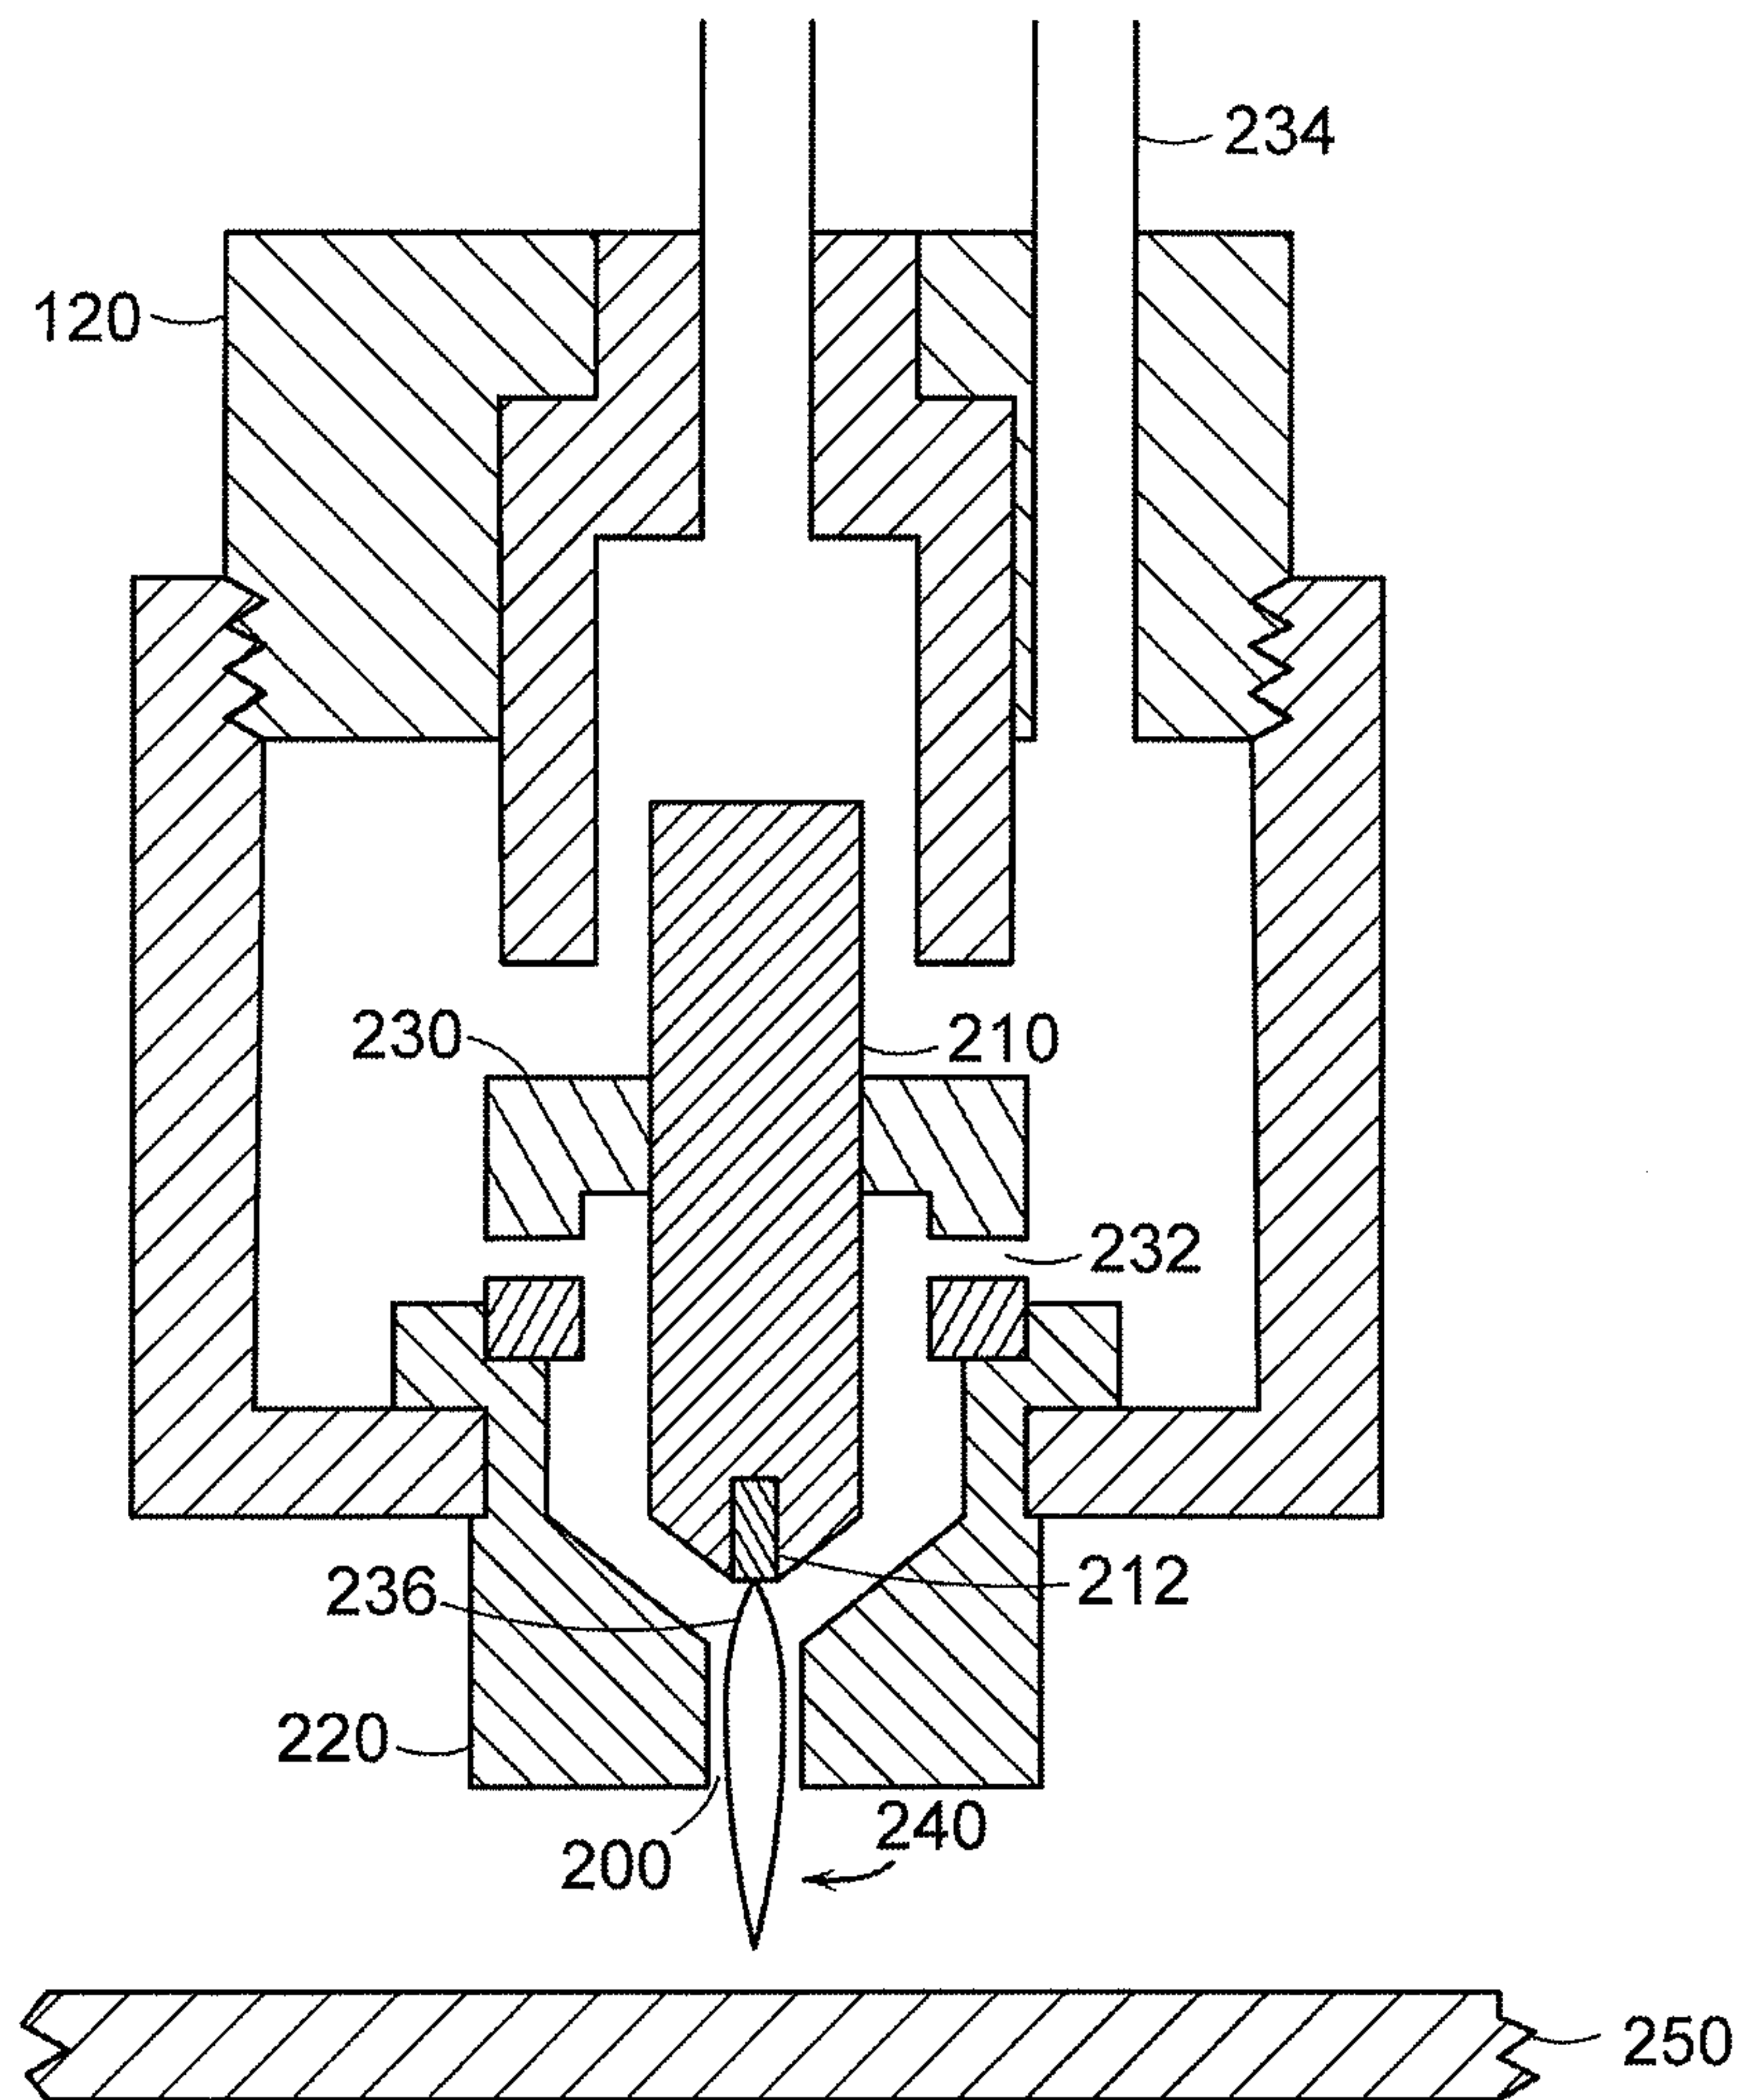


FIG. 2

3/6

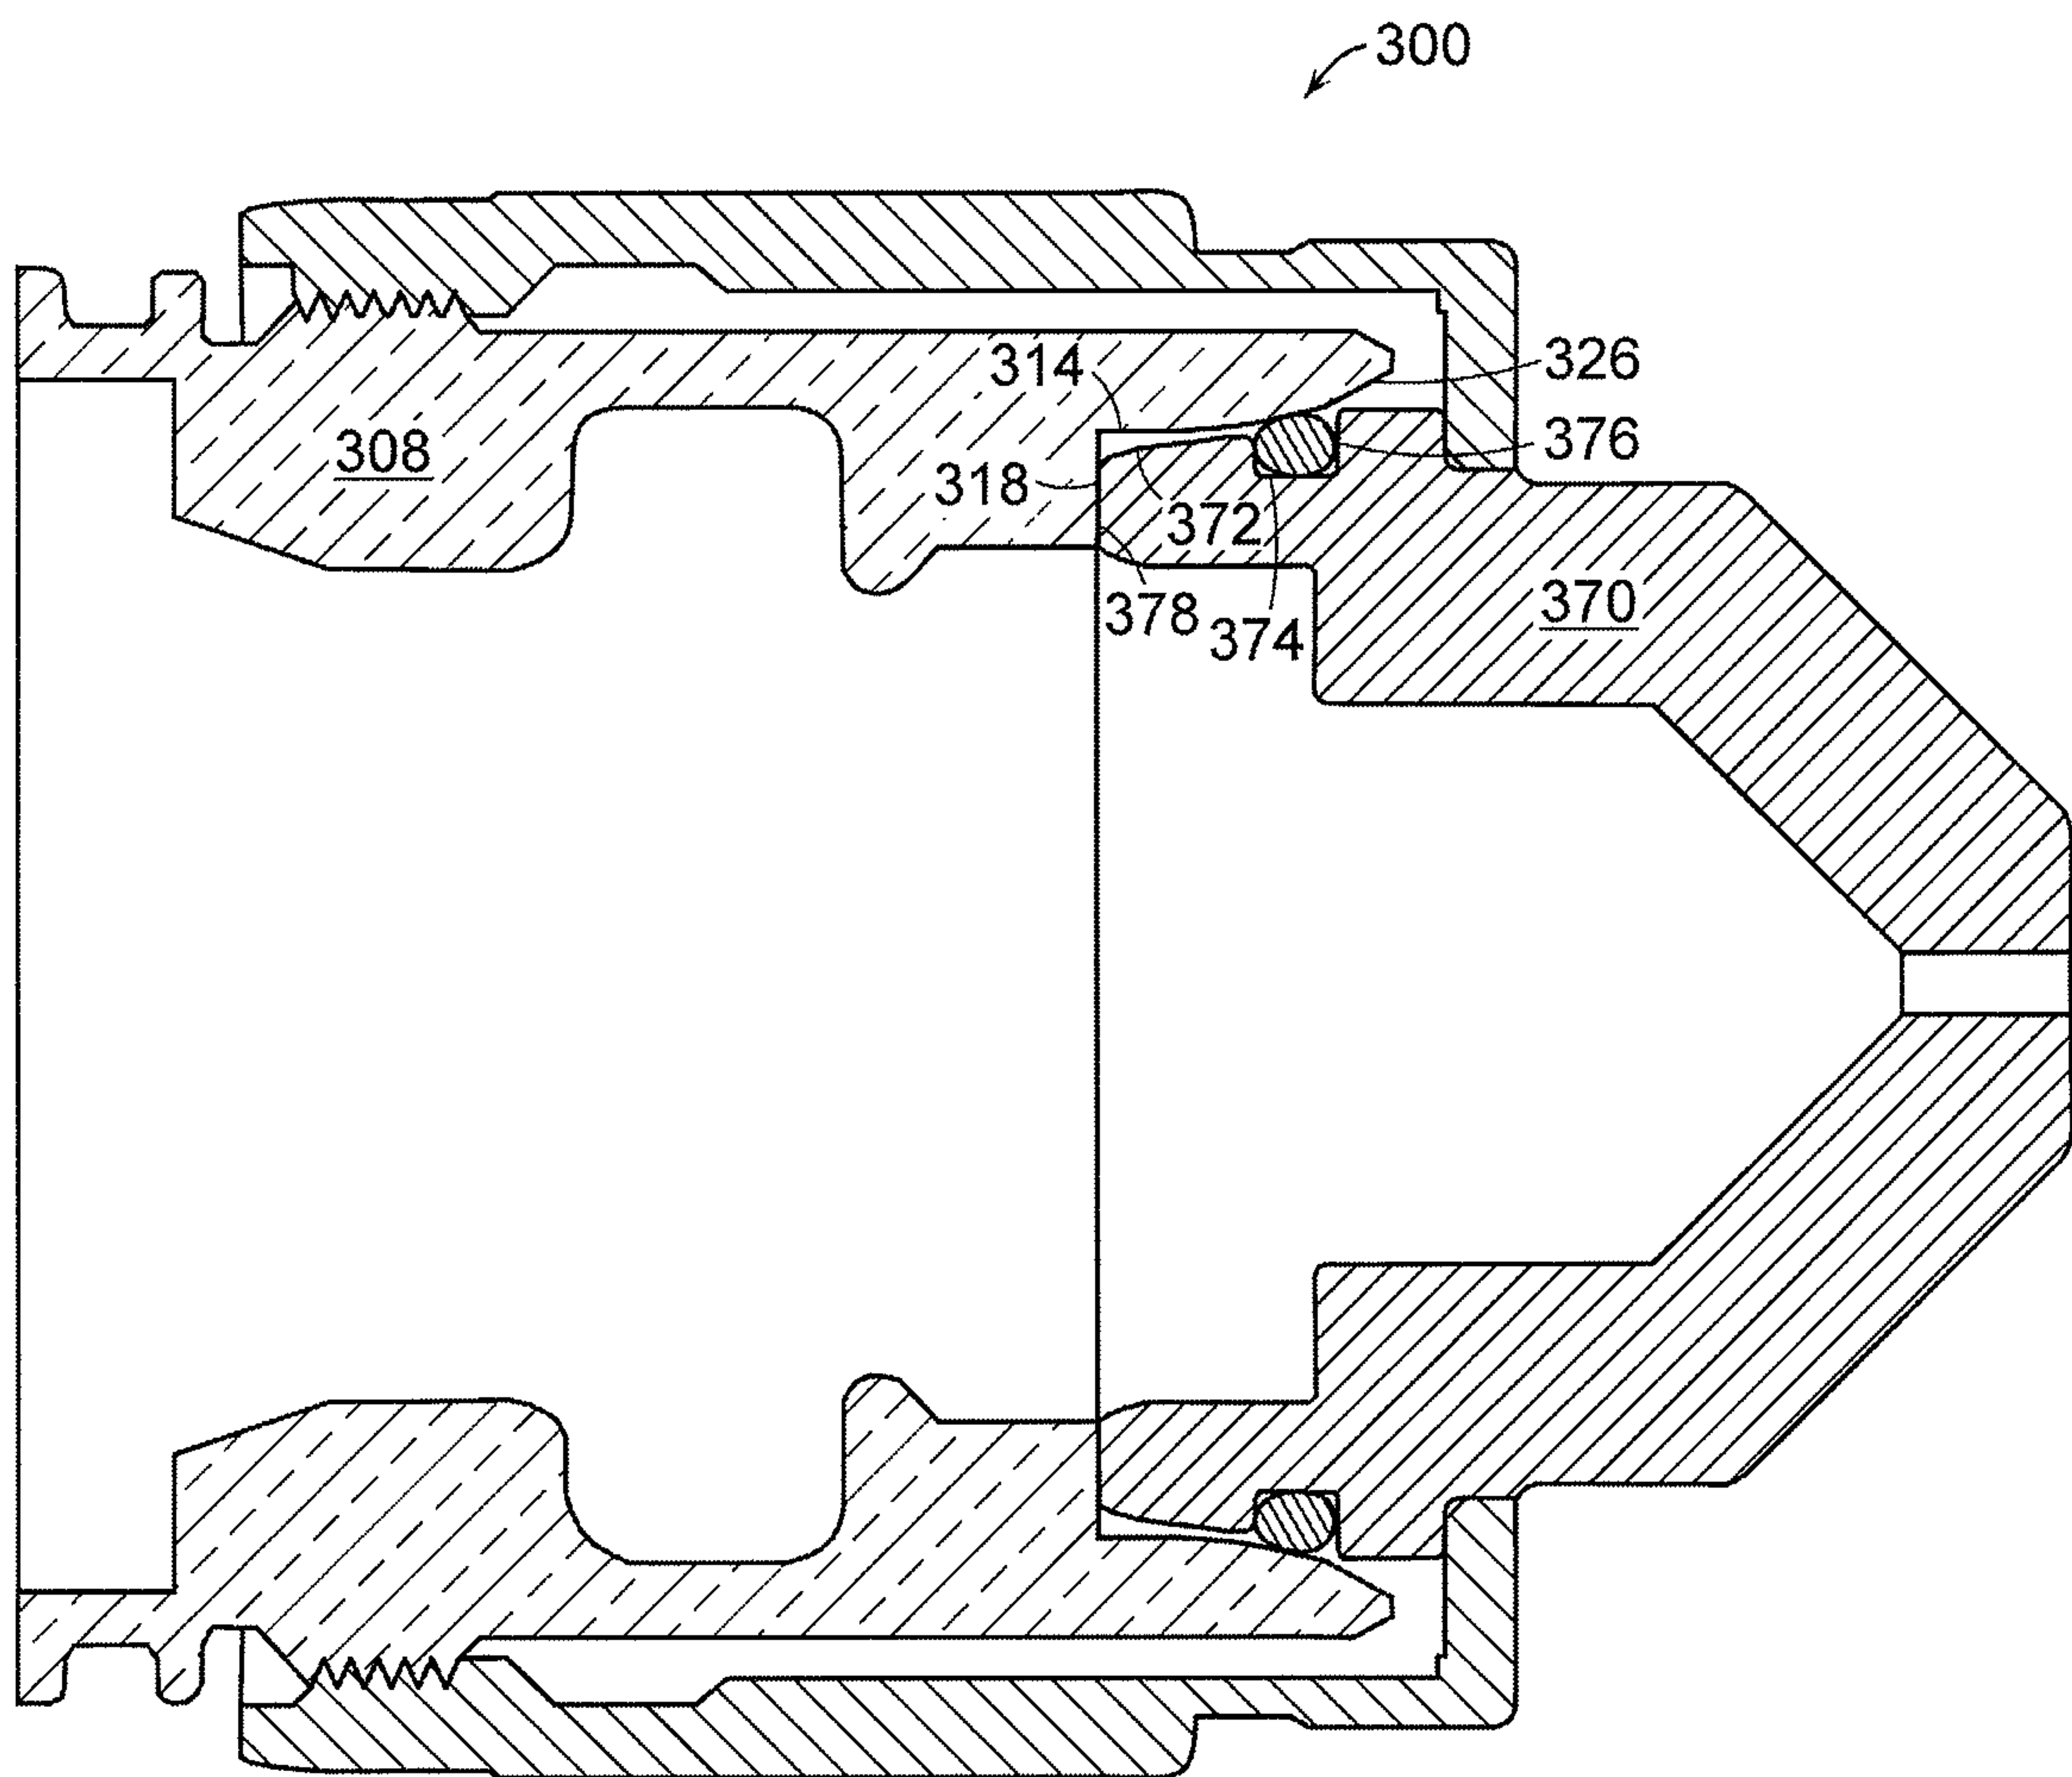


FIG. 3A

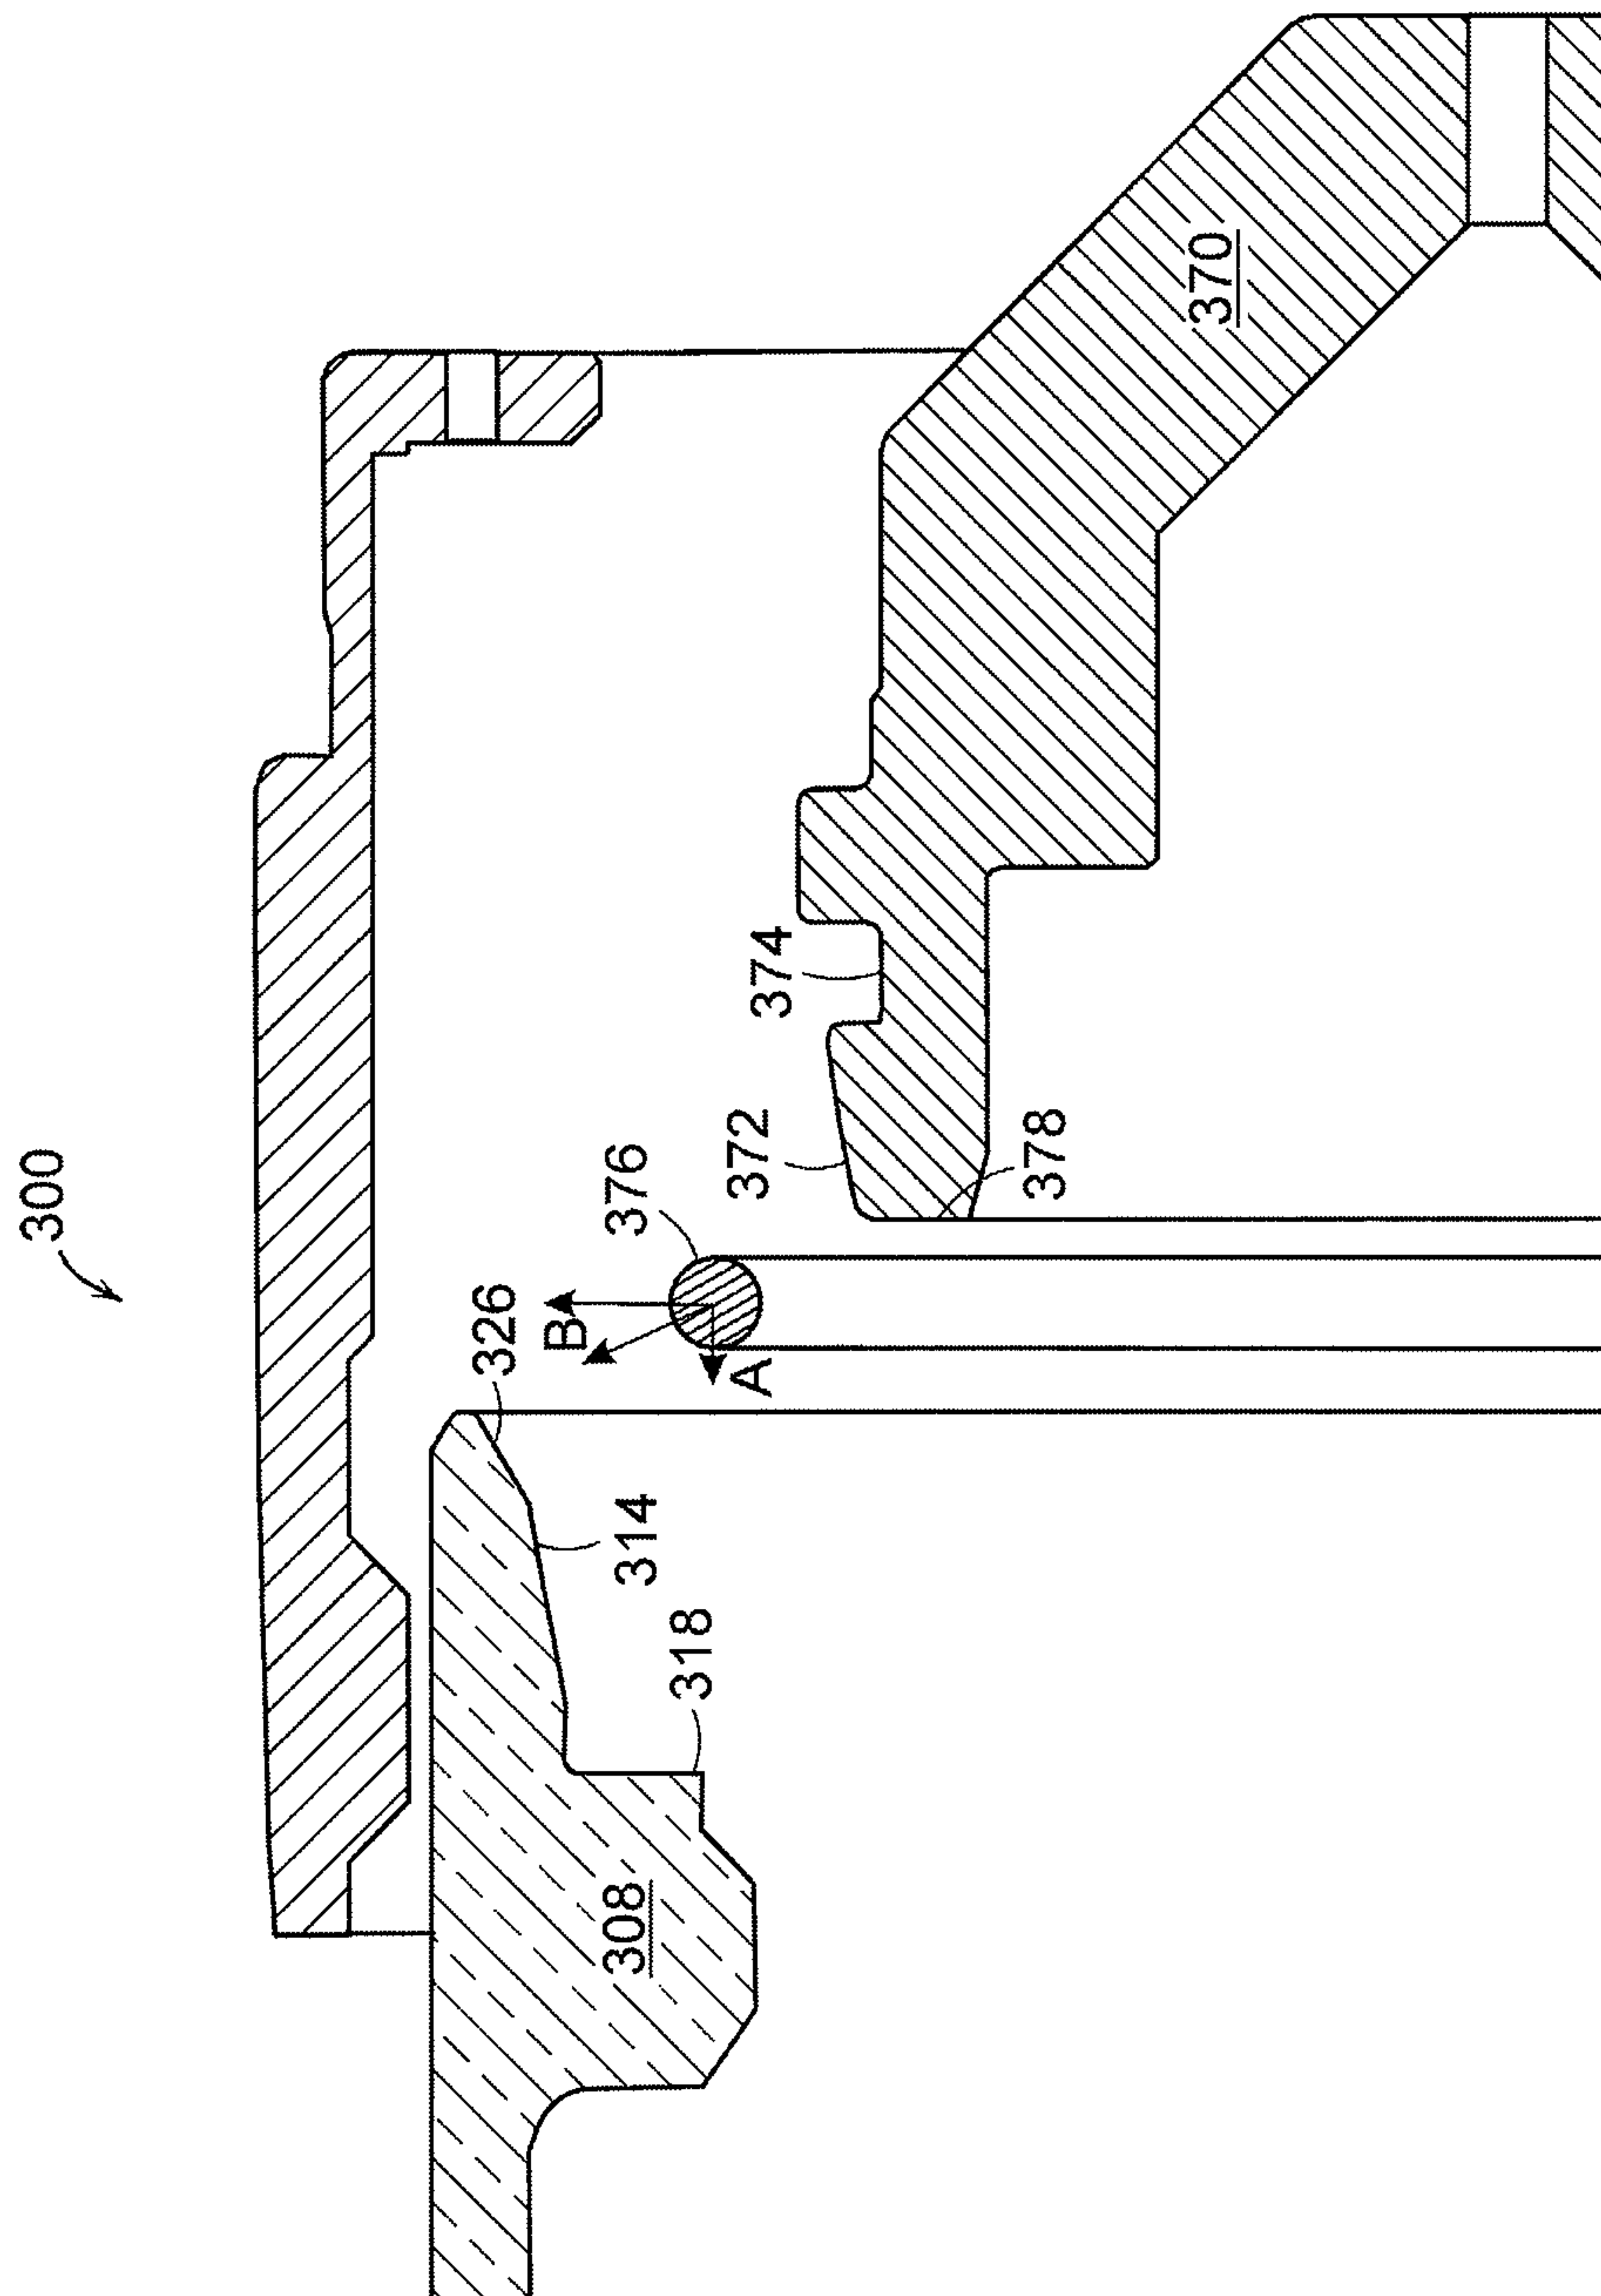


FIG. 3B

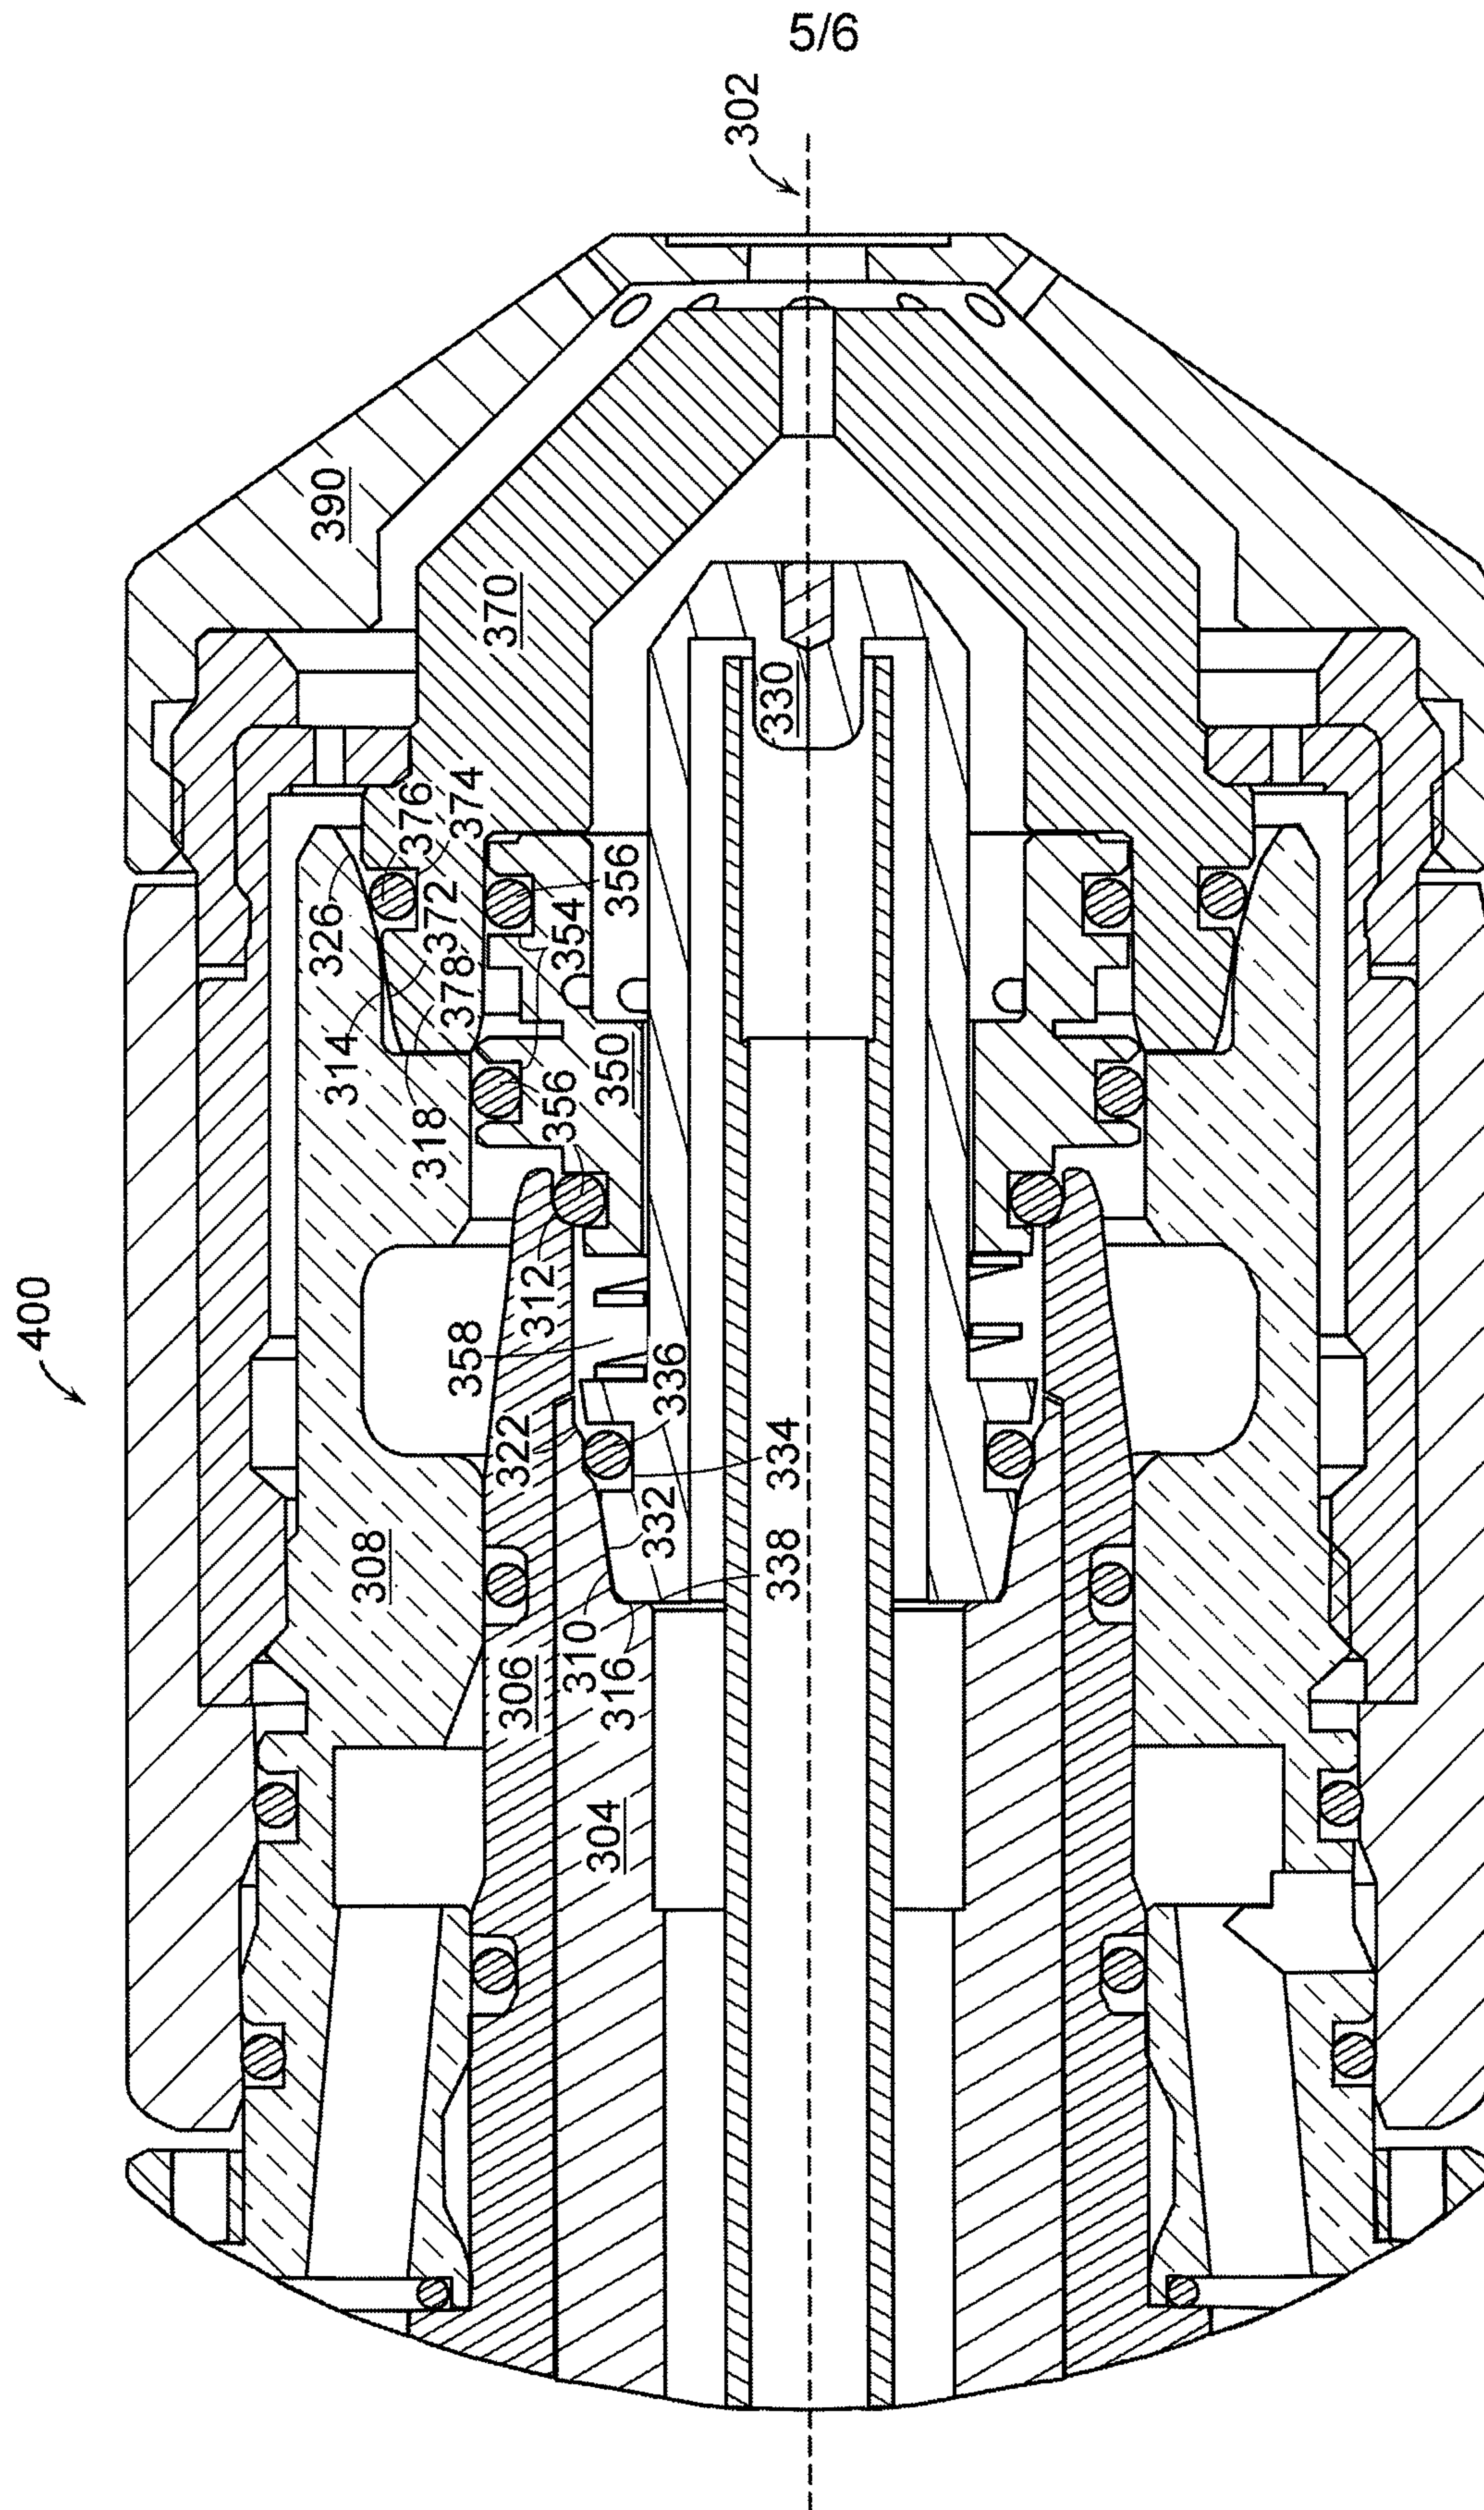


FIG. 4

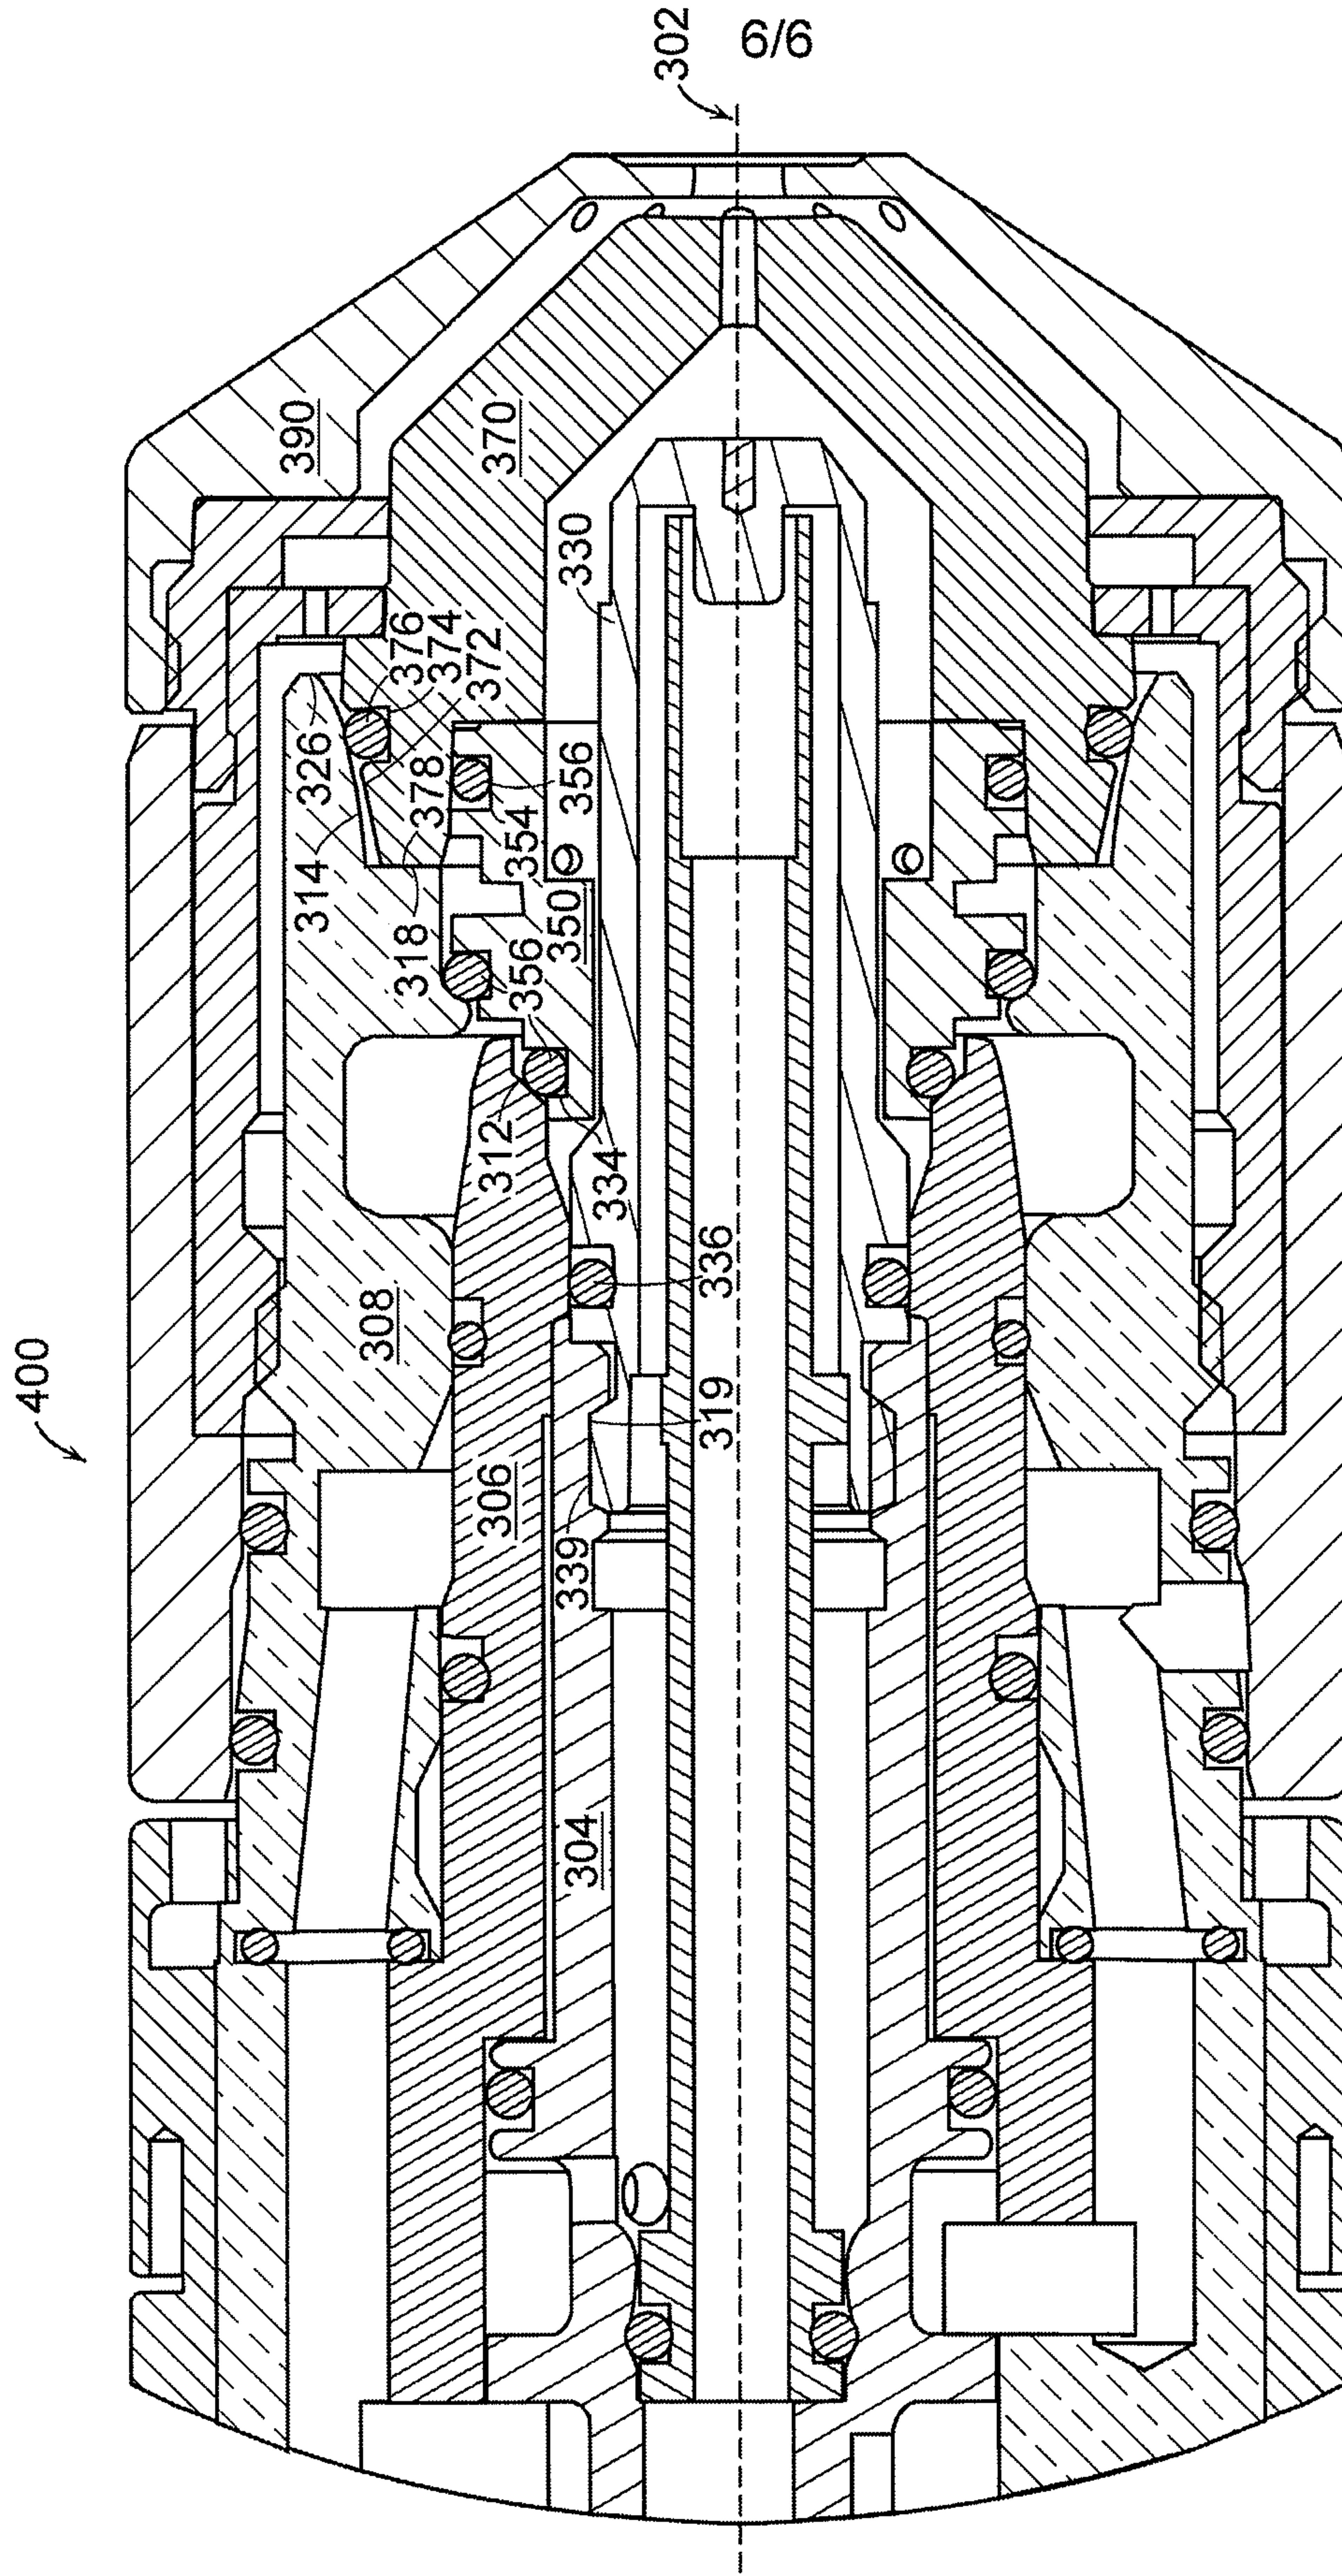


FIG. 5

