



(86) Date de dépôt PCT/PCT Filing Date: 2011/09/16
(87) Date publication PCT/PCT Publication Date: 2012/03/22
(85) Entrée phase nationale/National Entry: 2013/03/08
(86) N° demande PCT/PCT Application No.: US 2011/051864
(87) N° publication PCT/PCT Publication No.: 2012/037426
(30) Priorités/Priorities: 2010/09/16 (US61/383,595);
2010/09/16 (US61/383,519); 2010/09/16 (US61/383,553)

(51) Cl.Int./Int.Cl. *H01M 2/16* (2006.01),
H01M 10/32 (2006.01)

(71) Demandeur/Applicant:
ZPOWER, LLC, US

(72) Inventeurs/Inventors:
ADAMSON, GEORGE W., US;
SCANLAN, DAVID JOHN, US;
BISHOP, SAM, US;
ZHOU, HONGXIA, US;
SUN, XIMEI, CN;
HUANG, BIYING, US;
LIANG, LIANG, US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : SEPARATEUR D'ELECTRODES

(54) Title: ELECTRODE SEPARATOR

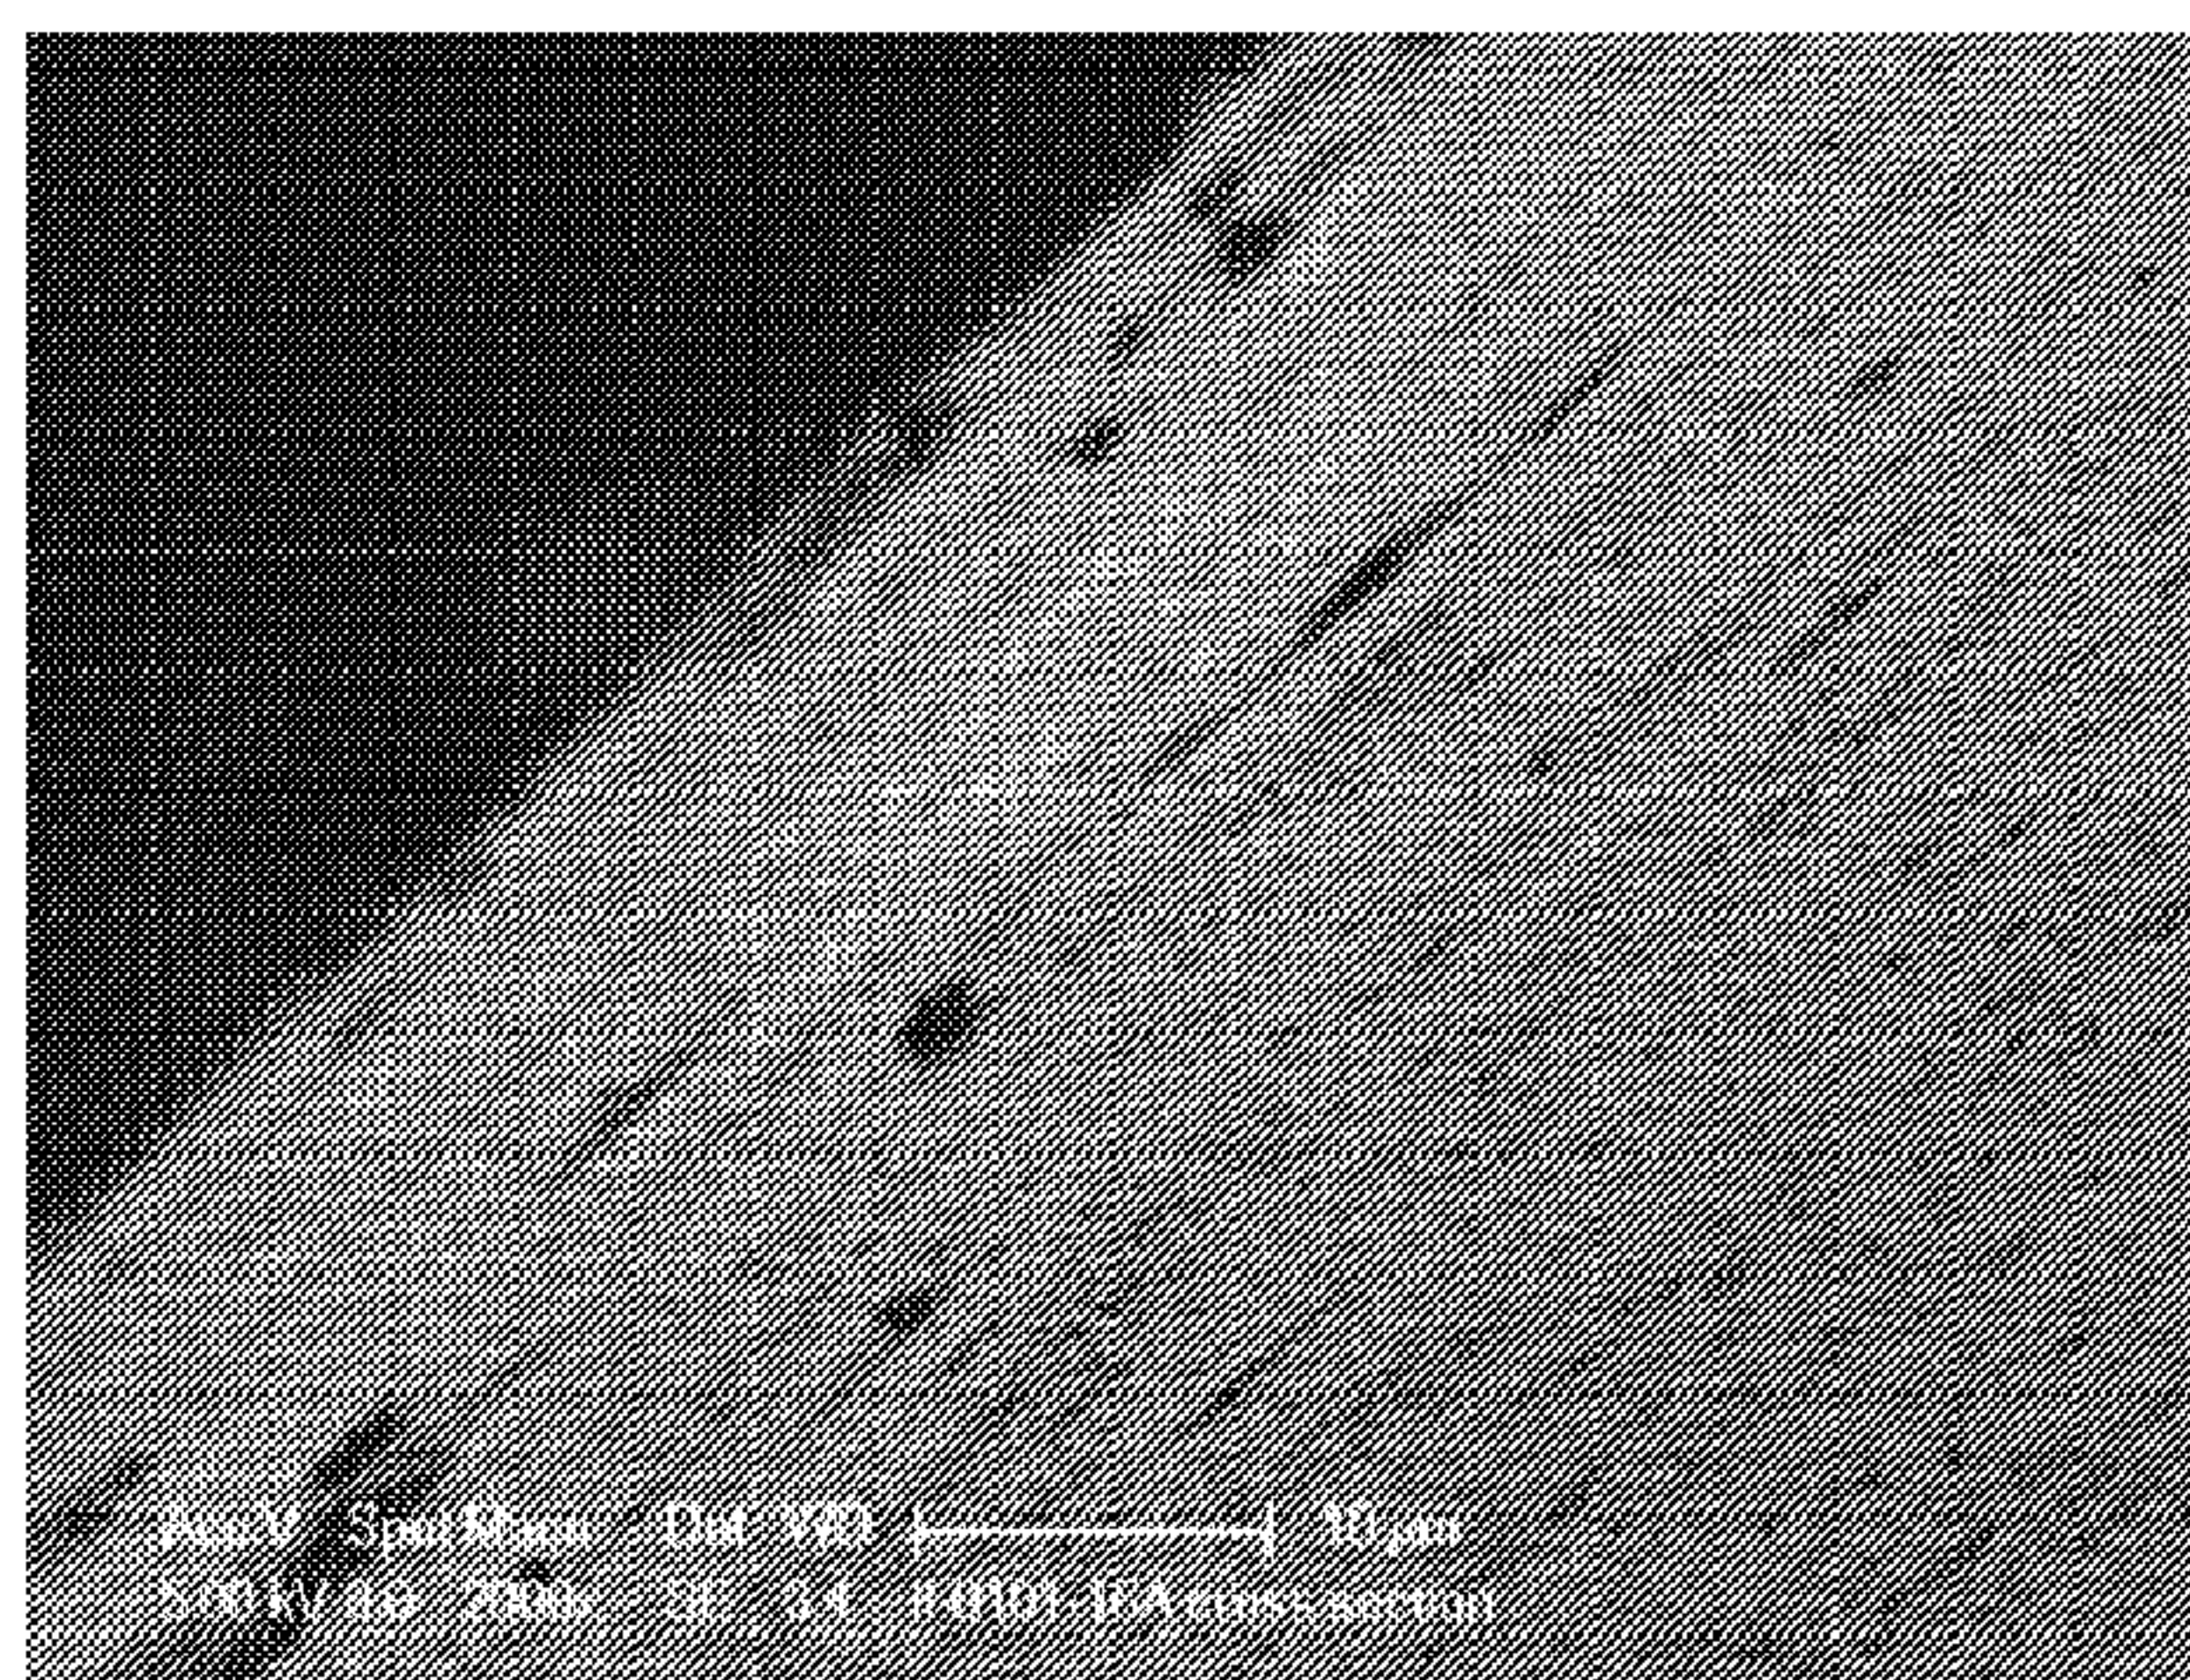
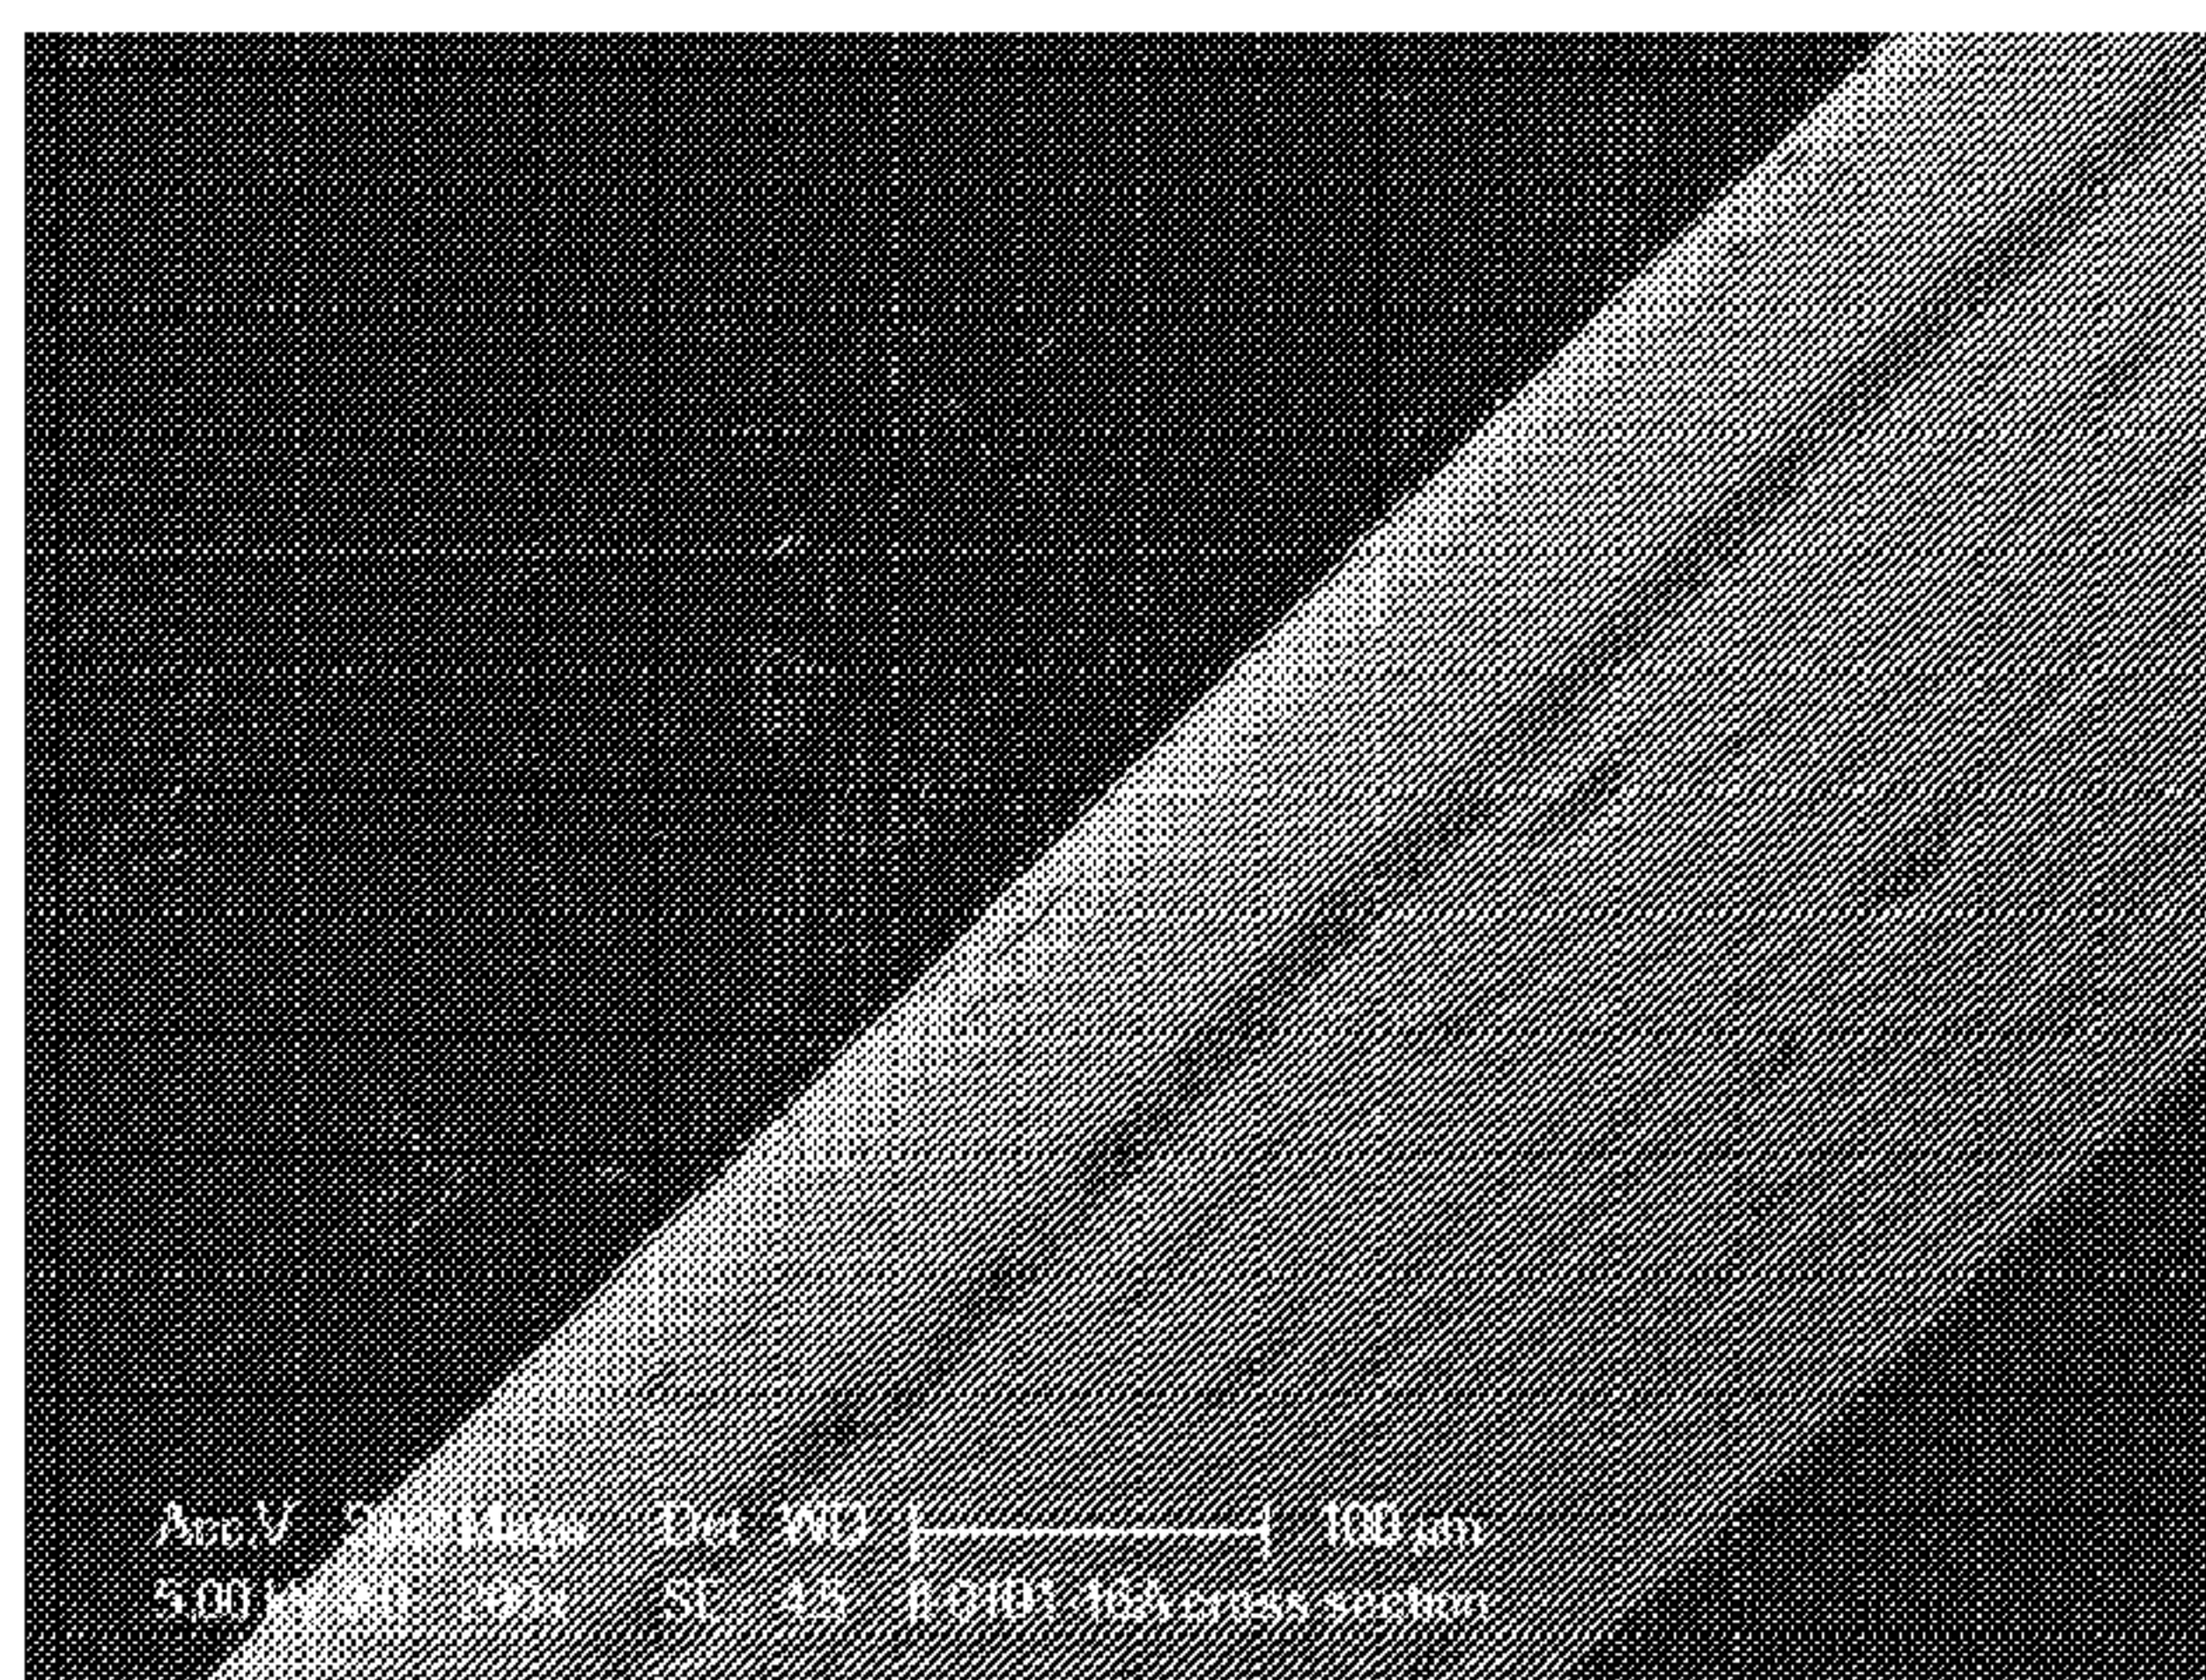


FIG. 3

(57) **Abrégé/Abstract:**

The present invention provides a separator for use in an alkaline electrochemical cell comprising a polymer material and an inert filler comprising zirconium oxide. Examples of polymer materials useful in this invention include ABS polymer material, halogenated alkylene polymer material, and PE polymer material.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
22 March 2012 (22.03.2012)(10) International Publication Number
WO 2012/037426 A3(51) International Patent Classification:
H01M 2/16 (2006.01) *H01M 10/32* (2006.01)(21) International Application Number:
PCT/US2011/051864(22) International Filing Date:
16 September 2011 (16.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/383,553 16 September 2010 (16.09.2010) US
61/383,519 16 September 2010 (16.09.2010) US
61/383,595 16 September 2010 (16.09.2010) US(71) Applicant (for all designated States except US): **ZPOWER, LLC** [US/US]; 4765 Calle Quetzal, Camarillo, CA 93012 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ADAMSON, George, W.** [US/US]; 2067 Lyndhurst Avenue, Camarillo, CA 93010 (US). **SCANLAN, David, John** [US/US]; 1623 Buena Vista Street, Ventura, CA 93001 (US). **BISHOP, Sam** [US/US]; 3363 Shadetree Way, Camarillo, CA 93012 (US). **ZHOU, Hongxia** [CN/US]; 6057 Quebec Avenue, Ann Arbor, MI 48103 (US). **SUN, Ximei** [CN/CN]; 46410 S. Fremont Blvd., Suzhou, Jiangsu (CN). **HUANG, Biying** [US/US]; 46410 S. Fremont Blvd., Fremont, CA 94538 (US). **LIANG, Liang** [CN/US]; 2979 Hickory Street, Yorktown Heights, NY 10598 (US).(74) Agent: **WEBER, Andrew, N.**; Honigman, Miller, Schwartz And Cohn, LLP, 350 East Michigan Avenue, Suite 300, Kalamazoo, MI 49007-3800 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
3 May 2012

(54) Title: ELECTRODE SEPARATOR

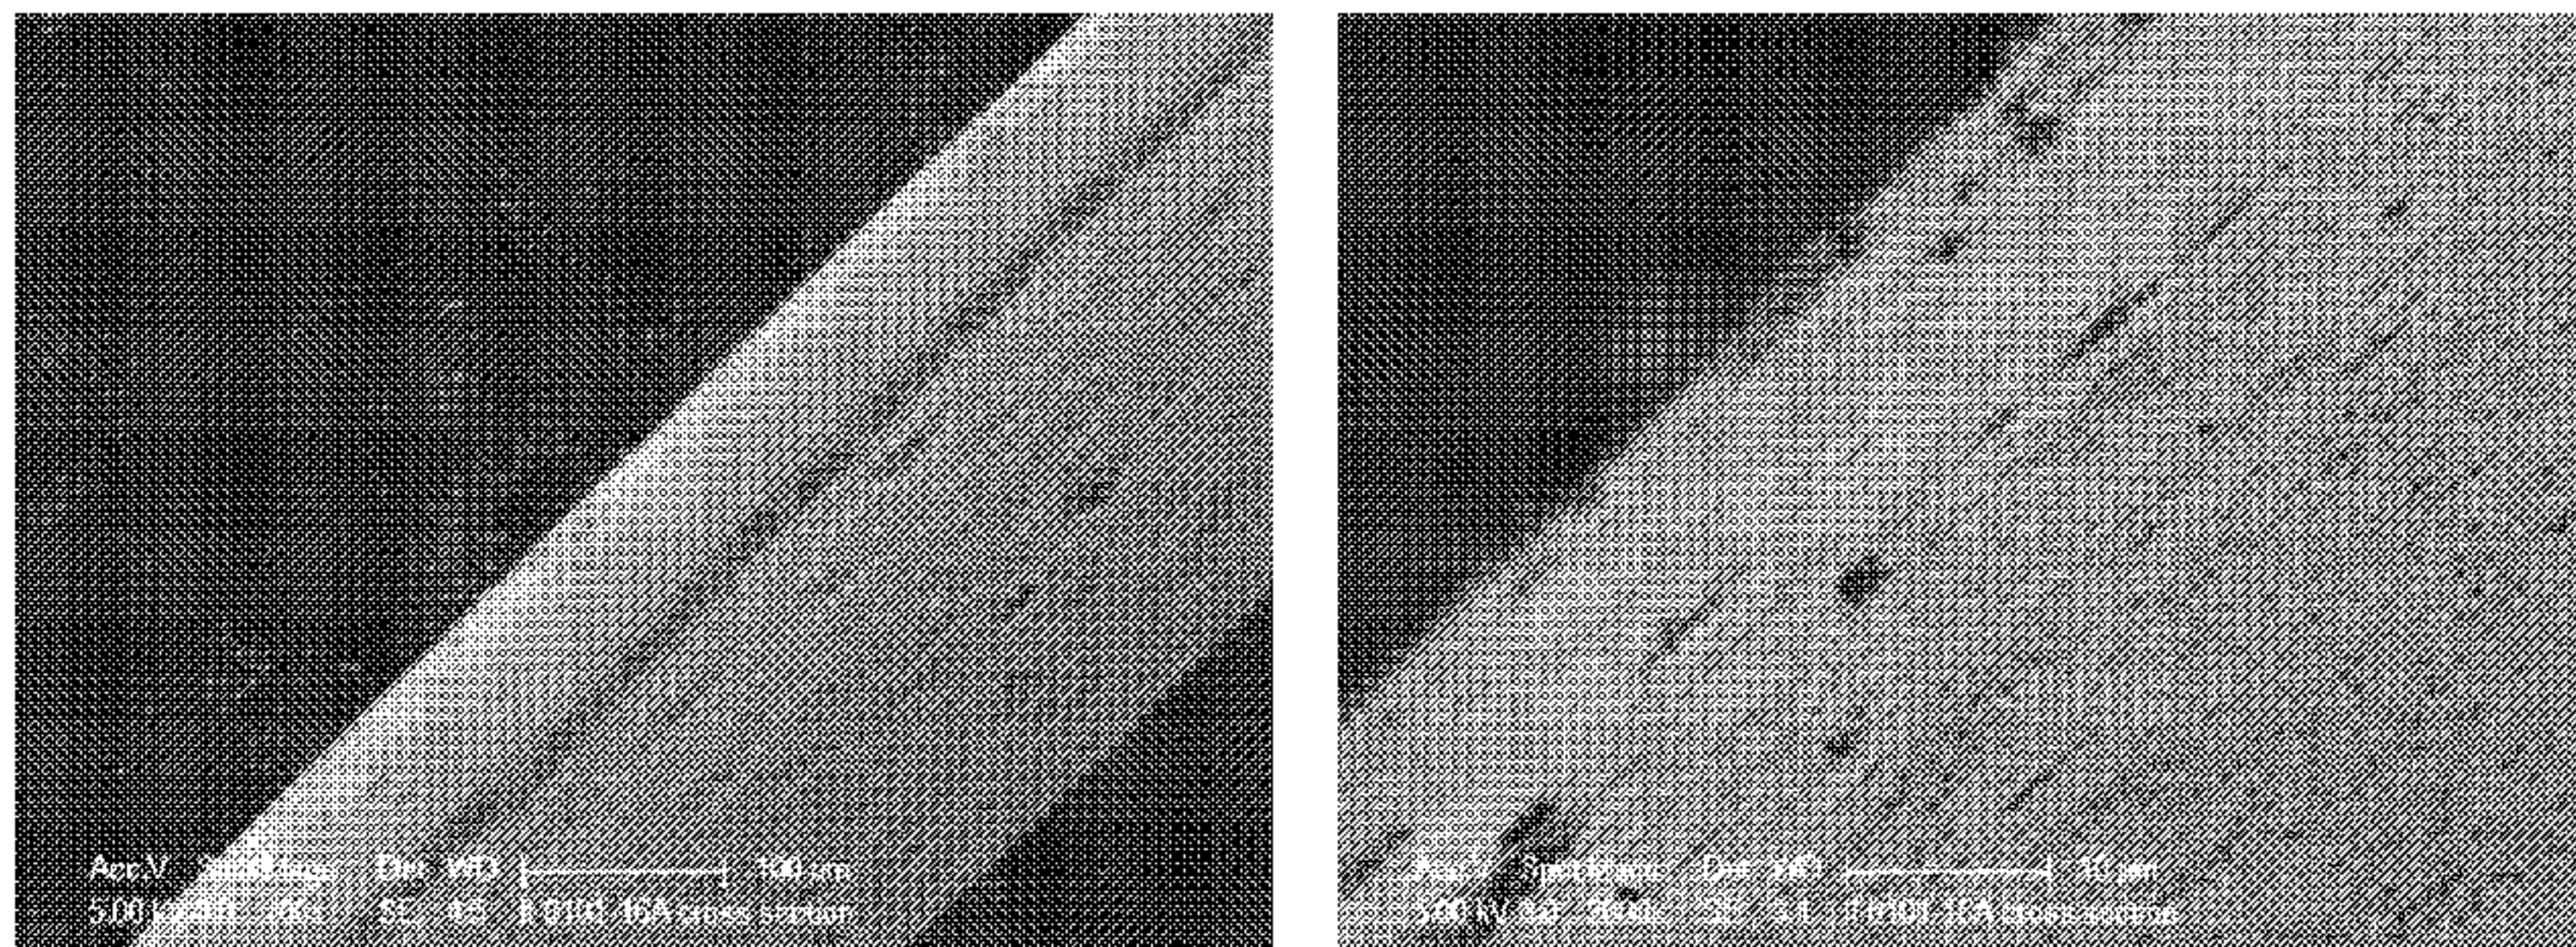


FIG. 3

(57) Abstract: The present invention provides a separator for use in an alkaline electrochemical cell comprising a polymer material and an inert filler comprising zirconium oxide. Examples of polymer materials useful in this invention include ABS polymer material, halogenated alkylene polymer material, and PE polymer material.

WO 2012/037426 A3

ELECTRODE SEPARATOR

CROSS REFERENCE TO RELATED APPLICATION

[0001] This PCT application claims priority to U.S. provisional application nos. 61/383,519; 61/383,553; and 61/383,595; each of which was filed on September 16, 2010. The entire contents of the aforementioned applications are incorporated herein.

FIELD OF THE INVENTION

[0002] This invention is concerned with electric storage batteries, and in particular, with separators for alkaline batteries and methods of making the same.

BACKGROUND

[0003] An electrical storage battery comprises one electrochemical cell or a plurality of electrochemical cells of the same type, the latter typically being connected in series to provide a higher voltage or in parallel to provide a higher charge capacity than provided by a single cell. An electrochemical cell comprises an electrolyte interposed between and in contact with an anode and a cathode. For a storage battery, the anode comprises an active material that is readily oxidized, and the cathode comprises an active material that is readily reduced. During battery discharge, the anode active material is oxidized and the cathode active material is reduced so that electrons flow from the anode through an external load to the cathode and ions flow through the electrolyte between the electrodes.

[0004] Many electrochemical cells used for electrical storage applications also include a separator between the anode and the cathode, which is required to prevent reactants and reaction products present at one electrode from reacting and/or interfering with reactions at the other electrode. To be effective, a battery separator must be electronically insulating and remain so during the life of the battery to avoid battery self-discharge via internal shorting between the electrodes. In addition, a battery separator must be both an effective electrolyte transport barrier and a sufficiently good ionic conductor to avoid excessive separator resistance that substantially lowers the discharge voltage.

[0005] Electrical storage batteries are classified as either "primary" or "secondary" batteries. Primary batteries involve at least one irreversible electrode reaction and cannot be recharged with useful charge efficiency by applying a reverse voltage. Secondary batteries involve relatively reversible electrode reactions and can be recharged with acceptable loss of charge capacity over numerous charge-discharge cycles. Separator requirements for secondary batteries tend to be more demanding, since the separator must survive repeated charge-discharge cycles.

[0006] For secondary batteries comprising a highly oxidative cathode, a highly reducing anode, and an alkaline electrolyte, such as zinc-silver oxide batteries, separator requirements are particularly stringent. The separator must be chemically stable in strongly alkaline solution, resist oxidation when in contact with the highly oxidizing cathode, and resist reduction when in contact with the highly reducing anode. Further, since cathode-derived ions, especially metal oxide ions, can be somewhat soluble in alkaline solutions and be chemically reduced to metal on separator surfaces, the separator must also inhibit transport and/or chemical reduction of metal ions. Otherwise, a buildup of metal deposits within separator pores can increase the separator resistance in the short term and ultimately lead to shorting failure due to formation of a continuous metal path through the separator.

[0007] In addition, because of the strong tendency of anodes to form dendrites during charging, the separator must suppress dendritic growth and/or resist dendrite penetration to avoid failure due to formation of a dendritic short between the electrodes. A related issue with anodes is shape change, in which the central part of the electrode tends to thicken during charge-discharge cycling. The causes of shape change are complicated and not well-understood but apparently involve differentials in current distribution and solution mass transport along the electrode surface. For instance, in zinc-silver oxide batteries, the separator preferably mitigates zinc electrode shape change by exhibiting uniform and stable ionic conductivity and ionic transport properties.

[0008] In order to satisfy the numerous and often conflicting separator requirements for zinc-silver oxide batteries, a separator stack comprised of a plurality of separators that perform specific functions is needed. Some of the required functions are resistance to electrochemical oxidation and silver ion transport from the cathode, and resistance to electrochemical reduction and dendrite penetration from the anode.

[0009] Traditional separators decompose chemically in alkaline electrolytes, which limits the useful life of the battery. Traditional separators are also subject to chemical oxidation by soluble silver ions and electrochemical oxidation in contact with silver electrodes. Furthermore, some traditional separators exhibit low mechanical strength and poor resistance to penetration by dendrites.

[0010] To solve some of the problems caused by traditional separators, new separator materials have been developed.

SUMMARY OF THE INVENTION

[0011] The present invention provides a separator for use in a silver-zinc rechargeable battery comprising a polymer material and zirconium.

[0012] In one aspect, the present invention provides a separator for use in a silver-zinc rechargeable battery comprising a polymer material comprising ABS; and a filler comprising a zirconium oxide material, wherein the separator has a resistance of no more than about 2000 Ohm•cm. In some embodiments, the separator has a pore size of about 5 nm or greater (e.g., about 10 nm or greater, about 15 nm or greater, or about 20 nm or greater). In some embodiments, the polymer material comprises greater than about 5 wt% of ABS (e.g., from about 10 wt% to about 35 wt% or from about 15 wt% to about 30 wt%) by weight of the separator. In some embodiments, the polymer material comprises from about 1 wt% to less than about 50 wt% of ABS (e.g., from about 10 wt% to about 35 wt% or from about 15 wt% to about 30 wt%) by weight of the separator. In some embodiments, the polymer material further comprises a water soluble polymer. For example, the polymer material comprises from about 1 wt% to about 30 wt% of a water soluble polymer (e.g., from about 2.5 wt% to about 10 wt%, from about 4 wt% to about 8 wt%, or from about 5 wt% to about 7 wt%) by weight of the separator. In other examples, the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, polystyrene sulfonic acid, or any combination thereof. In some embodiments, the separator further comprises greater than about 10 wt% of filler (e.g., from about 10.5 wt% to about 90 wt%, from about 40 wt% to about 90 wt%, or from about 50 wt% to about 85 wt%) by weight of the separator. In other embodiments, the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm (e.g., from about 40 nm to about 500 nm or from about 45 nm to about 200 nm). And, in some embodiments, the zirconium oxide material comprises from about 1 mol% to about 10 mol% of yttrium oxide. In other embodiments, the filler is substantially free of titanium. In some embodiments, the separator further comprises a dispersant. For example, the separator comprises from about 0.1 wt% to about 9.99 wt% of dispersant (e.g., from about 1 wt% to about 20 wt% or from about 2 wt% to about 10 wt%) by weight of the separator. In some examples, the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof. In some embodiments, the separator further comprises a substrate. In some examples, the substrate comprises a woven or nonwoven film. In other examples, the substrate comprises a polyolefin. For instance, the polyolefin comprises polyethylene, polypropylene, or any combination thereof.

[0013] Another aspect of the present invention provides a separator for use in a silver-zinc rechargeable battery comprising a polymer material comprising from about 1 wt% to less than about 50 wt% of ABS (e.g., from about 10 wt% to about 35 wt% or from about 15 wt% to about 30 wt%) by weight of the separator; and a zirconium oxide material comprising a powder having a mean grain diameter of from about 40 nm to about 1000nm, wherein the

separator has a resistance of no more than about 2000 Ohm•cm. In some embodiments, the separator further comprises a substrate. In some examples, the substrate comprises a polyolefin. For instance, the polyolefin comprises polyethylene, polypropylene, or any combination thereof. In other embodiments, the polymer material further comprises from about 1 wt% to about 30 wt% of a water soluble polymer (e.g., from about 2.5 wt% to about 10 wt%, from about 4 wt% to about 8 wt%, or from about 5 wt% to about 7 wt%) by weight of the separator. In some examples, the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, polystyrene sulfonic acid, or any combination thereof. In some embodiments, the separator further comprises a dispersant. For example, the separator comprises from about 0.1 wt% to about 9.99 wt% of dispersant (e.g., from about 1 wt% to about 20 wt% or from about 2 wt% to about 10 wt%) by weight of the separator. In some examples, the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof.

[0014] Another aspect of the present invention provides a rechargeable battery comprising a cathode comprising a silver material; an anode comprising a zinc material; and a separator comprising a polymer material comprising ABS; and a zirconium oxide material, wherein the separator comprises greater than 10 wt% of zirconium oxide material. In some embodiments, the polymer material further comprises a water soluble polymer. For example, the polymer material comprises from about 1 wt% to about 30 wt% of the water soluble polymer (e.g., from about 2.5 wt% to about 10 wt%, from about 4 wt% to about 8 wt%, or from about 5 wt% to about 7 wt%) by weight of the separator. In other examples, the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, a polystyrene sulfonic acid, or any combination thereof. In some embodiments, the separator further comprises greater than about 10 wt% of zirconium oxide material (e.g., from about 10.5 wt% to about 90 wt%, from about 40 wt% to about 90 wt%, or from about 50 wt% to about 85 wt%) by weight of the separator. In other embodiments, the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm (e.g., from about 40 nm to about 500 nm or from about 45 nm to about 200 nm). In some embodiments, the separator is substantially free of titanium. In other embodiments, the separator further comprises a dispersant. For example, the separator comprises from about 0.1 wt% to about 9.99 wt% of dispersant (e.g., from about 1 wt% to about 20 wt% or from about 2 wt% to about 10 wt%) by weight of the separator. In other examples, the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof. In some embodiments, the zirconium oxide material comprises from about 1 mol% to about 10 mol% of yttrium oxide. In other embodiments, the separator further comprises a substrate, and the substrate

comprises a woven or nonwoven film. In some examples, the substrate comprises a polyolefin. For instance, the polyolefin comprises polyethylene, polypropylene, or any combination thereof.

[0015] Another aspect of the present invention provides a method of manufacturing a separator for use in a silver-zinc rechargeable battery comprising providing a first mixture comprising an ABS polymer, a dispersant, a solvent, and a zirconium oxide powder; and drying the mixture to generate a separator. In some implementations, the first mixture further comprises from about 0.5 wt% to about 15 wt% of ABS (e.g., from about 2 wt% to about 10 wt% or from about 3 wt% to about 7 wt%) by weight of the first mixture. In other implementations, the first mixture further comprises a water soluble polymer. In some examples, the first mixture comprises from about 0.1 wt% to about 1.5 wt% of the water soluble polymer (e.g., from about 0.5 wt% to about 1.3 wt%) by weight of the first mixture. In other examples, the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, polystyrene sulfonic acid, or any combination thereof. In some implementations, the zirconium oxide powder has a mean grain diameter of greater than about 30 nm (e.g., from about 40 nm to about 1000nm). In some examples, the zirconium oxide powder is substantially free of titanium. In other implementations, the first mixture comprises from about 0.005 wt% to about 1 wt% of dispersant. In some examples, the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof. In some implementations, the zirconium oxide powder comprises from about 1 mol% to about 10 mol% of yttrium oxide. In other implementations, the first mixture comprises from about 50 wt% to about 90 wt% of solvent (e.g., from about 60 wt% to about 85 wt%) by weight of the first mixture. In some examples, the solvent comprises a polar aprotic solvent. For instance, the polar aprotic solvent comprises 2-butanone, acetone, or any combination thereof. In other instances, the solvent further comprises 1-methyl-2-pyrrolidinone. Some implementations further comprise casting the first mixture onto a surface. And, in some examples, the surface comprises a film (e.g., a woven or nonwoven film) comprising a polyolefin comprising polyethylene, polypropylene, or any combination thereof.

[0016] Another aspect of the present invention provides a separator for use in a silver-zinc rechargeable battery comprising a polymer material comprising PVDF; and a filler comprising zirconium oxide, wherein the separator has a resistance of no more than about 20 Ohm•cm. In some embodiments, the polymer material comprises PVDF, and the PVDF comprises a homopolymer, a copolymer, or any combination thereof. For example, the PVDF comprises a copolymer selected from a block copolymer, an alternating copolymer, a

statistical copolymer, a graft copolymer, or any combination thereof. In other examples, the PVDF comprises a copolymer, and the copolymer comprises a VDF monomer and monomer comprising a halogenated C₃₋₅ aliphatic. And, in some instances, the halogenated C₃₋₅ aliphatic monomer comprises hexafluoropropylene. In some embodiments, the PVDF comprises a homopolymer or copolymer either of which has a mean molecular weight of about 200,000 amu or greater (e.g., about 350,000 amu or greater or from about 400,000 to about 700,000 amu). In other embodiments, the separator further comprises greater than about 45 wt% of zirconium oxide (e.g., greater than about 49 wt% or from about 50 wt% to about 90 wt%) by weight of the separator. In some embodiments, the zirconium oxide comprises a powder comprising particles having a mean grain diameter of less than about 1 micron (e.g., less than about 0.75 microns or from about 500 nm to about 700 nm). And, in some embodiments, the zirconium oxide further comprises yttria. For example, the zirconium oxide further comprises from about 1 mol% to about 10 mol% of yttria.

[0017] Another aspect of the present invention provides a rechargeable battery comprising a cathode comprising a silver material; an anode comprising a zinc material; and a separator comprising a polymer material comprising PVDF and zirconium oxide powder. In some embodiments, the PVDF comprises a homopolymer, a copolymer, or any combination thereof. For example, the PVDF comprises a copolymer selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof. In some examples, the PVDF comprises a copolymer comprising a VDF monomer and a halogenated C₃₋₅ aliphatic monomer. For instance the halogenated C₃₋₅ aliphatic monomer comprises hexafluoropropylene. In some embodiments, the PVDF comprises a homopolymer or a copolymer either of which has a mean molecular weight of about 200,000 amu or greater (e.g., about 350,000 amu or greater or from about 400,000 to about 700,000 amu). In other embodiments, the separator further comprises greater than about 45 wt% of zirconium oxide powder (e.g., greater than about 49 wt% or from about 50 wt% to about 90 wt%) by weight of the separator. In some embodiments, the zirconium oxide powder comprises a mean grain diameter of less than about 1 micron (e.g., less than about 0.75 microns or from about 500 nm to about 700 nm). And, in some embodiments, the zirconium oxide powder further comprises yttria. For example, the zirconium oxide powder comprises from about 1 mol% to about 10 mol% of yttria.

[0018] Another aspect of the present invention provides a method of manufacturing a separator for use in a silver-zinc rechargeable battery comprising mixing a PVDF polymer material with an aprotic solvent to form a first mixture; mixing the first mixture with a filler comprising zirconium oxide powder to form a second mixture; and drying the mixture to

generate a separator. In some implementations, the PVDF polymer material comprises a homopolymer, a copolymer, or any combination thereof. For example, the PVDF polymer material comprises a PVDF-copolymer, and the PVDF-copolymer is selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof. In some examples, the PVDF-copolymer comprises a VDF monomer and a halogenated C₃₋₅ aliphatic monomer. And, in some instances, the halogenated C₃₋₅ aliphatic monomer comprises hexafluoropropylene. In other implementations, the second mixture comprises greater than about 10 wt% zirconium oxide (e.g., from about 11 wt% to about 50 wt%, or from about 50 wt% to about 90 wt%) by weight of the second mixture. In some embodiments, the zirconium oxide further comprises a powder. For example, the zirconium oxide comprises a powder comprising a mean grain diameter of less than about 1 micron (e.g., less than about 0.75 microns or from about 500 nm to about 700 nm). In some implementations, the aprotic solvent comprises acetone, dimethyl sulfoxide, ethyl acetate, dichloromethane, tetrahydrofuran, dimethylformamide, acetonitrile, or any combination thereof. For instance, the aprotic solvent comprises acetone. Some implementations further comprising casting the second mixture to form a film. For example, the mixture is cast to give a film having a mean thickness of from about 0.01 inches to about 0.03 inches. Some implementations further comprise adding a phthalate to the second mixture. And, some implementations further comprise washing the second mixture with a washing solvent to remove the phthalate. In some examples, the phthalate is dibutyl phthalate. In other examples, the washing solvent comprises an alcohol (e.g., isopropyl alcohol, methanol, ethanol, butanol, or any combination thereof).

[0019] Another aspect of the present invention provides separator for use in a silver-zinc rechargeable battery comprising a polyolefin polymer material having a mean molecular weight of at least about 500,000 amu; and a filler comprising zirconium oxide, wherein the zirconium oxide comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler is substantially free of titanium. In some embodiments, the zirconium oxide comprises a powder having a surface area of at least about 5 m²/g. For example, the zirconium oxide comprises a powder having a surface area of from about 6 m²/g to about 15 m²/g. In other embodiments, the zirconium oxide comprises a powder having a mean grain diameter of less than about 1.5 microns. For example, the zirconium oxide comprises a powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns. In some embodiments, the zirconium oxide comprises from about 2.5 mol% to about 4 mol% of yttrium oxide. In other embodiments, the polyolefin polymer material has a mean molecular weight of at least about 1,000,000 amu. In some embodiments, the separator further comprises about 80 wt%

or more of the filler and about 20 wt% or less of the polyolefin polymer material. In other embodiments, the polyolefin polymer material comprises polyethylene, polypropylene, or any combination thereof.

[0020] Another aspect of the present invention provides a rechargeable battery comprising cathode comprising a silver material, an anode comprising a zinc material, and a separator comprising a polyolefin polymer material having a mean molecular weight of at least about 500,000 amu, and a filler comprising zirconium oxide, wherein the zirconium oxide comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler is substantially free of titanium. In some embodiments, the zirconium oxide comprises a powder having a surface area of at least about 5 m²/g. For example, the zirconium oxide comprises a powder having a surface area of from about 6 m²/g to about 15 m²/g. In other embodiments, the zirconium oxide comprises a powder having a mean grain diameter of less than about 1.5 microns. For example, the zirconium oxide comprises a powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns. In some embodiments, the zirconium oxide comprises from about 2.5 mol% to about 4 mol% of yttrium oxide. In other embodiments, the polyolefin polymer material has a mean molecular weight of at least about 1,000,000 amu. In some embodiments, the separator further comprises about 80 wt% or more of the filler and about 20 wt% or less of the polyolefin polymer material. In other embodiments, the polyolefin polymer material comprises polyethylene, polypropylene, or any combination thereof.

[0021] Another aspect of the present invention provides a method of manufacturing a separator for use in silver zinc rechargeable batteries comprising combining a polyolefin polymer material and a filler to generate a mixture; and processing the mixture to form a separator, wherein the polyolefin polymer material has a mean molecular weight of at least about 500,000 amu, the filler comprises zirconium oxide, wherein the zirconium oxide comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler is substantially free of titanium. In some implementations, the zirconium oxide comprises a powder having a surface area of at least about 5 m²/g. For example, the zirconium oxide comprises a powder having surface area of from about 6 m²/g to about 15 m²/g. In other implementations, the zirconium oxide comprises a powder having a mean grain diameter of less than about 1.5 microns. For example, the zirconium oxide comprises powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns. In some implementations, the zirconium oxide comprises from about 2.5 mol% to about 4 mol% of yttrium oxide. In others, the polyolefin polymer material comprises a mean molecular weight of at least about 1,000,000 amu. And, in some implementations, the mixture is processed to form a separator that

comprises 80 wt% or more of the filler and 20 wt% or less of the polyolefin polymer. In other implementations, the polyolefin polymer comprises polyethylene, polypropylene, or any combination thereof. Some implementations further comprise combining a plasticizer and the polyolefin polymer. For example, the plasticizer comprises a petroleum oil, a lubricating oil, a fuel oil, a tall oil, a linseed oil or any combination thereof. And, in some implementations, the mixture has a pH of less than 9.

BRIEF DESCRIPTION OF THE FIGURES

[0022] FIGURE 1 is schematic diagram of an example embodiment of a rechargeable battery of the present invention illustrating charge and discharge current as well as the stacking order for battery components.

[0023] FIGURE 2A is an illustration of a synthetic scheme for generating an exemplary ABS polymer material comprising a zirconium oxide material.

[0024] FIGURE 2B is an illustration of a synthetic scheme for generating another exemplary ABS polymer material comprising a water soluble polymer (PVP) and zirconium oxide material.

[0025] FIGURE 3 is Scanning Electron Microscope images of an exemplary separator of the present invention comprising ABS and zirconium oxide.

[0026] FIGURE 4A is a cross-sectional view of an exemplary separator of the present invention comprising ABS, zirconium oxide, and a substrate (Solupor).

[0027] FIGURE 4B is Scanning Electron Microscope images of an exemplary separator of the present invention comprising ABS, zirconium oxide, and a substrate (Solupor).

[0028] FIGURE 5 is a graphical plot of separator resistivity as a function of zirconium oxide content for exemplary ABS separators of the present invention.

[0029] FIGURE 6 is a graphical plot of separator resistivity as a function of zirconium oxide mean grain diameter for exemplary ABS separators of the present invention.

[0030] FIGURE 7 is a graphical plot of separator resistivity as a function of zirconium oxide mean grain diameter for exemplary ABS separators of the present invention comprising mixtures of two zirconium oxide powders having 40 nm and 1000 nm mean grain diameters.

[0031] FIGURE 8 is a graphical plot of separator resistivity as a function of zirconium oxide content for exemplary ABS separators of the present invention comprising substrates.

[0032] FIGURE 9 is a graphical plot of separator resistivity as a function of PVP content for exemplary ABS separators of the present invention.

[0033] FIGURE 10A is a photograph of a reference electrode on an apparatus that was used for characterizing the conductivity properties of separators of the present invention.

[0034] FIGURE 10B is a photograph of the reference electrodes on an apparatus that was used for characterizing the conductivity properties of separators of the present invention.

[0035] FIGURE 11 is schematic diagram of an example embodiment of a rechargeable battery of the present invention illustrating charge and discharge current as well as the stacking order for battery components.

[0036] FIGURE 12 is a graphical plot of voltage, current, and capacity as a function of time for an electrochemical cell of the present invention comprising a PVDF separator displayed.

[0037] FIGURE 13 is a graphical plot of voltage and current as a function of time for an electrochemical cell of the present invention comprising a PVDF separator.

[0038] FIGURE 14 is a graphical plot of capacity as a function of cycle number for an electrochemical cell of the present invention comprising a PVDF separator.

[0039] FIGURE 15A is a photograph of an exemplary PVDF separator that was treated with an alkaline solution.

[0040] FIGURE 15B is a photograph of an exemplary PVDF separator that was treated with DBP and an alkaline solution.

[0041] FIGURE 16 is a graphical plot of voltage, current, and capacity as a function of time for an electrochemical cell of the present invention comprising a PVDF separator treated with DBP that is continuously charged and discharged.

[0042] FIGURE 17 is a graphical plot of voltage and current as a function of time for an electrochemical cell of the present invention comprising a PVDF separator treated with DBP that is continuously charged and discharged.

[0043] FIGURE 18 is a bar graph illustrating the gassing properties, measured as percent volume gain, of separator materials.

[0044] FIGURE 19 is a bar graph illustrating the gassing properties, measured as mean percent volume gain, of separator materials.

[0045] FIGURE 20 is a graphical plot of voltage and current as a function of time for the electrochemical cell of the present invention comprising a PE separator that is continuously charged and discharged from hours 1900 to 2550 as well as graphical plots of cell capacity, EOC current, EOC voltage, average charge voltage, average discharge voltage, and charge time as a function of charge cycle number.

[0046] FIGURE 21 is a graphical plot of voltage and current as a function of time for an electrochemical cell of the present invention comprising a PE separator that is continuously charged and discharged from hours 950 to 1550 as well as graphical plots of cell capacity, EOC current, EOC voltage, average charge voltage, average discharge voltage, and charge time as a function of charge cycle number.

[0047] These figures may not be to scale and some features may have been enlarged for better depiction of the features and operation of the invention. Furthermore, these figures are by way of example and are not intended to limit the scope of the present invention.

DETAILED DESCRIPTION

[0048] The present invention provides a separator for use in a silver-zinc rechargeable battery comprising a polymer material comprising ABS and a filler comprising a zirconium oxide material, wherein the separator has a resistance of no more than about 2000 Ohm•cm.

[0049] I. DEFINITIONS

[0050] As used herein, the term "battery" encompasses electrical storage devices comprising one electrochemical cell or a plurality of electrochemical cells. A "secondary battery" is rechargeable, whereas a "primary battery" is not rechargeable. For secondary batteries of the present invention, a battery anode is designated as the positive electrode during discharge, and as the negative electrode during charge.

[0051] As used herein, "about" unless otherwise described means plus or minus 10 percent.

[0052] As used herein, "substantially resistant to oxidation by silver oxide" refers to a chemical property of a separator (e.g., a single layered separator or a multilayered separator) or an active layer thereof, wherein the separator or active layer is substantially inert to chemical oxidation by silver oxide. For example, the separator or active layer may be inert to chemical oxidation by silver oxide for a period of at least 1 day and a temperature of at least 40 °C (e.g., at least 45 °C, at least 50 °C, or at least 60 °C).

[0053] As used herein, "cross-link" or "cross-linked" refers to a covalent bond between two or more polymer chains, or a structural property wherein two or more polymer chains are covalently bonded together. Cross-links can be formed by chemical reactions that are initiated by heat, pressure, or radiation. Cross-links typically bond one or more chemical moieties attached to a polymer backbone with one or more chemical moieties attached to the backbone of another polymer backbone of the same or different composition.


[0054] As used herein, "independently cross-linked" and "internally cross-linked" are used interchangeably and refer to a structural property of an active layer comprising a polymer material (e.g., an ABS polymer material, an ABS-PVP polymer material, a PVDF polymer material, a PVDF-co-HFP copolymer material, PE polymer material, or other polymer material), wherein at least one polymer chain (e.g., an ABS polymer material, an ABS-PVP polymer material, a PVDF polymer material, a PVDF-co-HFP copolymer material, PE polymer material, or other polymer material) in the active layer is cross-linked with another polymer chain within the same active layer. For example, an independently cross-linked first active layer, which comprises a PVDF polymer material is one in which a PVDF polymer

chain in the first active layer is cross-linked with another polymer chain in the first active layer. Or, an independently cross-linked second active layer, which comprises, for example, a PSA polymer material is one in which a PSA polymer chain in the second active layer is cross-linked with another polymer chain in the second active layer. It is noted that the cross-links present in an independently cross-linked active layer include intra-layer bonds that join two polymer chains of approximately the same chemical composition and intra-layer bonds that join two polymer chains of different chemical composition. It is also noted that "independently cross-linked" active layers can undergo further cross-linking that cross-links polymer chains in one active layer with polymer chains in one or more adjacent active layers.

[0055] As used herein, "ABS" or "acrylonitrile butadiene styrene" refers to a copolymer having a chemical formula of $(C_8H_8)_x \cdot (C_4H_6)_y \cdot (C_3H_3N)_z$, wherein x, y, and z are the numbers of each of the different types of monomers present in the ABS polymer. ABS may be formed by copolymerizing styrene and acrylonitrile in the presence of polybutadiene.

[0056] As used herein, "polyolefin" refers to a polymer produced from a simple olefin (also called an alkene with the general formula C_nH_{2n}) as a monomer. For example, polyethylene is the polyolefin produced by polymerizing the olefin ethylene. Polyolefins also include copolymers of different olefins such as copolymers of polyethylene and polyporpylene.

[0057] As used herein, "PVP" or "polyvinylpyrrolidone" refers to a water soluble polymer typically generated from the monomer N-vinylpyrrolidone. PVP has the chemical formula

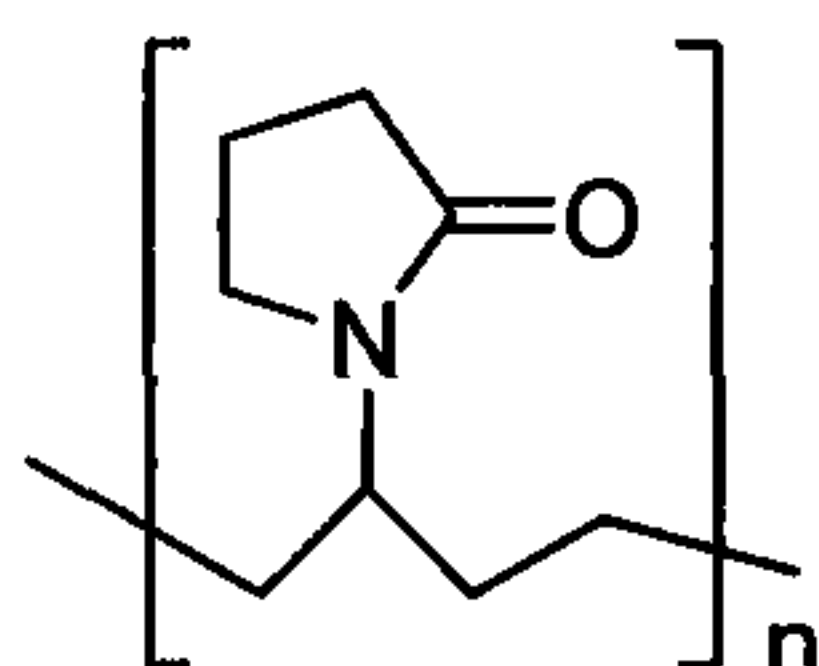

wherein n is the number of monomer units in the PVP chain.

[0058] As used herein, "polyvinyl alcohol" and "PVA" are used interchangeably to refer to polymers, solutions for preparing polymers, and polymer coatings. Use of these terms in no way implies the absence of other constituents. These terms also encompass substituted and co-polymerized polymers. A substituted polymer denotes one for which a substituent group, a methyl group, for example, replaces a hydrogen on the polymer backbone.

[0059] As used herein the term "aliphatic" encompasses the terms alkyl, alkenyl, alkynyl, each of which being optionally substituted as set forth below.


[0060] As used herein, an "alkyl" group refers to a saturated aliphatic hydrocarbon group containing 1–12 (e.g., 1–10, 1–8, 1–6, or 1–4) carbon atoms. An alkyl group can be straight or branched. Examples of alkyl groups include, but are not limited to, methyl, ethyl, propyl, isopropyl, butyl, isobutyl, *sec*-butyl, *tert*-butyl, *n*-pentyl, *n*-heptyl, or 2-ethylhexyl. An alkyl

group can be substituted (i.e., optionally substituted) with one or more substituents such as halo, cycloaliphatic [e.g., cycloalkyl or cycloalkenyl], heterocycloaliphatic [e.g., heterocycloalkyl or heterocycloalkenyl], aryl, heteroaryl, or alkoxy, without limitation.

[0061] As used herein, an "alkenyl" group refers to an aliphatic carbon group that contains 2–8 (e.g., 2–12, 2–10, 2–6, or 2–4) carbon atoms and at least one double bond. Like an alkyl group, an alkenyl group can be straight or branched. Examples of an alkenyl group include, but are not limited to, allyl, isoprenyl, 2-butenyl, and 2-hexenyl. An alkenyl group can be optionally substituted with one or more substituents such as halo, cycloaliphatic [e.g., cycloalkyl or cycloalkenyl], heterocycloaliphatic [e.g., heterocycloalkyl or heterocycloalkenyl], aryl, heteroaryl, or alkoxy, without limitation.


[0062] As used herein, an "alkynyl" group refers to an aliphatic carbon group that contains 2–8 (e.g., 2–12, 2–6, or 2–4) carbon atoms and has at least one triple bond. An alkynyl group can be straight or branched. Examples of an alkynyl group include, but are not limited to, propargyl and butynyl. An alkynyl group can be optionally substituted with one or more substituents such as those described above in the definitions of alkyl and/or alkenyl.

[0063] As used herein, "halogenated polyethylene" refers to polymers, solutions for preparing polymers, and polymer coatings having the following monomer unit given as Formula (A):

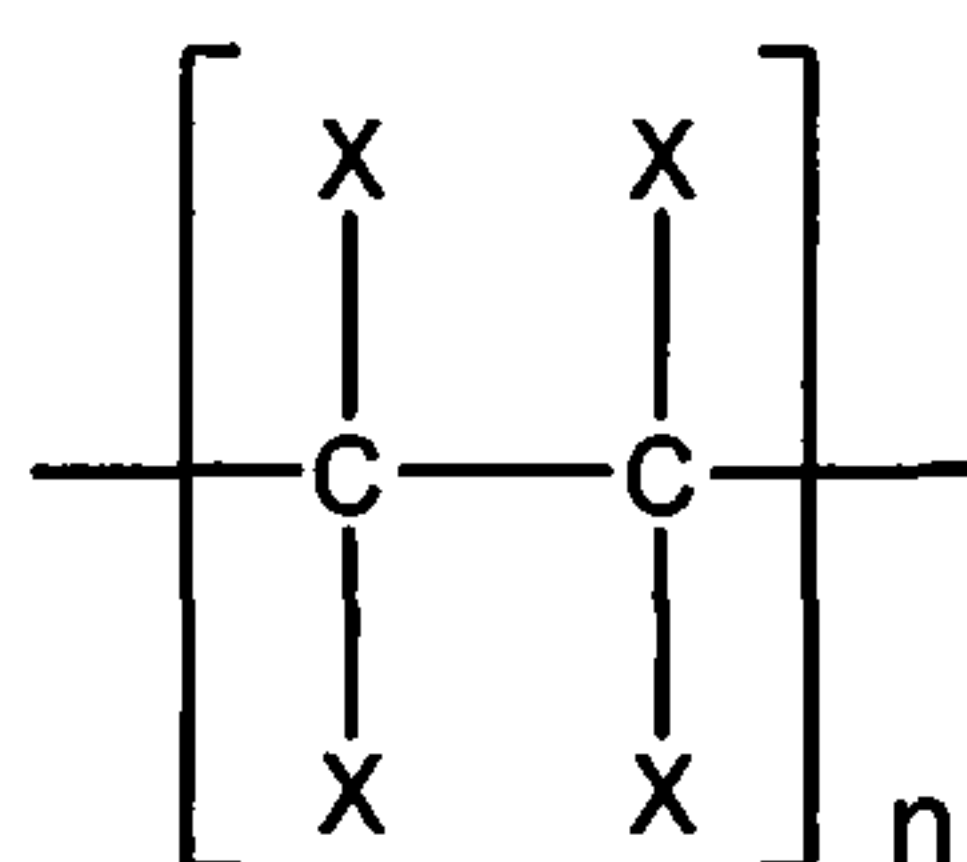

(A)

wherein X is a halogen (e.g., F, Br, Cl, I) or H, wherein at least one X is halogen; and n is an integer from 1 to greater than 2000 (e.g., n is sufficient to impart the polymer material with a mean molecular weight of greater than about 300,000 amu). 'Halogenated polyethylene' is used to refer to polymers, solutions for preparing polymers, and polymer coatings. Use of these terms in no way implies the absence of other constituents, such as co-polymers. The definition of halogenated polyethylenes includes halogenated polyvinylidenes. Examples of halogenated polyethylenes include polytetrafluoroethylene (PFTE), polychlorotrifluoroethylene (PCFTE), and polyvinylidene chloride (PVDC). Another example of halogenated polyethylene is polyvinylidene fluoride (PVDF), which has the repeating VDF monomer structure of Formula (B), shown below.

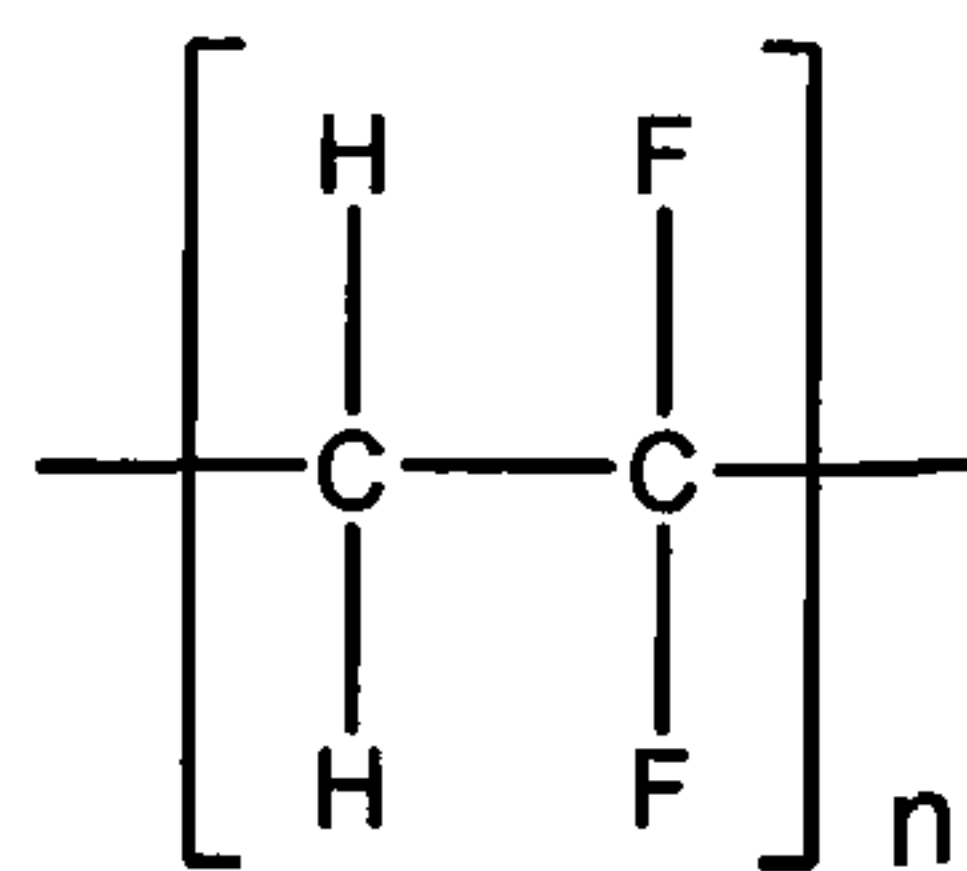


(B)

These terms also encompass polyethylene copolymers.

[0064] As used herein, "polytetrafluoroethylene" and "PTFE" are used interchangeably to refer to polymers, solutions for preparing polymers, and polymer coatings. Use of these terms in no way implies the absence of other constituents. These terms also encompass PTFE copolymers.

[0065] As used herein, "VDF" and "vinyl difluoride" are used interchangeably to refer to a PVDF monomer unit or a monomer unit in a PDVF copolymer (e.g., PVDF-co-HFP).

[0066] As used herein, "HFP" and "hexafluoropropylene" are used interchangeably to refer to a monomer unit having the structure

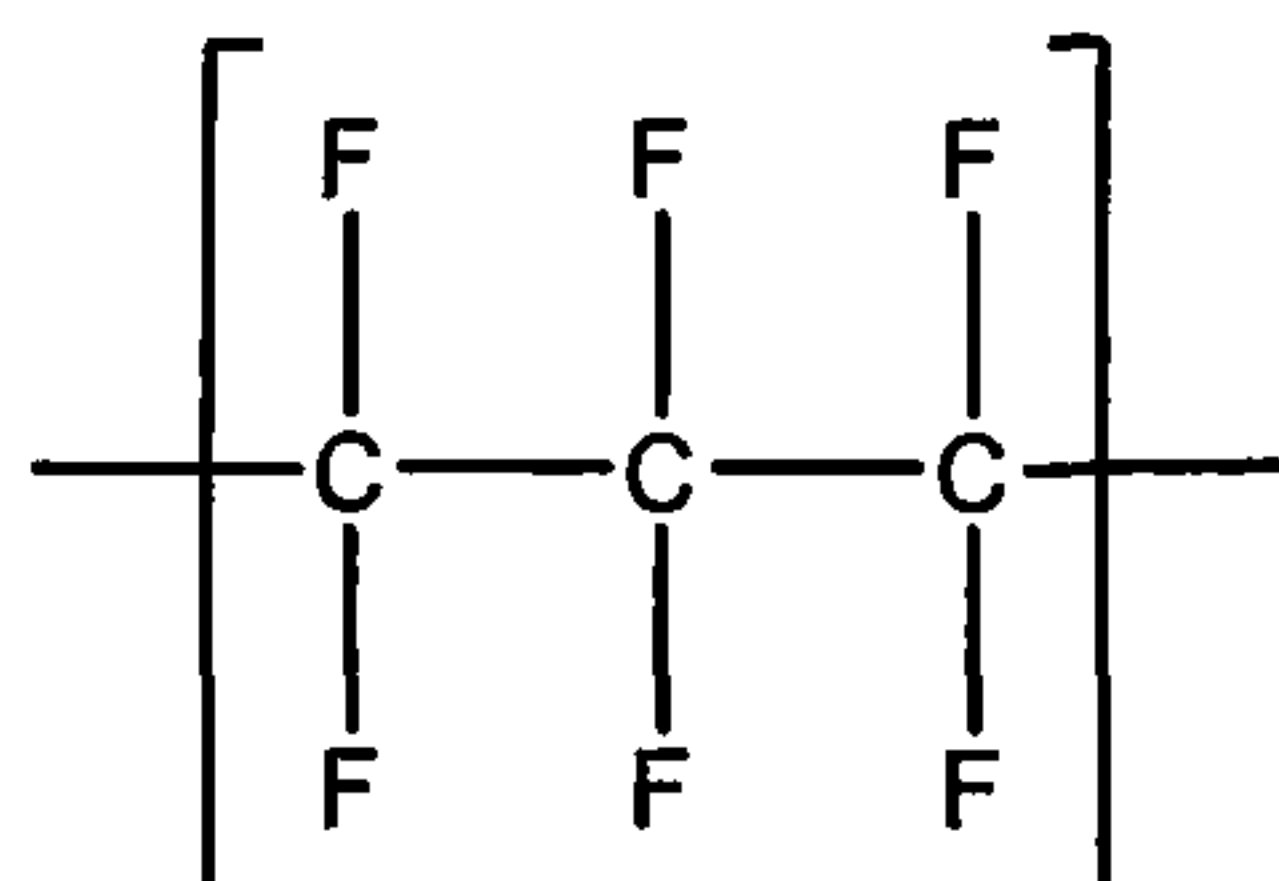

[0067] The term "battery" encompasses electrical storage devices comprising one electrochemical cell or a plurality of electrochemical cells. A "secondary battery" is rechargeable, whereas a "primary battery" is not rechargeable. For secondary batteries of the present invention, a battery anode is designated as the positive electrode during discharge, and as the negative electrode during charge.

[0068] The term "alkaline battery" refers to a primary battery or a secondary battery, wherein the primary or secondary battery comprises an alkaline electrolyte.

[0069] As used herein, an "electrolyte" refers to a substance that behaves as an electrically conductive medium. For example, the electrolyte facilitates the mobilization of electrons, anions and/or cations in the cell. Electrolytes include mixtures of materials such as aqueous solutions of alkaline agents. Such alkaline electrolytes can also comprise additives such as buffers. For example, an alkaline electrolyte may comprise a buffer comprising a borate or a phosphate. Example alkaline electrolytes may include, without limitation aqueous KOH, aqueous NaOH, or the liquid mixture of KOH in a polymer.

[0070] As used herein, "alkaline agent" refers to a base or ionic salt of an alkali metal (e.g., an aqueous hydroxide of an alkali metal). Furthermore, an alkaline agent forms hydroxide

ions when dissolved in water or other polar solvents. Example alkaline electrolytes may include without limitation LiOH, NaOH, KOH, CsOH, RbOH, or combinations thereof.

[0071] A "cycle" or "charge cycle" refers to a consecutive charge and discharge of a cell or a consecutive discharge and charge of a cell, either of which includes the duration between the consecutive charge and discharge or the duration between the consecutive discharge and charge. For example, a cell undergoes one cycle when, freshly prepared, it is discharged to about 100% of its DOD and re-charged to about 100% of its state of charge (SOC). In another example, a freshly prepared cell undergoes 2 cycles when the cell is:

- 1.) Cycle 1: discharged to about 100% of its DOD and re-charged to about 100% SOC; immediately followed by
- 2.) Cycle 2: a second discharge to about 100% of its DOD and re-charged to about 100% SOC.

[0072] It is noted that this process may be repeated to subject a cell to as many cycles as is desired or practical.

[0073] As used herein, the terms "silver material" or "silver powder" refer to any silver compound such as Ag, AgO, Ag₂O, Ag₂O₃, AgOH, AgOOH, AgONa, AgCuO₂, AgFeO₂, AgMnO₂, Ag(OH)₂, hydrates thereof, or any combination thereof. Note that 'hydrates' of silver include hydroxides of silver. Because it is believed that the coordination sphere surrounding a silver atom is dynamic during charging and discharging of the cell wherein the silver serves as a cathode, or when the oxidation state of the silver atom is in a state of flux, it is intended that the term 'silver' or 'silver material' encompass any of these silver oxides and hydrates (e.g., hydroxides). Terms 'silver' or 'silver material' also includes any of the abovementioned species that are doped and/or coated with dopants and/or coatings that enhance one or more properties of the silver. Exemplary dopants and coatings are provided below. In some examples, silver or silver material includes a silver oxide further comprising an indium or aluminum dopant or coating. In some examples, silver or silver material includes a silver oxide further comprising Group 13 elements. In some examples, silver or silver material includes a silver oxide further comprising a trivalent dopant. Note that the term "oxide" used herein does not, in each instance, describe the number of oxygen atoms present in the silver or silver material. For example, a silver oxide may have a chemical formula of AgO, Ag₂O₃, or a combination thereof. Furthermore, silver can comprise a bulk material or silver can comprise a powder having any suitable mean particle diameter.

[0074] As used herein, a "dopant" or "doping agent" refers to a chemical compound that is added to a substance in low concentrations in order to alter the optical/electrical properties of the semiconductor. For example, a dopant may be added to the powder active material of a

cathode to improve its electronic properties (e.g., reduce its impedance and/or resistivity or improve a cell's cycle life where the cathode is employed in said cell). In other examples, doping occurs when one or more atoms of a crystal lattice of a bulk material is substituted with one or more atoms of a dopant.

[0075] As used herein, the term "nanometer" and "nm" are used interchangeably and refer to a unit of measure equaling 1×10^{-9} meters.

[0076] As used herein, "Ah" refers to Ampere (Amp) Hour and is a scientific unit for the capacity of a battery or electrochemical cell. A derivative unit, "mAh" represents a milliamp hour and is 1/1000 of an Ah.

[0077] As used herein, "S" refers to Siemens, and is the scientific unit of conductivity, the ability of a material to carry a current. Conductivity may be expressed in specific conductivity units, S/cm.

[0078] As used herein, "maximum voltage" or "rated voltage" refers to the maximum voltage an electrochemical cell can be charged without interfering with the cell's intended utility. For example, in several zinc-silver oxide electrochemical cells that are useful in portable electronic devices, the maximum voltage is less than about 3.0 V (e.g., less than about 2.8 V, less than about 2.5 V, about 2.3 V or less, or about 2.0 V). In other batteries, such as lithium ion batteries that are useful in portable electronic devices, the maximum voltage is less than about 15.0 V (e.g., less than about 13.0 V, or about 12.6 V or less). The maximum voltage for a battery can vary depending on the number of charge cycles constituting the battery's useful life, the shelf-life of the battery, the power demands of the battery, the configuration of the electrodes in the battery, and the amount of active materials used in the battery.

[0079] As used herein, an "anode" is an electrode through which (positive) electric current flows into a polarized electrical device. In a battery or galvanic cell, the anode is the negative electrode from which electrons flow during the discharging phase in the battery. The anode is also the electrode that undergoes chemical oxidation during the discharging phase.

However, in secondary, or rechargeable, cells, the anode is the electrode that undergoes chemical reduction during the cell's charging phase. Anodes are formed from electrically conductive or semi-conductive materials, e.g., metals, metal oxides, metal alloys, metal composites, semiconductors, or the like. Anode materials may include Si, Sn, Al, Ti, Mg, Fe, Bi, Zn, Sb, Ni, Pb, Li, Zr, Hg, Cd, Cu, LiC_6 , mischmetals, alloys thereof, oxides thereof, or composites thereof.

[0080] Anodes can have many configurations. For example, an anode can be configured from a conductive mesh or grid that is coated with one or more anode materials. In another

example, an anode can be a solid sheet or bar of anode material.

[0081] As used herein, a "cathode" is an electrode from which (positive) electric current flows out of a polarized electrical device. In a battery or galvanic cell, the cathode is the positive electrode into which electrons flow during the discharging phase in the battery. The cathode is also the electrode that undergoes chemical reduction during the discharging phase.

However, in secondary or rechargeable cells, the cathode is the electrode that undergoes chemical oxidation during the cell's charging phase. Cathodes are formed from electrically conductive or semi-conductive materials, e.g., metals, metal oxides, metal alloys, metal composites, semiconductors, or the like. Cathode materials may include AgO, Ag₂O, HgO, Hg₂O, CuO, CdO, NiOOH, Pb₂O₄, PbO₂, LiFePO₄, Li₃V₂(PO₄)₃, V₆O₁₃, V₂O₅, Fe₃O₄, Fe₂O₃, MnO₂, LiCoO₂, LiNiO₂, LiMn₂O₄, or composites thereof.

[0082] Cathodes can also have many configurations. For example, a cathode can be configured from a conductive mesh that is coated with one or more cathode materials. In another example, a cathode can be a solid sheet or bar of cathode material.

[0083] As used herein, an "electronic device" is any device that is powered by electricity. For example, an electronic device can include a portable computer, a portable music player, a cellular phone, a portable video player, or any device that combines the operational features thereof.

[0084] As used herein, "cycle life" is the maximum number of times a secondary battery can be charged and discharged while retaining a minimum charge capacity.

[0085] The symbol "M" denotes molar concentration.

[0086] Batteries and battery electrodes are denoted with respect to the active materials in the fully charged state. For example, a zinc-silver oxide battery comprises an anode comprising zinc and a cathode comprising silver oxide. Nonetheless, more than one species is present at a battery electrode under most conditions. For example, a zinc electrode generally comprises zinc metal and zinc oxide (except when fully charged), and a silver oxide electrode usually comprises silver oxide (AgO and/or Ag₂O) and silver metal (except when fully discharged).

[0087] The term "oxide" applied to alkaline batteries and alkaline battery electrodes encompasses corresponding "hydroxide" species, which are typically present, at least under some conditions.

[0088] As used herein, "charge profile" refers to a graph of an electrochemical cell's voltage or capacity with time. A charge profile can be superimposed on other graphs such as those including data points such as charge cycles or the like.

[0089] As used herein, "resistivity" or "impedance" refers to the internal resistance of a cathode in an electrochemical cell. This property is typically expressed in units of Ohms•cm

or micro-Ohms•cm.

[0090] As used herein, the terms "first" and/or "second" do not refer to order or denote relative positions in space or time, but these terms are used to distinguish between two different elements or components. For example, a first separator does not necessarily proceed a second separator in time or space; however, the first separator is not the second separator and vice versa. Although it is possible for a first separator to proceed a second separator in space or time, it is equally possible that a second separator proceeds a first separator in space or time.

[0091] As used herein, "polyether" and "PE" are used interchangeably to refer to polymers, solutions for preparing polymers, and polymer coatings. Use of these terms in no way implies the absence of other constituents. These terms also encompass substituted and co-polymerized polymers. A substituted polymer denotes one for which a substituent group, a methyl group, for example, replaces a hydrogen on the polymer backbone.

[0092] As used herein, "polyethylene oxide" and "PEO" are used interchangeably to refer to polymers, solutions for preparing polymers, and polymer coatings. Use of these terms in no way implies the absence of other constituents. These terms also encompass substituted and co-polymerized polymers. A substituted polymer denotes one for which a substituent group, a methyl group, for example, replaces a hydrogen on the polymer backbone.

[0093] As used herein, "polypropylene oxide" and "PPO" are used interchangeably to refer to polymers, solutions for preparing polymers, and polymer coatings. Use of these terms in no way implies the absence of other constituents. These terms also encompass substituted and co-polymerized polymers. A substituted polymer denotes one for which a substituent group, a methyl group, for example, replaces a hydrogen on the polymer backbone.

[0094] As used herein "oxidation-resistant" refers to a separator that resists oxidation in an electrochemical cell of an alkaline battery and/or is substantially stable in the presence of an alkaline electrolyte and/or an oxidizing agent (e.g., silver ions).

[0095] As used herein, "adjacent" refers to the positions of at least two distinct physical elements of a device such as, for example, a battery (e.g., at least one separator and at least one electrode (e.g., an anode and/or a cathode)) or layers of multilayered separator membrane. When an element such as a separator is adjacent to another element such as an electrode or even a second separator, one element is positioned to contact or nearly contact another element. For example, when a separator is adjacent to an electrode, the separator electrically contacts the electrode when the separator and electrode are in an electrolyte environment such as the environment inside an electrochemical cell. The separator can be in physical contact or the separator can nearly contact the electrode such that any space between

the separator and the electrode is void of any other separators or electrodes. It is noted that electrolyte can be present in any space between a separator that is adjacent to an electrode or another separator.

[0096] As used herein, "unitary structure" refers to a structure that includes one or more elements that are concurrently or almost concurrently processed to form the structure. For example, a multilayered separator for use in an alkaline electrochemical cell that is a unitary structure can include one in which all of the separator ingredients or starting materials concurrently undergo a process (other than mechanical combination) that combines them and forms a single separator. Such multilayered separators include, for example, those that comprise a plurality of layers, which are formed by co-extruding starting materials from a plurality of sources to generate a wet co-extrusion that is sufficiently dried or irradiated such that at least two of the layers of the co-extrusion are independently cross-linked and/or cross-linked together. This unitary structure is not equivalent to a separator that includes a plurality of layers that are each individually formed and mechanically stacked to form a multi-layered separator.

[0097] As used herein "dendrite-resistant" refers to a separator that reduces the formation of dendrites in an electrochemical cell of an alkaline battery under normal operating conditions (i.e., when the batteries are stored and used in temperatures from about -20 °C to about 70 °C, and are not overcharged or charged above their rated capacity) and/or is substantially stable in the presence of an alkaline electrolyte, and/or is substantially stable in the presence of a reducing agent (e.g., an anode comprising zinc). In some examples, a dendrite-resistant separator may inhibit transport and/or chemical reduction of metal ions.

[0098] II. ABS SEPARATORS

[0099] In one aspect, a separator for use in a silver-zinc rechargeable battery comprises a polymer material comprising ABS; and a filler comprising a zirconium oxide material, wherein the separator has a resistance of no more than about 2000 Ohm•cm.

[0100] A. ABS Polymer Material

[0101] In some embodiments the polymer material comprises ABS. Some ABS polymers useful in separators of the present invention have an average molecular weight of more than 10,000 amu. Other ABS polymers have a melt index of at least 5 g/10 min (e.g., 6/10 min).

[0102] In other embodiments, the polymer material comprises greater than about 5 wt% of ABS (e.g., from about 10 wt% to about 35 wt% or from about 15 wt% to about 30 wt%) by weight of the separator. For example, the polymer material comprises from about 1 wt% to less than about 50 wt% of ABS (e.g., from about 10 wt% to about 35 wt% or from about 15 wt% to about 30 wt%) by weight of the separator.

[0103] In other embodiments, the polymer material further comprises water soluble polymer. For example, some polymer materials comprise ABS and a water soluble polymer. For instance, the polymer material comprises from about 1 wt% to about 30 wt% of a water soluble polymer (e.g., from about 2.5 wt% to about 10 wt%, from about 4 wt% to about 8 wt%, or from about 5 wt% to about 7 wt%) by weight of the separator. In other examples, the water soluble polymer comprises polyvinylpyrrolidone (PVP), polyvinyl alcohol (PVA), polyacrylic acid (PAA), carbopol, polyethylene glycol (PEG), polystyrene sulfonic acid (PSA), or any combination thereof.

[0104] B. Separator Filler

[0105] In some embodiments, the separator further comprises greater than about 10 wt% of filler (e.g., from about 10.5 wt% to about 90 wt%, from about 12 wt% to about 85 wt%, from about 40 wt% to about 90 wt%, or from about 50 wt% to about 85 wt%) by weight of the separator.

[0106] The filler comprises a zirconium oxide material. In some embodiments, the zirconium oxide material comprises a powder. For example, the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm (e.g., from about 40 nm to about 500 nm or from about 45 nm to about 200 nm). In other examples, the zirconium oxide material comprises a powder having a mean grain diameter of from about 40 nm to about 1000 nm. And, in some examples, the zirconium oxide material comprises a mean grain diameter of less than 1.5 microns. For instance, the zirconium oxide material comprises a mean grain diameter of from about 0.5 microns to about 1.2 microns.

[0107] In some embodiments, the zirconium oxide material comprises a surface area of at least about 5 m²/g. For example, the zirconium oxide material comprises a surface area of from about 6 m²/g to about 15 m²/g. In other instances, the zirconium oxide material comprises a surface area of from about 6.5 m²/g to about 12 m²/g.

[0108] In some embodiments of the present invention, the zirconium oxide material further comprises yttria or yttrium oxide (Y₂O₃). For example, the yttria comprises between about 5 wt% and about 17 wt% (e.g., between about 4 wt% and about 7 wt%) of the zirconium oxide powder. In other examples, the zirconium oxide material comprises less than 10 mol% (e.g., from about 1 mol% to about 10 mol%) of yttrium oxide. And, in some examples, the zirconium oxide material comprises from about 2.5 mol% to about 4 mol% of yttrium oxide. Suitable grades of zirconium oxide include the Y3 grade and the Y3Z grade, which contains yttria, both of which are available from HiCharms, Bolton, England.

[0109] Although the zirconium oxide material may optionally contain trace amounts of impurities, in one embodiment, the zirconium oxide material is substantially free of titanium.

For example, the zirconium oxide material comprises less than about 200 ppm (e.g., less than about 180 ppm or less than about 150 ppm) of titanium. In other embodiments, the filler is substantially free of titanium (e.g., the filler comprises less than 200 ppm of titanium).

[0110] C. Optional Features

[0111] In some embodiments, the separator further comprises a dispersant. Examples of suitable dispersants include anionic dispersants, cationic dispersants, nonionic dispersants, ampholytic dispersants, amphoteric dispersants, zwitterionic dispersants, or any combination thereof. In some examples, the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof.

[0112] In some embodiments, the separator comprises from about 0.1 wt% to about 9.99 wt% of dispersant (e.g., from about 1 wt% to about 20 wt% or from about 2 wt% to about 10 wt%) by weight of the separator.

[0113] In some embodiments, the separator further comprises a substrate. In some examples, the substrate comprises a woven or nonwoven film onto which the polymer material is cast. In other examples, the substrate comprises a polyolefin. For instance, the polyolefin comprises polyethylene, polypropylene, or any combination thereof. In another instance, the substrate comprises a Solupor film.

[0114] In several embodiments, the ABS polymer material further comprises a plasticizer. Example plasticizers include glycerin, low-molecular-weight polyethylene glycol, aminoalcohol, polypropylene glycols, 1,3 pentanediol branched analogs, 1,3 pentanediol, water, or any combination thereof. For example, the plasticizer comprises glycerin, a low-molecular-weight polyethylene glycol, an aminoalcohol, a polypropylene glycols, a 1,3 pentanediol branched analog, 1,3 pentanediol, or combinations thereof, and/or water. In some examples, the plasticizer comprises greater than about 1 wt % of glycerin, low-molecular-weight polyethylene glycols, aminoalcohols, polypropylene glycols, 1,3 pentanediol branched analogs, 1,3 pentanediol, or any combination thereof, and less than 99 wt % of water by weight of the plasticizer. In other examples, the plasticizer comprises from about 1 wt % to about 10 wt % of glycerin, low-molecular-weight polyethylene glycols, aminoalcohols, polypropylene glycols, 1,3 pentanediol branched analogs, 1,3 pentanediol, or any combination thereof, and from about 99 wt % to about 90 wt % of water by weight of the plasticizer.

[0115] The separators of the present invention can be used with any battery, comprising any electrolyte, any anode and/or any cathode. The invention is especially suitable for use in an alkaline storage battery comprising a zinc anode and a silver oxide cathode but can be used with other anodes and other cathodes. For instance, a separator of the present invention can

be used with anodes comprising zinc, cadmium or mercury, or mixtures thereof, for example, and with cathodes comprising silver oxide (e.g., AgO, Ag₂O, Ag₂O₃, or any combination thereof), nickel oxide, cobalt oxide or manganese oxide, or mixtures thereof).

[0116] III. HALOGENATED POLYETHYLENE SEPARATORS

[0117] Another aspect of the present invention provides a separator for use in a silver-zinc rechargeable battery comprising a polymer material comprising a halogenated polyethylene (e.g., PVDF); and a filler comprising a zirconium oxide material, wherein the separator has a resistance of no more than about 20 Ohm•cm.

[0118] In some embodiments the polymer material comprises a halogenated polyethylene, wherein the separator may inhibit metal oxide ion transport across the membrane.

[0119] As noted above, a buildup of metal deposits within separator pores can increase the separator resistance in the short term and ultimately lead to shorting failure due to formation of a continuous metal path through the separator. Further, metal oxide ions may decompose the anode, or precipitate on the anode surface. Further, the separator may help to suppress dendritic growth on the anode and/or have a relatively higher mechanical strength over traditionally used separators to resist dendrite penetration to avoid failure due to formation of a dendritic short between the electrodes. Further, the separator mitigates zinc electrode shape change by exhibiting uniform and stable ionic conductivity and ionic transport properties. Further, the separator may be resistant to chemical decomposition in alkaline electrolytes, which may extend the useful life of the battery. In separators of the present invention, a halogenated polyethylene, such as PVDF may be used to impart chemical resistance, ion selectivity, and/or chemical resistance properties to the separator. Halogenated polyethylenes such as PVDF are chemically resistant to many solvents, strong acids, bases, and heat.

[0120] A. Halogenated Polyethylene Polymer Material

[0121] In some embodiments, the polymer material comprises a halogenated polyethylene. For example, the polymer material comprises PVDF. In other examples, the PVDF comprises a homopolymer, a copolymer, or any combination thereof. For instance, the PVDF comprises a copolymer selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof. In other instances, the PVDF comprises a copolymer, and the copolymer comprises a VDF monomer and monomer comprising a halogenated C₃₋₅ aliphatic group (e.g., chlorotrifluoroethylene (CTFE), trifluoroethylene (TrFE), tetrafluoroethylene (TFE), and hexafluoropropylene (HFP). In some instances, the PVDF comprises a copolymer, and the copolymer comprises a VDF monomer and an HFP monomer (e.g., a PVDF-co-HFP copolymer). One example PVDF-co-HFP material that is useful in the present invention is commercially available under the trade

name Solvay Solef® 21216/1001 manufactured by Solvay Solexis, Brussels, Belgium, and is available in a powdered resin form. This product is reported to contain about 8–15% HFP.

[0122] In some embodiments, the PVDF comprises a homopolymer or copolymer either of which has a mean molecular weight of about 200,000 amu or greater (e.g., about 350,000 amu or greater, about 450,000 or greater, or from about 400,000 amu to about 700,000 amu).

[0123] B. Separator Filler

[0124] In some embodiments, the separator further comprises a filler comprising zirconium oxide. For example, the separator comprises greater than about 40 wt% of zirconium oxide (e.g., greater than about 45 wt%, greater than about 49 wt%, or from about 50 wt% to about 90 wt%) by weight of the separator.

[0125] In some embodiments, the zirconium oxide material comprises a powder. For example, the zirconium oxide material comprises a powder having a mean grain diameter of less than about 1 micron (e.g., less than 0.75 microns, or from about 500 nm to about 700 nm). In other examples, the zirconium oxide powder has a mean grain diameter of greater than about 30 nm (e.g., from about 40 nm to about 500 nm or from about 45 nm to about 200 nm). In other examples, the zirconium oxide material comprises a powder having a mean grain diameter of from about 40 nm to about 1000 nm. And, in some examples, the zirconium oxide material comprises a mean grain diameter of less than 1.5 microns. For instance, the zirconium oxide material comprises a mean grain diameter of from about 0.5 microns to about 1.2 microns.

[0126] In some embodiments, the zirconium oxide material comprises a surface area of at least about 5 m²/g. For example, the zirconium oxide material comprises a surface area of from about 6 m²/g to about 15 m²/g. In other instances, the zirconium oxide material comprises a surface area of from about 6.5 m²/g to about 12 m²/g.

[0127] In some embodiments, the zirconium oxide material further comprises yttria or yttrium oxide (Y₂O₃). For example, the yttria comprises between about 5 wt% and about 17 wt% (e.g., between about 4 wt% and about 7 wt%) of the zirconium oxide powder. In other examples, the zirconium oxide material comprises less than 10 mol% (e.g., from about 1 mol% to about 10 mol%) of yttrium oxide. And, in some examples, the zirconium oxide material comprises from about 2.5 mol% to about 4 mol% of yttrium oxide. Suitable grades of zirconium oxide include the Y3 grade and the Y3Z grade, which contains yttria, both of which are available from HiCharms, Bolton, England.

[0128] Although the zirconium oxide material may optionally contain trace amounts of impurities, in one embodiment, the zirconium oxide material is substantially free of titanium. For example, the zirconium oxide material comprises less than about 200 ppm (e.g., less than

about 180 ppm or less than about 150 ppm) of titanium. In other embodiments, the filler is substantially free of titanium (e.g., the filler comprises less than 200 ppm of titanium).

[0129] C. Optional Features

[0130] PVDF polymers or PVDF co-polymers useful in the present invention can optionally include additives such as surfactants, fillers, colorants, or other additives that improve one or more properties of the PVDF polymer. Furthermore, PVDF polymers can optionally comprise method artifacts such as lubricants, surfactants, or the like that are added to the material during processing and later substantially removed.

[0131] In one embodiment, the PVDF polymer material further comprises a surfactant. Suitable surfactants include anionic surfactants, cationic surfactants, nonionic surfactants, ampholytic surfactants, amphoteric surfactants, and zwitterionic surfactants. In several examples, the PVDF polymer material comprises from about 0.01 wt % to about 1 wt % of surfactant by weight of the PVDF polymer material.

[0132] In another embodiment, the PVDF polymer material further comprises a plasticizer. Examples of suitable plasticizers include glycerin, low-molecular-weight polyethylene glycol, aminoalcohol, polypropylene glycols, 1,3 pentanediol branched analogs, 1,3 pentanediol, water, or any combination thereof. For example, the plasticizer comprises glycerin, a low-molecular-weight polyethylene glycol, an aminoalcohol, a polypropylene glycols, a 1,3 pentanediol branched analog, 1,3 pentanediol, or combinations thereof, and/or water. In some examples, the plasticizer comprises greater than about 1 wt % of glycerin, low-molecular-weight polyethylene glycols, aminoalcohols, polypropylene glycols, 1,3 pentanediol branched analogs, 1,3 pentanediol, or any combination thereof, and less than 99 wt % of water by weight of the plasticizer. In other examples, the plasticizer comprises from about 1 wt % to about 10 wt % of glycerin, low-molecular-weight polyethylene glycols, aminoalcohols, polypropylene glycols, 1,3 pentanediol branched analogs, 1,3 pentanediol, or any combination thereof, and from about 99 wt % to about 90 wt % of water by weight of the plasticizer.

[0133] In some embodiments, the PVDF polymer material may comprise a method artifact comprising a removable or "washable" component (e.g., a phthalate), which may be mixed with other components of the polymer material during processing and subsequently removed (e.g., rinsed away) after the polymer material has been cast. Methods of polymer material processing, formation, casting, and casting/washing are described in more detail below.

[0134] The incorporation of phthalates into the separator film during film formation, and the subsequent removal of the incorporated phthalates may, in some embodiments, create enhanced porosity in the separator film and thus improved conductivity. Examples of

phthalates include butyl benzyl phthalate (BBP); butylcyclohexyl phthalate (BCP); butyl decyl phthalate (BDP); di(2-ethylhexyl) phthalate (DEHP); di(2-Propyl Heptyl) phthalate (DPHP); di(n-octyl) phthalate (DNOP); diallyl phthalate (DAP); dicyclohexyl phthalate (DCP); diethyl phthalate (DEP); diisobutyl phthalate (DIBP); diisodecyl phthalate (DIDP); diisoheptyl phthalate (DIHpP); diisohexyl phthalate (DIHxP); diisononyl phthalate (DINP); diisooctyl phthalate (DIOP); diisotridecyl phthalate (DIUP); diisoundecyl phthalate (DIUP); dimethyl phthalate (DMP); Di-n-butyl phthalate (DBP); di-n-hexyl phthalate (DNHP); di-n-pentyl phthalate (DNPP); di-n-propyl phthalate (DPP); ditridecyl phthalate (DTDP); diundecyl phthalate (DUP); and n-Octyl n-decyl phthalate (ODP).

[0135] In some embodiments, the phthalate comprises dibutyl phthalate (DBP). In some embodiments, the phthalate may be washed out from the separator with a protic solvent that does not dissolve the separator film itself. In some embodiments, the washing solvent may be an alcohol. In some embodiments, the washing solvent may be isopropyl alcohol.

[0136] In some embodiments of the present invention, the average ionic conductivity of a separator membrane with removable components may be about 1×10^{-3} to 9×10^{-3} S/cm.

[0137] The separators of the present invention can be used with any battery, comprising any electrolyte, any anode and/or any cathode. The invention is especially suitable for use in an alkaline storage battery comprising a zinc anode and a silver oxide cathode but can be used with other anodes and other cathodes. For instance, a separator of the present invention can be used with anodes comprising zinc, cadmium or mercury, or mixtures thereof, for example, and with cathodes comprising silver oxide (e.g., AgO, Ag₂O, Ag₂O₃, or any combination thereof), nickel oxide, cobalt oxide or manganese oxide, or mixtures thereof, for example.

[0138] IV. POLYOLEFIN SEPARATORS

[0139] In one aspect, a separator for use in a silver-zinc rechargeable battery comprises a polymer material comprising a polyolefin (e.g., PE) having a mean molecular weight of at least about 250,000 amu; and a filler comprising a zirconium oxide, wherein the separator has a reduced gassing properties in the presence of an alkaline electrolyte and silver cathode.

[0140] It is noted that polyolefin separators of the present invention demonstrate reduced gassing when exposed to the alkaline environment inside electrochemical cells without sacrificing cell cycle life. Polyolefins useful in separators of the present invention have sufficient mean molecular weights to impart the separator with a sufficiently high glass transition temperature such that the separator is substantially solid during battery charging, discharging, and periods in between. Furthermore, such polyolefins are substantially insoluble in solvents (e.g., aqueous solvents) when cured or partially cured.

[0141] A. Polyolefin Polymer Material

[0142] Polyolefins useful in separators of the present invention have sufficient mean molecular weights to impart the separator with a sufficiently high glass transition temperature such that the separator is substantially solid during battery charging, discharging, and periods in between. Furthermore, such polyolefins are substantially insoluble in solvents (e.g., aqueous solvents) when cured or partially cured.

[0143] In some embodiments the polymer material comprises a polyolefin having a mean molecular weight of at least about 250,000 amu (e.g., at least about 500,000 amu). For example, the polyolefin has a mean molecular weight of from about 250,000 amu to about 5,000,000 amu. And, in another example, the polyolefin polymer comprises a mean molecular weight of at least about 1,000,000 amu.

[0144] In other embodiments, the polyolefin comprises a homopolymer or a co-polymer. For example, the polyolefin comprises a homopolymer such as polyethylene (PE), polypropylene (PP), polymethylpentene (PMP), polybutene-1 (PB-1), polyisobutylene (PIB), ethylene propylene rubber (EPR), ethylene propylene diene monomer, or any combination thereof. In other embodiments, the polyolefin comprises a co-polymer comprising polyethylene (PE), polypropylene (PP), polymethylpentene (PMP), polybutene-1 (PB-1), polyisobutylene (PIB), ethylene propylene rubber (EPR), ethylene propylene diene monomer, or any combination thereof. And, in some examples, the polyolefin comprises a co-polymer comprising at least 80 wt% of a hydrocarbon olefinic monomer (e.g., ethylene, propylene, butylenes, or any combination thereof) and another olefinic monomer such as acrylic, acrylic acid, or esters thereof.

[0145] B. Separator Filler

[0146] In some embodiments, the separator further comprises greater than about 10 wt% of filler (e.g., from about 10.5 wt% to about 90 wt%, from about 12 wt% to about 85 wt%, from about 40 wt% to about 90 wt%, or from about 50 wt% to about 85 wt%) by weight of the separator. For example, the separator comprises from about 12% to about 85% of filler. And, in some examples, the separator comprises 80 wt% or more of the filler and 20 wt% or less of the polyolefin polymer.

[0147] The filler comprises a zirconium oxide material. In some embodiments, the zirconium oxide material comprises a powder. For example, the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm (e.g., from about 40 nm to about 500 nm or from about 45 nm to about 200 nm). In other examples, the zirconium oxide material comprises a powder having a mean grain diameter of from about 40 nm to about 1000 nm. And, in some examples, the zirconium oxide material comprises a mean grain diameter of less than 1.5 microns. For instance, the zirconium oxide material

comprises a mean grain diameter of from about 0.5 microns to about 1.2 microns.

[0148] In some embodiments, the zirconium oxide material comprises a surface area of at least about 5 m²/g. For example, the zirconium oxide material comprises a surface area of from about 6 m²/g to about 15 m²/g. In other instances, the zirconium oxide material comprises a surface area of from about 6.5 m²/g to about 12 m²/g.

[0149] In some embodiments of the present invention, the zirconium oxide material further comprises yttria or yttrium oxide (Y₂O₃). For example, the yttria comprises between about 5 wt% and about 17 wt% (e.g., between about 4 wt% and about 7 wt%) of the zirconium oxide powder. In other examples, the zirconium oxide material comprises less than 10 mol% (e.g., from about 1 mol% to about 10 mol%) of yttrium oxide. And, in some examples, the zirconium oxide material comprises from about 2.5 mol% to about 4 mol% of yttrium oxide. A suitable grade of zirconium oxide containing yttria includes the Y3Z grade available from HiCharms, Bolton, England.

[0150] Although the zirconium oxide material may optionally contain trace amounts of impurities, in one embodiment, the zirconium oxide material is substantially free of titanium. For example, the zirconium oxide material comprises less than about 200 ppm (e.g., less than about 180 ppm or less than about 150 ppm) of titanium. In other embodiments, the filler is substantially free of titanium (e.g., the filler comprises less than 200 ppm of titanium).

[0151] C. Optional Features

[0152] In some embodiments, the polyolefin optionally comprises a small amount (e.g., less than 10 wt %) of lubricants, plasticizers, dispersants, or other processing aids in any combination. For example, the polyolefin comprises a plasticizer comprising a hydrophobic oil (e.g., tall oil, linseed oil, petroleum oil, lubricating oil, fuel oil, or any combination thereof). In another example, the polyolefin comprises less than 8 wt % of plasticizer.

[0153] In some embodiments, the separator comprises from about 0.1 wt% to about 9.99 wt% of dispersant (e.g., from about 1 wt% to about 20 wt% or from about 2 wt% to about 10 wt%) by weight of the separator.

[0154] In some embodiments, the polyolefin material further comprises a dispersant. Some embodiments comprise anionic dispersants, cationic dispersants, nonionic dispersants, ampholytic dispersants, amphoteric dispersants, zwitterionic dispersants, or any combination thereof. For example, the separator comprises less than 5% of dispersant.

[0155] The separators of the present invention can be used with any battery, comprising any electrolyte, any anode and/or any cathode. The invention is especially suitable for use in an alkaline storage battery comprising a zinc anode and a silver oxide cathode but can be used with other anodes and other cathodes. For instance, a separator of the present invention can

be used with anodes comprising zinc, cadmium or mercury, or mixtures thereof, for example, and with cathodes comprising silver oxide (e.g., AgO, Ag₂O, Ag₂O₃, or any combination thereof), nickel oxide, cobalt oxide or manganese oxide, or mixtures thereof).

[0156] V. SILVER-ZINC BATTERIES

[0157] Another aspect of the present invention provides a rechargeable battery comprising a separator that comprises a polymer material and a filler that comprises a zirconium oxide material.

[0158] A. Rechargeable Battery with an ABS Separator

[0159] One embodiment provides a rechargeable battery comprising a cathode comprising a silver material; an anode comprising a zinc material; and a separator comprising a polymer material comprising ABS; and a zirconium oxide material, wherein the separator comprises greater than 10 wt% of zirconium oxide material.

[0160] In some embodiments, the polymer material further comprises a water soluble polymer. For example, the polymer material comprises from about 1 wt% to about 30 wt% of the water soluble polymer (e.g., from about 2.5 wt% to about 10 wt%, from about 4 wt% to about 8 wt%, or from about 5 wt% to about 7 wt%) by weight of the separator. In other examples, the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, a polystyrene sulfonic acid, or any combination thereof.

[0161] In some embodiments, the separator further comprises greater than about 10 wt% of zirconium oxide material (e.g., from about 10.5 wt% to about 90 wt%, from about 40 wt% to about 90 wt%, or from about 50 wt% to about 85 wt%) by weight of the separator.

[0162] In other embodiments, the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm (e.g., from about 40 nm to about 500 nm or from about 45 nm to about 200 nm). In some embodiments, the separator is substantially free of titanium.

[0163] In other embodiments, the separator further comprises a dispersant. For example, the separator comprises from about 0.1 wt% to about 9.99 wt% of dispersant (e.g., from about 1 wt% to about 20 wt% or from about 2 wt% to about 10 wt%) by weight of the separator. In other examples, the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof.

[0164] In some embodiments, the zirconium oxide material comprises from about 1 mol% to about 10 mol% of yttrium oxide.

[0165] In other embodiments, the separator further comprises a substrate, and the substrate comprises a woven or nonwoven film. In some examples, the substrate comprises a

polyolefin. For instance, the polyolefin comprises polyethylene, polypropylene, or any combination thereof.

[0166] B. Rechargeable Battery with a Halogenated Polyethylene Separator

[0167] One embodiment provides a rechargeable battery comprising a cathode comprising a silver material; an anode comprising a zinc material; and a separator comprising a polymer material comprising a halogenated polyethylene (e.g., PVDF); and a zirconium oxide material.

[0168] In some embodiments, the PVDF comprises a homopolymer, a copolymer, or any combination thereof. For example, the PVDF comprises a copolymer selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof. In some examples, the PVDF comprises a copolymer comprising a VDF monomer and a halogenated C₃₋₅ aliphatic monomer. For instance the halogenated C₃₋₅ aliphatic monomer comprises hexafluoropropylene.

[0169] In some embodiments, the PVDF comprises a homopolymer or a copolymer either of which has a mean molecular weight of about 200,000 amu or greater (e.g., about 350,000 amu or greater or from about 400,000 to about 700,000 amu).

[0170] In other embodiments, the separator further comprises greater than about 45 wt% of zirconium oxide powder (e.g., greater than about 49 wt% or from about 50 wt% to about 90 wt%) by weight of the separator.

[0171] In some embodiments, the zirconium oxide powder comprises a mean grain diameter of less than about 1 micron (e.g., less than about 0.75 microns or from about 500 nm to about 700 nm).

[0172] And, in some embodiments, the zirconium oxide powder further comprises yttria. For example, the zirconium oxide material comprises from about 1 mol% to about 10 mol% of yttria. Suitable grades of zirconium oxide include the Y3 grade and the Y3Z grade, which contains yttria, both of which are available from HiCharms, Bolton, England.

[0173] C. Rechargeable Battery with a Polyolefin Separator

[0174] One embodiment provides a rechargeable battery comprising cathode comprising a silver material, an anode comprising a zinc material, and a separator comprising a polyolefin polymer material having a mean molecular weight of at least about 500,000 amu, and a filler comprising zirconium oxide, wherein the zirconium oxide comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler is substantially free of titanium.

[0175] In some embodiments, the zirconium oxide comprises a powder having a surface area of at least about 5 m²/g. For example, the zirconium oxide comprises a powder having a surface area of from about 6 m²/g to about 15 m²/g. In other embodiments, the zirconium

oxide comprises a powder having a mean grain diameter of less than about 1.5 microns. For example, the zirconium oxide comprises a powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns.

[0176] In some embodiments, the zirconium oxide comprises from about 2.5 mol% to about 4 mol% of yttrium oxide.

[0177] In other embodiments, the polyolefin polymer material has a mean molecular weight of at least about 1,000,000 amu.

[0178] In some embodiments, the separator further comprises about 80 wt% or more of the filler and about 20 wt% or less of the polyolefin polymer material.

[0179] In other embodiments, the polyolefin polymer material comprises polyethylene, polypropylene, or any combination thereof.

[0180] D. Cathode Materials Useful in Rechargeable Batteries

[0181] Cathodes useful in batteries of the present invention include a silver material such as silver oxide that undergoes reduction when the battery discharged. In several embodiments cathodes comprise a cathode active material including the silver oxide or silver material and an optional binder material such as a polymer. Furthermore, cathodes may optionally be doped or mixed with additives to improve the electrochemical properties of the cathode.

[0182] One exemplary cathode active material is In-doped silver oxide. The cathode was generated as follows:

[0183] A 4000 ml Erlenmeyer flask was placed into a hot water bath and a Teflon-coated radial propeller was used for stirring. 301.5 g of AgNO₃ and 2500 g of DI water were added to the reaction flask and stirred at 300 rpm. 2.85 g Indium (III) Nitrate Pentahydrate was dissolved in 100 g DI water and added to the flask. The mixture in the flask was heated to 50 °C.

[0184] In a plastic container, 800 g of KOH solution (1.4g/ml) was mixed with 50 g DI water to give a diluted KOH solution. The diluted KOH solution was added to the reaction flask all at once. The mixture was heated to 65 °C, and 544.8 g of potassium persulfate was added. Then, the flask was heated to 75 °C for 15 min. When the solution cooled down and the particles settled, the water was decanted. The particles were rinsed with DI water, and once the particles settled, the water was decanted. The particles underwent this rinse and decant process until the ion conductivity of the mixture dropped below 25 micro-Ohm.

[0185] This process generated 219.6 g of 1.3 wt% In doped AgO (assuming 100% yield).

[0186] The following exemplary cathodes, described in Table A, were generated by adjusting the amount of Indium (III) Nitrate Pentahydrate used in the procedure described above.

Table A: Exemplary cathodes of the present invention comprising indium dopant.

Cathode Formulation	Activity	Resistivity (Ohm•cm)	Particle Size (μm)	BET (m²/g)
1.3 wt% In doped AgO	93.2	28.3	D10 D50 D95 0.56 1.7 3.05	
2.0 wt% In doped AgO	93.8	25.1	D10 D50 D95 0.74 1.92 4.17	
3.1 wt% In doped AgO	94.3	20.8	D10 D50 D95 0.5 1.34 2.96	1.9415
5.0 wt% In doped AgO	92.9	24.4	D10 D50 D95 0.6 1.89 4.08	2.4259
8.0 wt% In doped AgO	91.7	26	D10 D50 D95 0.69 2.12 3.92	

[0187] Another exemplary cathode of the present invention was prepared as follows:

[0188] Under stirring, 2.6 wt% lead acetate trihydrate solution was slowly added to a 20 wt% suspension of AgO in de-ionized water. The resulting suspension was allowed to settle, and the water was decanted. The residue was re resuspend with deionized water and decanted. This decanting process was repeated several times and then filtered. The filtrate was dried in a vacuum oven at 60 °C. This process was used to generate about 100 g of Pb-coated AgO.

[0189] Cathode active materials can be formulated with 3% or more (e.g., 3%) PTFE binder (DuPont TE3859) to give a final cathode material that is incorporated (e.g., pressed onto) with a cathode current collector (e.g., silver, commercial product of Dexmet) and wrapped with a cathode adsorber wrap (e.g., SL6-8 (commercially available from Shanghai Shilong Hi-Tech Co., LTD)).

[0190] Additional cathodes useful in the present invention can be manufactured using the following procedures:

[0191] A 2000 ml beaker was placed into a hot water bath and an overhead stirring propeller was installed. 116.7 g of AgNO₃ and 1000 g of DI water were added to the reaction

container and stirred at a stir speed of 400 rpm. 12 mg ZnO-Al₂O₃ was dispersed in 100 g DI water then added. 0.11 g of gelatin was added, and the flask was heated to 55 °C.

[0192] In a plastic container, 260 g of KOH solution (1.4g/ml) was mixed with 260 g of DI water to produce a diluted KOH solution. The diluted KOH solution was added to the heated reaction container using a MasterFlex pump. 198 g of potassium persulfate was added at 65 °C. After the addition of the potassium persulfate, the reaction flask was maintained at 65 °C for 50 min.

[0193] The stirring was stopped and the AgO particles settled to the bottom of the flask. The water was decanted. The particles were rinsed with DI water, and when the particles settled the water was decanted again. The rinse and decant process was repeated until the ion conductivity of the mixture dropped below 20 micro-Ohms. The resulting material was filtered and dried at 60 °C in a vacuum oven.

[0194] This process generated ~85 g of AgO (yield > 99%).

[0195] In a 2 L Erlenmeyer flask, 78 g of the dry AgO powder, produced above, was added to 780 g of DI water. The mixture was stirred with overhead stirrer using a stir speed of 400 rpm. 3.04 g of lead acetate trihydrate was dissolved in 50 g DI water and added dropwise to the AgO mixture with a MasterFlex pump. Once the addition was completed, the lead solution container was rinsed with 50 g DI water twice and the dropwise addition continued.

[0196] 60 min after the lead acetate addition, stirring was stopped, the AgO particles settled, and the water was decanted. The rinse and decant procedure was repeated until the ion conductivity measured less than 20 micro-Ohms. The resulting material was filtered and dried at 60 °C using a vacuum oven.

[0197] Another exemplary cathode of the present invention was prepared as follows: A 2000 ml beaker was placed into a hot water bath and an overhead stirring propeller was installed. 116.7 g of AgNO₃ and 1000 g of DI water were added to the reaction container and stirred using a stir speed of 400 rpm. 9 mg of silica was dispersed in 20 g of DI water then added. 0.11 g of gelatin was added. The flask was heated to 55 °C.

[0198] In a plastic container, 260 g of KOH solution (1.4g/ml) was mixed with 260 g of DI water to produce a diluted KOH solution. The diluted KOH solution was added to the heated reaction container per MasterFlex pump. 198 g of potassium persulfate was added at 65 °C. After the addition of the potassium persulfate, the reaction flask was maintained at 65 °C for 50 min.

[0199] The stirring was stopped and the AgO particles settled to the bottom of the flask. The water was decanted. The particles were rinsed with DI water, and when the particles

settled the water was decanted again. The rinse and decant process was repeated until the ion conductivity of the mixture dropped below 20 micro-Ohms.

[0200] This process generated ~85 g of AgO (yield > 99%).

[0201] In a 2 L Erlenmeyer flask containing the above AgO slurry, DI water was added until the total weight of the mixture was 935 g. The mixture was stirred with overhead stirrer using a stir speed of 400 rpm. 3.32 g of lead acetate trihydrate was dissolved in 50 g of DI water and added dropwise to the AgO mixture with a MasterFlex pump. Once the addition was completed, the lead solution container was rinsed with 50 g DI water twice and the dropwise addition continued.

[0202] 60 min after the lead acetate addition, stirring was stopped, the AgO particles settled, and the water was decanted. This rinse and decant procedure was repeated until the ion conductivity measured less than 20 micro-Ohms. The resulting material was filtered and dried the material at 60 °C using a vacuum oven.

[0203] Another exemplary cathode of the present invention was prepared as follows:

[0204] A 2000 ml beaker was placed into a hot water bath and an overhead stirring propeller was installed. 116.7 g of AgNO₃ and 1000 g of DI water were added to the reaction container and stirred using a stir speed of 400 rpm. 95mg zirconium (IV) oxide was dispersed in 100 g of DI water then added. 0.11g gelatin was added. The flask was heated to 55 °C.

[0205] In a plastic container, 260 g of KOH solution (1.4g/ml) was mixed with 260 g of DI water to produce a diluted KOH solution. The diluted KOH solution was added to the heated reaction container per MasterFlex pump. 198 g of potassium persulfate was added at 65 °C. After the addition of the potassium persulfate, the reaction flask was maintained at 65 °C for 50 min.

[0206] The stirring was stopped and the AgO particles settled to the bottom of the flask. The water was decanted. The particles were rinsed with DI water, and when the particles settled the water was decanted again. This rinse and decant process was repeated until the ion conductivity of the mixture dropped below 20 micro-Ohms.

[0207] This process generated ~85 g of AgO (yield > 99%).

[0208] In a 2 L Erlenmeyer flask containing the above AgO slurry, DI water was added until the total weight of the mixture was 935 g. The mixture was stirred with an overhead stirrer using a stir speed of 400 rpm. 3.32 g of lead acetate trihydrate was dissolved in 50 g of DI water and added dropwise to the AgO mixture with a MasterFlex pump. Once the addition was completed, the lead solution container was rinsed with 50 g of DI water twice and the dropwise addition continued.

[0209] 60 min after the lead acetate addition, stirring was stopped, the AgO particles settled, and the water was decanted. The rinse and decant procedure was repeated until the ion conductivity measured less than 20 micro-Ohms. The resulting material was filtered and dried at 60 °C using a vacuum oven.

[0210] Another exemplary cathode of the present invention was prepared as follows:

[0211] A 4 L beaker was placed into a hot water bath and an overhead stirring propeller was installed. 233.4 g of AgNO₃ and 1200 g of DI water were added to the reaction container and stirred using a stir speed of 450 rpm. 0.2 g of gelatin was added. 26 mg of silica was dispersed in 50 g of DI water, 48 mg ZnO-Al₂O₃, and 240 mg of zirconium (IV) oxide (50nm, Alfa- Aesar) were dispersed in 58 g of DI water then added to the beaker. The beaker was heated to 55 °C.

[0212] In a plastic container, 520 g of KOH solution (1.4g/ml) was mixed with 520 g of DI water to produce a diluted KOH solution. The diluted KOH solution was dropped into the heated reaction container per MasterFlex pump. 396 g of potassium persulfate was added at 65 °C. After the addition of the potassium persulfate, the reaction flask was maintained at 65 °C for 50 min.

[0213] The stirring was stopped and the AgO particles settled to the bottom of the flask. The water was decanted. The particles were rinsed with DI water, and when the particles settled the water was decanted again. This rinse and decant process was repeated until the ion conductivity of the mixture dropped below 20 micro-Ohms.

[0214] This process generated ~170 g of AgO (yield > 99%).

[0215] In a 4 L beaker containing the above AgO slurry, DI water was added until the total weight of the mixture was 1870g. The mixture was stirred with overhead stirrer using a stir speed of 400 rpm. 6.63 g of lead acetate trihydrate was dissolved in 50 g of DI water and added dropwise to the AgO mixture with a MasterFlex pump. Once the addition was completed, the lead solution container was rinsed with 50 g of DI water twice and the dropwise addition continued.

[0216] 60 min after the lead acetate addition, stirring was stopped, the AgO particles settled, and the water was decanted. The rinse and decant procedure was repeated until the ion conductivity measured less than 20 micro-Ohms. The resulting material was filtered and dried at 60 °C using a vacuum oven.

[0217] Another exemplary cathode of the present invention was prepared as follows:

[0218] A 4 L beaker was placed into a hot water bath and an overhead stirring propeller was installed. 233.4 g of AgNO₃ and 1200 g of DI water were added to the reaction container and stirred at 450 rpm. 0.15 g of gelatin and 1.53 g gallium hydroxide were added. 32 mg silica

was dispersed in 58 g water, 48 mg ZnO-Al₂O₃ and 240 mg zirconium (IV) oxide (50nm, Alfa- Aesar) were dispersed in 61 g DI water then added. The beaker was heated to 55 °C.

[0219] In a plastic container, 520 g of KOH solution (1.4 g/ml) was mixed with 520 g of DI water to produce a diluted KOH solution. The diluted KOH solution was dropped into the heated reaction container per MasterFlex pump. 396 g of potassium persulfate was added at 65 °C. After the addition of the potassium persulfate, the reaction flask was maintained at 65 °C for about 50 min.

[0220] The stirring was stopped and the AgO particles settled to the bottom of the flask. The water was decanted. The particles were rinsed with DI water, and when the particles settled the water was decanted again. The rinse and decant process was repeated until the ion conductivity of the mixture dropped below about 20 micro-Ohms.

[0221] This process generated about 170 g of Ga doped AgO.

[0222] In a 4 L beaker containing the above doped AgO slurry, DI water was added until the total weight of the mixture was 1870 g. The mixture was stirred with overhead stirrer at 400 rpm. 6.63 g of lead acetate trihydrate was dissolved in 50 g DI water and added dropwise to the AgO mixture with a MasterFlex pump. Once the addition was completed, the lead solution container was rinsed with 50 g DI water twice and the dropwise addition continued.

[0223] 60 min after the lead acetate addition, stirring was stopped, the AgO particles settled, and the water was decanted. The rinse and decant procedure was repeated until the ion conductivity measured less than 20 micro-Ohms. The resulting material was filtered and dried at 60 °C using a vacuum oven.

[0224] Another exemplary cathode of the present invention was prepared as follows:

[0225] In a plastic container, 34.45 g of AgNO₃, 48.50 g Cu(NO₃)₂•2.5H₂O, and 400 g of DI water were added. 4 mg silica and 41 mg zirconium (IV) oxide (50nm, Alfa- Aesar) were dispersed in 100 g DI water then added to the container.

[0226] A 2 L beaker was placed into a hot water bath and an overhead stirring propeller was installed. 233 g of KOH solution (1.4g/ml) was mixed with 233 g of DI water to produce a diluted KOH solution, which was stirred at 400 rpm. The beaker was heated to 55 °C. The above AgNO₃ solution was added. 173.6 g of potassium persulfate was added at 65 °C. After the addition of the potassium persulfate, the reaction flask was maintained at 65 °C for 30 min.

[0227] The stirring was stopped and the particles settled to the bottom of the flask. The water was decanted. The particles were rinsed with DI water, and when the particles settled the water was decanted again. The rinse and decant process was repeated until the ion conductivity of the mixture dropped below 20 micro-Ohms.

[0228] The material was filtered and then dried in a vacuum oven at 60 °C. This process generated about 40 g of AgCuO₂.

[0229] E. Anode Materials Useful in Rechargeable Batteries

[0230] Anodes useful in batteries of the present invention include zinc anodes. Like cathodes, anodes may include an anode active material and additional binders or additives. One exemplary anode was formulated from 81.9 % Zinc, 5 % PTFE binder [DuPont TE3859], 12.7 % zinc oxide (AZO66), 0.45% Bi₂O₃, to give a final mass of 3.6 g. Each of these ingredients was obtained from commercial sources. The anode material was incorporated with an anode current collector: In/brass 32 (80/20), 43 mm × 31 mm, pressed at 2T, a commercial product of Dexmet. And, the anode material with current collector may be optionally wrapped with an anode adsorber wrap: Solupor (commercially available from Lydall, Inc. of Manchester CN).

[0231] Note that the formulation of the anode above serves as an example, and that the amounts of the additives (e.g., PTFE and Bi₂O₃) and zinc and zinc oxide may be adjusted to balance the anode with the chemistry of the cathode.

[0232] F. Electrolytes Useful in Rechargeable Batteries

[0233] Electrolytes useful in batteries of the present invention include alkaline materials that provide a source of hydroxide ions in aqueous solutions. For example, NaOH, KOH, and other alkaline hydroxides are useful in electrolytes for batteries of the present invention.

[0234] One exemplary electrolyte includes 32% by weight aqueous KOH and NaOH mixture (e.g., 90/10 to 70/30 mol ratio).

[0235] VI. METHODS

[0236] Another aspect of the present invention provides a method of manufacturing a separator for use in a rechargeable battery wherein the separator comprises a polymer material and a zirconium oxide material.

[0237] A. Manufacturing an ABS Separator

[0238] One embodiment provides a method of manufacture of a separator for use in a silver-zinc rechargeable battery, which may comprise, in general, mixing a ABS polymer material with an aprotic solvent to form a first mixture; mixing the first mixture with a filler comprising zirconium oxide powder to form a second mixture; casting the mixture over a surface to form a thin layer; and drying the mixture to generate a separator membrane.

[0239] Referring to FIGURE 2A, one method of manufacturing a separator for use in a silver-zinc rechargeable battery comprises providing a first mixture comprising an ABS polymer, a dispersant, a solvent, and a zirconium oxide powder; and drying the mixture to generate a separator.

[0240] Referring to FIGURE 2B, in some methods, the first mixture further comprises a water soluble polymer, such as any of the water soluble polymers discussed above (e.g., PVP).

[0241] In other methods, the zirconium oxide powder has a mean grain diameter of greater than about 30 nm. For example, the zirconium oxide powder has a mean grain diameter of from about 40 nm to about 1000 nm. In other examples, the zirconium oxide powder is substantially free of titanium. In some methods, the zirconium oxide powder comprises less than 10 mol% of yttrium oxide. In other methods, the zirconium oxide powder comprises less than 5 mol% of yttria oxide.

[0242] Some methods include providing a dispersant such as any of those described above.

[0243] In some embodiments, the solvent comprises a polar aprotic solvent. For instance, the polar aprotic solvent comprises 2-butanone or acetone. In other methods, the solvent further comprises 1-methyl-2-pyrrolidinone.

[0244] Some methods comprise casting the first mixture onto a surface. And, in some instances, the surface comprises a membrane comprising a polyolefin, such as any of the polyolefins described above.

[0245] B. Manufacturing a Halogenated Polyethylene Separator

[0246] One aspect of the present invention provides a method of manufacturing a separator for use in a silver-zinc rechargeable battery comprising mixing a halogenated polyethylene (e.g., PVDF) polymer material with an aprotic solvent to form a first mixture; mixing the first mixture with a filler comprising zirconium oxide powder to form a second mixture; and drying the mixture to generate a separator.

[0247] In some methods, the halogenated polyethylene polymer material comprises PVDF. In other methods, the PVDF polymer material may comprise a PVDF homopolymer, a PVDF copolymer, or any combination thereof. For example, the PVDF polymer material may comprise a PVDF-copolymer, wherein the PVDF-copolymer is selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof. In some implementations, the PVDF-copolymer may comprise PVDF and a second polymer comprising a halogenated C₃₋₅ aliphatic monomer. For example, the copolymer may comprise hexafluoropropylene.

[0248] In other methods, the second mixture may comprise greater than about 25 wt % zirconium oxide, greater than about 45 wt% zirconium oxide, greater than about 49 wt % zirconium oxide, or about 50 wt % to about 90 wt % of zirconium oxide, by weight of the second mixture.

[0249] In some methods, the zirconium oxide may comprise a powder. In some embodiments, the powder may comprise particles having an average particle size of less than about 1 micron, as described above.

[0250] In some methods, the aprotic solvent may comprise acetone, dimethyl sulfoxide, ethyl acetate, dichloromethane, tetrahydrofuran, dimethylformamide, acetonitrile, or any combination thereof. For example, the aprotic solvent comprises acetone.

[0251] Some methods may further comprise casting the second mixture to form a thin film. For example, the second mixture is cast to give a film having a mean thickness of from about 0.01 inches to about 0.03 inches, or a mean thickness of from about 0.015 inches to about 0.020 inches.

[0252] Some methods may further comprise applying the second mixture to a substrate. For example the second mixture is applied to the substrate by painting, drying, spraying, dipping, or co-extruding the second mixture onto the substrate. And, in some implementations, the substrate comprises a porous polyolefin material such as PE.

[0253] In some methods, the second mixture is cured by air drying, heating, exposing the mixture to electromagnetic radiation, or any combination thereof. However, any suitable means may be used to at least partially cure the mixture to form a separator.

Some methods may further comprise adding a phthalate to the second mixture. And, some methods may further comprise washing the mixture with a liquid to remove the phthalate. In some methods, the phthalate is dibutyl phthalate. The membrane may be washed after completely or partially drying the film to form a membrane. For example, the membrane is washed with a washing solvent comprising an alcohol (e.g., isopropyl alcohol).

[0254] Another embodiment provides a method of manufacturing a separator for use in a silver-zinc rechargeable battery comprising combining a polymer selected from PVDF homopolymer, a PVDF-copolymer, or a combination thereof, with an organic solvent to form a solution; mixing a powder comprising zirconium oxide and yttria into the solution to form a mixture; casting the mixture over a surface; and drying the mixture to form a membrane.

[0255] Some implementations further comprise mixing a phthalate into the second mixture; and washing the phthalate from the membrane with a washing solvent comprising an alcohol.

[0256] C. Manufacturing a Polyolefin Separator

[0257] Another embodiment of the present invention provides a method of manufacturing a separator for use in silver zinc rechargeable batteries comprising combining a polyolefin polymer material and a filler to generate a mixture; and processing the mixture to form a separator, wherein the polyolefin polymer material has a mean molecular weight of at least about 500,000 amu, the filler comprises zirconium oxide, wherein the zirconium oxide

comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler is substantially free of titanium.

[0258] In some implementations, the zirconium oxide comprises a powder having a surface area of at least about 5 m²/g. For example, the zirconium oxide comprises a powder having surface area of from about 6 m²/g to about 15 m²/g. In other implementations, the zirconium oxide comprises a powder having a mean grain diameter of less than about 1.5 microns. For example, the zirconium oxide comprises powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns.

[0259] In some implementations, the zirconium oxide comprises from about 2.5 mol% to about 4 mol% of yttrium oxide.

[0260] In others, the polyolefin polymer material comprises a mean molecular weight of at least about 1,000,000 amu.

[0261] And, in some implementations, the mixture is processed to form a separator that comprises 80 wt% or more of the filler and 20 wt% or less of the polyolefin polymer.

[0262] In other implementations, the polyolefin polymer comprises polyethylene, polypropylene, or any combination thereof. Some implementations further comprise combining a plasticizer and the polyolefin polymer. For example, the plasticizer comprises a petroleum oil, a lubricating oil, a fuel oil, a tall oil, a linseed oil or any combination thereof. And, in some implementations, the mixture has a pH of less than 9.

[0263] VII. EXAMPLES

[0264] The following examples are given to more precisely and particularly illustrate the specific details of the present invention. Equivalent procedures and quantities will occur to those skilled in the art and therefore the following examples are not meant to define the limits of the present invention, only to illustrate the invention. The following examples are taught.

[0265] A. ABS Separators

[0266] The following raw materials and instruments were used in the examples provided below. These raw materials were used without further purification unless otherwise indicated.

1. Poly(acrylonitrile-co-butadiene-co-styrene) (ABS, melt index: 6.0/10 min, Aldrich);
2. Dodecylbenzenesulfonic acid sodium salt (DBS, Aldrich);
3. Polyvinylpyrrolidone (PVP, Mw = 1,300,000, Aldrich);
4. 2-butanone (99%, Aldrich);
5. 1-methyl-2-pyrrolidinone (MPD, 99%, Aldrich);
6. ZrO₂ (HiC-GM05S7, 600 nm, Hicharms Limited); and

7. Mixer (Speed-Mixer, DAC 150 EVZ, PlackTek Inc.).

[0267] Example 1: Preparation of ABS Separator with 80% ZrO₂

[0268] 1 g of ABS was added to 10 g of 2-butanone with 0.15 g of DBS as surfactant. The materials were mixed at room temperature for 10 min at 3500 rpm to achieve substantially uniform mixture. 4 g of ZrO₂ was added to the mixture and mixed at room temperature for 5 min at 3500 rpm. The resulting mixture was cast on a clean glass plate (6"x9") and dried at room temperature overnight. The separator was peeled from the glass after wetting with DI water for a period of time. The membrane was dried at room temperature and stored in a plastic bag until use. SEM images of this ABS separator is provided at FIGURE 3 using two different magnifications.

[0269] Example 2: Preparation of ABS Separator with 80% ZrO₂ and Substrate

[0270] The final mixture generated in Example 1 was cast on a polyethylene substrate (Sulopor®, commercially available from Lydall, Inc., Manchester, CN) using a drawdown machine (commercially available from Paul N. Gardner Co., Pompano Beach, FL). The resulting film was dried at room temperature and stored in plastic bag for further testing. An illustration and SEM images of this ABS separator are provided at FIGURES 4A and 4B, wherein the SEM images are provided for two different magnifications.

[0271] Example 3: Preparation of ABS Separator with PVP and ZrO₂

[0272] 10 g of 2-butanone was mixed with 3 g of MPD. To that solution, 0.8 g of ABS, 0.2 g of PVP, and 0.15 g of DBS were added before mixing at room temperature for 10 min at 3500 rpm. 2 g of ZrO₂ was added to the mixture, then mixed at room temperature for 5 min at 3500 rpm. The resulting mixture was cast on a clean glass plate (6"x9"), dried overnight and carefully peeled from the glass plate.

[0273] Example 4: Ionic Conductivity Experiments

[0274] The membranes prepared using the procedures described above were soaked in KOH (1.4 g/ml) for 3 hours before testing the voltage between the electrodes. The conductivity of membranes were calculated as described below.

[0275] Referring to FIGURES 10A and 10B, a test box containing two platinum foil electrodes between which separator samples are placed, as well as two reference electrodes was used. The electrolyte used for both electrode pairs was KOH with a specific gravity (s.g.) of 1.40. Platinum foil electrodes were placed in holders at either end of the electrolyte bath in the test box. The platinum foil electrodes were connected at both ends of the test box to a BK Precision 1735Ah 30V/3Ah power supply.

[0276] Reference electrodes were connected to a Fluke 45 dual display multimeter. Bubble blockers were inserted into the test box. The power supply was turned on and the current

adjusted to 0.200 A. Voltage at the reference electrodes was monitored to 0.00001 V resolution. The system was run for about three hours until the voltage was stabilized.

[0277] Samples of dimension 1"×1" were cut from separator films at random locations on the oversized films and soaked in 1.40 s.g. KOH. Samples were removed from the KOH bath, and excess KOH was removed with a pipette. An individual 1" x 1" sample was placed in a sample holder and into the electrolyte in the test box. The voltage (V_s) was recorded after 30 seconds. The sample was removed from the electrolyte, excess KOH was removed from the sample holder, and the sample holder replaced back into the test box. After 30 seconds, a voltage reading (V_o) for the empty sample box was recorded. The test procedure was then repeated for the remaining samples, after waiting for the test box to equilibrate for 80 seconds between samples.

[0278] The wet thickness of each sample was recorded after the procedure.

[0279] Separator resistivity was determined using the following equation:

$$R_s = \frac{(V_s - V_o)}{I} \times Area$$

where R_s = separator resistance (Ohm•cm²), V_s = voltage with separator sample in holder, V_o = voltage with no separator sample in holder, I = constant current (0.2 Ah), and Area = 3.8 cm².

[0280] Resistivity data for several ABS separators are provided in FIGURES 5-9.

[0281] **Example 5: Test Cells**

[0282] Test cells were prepared according to the diagram of FIGURE 1. The electrolyte, KOH (1.4 g/ml) was used for the purpose of offering OH⁻ during charge and discharge processes. All separators were soaked in KOH for 3 hours before being assembled into cells.

Discharge current was kept at 154 mA and discharge density was about 19.25 mA/cm². A constant current charging was kept at 200 mA (25 mA/cm²) until voltage reached 1.98 V, then a constant voltage is kept for charging until the cell reached to the capacity of 650 mAh.

Test cell components are described in detail below.

[0283] **1. Cathode**

[0284] The following material and methods were used to generate undoped AgO cathode material that was used in cells for purposes of evaluating separator performance.

[0285] Materials:

Silver nitrate (A.C.S. grade, DFG);

Gelatin (from bovine skin, type B, ~225 bloom, Sigma);

Potassium hydroxide solution (1.4g/ml, LabChem., Inc.); and

Potassium persulfate (99+%, Sigma-Aldrich).

[0286] Procedures: Undoped AgO.

[0287] A 2L Aceglass reactor was placed into a hot water bath and a Teflon-coated radial propeller was used. 116.7 g of AgNO₃ and 1000 g of DI water were added to the reactor and stirred at 400 rpm. The mixture in the reactor was heated to 55 °C. 0.11 g gelatin was added. In a plastic container, 240 g of KOH solution (1.4g/ml) was mixed with 240 g DI water to give a diluted KOH solution. The diluted KOH solution was added to the reactor per pump at 55°C. At 65 °C, 198 g of potassium persulfate was added and the temperature was maintained for 50 min.

[0288] The water was decanted as the solution cooled down and the particles settled. The particles were rinsed with DI water, and once the particles settled, the water was decanted. The particles underwent this rinse and decant process until the ion conductivity of the mixture measured below 25 micro-Ohm. The product was filtered and dried in a 60 °C vacuum oven.

[0289] The resultant undoped AgO cathode material is characterized below in Table B.

Table B: Undoped AgO cathodes.

Cathode Formulation	Activity	Resistivity (Ohm•cm)	Particle Size (μm)		
Undoped AgO	>95	24	D10	D50	D95
			0.41	1.44	3.4

[0290] The activity of cathode materials described in Table B was measured by titration:

[0291] A sample was crushed with a spatula. If sample was not completely dry, it was dried in a vacuum oven at 60 °C overnight. 0.100 g of sample was added to a clean 125 ml flask, wherein the weight was measured accurately to at least the third decimal place. 10 ml of acetate buffer and 5 ml KI solution was added to the flask. The flask was swirled to disperse particles followed by covering the flask by putting an inverted plastic cup over top, and sonicating for 2 hours. 20 ml of DI was added to the flask. The solution was titrated with Na₂S₂O₃ until the solution achieved a pale yellow (record exact normality). Approximately 1 ml of starch indicator was added and titration continued until the solution achieved a milky whitish-yellow endpoint.

[0292] The following equation was used to calculate activity:

$$\text{Activity} = \frac{(\text{vol. titrant (mls)}) \times (\text{normality titrant}) \times 12.388}{(\text{mass of silver material (g)})}$$

[0293] Particle size analysis was performed using a Horiba LA-930. Diameters on 10%, 50%, and 95% (D10, D50, and D95) were measured for the samples provided above and below.

[0294] The resistivities of this cathode material was measured using the following procedure: 3 grams of sample material was loaded into a powder compression cell with a 3.88 cm² electrode surface area. Force was applied to the sample from 10 to 40 tons by using a laboratory hydraulic press. The resistance was recorded every 5 tons and the thickness of the sample at 40 tons is also recorded. The resistivity of the sample is the resistance value extrapolated to infinite force divided by final material thickness and multiplied by the area of the powder cell electrodes.

[0295] Cathode Active material was formulated from 3% PTFE binder (DuPont TE3859) and the cathode material generated as described above, to give a final mass of 5.85 g.

[0296] Cathode Current Collector: silver, commercial product of Dexmet. Cathode was pressed at 5.5T.

[0297] Cathode Adsorber Wrap: SL6-8 (commercially available from Shanghai Shilong Hi-Tech Co., LTD.)

[0298] 2. Anode

[0299] Anode Active Material was formulated from 81.9 % Zinc, 5 % PTFE binder [DuPont TE3859], 12.7 % zinc oxide (AZO66), 0.45% Bi₂O₃, to give a final mass of 3.6 g. Each of these ingredients was obtained from commercial sources.

[0300] Anode Current Collector: In/brass 32 (80/20), 43 mm × 31 mm, pressed at 2T, a commercial product of Dexmet.

[0301] Anode Adsorber Wrap: Solupor (commercially available from Lydall, Inc. of Rochester N.H.).

[0302] 3. Electrolyte

[0303] The electrolyte was formulated from 32% by weight aqueous KOH and NaOH mixture (80/20 mol ratio).

[0304] 4. Cell Housing

[0305] Aluminum laminated film (D-EL40H(II)) from Pred Material International was used as cell housing.

[0306] B. Halogenated Polyethylene Separators

[0307] The following raw materials and instruments were used in the examples provided below. These raw materials were used without further purification unless otherwise indicated.

1. PVDF-co-HFP powder (Mn=271,000, Mw=596,000) Supplier: Solvay Solef 21216/1001, Belgium);
2. Acetone (99.9+% HPLC grade) Supplier: Sigma-Aldrich, USA;
3. Zirconium oxide powder (Zr19, average particle size 600 nm) Supplier: HiCharms, Ltd., GMO5S7, China).

[0308] Example 6: PVDF Separator (25 wt% PVDF + 75 wt% Zirconium Oxide)

[0309] *Fabrication of a PVDF membrane without DBP.*

[0310] A PVDF-co-HFP/acetone solution was prepared by dissolving 3.75 g PVDF-co-HFP powder into 85 g of acetone overnight by ball milling process. 4.5 g of Zr19 was added into 35.5g of the PVDF-co-HFP/acetone solution and mixed in a Flacktek mixer at 1000 rpm for 4 minutes. This leads to a PVDF-co-HFP : Zr19 ratio of 1:3 and a total solid loading of 15%.

[0311] The mixture was then cast on a clean and leveled glass plate by using a doctor blade apparatus with a gap of 0.015 inches to produce a film. The film was allowed to dry at room temperature for about 2 hours. The dried, whitish film was then carefully removed from the glass plate and cut into the desired size for separator applications.

[0312] Example 7: PVDF Separator (55 wt% PVDF + 45 wt% Zirconium Oxide)

[0313] *Fabrication of the PVDF separator membrane with DBP.*

[0314] 1. Materials Used

[0315] Dibutyl phthalate (DBP, 99%, Sigma-Aldrich, USA), and isopropyl alcohol (IPA, 99%, Medical Chemical Corp., USA) was used, in addition to the materials listed above for Example 6.

[0316] 2. Example Method

[0317] As in Example 6, a PVDF-co-HFP/acetone solution was prepared by dissolving 3.75 g PVDF-co-HFP powder into 85 g of acetone overnight by ball milling process. 3.12 g of Zr19 and 0.47 DBP (i.e., 10 wt% of the PVDF plus Zr19) was added into 35.5g of the PVDF-co-HFP/acetone solution and mixed in a Flacktek mixer at 1000 rpm for 4 minutes.

[0318] The mixture was then cast on a clean and leveled glass plate by using a doctor blade apparatus with a gap of 0.020 inches to produce a film. The film was allowed to dry at room temperature for about 2 hours. The DBP was rinsed from the dried film with five washes of IPA in a plastic tank, 15–20 minutes per wash. The washed film was then allowed to dry at room temperature for 15–20 minutes. The dried, whitish film was then carefully removed from the glass plate and cut into the desired size for separator applications.

[0319] Example 8: Characterization of Separators

[0320] Testing ionic resistance of separator film of the present invention.

[0321] 1. Production of the Testing film (25 wt% PVDF + 75 wt%

Zirconium Oxide)

[0322] A polymeric separator film was prepared by casting a portion of the following coating composition onto Mylar using a Gardco blade applicator:

[0323] 7.5 g of PVDF-co-HFP powder was dissolved in 170 g acetone, to which was added 22.5 g of zirconium oxide powder. The mixture was mixed using a Flacktec mixer at 1000 rpm for 2 min. The mixture was then cast onto Mylar using a Doctor blade at 0.015 inches followed by ambient air drying, to produce a white, 30 μm film.

[0324] 2. Measuring Ionic Resistance

[0325] The resistivity of the film was measured to be $14.3 \pm 3.1 \text{ Ohm}\cdot\text{cm}$. The procedure for measuring the ionic resistance of the film is listed below.

[0326] Referring to FIGURES 10A and 10B, a test box containing two platinum foil electrodes between which separator samples may be placed, as well as two reference electrodes was used. The electrolyte used for both electrode pairs was KOH with a specific gravity (s.g.) of 1.40. Platinum foil electrodes were placed in holders at either end of the electrolyte bath in the test box. The platinum foil electrodes were connected at both ends of the test box to a BK Precision 1735Ah 30V/3Ah power supply.

[0327] Reference electrodes were connected to a Fluke 45 dual display multimeter. Bubble blockers were inserted into the test box. The power supply was turned on and the current adjusted to 0.200 A. Voltage at the reference electrodes was monitored to 0.00001 V resolution. The system was run for about three hours until the voltage was stabilized.

[0328] Four samples of 1" x 1" dimensions were cut from the separator film at random, and soaked in 1.40 s.g. KOH. Samples were removed from the KOH bath, and excess KOH was removed with a pipette. An individual 1" x 1" sample was placed in a sample holder and into the electrolyte in the test box. The voltage (V_s) was recorded after 30 seconds. The sample was removed from the electrolyte, excess KOH was removed from the sample holder, and the sample holder replaced back into the test box. After 30 seconds, a voltage reading (V_o) for the empty sample box was recorded. The test procedure was then repeated for the remaining three samples, after waiting for the test box to equilibrate for 80 seconds between samples.

[0329] The wet thickness of each sample was recorded after the procedure.

[0330] Separator resistivity was determined using the following equation:

$$R_s = \frac{(V_s - V_o)}{I} \times \text{Area}$$

where R_s = separator resistance ($\text{Ohm}\cdot\text{cm}^2$), V_s = voltage with separator sample in holder, V_o = voltage with no separator sample in holder, I = constant current (0.2 Ah), and Area = 3.8 cm^2 .

[0331] Example 9: Solubility in KOH

[0332] Solubility in KOH

[0333] Referring to FIGURES 15A and 15B, Separator films, produced in accordance with the procedures provided in Examples 6 and 7, were soaked in KOH (1.4 g/ml H₂O) overnight. No significant change in dimension or color was observed.

[0334] Example 10: Test Cell using the Separator of Example 6

[0335] *Test cell battery with PVDF-co-HFP separator membrane without DBP*

[0336] FIGURE 11 schematically illustrates the arrangement order of elements used in a silver-zinc rechargeable battery. The electrolyte, KOH (1.4 g/ml) is used for purpose of offering OH⁻ during the charge and discharge process. All separators were soaked in KOH for 3 hours before being assembled into clam cells. Discharge current was kept at 171 mAh and discharge density was about 213 mAh. A constant current charging was kept at 200 mAh (25 mAh/cm) until voltage reached 2.03 V, then a constant voltage at 1.98 V was kept for charging the cell until the cell reached a capacity of 600 mAh.

[0337] The composition of the cathode active material used was standard 1.3% PbAc-coated AgO : 2% doped + 3% coated AgO in a 80: 20 ratio. The binder used was 5% PVDF-co-HFP(21216) with MEK (methyl ethyl ketone). The cathode was wrapped in SL fabric manufactured by SciMAT.

[0338] The composition of the anode material used was Zn-10 (87.77%), ZnO (6.76%), Bi₂O₃ (0.47%) with 5% PVDF-co-HFP (Solvay Solef 21216), dissolved by acetone. The anode was wrapped in a microporous polyethylene Solupor membrane.

[0339] A PVDF separator was used between the anode and cathode along with a PVA V6-2 membrane, with the PVDF membrane facing the anode, and the V6-2 facing the cathode. The PVDF membrane was manufactured according to Example 6.

[0340] The electrolyte was 40% KOH.

[0341] FIGURES 12-14 show the cycling behavior of AgO/Zn cell comprising a PVDF+ZrO₂ separator, as prepared in Example 6.

[0342] The data show that the cell demonstrate a low impedance and excellent cycle life. The conductivity of the composite membrane is around 16.5 S/cm, which is close to that of a PVA V6-2 standard membrane (15–19 S/cm).

[0343] Example 11: Test Cell using the Separator of Example 7

[0344] *Test cell battery with PVDF-co-HFP separator membrane with DBP*

[0345] The composition of the cathode active material used was standard 1.3%PbAc-coated AgO. The binder used was 5% PVDF-co-HFP(21216) dissolved by dimethyl carbonate (DMC). The cathode was wrapped in SL fabric manufactured by SciMAT.

[0346] The composition of the anode material used was Zn-10 (87.77%), ZnO (6.76%), Bi₂O₃ (0.47%) with 5% PVDF-co-HFP (Solvey Solef 21216) dissolved by acetone. The anode was wrapped in a microporous polyethylene Solupor membrane.

[0347] A PVDF separator with DBP was used between the anode and cathode along with a PVA V6-2 membrane, with the PVDF membrane facing the anode, and the V6-2 facing the cathode. The PVDF membrane was manufactured according to Example 7.

[0348] The electrolyte was 40% KOH.

[0349] FIGURES 16 and 17 show the cycling behavior of AgO/Zn cell comprising a PVDF+ZrO₂ separator, as prepared in Example 7.

[0350] The data show that the cell demonstrates a low impedance and excellent cycle life. The conductivity of the composite membrane is around 7×10^{-3} S/cm, reflecting the added porosity created by the addition of DBP.

[0351] C. Polyolefin Separators

[0352] **Example 12: Characterization of Exemplary Filler Materials**

[0353] Exemplary filler materials comprising zirconium oxide and yttrium oxide are characterized below. These materials were obtained from commercial sources.

Property	ZrO ₂ (Y3)	ZrO ₂ (Y3Z)
Particle Size (d50)	0.9 μ m	0.78 μ m
Surface Area (m ² /g)	8	10
Ca Water Impurity (ppm)	50-100	20

[0354] It is noted that the Y3Z grade of zirconium oxide possesses yttria, whereas the Y3 grade does not.

[0355] **Example 13: Gassing of Individual Separator Constituents**

[0356] The following materials, in powder form, were tested for gassing by enclosing the separator in an inert bag along with alkaline electrolyte and cathode material, prepared as described in Example 5, and heated to 60 °C for a period of 2 weeks. The data from these experiments are presented in FIGURES 18 and 19, and in the table below.

Material	Avg. Vol. per gram	Avg. Vol. gain (%)
Control-No powder	-0.32025	61%
0.35 g Y3 ZrO ₂	-1.65604	322%

Material	Avg. Vol. per gram	Avg. Vol. gain (%)
0.35 g Y3Z ZrO ₂	-0.6865	132%
0.35 g Zr-19 ZrO ₂	-0.63205	120%
0.35 g TiO ₂ (Fourpole)	-4.27427	788%
0.35 g Titanium (IV)	-3.6523	656%
0.35 g TiO ₂ (Rutile)	-4.51496	837%

[0357] Example 14: Evaluation of Test Cell Performance with Cycle Life

[0358] Referring to FIGURES 20 and 21, separators were placed in test cells and the test cells' performances were evaluated for cycle life. The test cells were constructed as follows:

[0359] The electrolyte, KOH (1.4 g/ml) is used for purpose of offering OH⁻ during the charge and discharge process. All separators were soaked in KOH for 3 hours before being assembled into clam cells. Discharge current was kept at 171 mAh and discharge density was about 213 mAh. A constant current charging was kept at 200 mAh (25 mAh/cm) until voltage reached 2.03 V, then a constant voltage at 1.98 V was kept for charging the cell until the cell reached a capacity of 600 mAh.

[0360] The composition of the cathode active material used was standard 1.3% PbAc-coated AgO : 2% doped + 3% coated AgO in a 80: 20 ratio. The binder used was 5% PVDF-co-HFP(21216) with MEK (methyl ethyl ketone). The binder and silver material are combined to form a dough that is pressed onto a cathode current collector: silver, commercial product of Dexmet. Cathode was pressed at 5.5T. And, the cathode was wrapped in SL fabric manufactured by SciMAT.

[0361] The composition of the anode material used was Zn-10 (87.77%), ZnO (6.76%), Bi₂O₃ (0.47%) with 5% PVDF-co-HFP (Solvay Solef 21216), dissolved by acetone. The anode was wrapped in a microporous polyethylene Solupor membrane. The anode was pressed onto a cathode current collector: In/brass 32 (80/20), 43 mm × 31 mm, pressed at 2T, a commercial product of Dexmet.

[0362] On review of the gassing data and the test cell cycle life data, the best performing batteries included those constructed from PE separators comprising zirconium oxide that included yttrium oxide (Y3Z grade zirconium oxide). As such, zirconium oxides that provided separators with improved cycle life gassed more readily than the control and the pure zirconium oxide, but less readily than the titanium-containing materials. In terms of the gassing experiments, the best performing separators were prepared with zirconium oxide that underwent an average volume gain of from about 100% to about 400%.

OTHER EMBODIMENTS

[0363] All publications and patents referred to in this disclosure are incorporated herein by reference to the same extent as if each individual publication or patent application were specifically and individually indicated to be incorporated by reference. Should the meaning of the terms in any of the patents or publications incorporated by reference conflict with the meaning of the terms used in this disclosure, the meaning of the terms in this disclosure are intended to be controlling. Furthermore, the foregoing discussion discloses and describes merely example embodiments of the present invention. One skilled in the art will readily recognize from such discussion and from the accompanying drawings and claims, that various changes, modifications and variations can be made therein without departing from the spirit and scope of the invention as defined in the following claims.

What is claimed is:

1. A separator for use in a silver-zinc rechargeable battery comprising:
a polymer material comprising ABS; and
a filler comprising a zirconium oxide material,
wherein the separator has a resistance of no more than about 2000 Ohm•cm.
2. The separator of claim 1, wherein the separator has a pore size of about 5 nm or greater.
3. The separator of either of claims 1 or 2, wherein the polymer material further comprises a water soluble polymer.
4. The separator of claim 3, wherein the polymer material comprises from about 1 wt% to about 30 wt% of a water soluble polymer.
5. The separator of either of claims 3 or 4, wherein the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, polystyrene sulfonic acid, or any combination thereof.
6. The separator of any one of claims 1-5, further comprising greater than about 10 wt% of filler.
7. The separator of any one of claims 1-6, wherein the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm.
8. The separator of any one of claims 1-7, wherein the filler is substantially free of titanium.
9. The separator of any one of claims 1-8, further comprising a dispersant.
10. The separator of claim 9, further comprising from about 0.1 wt% to about 9.99 wt% of dispersant.

11. The separator of either of claims 11 or 12, wherein the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof.
12. The separator of any one of claims 1-11, wherein the zirconium oxide material comprises from about 1 mol% to about 10 mol% of yttrium oxide.
13. The separator of any one of claims 1-12, further comprising a substrate.
14. The separator of claim 13, wherein the substrate comprises a woven or nonwoven film.
15. The separator of either of claims 13 or 14, wherein the substrate comprises a polyolefin.
16. The separator of claim 15, wherein the polyolefin comprises polyethylene, polypropylene, or any combination thereof.
17. A separator for use in a silver-zinc rechargeable battery comprising:
 - a polymer material comprising from about 1 wt% to less than about 50 wt% of ABS; and
 - a zirconium oxide material comprising a powder having a mean grain diameter of from about 40 nm to about 1000nm,wherein the separator has a resistance of no more than about 2000 Ohm•cm.
18. The separator of claim 17, further comprising a substrate.
19. The separator of claim 18, wherein the substrate comprises a polyolefin.
20. The separator of claim 19, wherein the polyolefin comprises polyethylene, polypropylene, or any combination thereof.
21. The separator of any one of claims 17-20, wherein the polymer material further comprises from about 1 wt% to about 30 wt% of a water soluble polymer.

22. The separator of claim 21, wherein the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, polystyrene sulfonic acid, or any combination thereof.
23. The separator of any one of claims 17-22, further comprising from about 0.1 wt% to about 9.99 wt% of dispersant.
24. The separator of claim 23, wherein the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof.
25. A rechargeable battery comprising:
a cathode comprising a silver material;
an anode comprising a zinc material; and
a separator comprising:
a polymer material comprising ABS; and
a zirconium oxide material,
wherein the separator comprises greater than 10 wt% of zirconium oxide material.
26. The battery of claim 25, wherein the polymer material further comprises a water soluble polymer.
27. The battery of claim 26, wherein the polymer material comprises from about 1 wt% to about 30 wt% of the water soluble polymer.
28. The battery of claim 27, wherein the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, a polystyrene sulfonic acid, or any combination thereof.
29. The battery of any one of claims 25-28, wherein the separator further comprises greater than about 10 wt% of zirconium oxide material.
30. The battery of any one of claims 25-29, wherein the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm.

31. The battery of any one of claims 25-30, wherein the separator is substantially free of titanium.
32. The battery of any one of claims 25-31, wherein the separator further comprises a dispersant.
33. The battery of claim 32, wherein the separator comprises from about 0.1 wt% to about 9.99 wt% of dispersant.
34. The battery of claim 33, wherein the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof.
35. The battery of any one of claims 25-34, wherein the zirconium oxide material comprises from about 1 mol% to about 10 mol% of yttrium oxide.
36. The battery of any one of claims 25-35, wherein the separator further comprises a substrate, and the substrate comprises a woven or nonwoven film.
37. The battery of claim 36, wherein the substrate comprises a polyolefin.
38. The battery of claim 37, wherein the polyolefin comprises polyethylene, polypropylene, or any combination thereof.
39. A method of manufacturing a separator for use in a silver-zinc rechargeable battery comprising:
 providing a first mixture comprising an ABS polymer, a dispersant, a solvent, and a zirconium oxide material; and
 drying the mixture to generate a separator.
40. The method of claim 39, wherein the first mixture further comprises a water soluble polymer.
41. The method of claim 40, wherein the water soluble polymer comprises polyvinylpyrrolidone, polyvinyl alcohol, polyacrylic acid, carbopol, polyethylene glycol, polystyrene sulfonic acid, or any combination thereof.

42. The method of any one of claims 39-41, wherein the zirconium oxide material comprises a powder having a mean grain diameter of greater than about 30 nm.
43. The method of claim 42, wherein the zirconium oxide powder is substantially free of titanium.
44. The method of any one of claims 39-43, wherein the dispersant comprises dodecylbenzenesulfonic acid or any salt thereof.
45. The method of either of claims 42 or 43, wherein the zirconium oxide powder comprises from about 1 mol% to about 10 mol% of yttrium oxide.
46. The method of any one of claims 39-45, wherein the solvent comprises a polar aprotic solvent.
47. The method of claim 46, wherein the polar aprotic solvent comprises 2-butanone, acetone, or any combination thereof.
48. The method of claim 47, wherein the solvent further comprises 1-methyl-2-pyrrolidinone.
49. The method of any one of claims 39-48, further comprising casting the first mixture onto a surface.
50. The method of claim 49, wherein the surface comprises a film comprising a polyolefin comprising polyethylene, polypropylene, or any combination thereof.
51. A separator for use in a silver-zinc rechargeable battery comprising:
a polymer material comprising PVDF; and
a filler comprising zirconium oxide material,
wherein the separator has a resistance of no more than about 20 Ohm•cm.
52. The separator of claim 51, wherein the polymer material comprises PVDF, and the PVDF comprises a homopolymer, a copolymer, or any combination thereof.

53. The separator of claim 52, wherein the PVDF comprises a copolymer selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof.
54. The separator of claim 52, wherein the PVDF comprises a copolymer, and the copolymer comprises a VDF monomer and monomer comprising a halogenated C₃₋₅ aliphatic.
55. The separator of claim 54, wherein the halogenated C₃₋₅ aliphatic monomer comprises hexafluoropropylene.
56. The separator of any one of claims 51-55, wherein the PVDF comprises a homopolymer or copolymer either of which has a mean molecular weight of about 200,000 amu or greater.
57. The separator of any one of claims 51-56, further comprising greater than about 45 wt% of zirconium oxide material.
58. The separator of any one of claims 51-57, wherein the zirconium oxide material comprises a powder having a mean grain diameter of less than about 1 micron.
59. The separator of any of claims 51-58, wherein the zirconium oxide powder further comprises yttria.
60. The separator of claim 59, wherein the zirconium oxide powder further comprises from about 1 mol% to about 10 mol% of yttria.
61. A separator for use in a silver-zinc rechargeable battery comprising:
a polymer comprising a copolymer, wherein the copolymer comprises PVDF-co-HFP having a mean molecular weight of greater than about 450,000 amu; and
zirconium oxide powder having an mean grain diameter of less than about 0.75 microns,
wherein the separator has a resistance of no more than about 20 Ohm•cm.

62. A rechargeable battery comprising:
a cathode comprising a silver material;
an anode comprising a zinc material; and
a separator comprising a polymer material comprising PVDF and zirconium oxide powder.
63. The battery of claim 62, wherein the PVDF comprises a homopolymer, a copolymer, or any combination thereof.
64. The battery of claim 63, wherein the PVDF comprises a copolymer selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof.
65. The battery of claim 63, wherein the PVDF comprises a copolymer comprising a VDF monomer and a halogenated C₃₋₅ aliphatic monomer.
66. The battery of claim 65, wherein the halogenated C₃₋₅ aliphatic monomer comprises hexafluoropropylene.
67. The battery of any one of claims 62-66, wherein the PVDF comprises a homopolymer or a copolymer either of which has a mean molecular weight of about 200,000 amu or greater.
68. The battery of any one of claims 62-67, wherein the separator further comprises greater than about 45 wt% of zirconium oxide material.
69. The battery of any one of claims 62-68, wherein the zirconium oxide material comprises a powder having a mean grain diameter of less than about 1 micron.
70. The battery of claim 69, wherein the zirconium oxide powder further comprises yttria.
71. The battery of claim 70, wherein the zirconium oxide powder comprises from about 1 mol% to about 10 mol% of yttria.

72. A method of manufacture of a separator for use in a silver-zinc rechargeable battery comprising:
- mixing a PVDF polymer material with an aprotic solvent to form a first mixture;
 - mixing the first mixture with a filler comprising zirconium oxide powder to form a second mixture; and
 - drying the mixture to generate a separator.
73. The method of claim 72, wherein the PVDF polymer material comprises a homopolymer, a copolymer, or any combination thereof.
74. The method of claim 73, wherein the PVDF polymer material comprises a PVDF-copolymer, and the PVDF-copolymer is selected from a block copolymer, an alternating copolymer, a statistical copolymer, a graft copolymer, or any combination thereof.
75. The method of claim 74, wherein the PVDF-copolymer comprises a VDF monomer and a halogenated C₃₋₅ aliphatic monomer.
76. The method of claim 75, wherein the halogenated C₃₋₅ aliphatic monomer comprises hexafluoropropylene.
77. The method of any one of claims 72-77, wherein the second mixture comprises greater than about 25 wt% zirconium oxide powder.
78. The method of any one of claims 72-77, wherein the second mixture comprises from about 50 wt% to about 90 wt% of zirconium oxide powder.
79. The method of claim 78, wherein the zirconium oxide powder comprises a mean grain diameter of less than about 1 micron.
80. The method of any one of claims 72-79, wherein the aprotic solvent comprises acetone, dimethyl sulfoxide, ethyl acetate, dichloromethane, tetrahydrofuran, dimethylformamide, acetonitrile, or any combination thereof.
81. The method of claim 80, wherein the aprotic solvent comprises acetone.

82. The method of any one of claims 72-81, further comprising casting the second mixture to form a film.
83. The method of claim 82, wherein the mixture is cast to give a film having a mean thickness of from about 0.01 inches to about 0.03 inches.
84. The method of any one of claims 72-83, further comprising adding a phthalate to the second mixture.
85. The method of claim 84, further comprising washing the second mixture with a washing solvent to remove the phthalate.
86. The method of either of claims 84 or 85 wherein the phthalate is dibutyl phthalate.
87. A method of manufacture of a separator for use in a silver-zinc rechargeable battery comprising:
combining a polymer selected from PVDF homopolymer, a PVDF-copolymer, or a combination thereof, with an organic solvent to form a solution;
mixing a powder comprising zirconium oxide and yttria into the solution to form a mixture;
casting the mixture over a surface; and
drying the mixture to form a membrane.
88. The method of claim 87, further comprising:
mixing a phthalate into the mixture; and
washing the phthalate from the membrane with an washing solvent comprising an alcohol.
89. The method of claim 88, wherein the phthalate is dibutyl phthalate and alcohol is isopropyl alcohol.
90. A separator for use in a silver-zinc rechargeable battery comprising:
a polyolefin polymer material having a mean molecular weight of at least about 500,000 amu; and
a filler comprising zirconium oxide material, wherein the zirconium oxide

material comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler is substantially free of titanium.

91. The separator of claim 90, wherein the zirconium oxide material comprises a powder having a surface area of at least about 5 m²/g.

92. The separator of claim 91, wherein the zirconium oxide material comprises a powder having a surface area of from about 6 m²/g to about 15 m²/g.

93. The separator of claim 90, wherein the zirconium oxide material comprises a powder having a mean grain diameter of less than about 1.5 microns.

94. The separator of claim 93, wherein the zirconium oxide material comprises a powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns.

95. The separator of claim 90, wherein the zirconium oxide material comprises from about 2.5 mol% to about 4 mol% of yttrium oxide.

96. The separator of claim 90, wherein the polyolefin polymer material has a mean molecular weight of at least about 1,000,000 amu.

97. The separator of claim 90, further comprising about 80 wt% or more of the filler and about 20 wt% or less of the polyolefin polymer material.

98. The separator of claim 90, wherein the polyolefin polymer material comprises polyethylene, polypropylene, or any combination thereof.

99. A rechargeable battery comprising:

a cathode comprising a silver material;

an anode comprising a zinc material; and

a separator comprising:

a polyolefin polymer material having a mean molecular weight of at least about 500,000 amu; and

a filler comprising zirconium oxide material, wherein the zirconium oxide material comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler

is substantially free of titanium.

100. The battery of claim 99, wherein the zirconium oxide material comprises a powder having a surface area of at least about 5 m²/g.

101. The battery of claim 100, wherein the zirconium oxide material comprises a powder having a surface area of from about 6 m²/g to about 15 m²/g.

102. The battery of claim 99, wherein the zirconium oxide material comprises a powder having a mean grain diameter of less than about 1.5 microns.

103. The battery of claim 102, wherein the zirconium oxide material comprises a powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns.

104. The battery of claim 99, wherein the zirconium oxide material comprises from about 2.5 mol% to about 4 mol% of yttrium oxide.

105. The battery of claim 99, wherein the polyolefin polymer material has a mean molecular weight of at least about 1,000,000 amu.

106. The battery of claim 99, wherein the separator further comprises about 80 wt% or more of the filler and about 20 wt% or less of the polyolefin polymer material.



107. The battery of claim 99, wherein the polyolefin polymer material comprises polyethylene, polypropylene, or any combination thereof.

108. A method of manufacturing a separator for use in silver zinc rechargeable batteries comprising:

combining a polyolefin polymer material and a filler to generate a mixture; and
processing the mixture to form a separator,

wherein the polyolefin polymer material has a mean molecular weight of at least about 500,000 amu, the filler comprises zirconium oxide material, wherein the zirconium oxide material comprises from about 2 mol% to about 8 mol% of yttrium oxide, and the filler is substantially free of titanium.

109. The method of claim 108, wherein the zirconium oxide material comprises a powder having a surface area of at least about 5 m²/g.
110. The method of claim 109, wherein the zirconium oxide material comprises a powder having surface area of from about 6 m²/g to about 15 m²/g.
111. The method of claim 108, wherein the zirconium oxide material comprises a powder having a mean grain diameter of less than about 1.5 microns.
112. The method of claim 111, wherein the zirconium oxide material comprises powder having a mean grain diameter of from about 0.5 micron to about 1.2 microns.
113. The method of claim 108, wherein the zirconium oxide material comprises from about 2.5 mol% to about 4 mol% of yttrium oxide.
114. The method of claim 108, wherein the polyolefin polymer material comprises a mean molecular weight of at least about 1,000,000 amu.
115. The method of claim 108, wherein the separator comprises 80 wt% or more of the filler and 20 wt% or less of the polyolefin polymer material.
116. The method of claim 108, wherein the polyolefin polymer material comprises polyethylene, polypropylene, or any combination thereof.
117. The method of claim 108, further comprising combining a plasticizer and the polyolefin polymer material.
118. The method of claim 117, wherein the plasticizer comprises a petroleum oil, a lubricating oil, a fuel oil, a tall oil, a linseed oil, or any combination thereof.
119. The method of claim 118, wherein the mixture has a pH of less than 9.

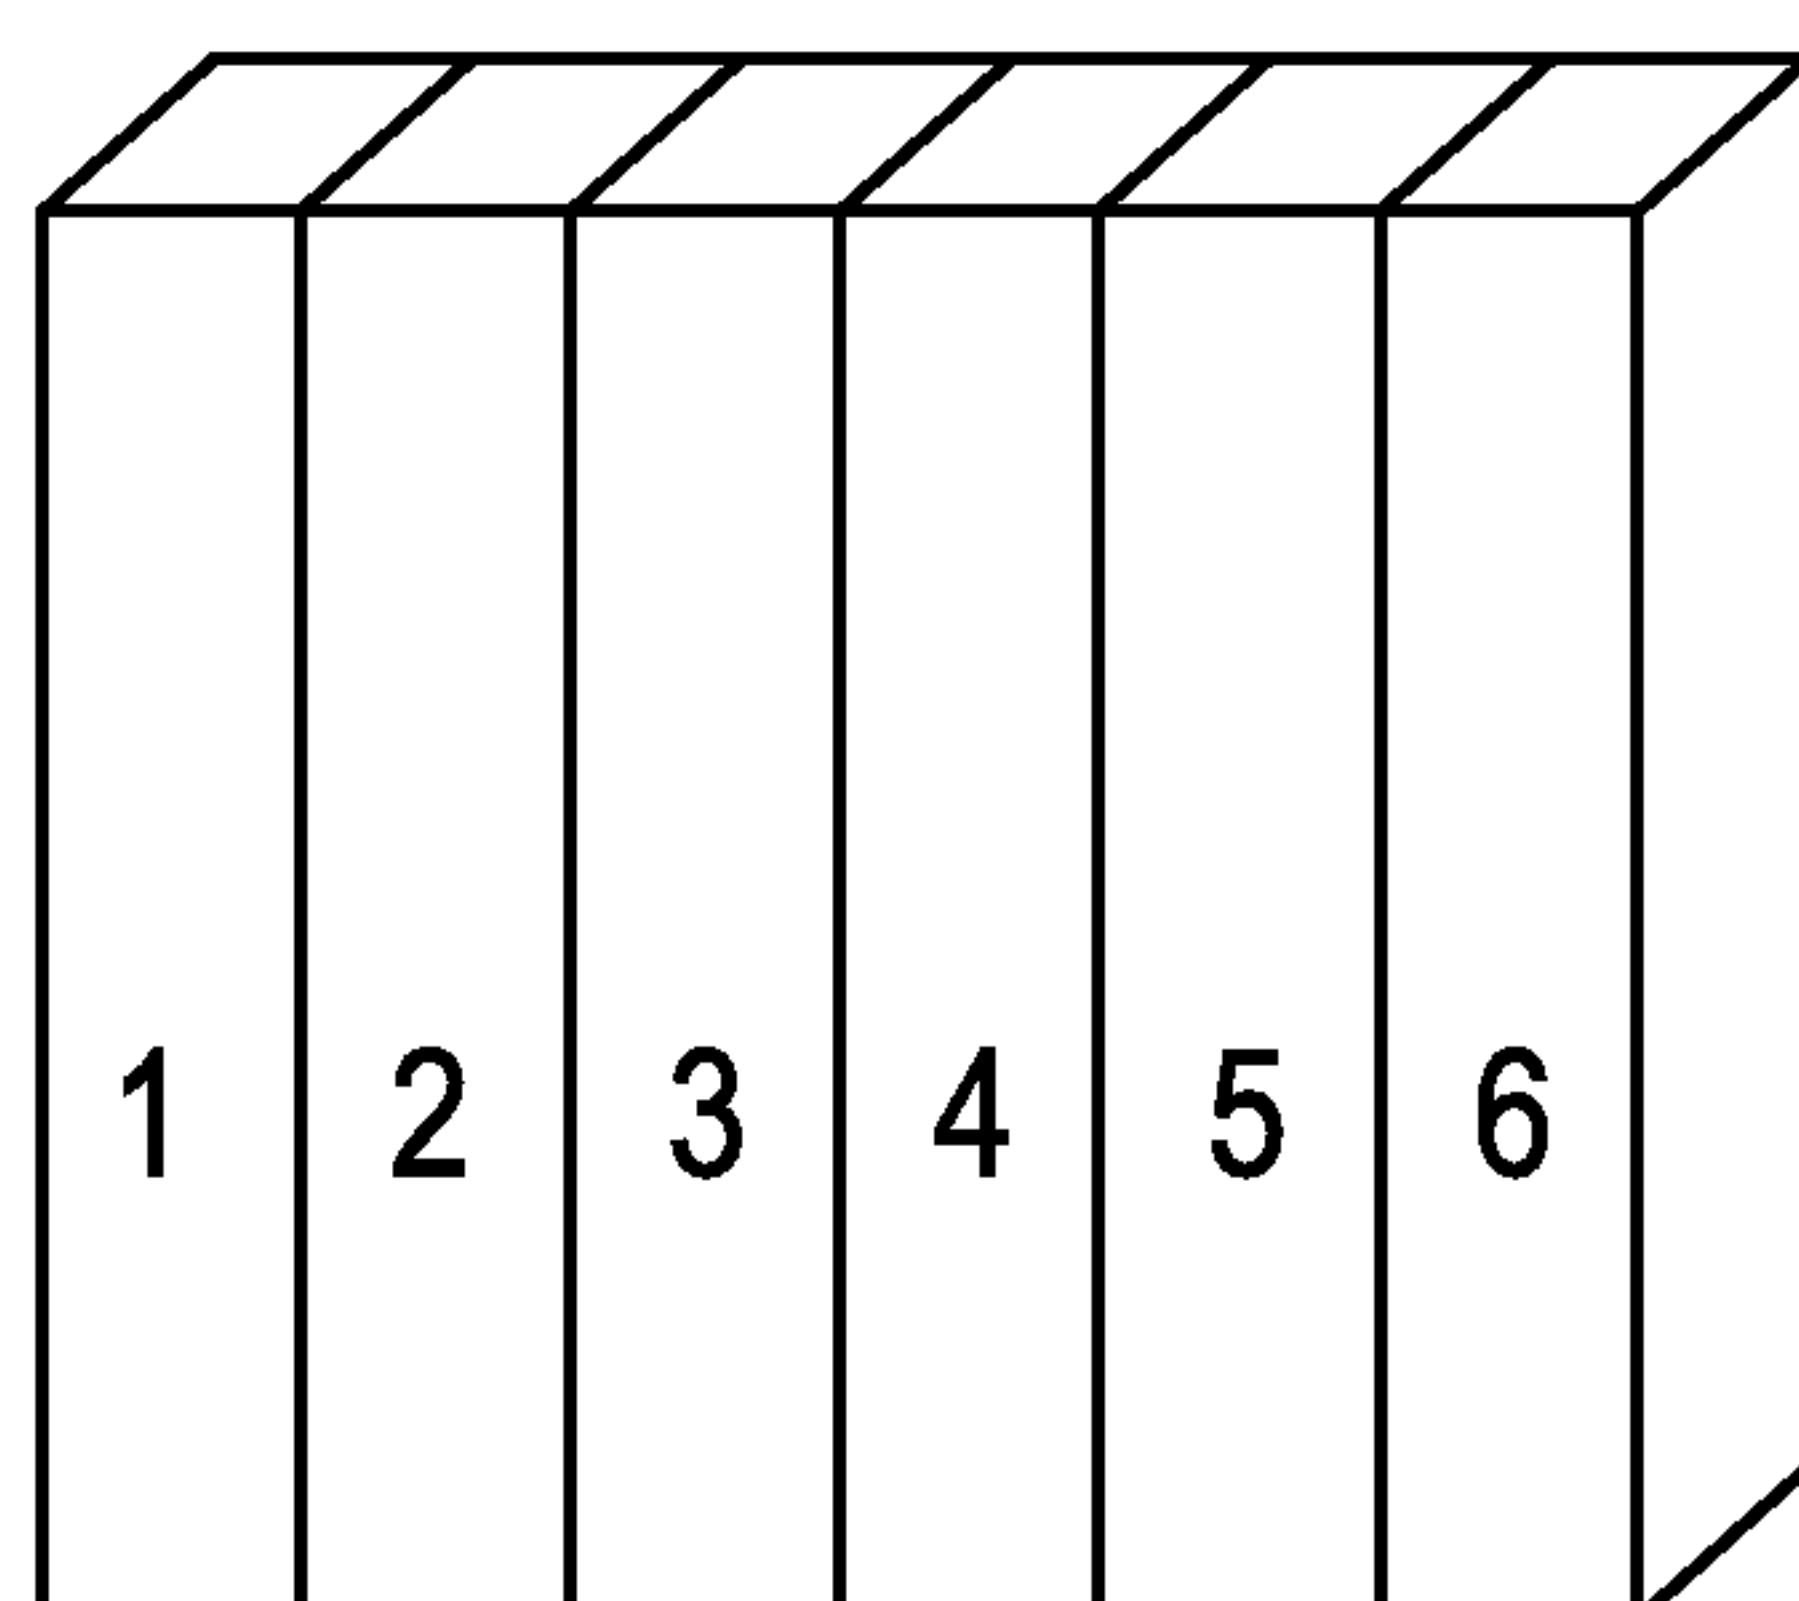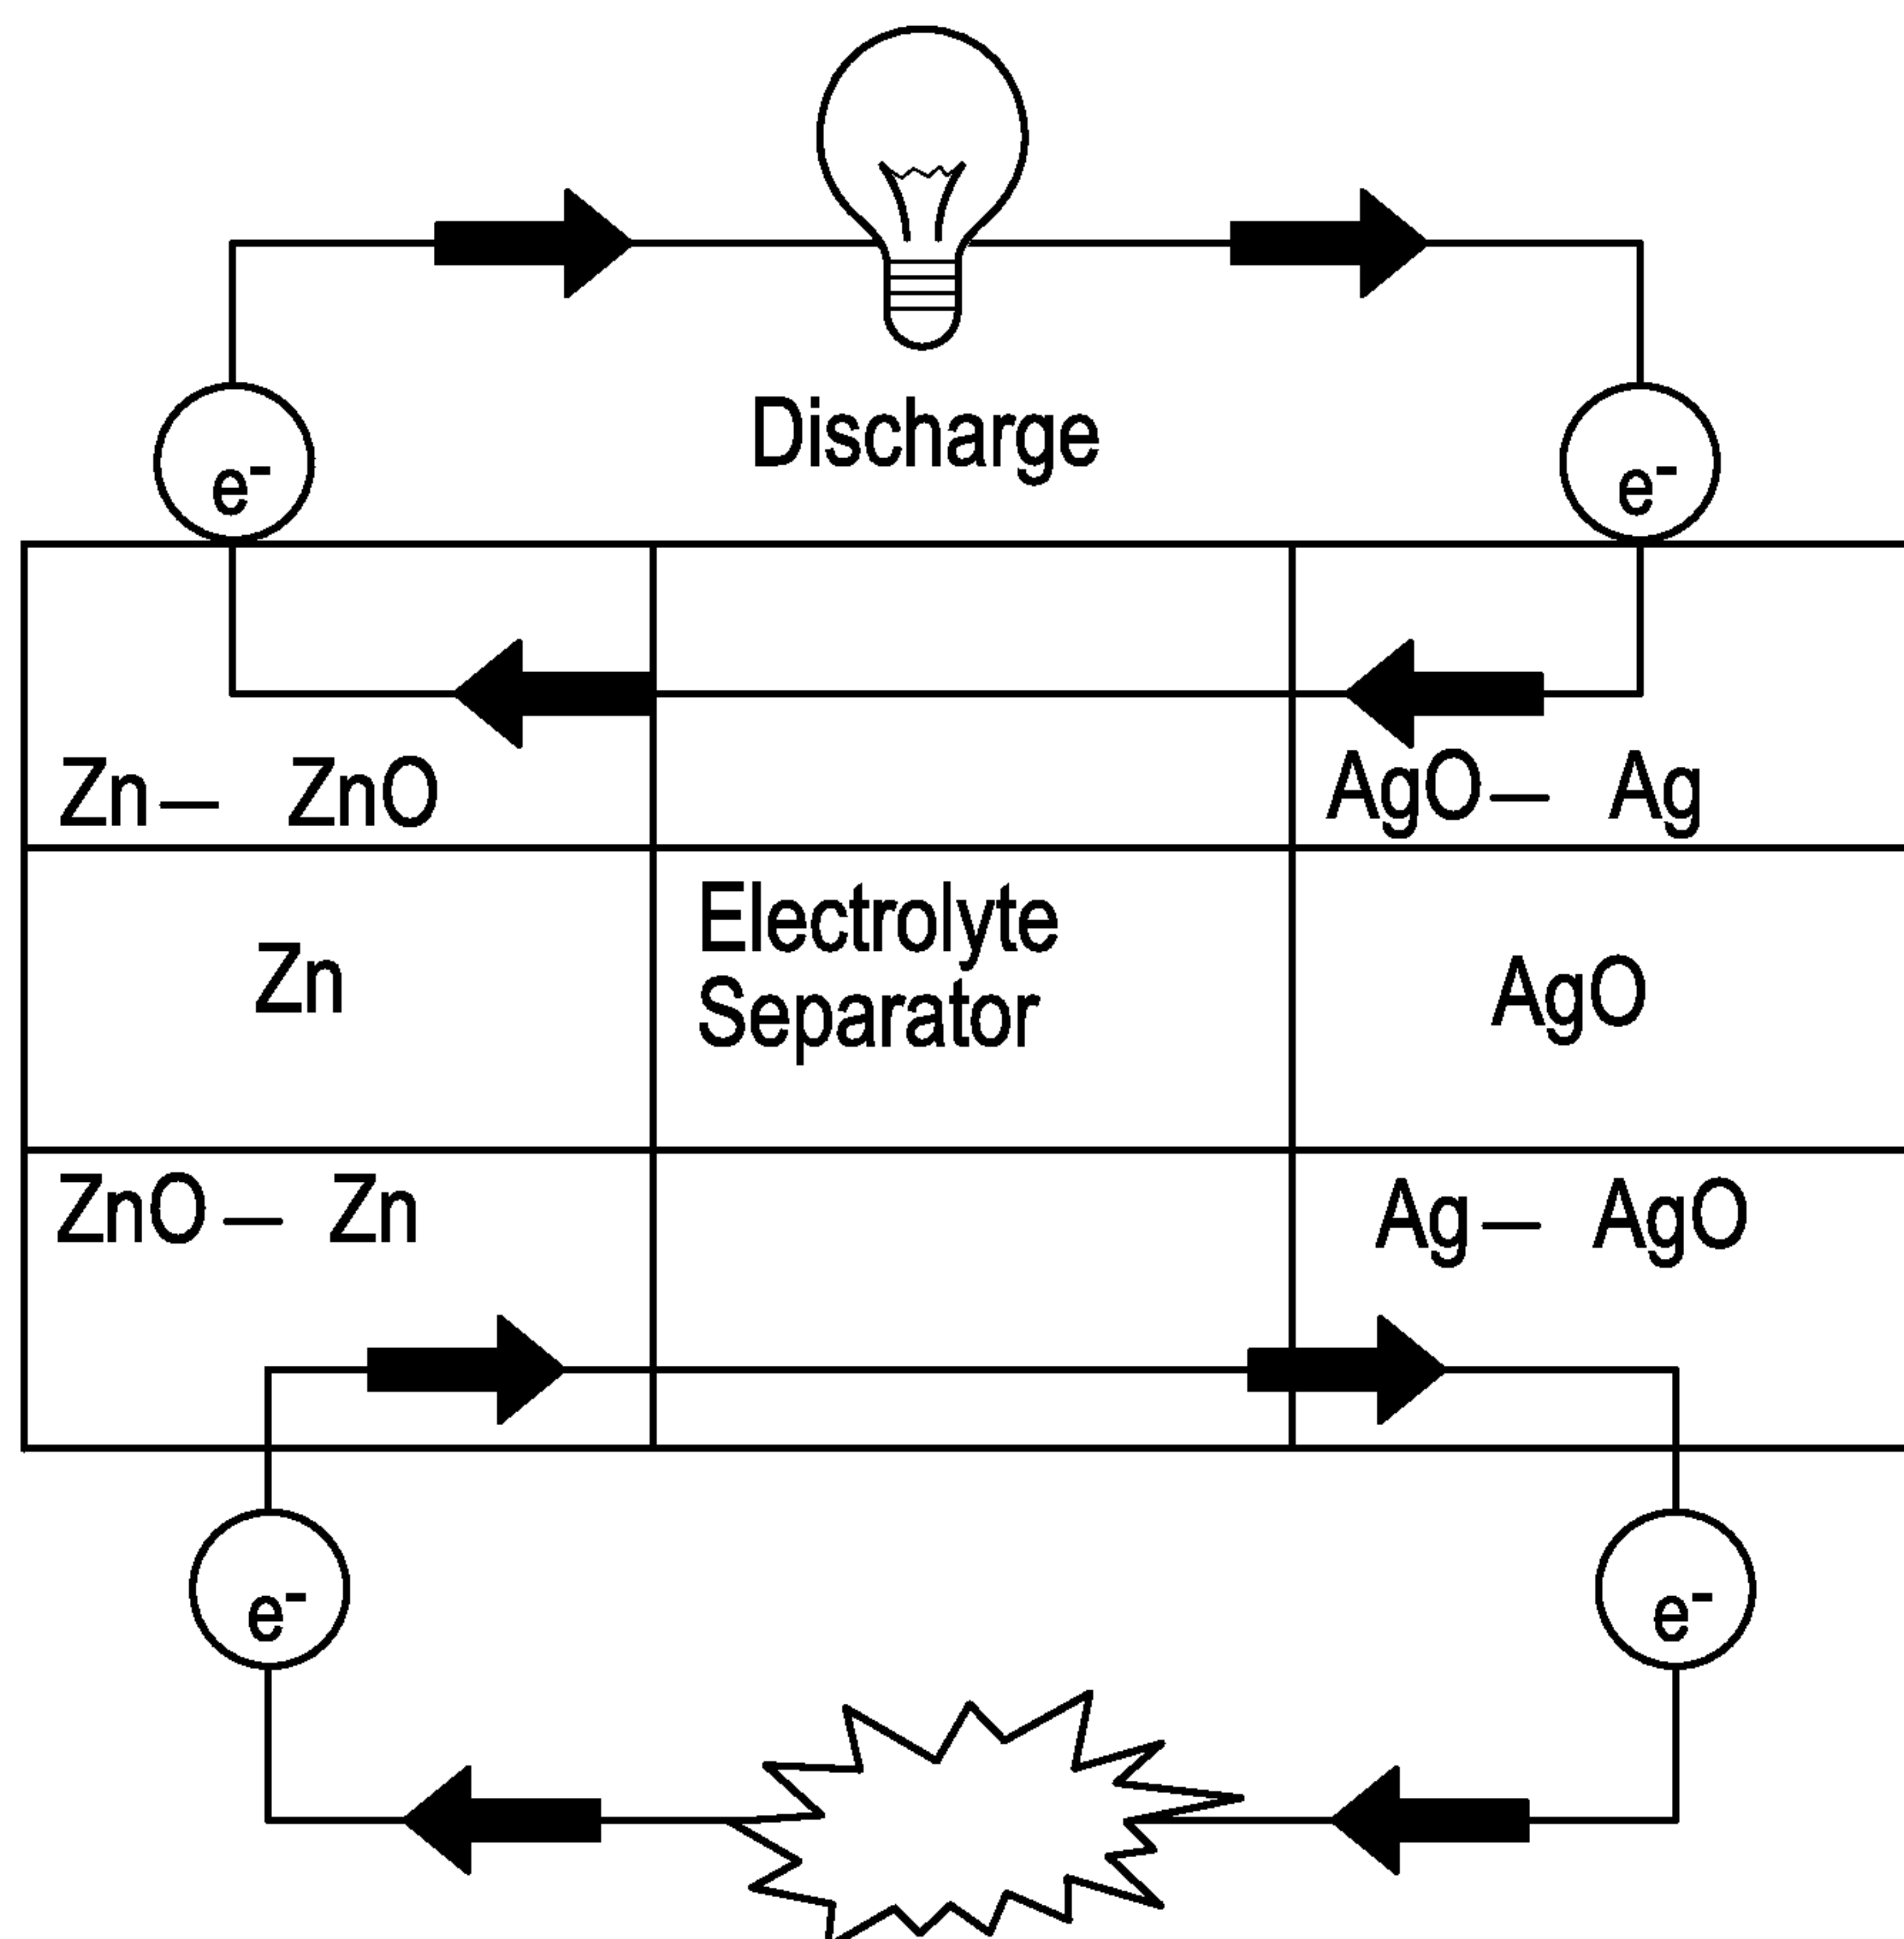

1. Cathode: Silver Material
2. SciMat
3. ALK-24
4. ABS
5. Solupor
6. Anode

FIG. 1

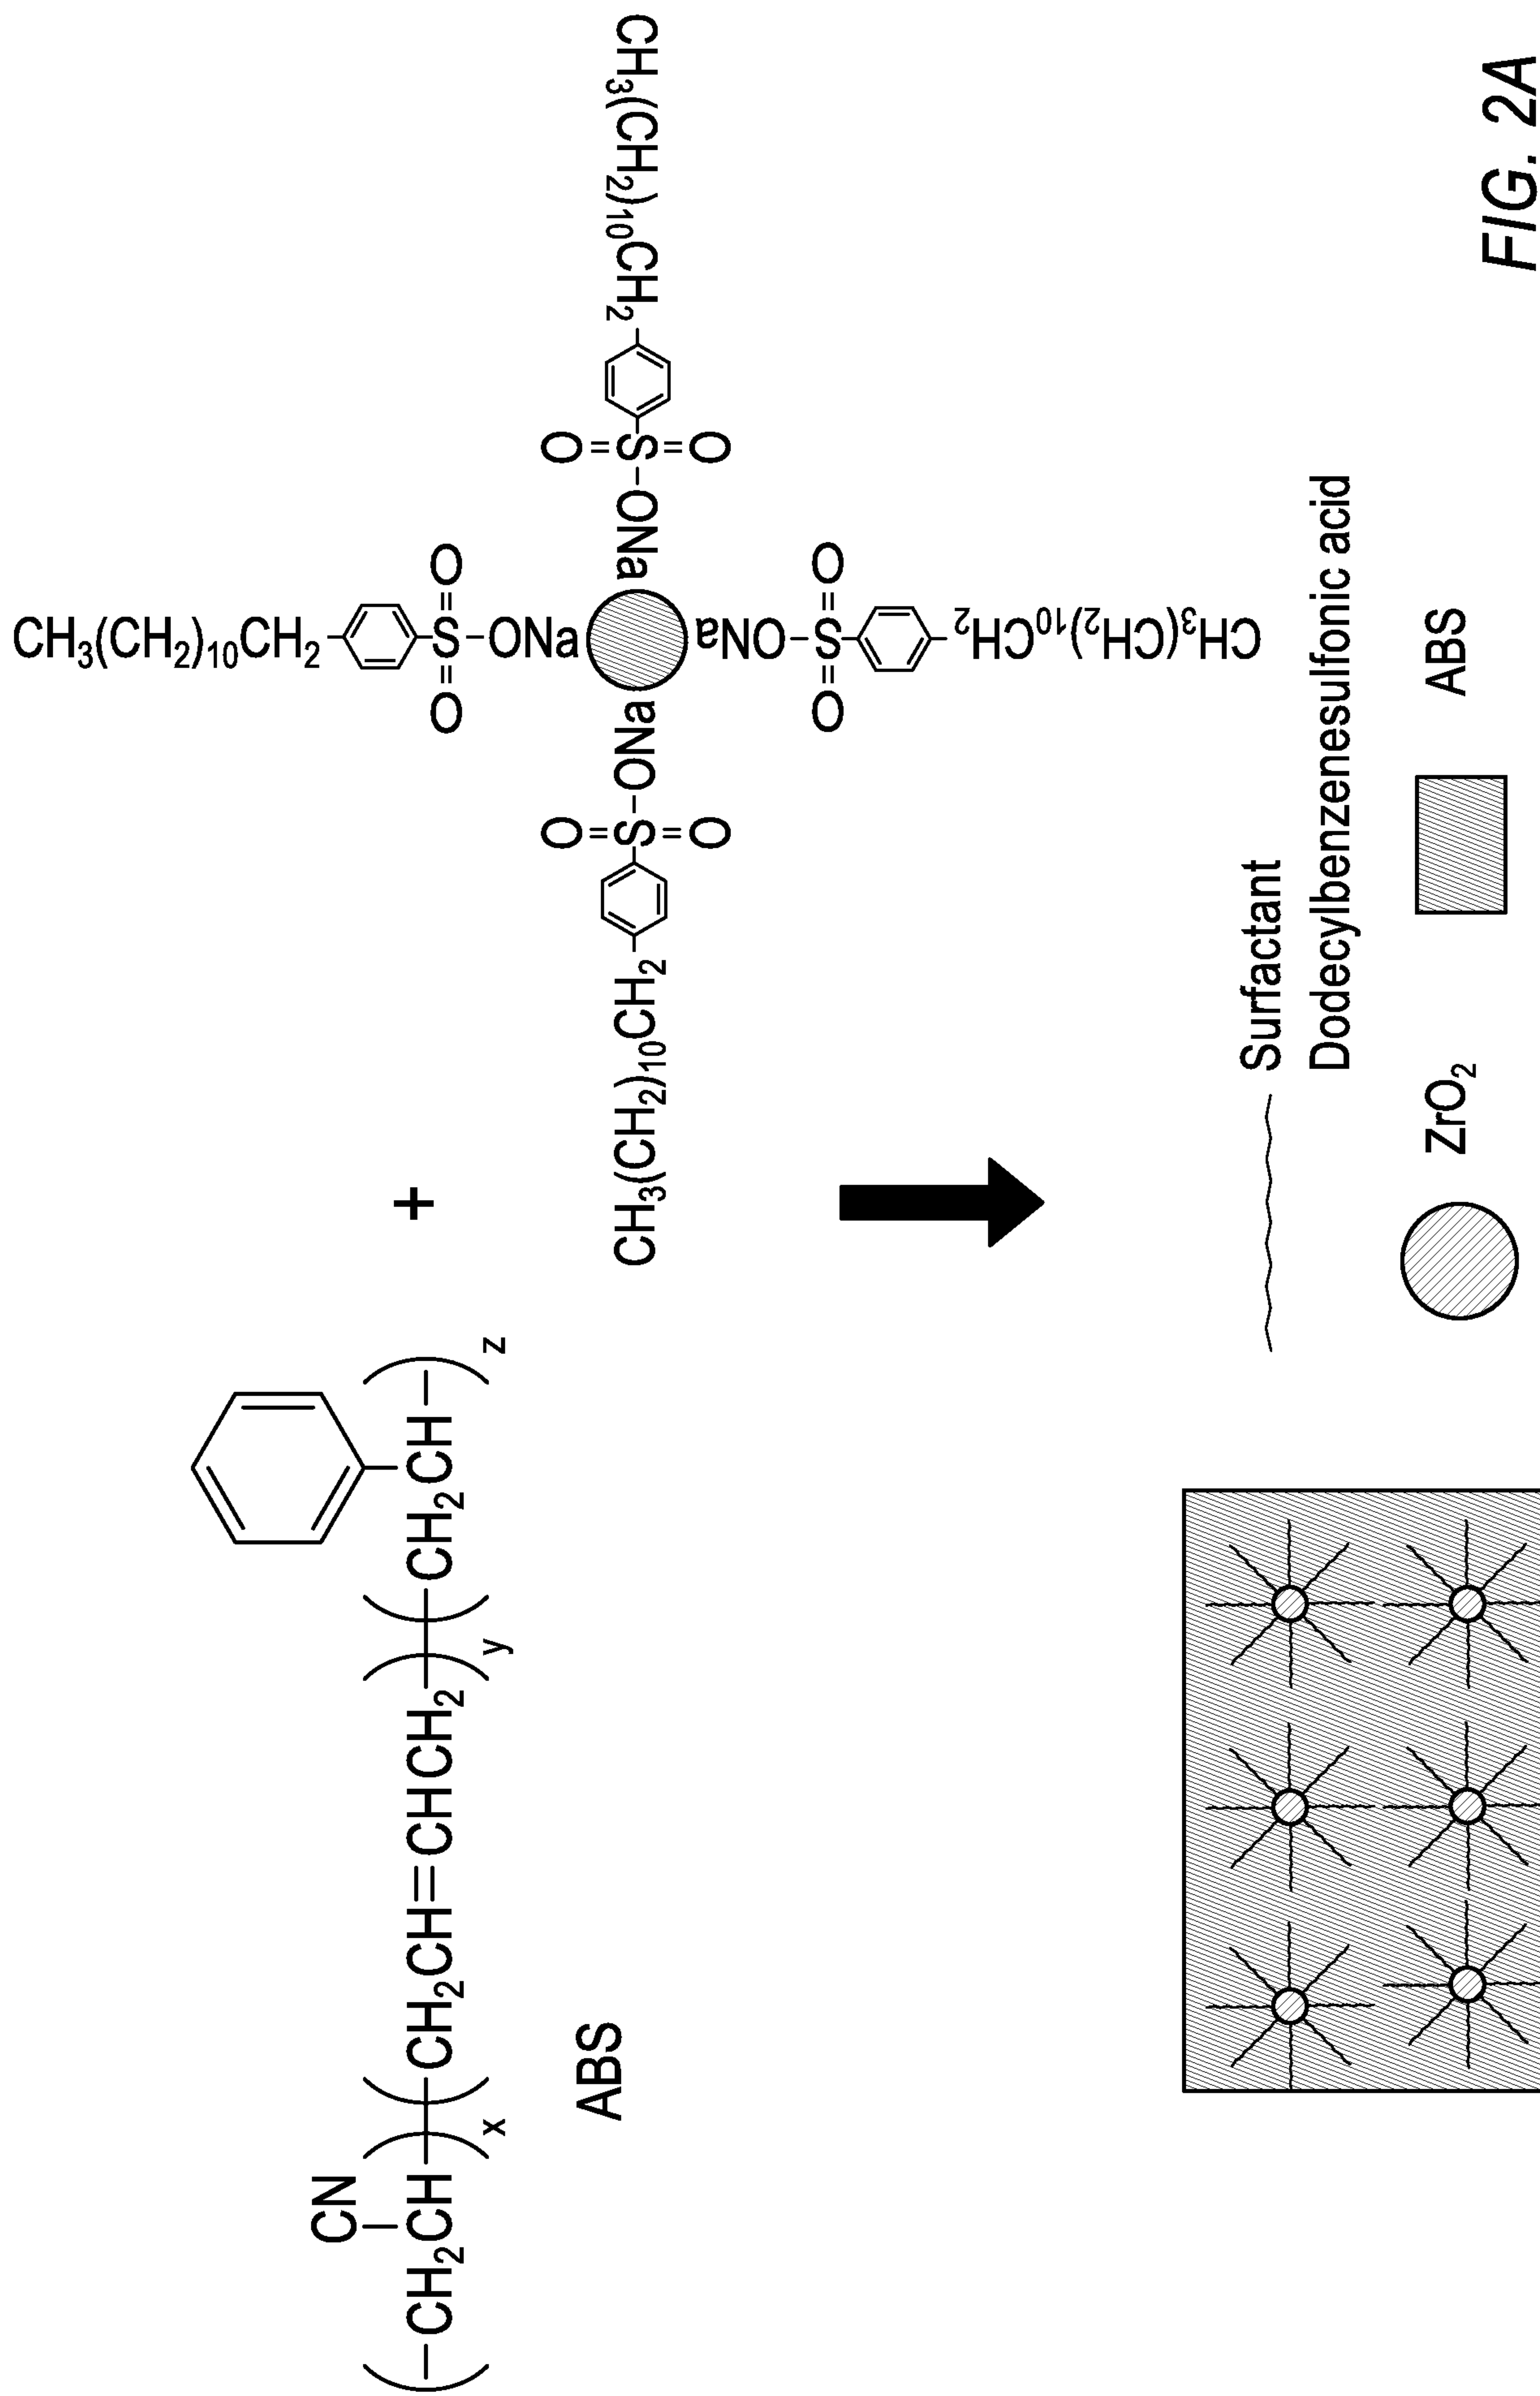


FIG. 2A

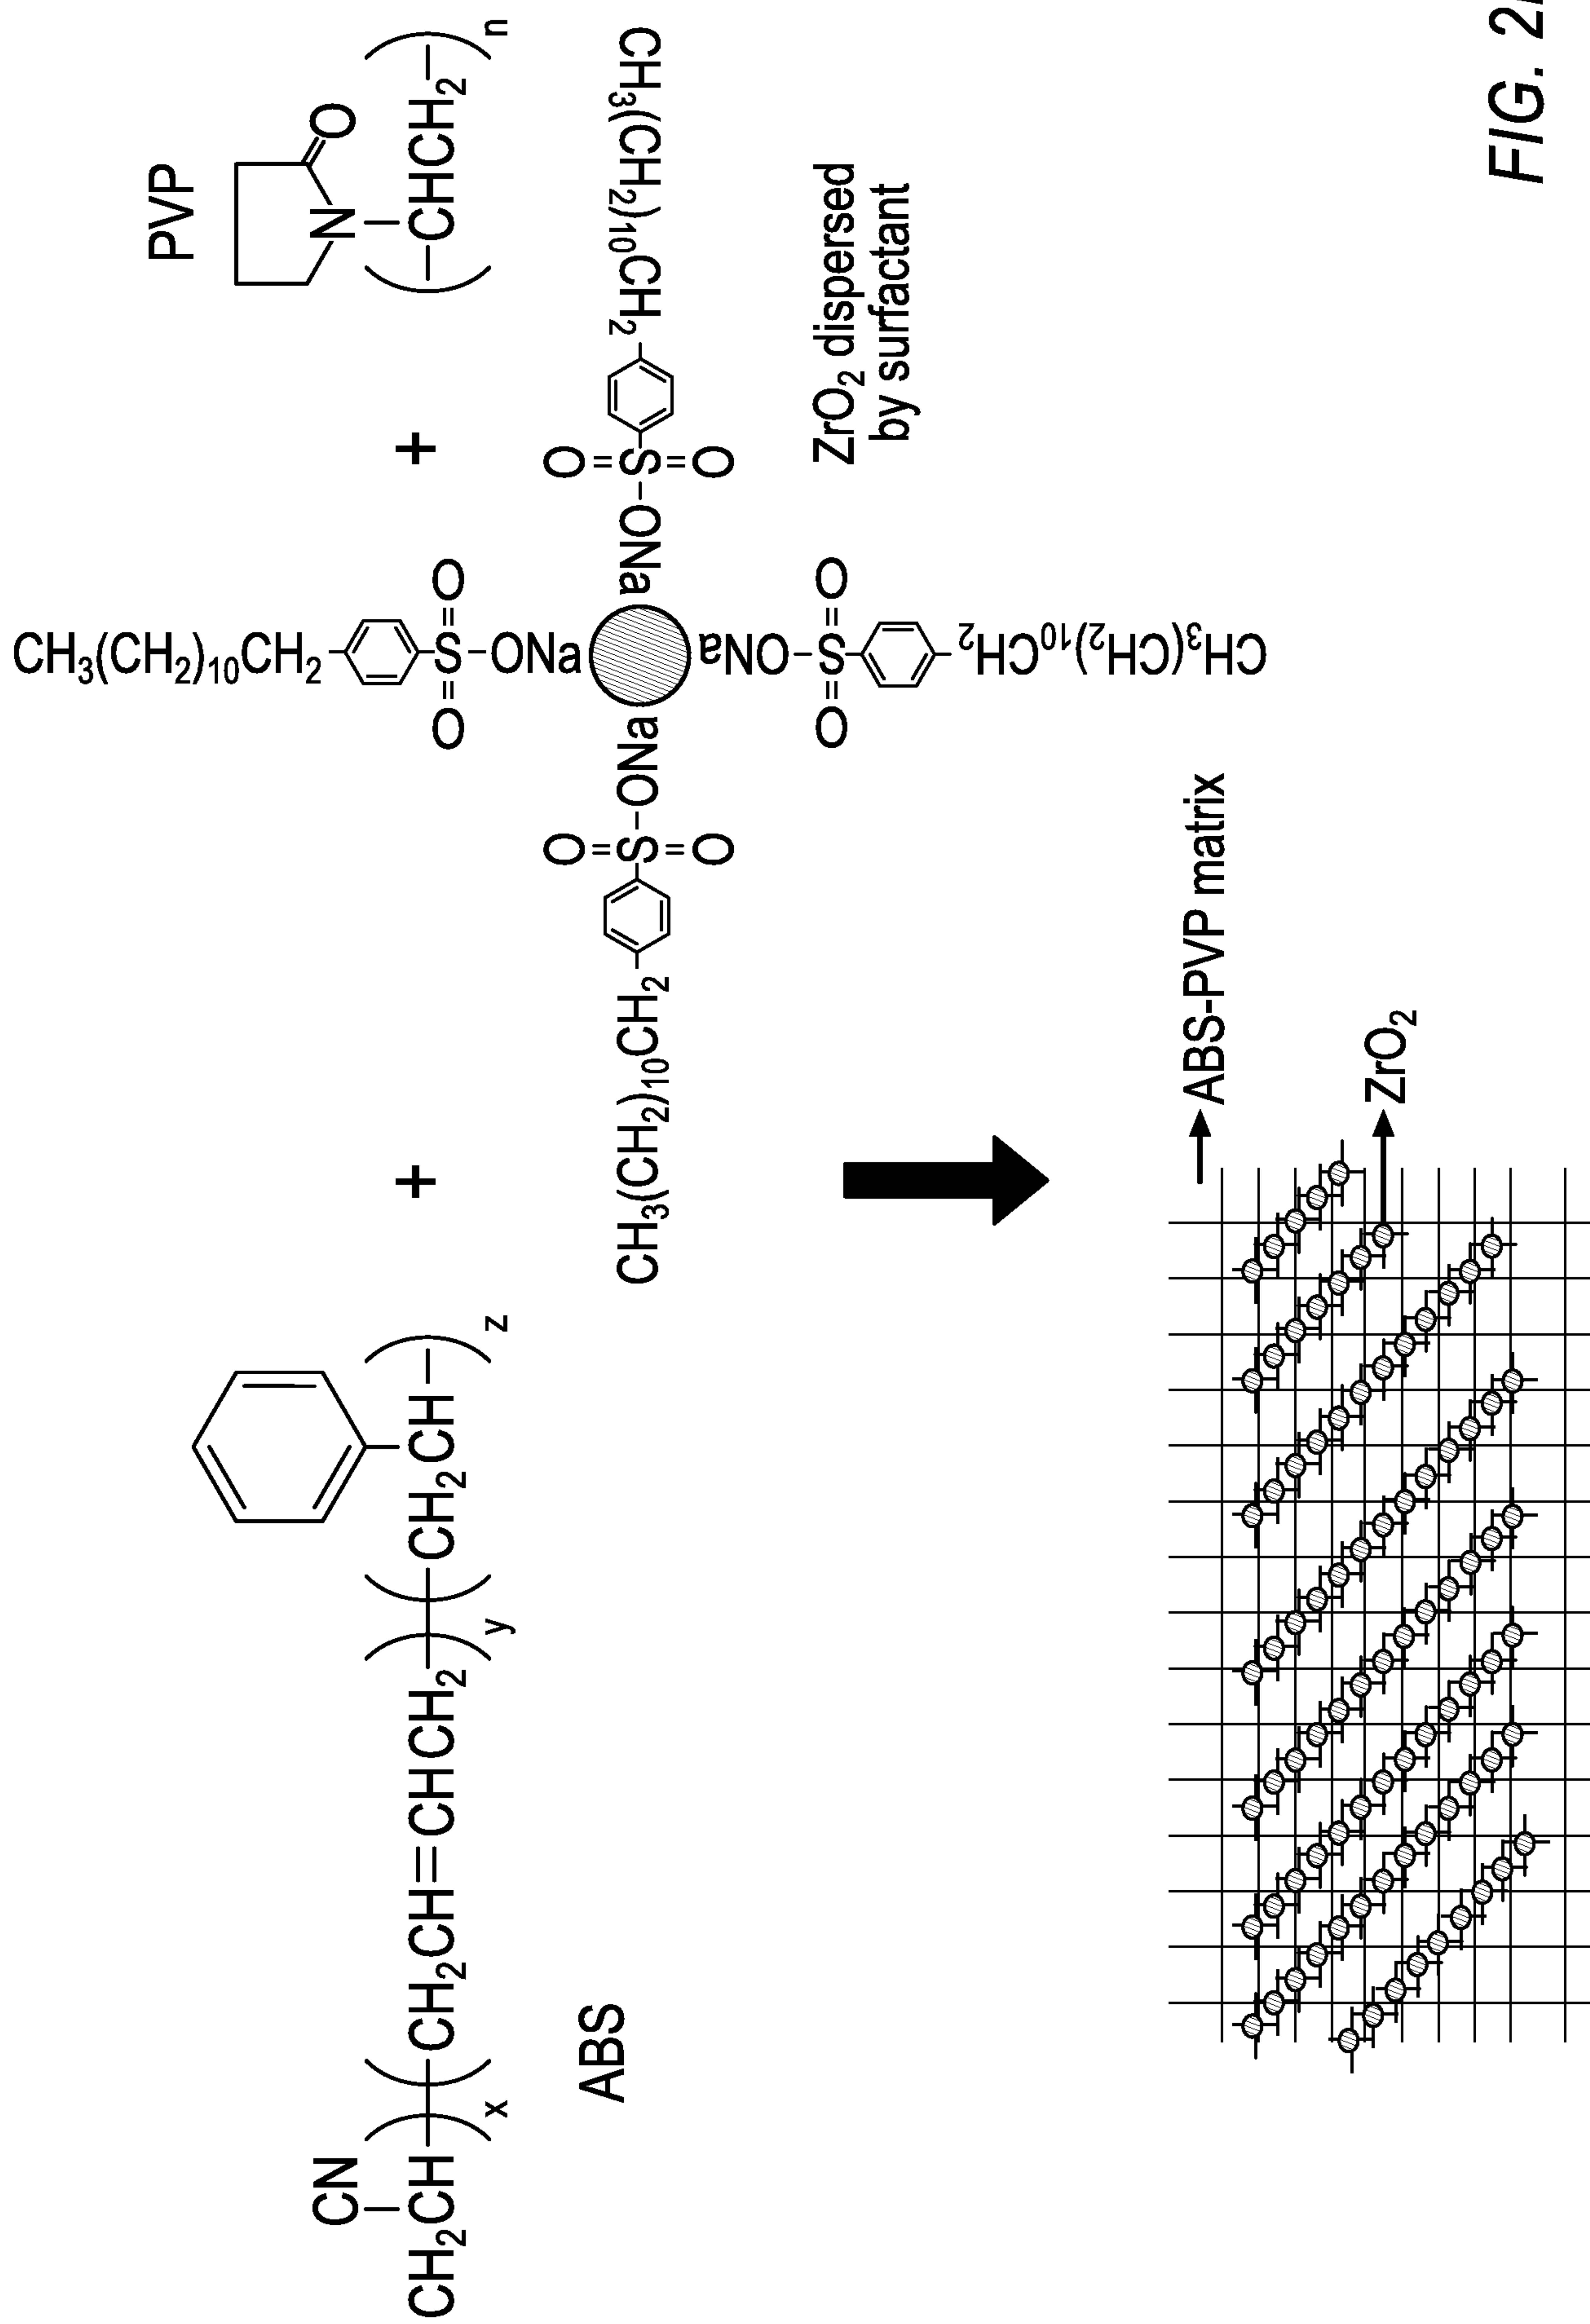


FIG. 2B

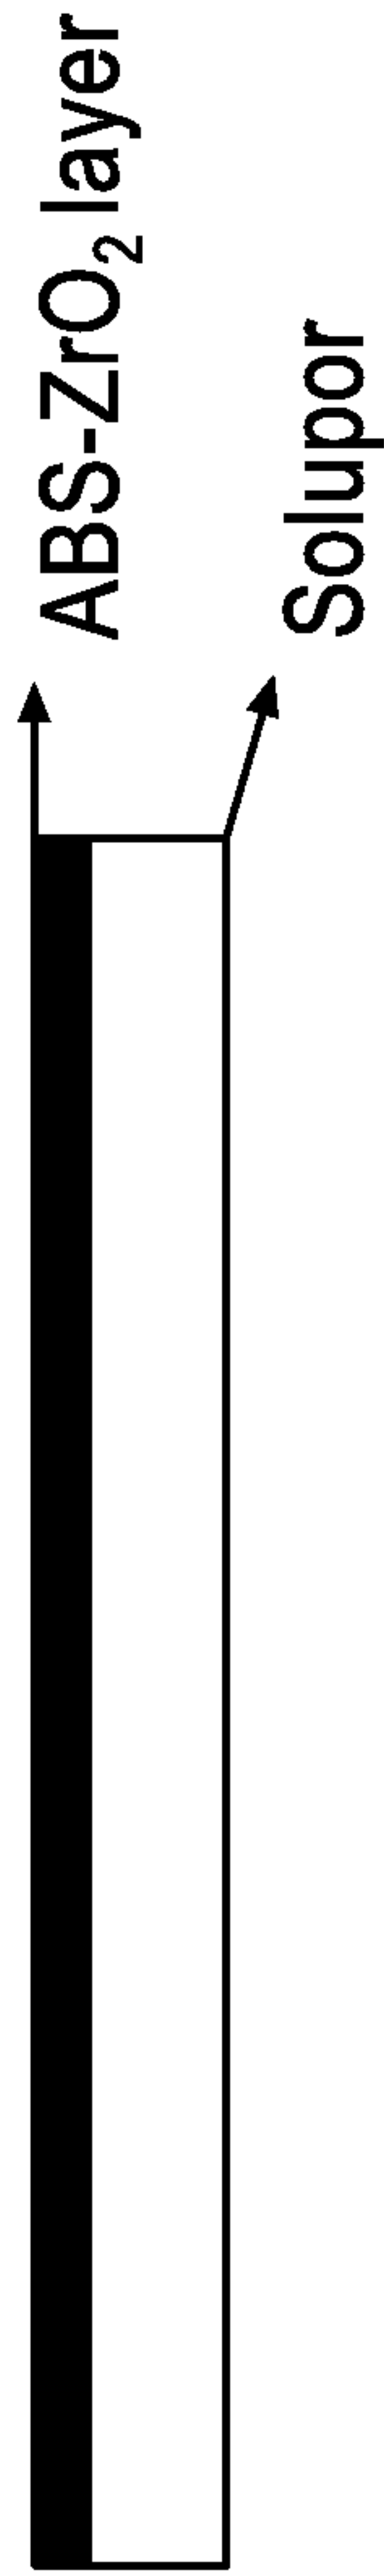


FIG. 4A


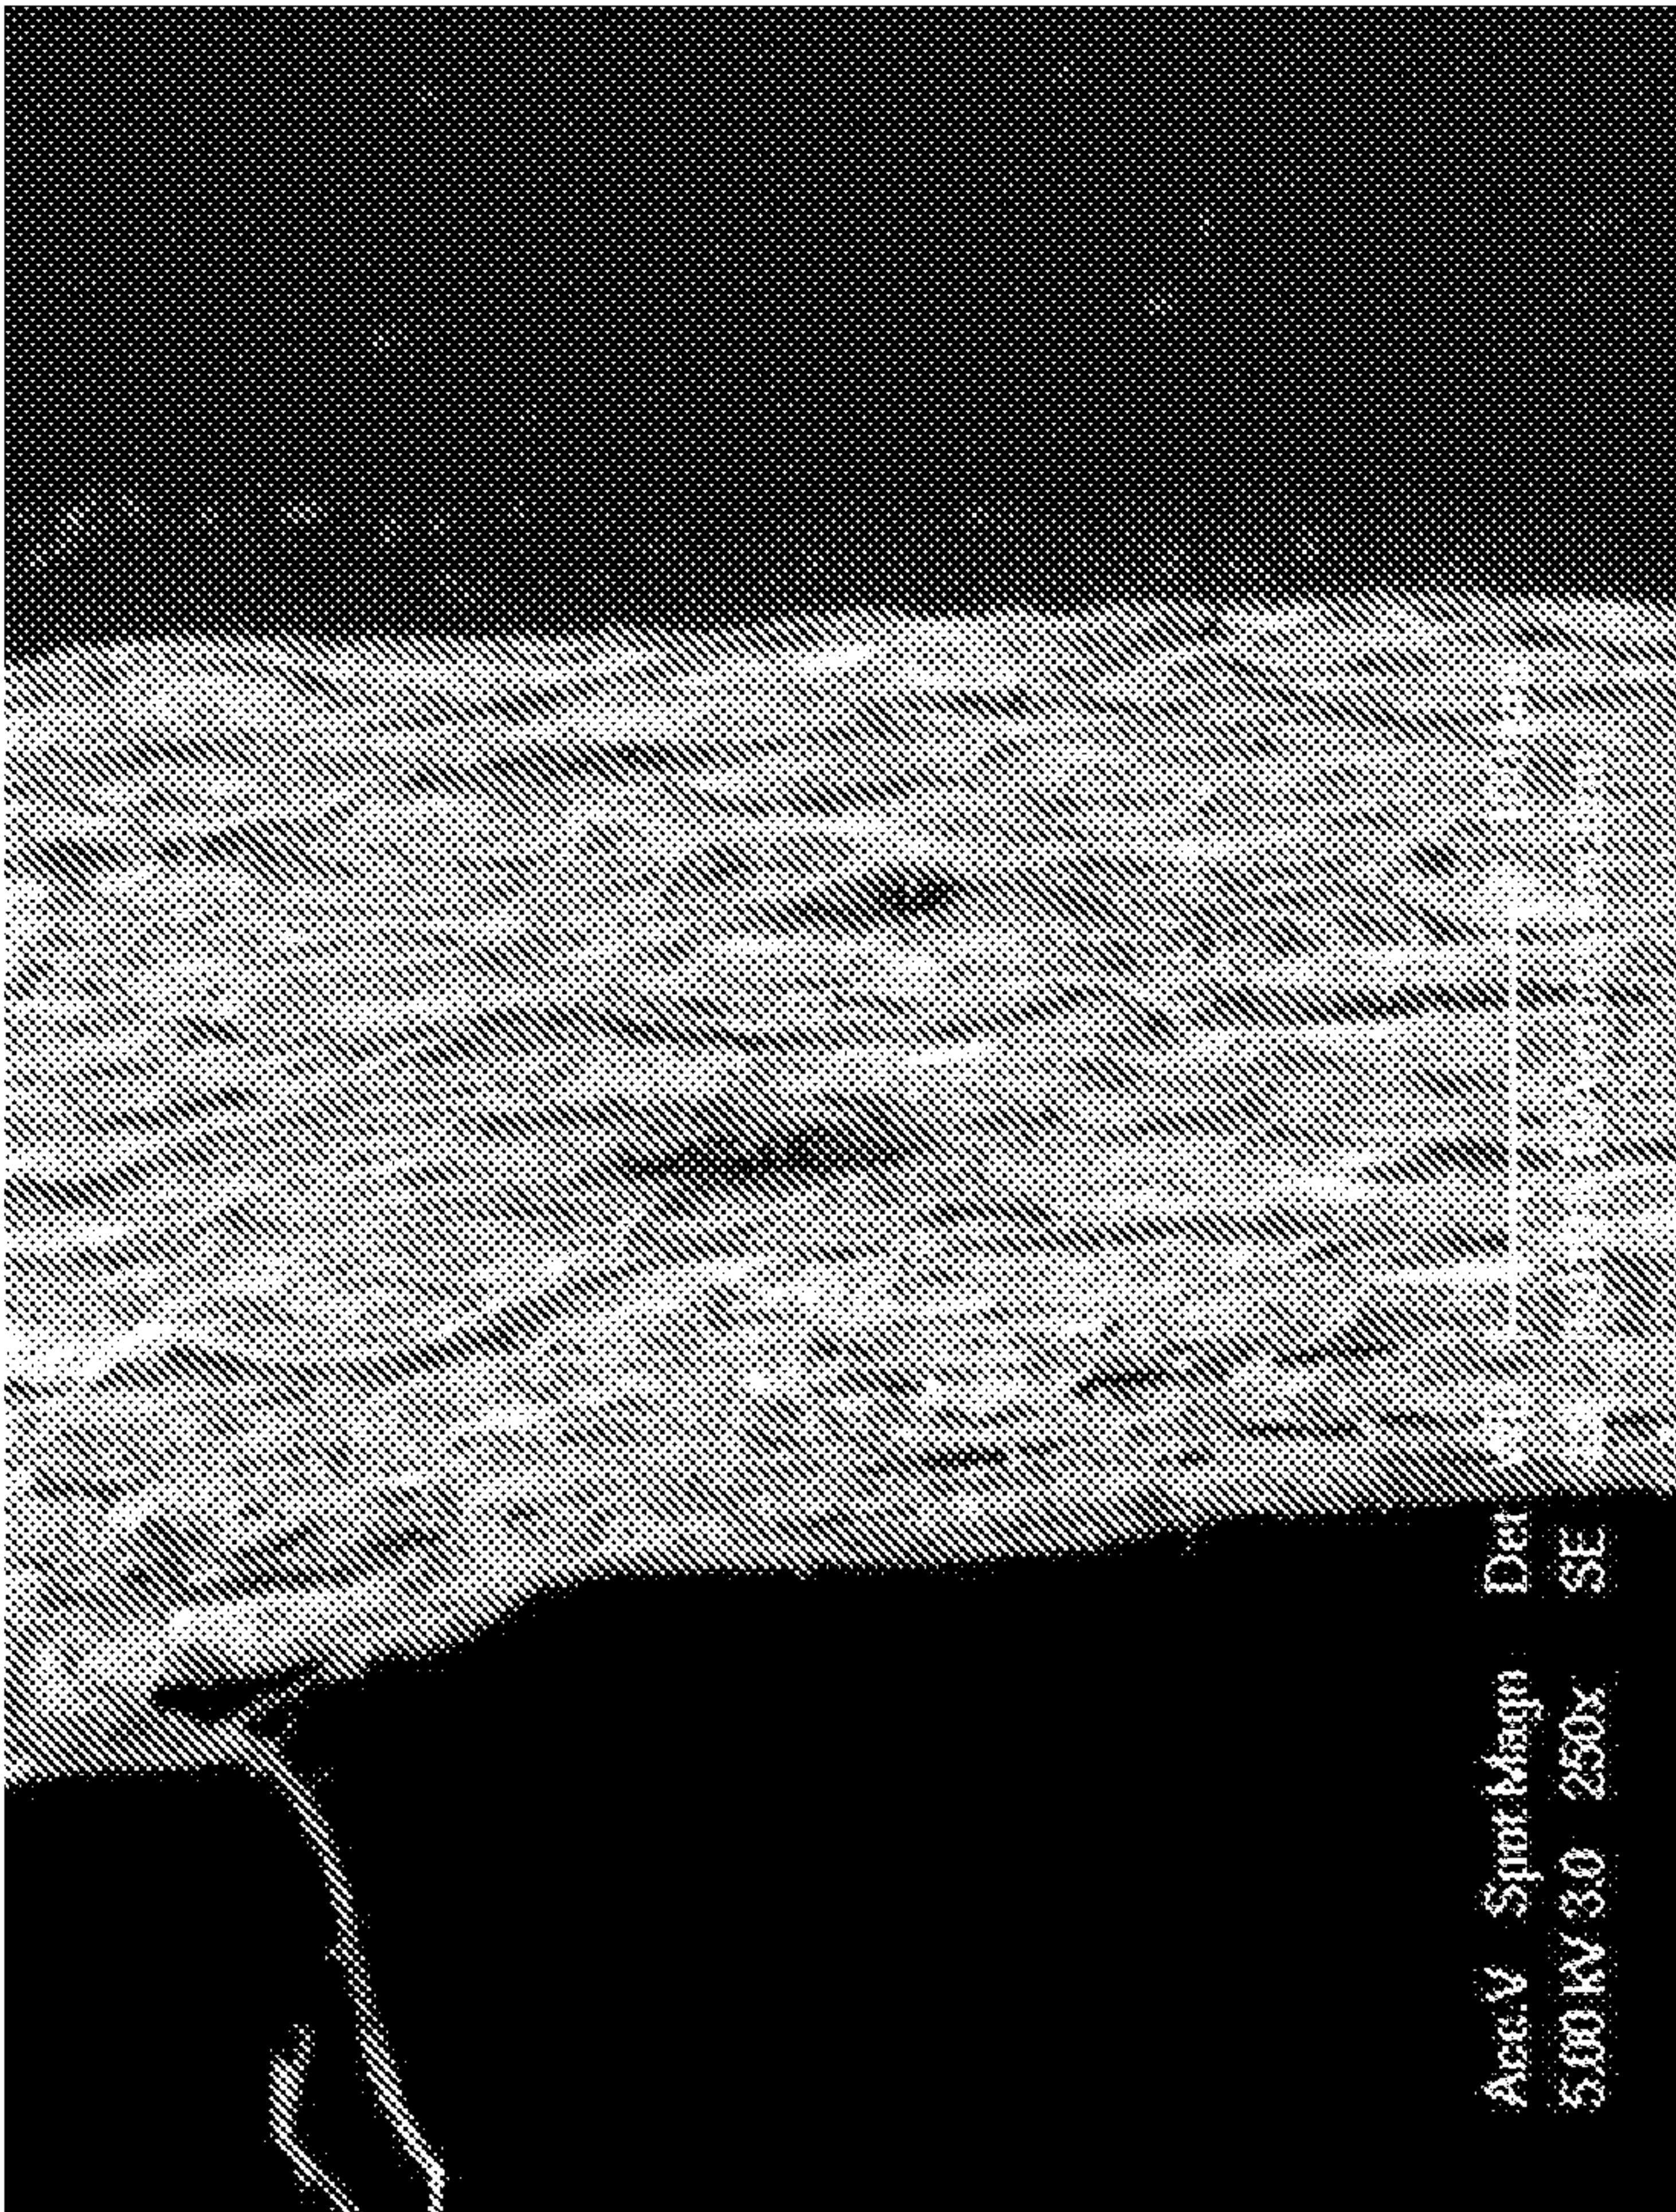


FIG. 4B

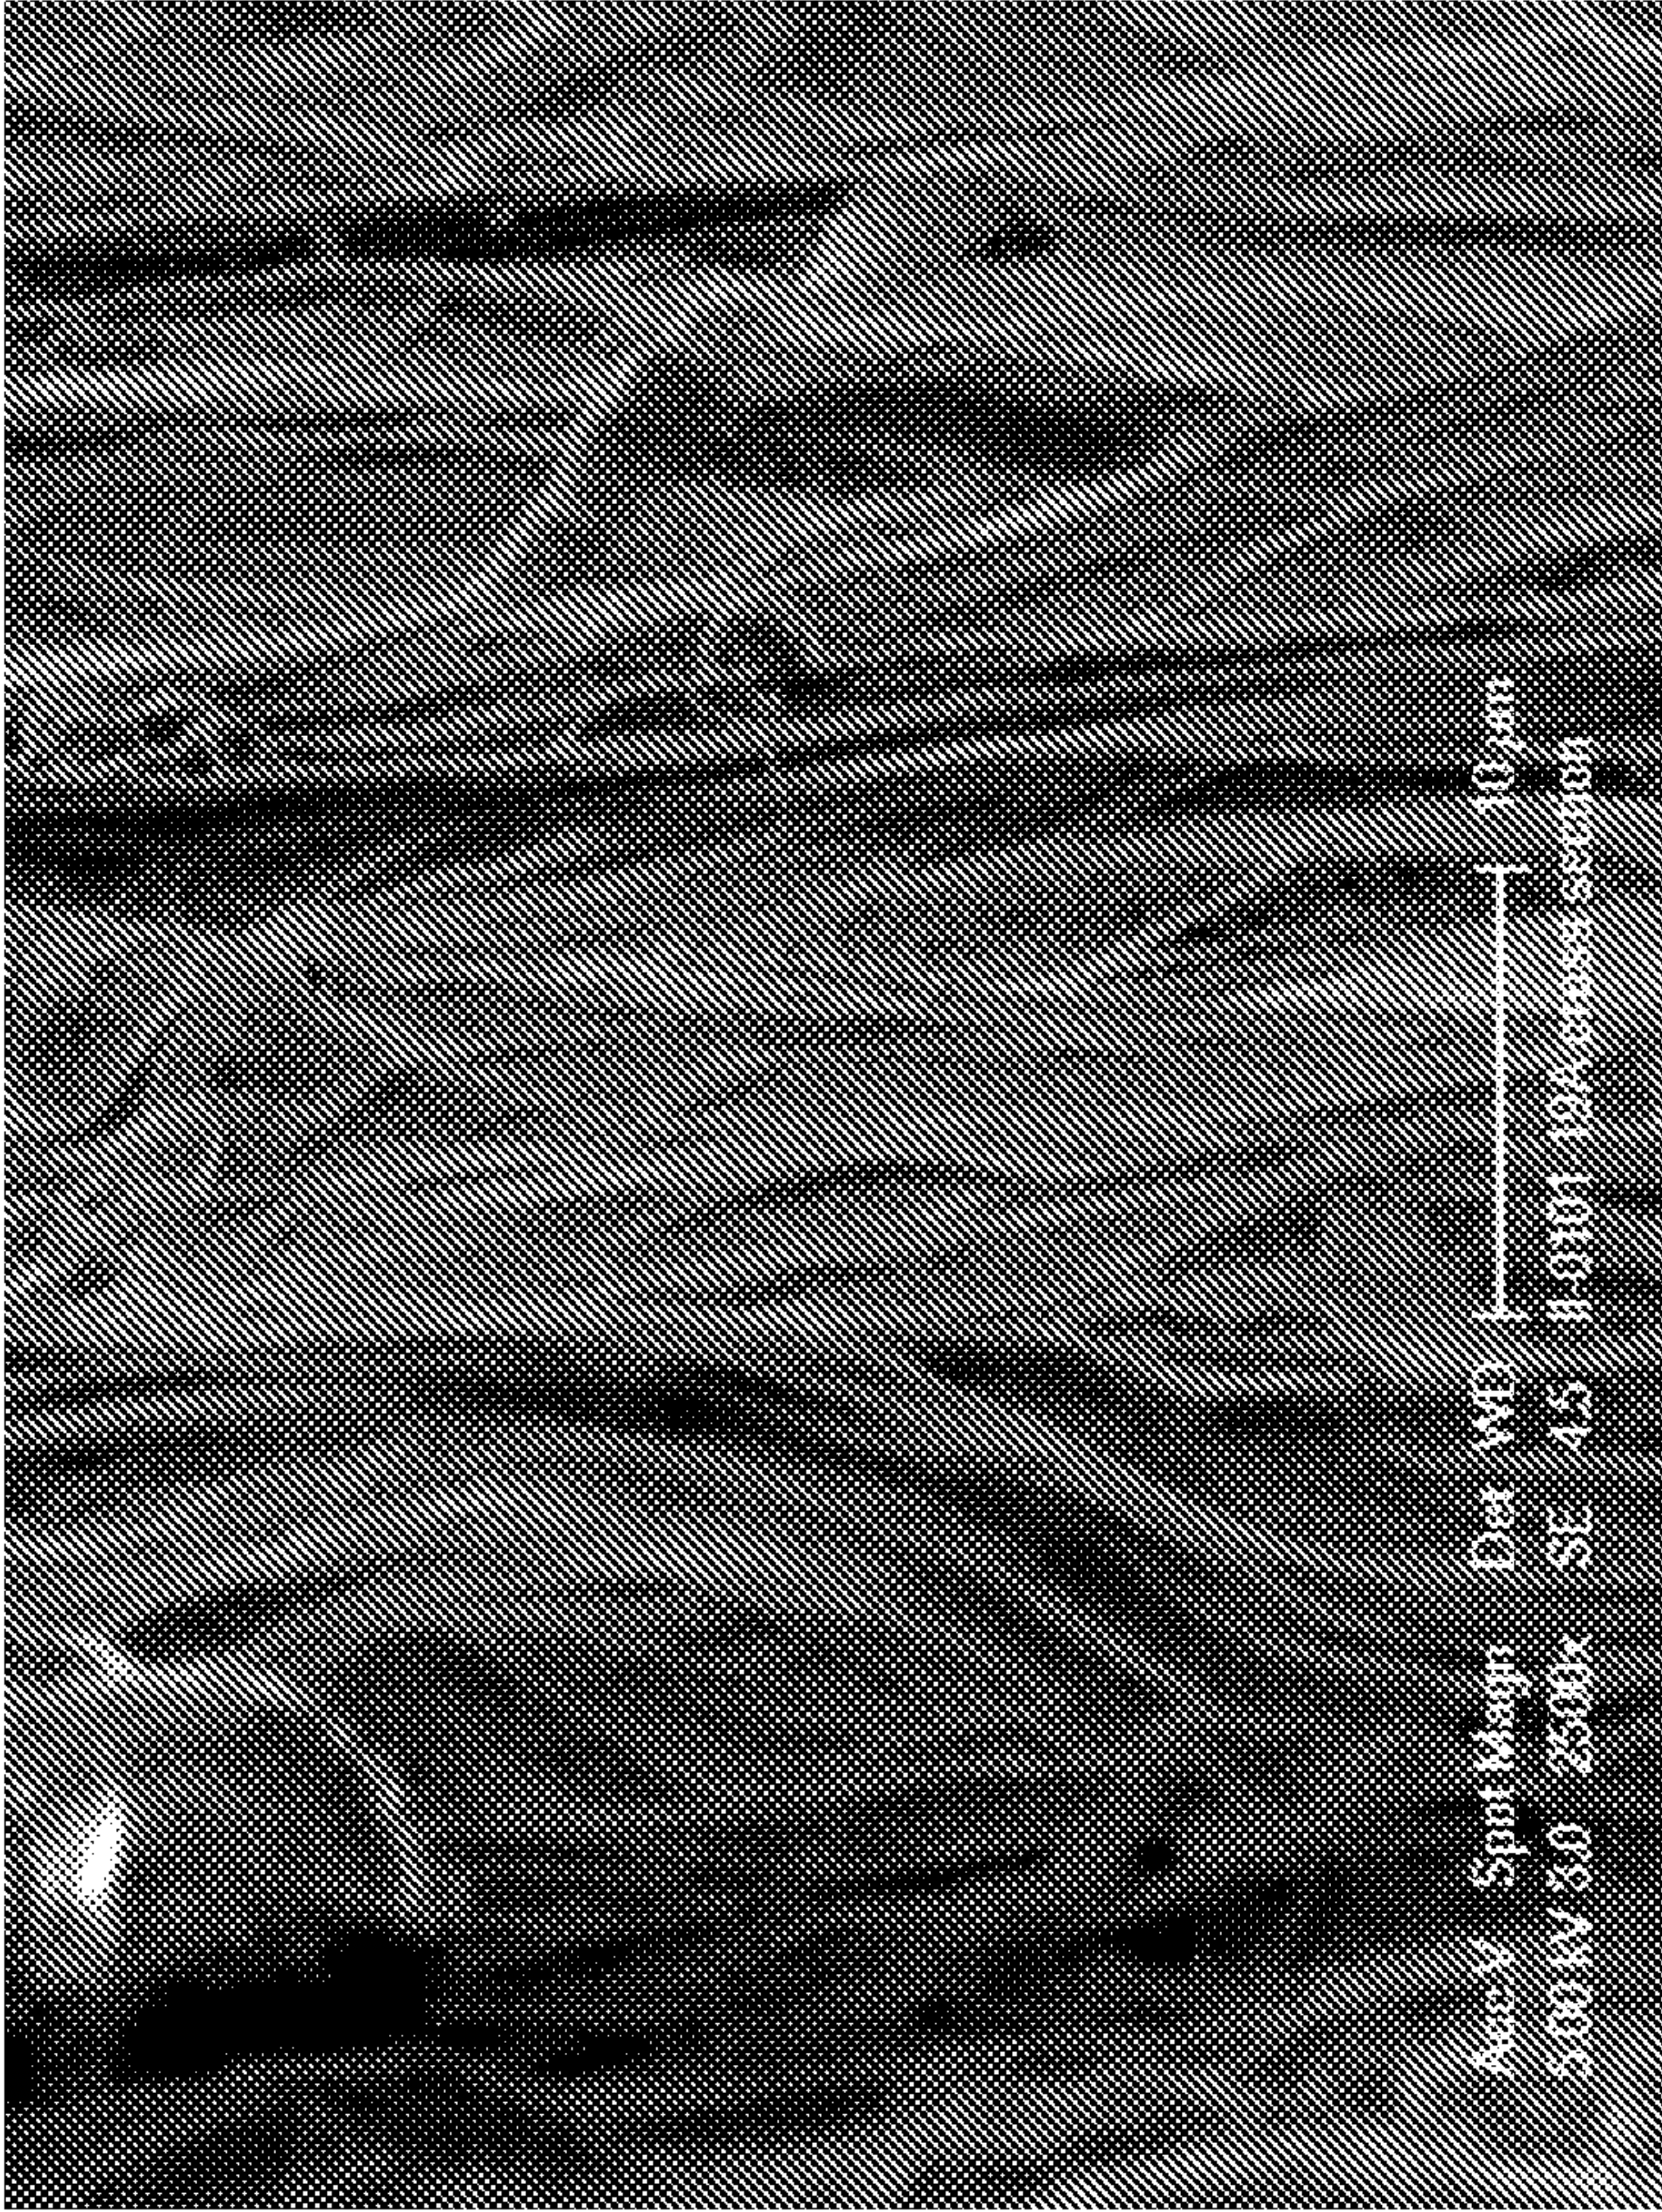

6/20

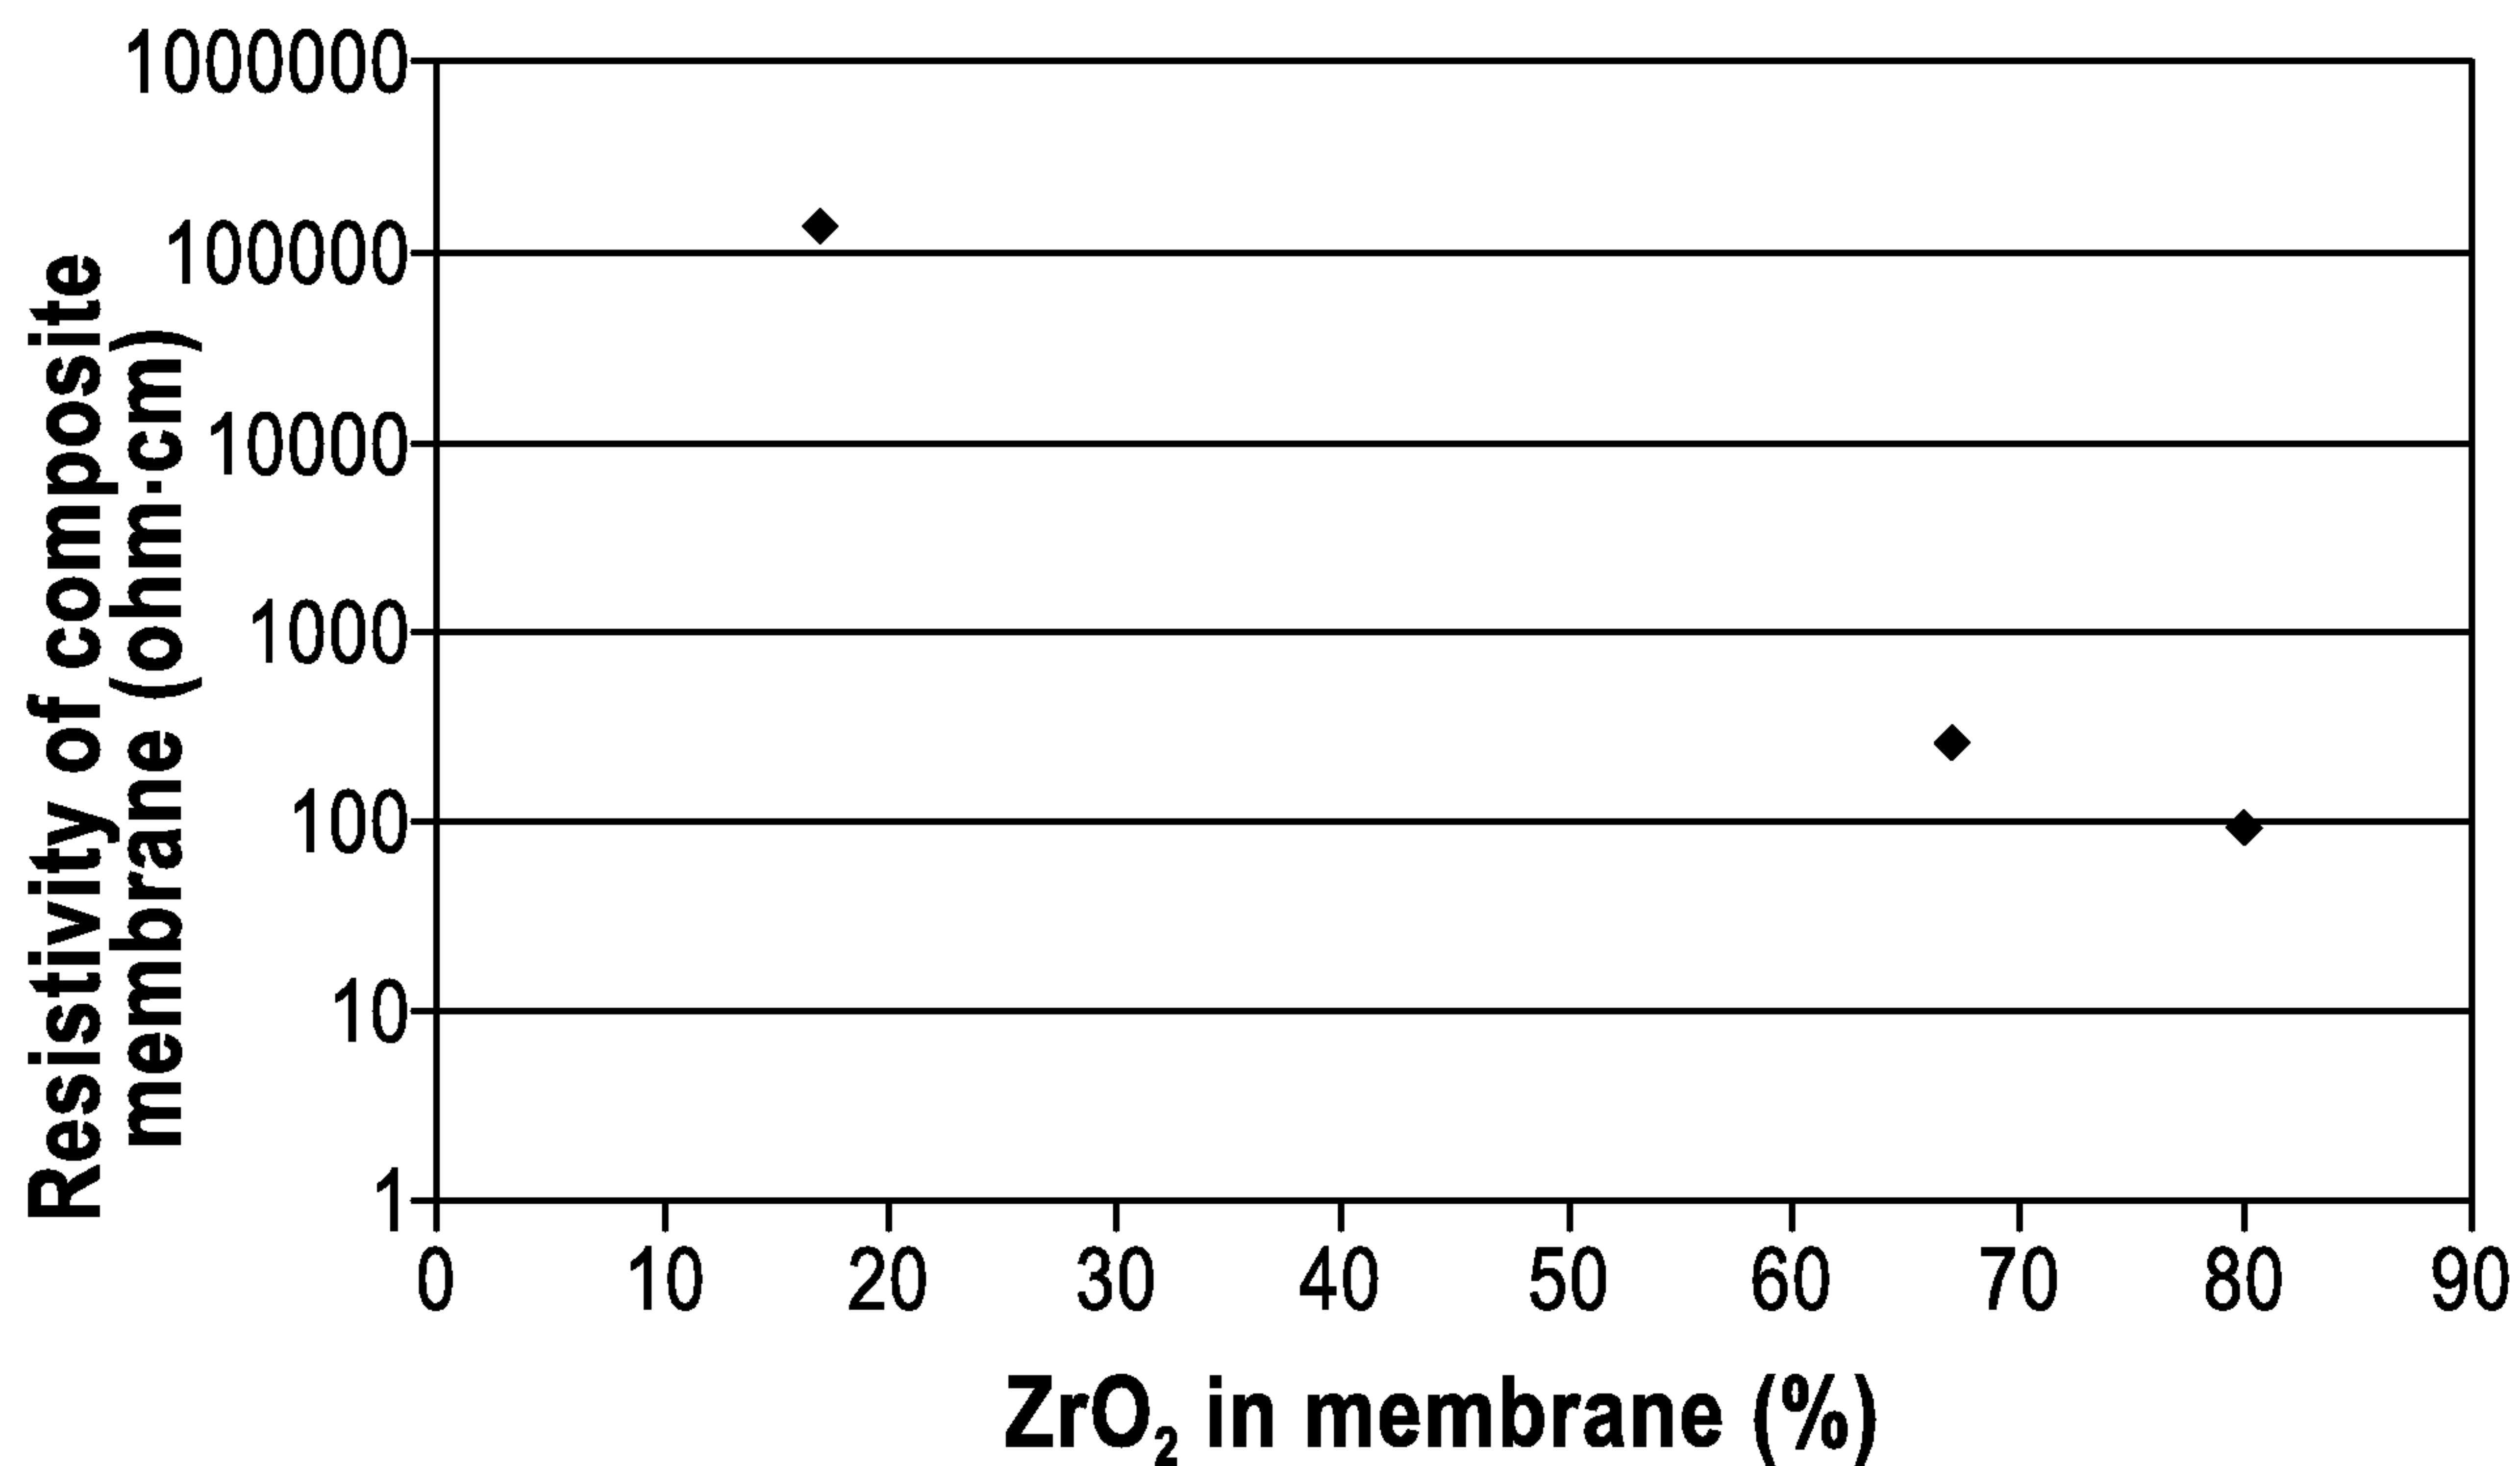


FIG. 5

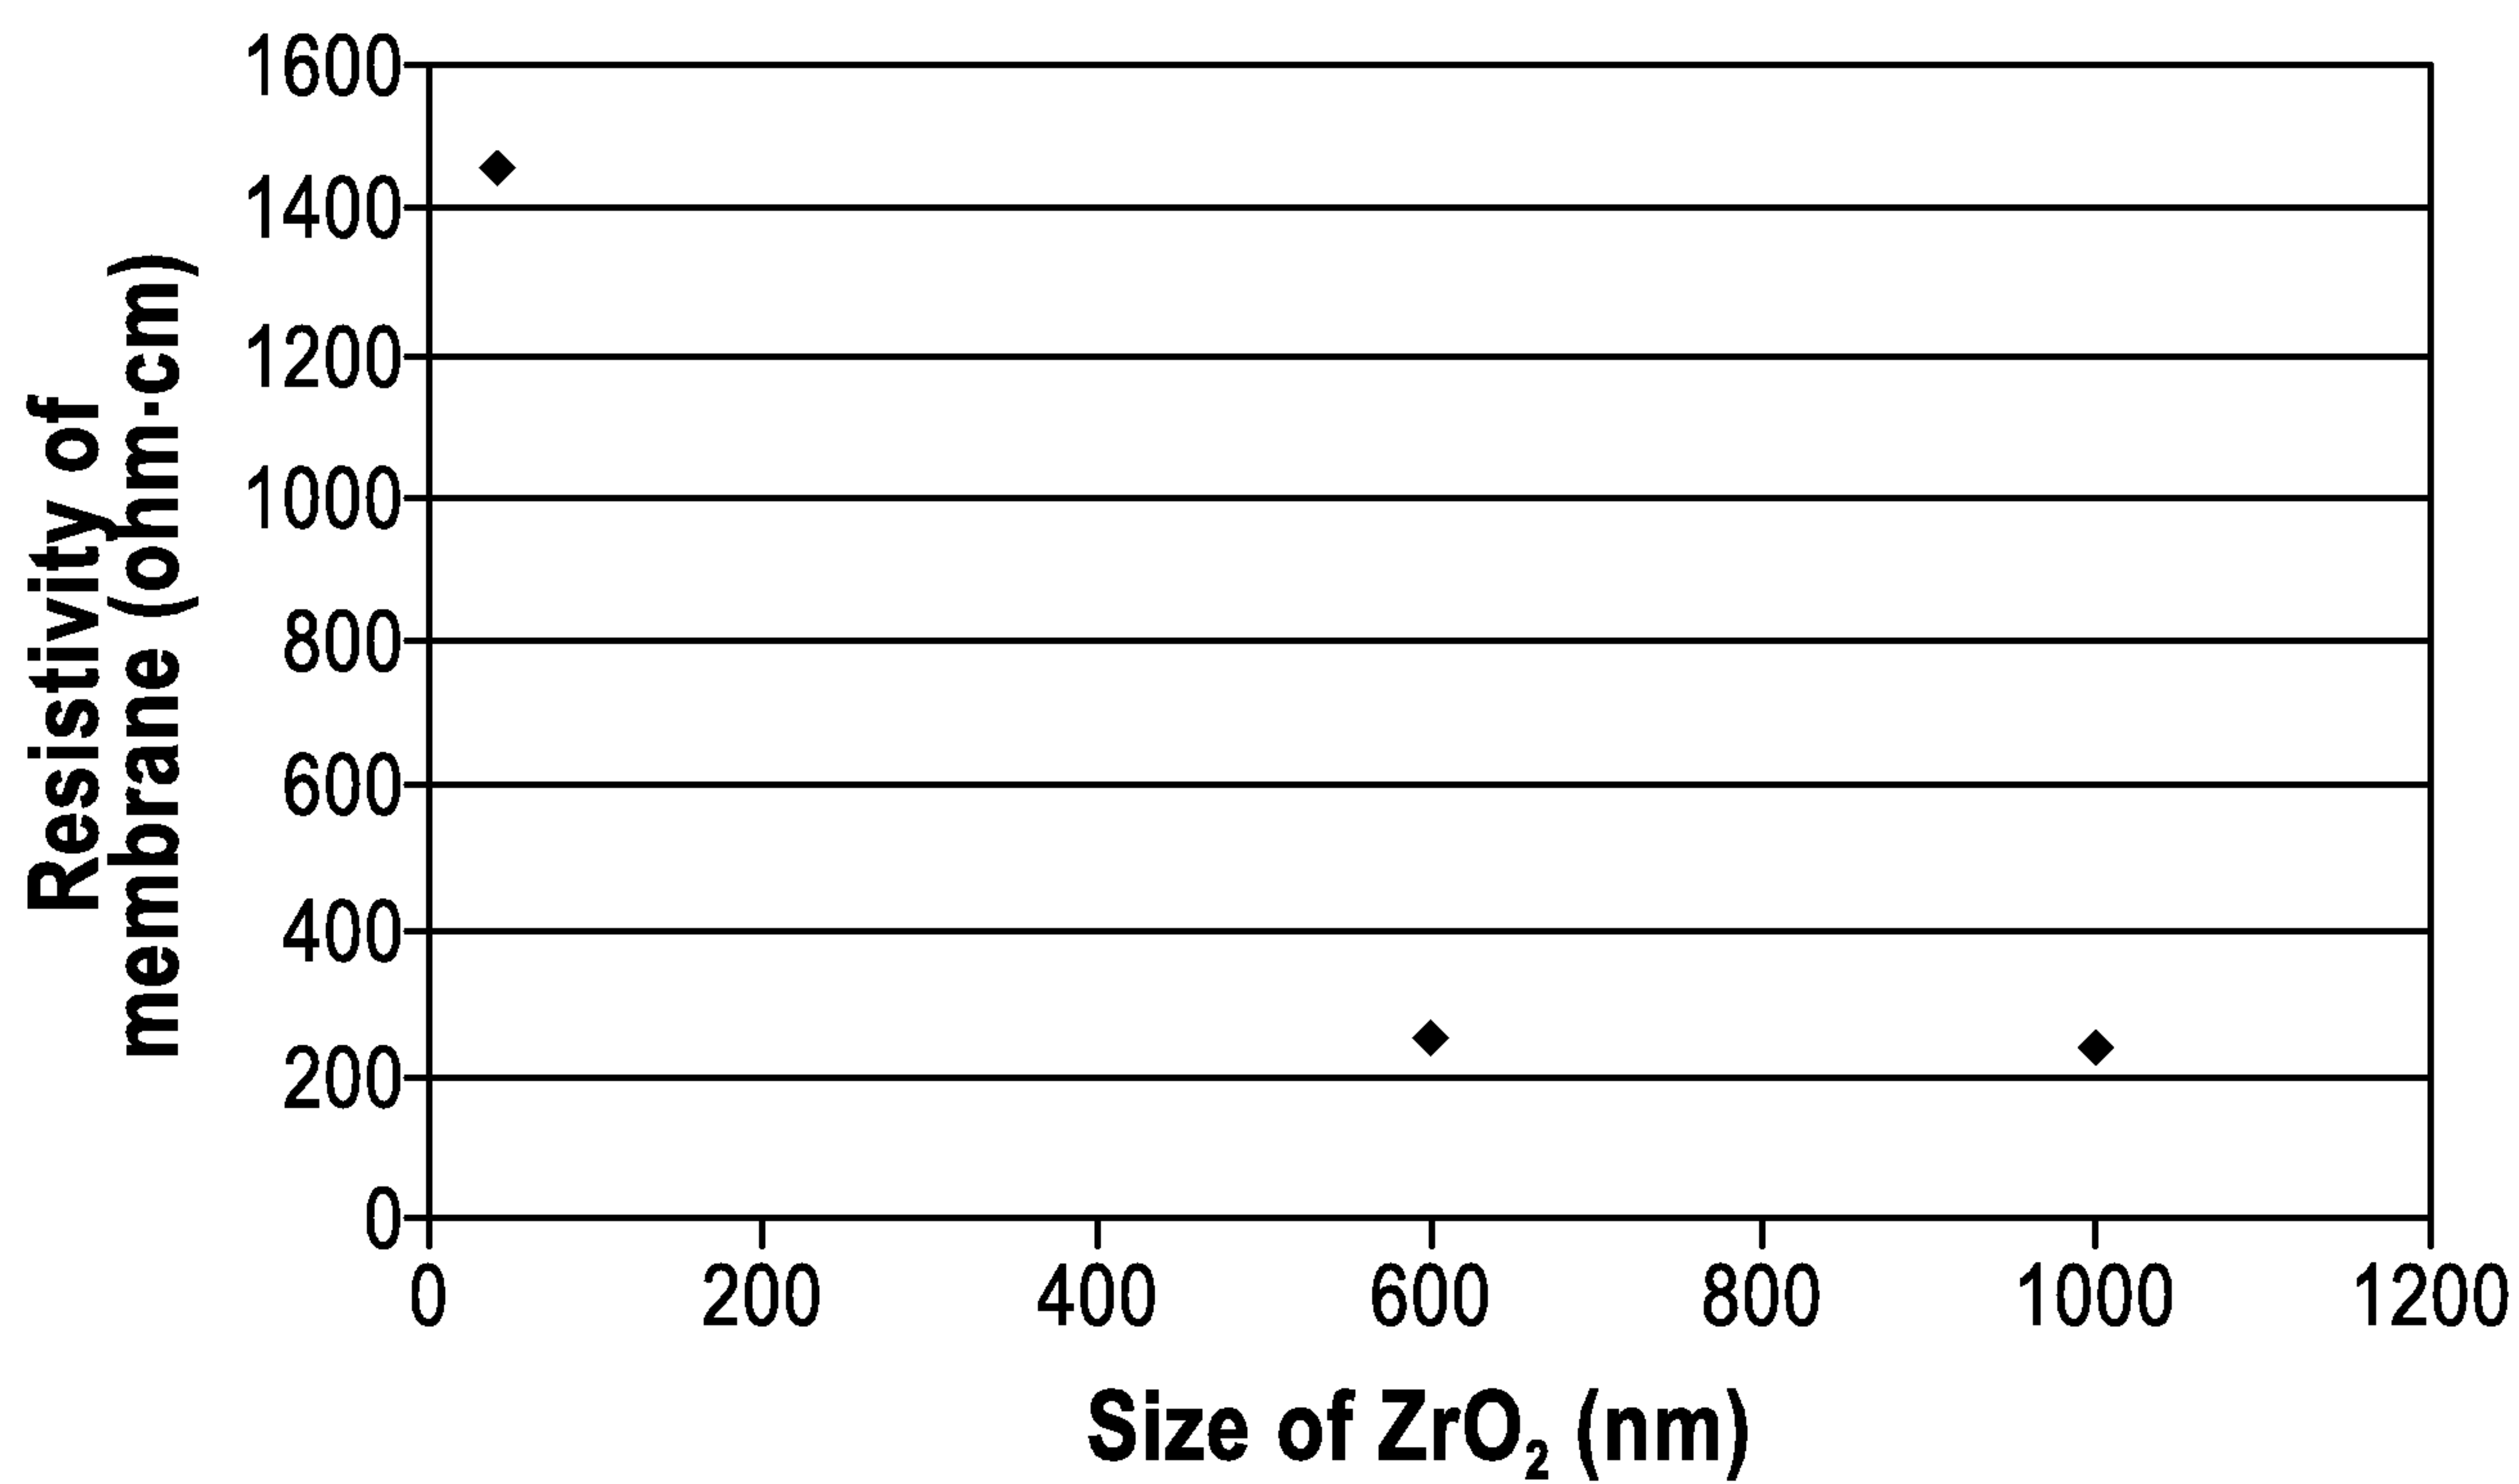


FIG. 6

7/20

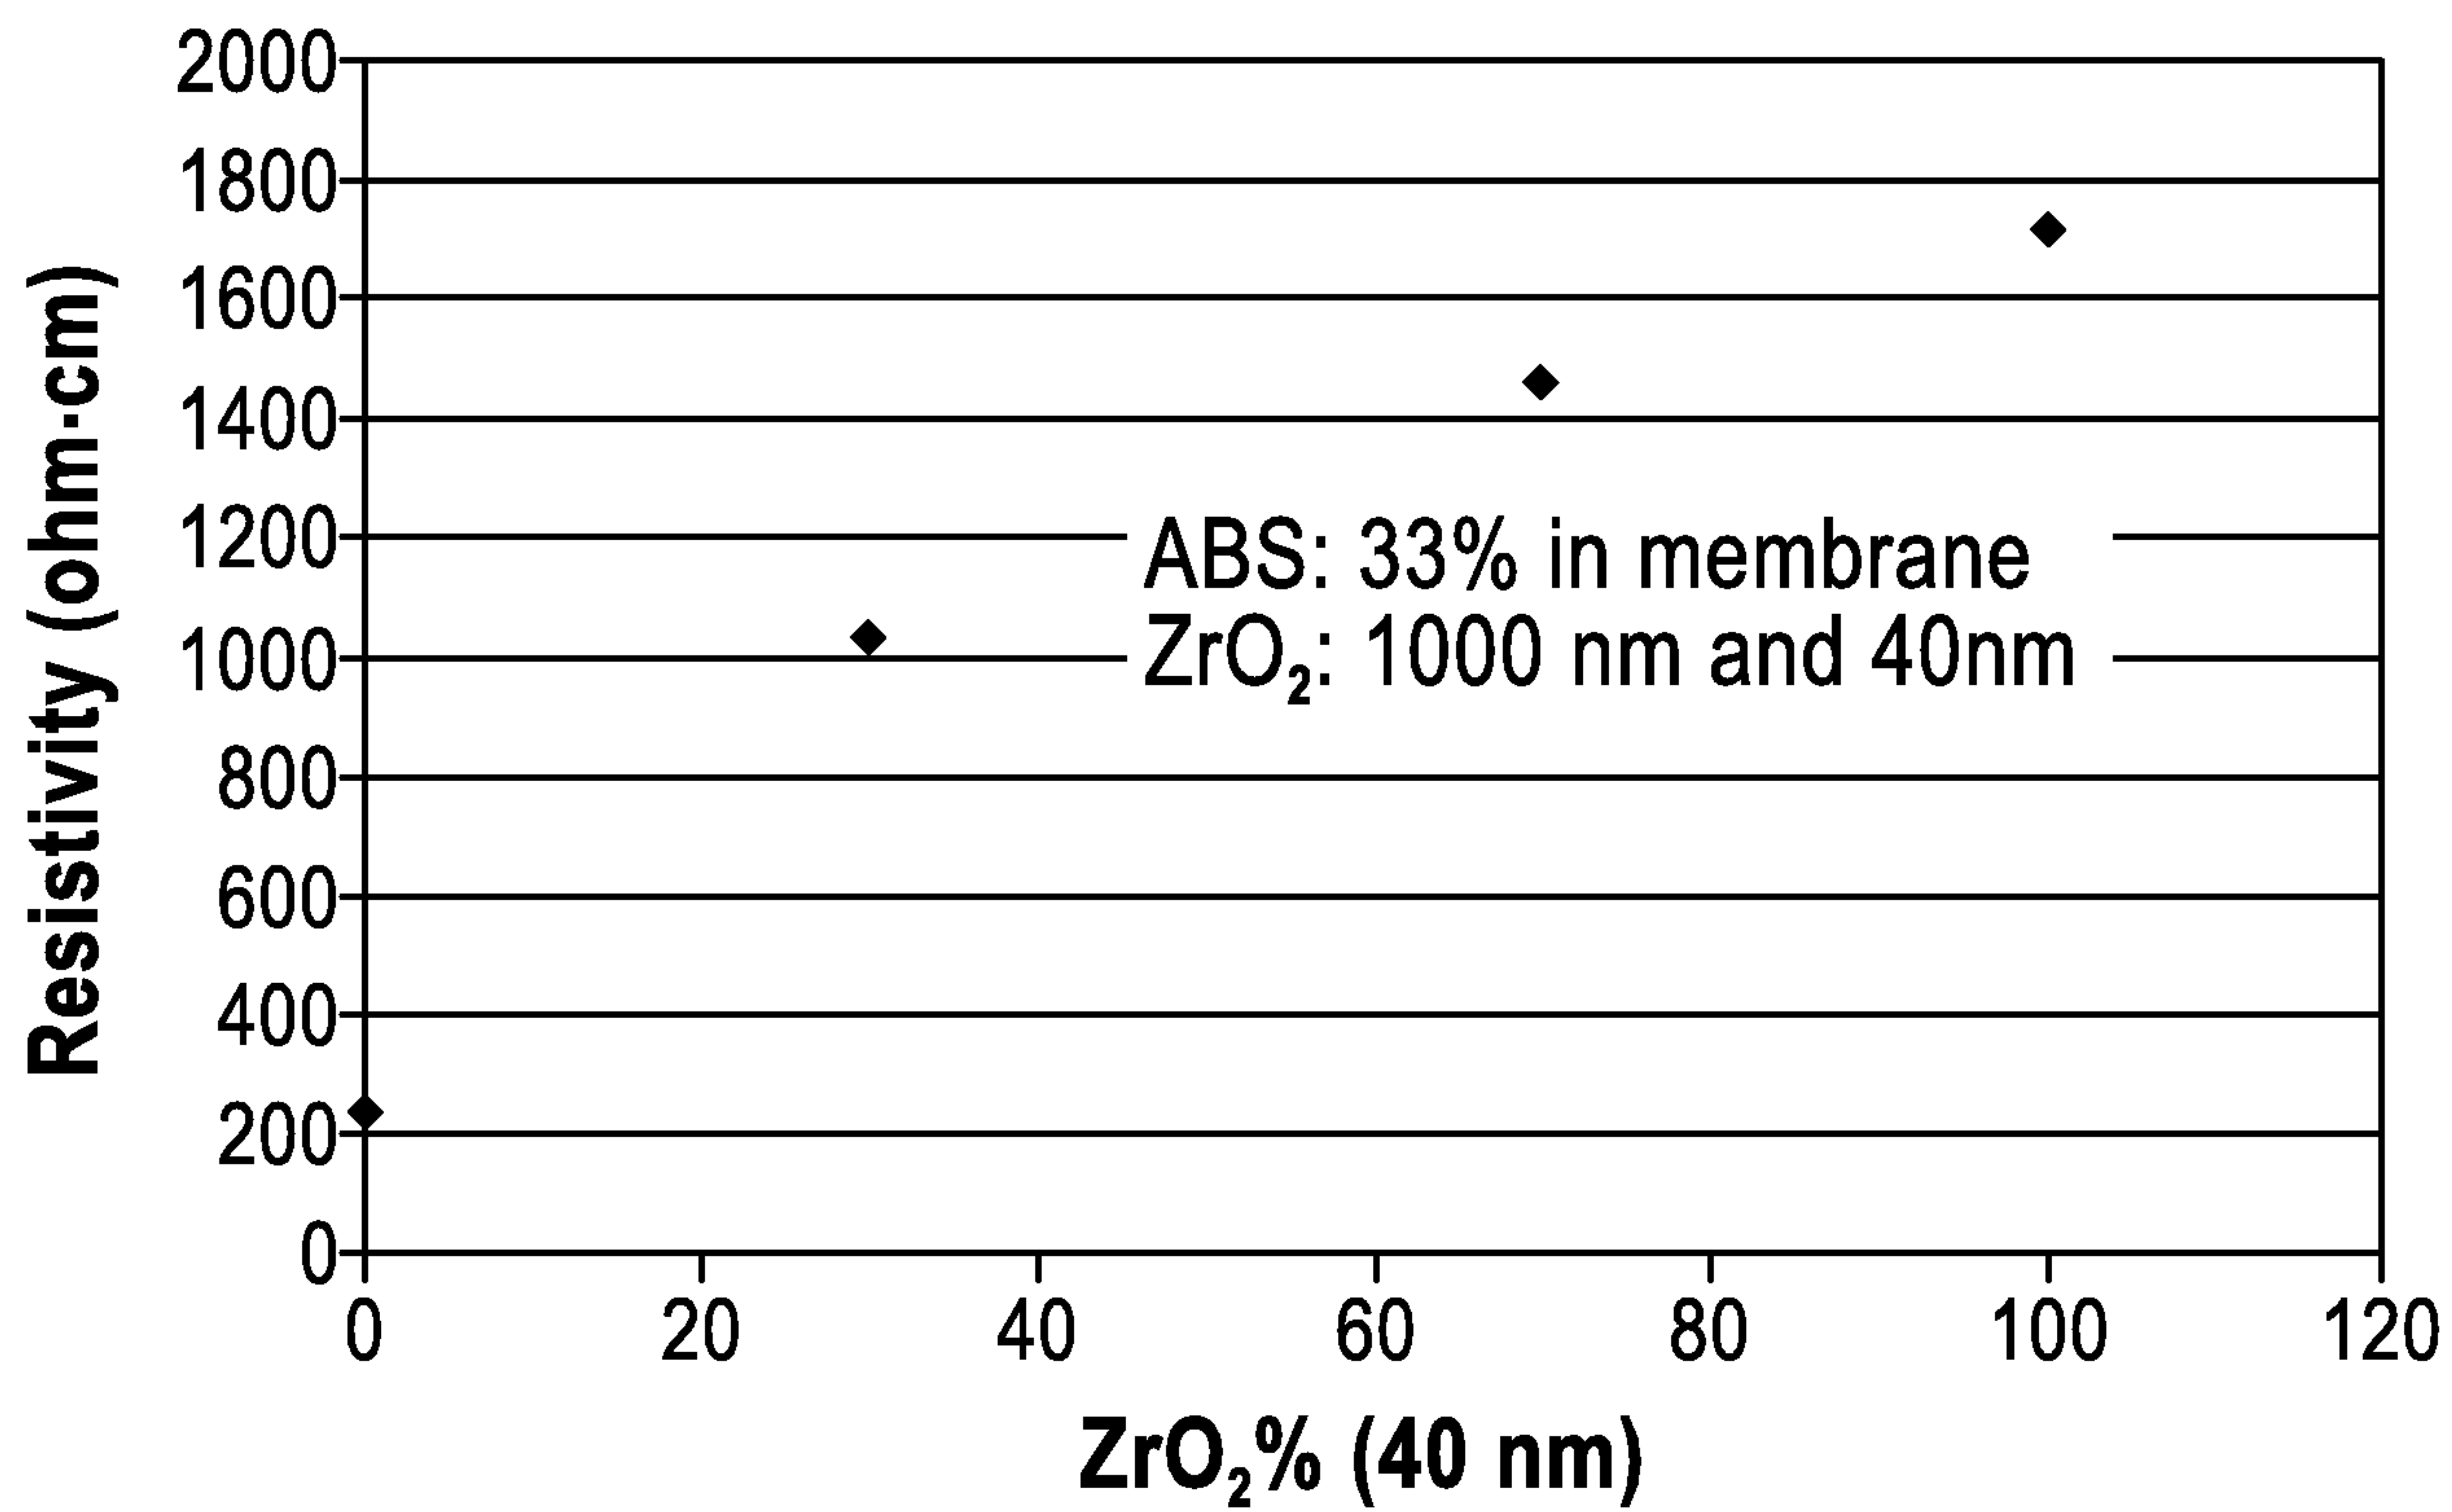


FIG. 7

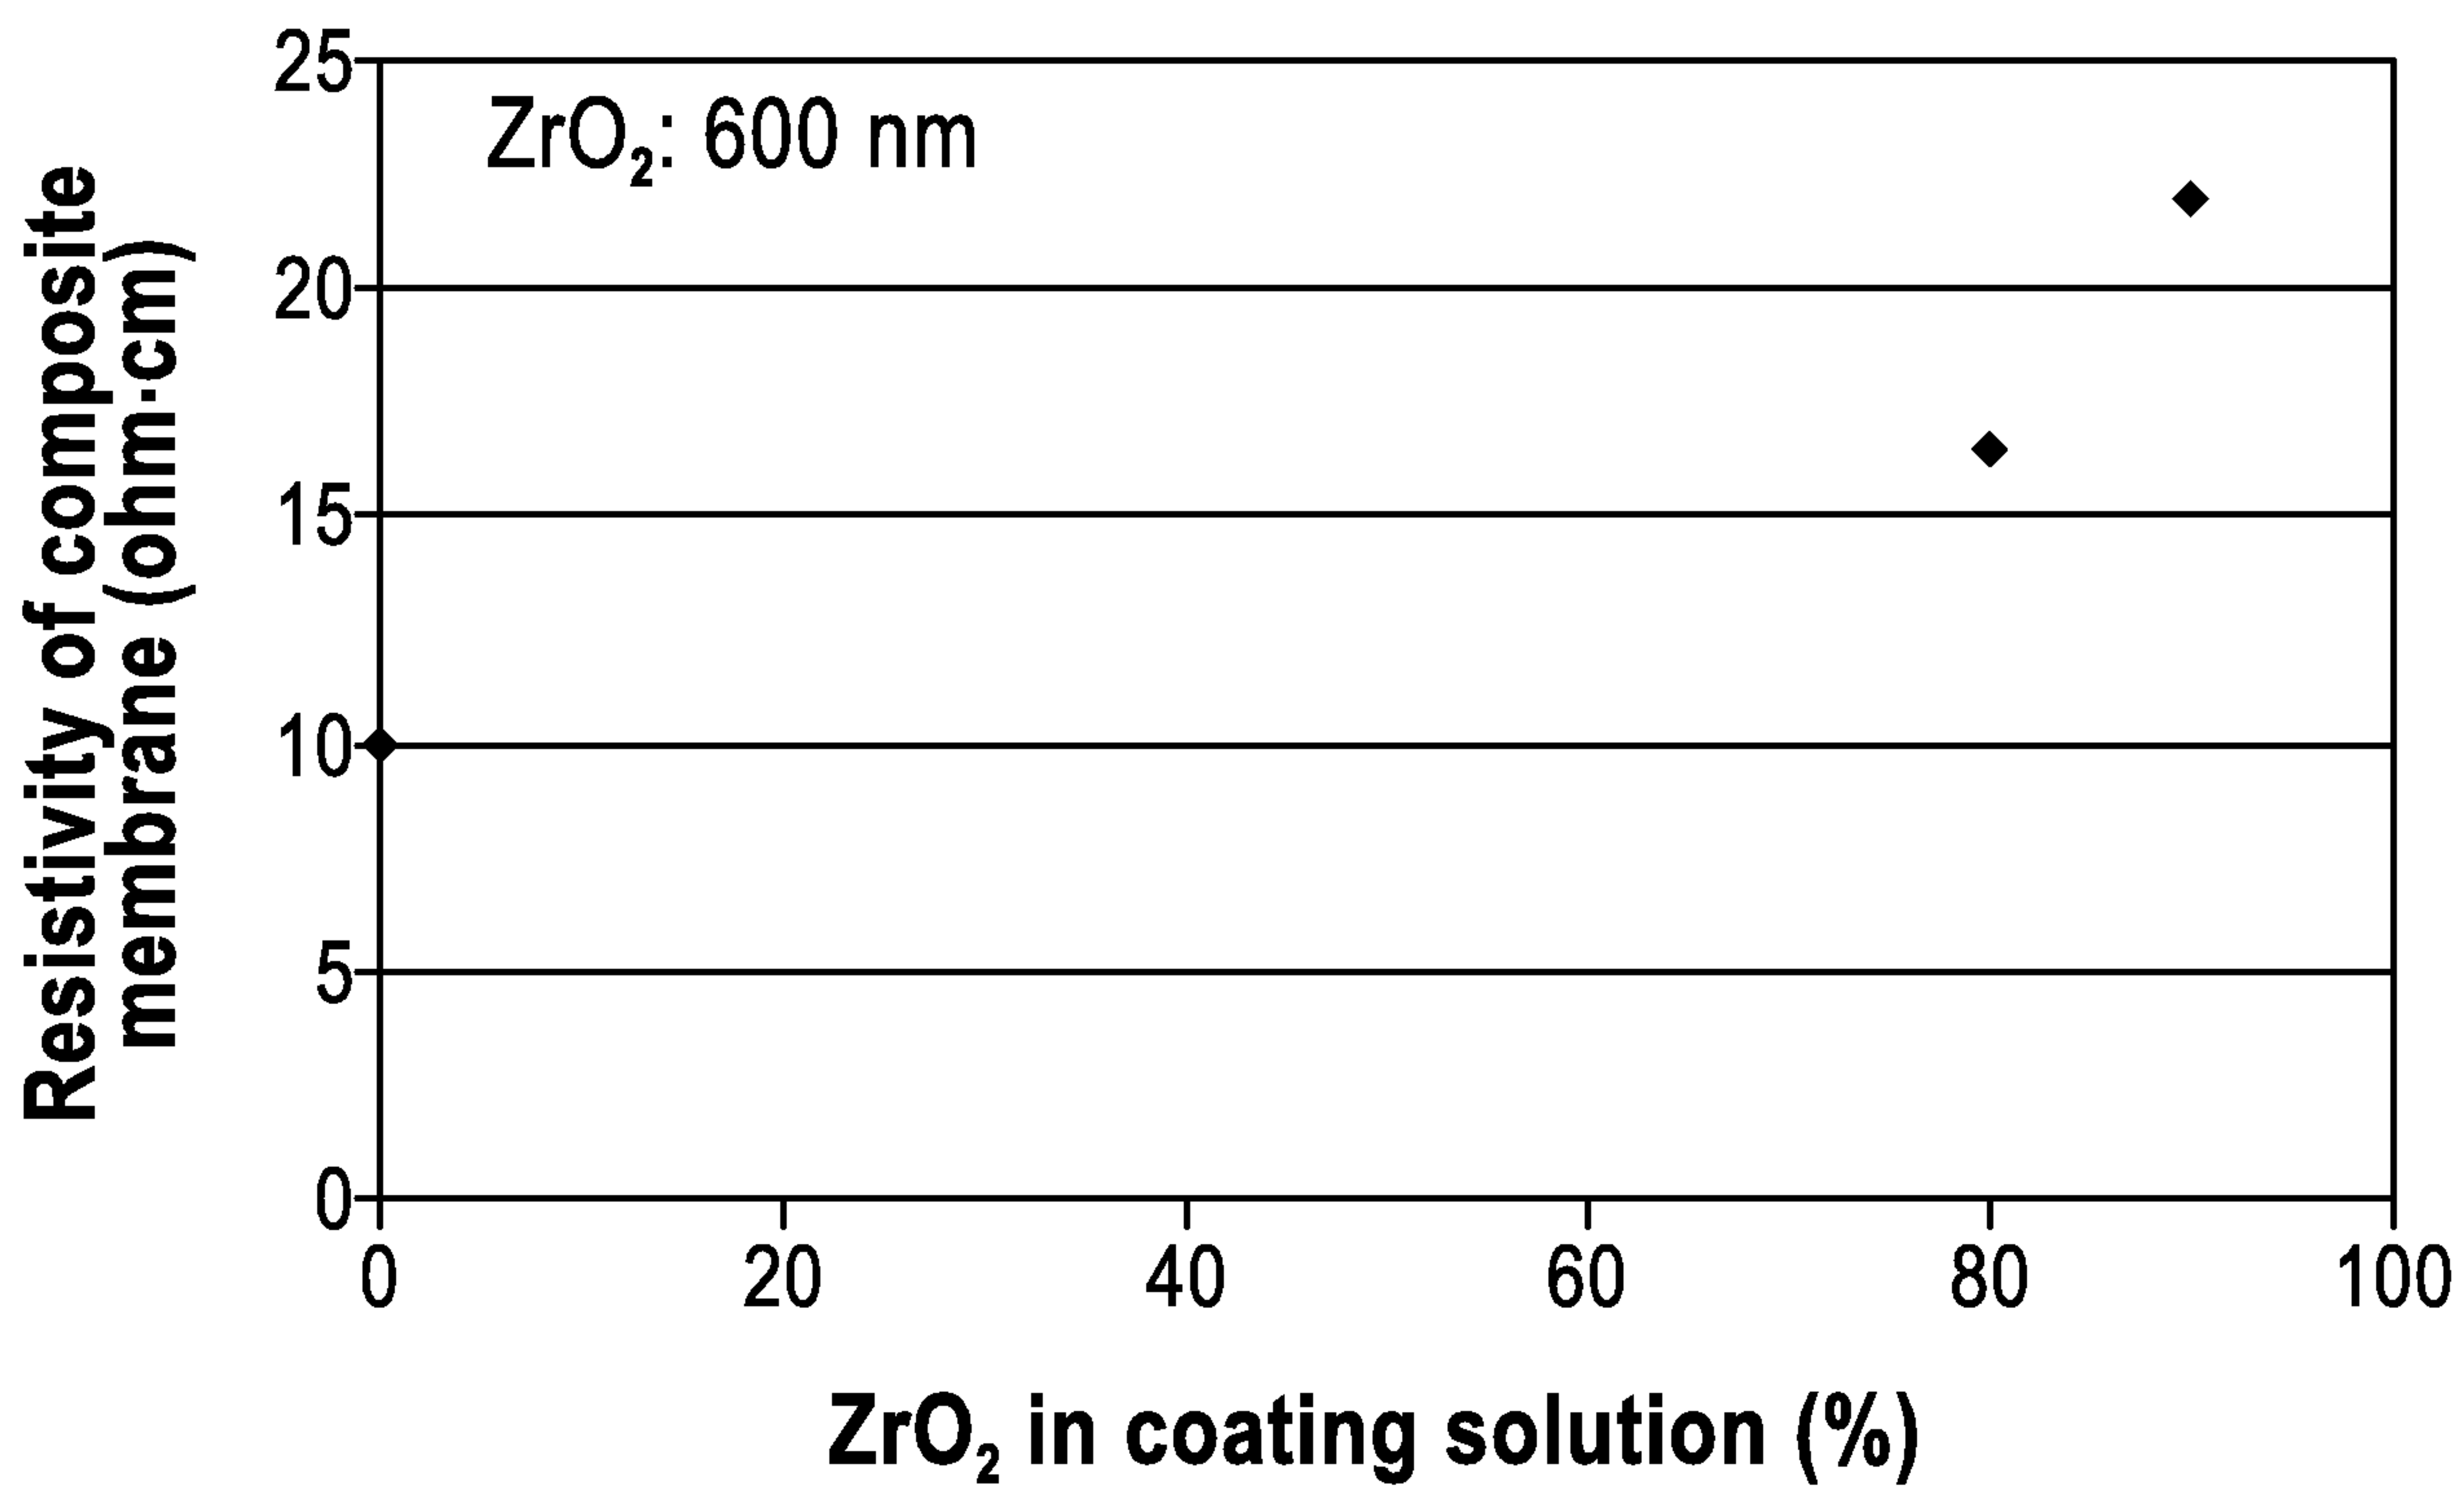
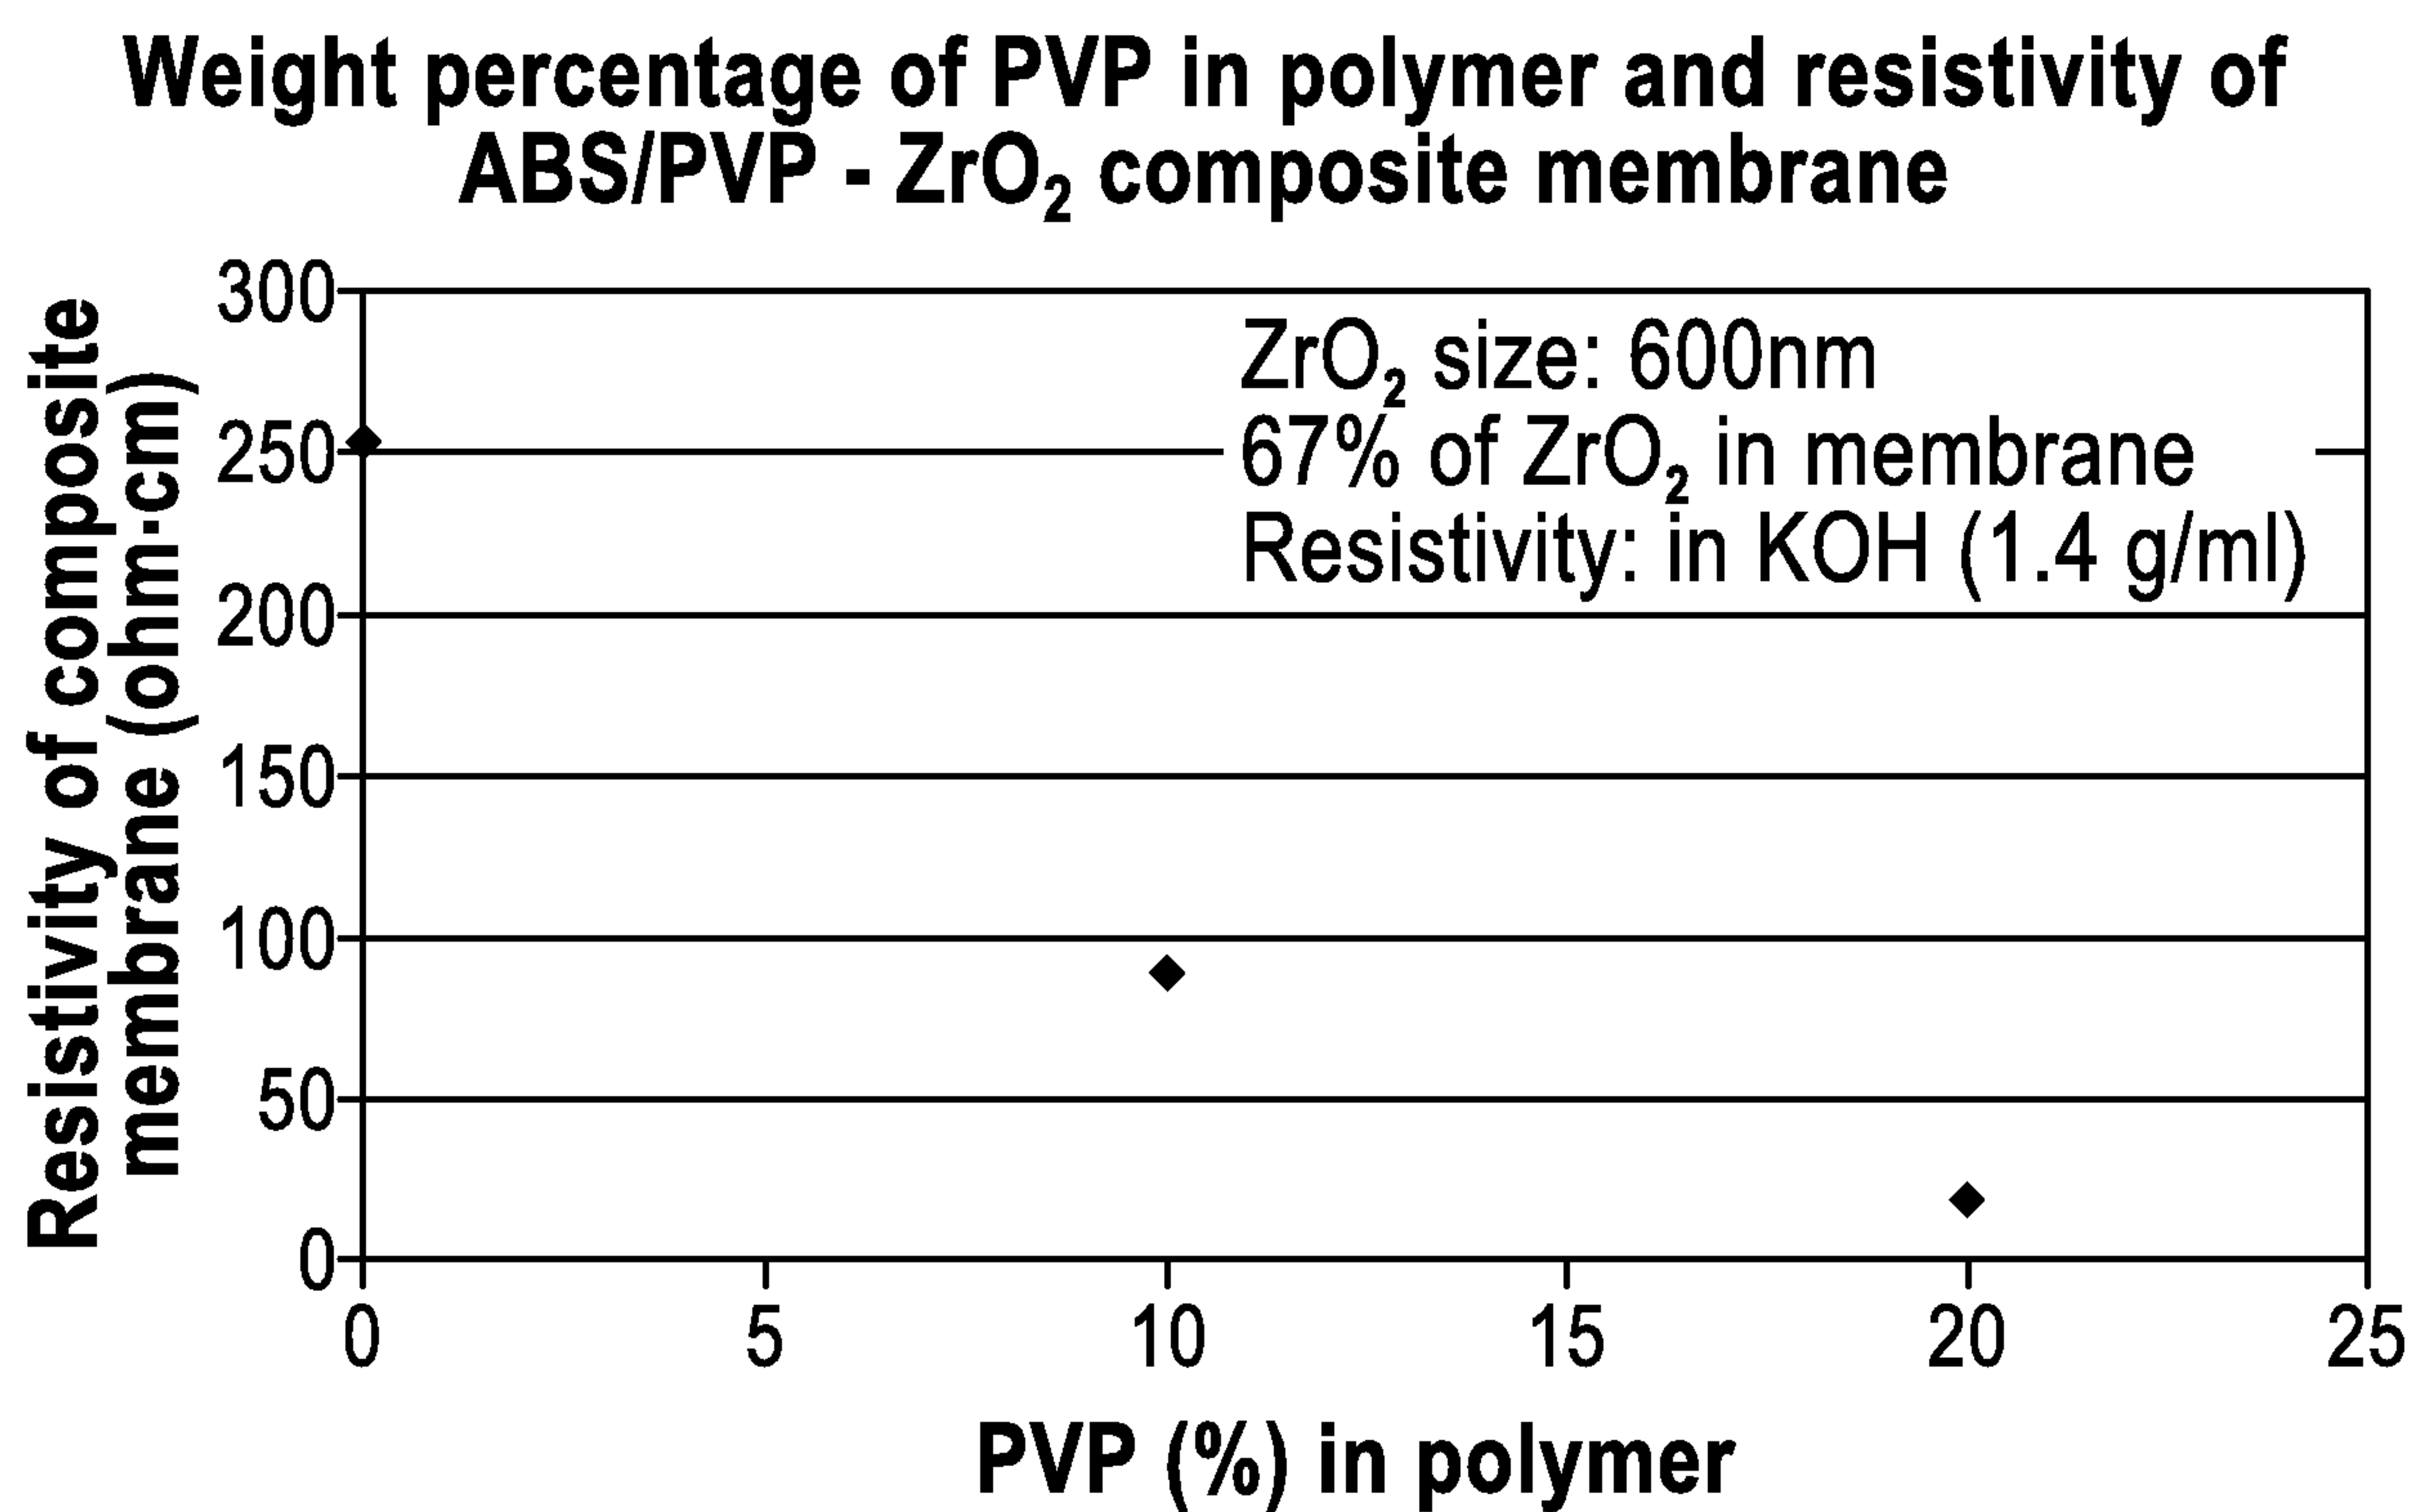


FIG. 8

8/20

*FIG. 9*

9/20

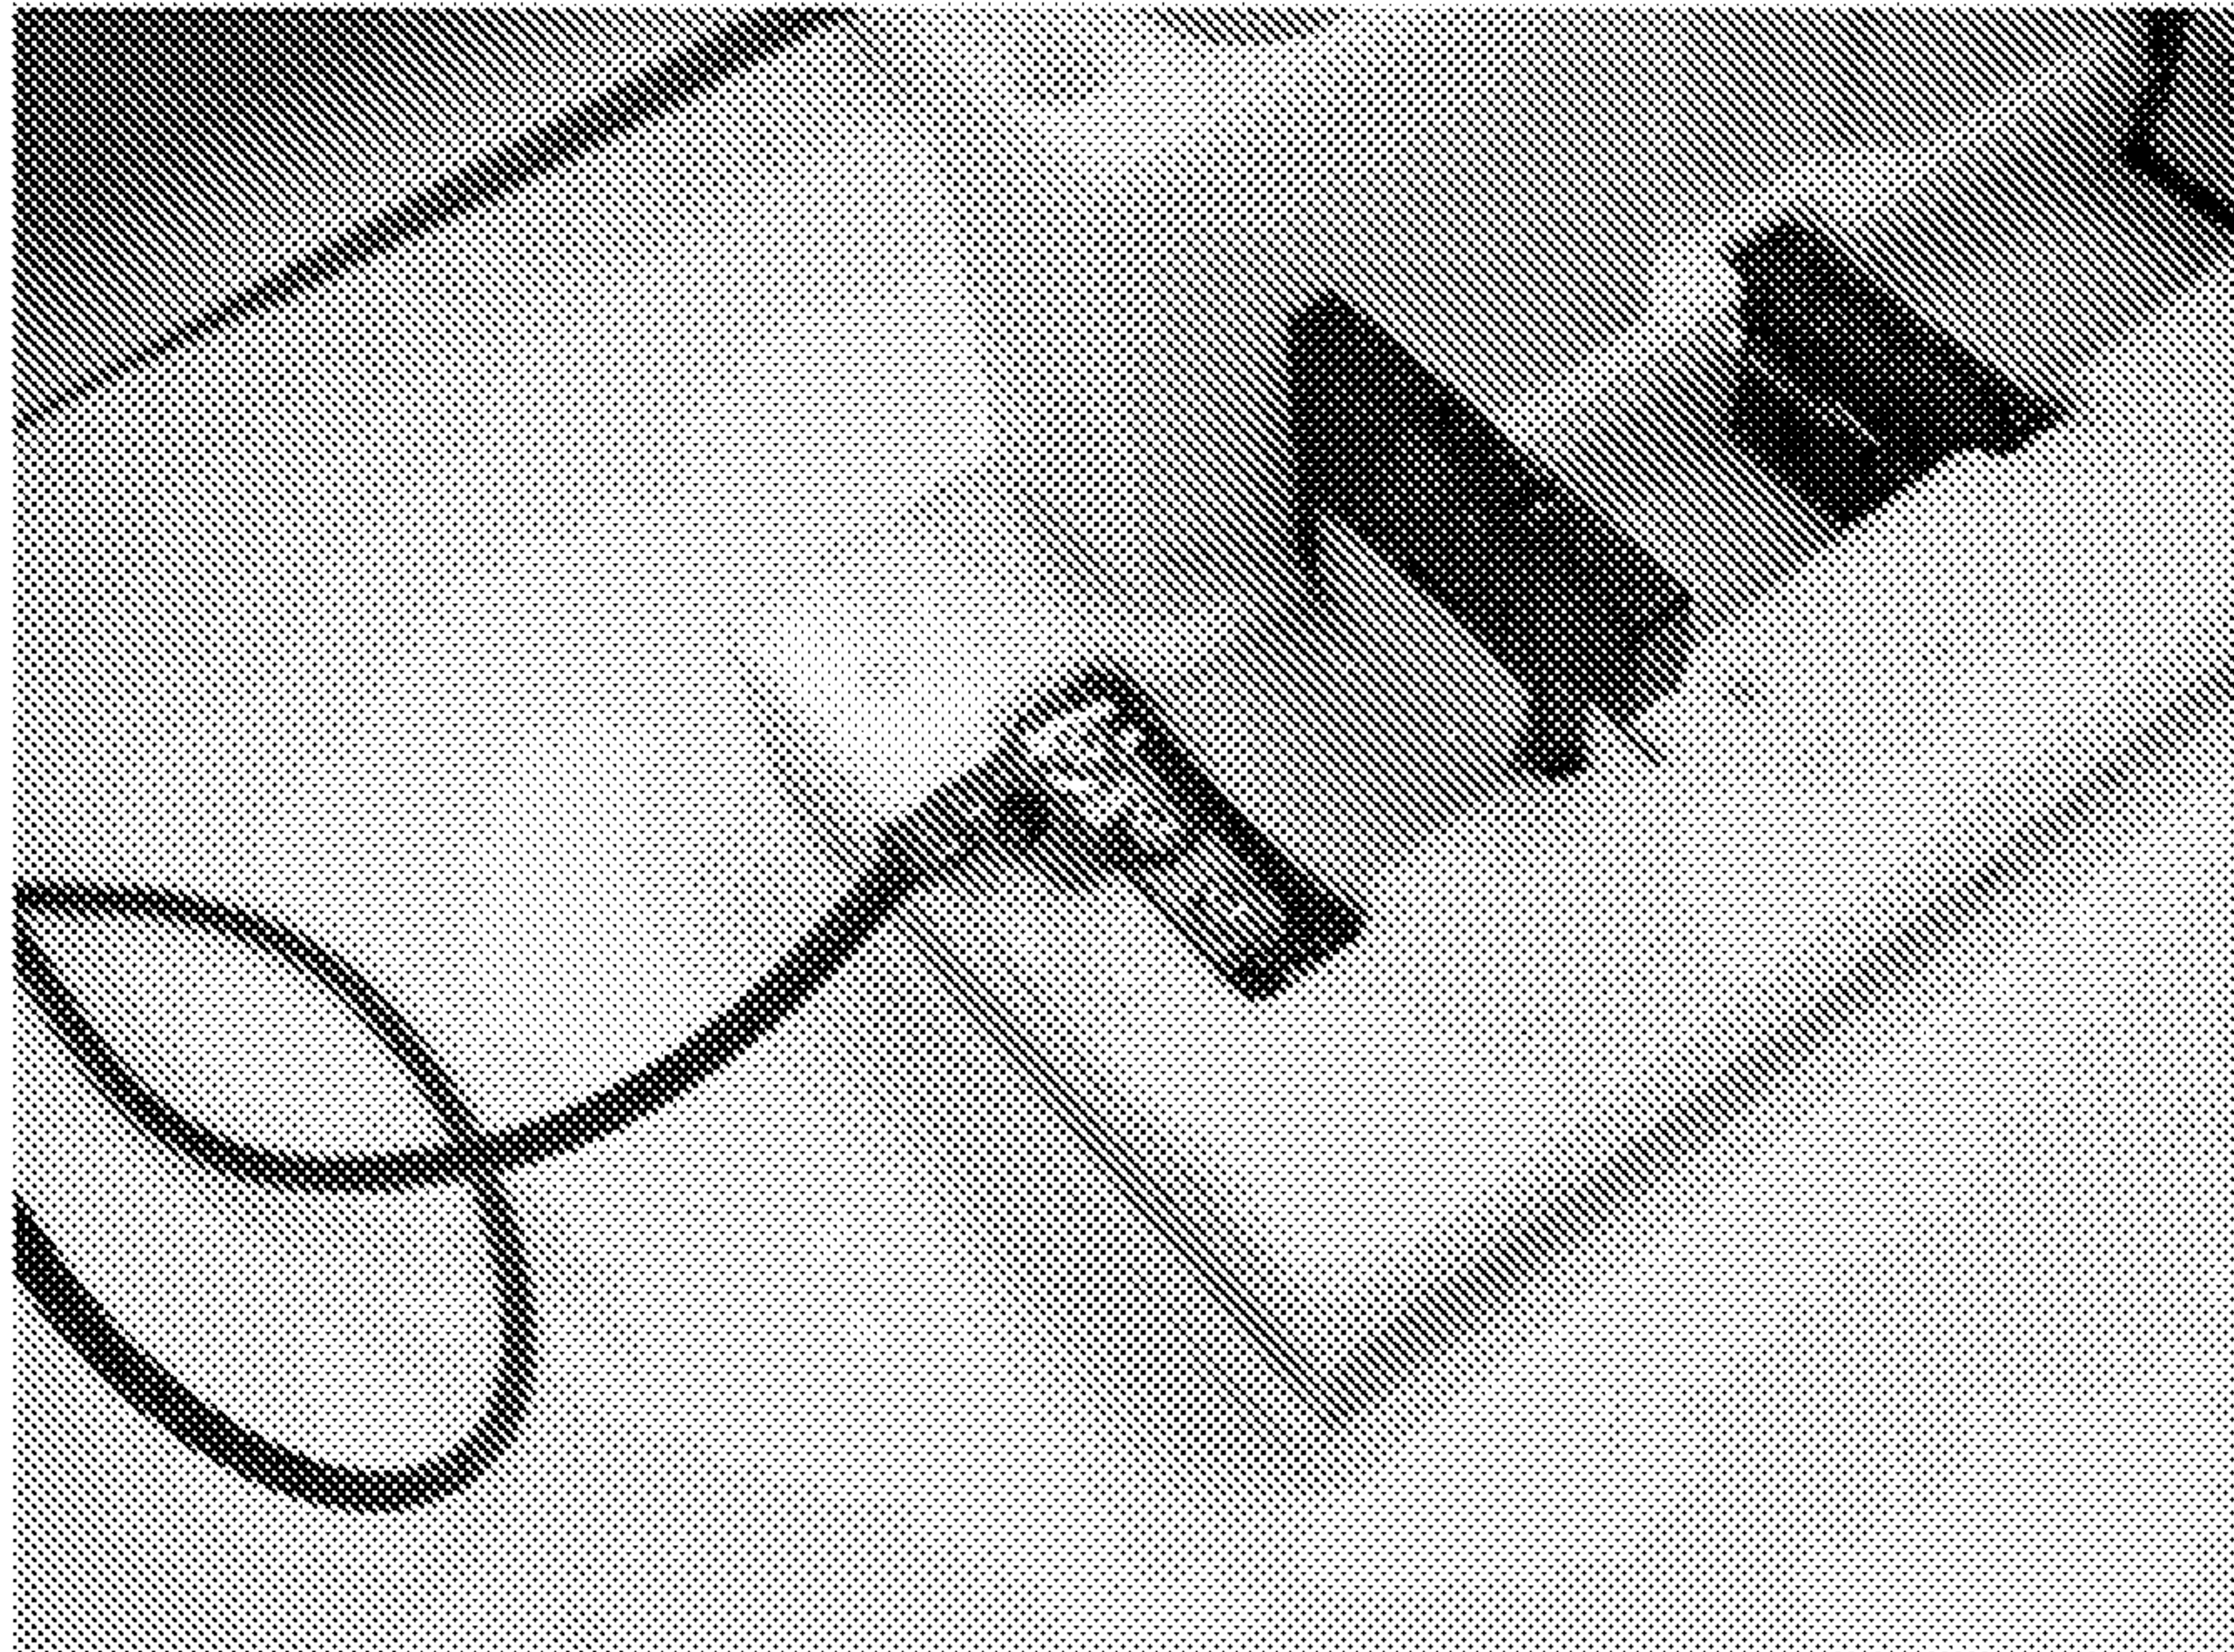


FIG. 10a



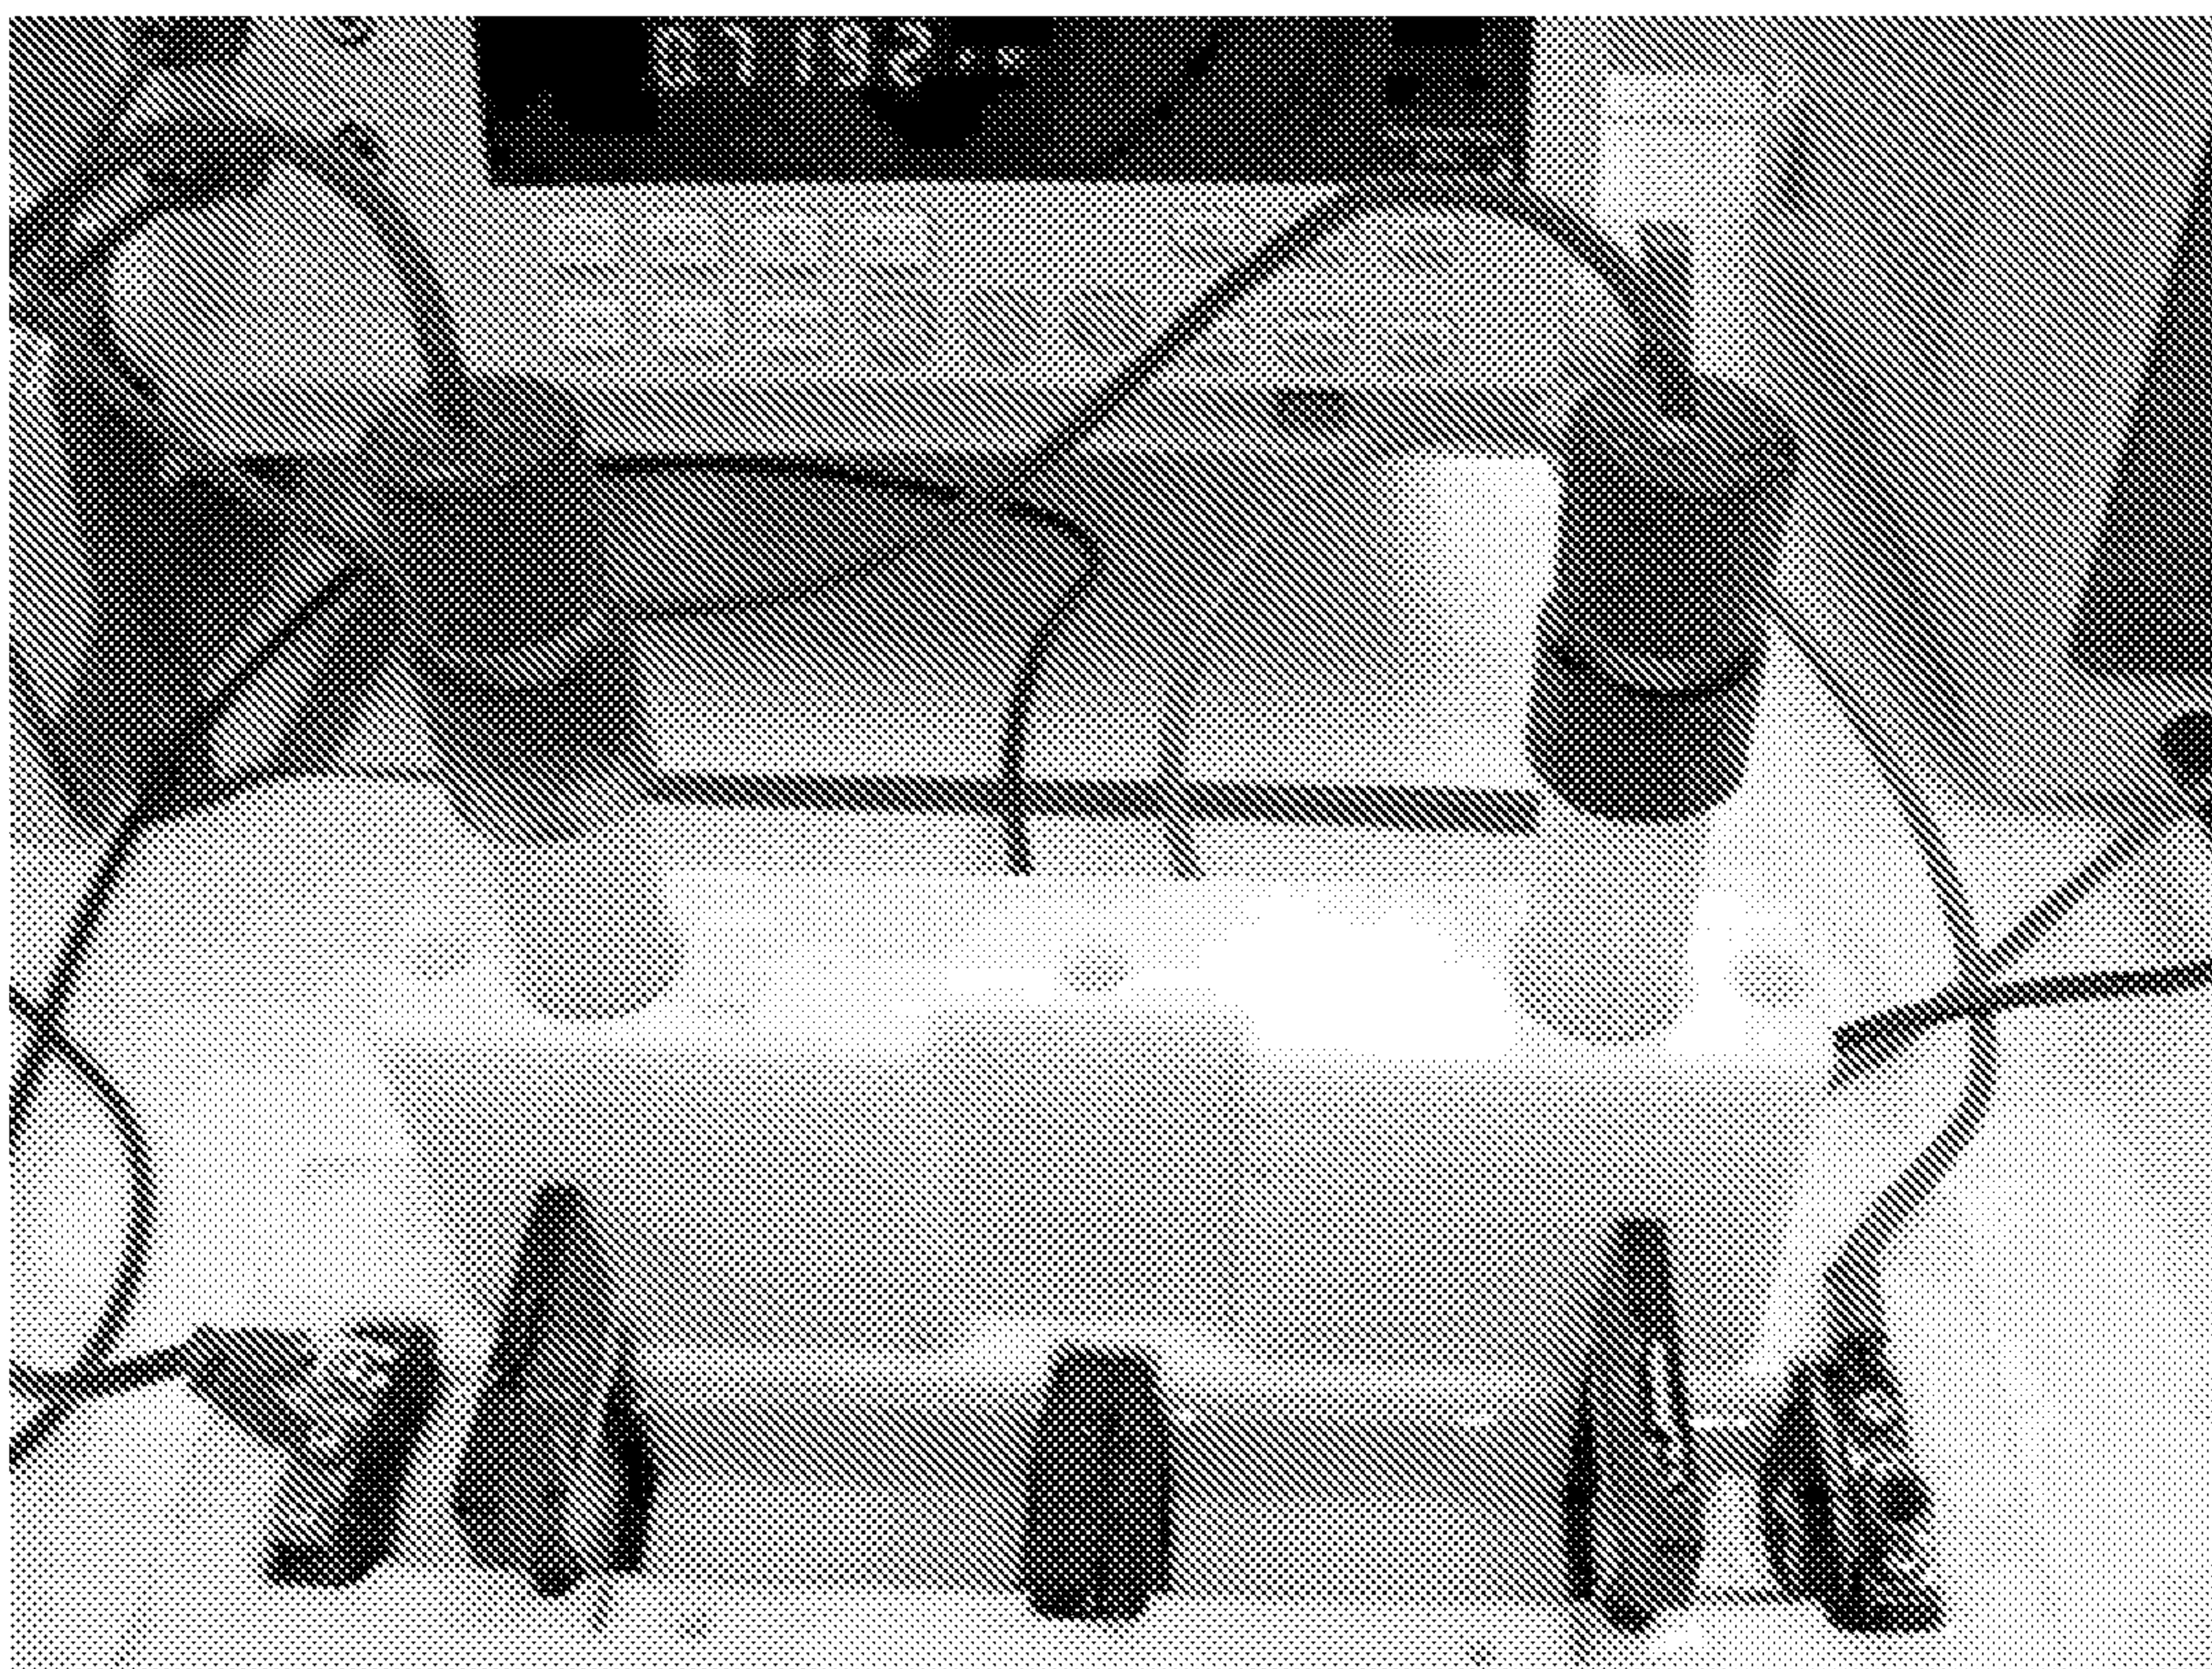


FIG. 10b

10/19

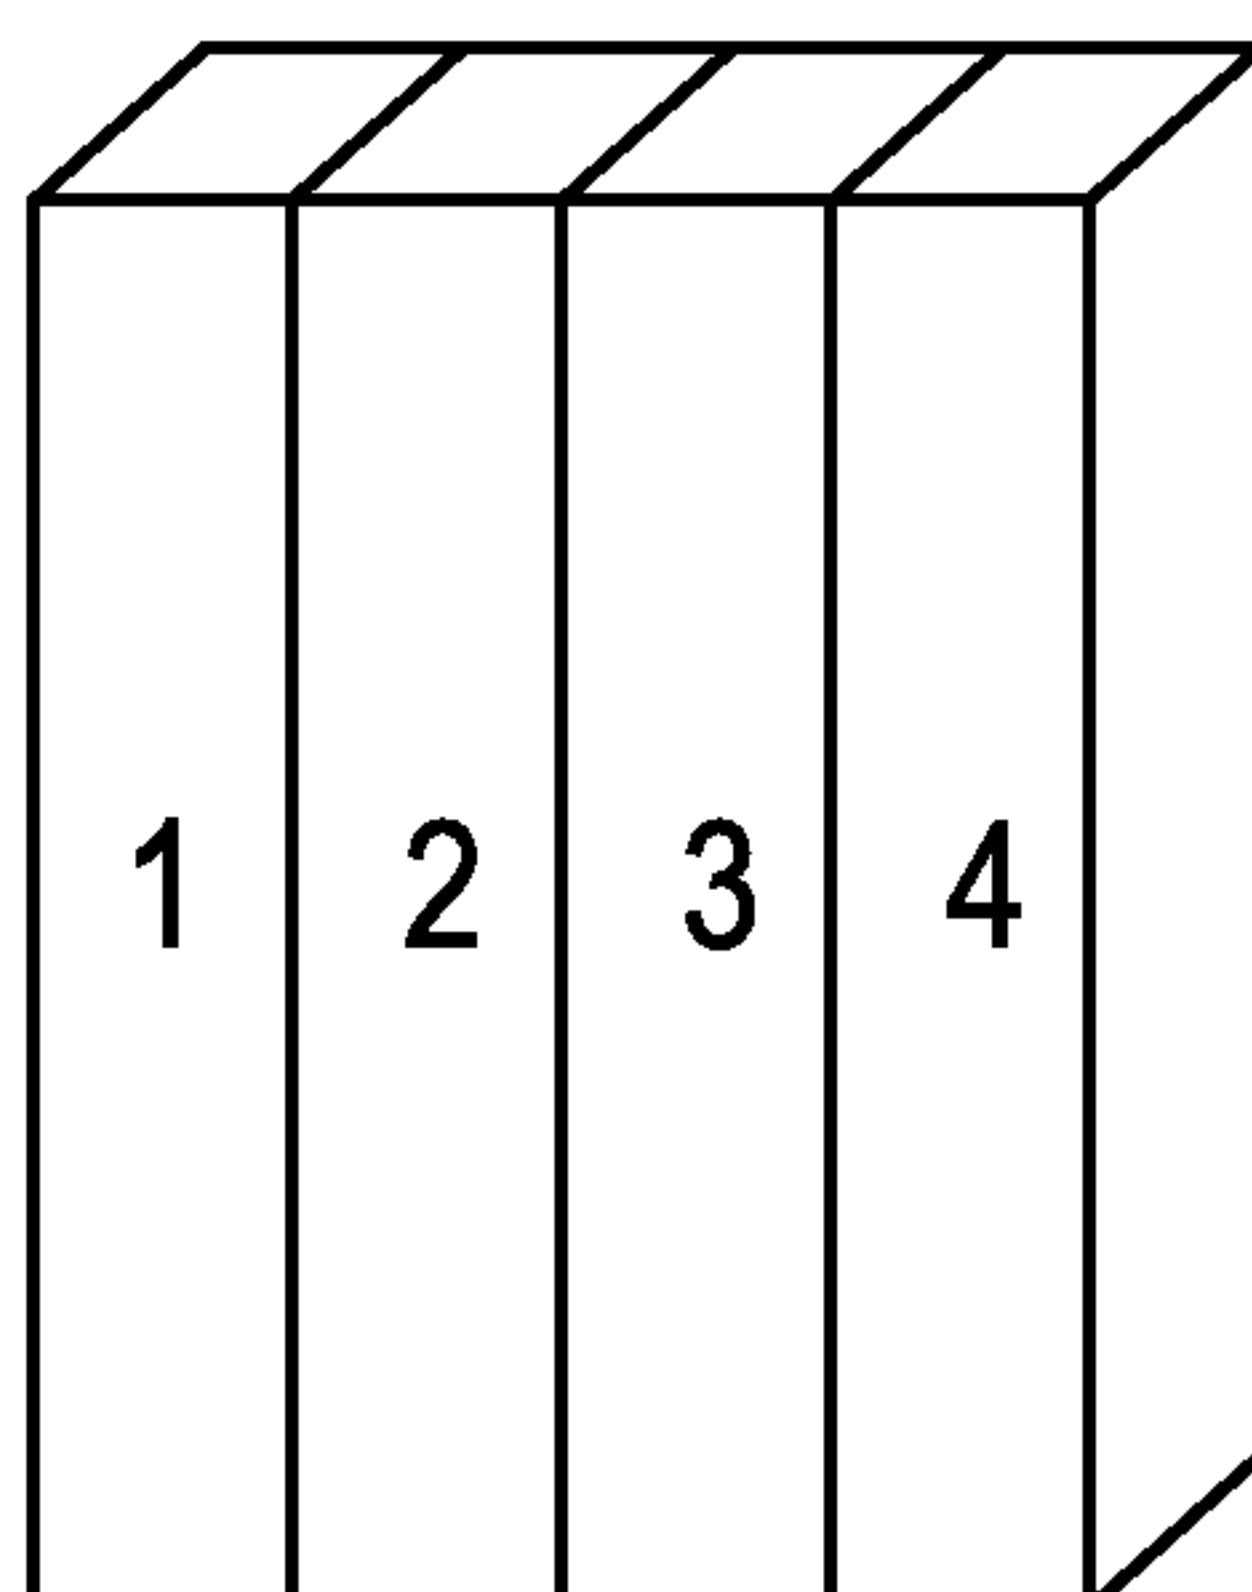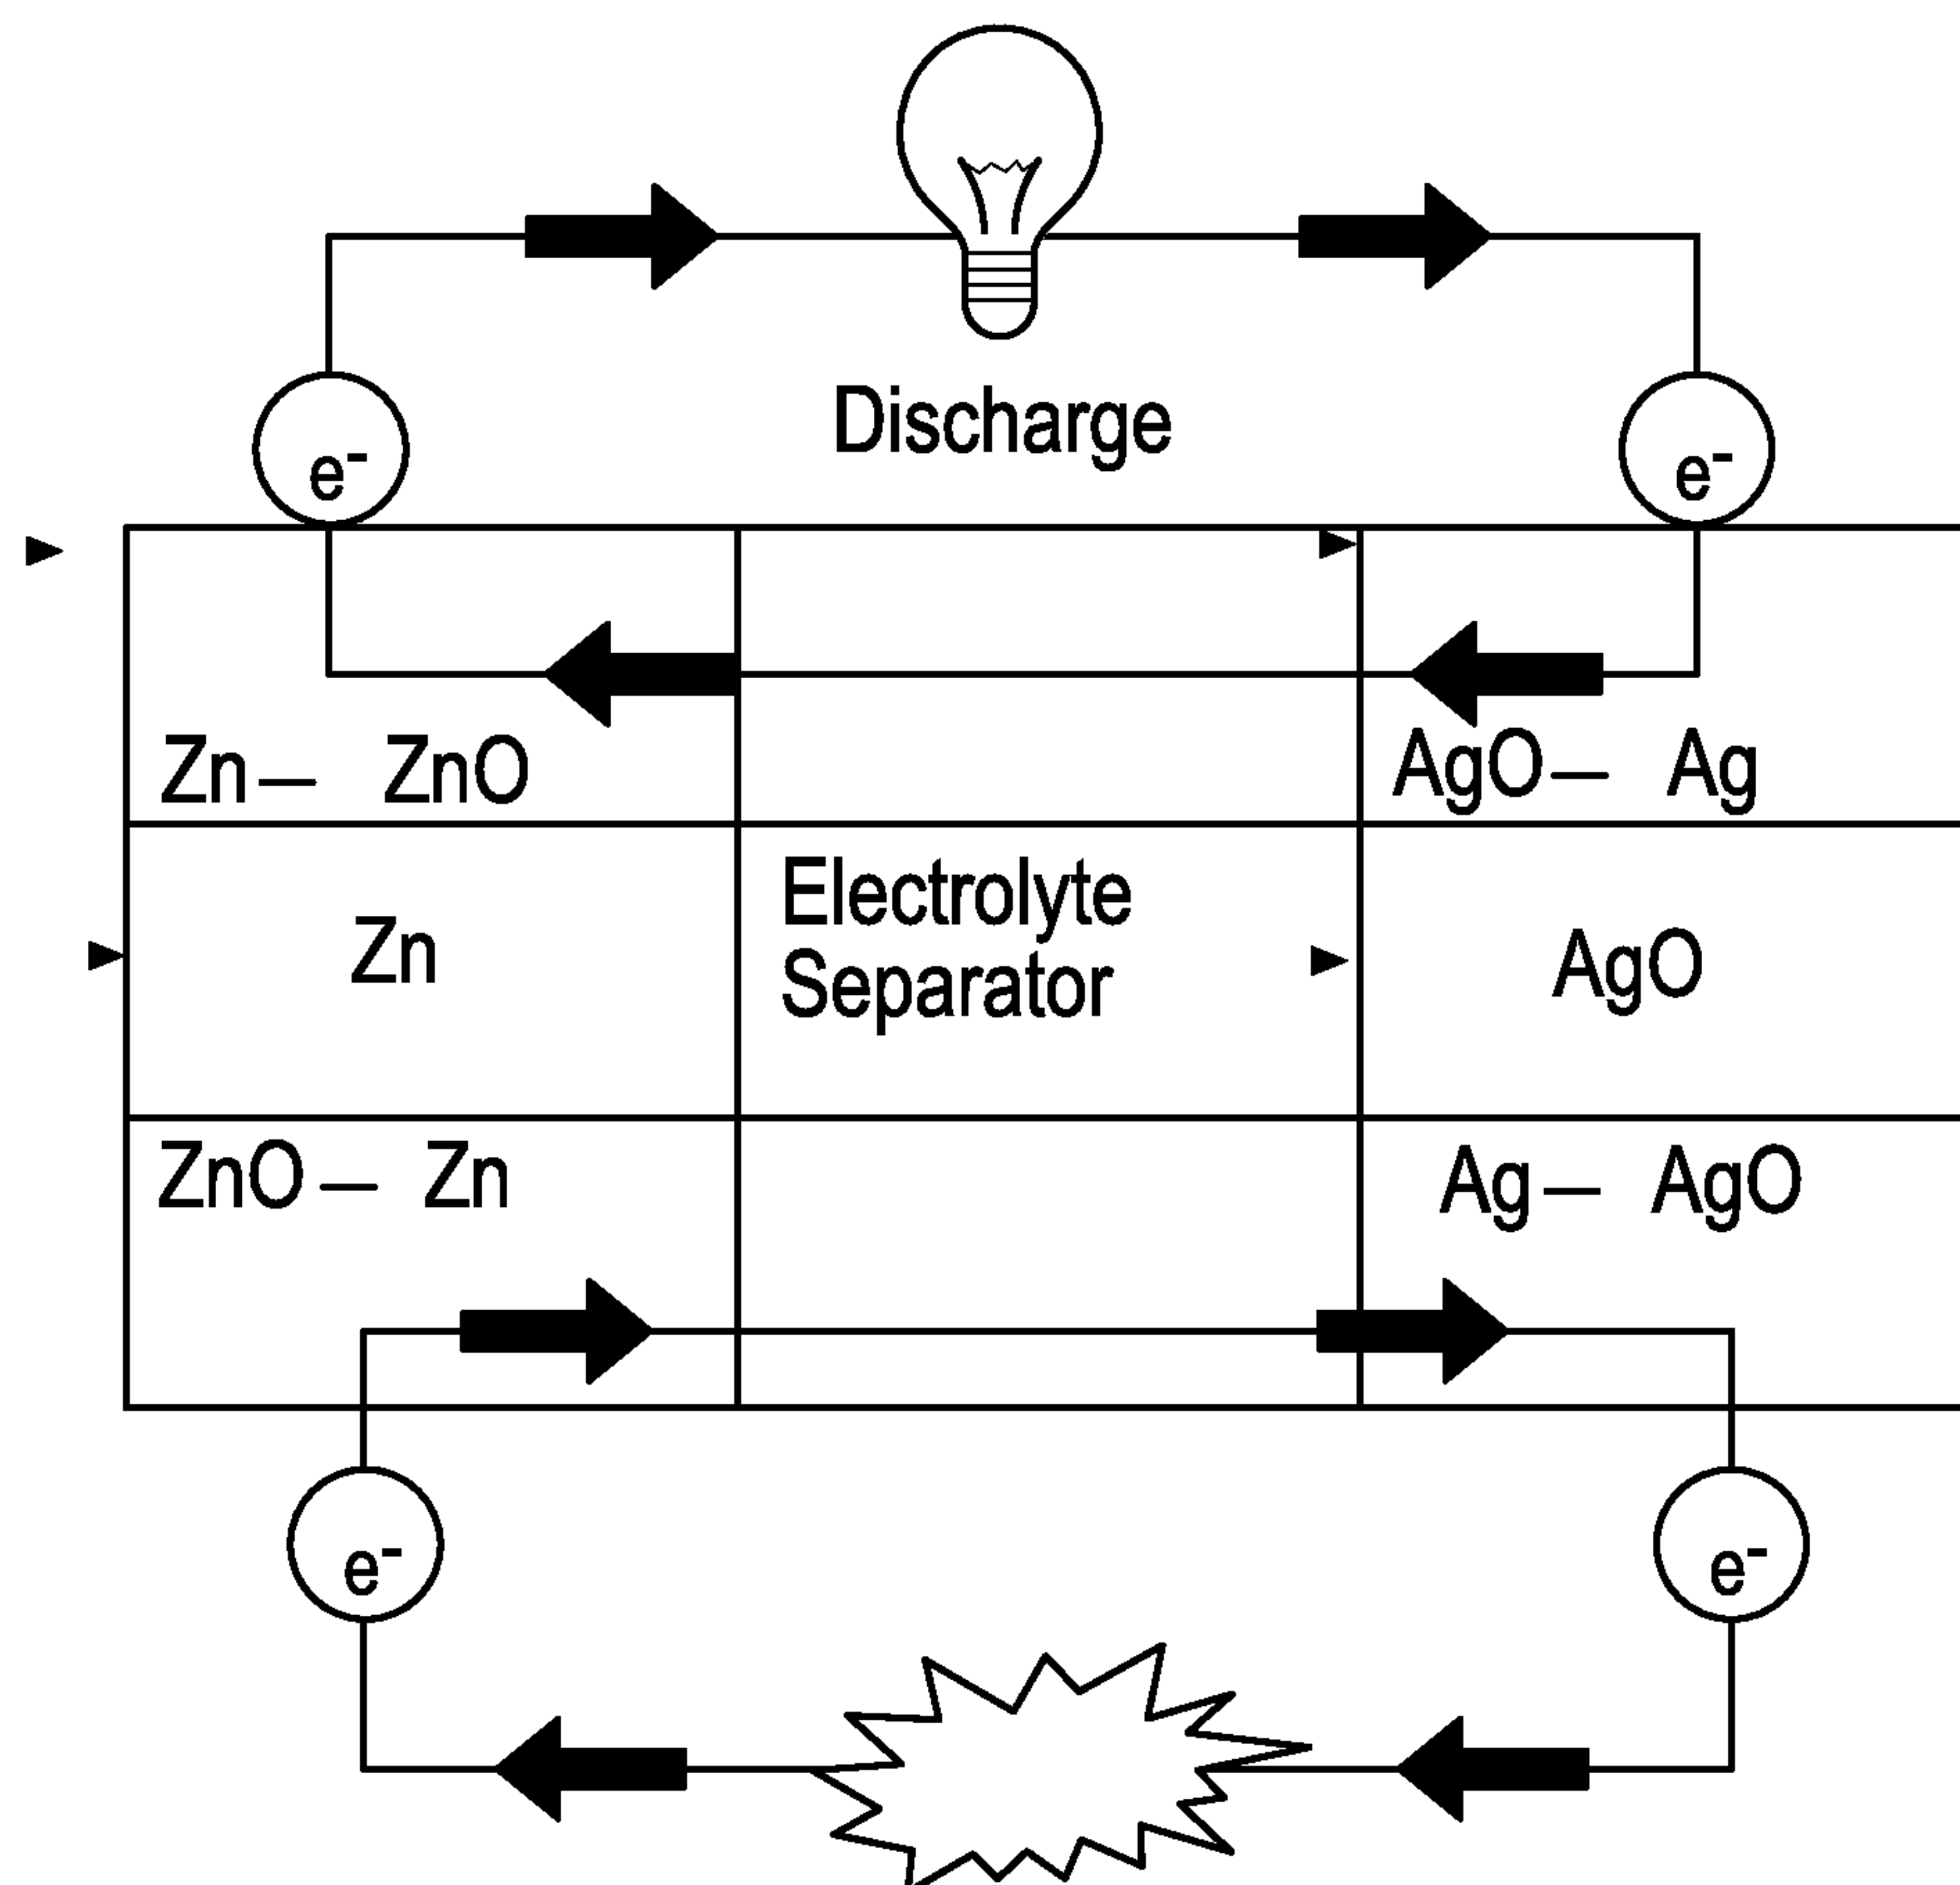

1. Cathode: Silver Material
2. Separator: PVDF + ZrO_2
3. Separator: PE
4. Anode: Z

FIG. 11

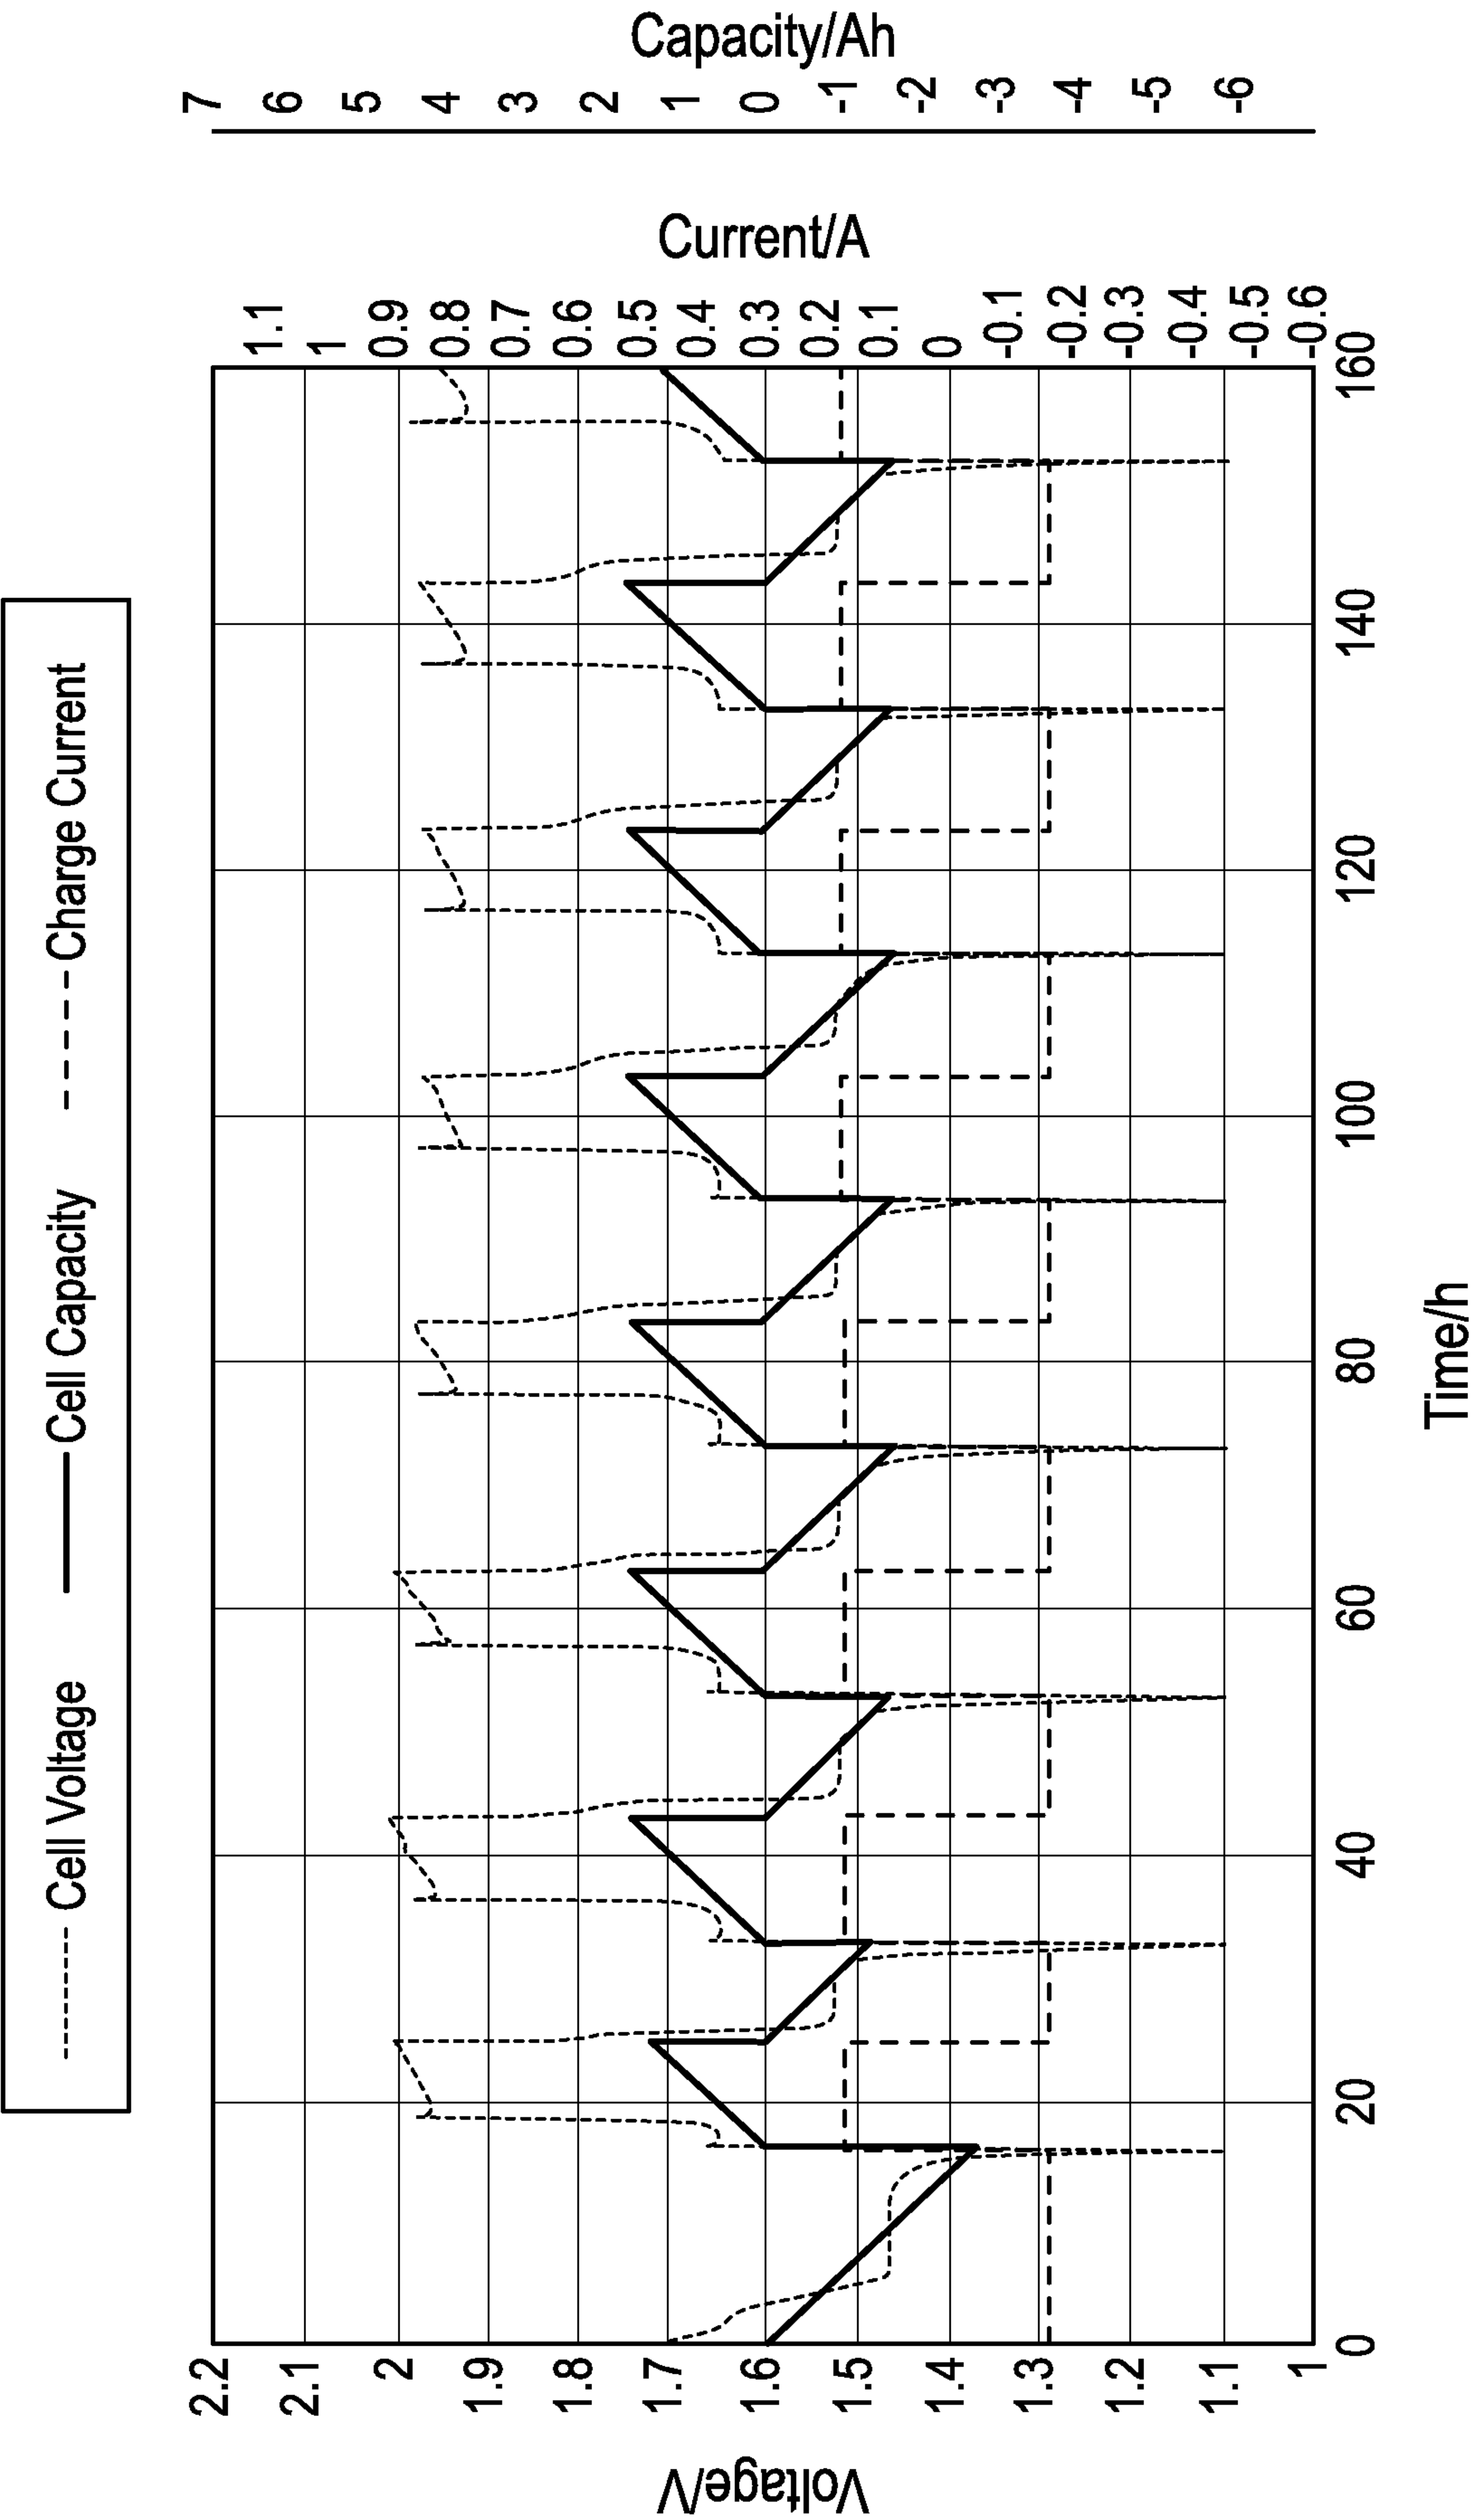


FIG. 12

12/20

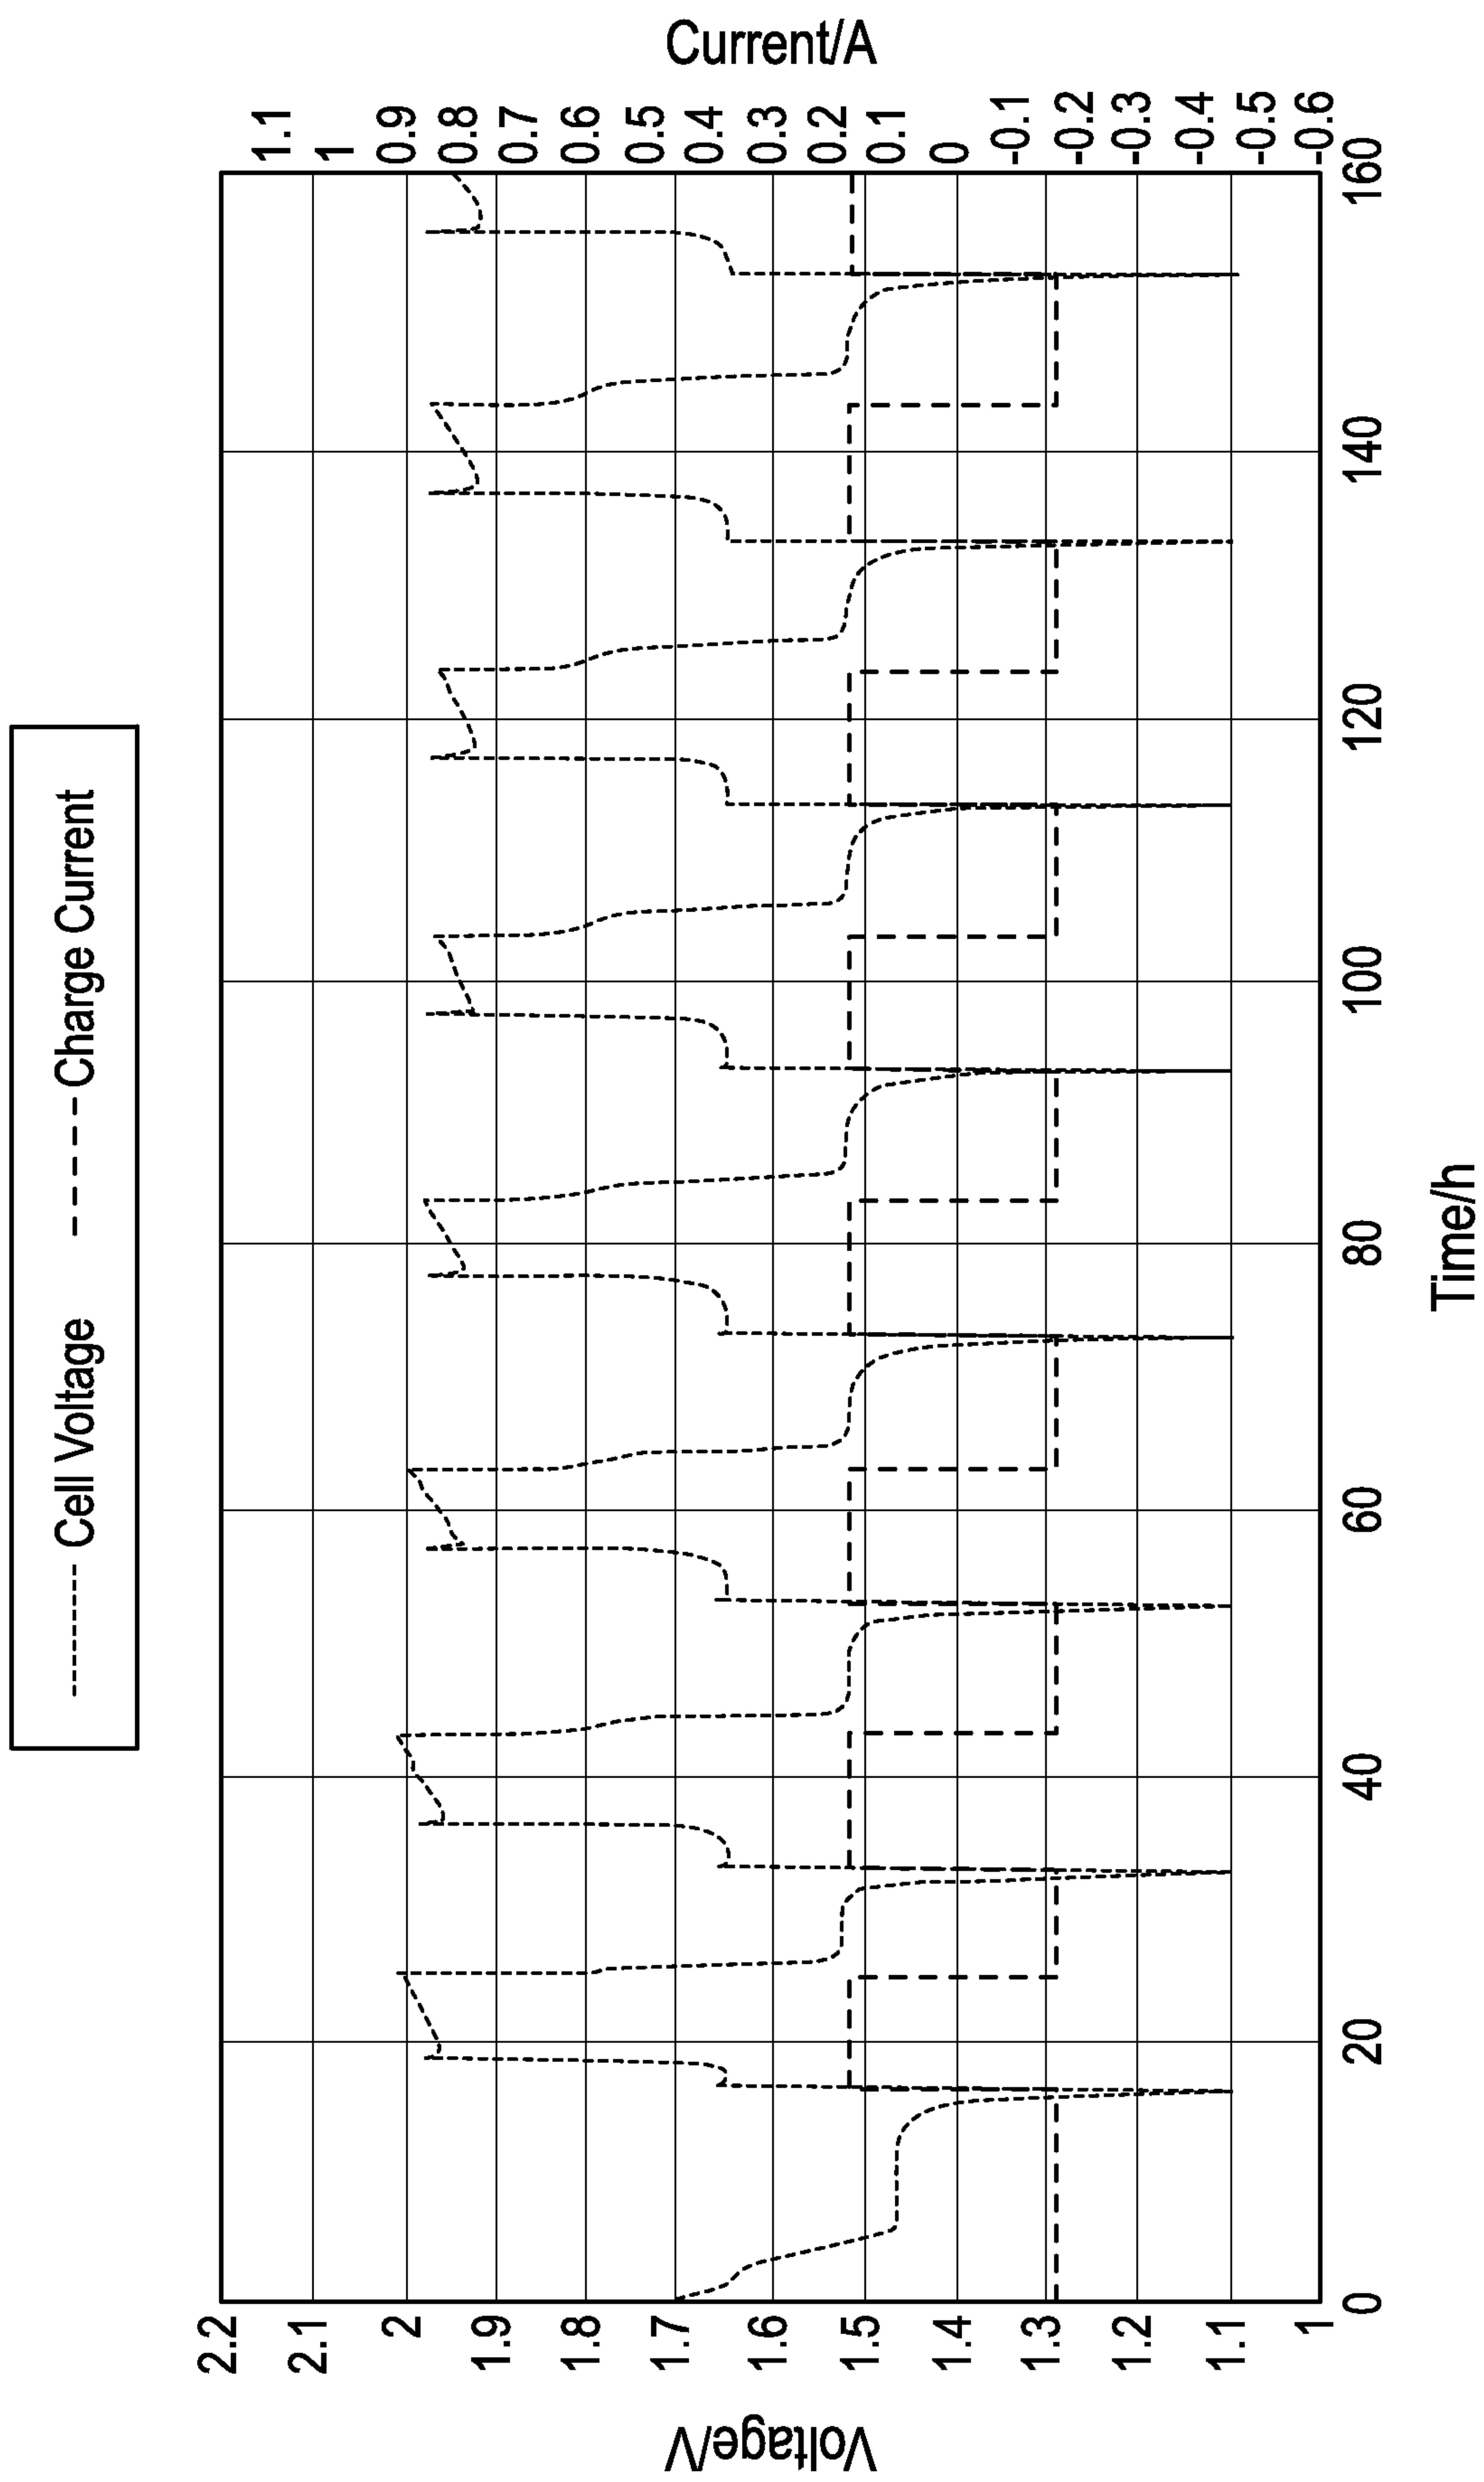


FIG. 13

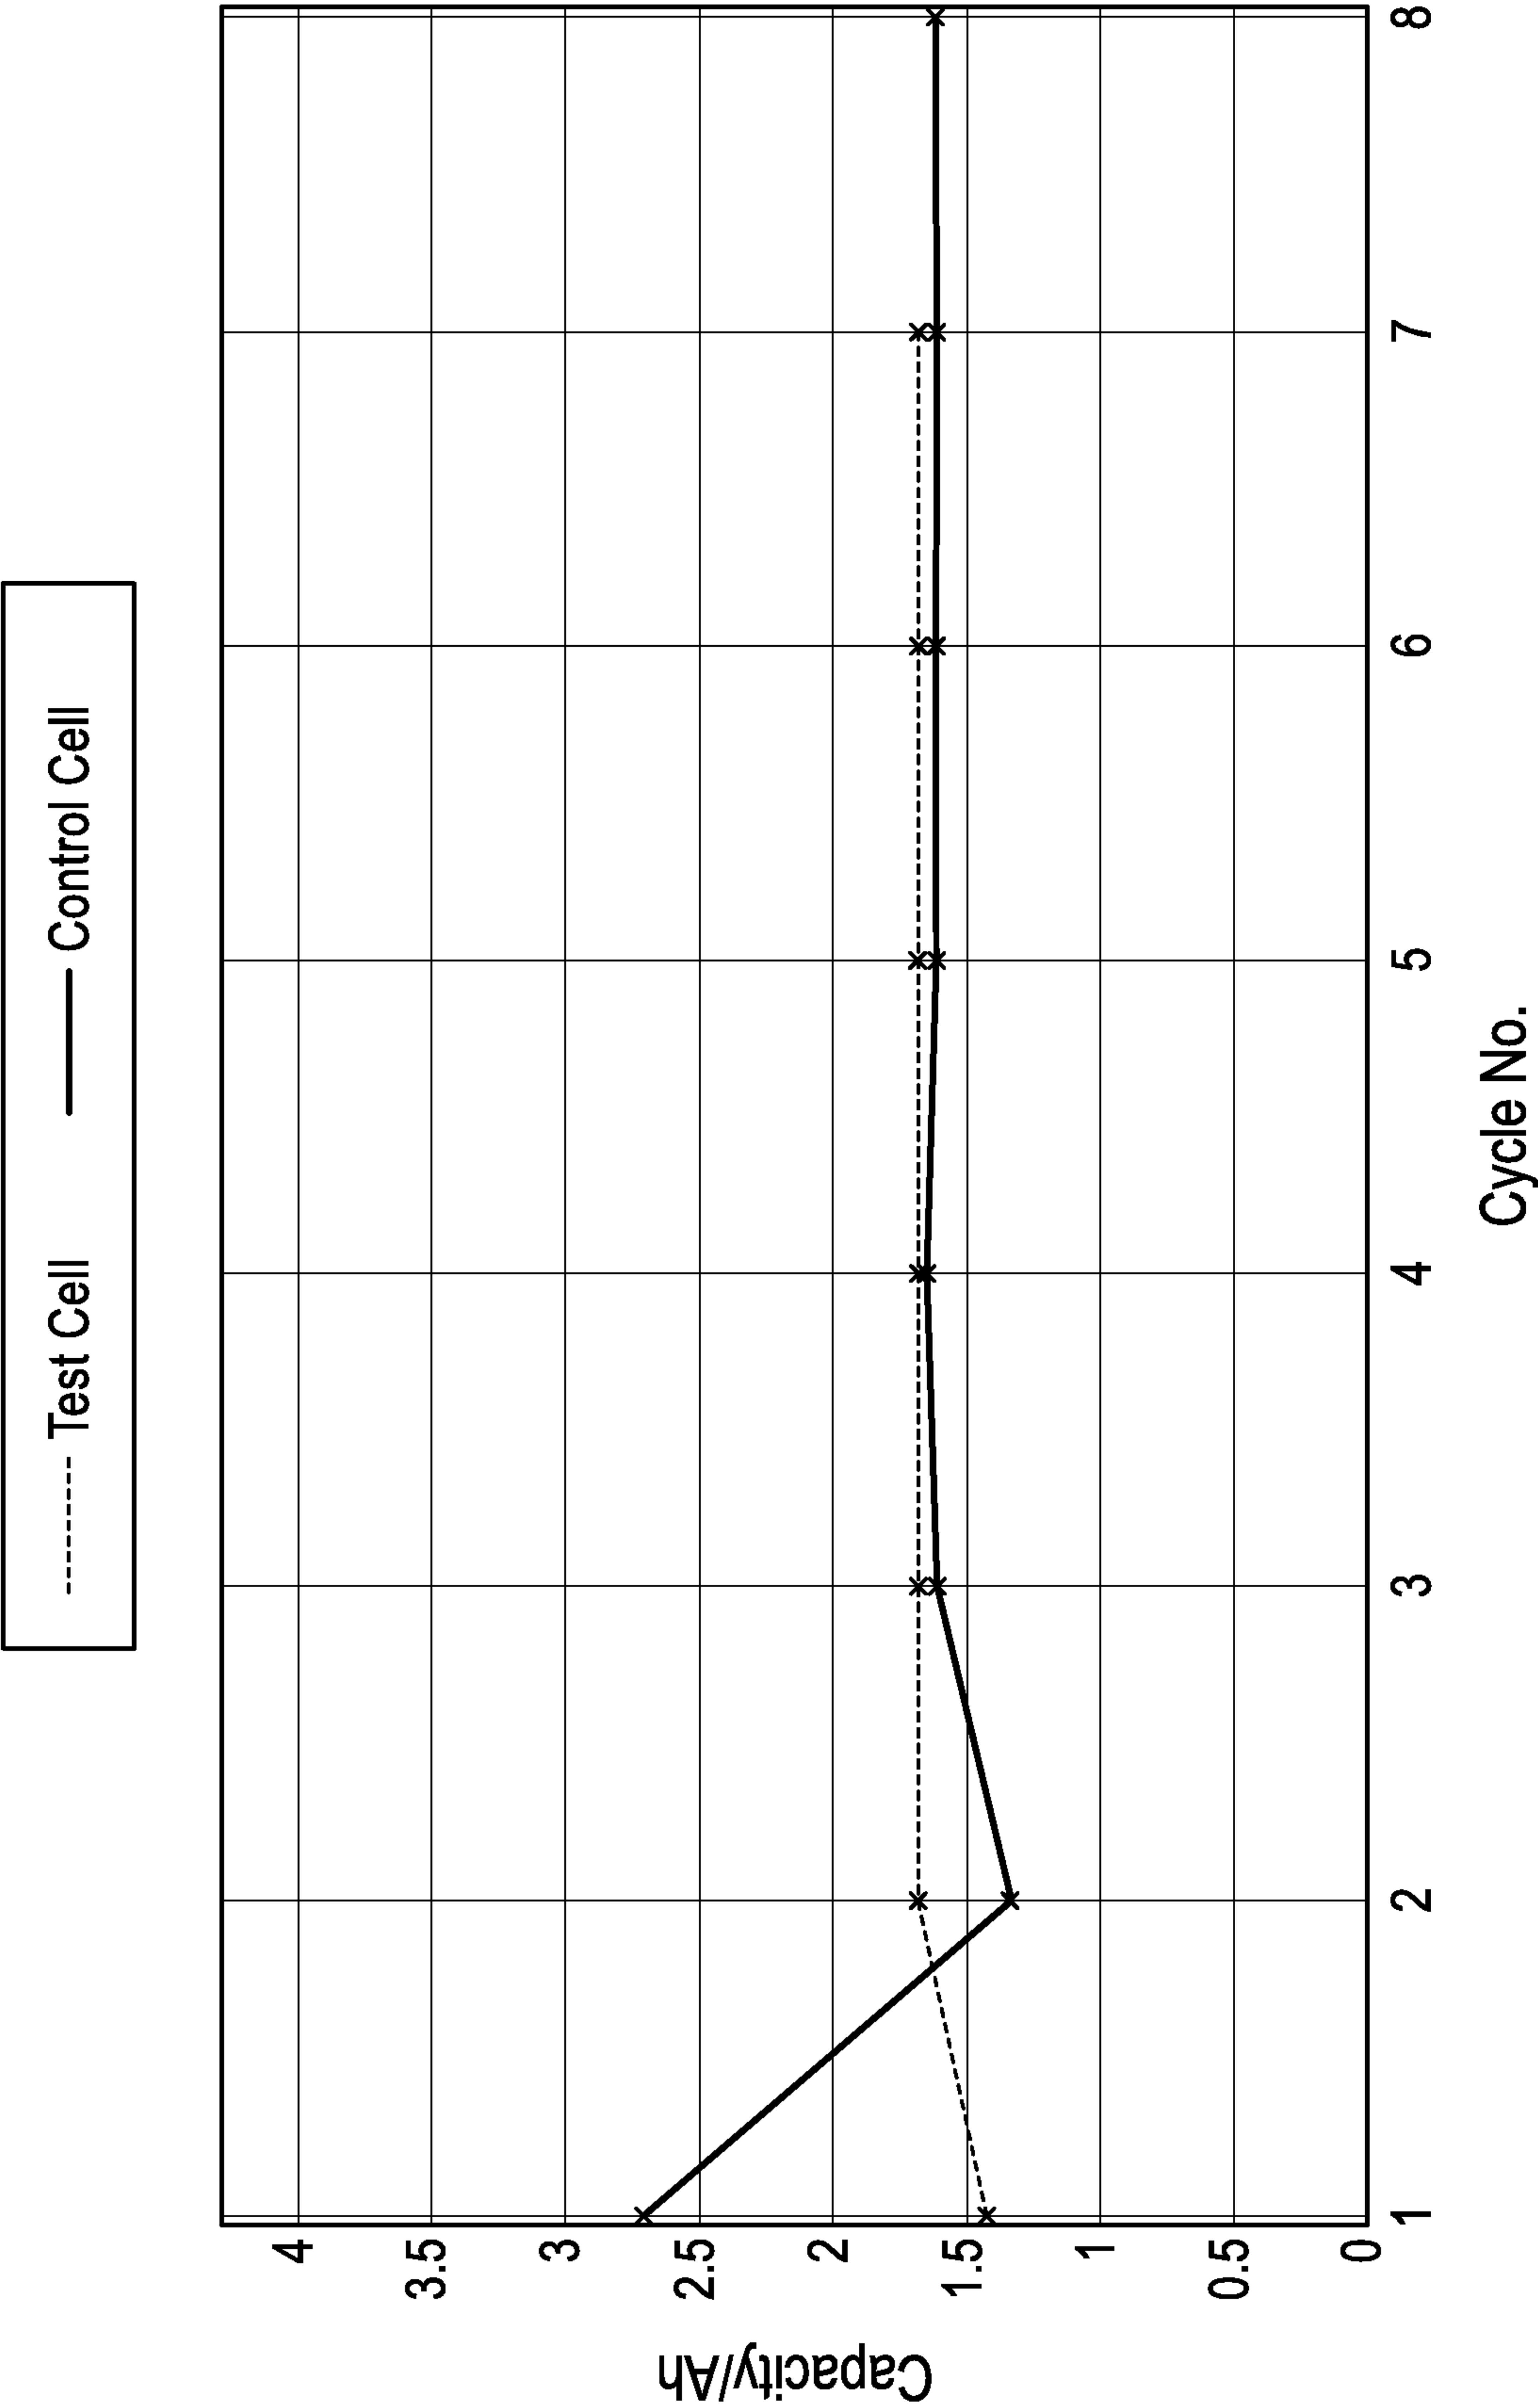


FIG. 14

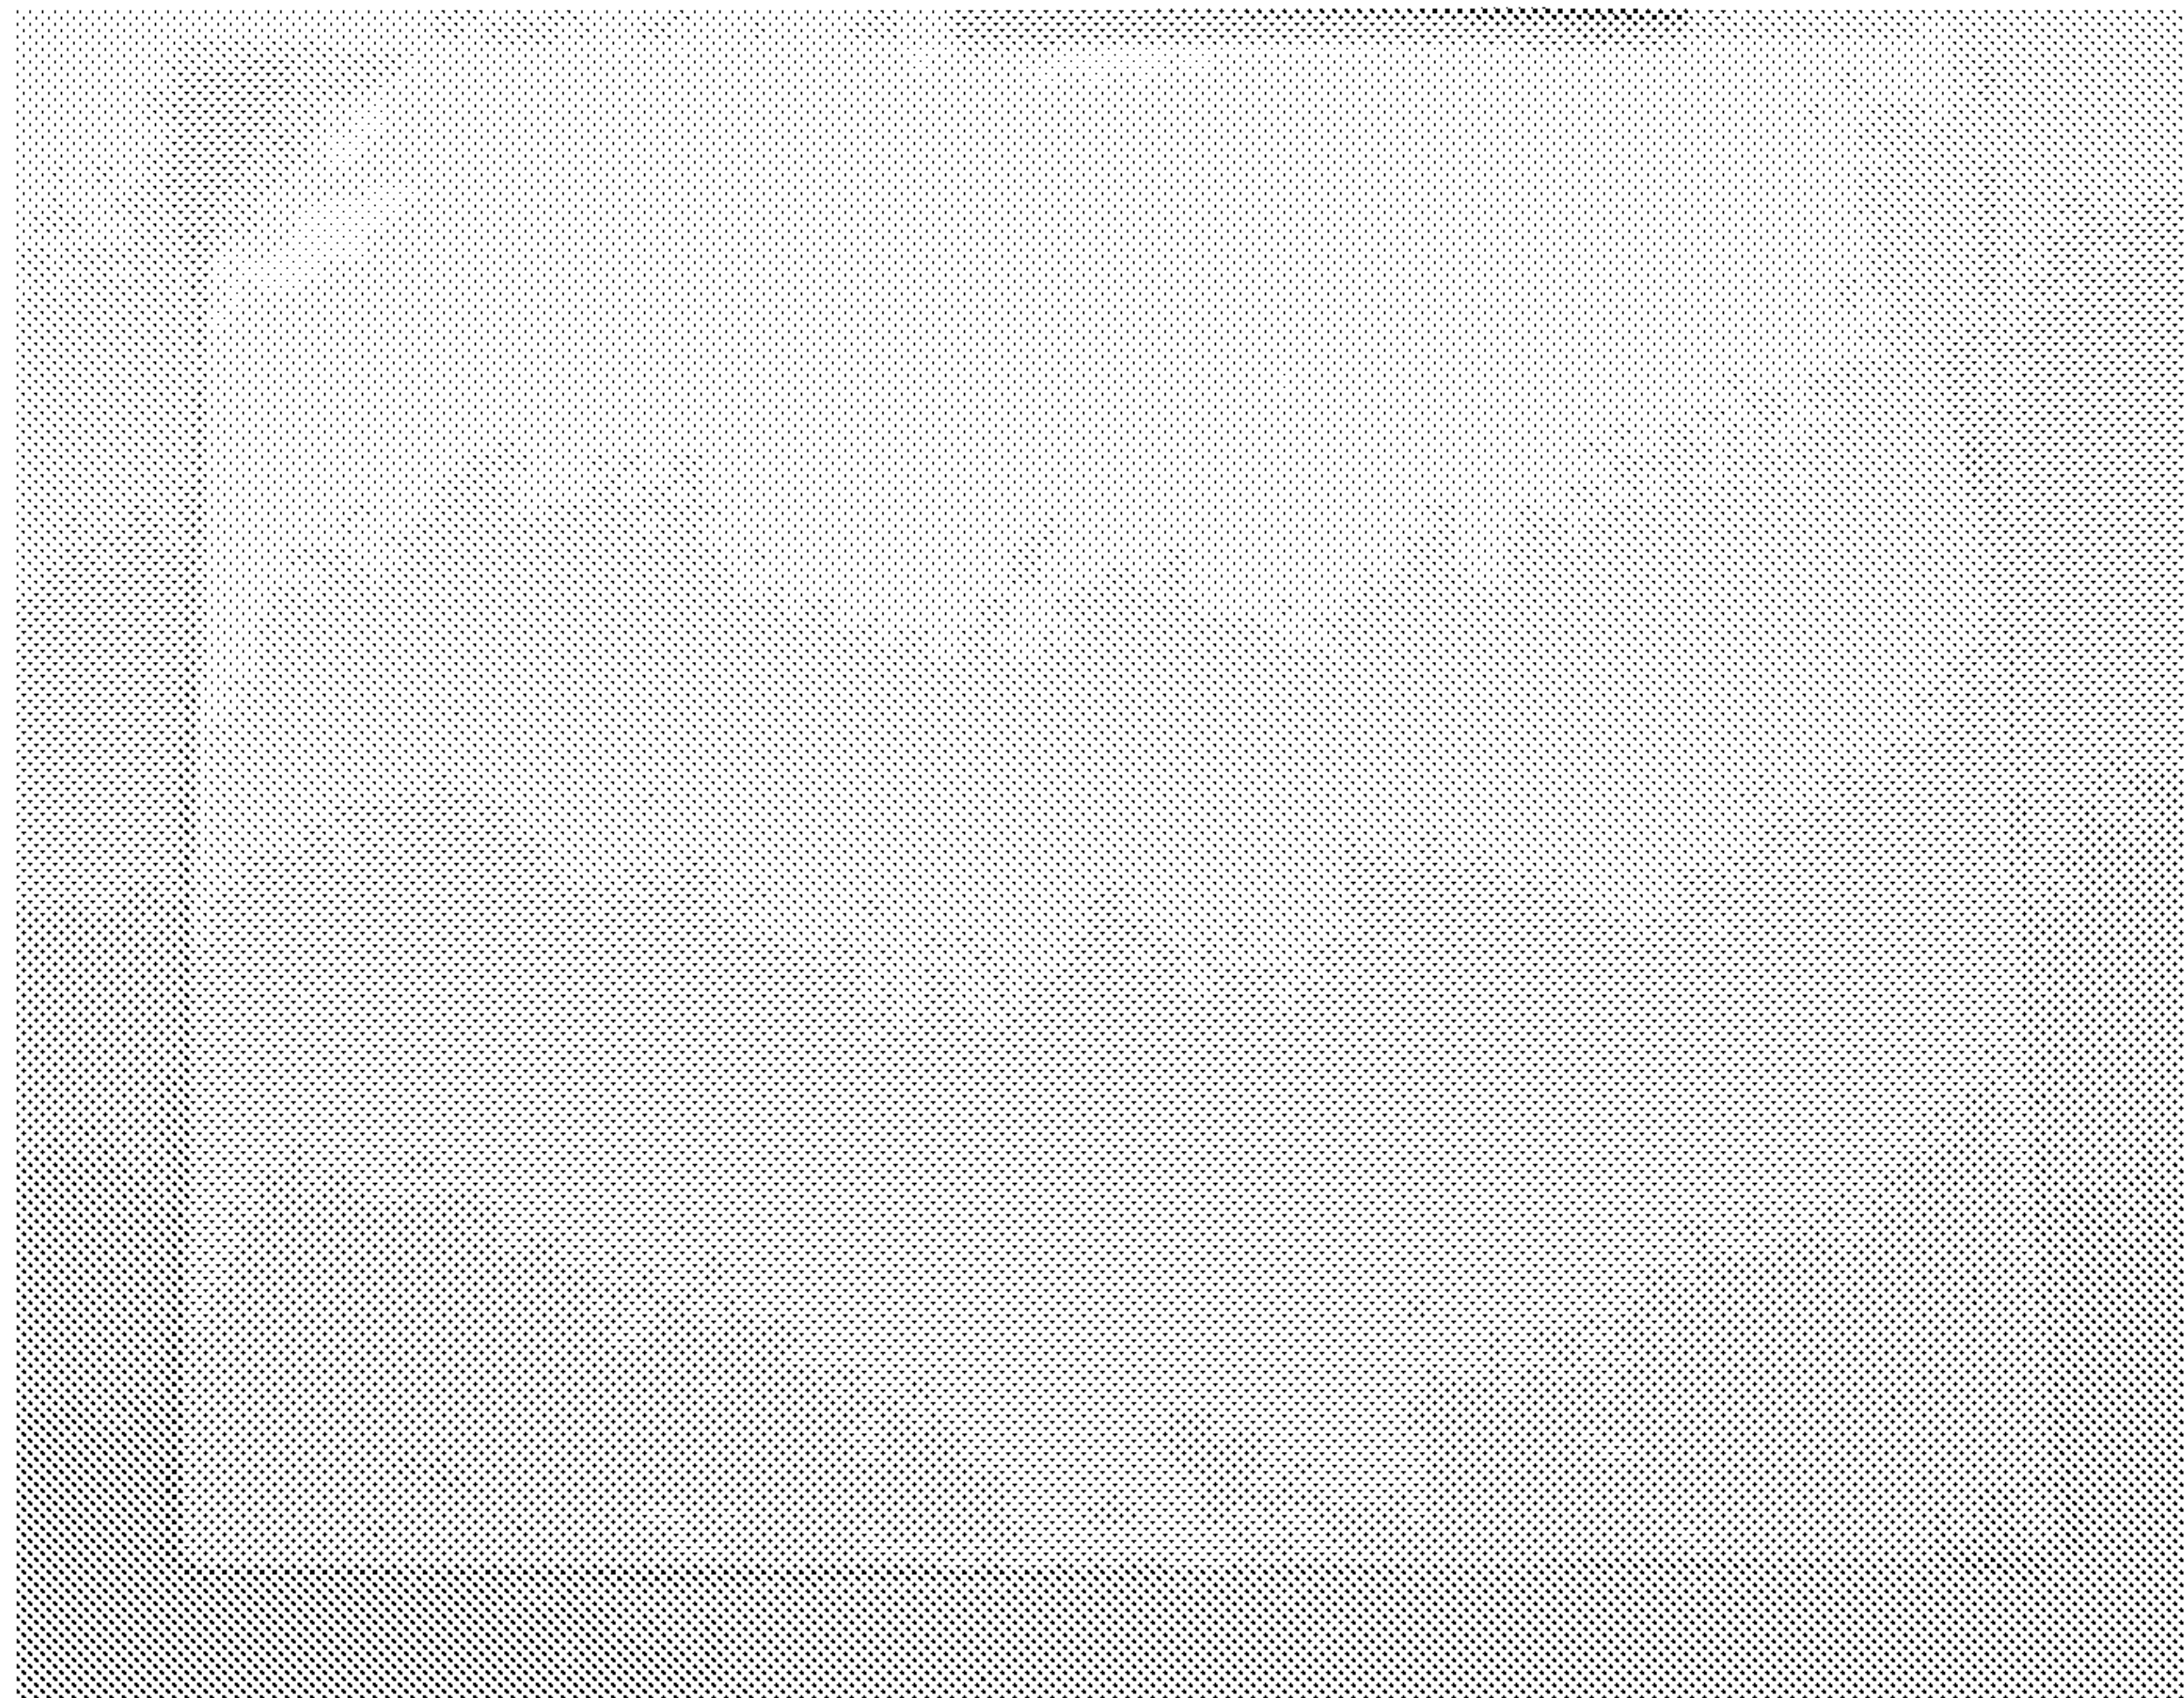


FIG. 15A

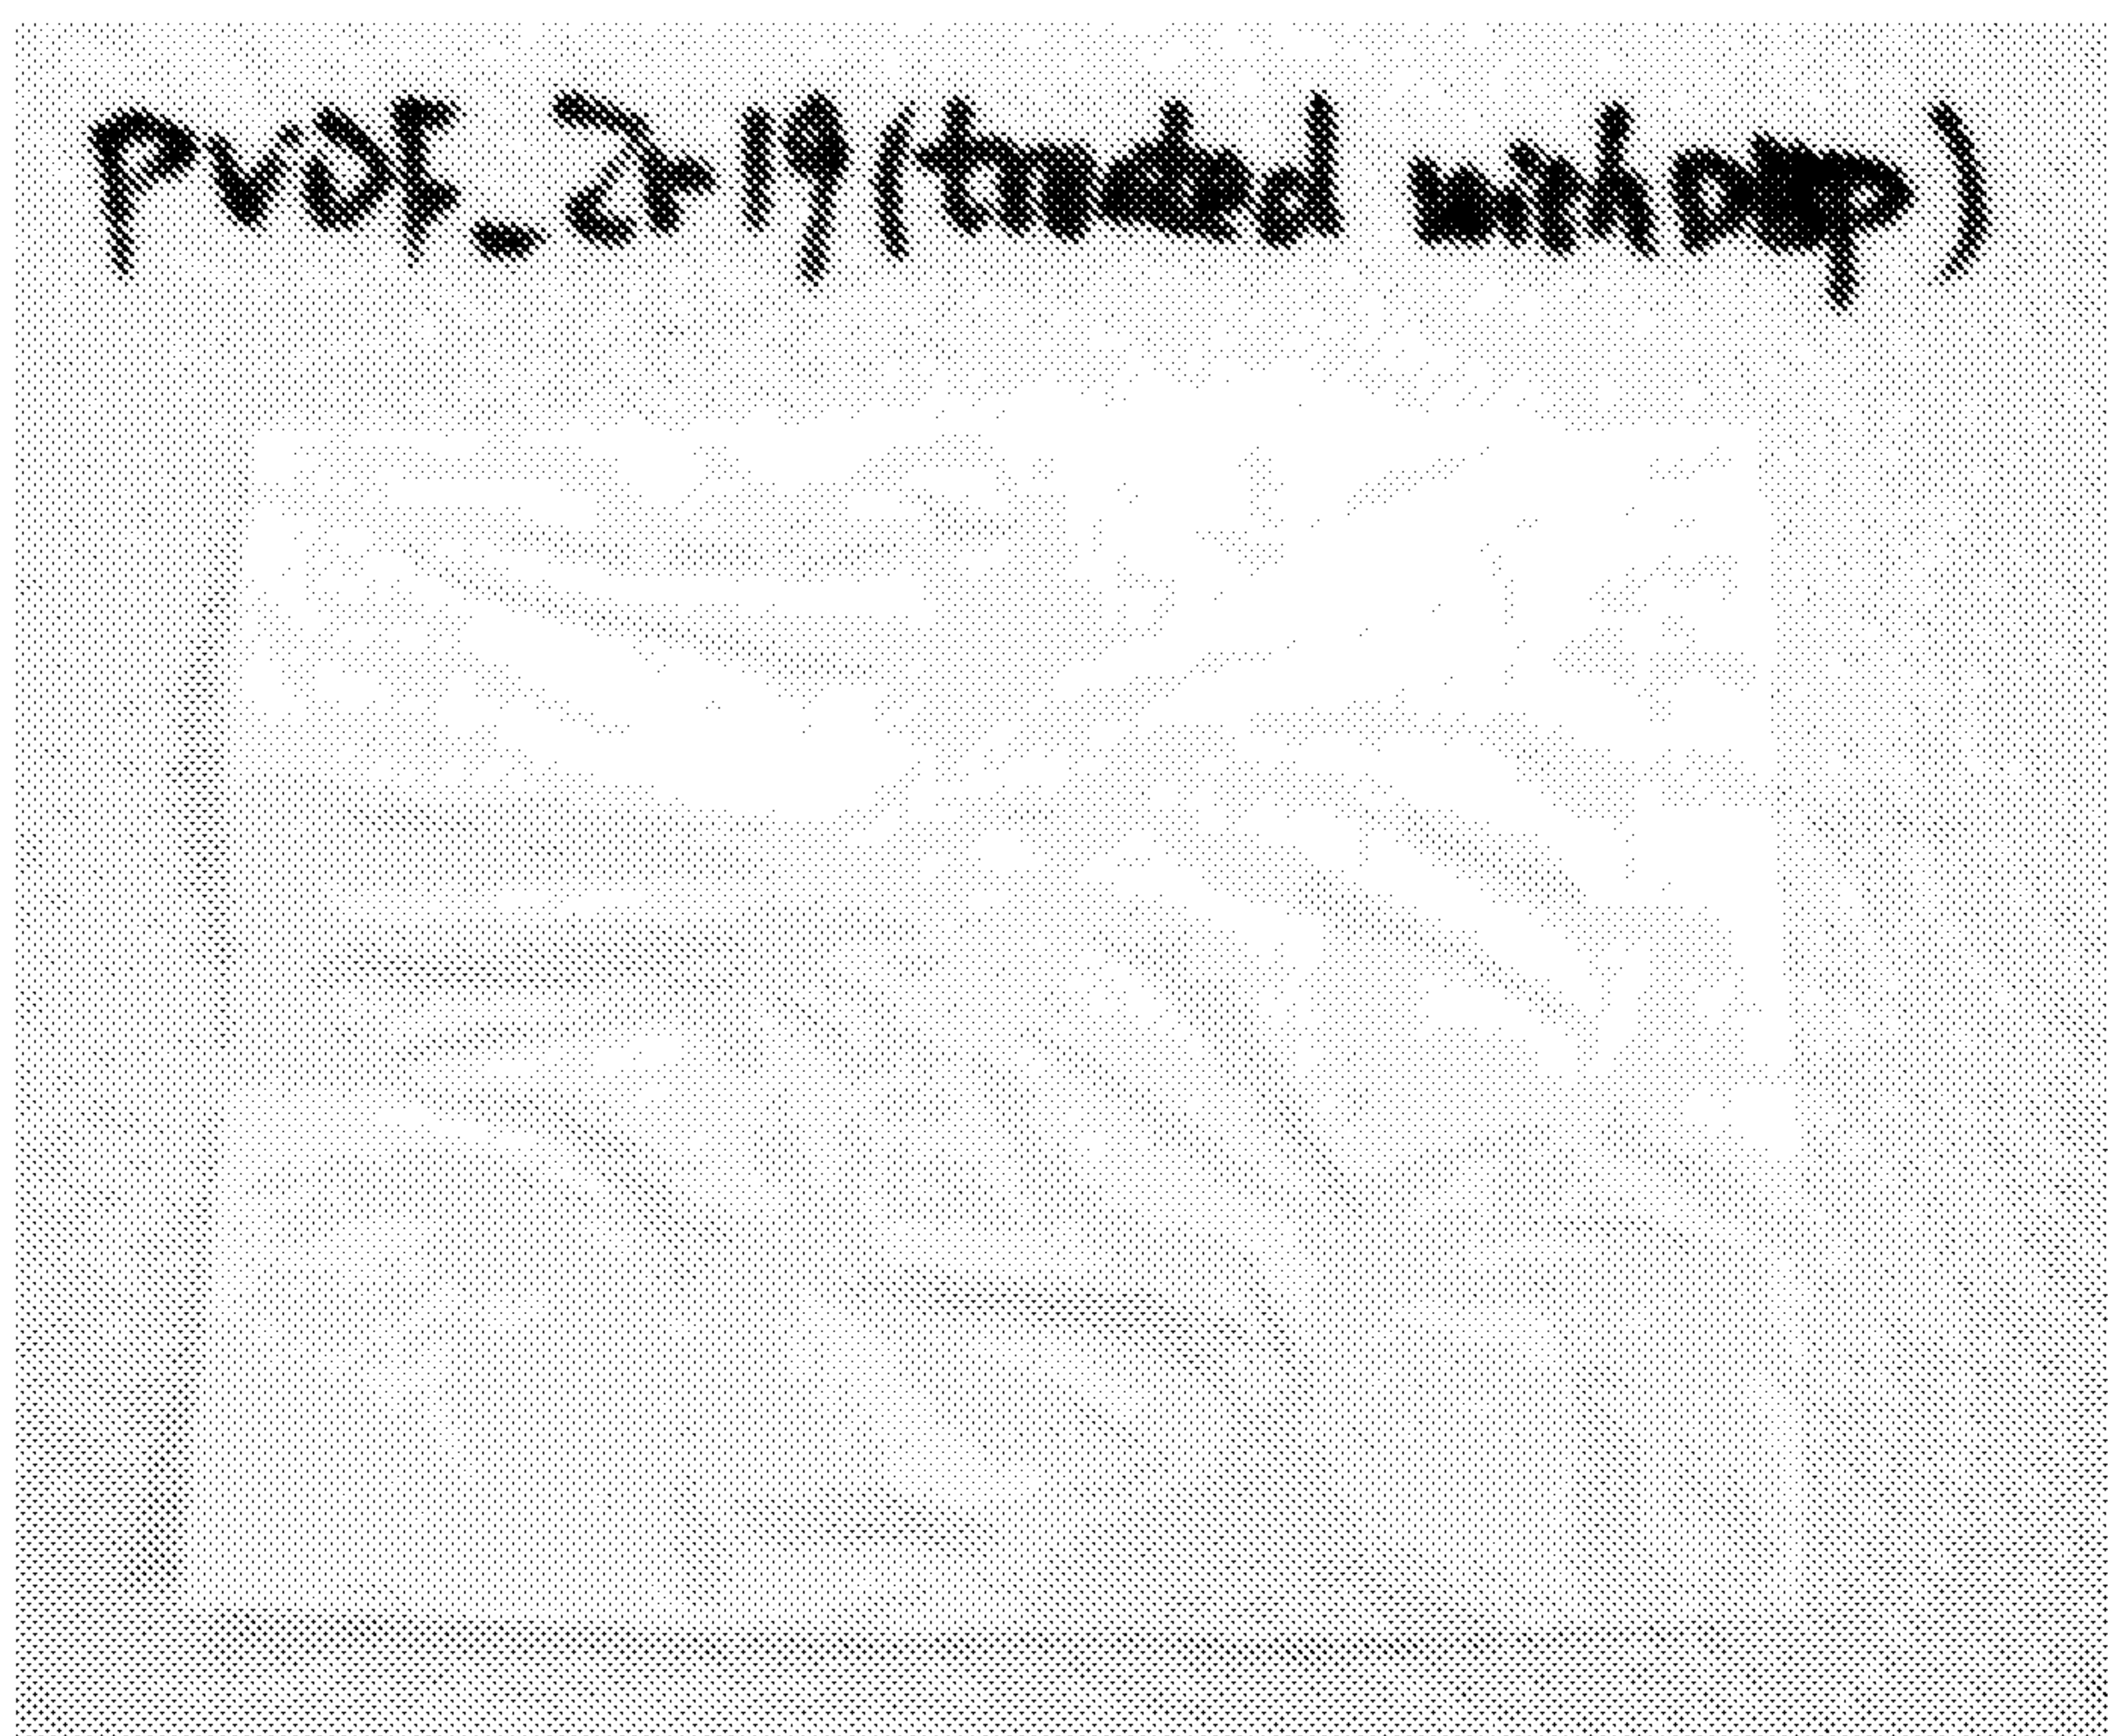


FIG. 15B

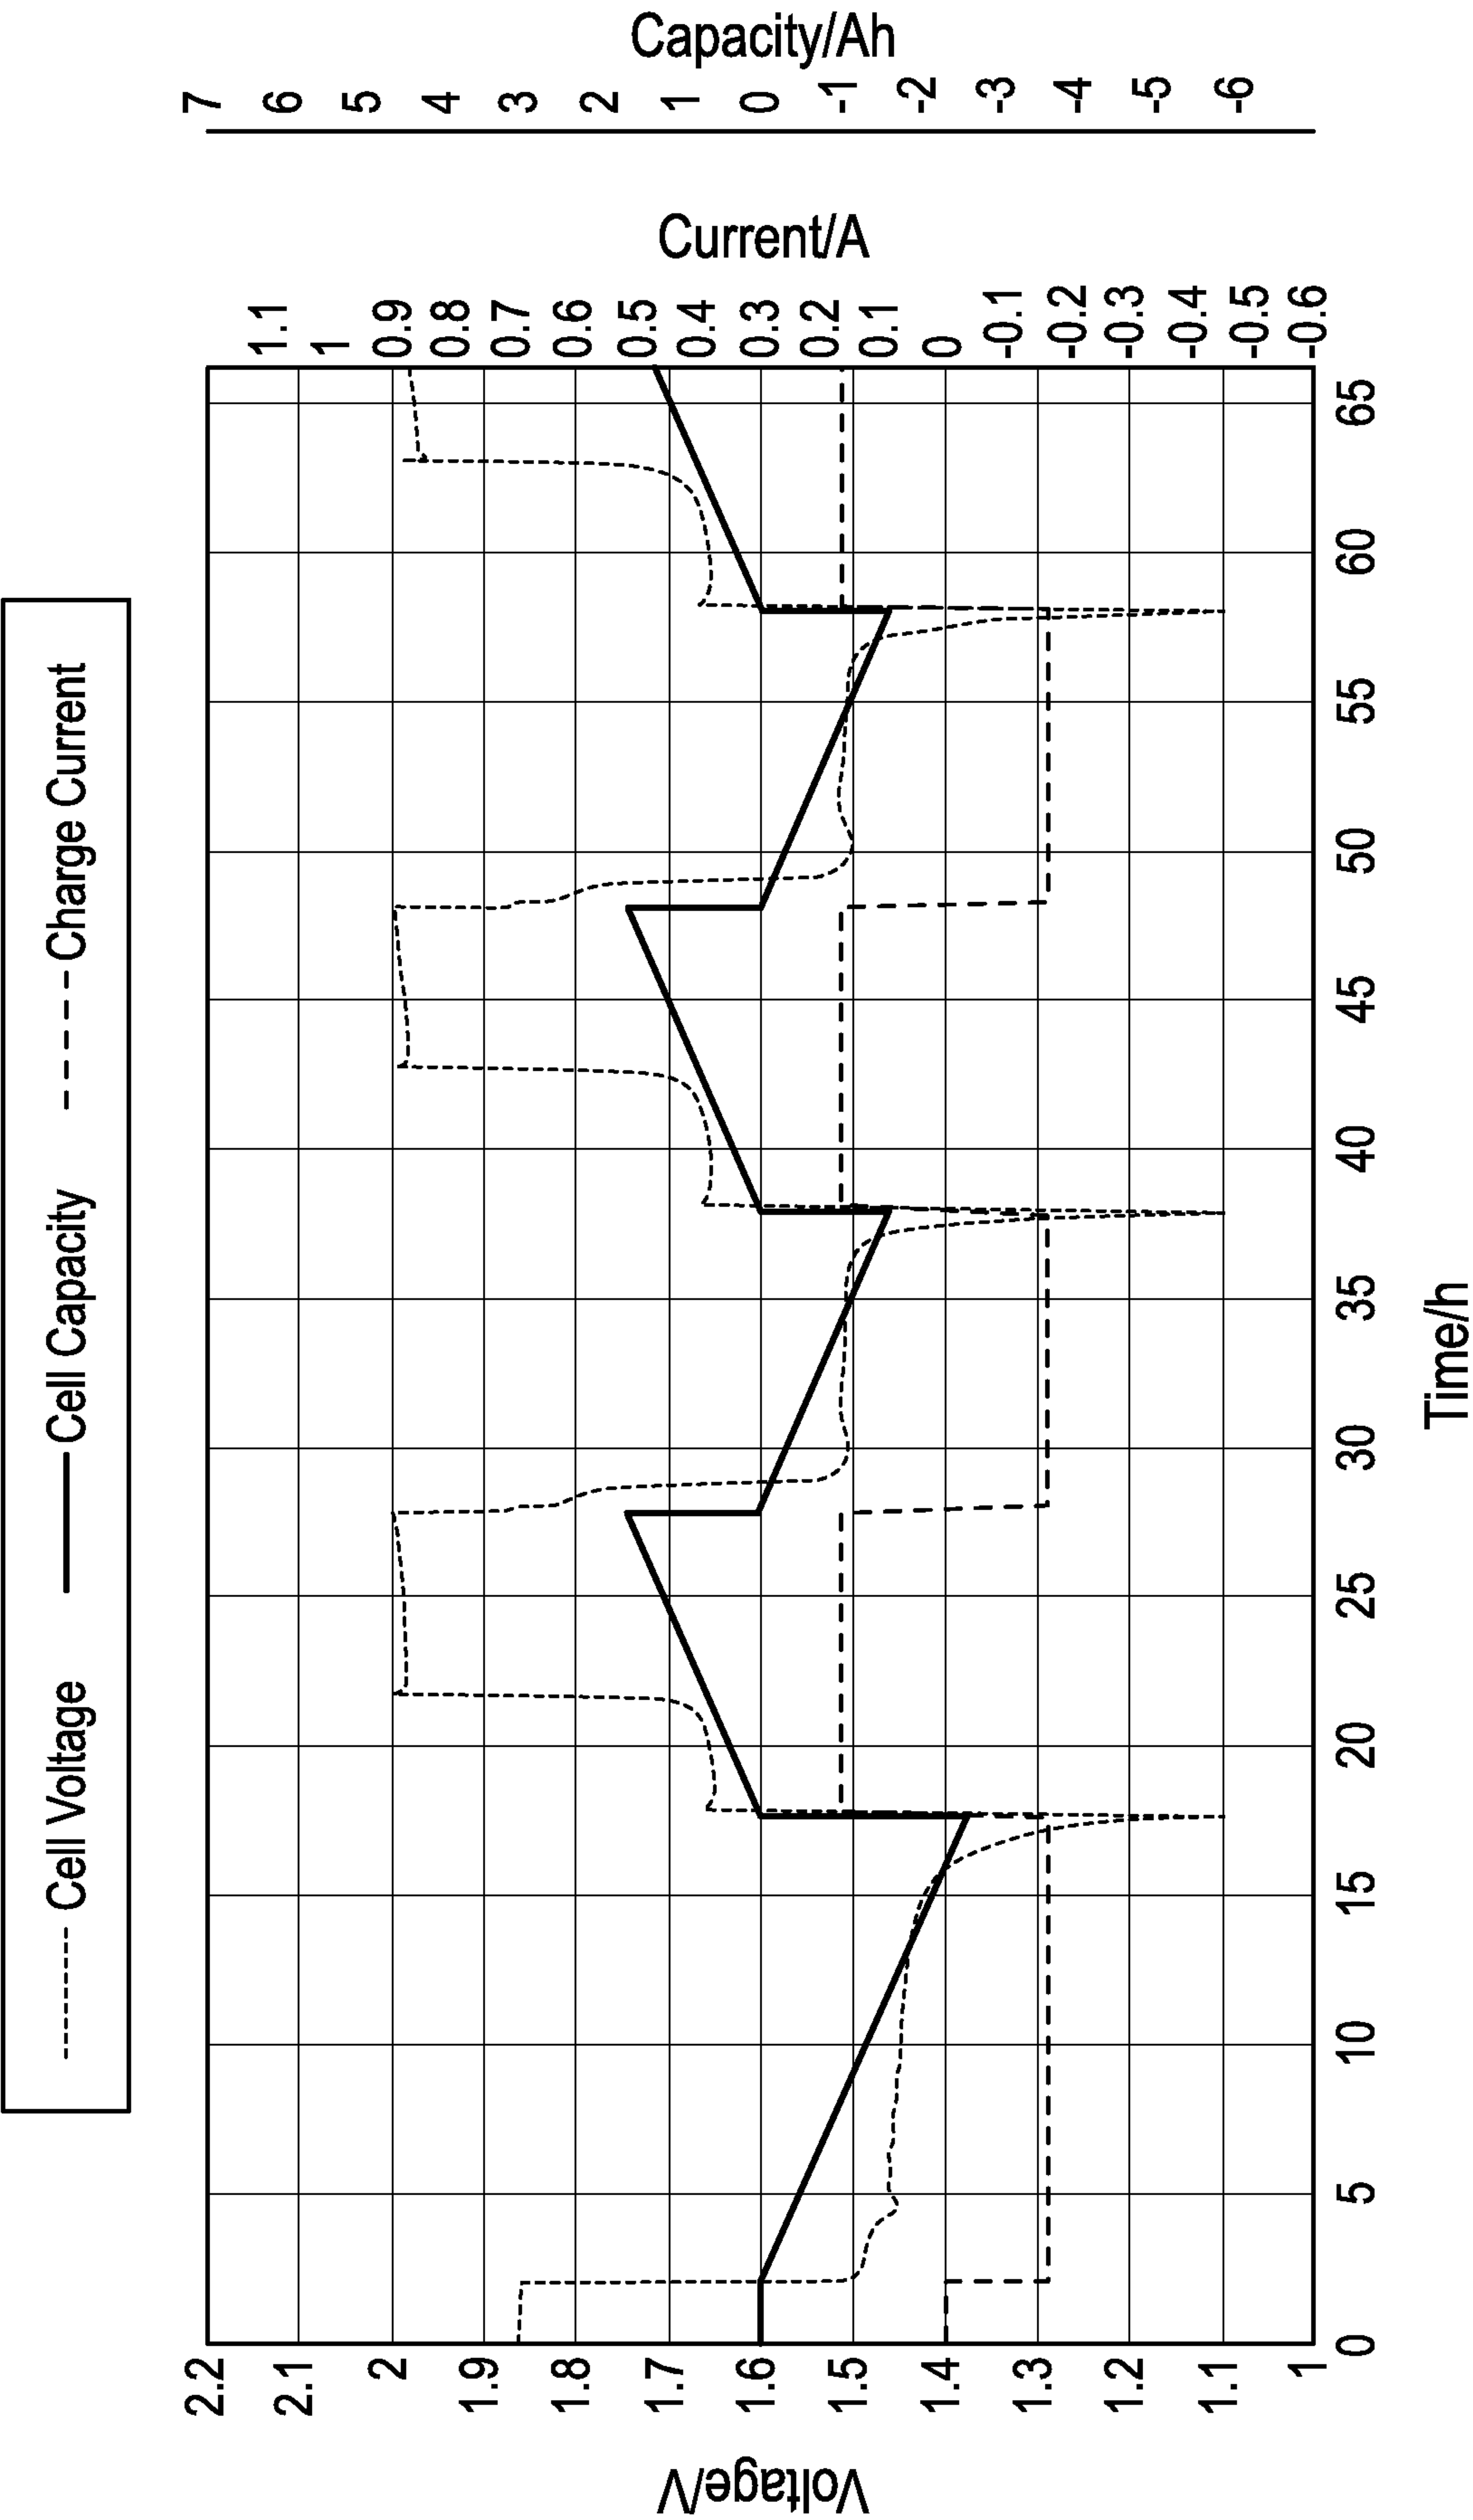


FIG. 16

16/20

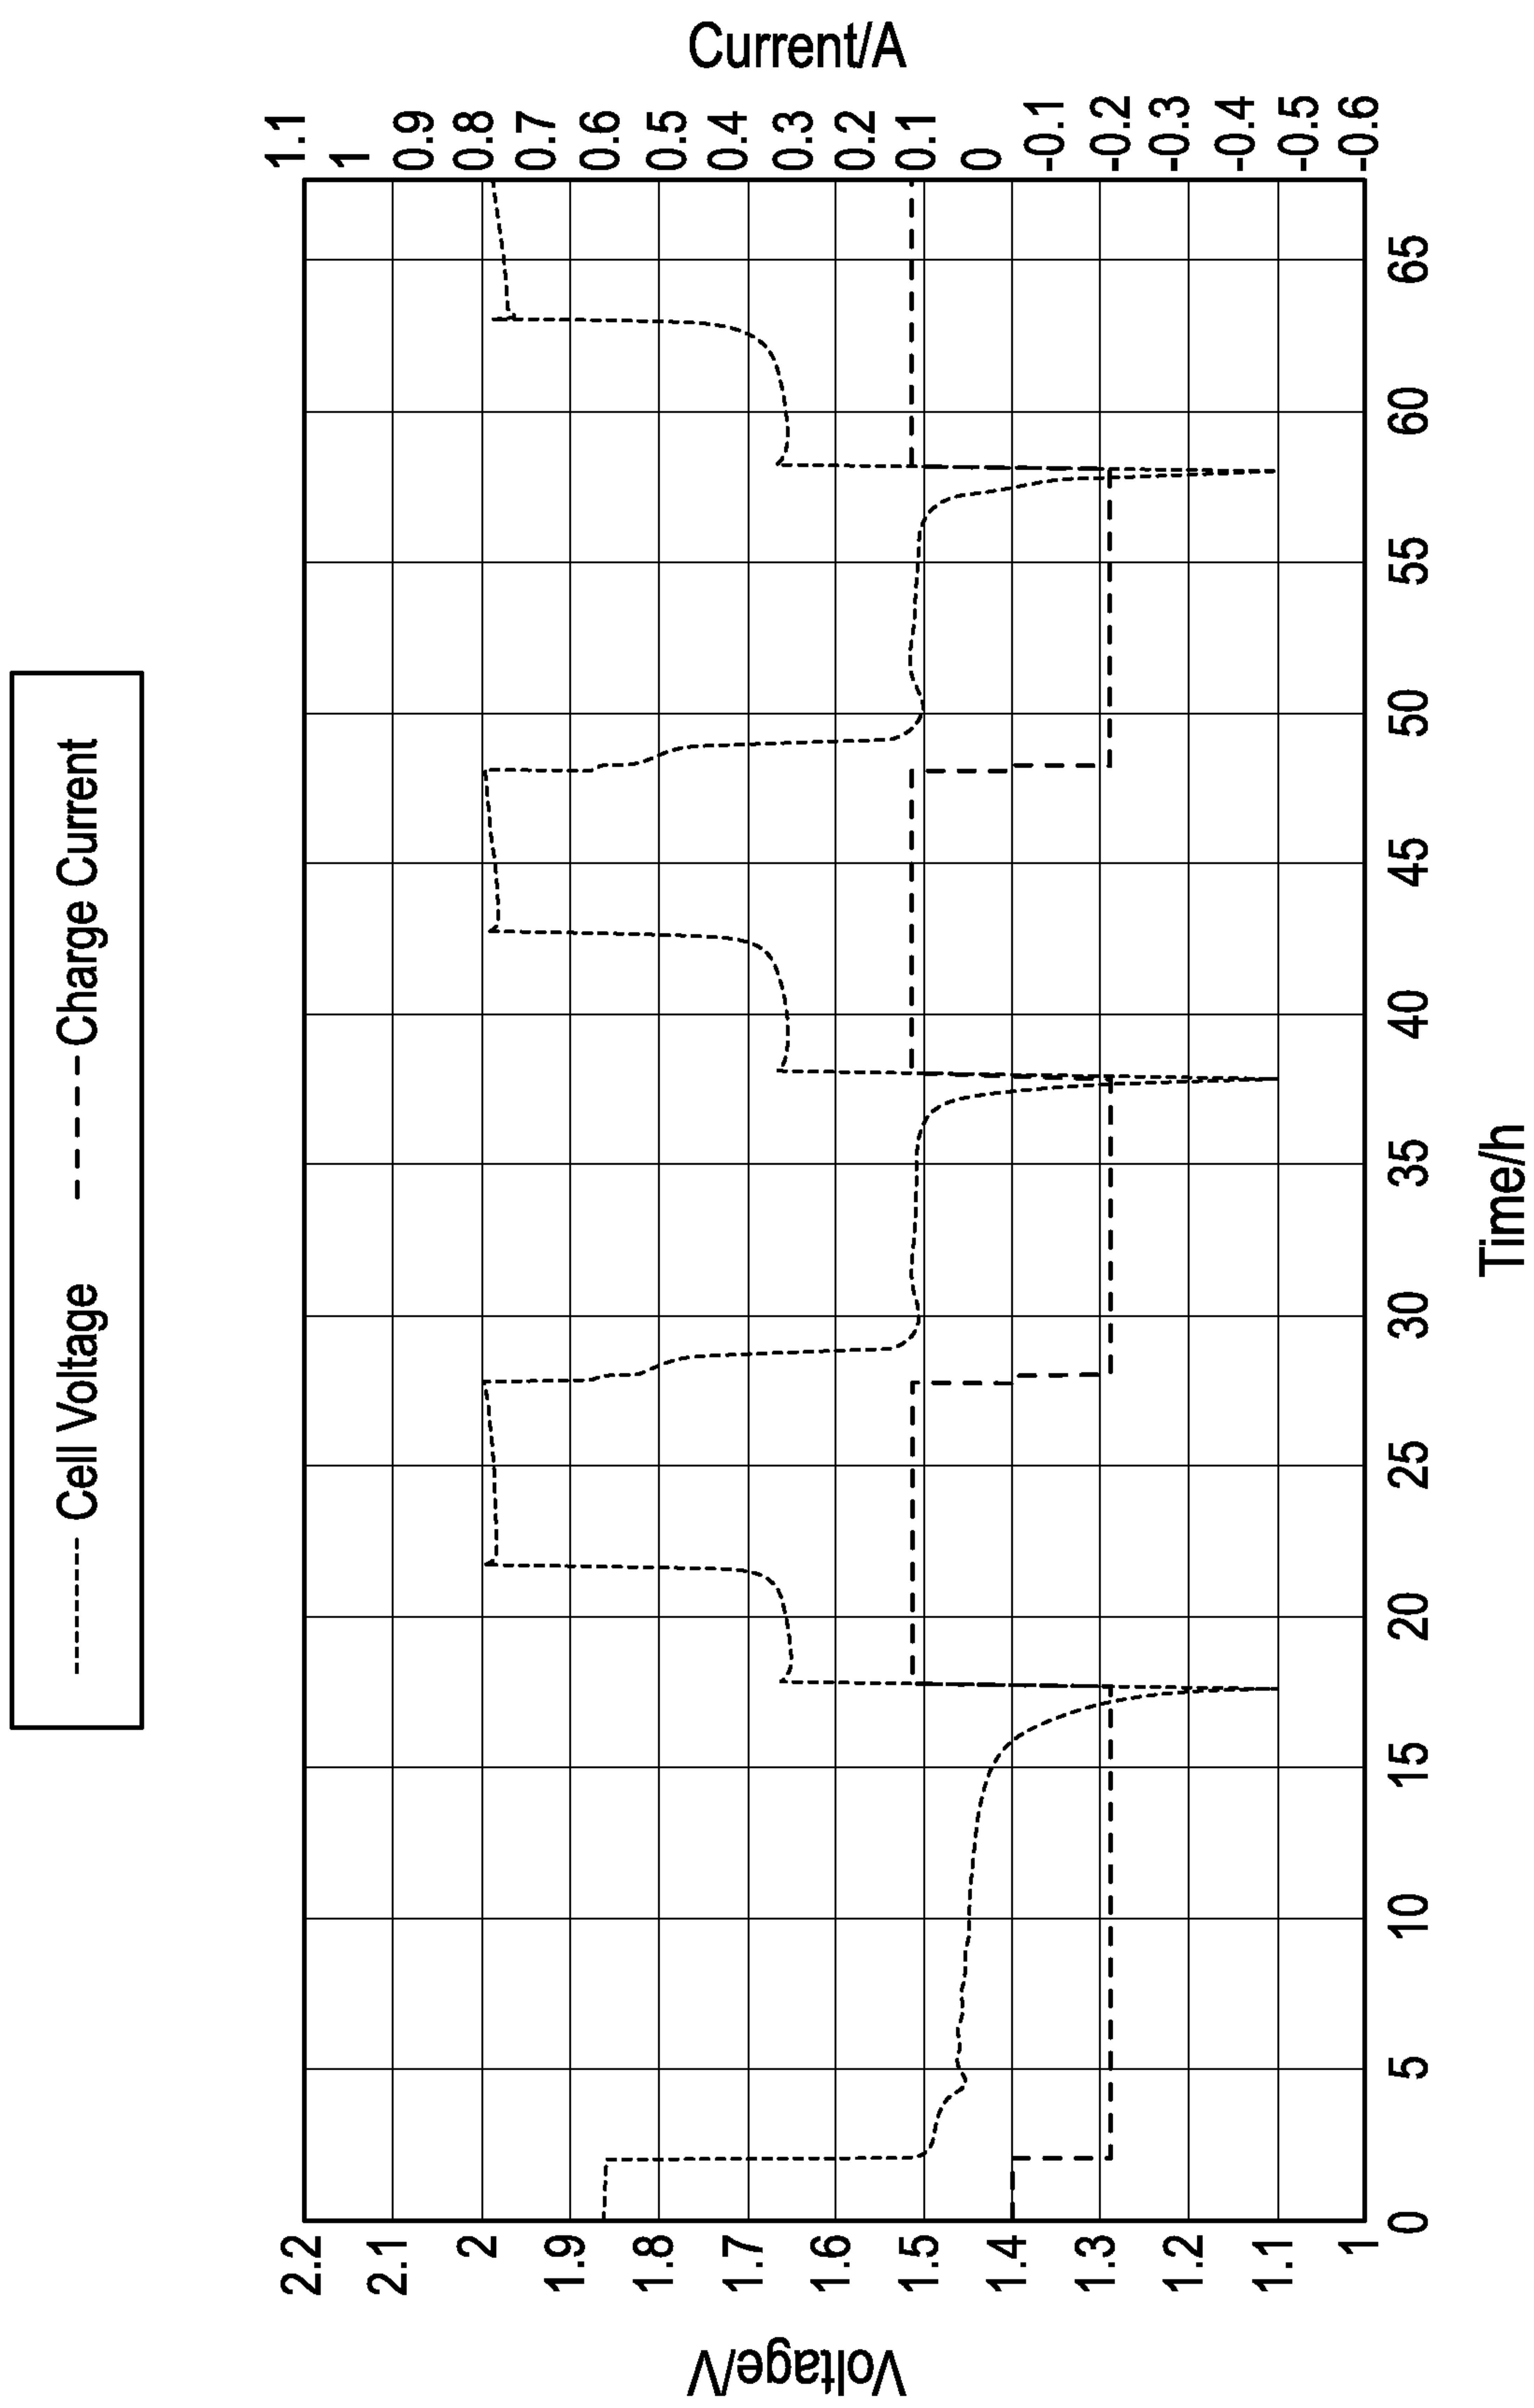


FIG. 17

Bar Chart - Separator Component Cassing Test
data taken October 2009







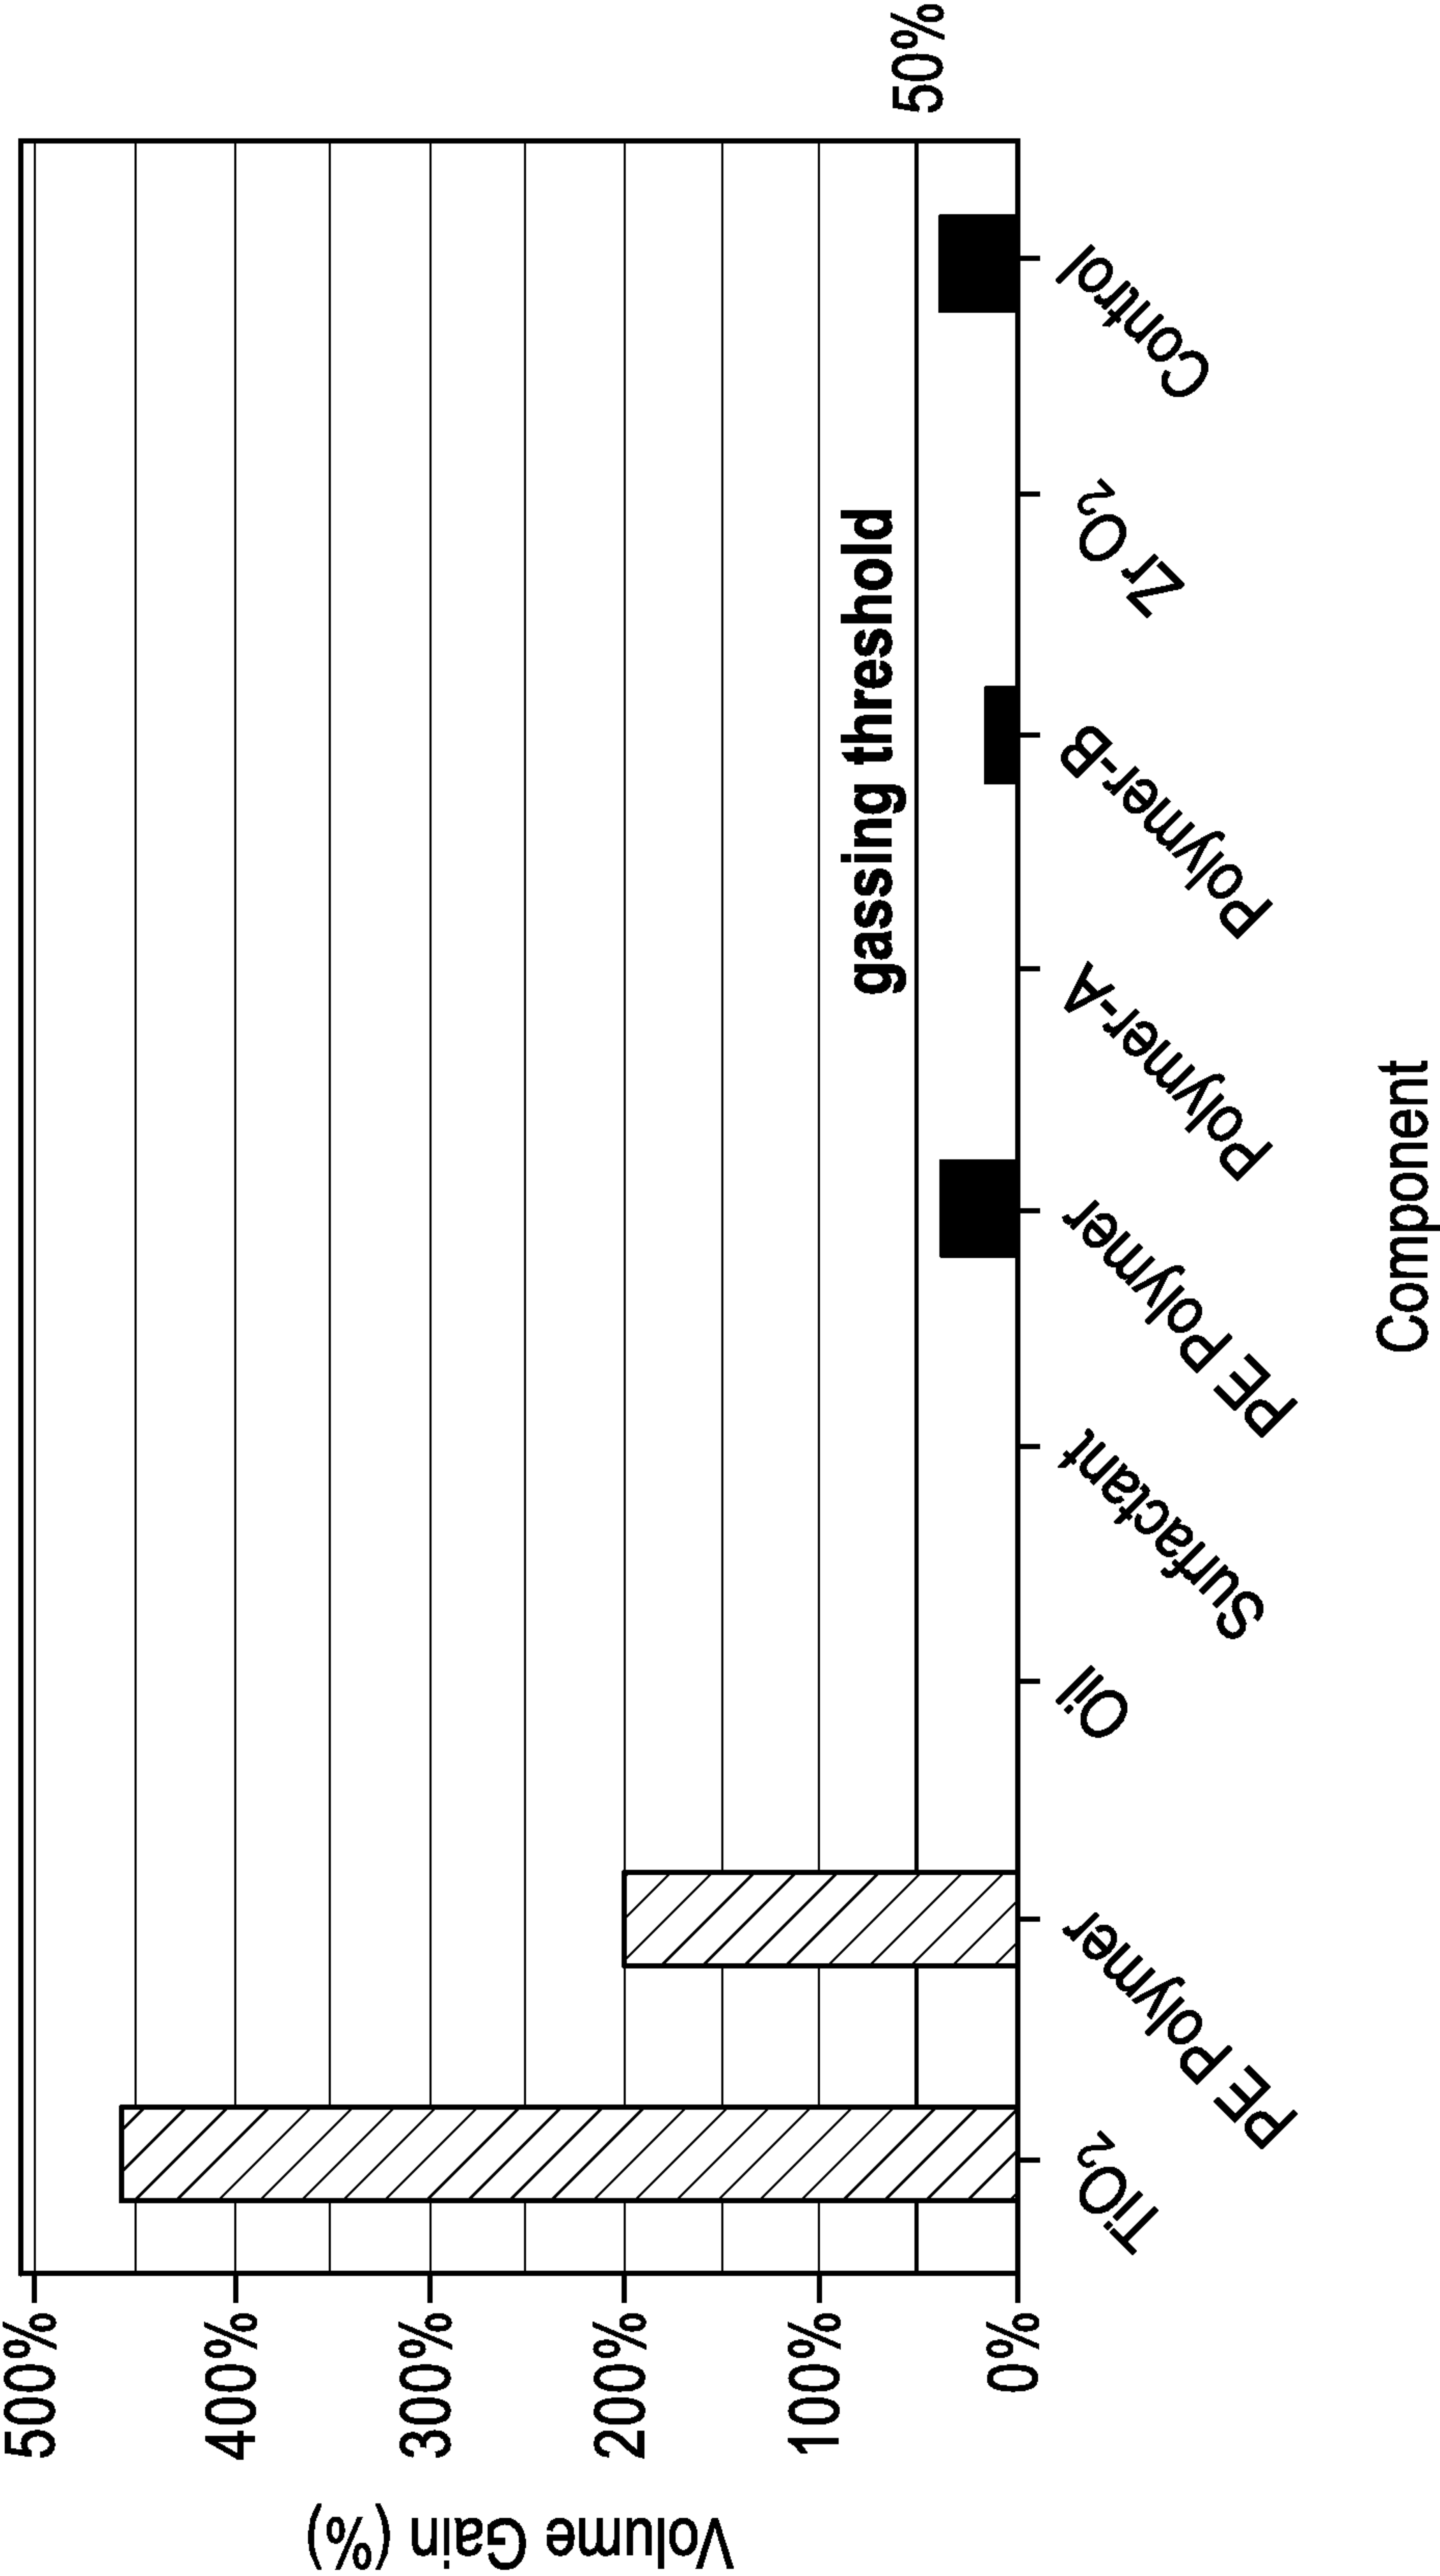


FIG. 18

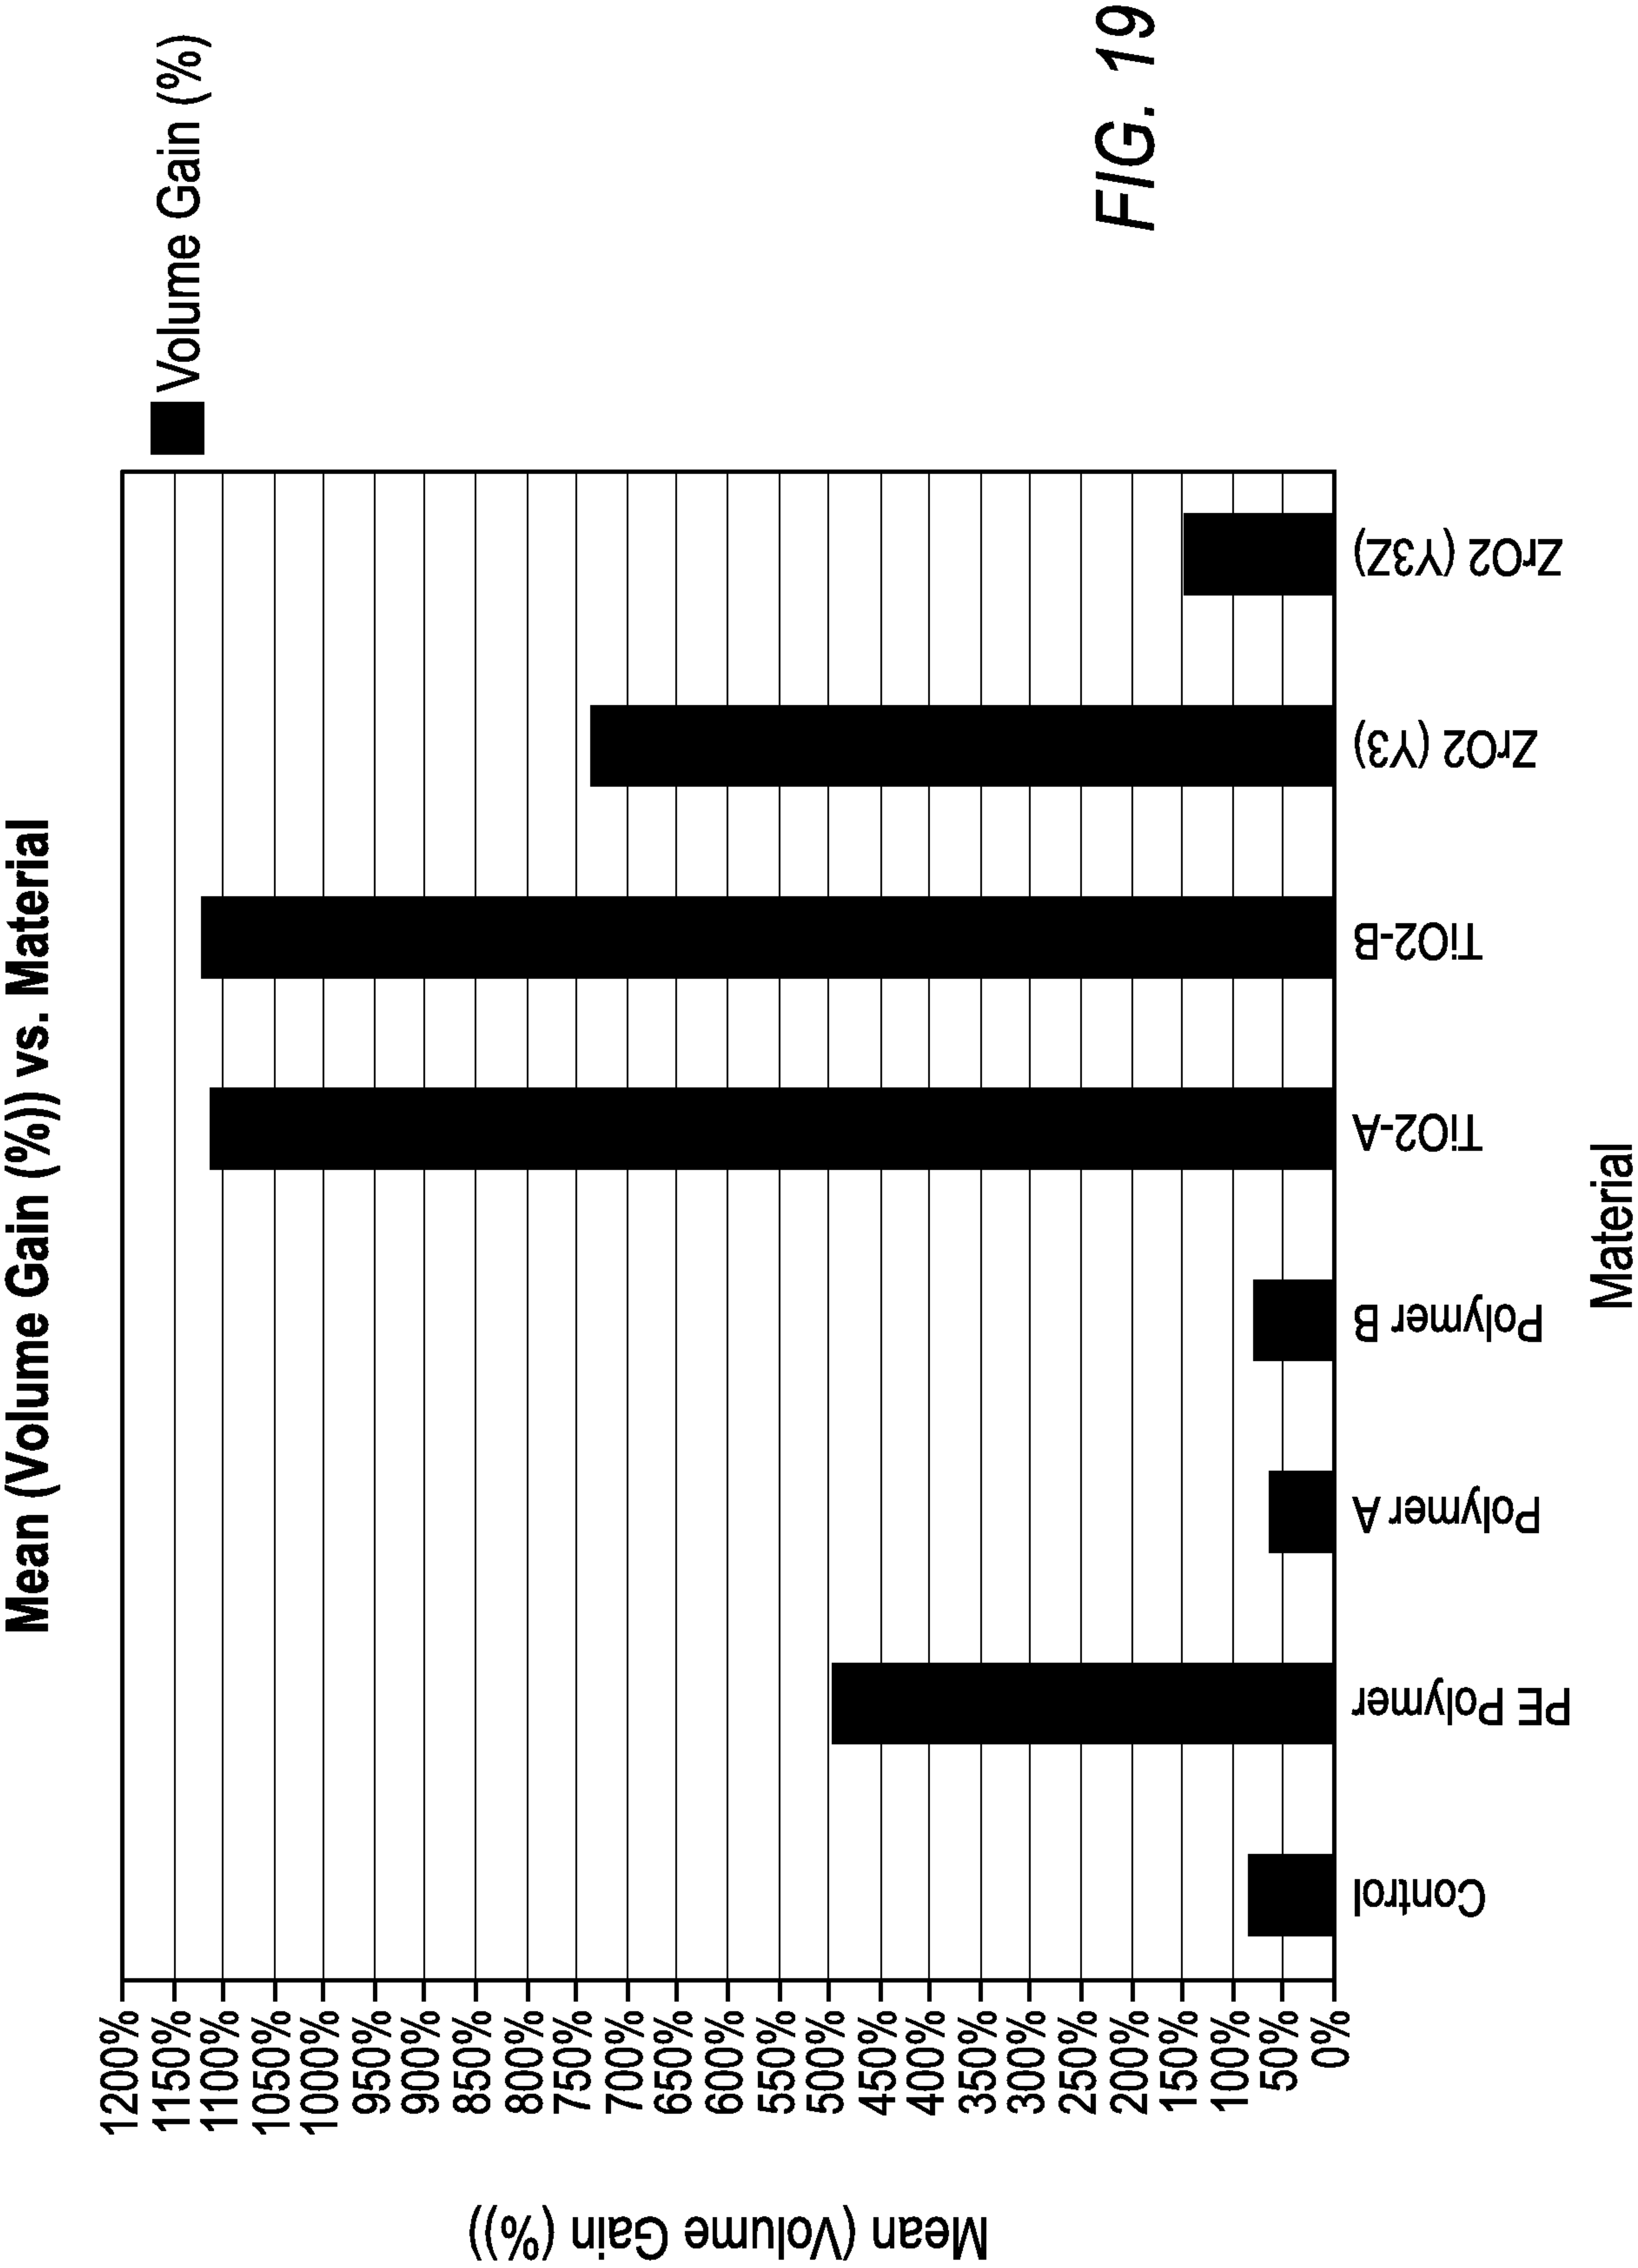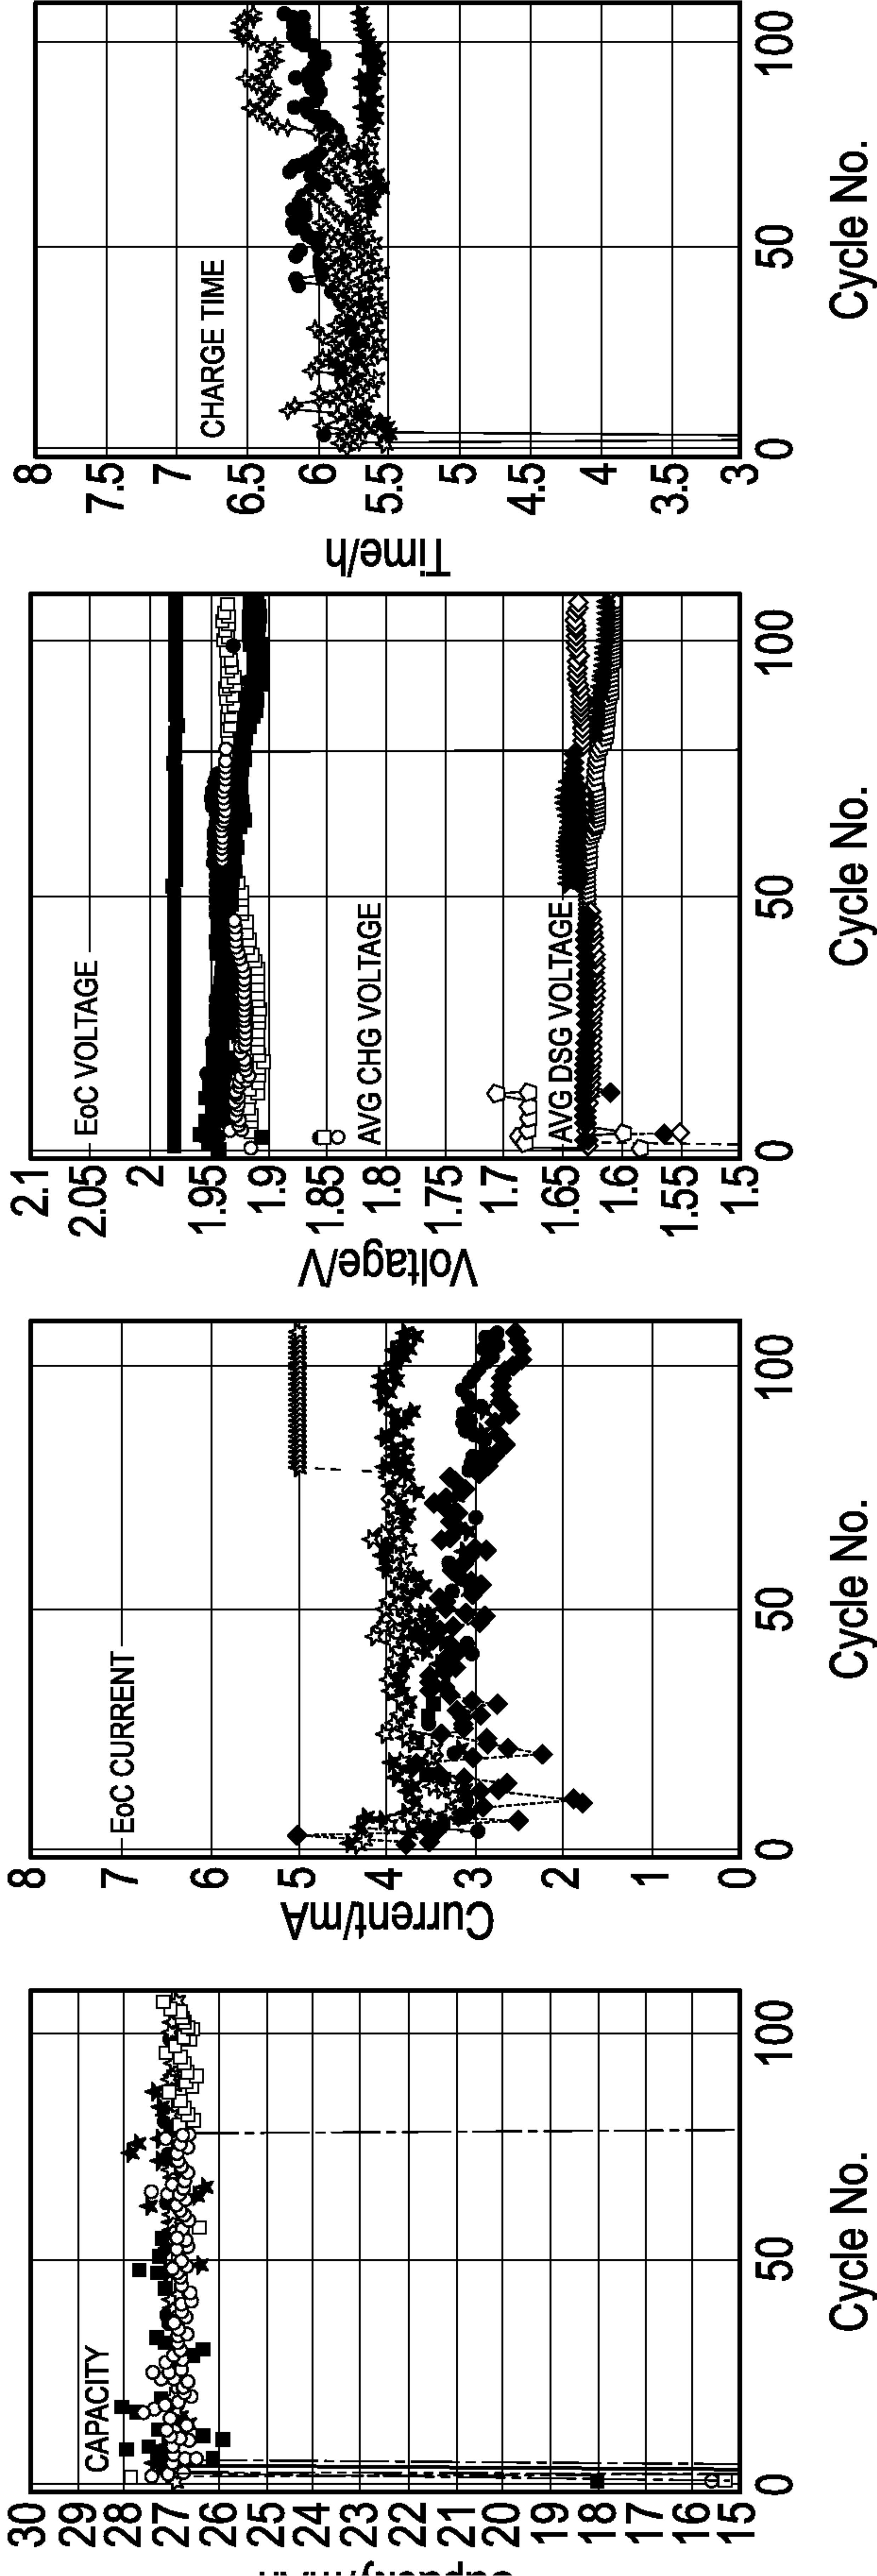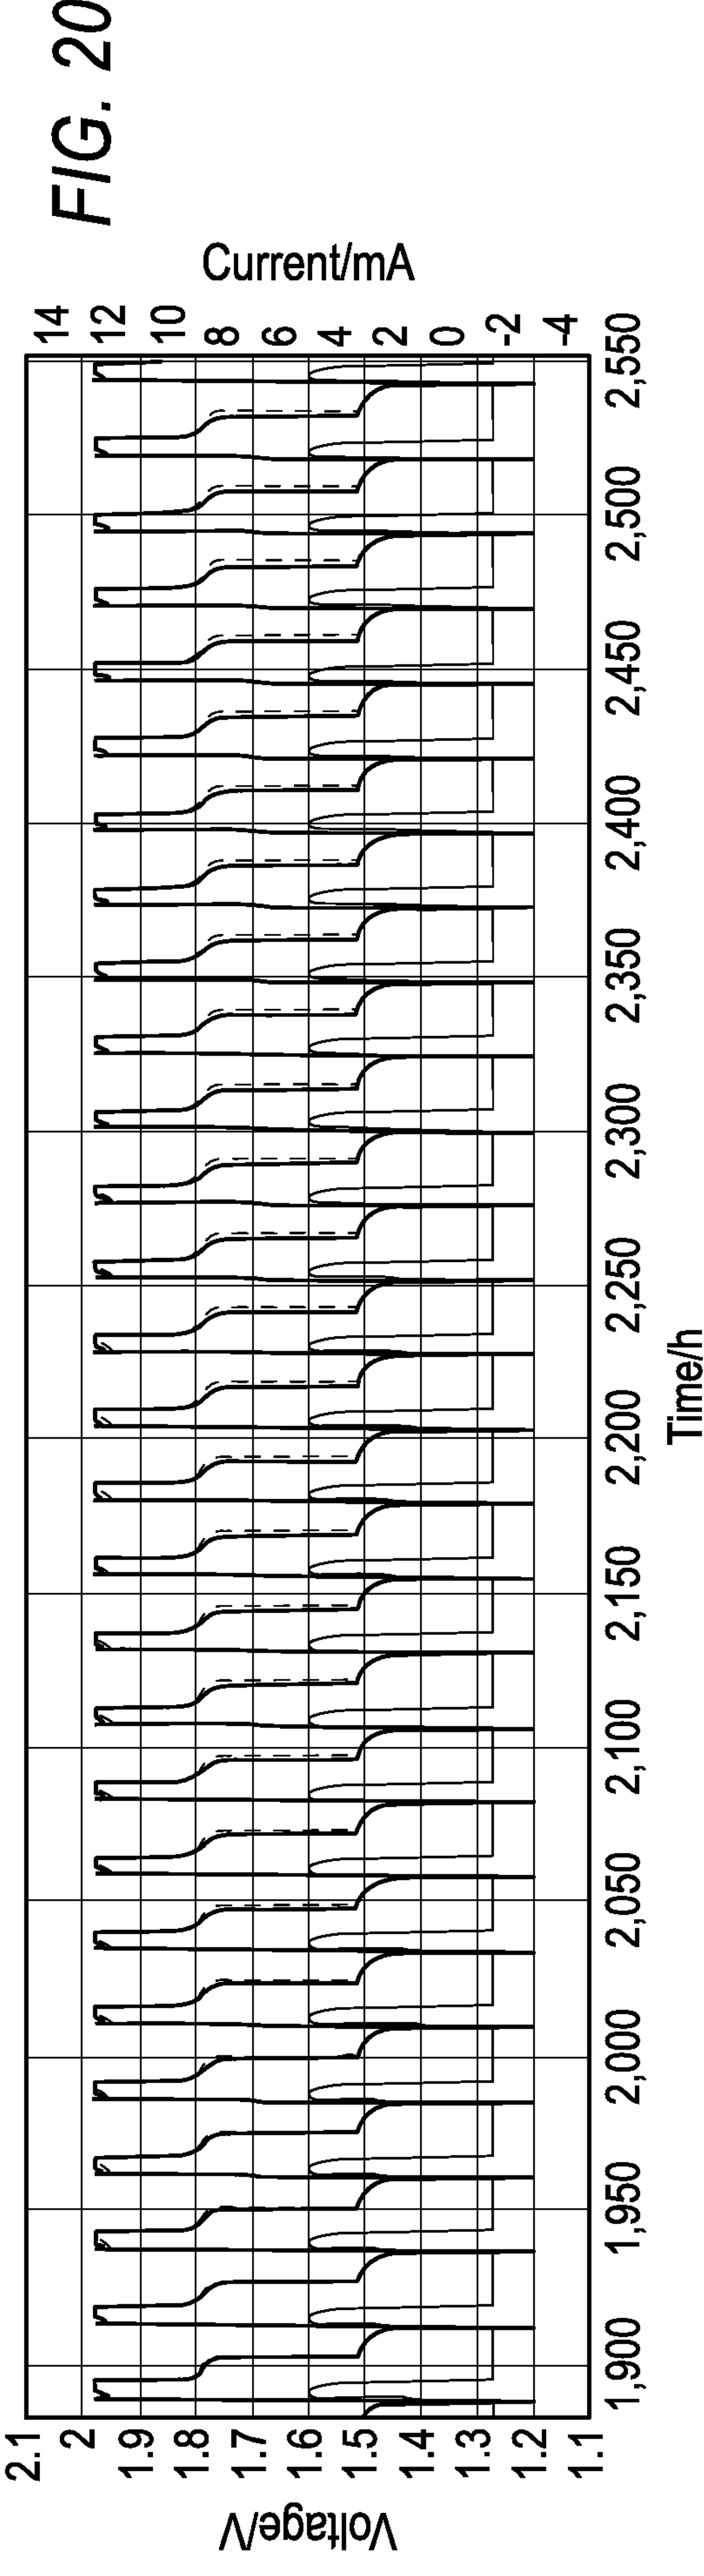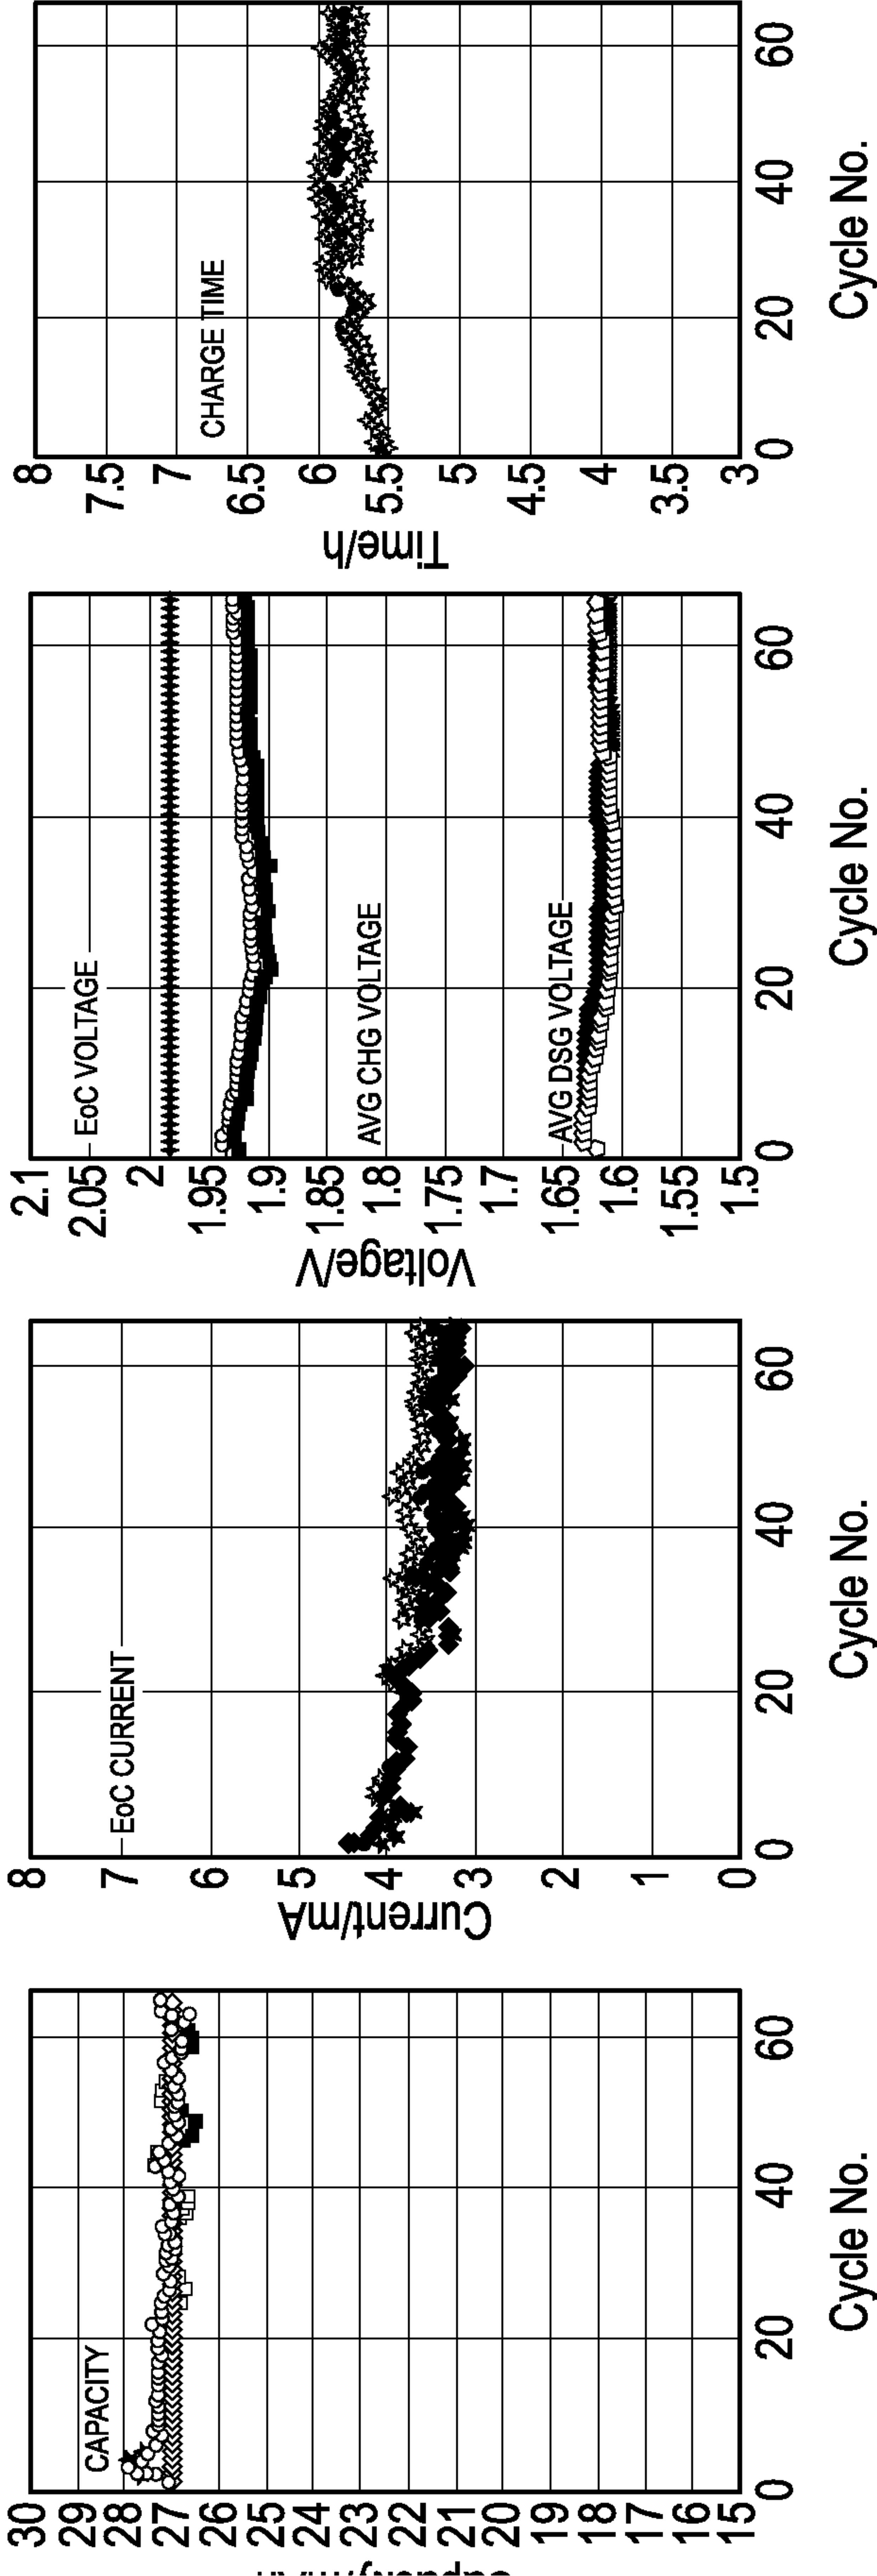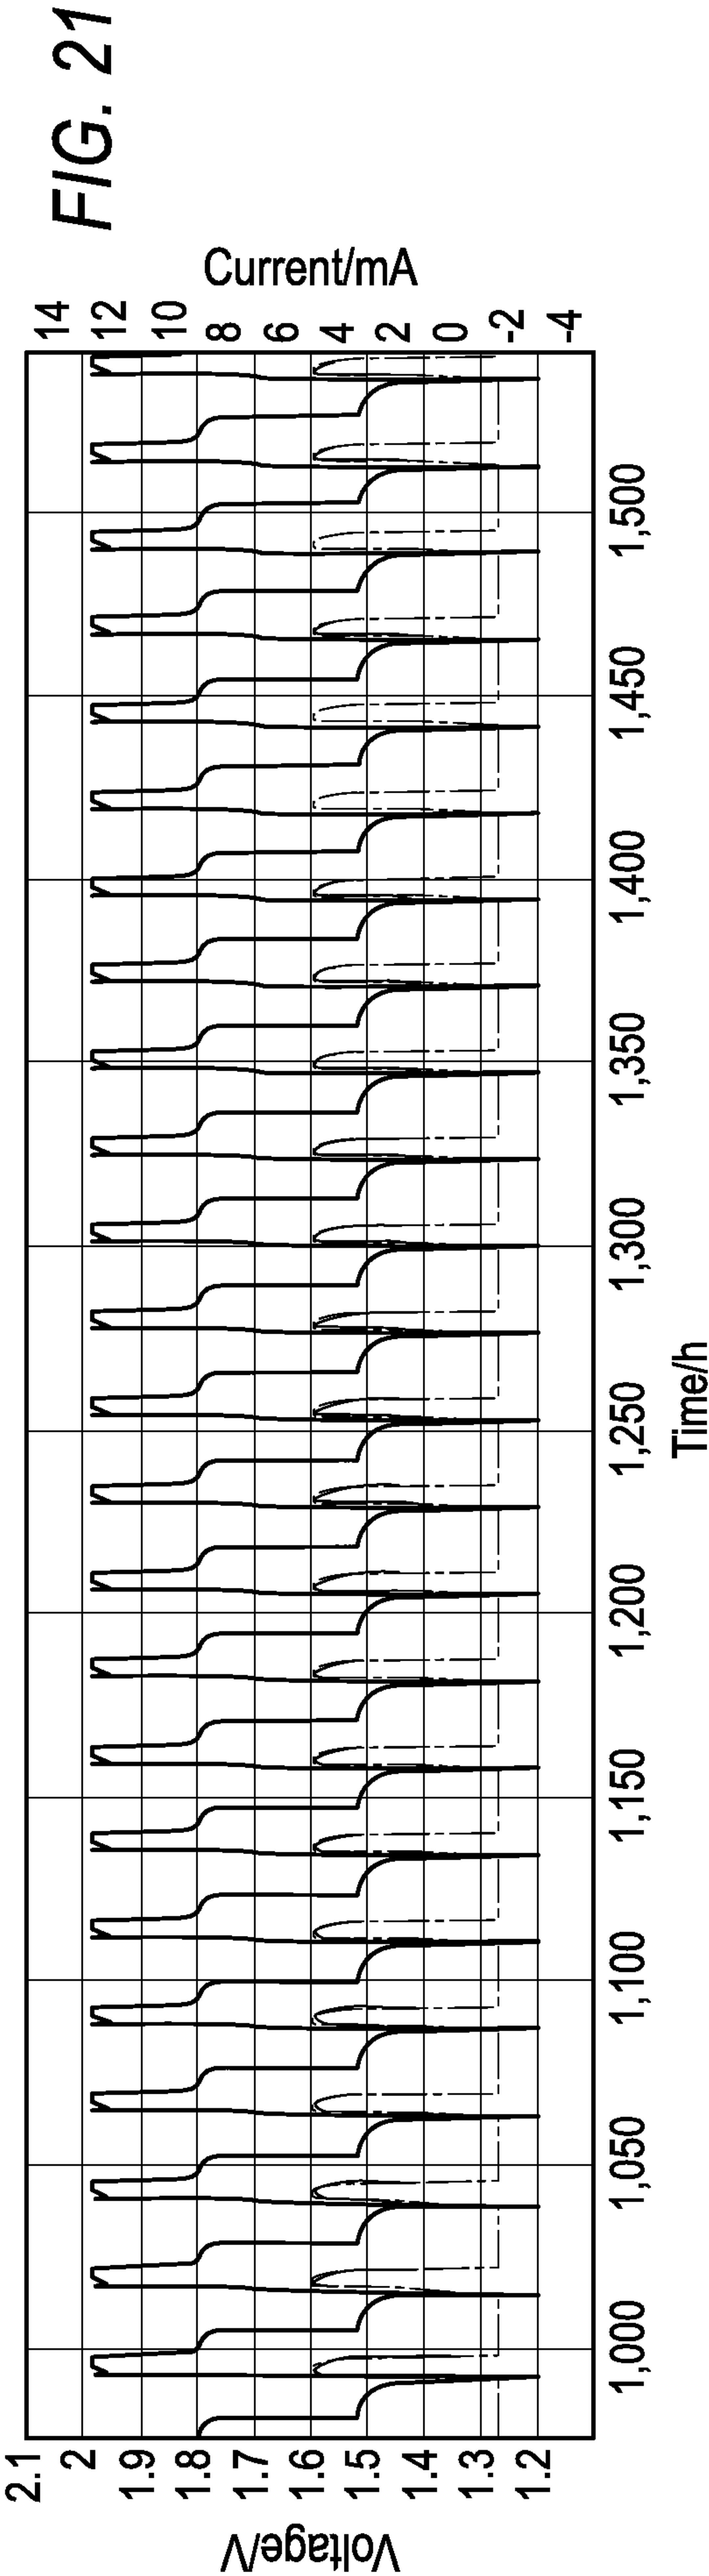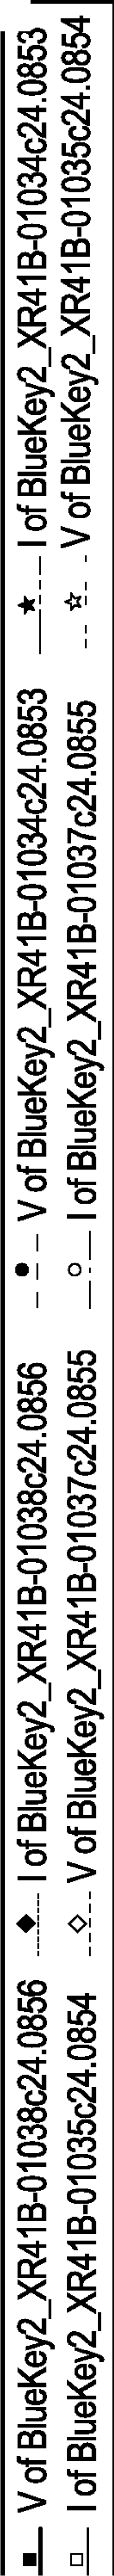

— V of BlueKey2_XR41A-00406c24.0340 ◆ I of BlueKey2_XR41A-00406c24.0340 • V of BlueKey2_XR41A-00406c24.0340 * I of BlueKey2_XR41A-00403c24.0337
— I of BlueKey2_XR41A-00404c24.0338 ◇ V of BlueKey2_XR41A-00405c24.0339 ○ I of BlueKey2_XR41A-00405c24.0339 ☆ V of BlueKey2_XR41A-00404c24.0338





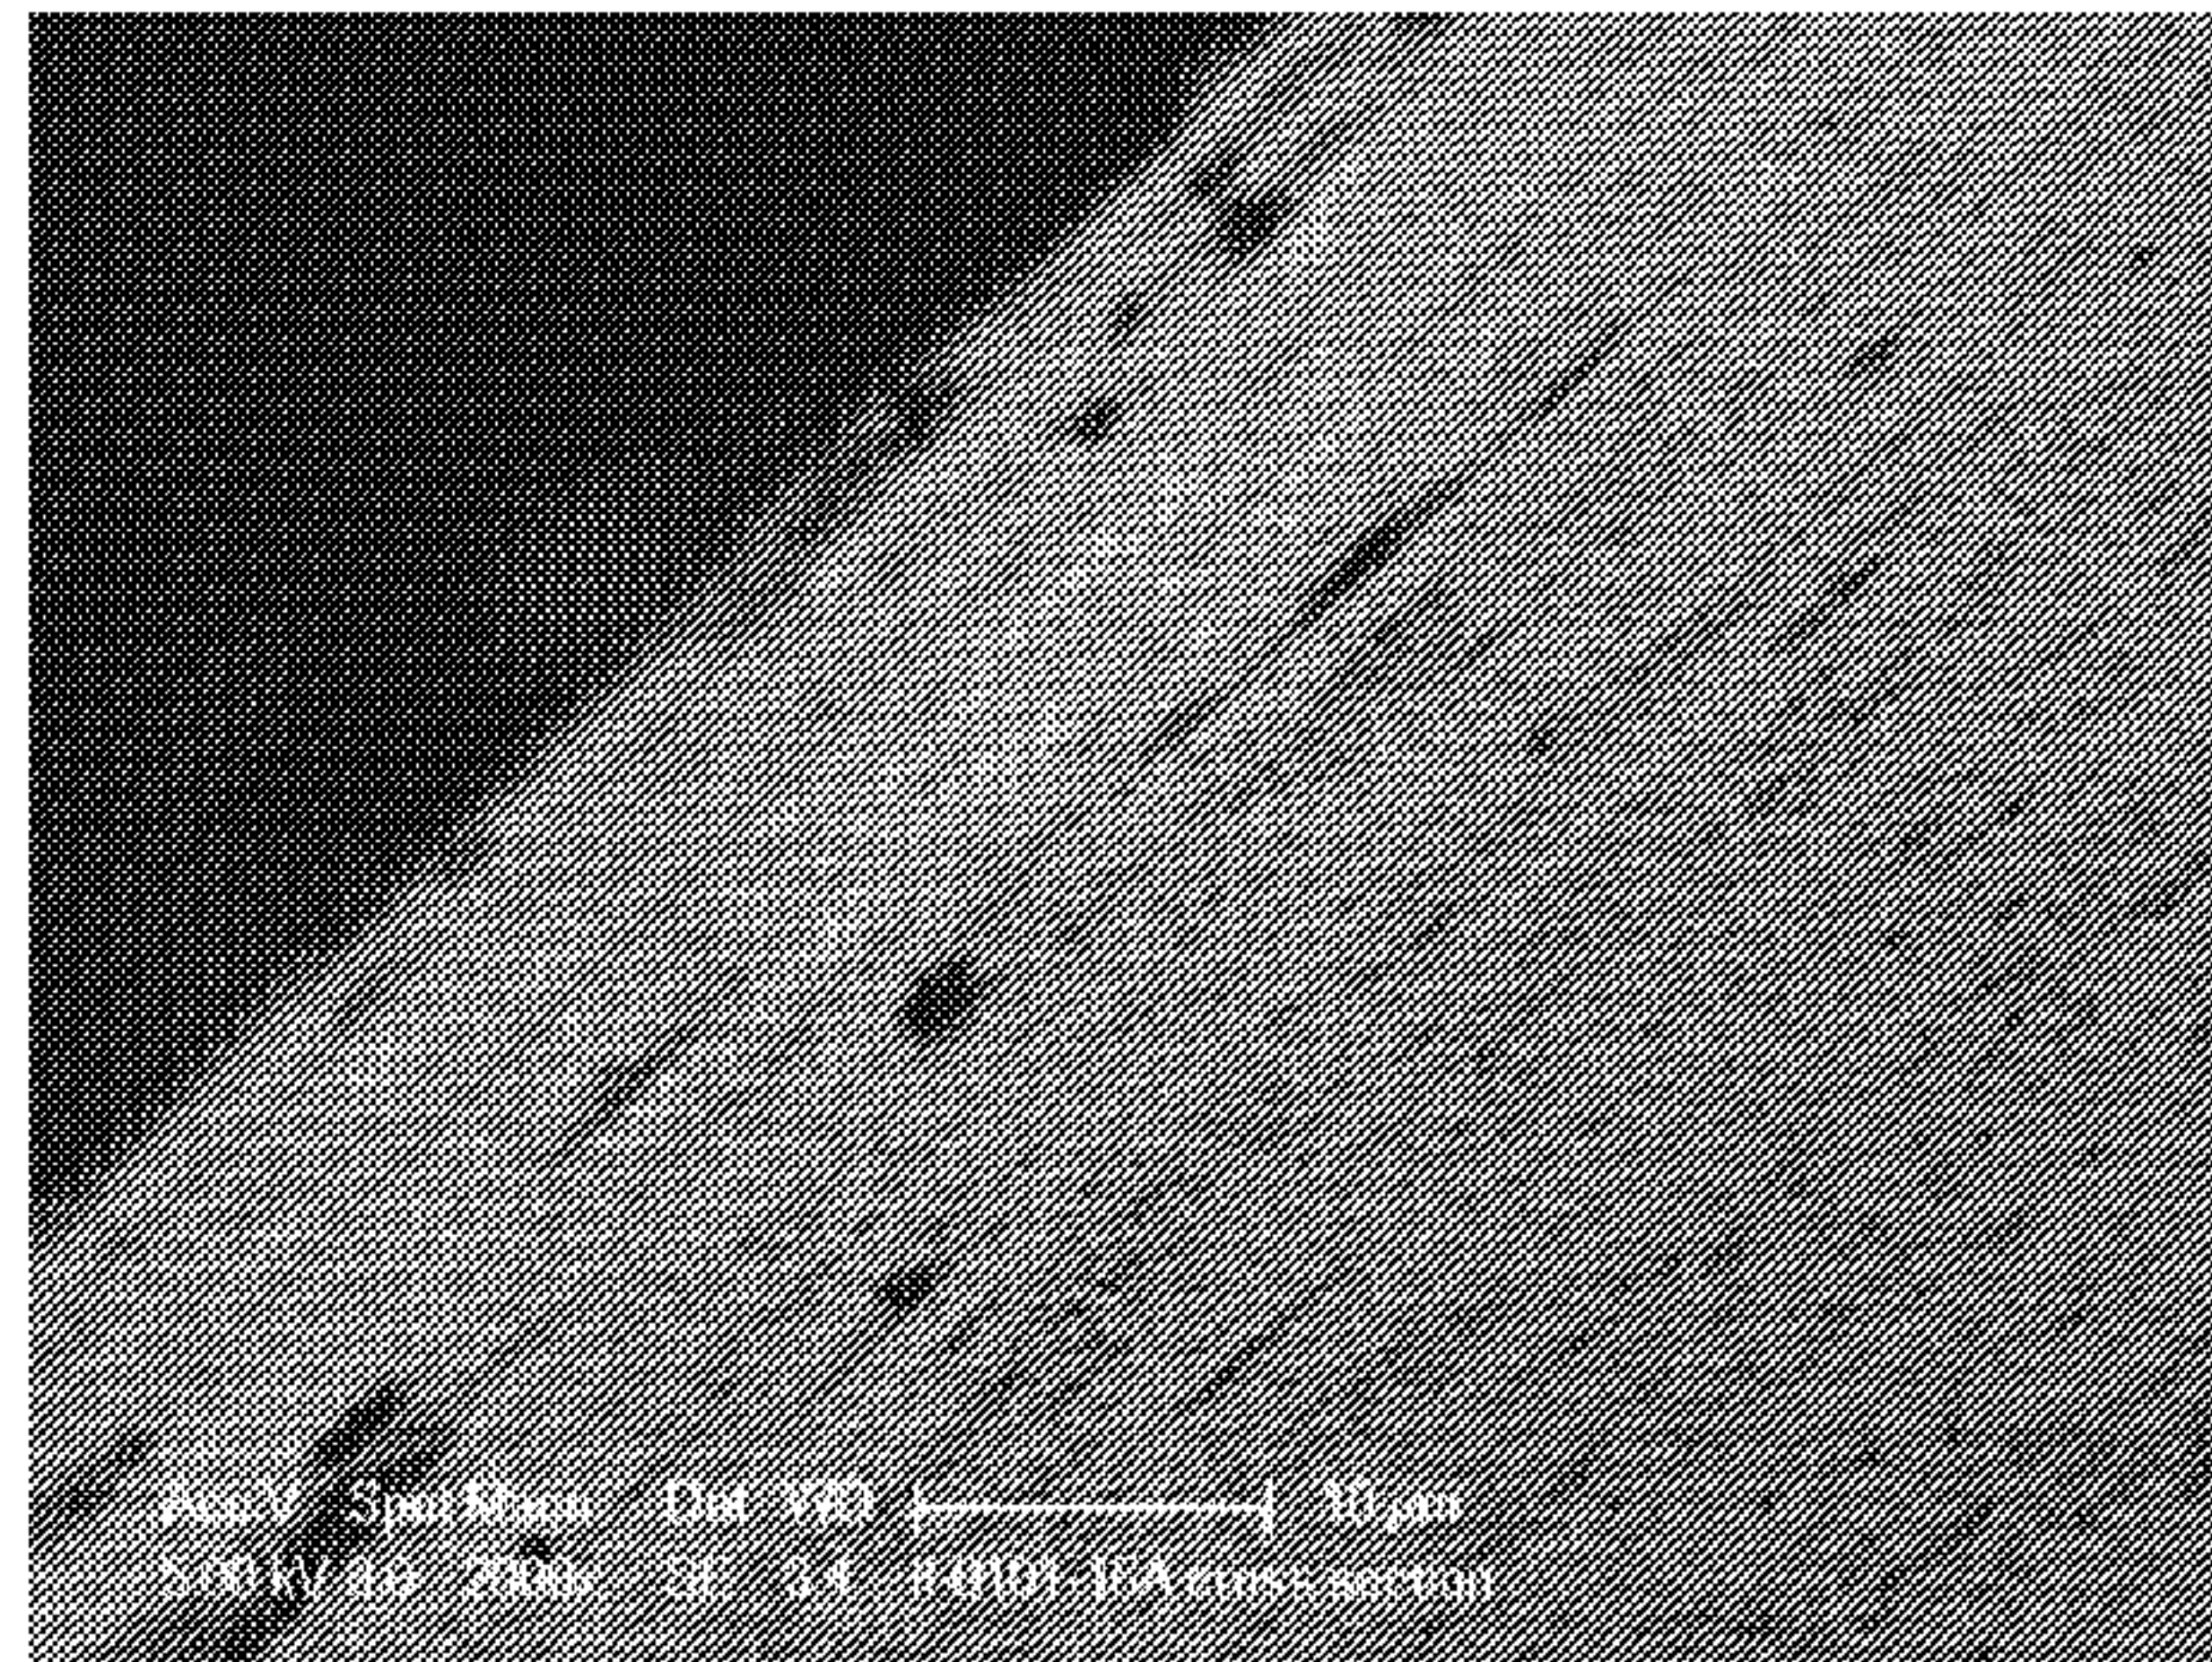
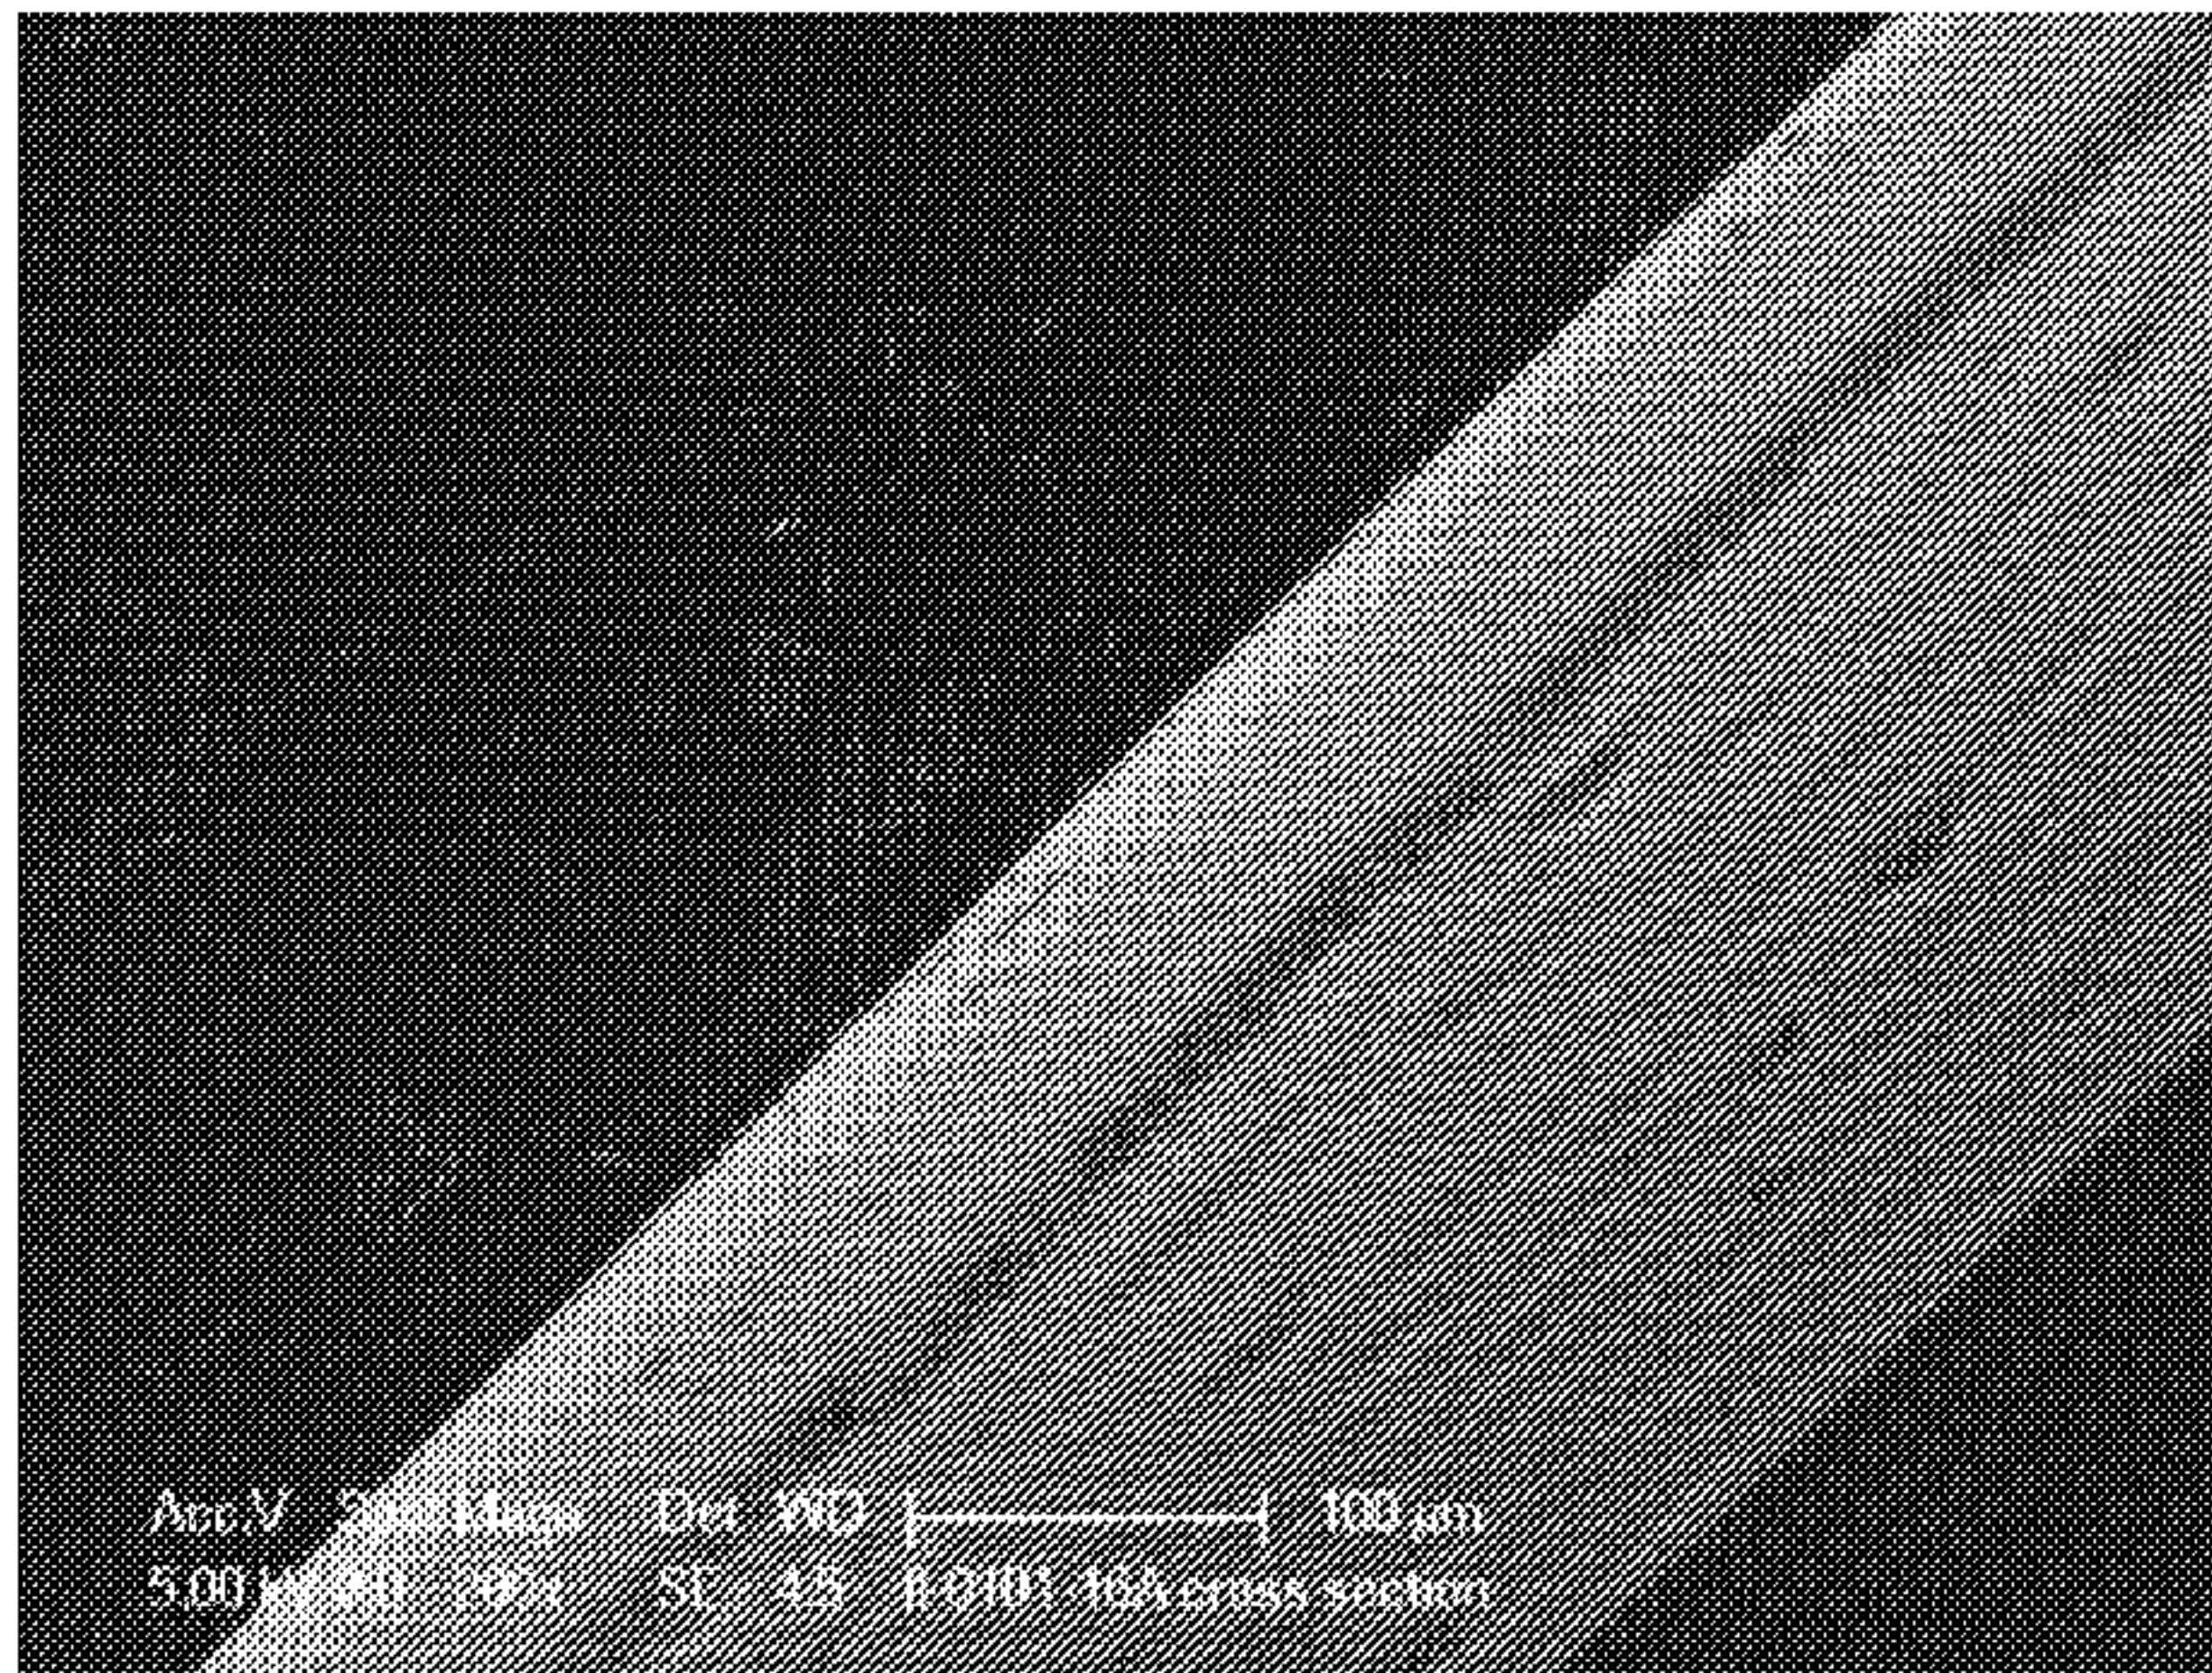


FIG. 3