

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 October 2005 (27.10.2005)

PCT

(10) International Publication Number  
**WO 2005/101091 A1**

(51) International Patent Classification<sup>7</sup>: **G02B 26/02**,  
H05K 9/00, H05F 3/02

(21) International Application Number:  
PCT/IB2005/051228

(22) International Filing Date: 14 April 2005 (14.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0408479.4 16 April 2004 (16.04.2004) GB  
0409159.1 23 April 2004 (23.04.2004) GB

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KUIPER, Stein** [NL/NL]; c/o Philips Intellectual Property & Standards, Cross Oak Lane, Redhill Surrey RH1 5HA (GB).  
**HENDRIKS, Bernardus, H., W.** [NL/NL]; c/o Philips Intellectual Property & Standards, Cross Oak Lane, Redhill Surrey RH1 5HA (GB).

(74) Agent: **WILLIAMSON, Paul, L.**; c/o Philips Intellectual Property & Standards, Cross Oak Lane, Redhill, Surrey RH1 5HA (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

#### Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIQUID-BASED OPTICAL DEVICE AND ELECTRONIC DEVICE

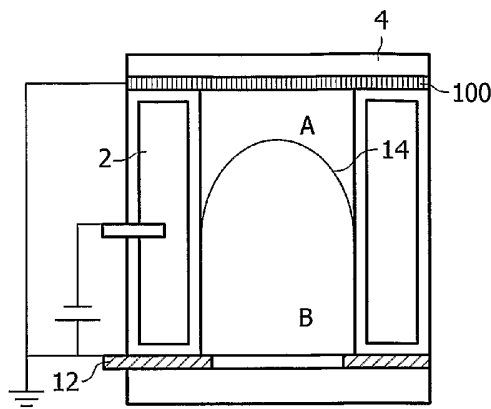

(57) Abstract: The present invention discloses an optical device comprising a container enclosing an insulating liquid (A) and a liquid responsive to an electric field (B), the insulating liquid (A) and the liquid responsive to an electric field (B) being immiscible and being in contact with each other via an interface (14), at least one of the liquids (A; B) being at least partially placed in a light path through the container. The optical device further comprises an electrode arrangement (2; 12) for controlling the shape of the interface (14) by means of a voltage; and means (100) for preventing the interface from an exposure to an external electric field. Consequently, the build-up of electrostatic charge on a surface of the optical device is avoided, which prevents the unwanted distortion of the interface (14) caused by the interaction of the liquid responsive to an electric field (B) and the electrostatic charge.

## DESCRIPTION

**LIQUID-BASED OPTICAL DEVICE AND ELECTRONIC DEVICE**

5

The present invention relates to an optical device comprising a container enclosing an insulating liquid and a liquid responsive to an electric field, the insulating liquid and the liquid responsive to an electric field being immiscible and being in contact with each other via an interface, the liquids  
10 being placed in a light path through the container; an electrode arrangement for controlling the shape of the interface by means of a voltage.

The present invention further relates to an electronic device comprising such an optical device.

15 Optical devices based on the manipulation of liquids are rapidly gaining large commercial interest, not in the least because of their lack of mechanically moving parts and the relative simplicity of the devices, which makes the devices cheap and durable.

For instance, in US patent application US2001/0017985 an optical  
20 device is disclosed that incorporates two immiscible liquids with equal refractive indices but different transmittances, with one of the two liquids being conductive. By varying the interface between these two liquids, the amount of each of the liquids in the light path through the device is changed and a diaphragm is obtained as a result.

25 International patent application WO03/069380 discloses a cylindrical variable focus lens incorporating two immiscible fluids having different refractive indices, one of the fluids being conductive and the other being insulating. The shape of the interface between the two fluids is manipulated by applying a voltage across the lens, which can be used to introduce a change in  
30 the focal point of the lens. The walls of the cylinder and one of the transparent lids of the cylinder are coated with a hydrophobic coating to ensure that at least in a switched off state the conductive fluid, which typically is a polar

liquid, the contact area between said walls and the conductive fluid is minimized in order to achieve an interface with a large curvature, which contributes to a large optical power range for the lens.

5 A problem that can occur with such devices is that after a period of time an unintended deformation of the interface can occur, which disturbs the desired optical behaviour of the interface.

The invention seeks to provide an optical device in which the unintended deformation of the interface is avoided.

10 The invention further seeks to provide an electronic device comprising such an improved optical device.

According to an aspect of the invention, there is provided an optical device comprising a container enclosing an insulating liquid and a liquid responsive to an electric field, the insulating liquid and the liquid responsive to an electric field being immiscible and being in contact with each other via an interface, at least one of the liquids being at least partially placed in a light path through the container; means for controlling an orientation of the interface; and means for preventing the interface from an exposure to an external electric field.

20 In the context of the present invention, the phrase 'a liquid responsive to an electric field' is intended to include conductive liquids, polar liquids and polarizable liquids.

The invention is based on the realization that the unintended deformation of the interface is caused by its exposure to an external electric field, which may be a static field caused by the build-up of an electrostatic charge on a surface of the container. The build-up of the electrostatic charge may for instance be caused by intentional or unintentional rubbing of the surface of the container.

30 The means for controlling an orientation of the interface may comprise an electrode arrangement for controlling the shape of the interface by means of a voltage. This is especially advantageous in the case of the optical device

being a variable focus lens, because this facilitates a lens with a large optical power.

In an embodiment, the surface is a part of a transparent end portion of the container, the means for preventing the interface from an exposure to an external electric field comprise a conductive layer, the conductive layer forming a part of the transparent end portion. This has the advantage that the accumulation of electrostatic charge on the transparent end portion can be avoided.

Advantageously, the electrode arrangement comprises an electrode in contact with the liquid responsive to an electric field, the conductive layer being conductively coupled to said electrode. In this embodiment, the conductive layer is kept at the same potential as the liquid responsive to an electric field, thus ensuring that the presence of any electrostatic charge on the transparent end portion has no influence on the shape of the interface.

In a further embodiment, the means for preventing the interface from an exposure to an external electric field comprise a Faraday cage surrounding the container. This embodiment, which may be combined with the previous embodiment, protects the optical device from exposure to external electrical fields, and consequently prohibits the build-up of electrostatic charge on a surface of its container.

The Faraday cage may comprise a conductive coating at least partially covering a further container. This has the advantage that the Faraday cage can be produced separately from the optical device.

The further container may be at least partially transparent. This has the advantage that the further container can completely encapsulate the container of the optical device, without the optical path through the latter being compromised.

According to a further aspect of the invention, there is provided an electronic device including an optical device comprising a container enclosing an insulating liquid and a liquid responsive to an electric field, the insulating liquid and the liquid responsive to an electric field being immiscible and being in contact with each other via an interface, at least one of the liquids being at

least partially placed in a light path through the container; means for controlling an orientation of the interface; and means for preventing the interface from an exposure to an external electric field; the electronic device further comprising driver circuitry coupled to the means for controlling an orientation of the interface and a power supply for powering the driver circuitry, the means for preventing the interface from an exposure to an external electric field being coupled to a terminal of the power supply.

The electronic device of the present invention has the advantage that the performance of its optical device is not hampered by external electric fields such as the accumulation of electrostatic charges on a surface of the container of the optical device.

In an embodiment, the means for preventing the interface from an exposure to an external electric field are coupled to a terminal of the power supply, preferably ground, to ensure that said means are kept on a same potential as the liquid responsive to an electric field.

In an alternative embodiment, the means for preventing the interface from an exposure to an external electric field form a part of an arrangement for shielding an electronic circuit of the electronic device from external radiation. This has the advantage that the optical device can be protected from the build-up of electrostatic charge by extending an arrangement already present in the electronic device, which is cost-effective.

The invention is described in more detail and by way of non-limiting examples with reference to the accompanying drawings, wherein:

25

Fig. 1 schematically depicts a prior art variable focus lens;

Fig. 2 schematically depicts an optical device according to the present invention;

Fig. 3 schematically depicts another optical device according to the present invention;

Fig. 4 schematically depicts an electronic device according to the present invention; and

Fig. 5 schematically depicts another electronic device according to the present invention.

It should be understood that the Figures are merely schematic and are not drawn to scale. It should also be understood that the same reference numerals are used throughout the Figures to indicate the same or similar parts.

In Fig. 1, a variable focus lens as disclosed in International Patent application WO 03/069380 is shown. The variable focus lens comprises a first fluid A and a second fluid B housed in a cylindrical chamber. The fluids are immiscible, have different refractive indices and preferably have the same density to avoid orientation-dependent gravitational effects on the orientation of the fluids including the interface 14 between the fluids. The cylindrical chamber further comprises a first end portion 4 and a second end portion 6, with the first end portion 4 as well as the inner walls of the cylindrical chamber being covered by a hydrophobic coating such as AF1600™ from the DuPont company, which may be combined with a stack of parylene, to confine the conductive fluid B by the insulating fluid A in the absence of an applied voltage. The shape of the interface 14 can be switched in a continuous fashion from a convex shape shown in orientation (a) to a concave shape shown in orientation (b) by varying a direct or alternating voltage from a value V1 to a value V2 across the cylindrical electrode 2 embedded in the chamber wall and a, preferably transparent, annular electrode 12 on the second lid 6 which is in conductive contact with the second fluid B. Consequently, the focal point of the light path L through the cylinder is altered.

The transparent end portion 4 may be a glass or polymer lid or another suitable transparent material, which may be lens-shaped. The exposure of the container of the fluids A and B to an external electrical field or the rubbing of the transparent end portion 4, e.g., cleaning the end portion with a cloth or accidental rubbing of the end portion 4 by wearing the optical device in a pocket of a garment, can cause the accumulation of an electrostatic charge on a surface of the container such as the transparent end portion 4. This charge

can attract the conductive fluid B, thereby disturbing the shape of the interface 14 between the fluids A and B, as shown in (c), thus causing a deviation of the desired optical behaviour of the lens. Since it can take several hours or longer for the electrostatic charge to leak away, it will be obvious that this is a highly unwanted effect. It is pointed out that a similar unwanted effect can occur when the lens is exposed to an external electrical field.

It is emphasized that although this undesirable effect is explained using the prior art lens from International Patent application WO 03/069380 as an example, other liquid-based optical devices such as the diaphragm disclosed in US patent application US2001/0017985 can equally suffer from this problem.

In Fig. 2 and the following figures, the variable focus lens of Fig. 1 will be shown as an embodiment of the optical device of the present invention. It is emphasized, however, that the teachings of the present invention also apply to other liquid-based optical devices. In Fig. 2, the variable focus lens of Fig. 1 is extended with a conductive layer 100 for preventing the interface from an exposure to an external electric field of the lens, i.e., on the first end portion 4. The conductive layer 100 is shown on the inner surface of the end portion 4, but an orientation on the outer surface of the end portion 4 is also feasible. The conductive layer 100 can be realized with any known transparent conductive material such as indium tin oxide (ITO), Indium trioxide ( $\text{In}_2\text{O}_3$ ) or tin dioxide ( $\text{SnO}_2$ ). Preferably, the conductive layer 100 is kept at the same potential as the liquid responsive to an electric field B, which can be realized by conductively coupling the conductive layer 100 to the electrode 12 in contact with the liquid responsive to an electric field B, as shown in Fig. 2.

Fig. 3 shows another embodiment of an optical device of the present invention. The variable focus lens of Fig. 1 is placed inside a further container 120. The further container 120 may be open opposite the end portion 4 and the end portion 6 of the variable focus lens, or may have transparent sections opposite those end portions. The further container 120 may further comprise a metal body, or may further comprise a non-conductive material such as plastic or glass, which may be transparent. In case of the further container 120

comprising such a non-conductive material, the further container 120 further comprises a conductive coating 140, which may be transparent, and which may reside on an inner surface or an outer surface of the further container 120.

5           Consequently, the further container 120 acts as a Faraday cage around the variable focus lens, thus preventing a build-up of an electrostatic charge on a surface of the container. Furthermore, since an external electrical field can also disrupt the intended optical behaviour of the optical device, the Faraday cage also protects the optical device against such disruptions. The conductive  
10   coating 140 may also be applied to the outer surface of the container of the variable focus lens, in which case the further container 120 can be omitted. Preferably, the conductive coating 140 or a conductive further container 120 are conductively coupled to the liquid responsive to an electric field B to ensure that the Faraday cage is kept at the same potential as the liquid  
15   responsive to an electric field B. This conductive coupling may be realized via the electrode 12. It is emphasized that the aforementioned embodiments of a Faraday cage may be combined with any of the embodiments of the conductive layer 100 as shown in Fig. 2 without departing from the scope of the present invention.

20           At this point, it is emphasized that although in this application the means for controlling the orientation of the interface 14 are depicted as an electrode arrangement for controlling the shape of the interface 14 by means of a voltage, other means for controlling the orientation of the interface 14 are equally acceptable, such as the means for controlling the orientation of the  
25   interface 14 as described in unpublished European patent application 03101335.2 with priority date 14/05/2003.

          In this application, a variable focus lens is disclosed including two immiscible liquids with different refractive indices. The lens has two chambers over which the two liquids are distributed: a first chamber in which the interface  
30   is positioned and through which the light path runs, and a second chamber having two connections to the first chamber. The second chamber includes a pump, which is used to alter the respective volumes of the liquids in both



chambers. Consequently, the focus of the lens is varied by a translation of the position of the interface between the two liquids with respect to the inner wall of the first chamber rather than by changing the shape, i.e., the curvature of the interface.

5        Fig. 4 shows an embodiment of an electronic device 1 of the present invention, including an optical device having a conductive layer 100 on the end portion 4, as shown in Fig. 2 and its detailed description. The electronic device 1 further includes driver circuitry 20 for applying a voltage across the electrode arrangement including electrodes 2 and 12, and an image sensor 30 for  
10 capturing an image that enters the electronic device 1 via the light path of the optical device. The driver circuitry 20 and the image sensor 30 are powered by a power supply 40, which has one of its terminals, e.g., ground, coupled to the conductive layer 100. This may also be the ground of the electronic device 1. Alternatively, the conductive layer 100 may also be coupled to the power  
15 supply 40 via the electrode 12, in an arrangement analogous to that shown in Fig. 2.

      Fig. 5 shows another embodiment of an electronic device 1 of the present invention, including a liquid-based optical device, e.g., a variable focus lens, driver circuitry 20, an image sensor 30 and a power supply (not shown).  
20 The electronic device 1 further comprises an electronic circuit 50, which is shielded from external radiation, i.e., radiation from outside the electronic circuit, by shielding material 60. The shielding material 60 may be any suitable material known to the skilled person, e.g., a conductive foil or a metal housing. The shielding material 60 is extended over the container of the optical device  
25 without blocking the light path through the optical device to prevent a build-up of an electrostatic charge on a surface of the container of the optical device.

      It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the  
30 appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than

those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention can be implemented by means of hardware comprising several distinct elements. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

## CLAIMS

1. An optical device comprising:  
5 a container enclosing an insulating liquid (A) and a liquid responsive to an electric field (B), the insulating liquid (A) and the liquid responsive to an electric field (B) being immiscible and being in contact with each other via an interface (14), at least one of the liquids (A; B) being at least partially placed in a light path through the container;  
10 means for controlling an orientation of the interface (14); and  
means (100, 120, 140) for preventing the interface from an exposure to an external electric field.
2. An optical device as claimed in claim 1, wherein the means for  
15 controlling an orientation of the interface comprise an electrode arrangement (2; 12) for controlling the shape of the interface (14) by means of a voltage.
3. An optical device as claimed in claim 1 or 2, wherein the surface is a  
20 part of a transparent end portion (4) of the container; the means for preventing the interface from an exposure to an external electric field comprise a conductive layer (100), the conductive layer (100) forming a part of the transparent end portion (4).
4. An optical device as claimed in claim 3, wherein the means for  
25 controlling the orientation of the interface comprise an electrode (12) in contact with the liquid responsive to an electric field (B), the conductive layer (100) being conductively coupled to said electrode (12).
5. An optical device as claimed in claim 1 or 2, wherein the means for  
30 preventing the interface from an exposure to an external electric field comprise a Faraday cage (120, 140) surrounding the container.

6. An optical device as claimed in claim 5, wherein the Faraday cage comprises a conductive coating (140) at least partially covering a further container (120).

5 7. An optical device as claimed in claim 6, wherein the further container (120) is at least partially transparent.

8. An electronic device (1) including an optical device comprising:  
a container enclosing an insulating liquid (A) and a liquid responsive to  
10 an electric field (B), the insulating liquid (A) and the liquid responsive to an electric field (B) being immiscible and being in contact with each other via an interface (14), at least one of the liquids (A; B) being at least partially placed in a light path through the container;  
means (2; 12) for controlling an orientation of the interface (14); and  
15 means (60, 100) for preventing the interface from an exposure to an external electric field;  
driver circuitry (20) coupled to the means (2; 12) for controlling an orientation of the interface (14); and  
a power supply (30) for powering the driver circuitry (20).

20

9. An electronic device (1) as claimed in claim 7, wherein the means (100) for preventing the interface from an exposure to an external electric field are coupled to a terminal of the power supply (30).

25 10. An electronic device (1) as claimed in claim 8, wherein said terminal is the ground.

11. An electronic device (1) as claimed in claim 8 or 9, wherein the means for preventing the interface from an exposure to an external electric field form  
30 a part of an arrangement (60) for shielding an electronic circuit (50) of the electronic device (1) from external radiation.

1/3

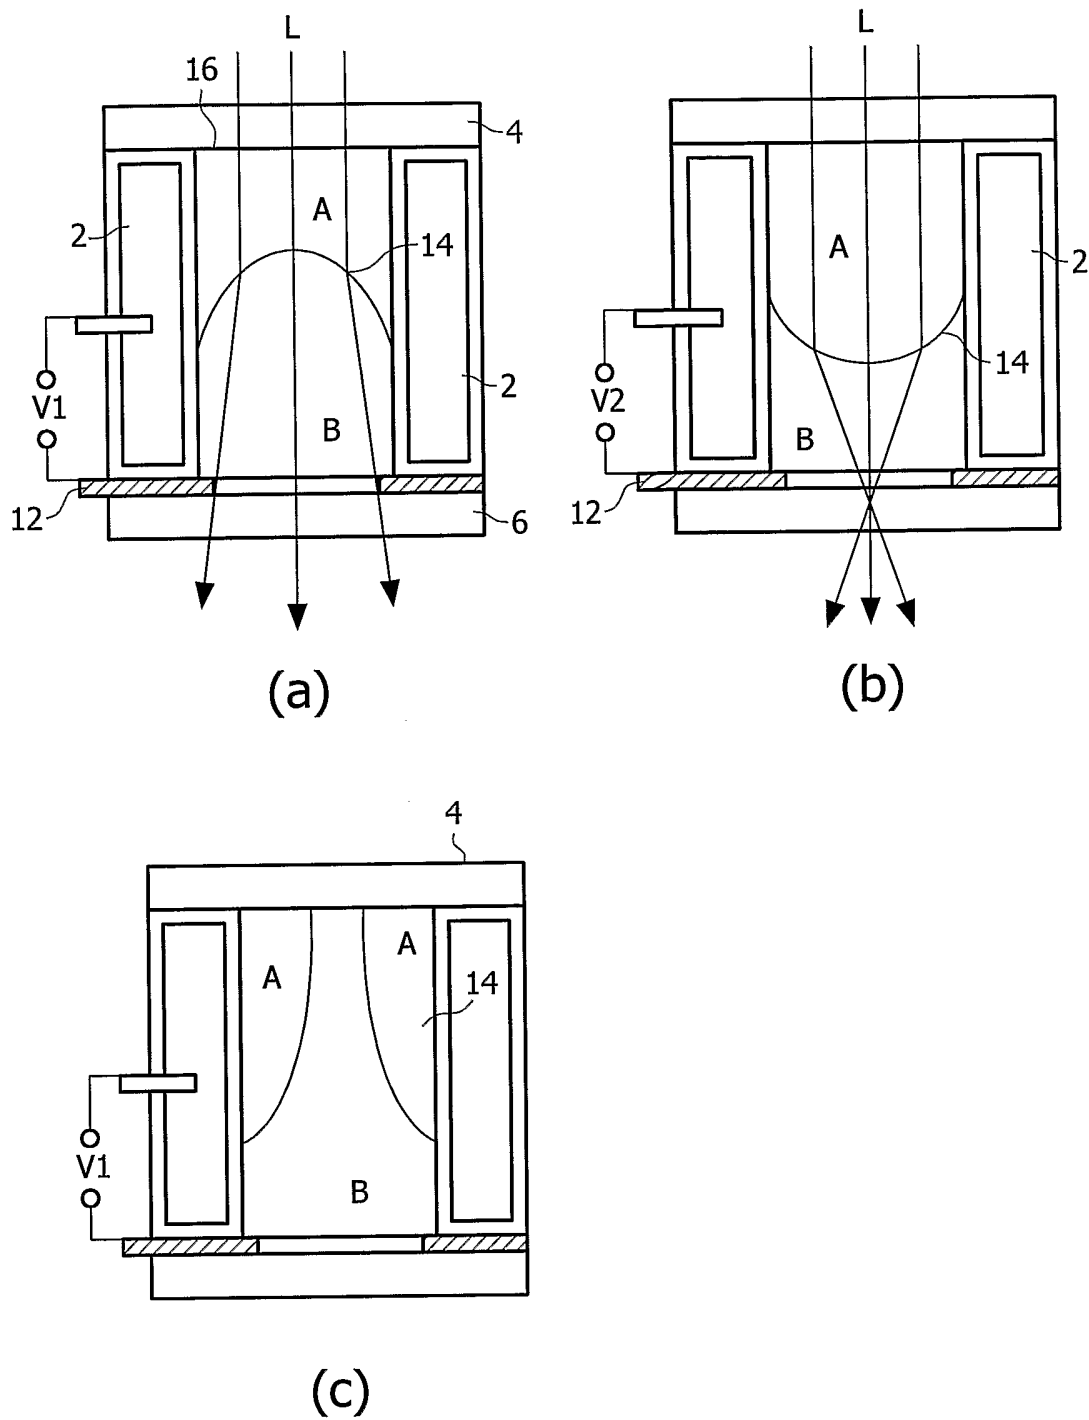


FIG. 1 (prior art)

2/3

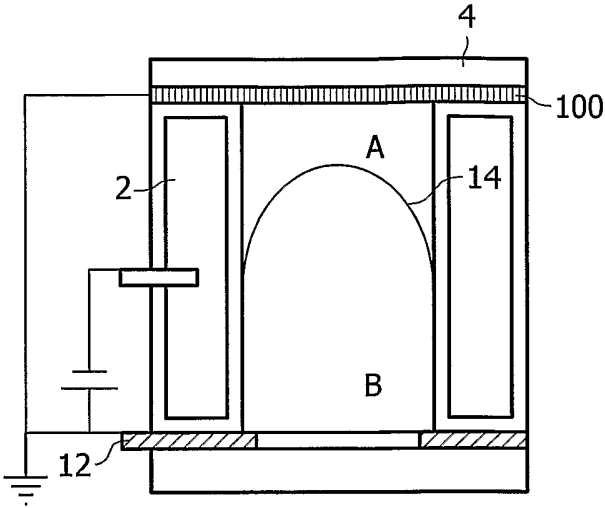


FIG. 2

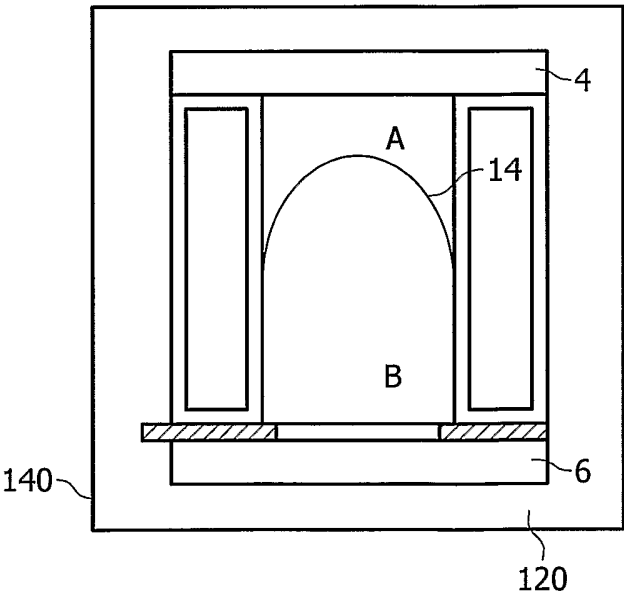


FIG. 3

3/3

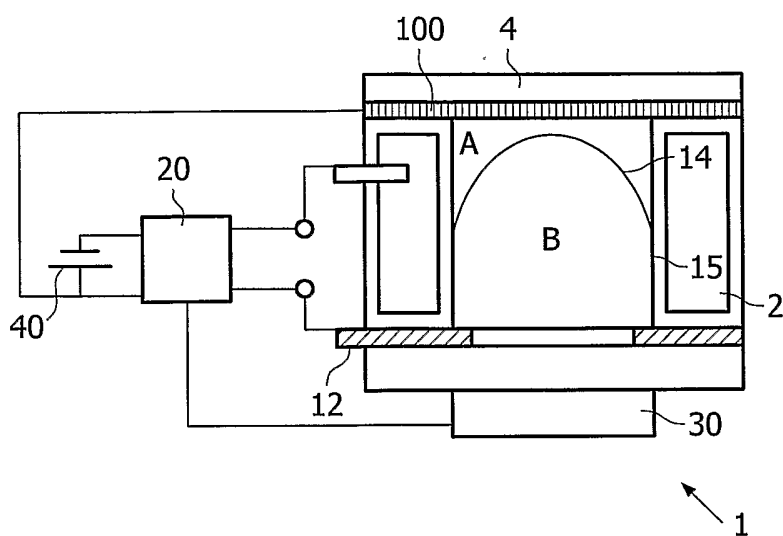


FIG. 4

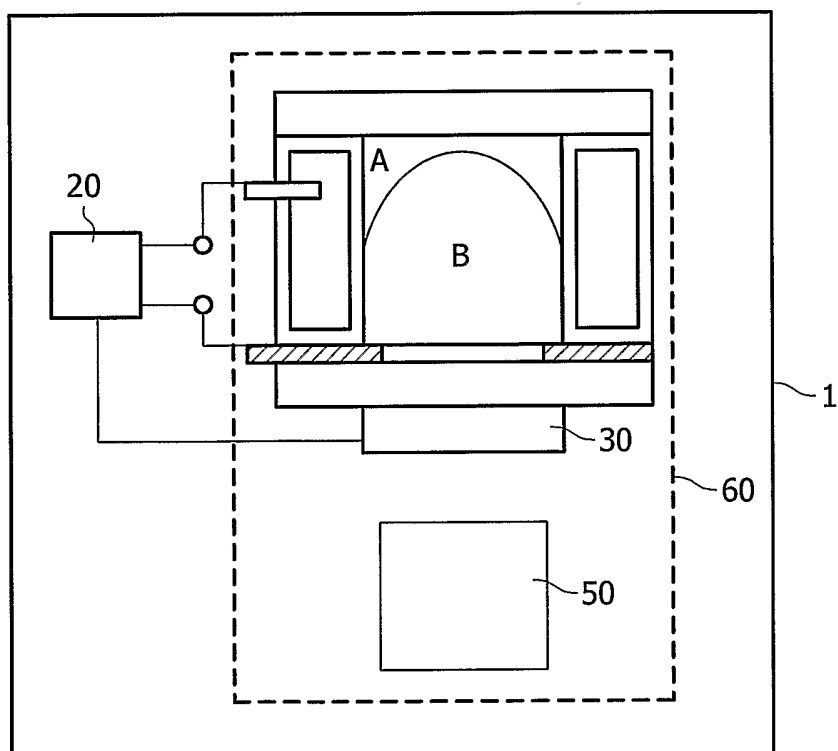


FIG. 5

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB2005/051228

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B26/02 H05K9/00 H05F3/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B H05F H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 03/069380 A (KONINKLIJKE PHILIPS ELECTRONICS N.V; FEENSTRA, BOKKE, J; KUIPER, STEIN) 21 August 2003 (2003-08-21) cited in the application abstract figure 1 page 3, line 32 - page 5, line 30	1-3,5-11
Y	US 5 373 102 A (EHRlich ET AL) 13 December 1994 (1994-12-13) abstract column 2, line 22 - line 60	1-3,5-11
A	EP 0 713 240 A (SUMITOMO METAL MINING COMPANY LIMITED; TOHOKU CHEMICAL INDUSTRIES LTD) 22 May 1996 (1996-05-22) abstract	3-7



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

4 July 2005

Date of mailing of the international search report

26/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schenke, C



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2005/051228

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03069380	A	21-08-2003	AU 2003201481 A1 EP 1478951 A1 WO 03069380 A1 US 2005113912 A1	04-09-2003 24-11-2004 21-08-2003 26-05-2005
US 5373102	A	13-12-1994	NONE	
EP 0713240	A	22-05-1996	JP 8143337 A JP 8217493 A EP 0713240 A2	04-06-1996 27-08-1996 22-05-1996