

C I P O

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
22 May 2008 (22.05.2008)

PCT

(10) International Publication Number
WO 2008/058633 A3(51) International Patent Classification:
A47J 31/06 (2006.01)(21) International Application Number:
PCT/EP2007/009422

(22) International Filing Date: 30 October 2007 (30.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2006A002209
16 November 2006 (16.11.2006) IT(71) Applicant (for all designated States except US): **ILLY-CAFFE' S.P.A.** [IT/IT]; Via Flavia, 110, I-34147 Trieste (IT).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **SUGGI LIVERANI, Furio** [IT/IT]; Via Hermet, 6, I-34123 Trieste (IT). **MASTROPASQUA, Luca** [IT/IT]; Via Belpoggio, 2, I-34123 Trieste (IT). **DELLAPIETRA, Bruno** [IT/IT]; Via Sistiana, 104, I-34013 Duino Aurisina (IT).**BOLZICCO, Claudio** [IT/IT]; Viale Dante, 18, I-33170 Pordenone (IT). **VAN EEDEN, Frans** [NL/IT]; Via G. Meda, 11, I-20136 Milano (IT).(74) Agent: **ALAGEM MODIANO, Lara, S.**; Modiano & Associati, Via Meravigli, 16, I-20123 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: INSERT FOR FILTER HOLDERS OF COFFEE MACHINES, PARTICULARLY FOR ESPRESSO COFFEE MACHINES

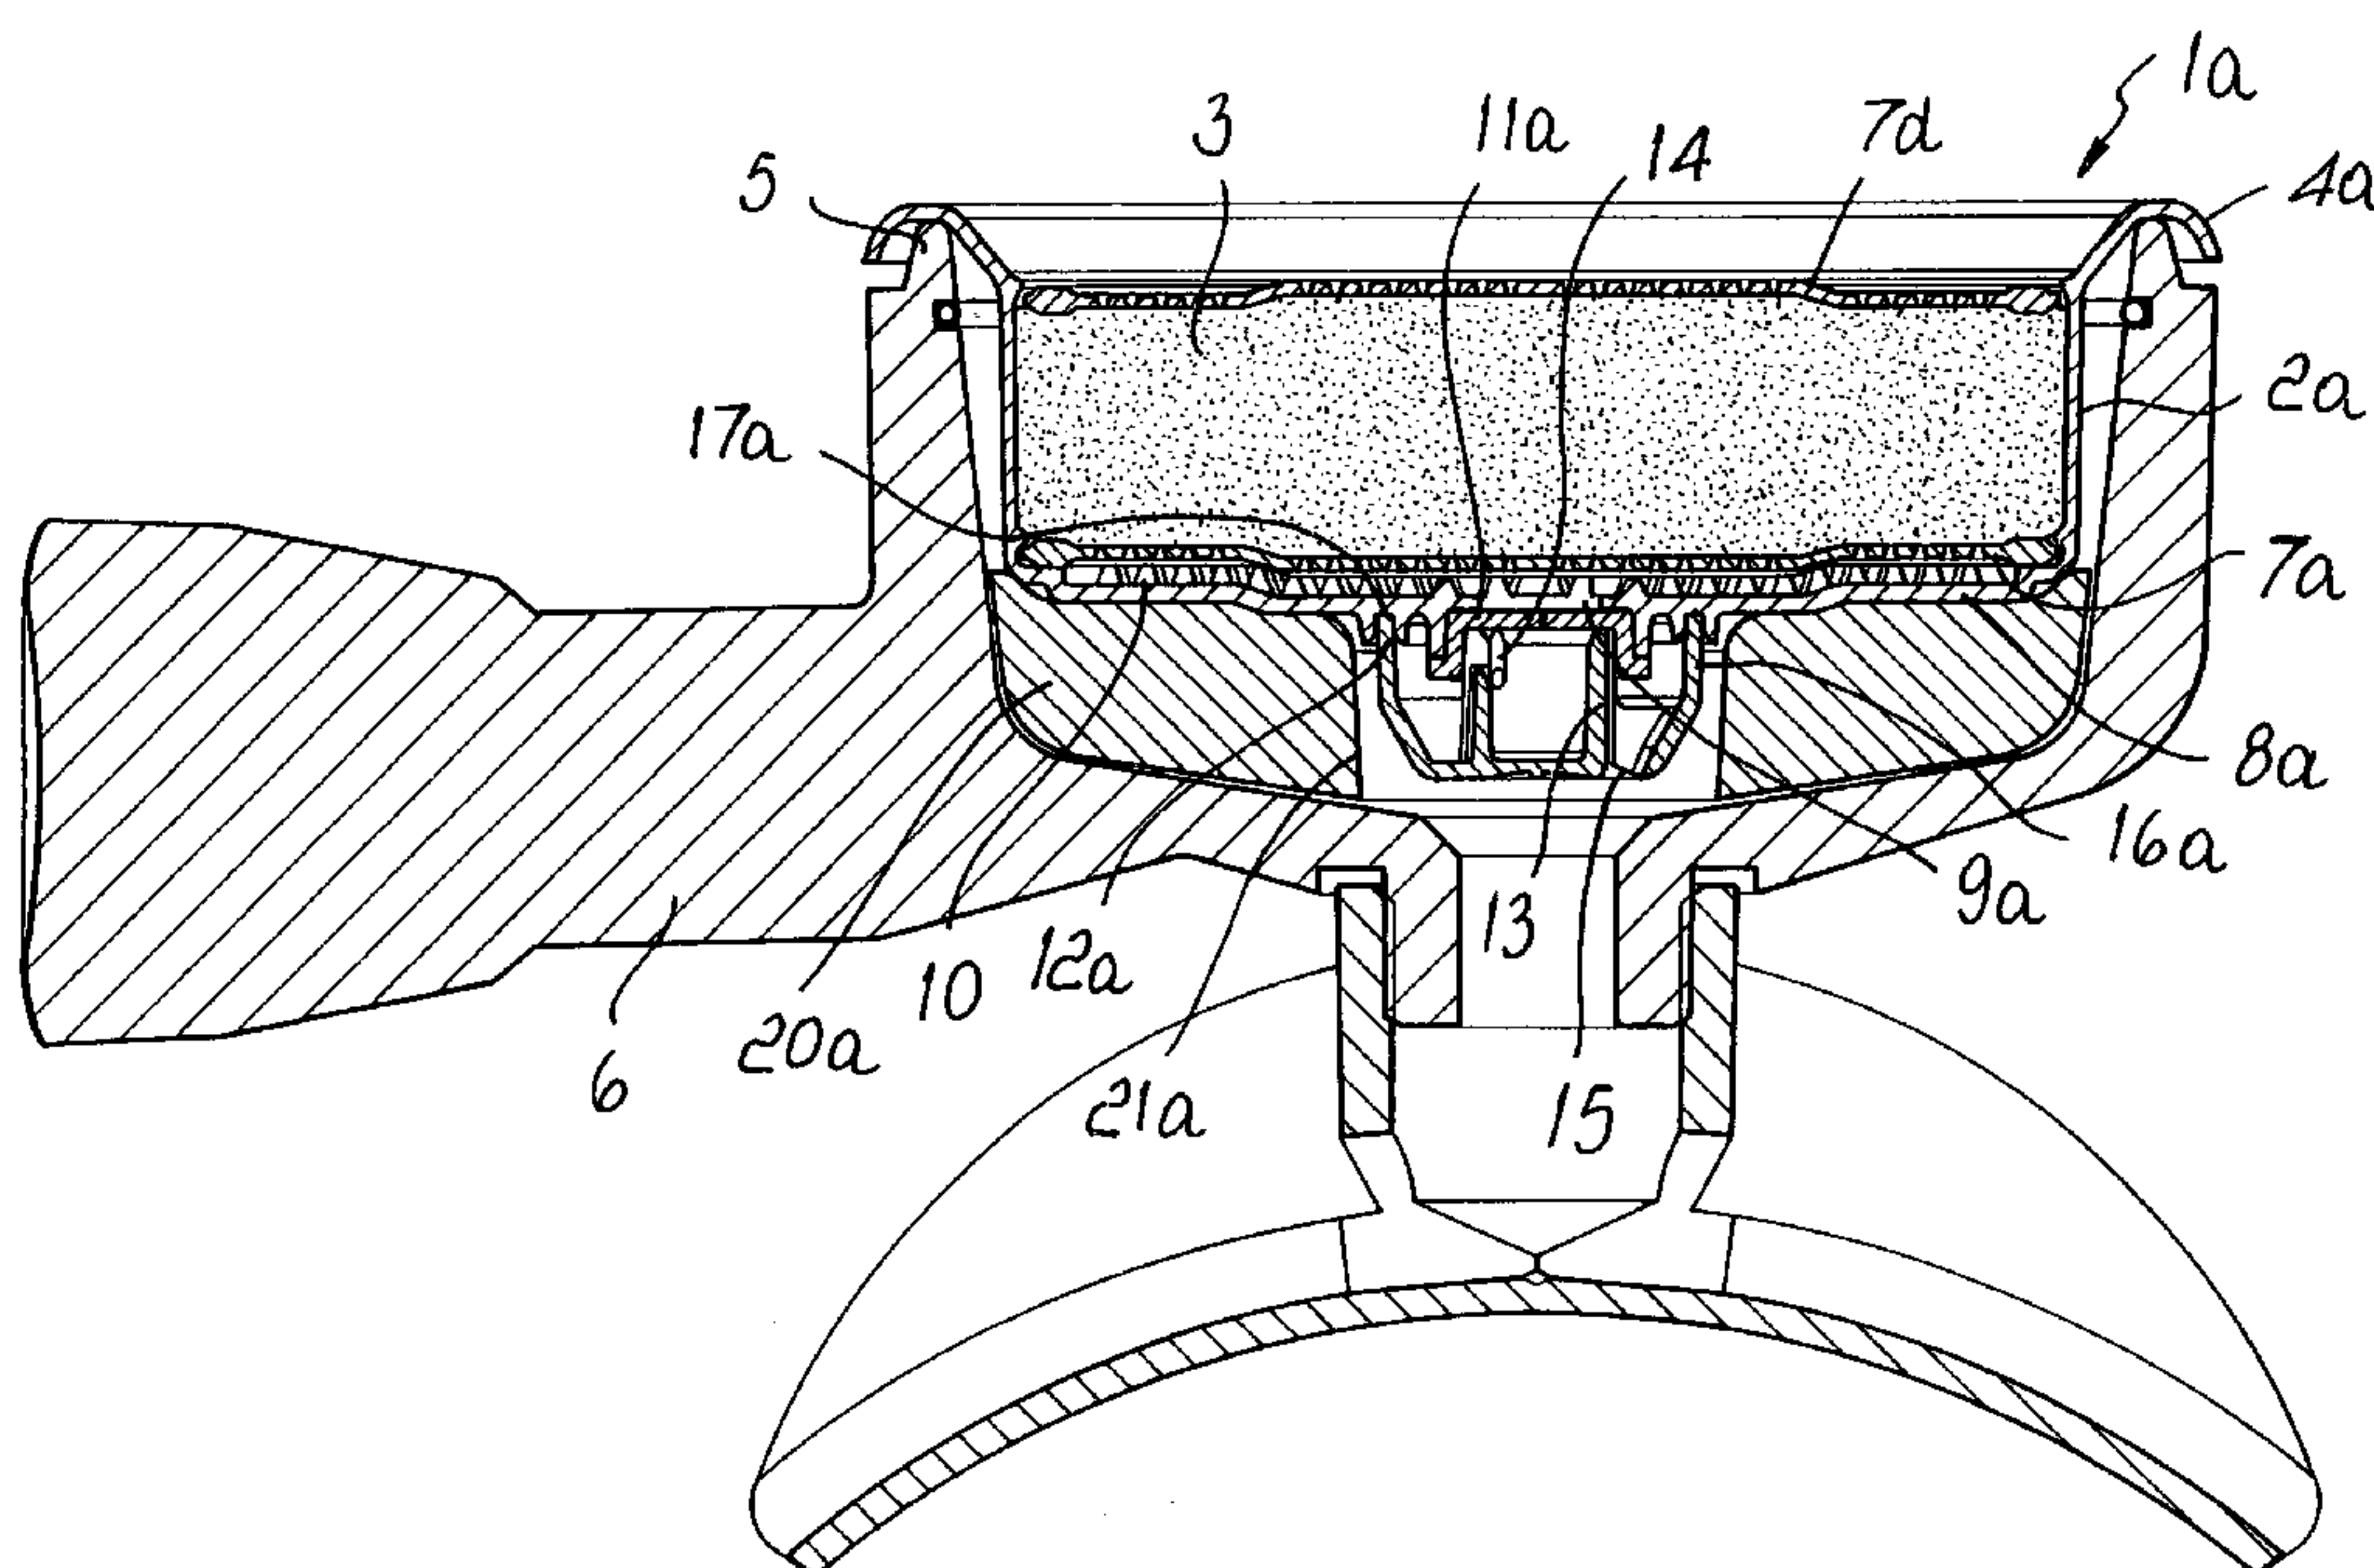

(57) Abstract: An insert (1a) for filter holders of coffee machines, particularly espresso coffee machines, comprising an adapter (20a) provided with means for fixing to a filter holder and a disposable tray (2a) for containing a dose (3) of ground coffee; the tray (2a) comprising a base (8a) which has a discharge port (9a) and a side wall which, together with the base (8a), defines the tray; the tray (2a) further comprising a protrusion (4a) on the side wall which protrudes substantially radially toward the outside of the tray (2a).

WO 2008/058633 A3

WO 2008/058633 A3



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:
28 August 2008

INSERT FOR FILTER HOLDERS OF COFFEE MACHINES, PARTICULARLY FOR ESPRESSO COFFEE MACHINES

Technical Field

The present invention relates to an insert for filter holders of coffee
5 machines, particularly espresso coffee machines.

Background Art

It is known that machines for preparing espresso coffee, used
typically in bars and restaurants, require a dose of roasted and ground coffee
to be placed in a filtering vessel which is integrated in a so-called “filter
10 holder”. The filter holder is an element which can be coupled to the espresso
coffee machine and is provided with a bowl from which a handle protrudes
radially in order to facilitate fitting and removal of the filter holder with
respect to the machine.

In known filter holders, the bowl is completely open in the upper part
15 so that it can be filled manually with a dose of ground coffee (typically
approximately 7 grams for each cup of beverage to be dispensed) and so as
to define an infusion chamber when the filter holder is fitted on the
machine.

The bowl has, on the bottom, a discharge opening, which has a much
20 smaller diameter than the upper opening, in order to allow the passage of the
extracted beverage and its conveyance into an external cup.

A perforated disk is also fixed at the bottom of the bowl and is thus
arranged between the dose of ground coffee and the beverage discharge
opening. The filter is used to keep the solid residues inside the bowl and
25 prevent them from being conveyed into the external cup.

The known type of filter holder described above, though being
widespread and used in professional machines, has its maintenance and
cleaning as its main drawback. Once the beverage has been extracted, the
traditional filter holder is in fact emptied by removing it from the machine
30 and tipping it over a waste container, possibly striking it repeatedly, to

cause the block of moist coffee left in the bowl of the filter holder to fall.

This procedure for emptying the filter holder of the solid coffee residues is rather inaccurate, since it does not allow to remove completely any trace of solid. For this reason, after a certain number of extractions of the beverage, the filter holder needs to be cleaned, and for this purpose it may be necessary to remove the perforated support which is fixed to the bottom of the bowl.

Disclosure of the Invention

The aim of the present invention is to obviate the drawbacks cited above by providing an insert for filter holders which reduces considerably the cleaning times and ensures the same performance and results achieved by using traditional filter holders and systems for extracting espresso coffee.

Within this aim, an object of the invention is to provide an insert which can be used universally in existing filter holders and machines.

Another object of the invention is to provide a filter holder which can be emptied in the conventional manner without however leaving coffee residues inside it.

Another object of the invention is to allow to obtain a beverage which is always creamy at each extraction, without altering the existing structure of the espresso coffee machine in which the filter holder is to be installed.

Still another object of the invention is to provide an insert for filter holders which is highly reliable, relatively easy to provide and at competitive costs.

This aim and these and other objects, which will become better apparent hereinafter, are achieved by an insert for filter holders according to the invention, characterized in that it comprises an adapter which is provided with means for fixing to a filter holder and a disposable tray for containing a dose of ground coffee, the tray comprising a base which has a discharge port and a side wall which, together with the base, defines the tray, said tray further comprising a protrusion on the side wall which

protrudes substantially radially toward the outside of the tray.

Brief Description of the Drawings

Further characteristics and advantages of the invention will become better apparent from the description of a preferred but not exclusive
5 embodiment of the insert according to the invention, illustrated by way of non-limiting example in the accompanying drawings, wherein:

Figure 1 is an axial sectional view of a filter holder which incorporates the insert according to a first embodiment of the invention;

Figure 2 is a sectional exploded view of the filter holder of Figure 1;

10 Figure 3 is an axial sectional view of a filter holder which incorporates the insert according to a second embodiment of the invention;

Figure 4 is a sectional exploded view of an insert according to a third embodiment of the invention.

Ways of carrying out the Invention

15 With reference to the figures, the insert according to the invention, designated by the reference numerals 1a, 1b, 1c in its different embodiments, comprises a tray 2a, 2b, 2c and an adapter 20a, 20b on which the tray 2a, 2b, 2c is rested. The tray 2a, 2b, 2c is provided with a large upper opening and is adapted to contain a dose 3 of ground coffee or a
20 prepackaged pod 3c of ground coffee.

The diameter of the upper opening of the tray is substantially equal to the diameter of the bowl of a traditional filter holder or in any case is sufficiently large to receive from above a prepackaged pod of ground coffee (such as the pod 3c of the E.S.E.® type shown in Figure 4) or a dose of
25 loose ground coffee introduced manually by a user for example by means of a traditional grinder-dispenser.

The tray 2a, 2b, 2c is disposable and is made of a low-cost material, for example plastics, a multilayer composite of plastics, cardboard or aluminum or, more preferably, polypropylene, so that it can be discarded
30 once extraction has ended.

The adapter 20a, 20b instead can be made of any material (although plastics is preferred) and is adapted to be fixed to the bottom of the bowl portion of any filter holder 6 simply by removing the perforated support that is traditionally fitted to such bottom and replacing it with the adapter 20a, 20b. Although this is not shown, the tray 2c also is preferably accompanied by an adapter which is similar to the adapter 20a, 20b.

In practice, the insert according to the invention is composed of two portions: a fixed one, which remains permanently inside the bowl of the filter holder, and a disposable one, which rests on the fixed portion.

10 The tray 2a, 2b, 2c comprises a base 8a, 8b, 8c provided with a discharge port 9a, 9b, 9c in a substantially central position, which is adapted to make the beverage obtained from the dose of coffee 3, 3c pass toward the outside of the tray. The port 9a, 9b, 9c is aligned with a through opening 21a, 21b of the adapter 20a, 20b, to allow to convey the beverage toward the
15 delivery spout of the filter holder.

Preferably, the base 8a, 8b, 8c has a plurality of ribs 10, which are arranged so as to define a densely packed plurality of channels which intersect one another in order to convey the beverage toward the discharge port 9a, 9b, 9c.

20 The tray 2a, 2b, 2c is further provided with a protrusion on the side wall which protrudes radially toward the outside of the tray 2a, 2b, 2c and is adapted to rest against the rim 5 of the bowl-shaped portion of a filter holder 6.

The protrusion of the side wall of the tray 2a, 2b can consist of a rim 25 4a, 4b of the upper opening of the tray 2a, 2b, which is conveniently hook-shaped so as to be able to engage or rest on the corresponding rim 5 of the filter holder 6, as shown in Figures 1 and 3.

Alternatively, the protrusion of the lateral surface of the tray 2c can be simply a flange 4c provided on the rim of the upper opening of the tray
30 2c and also adapted to rest on the rim 5 of the filter holder 6.

The provision of a rim which protrudes from the outer lateral surface of the tray 2a, 2b, 2c allows to have an element for supporting the tray 2a, 2b, 2c inside the bowl-shaped portion of the filter holder. This support is combined with the support provided by the adapter, but can also replace it.

5 The protruding rim 4a, 4b, 4c of the tray also provides a surface for continuous protection along the entire perimeter of the bowl-shaped portion of the filter holder, thus preventing access to the internal surfaces of the bowl-shaped portion by the percolation substances which fill the extraction chamber during beverage preparation.

10 Moreover, the protruding rim 4a, 4b, 4c provides a surface which can be made of a different material with respect to the bowl-shaped portion of the filter holder and is adapted to engage, instead of the rim 5, the surfaces of the water injection assembly provided in traditional machines, which is not shown in the figures.

15 The tray 2a, 2b, 2c further comprises a filtering element preferably provided by means of a perforated disk 7a, 7b which rests on the bottom 8a, 8b of the tray 2a, 2b, in particular on the ribs 10.

The perforated disk 7a, 7b, also preferably made of plastics, is not necessary if the dose of coffee to be introduced in the tray is a prepackaged
20 pod provided with its own filtering element, for example the E.S.E.® pod 3c shown in Figure 4.

Moreover, the perforated disk 7a, 7b can optionally comprise, on the surface in contact with the dose of coffee, a sheet of filter paper or filtering fabric in order to increase filtration.

25 Optionally, an additional perforated disk 7d can be used to cover the upper surface of the dose of coffee 3, so as to ensure a more uniform distribution of the hot water on the dose of coffee 3. As an alternative, it is possible to use an upper lid 7c, shown in Figure 4, to be rested on the protruding rim 4c of the tray 2c and adapted to define an interspace between
30 the lid and the upper surface of the dose of coffee or of the pod 3c.

A crema generation device is fitted on the base 8a, 8b, 8c of the tray, at the discharge port 9a, 9b, 9c, protrudes from the base and comprises an elastic septum 11a, 11b, 11c and a corresponding safety lid 12a, 12b, 12c.

The elastic septum 11a, 11b, 11c is arranged on the rim of the
5 discharge port 9a, 9b, 9c so as to close it and comprises a membrane which is made preferably of thermoplastic elastomer (TPE), for example SEBS (a styrene-ethylene-butylene-styrene block copolymer) or Laprene® (based on SEBS and polyolefins), in which there is a through orifice which is adapted to allow the flow of the beverage when the pressure inside the extraction
10 chamber defined in the tray 2a, 2b, 2c exceeds a certain value, causing a deformation and therefore a widening of the orifice.

As an alternative to the through orifice, the membrane of the elastic septum 11a, 11b, 11c can comprise a dead orifice, which can be opened by breakage when the pressure inside the extraction chamber reaches a certain
15 threshold.

The thermoplastic material that composes the elastic septum 11a, 11b, 11c is particularly advantageous, because it allows the elastic septum to be co-molded together with the tray 2a, 2b, 2c, so as to eliminate intermediate mechanical operations for fixing the partition to the rim of the discharge
20 port of the tray 2a, 2b, 2c and reduce drastically the manufacturing costs of the tray.

The elastic septum 11c, shown in Figure 4, can be co-molded together with a rigid annular support 11d, which can be locked by snap action in an appropriately provided annular recess provided on the rim of the discharge
25 port 9c. For this purpose, such rim protrudes axially by means of a cylindrical wall 9d which protrudes from the bottom of the tray 2c.

The safety lid 12a, 12b, 12c is fixed to the outer surface of the base 8a, 8b, 8c of the tray and is provided with an internal shoulder 13, which is engaged on the elastic septum 11a, 11b, 11c and is adapted to retain the
30 septum against the discharge port 9a, 9b, 9c provided in the base 8a, 8b, 8c

in order to prevent the septum from being expelled accidentally from the tray 2a, 2b, 2c due to the high pressures reached during beverage extraction.

In the third embodiment of the insert according to the invention, shown in Figure 4, the shoulder 13 engages the rigid annular support 11d of
5 the septum for similar safety reasons.

The shoulder 13 has at least one passage 14 in order to allow the beverage to exit from the tray 2a, 2b, 2c by passing through the safety lid 12a, 12b, 12c. For this purpose, the lid 12a, 12b, 12c comprises at least one discharge opening 15, which is preferably arranged laterally with respect to
10 the central axis of the discharge port 9a, 9b, 9c, i.e., with respect to the axis of symmetry of the tray 2a, 2b, 2c.

The passage 14 on the shoulder 13 and the discharge opening 15 of the lid 12a, 12b, 12c are advantageously arranged on opposite sides with respect to the central axis of the discharge port 9a, 9b, 9c, thus defining a
15 convoluted path for the extracted beverage which reduces its speed.

In the embodiments of Figures 1-3, the lid 12a, 12b is provided with a second closed cylindrical wall 16a, 16b, which surrounds the shoulder 13 and can be interlocked in an appropriately provided circular seat 17a, 17b which is formed in the base 8a, 8b around the discharge port 9a, 9b. The
20 walls 13 and 16a, 16b thus define a cylindrical ring, in which the beverage which exits from the orifice of the elastic partition 11a, 11b flows before reaching the discharge opening 15 provided in the safety lid 12a, 12b.

In the insert of Figure 4, instead, the lid 12c is provided with a second cylindrical wall 16c, provided internally with at least one annular rib which
25 engages by snap action a similar annular rib which is present on the outer surface of the cylindrical wall 9d. In this case also, the walls 13 and 16c define a cylindrical ring, in which the beverage which exits from the orifice of the elastic partition 11c flows before reaching the discharge opening 15.

Clearly, any solution suitable to lock the safety lid 12a, 12b, 12c to
30 the bottom of the tray 2a, 2b, 2c can be used without thereby departing from

the inventive concept. Moreover, as is evident to the person skilled in the art, an arrangement of the partition-safety lid assembly such as the one of Figure 4 can be adopted in the embodiments of the tray shown in Figures 1-3, and vice versa.

5 Operation of the invention is as follows.

With reference for example to Figure 1, a user is considered who has a traditional machine for making espresso coffee which is provided with a filter holder. The user, after removing the filter and any existing crema generator, which are fixed by means of a screw to the bottom of the bowl of
10 the filter holder, inserts the adapter 20a in the bowl of the filter holder and locks it by using the same means that fixed the pre-existing filter.

At this point, the filter holder is ready to operate. The user, who has a plurality of disposable trays 2a, takes one and rests it on the adapter and on the rim 5 of the bowl of the filter holder 6.

15 The user then inserts in the tray 2a one or more doses of ground coffee by means of a grinder-dispenser or by means of a spoon, and optionally covers the dose 3 introduced in the tray 2a by means of the disposable perforated disk 7d.

The filter holder 6 is then engaged with the extraction assembly of the
20 machine and the protruding rim 4a of the tray abuts against the lower surface of the extraction assembly or against a gasket which is provided on the lower surface of the extraction assembly.

The machine is then activated and the coffee that is extracted, by means of the particular cream generation device that is integrated in the
25 disposable tray 2a, exits from the spout of the filter holder 6 in a very creamy form.

Once extraction has ended, the user disengages the filter holder 6 from the extraction assembly and overturns it over a waste bin. The tray 2a, which was only resting on the bowl of the filter holder 6, falls by gravity
30 together with all the solid coffee residues, leaving the interior of the bowl of

the filter holder clean.

In practice it has been found that the insert according to the invention fully achieves the intended aim, since it allows to avoid the laborious operations for cleaning and removing solid residues from filter holders of
5 coffee machines. Moreover, by means of the adapter 20a, 20b, the insert can be used in the filter holders of traditional machines simply by using it to replace the perforated disks that are traditionally fitted detachably to the bottom of the bowl-shaped portion.

Another considerable advantage of the invention is that creamy coffee
10 is obtained at each extraction since, thanks to the disposable tray, the filter holder always has a new crema generator, which as such is not worn.

Although the device according to the invention has been conceived in particular for espresso coffee machines, it can in any case be used more generally for machines for preparing beverages in general which use devices
15 of the filter holder type, in which an edible powdered substance is introduced and is adapted to generate a beverage by percolation.

The device thus conceived is susceptible of numerous modifications and variations, all of which are within the scope of the appended claims. All the details may further be replaced with other technically equivalent
20 elements.

In practice, the materials used, as well as the dimensions, may be any according to requirements and to the state of the art.

CLAIMS:

1. An insert in combination with a filter holders of coffee machines, said insert comprising a tray for containing a dose of ground coffee, said tray comprising a base which has a discharge port and a side wall which, together with the base, defines the tray, said tray further comprising a protrusion on the side wall which protrudes substantially radially toward the outside of the tray, said filter holder comprising a bowl-shaped portion and a handle which protrudes from the bowl-shaped portion, said tray being disposable and the insert further comprising an adapter which is provided with means for fixing to a bottom of the bowl portion of the filter holder, said tray resting upon said adapter, and said protrusion resting against the rim of the bowl portion of the filter holder.

2. The combination according to claim 1, wherein the protrusion of the side wall of the tray is an upper rim of the tray.

3. The combination according to claim 2, wherein the upper rim of the tray is contoured so as to have a hook-shaped profile.

4. The combination according to claim 2, wherein the protrusion of the side wall of the tray is a flange provided on the upper rim of the tray.

5. The combination according to claim 1, comprising a crema generator device which is fitted to the base of the tray at the discharge port.

6. The combination according to claim 5, wherein said crema generator device protrudes from the base of the tray and comprises an elastic septum and a corresponding safety lid.

7. The combination according to claim 6, wherein the elastic septum is arranged on a rim of the discharge port so as to close it and comprises a membrane in which there is a through or dead hole which is deformable or, if dead, capable of breaking under pressure.

8. The combination according to claim 7, wherein the membrane is made of thermoplastic elastomer, preferably SEBS or Laprene®.

9. The combination according to claim 6, wherein the elastic septum is co-molded on a rigid annular support.

10. The combination according to claim 6, wherein the safety lid is fixed to the outer surface of the base of the tray and comprises an inner shoulder which is engaged on the elastic septum in order to retain the septum against the discharge port provided in the base.

11. The combination according to claim 9, wherein the shoulder engages the rigid annular support of the elastic septum.

12. The combination according to claim 10, wherein the shoulder has at least one passage and the safety lid comprises at least one discharge opening which is arranged laterally with respect to the central axis of the discharge port.

13. The combination according to claim 12, wherein the passage provided on the shoulder and the discharge opening of the safety lid are arranged on opposite sides with respect to the central axis of the discharge port.

14. The combination according to claim 10, wherein the safety lid comprises a second cylindrical wall which is closed and surrounds the shoulder so as to define a cylindrical ring.

15. The combination according to claim 1, wherein the base of the tray has a plurality of ribs which are arranged so as to define a densely packed set of mutually intersecting channels.

16. The combination according to claim 1, wherein the tray is shaped complementarily with respect to a prepackaged pod of the E.S.E.[®] type.

1/4

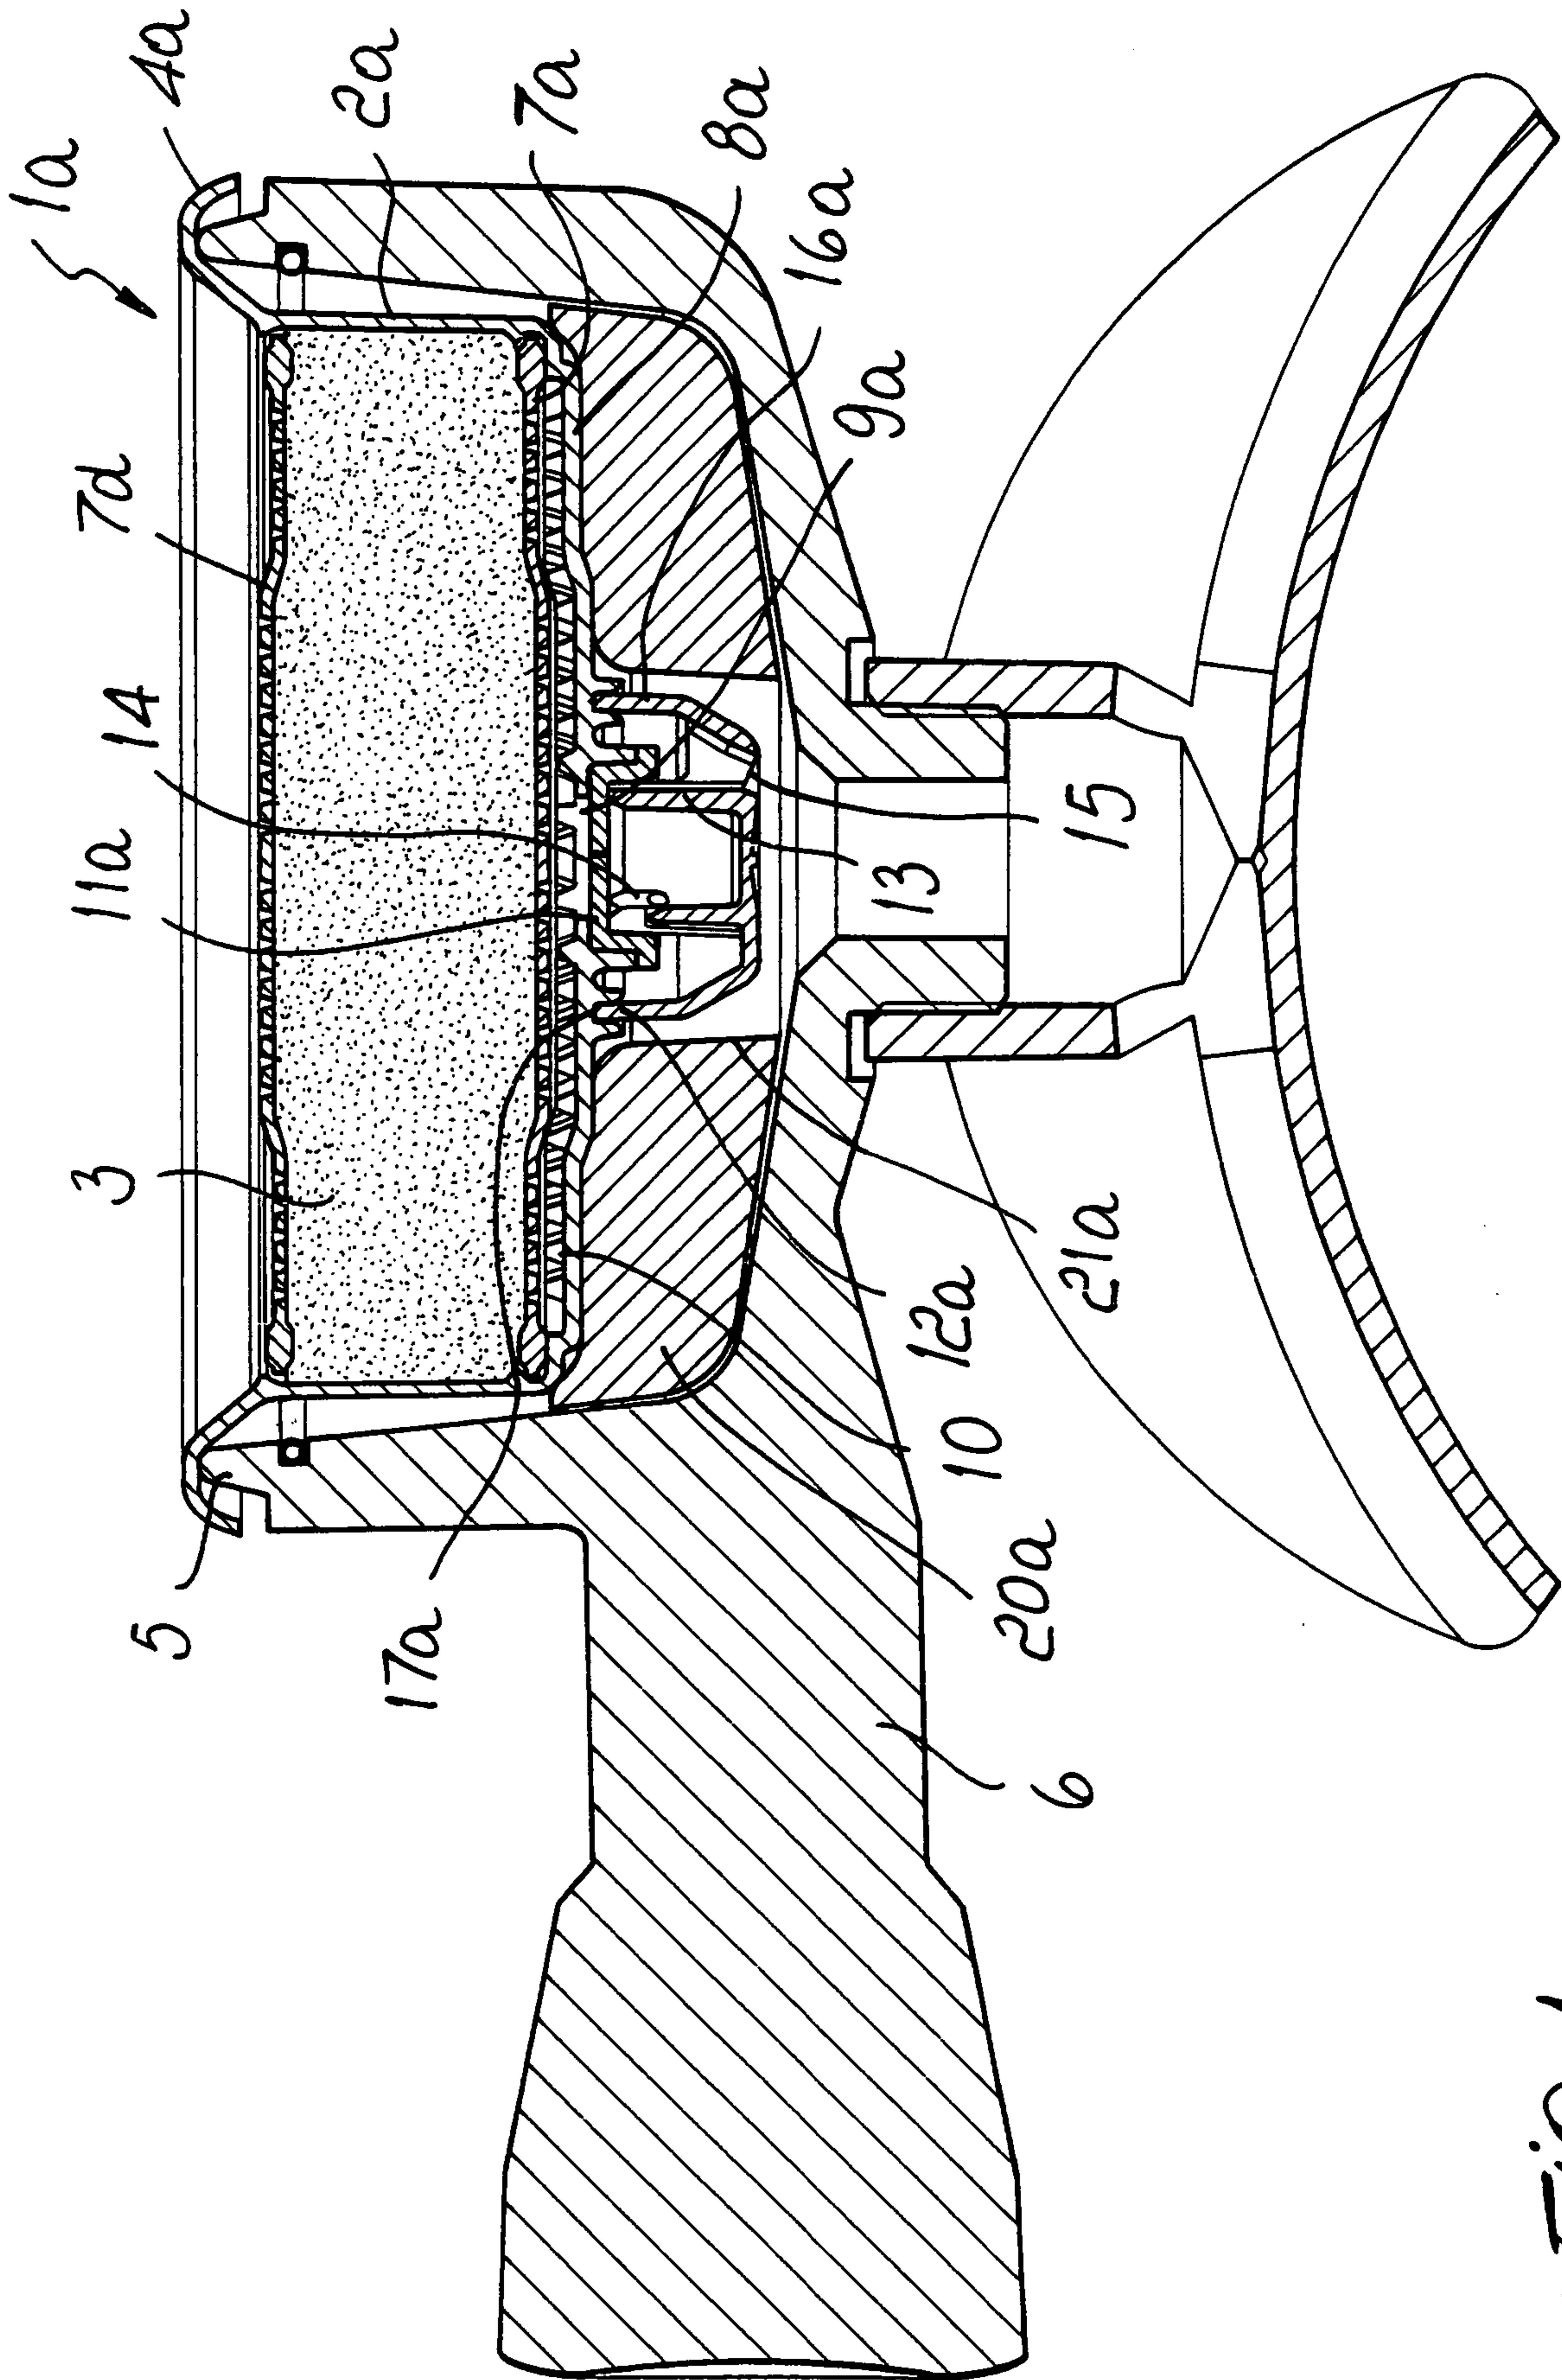


Fig. 1

2 / 4

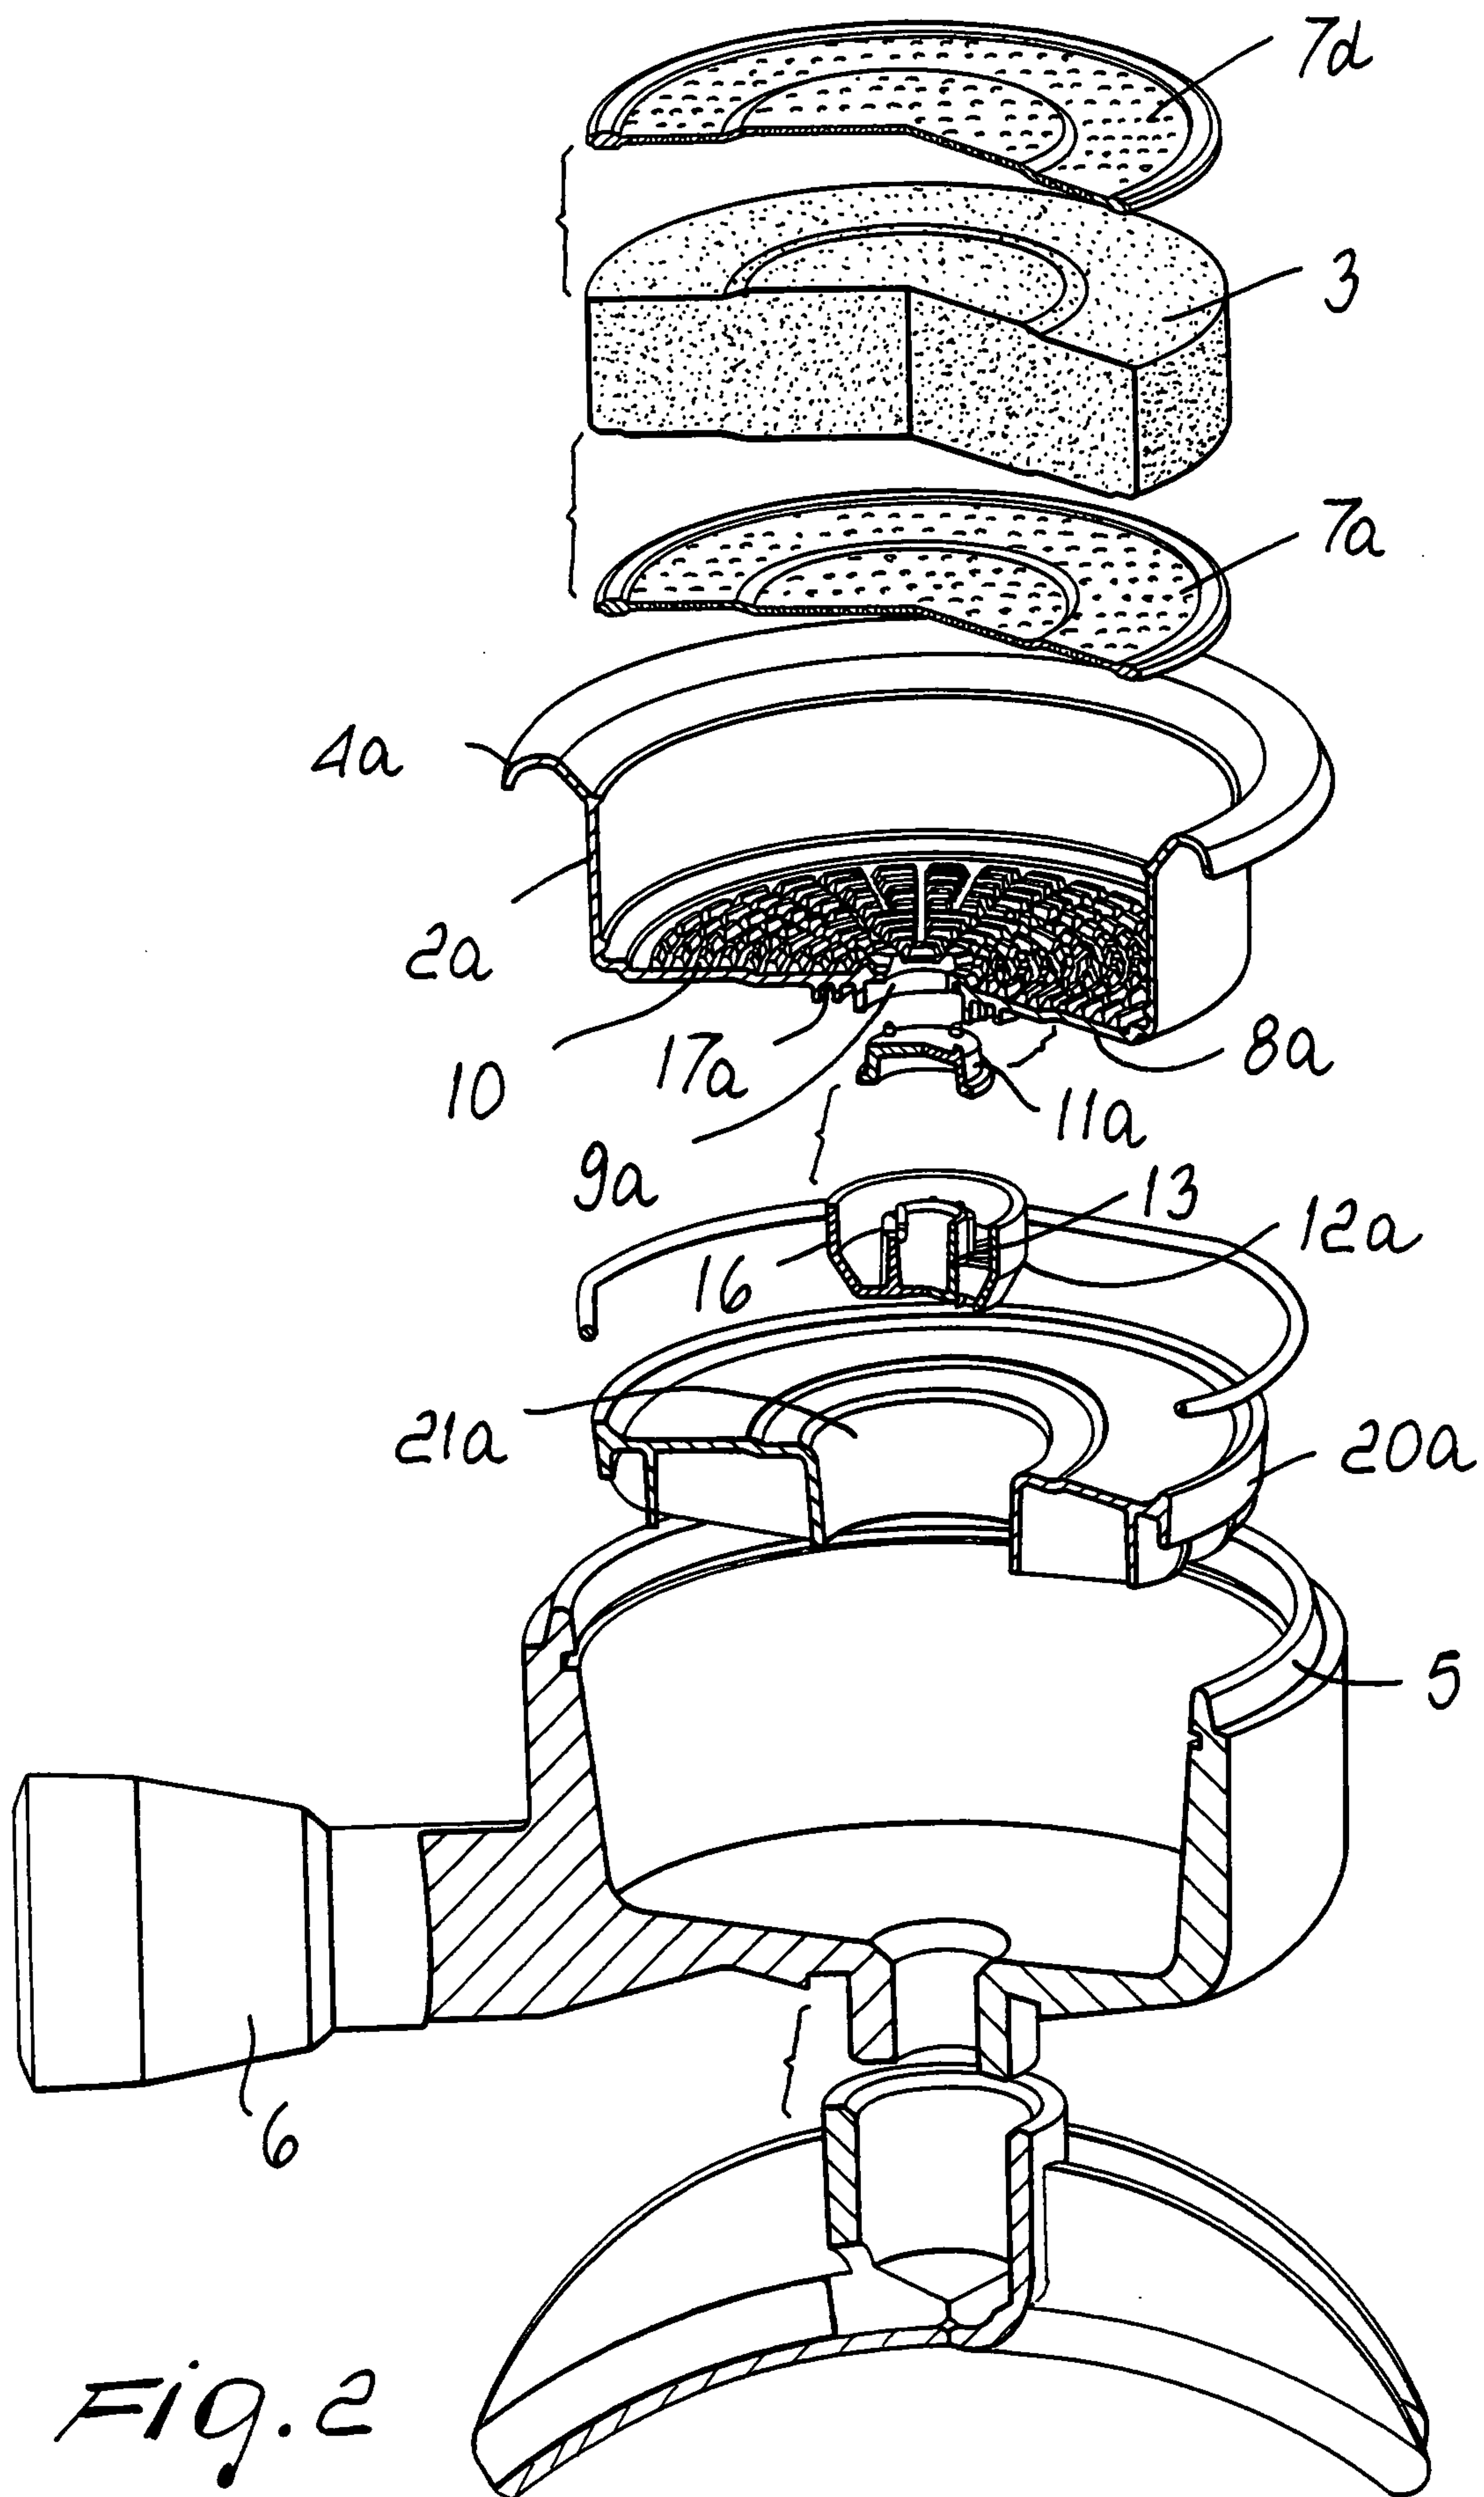


Fig. 2

3/4

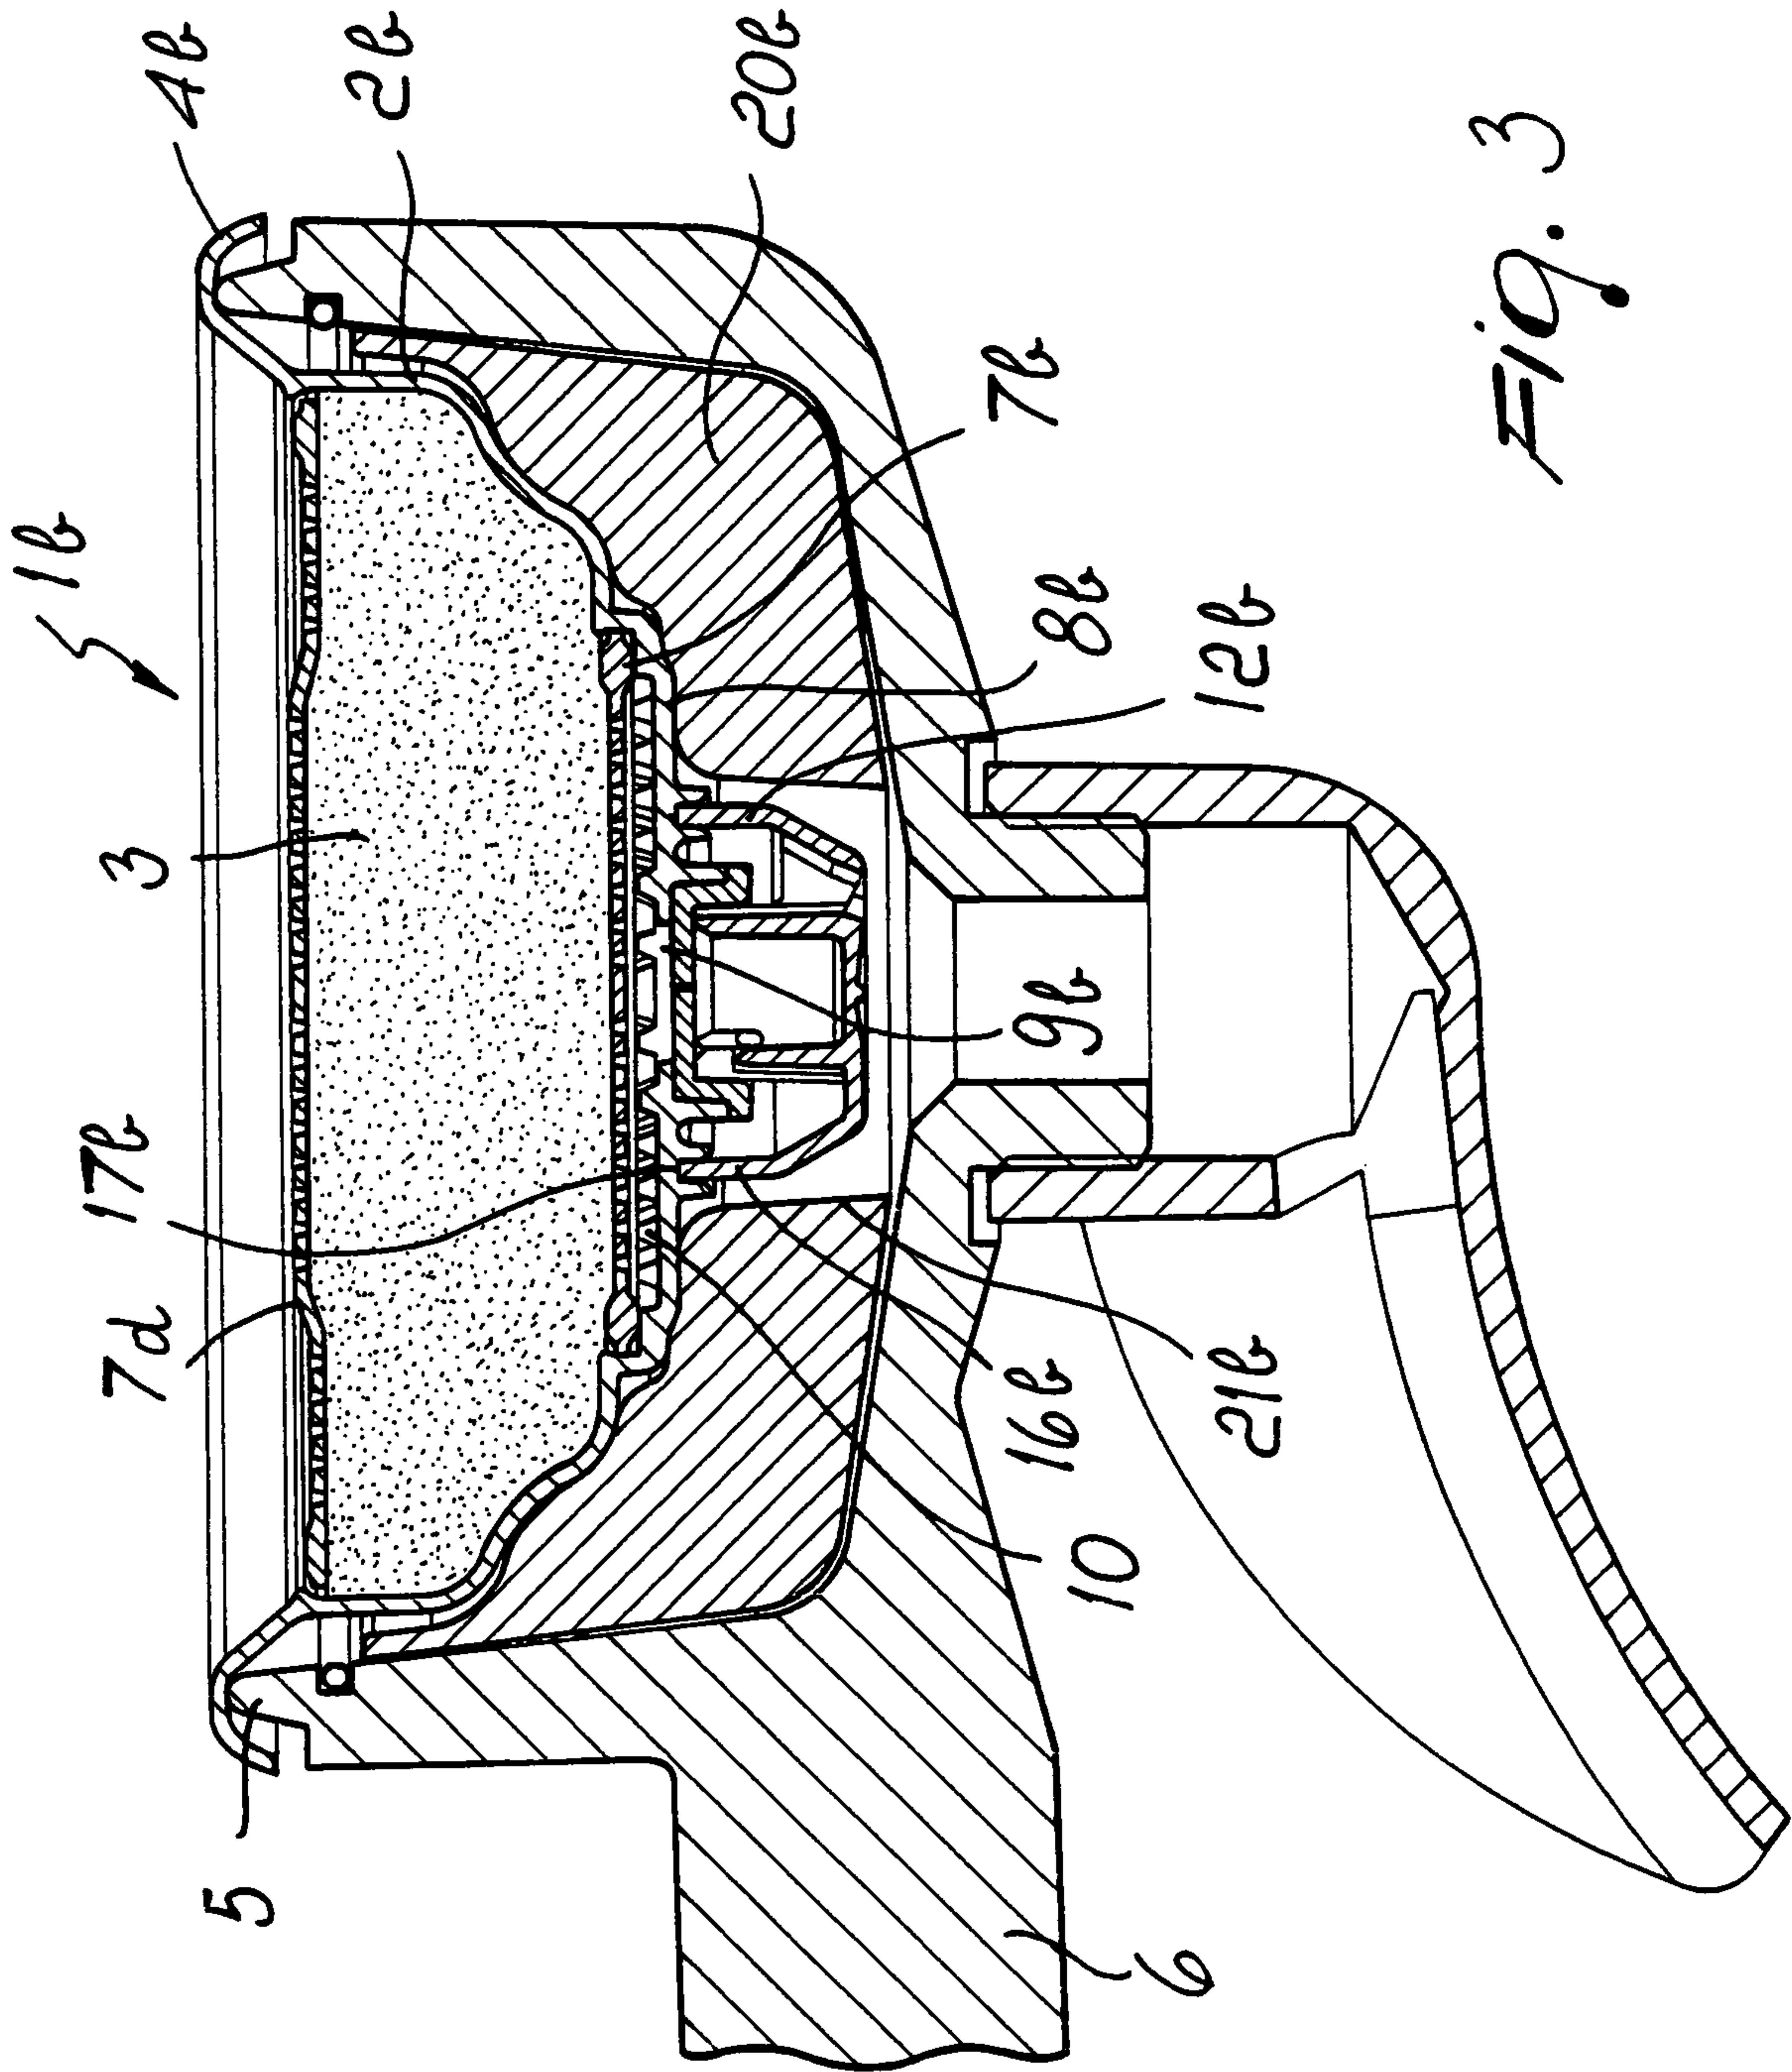


Fig. 3

4/4

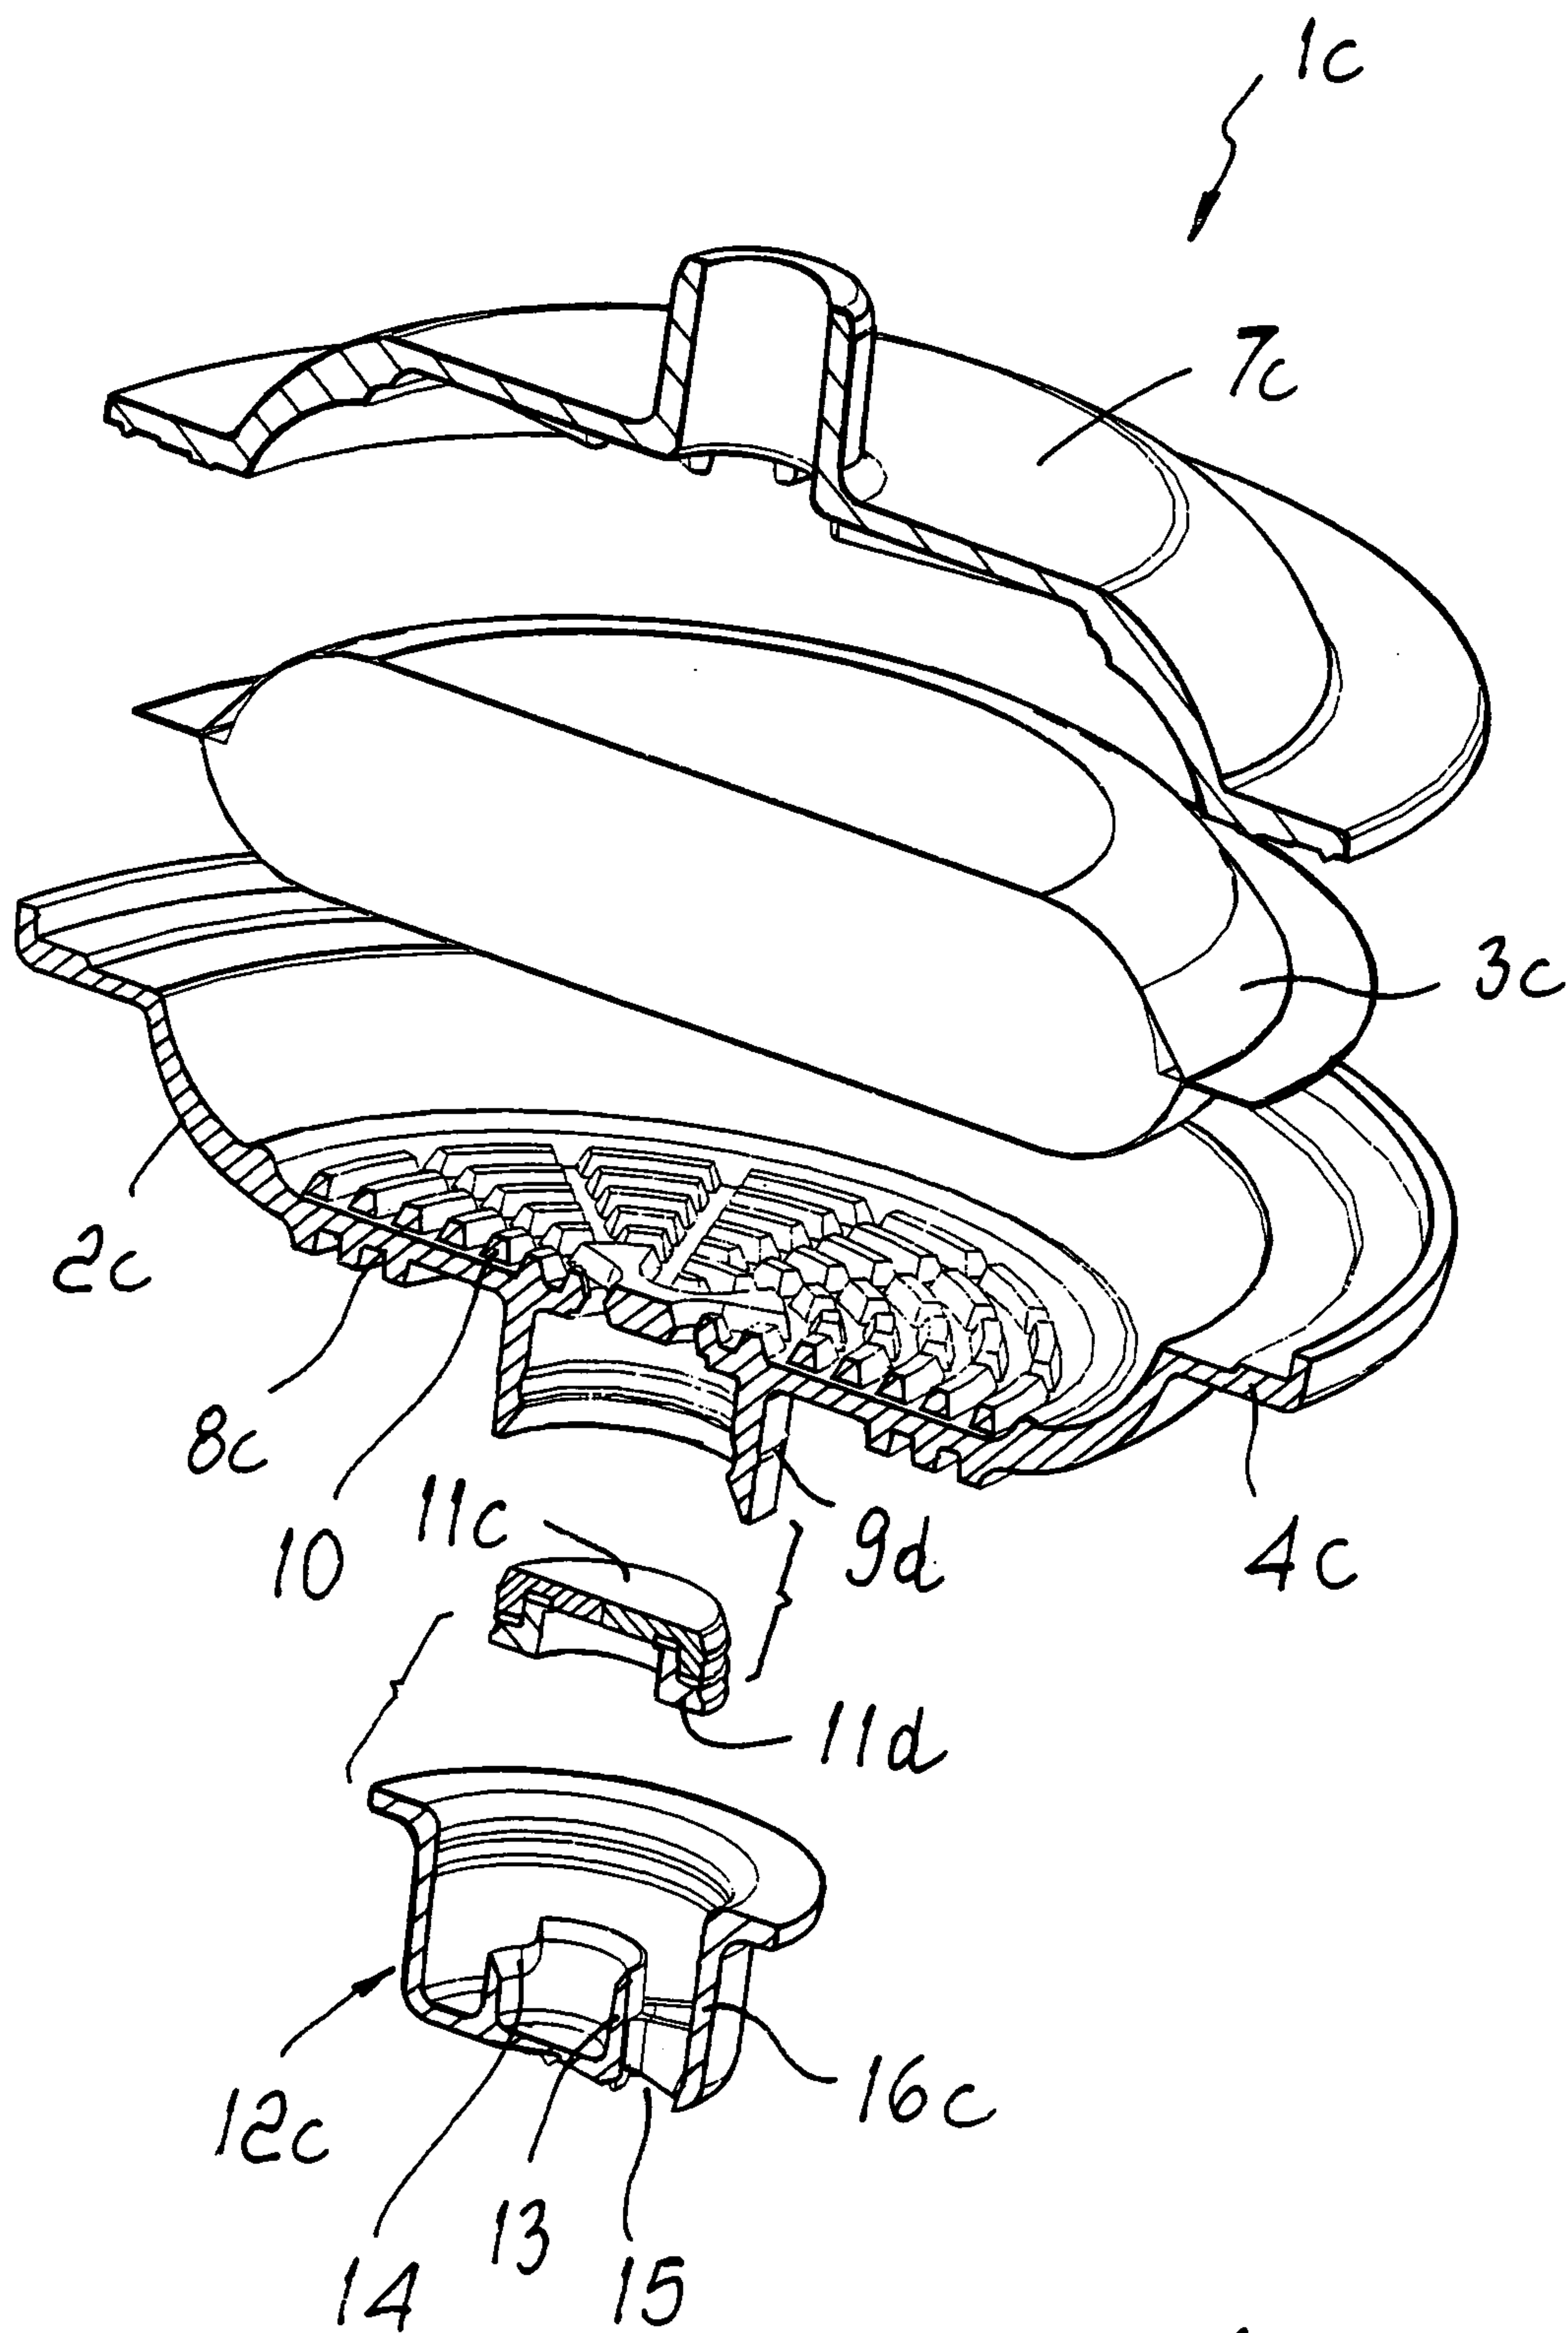


Fig. 4

