



- (51) International Patent Classification:
E04H 4/16 (2006.01)
- (21) International Application Number:
PCT/US2014/028359
- (22) International Filing Date:
14 March 2014 (14.03.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/792,333 15 March 2013 (15.03.2013) US
- (71) Applicant: HAYWARD INDUSTRIES, INC. [US/US];
620 Division Street, Elizabeth, NJ 07201 (US).
- (72) Inventors: **RENAUD, Benoit, J.**; 3910 Bingham Circle,
Apt. #203, Clemmons, NC 27012 (US). **HARDY, David, J.**;
3980 Baroton Lane, Clemmons, NC 27102 (US).
- (74) Agents: **NIKOLSKY, Mark** et al.; McCarter & English,
LLP, Four Gateway Center, 100 Mulberry Street, Newark,
NJ 07102 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: AUTOMATIC ELECTRIC TOP BOTTOM SWIMMING POOL CLEANER WITH INTERNAL PUMPS

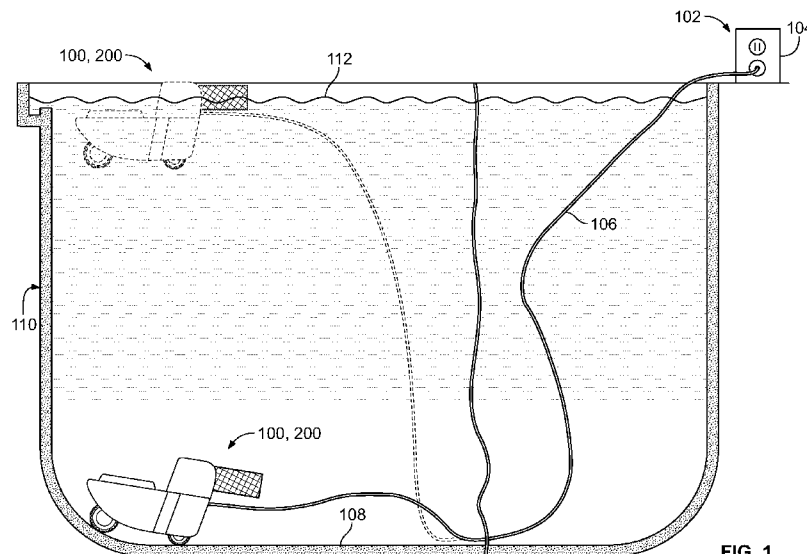


FIG. 1

(57) Abstract: The present disclosure relates to an electric top bottom cleaner for pools or spas that includes internal pumps for suction and propulsion purposes. The pool cleaner includes a housing having a front end, a rear end, a first side, a second side, a bottom wall, and a top wall, with a first aperture extending through the bottom wall and a second aperture extending through the top wall. A tube extends through the housing between the first aperture and the second aperture. A debris retention mechanism is connectable to the housing. A first pump, a second pump, and a third pump are positioned within the housing.

WO 2014/144093 A1

**AUTOMATIC ELECTRIC TOP BOTTOM SWIMMING POOL
CLEANER WITH INTERNAL PUMPS**

BACKGROUND

5

CROSS- REFERENCE TO RELATED APPLICATIONS

The present application claims the priority of U.S. Provisional Application Serial No. 61/792,333 filed March 15, 2013, the disclosure of which is expressly incorporated herein by reference in its entirety.

10

TECHNICAL FIELD

The present disclosure relates to apparatus for cleaning a swimming pool, and, more specifically, to an automatic electric top bottom swimming pool cleaner with internal pumps.

15

RELATED ART

Swimming pools generally require a certain amount of maintenance. Beyond the treatment and filtration of pool water, the walls of the pool should be scrubbed regularly. Further, leaves and various debris can float on the surface of the pool water, which should be removed regularly. This means that a pool cleaner should be capable of cleaning both the walls of the pool as well as the surface of the pool water. Alternatively, two separate cleaning apparatus would be required, or conventional means of handheld cleaning must be employed.

Swimming pool cleaners adapted to rise proximate a water surface of a pool for removing floating debris therefrom and to descend proximate to a wall surface of the pool for removing debris therefrom are known in the art. These “top-bottom” cleaners are often pressure-type or positive pressure pool cleaners that require a source of pressurized water to be in communication therewith. This source of pressurized water could include a booster pump or pool filtration system. Generally, this requires a hose running from the pump or system to the cleaner head.

Robotic cleaners have been developed to routinely navigate about the pool walls, cleaning as they go. Robotic cleaners do not require an external filtration system to be running or connected thereto. Instead, a pumping system, utilizing a large propeller style

impeller continuously circulates a large quantity of water to produce the required suction to remove debris from the pool floor. This water is further circulated through an internal filter assembly capturing debris therein. This pumping system results in a substantial reduction in operating costs compared to a cleaner that must be connected to a pool
5 filtration system. A rotating cylindrical roller (formed of foam and/or provided with a brush) can be included on the bottom of the unit to scrub the pool walls. Electric pool cleaners often do not require an external source of pressurized water for propulsion purposes. Instead, electric pool cleaners generally include a drive system that can operate drive tracks or wheels associated with the cleaner, causing the cleaner to traverse the
10 bottom surface of the pool floor.

Accordingly, there is a need for a pool cleaner that is capable of cleaning both the pool water surface and the pool walls, and does not require an external source of pressurized water.

15

SUMMARY

The present disclosure relates to an electric top bottom cleaner for pools or spas that includes internal pumps for suction and propulsion purposes. The pool cleaner includes a housing having a front end, a rear end, a first side, a second side, a bottom wall, and a top wall, with a first aperture extending through the bottom wall and a second aperture extending through the top wall. The first and second apertures could include any opening having any desired shape or size. A tube extends through the housing between the first aperture and the second aperture. A debris retention mechanism is connectable to the housing. A first pump, second pump, and third pump are positioned within the housing.

5 The first pump is in fluidic communication with a forward thrust jet nozzle positioned generally at a top of the rear end and at least one vacuum jet nozzle positioned to discharge water through the tube. The second pump is in fluidic communication with a lift/thrust jet nozzle positioned generally at a bottom of the rear end and a skim jet nozzle positioned to discharge water toward the debris retention mechanism. The third pump is in fluidic

10 communication with at least one spinout jet nozzle positioned on the housing to generally offset a regular course of travel of the pool cleaner. A power supply is external to the housing and provides power to the first pump, the second pump, and the third pump. A controller is connected to and provides control instructions to the first pump, the second pump, and the third pump to switch the pool cleaner between a bottom mode, a top mode,

15 and a spinout mode. When the pool cleaner is in the bottom mode, the first pump is energized and pumps fluid to the forward thrust jet nozzle and the at least one vacuum jet nozzle, the forward thrust jet nozzle propels the pool cleaner in a generally forward direction and the at least one vacuum jet nozzle discharges water through the tube and into the debris retention mechanism. When the pool cleaner is in the top mode, the second

20 pump is energized and pumps fluid to the lift jet nozzle and the skim jet nozzle, the lift/thrust jet nozzle propels the pool cleaner in a generally forwardly and upwardly direction and the skim jet nozzle discharges water into the debris retention mechanism. When in the spinout mode, the third pump is energized and pumps fluid to the at least one spinout jet nozzle, the at least one spinout jet nozzle discharges water to offset the general

25 path of the pool cleaner.

30

In another aspect, the pool cleaner includes a housing having a front end, a rear end, a first side, a second side, a bottom wall, and a top wall, with a first aperture extending through the bottom wall and a second aperture extending through the top wall.

A tube extends through the housing and between the first aperture and the second aperture. A debris retention mechanism is connectable to the housing. A pump, a first valve, and a second valve are positioned within the housing. The first valve receives fluid from the pump, and is in fluidic communication with the second valve and at least one spinout jet nozzle positioned on the housing to generally offset a regular course of travel of the pool cleaner. The second valve receives fluid from the first valve, and is in fluidic communication with a forward thrust jet nozzle positioned generally at a top of the rear end of the housing, at least one vacuum jet nozzle positioned to discharge water through the tube, a lift/thrust jet nozzle generally positioned at a bottom of the rear end of the housing, and a skim jet nozzle positioned to discharge water toward the debris retention mechanism. An electric power supply is external to the housing and provides electric power to the pump. A controller is in communication with the pump, the first valve, and the second valve. The controller provides control instructions to the pump, the first valve, and the second valve to switch the first valve between a first position and a second position, and to switch the second valve between a third position and a fourth position. When the first valve is in the first position it provides pressurized fluid to the at least one spinout jet nozzle which discharges fluid to offset the general path of the pool cleaner. When the first valve is in the second position it provides pressurized fluid to the second valve. When the first valve is in the second position and the second valve is in the third position the second valve provides pressurized fluid to the forward thrust jet nozzle and the at least one vacuum jet nozzle, such that the forward thrust jet nozzle propels the pool cleaner in a generally forward direction and the at least one vacuum jet nozzle discharges water through the tube. When the first valve is in the second position and the second valve is in the fourth position the second valve provides pressurized fluid to the lift/thrust jet nozzle and the skim jet nozzle, such that the lift/thrust jet nozzle propels the pool cleaner in a generally forwardly and upwardly direction and the skim jet nozzle discharges water into the debris retention mechanism.

In another aspect, the pool cleaner includes a housing defining an internal chamber, a debris retention mechanism, a first pump, a second pump, a third pump, and a controller. The first pump, second pump, and third pump are positioned within the internal chamber and receive power from a power supply external from the pool cleaner. The controller controls operation of the first, second, and third pumps. The first pump provides pressurized water to at least one vacuum jet nozzle for removing debris from a pool surface

and at least one forward thrust jet nozzle for providing forward propulsion of the pool cleaner. The second pump provides pressurized water to at least one lift/thrust jet nozzle for propelling the pool cleaner to a pool surface and providing forward propulsion of the pool cleaner, and a skim jet nozzle for discharging water into the debris retention
5 mechanism. The third pump provides pressurized water to at least one spinout jet nozzle for discharging fluid to offset the general path of the pool cleaner.

In another aspect, the pool cleaner includes a housing defining an internal chamber, a debris retention mechanism, a pump positioned within the internal chamber, a first valve positioned within the internal chamber, a second valve positioned within the internal
10 chamber, a controller, and a power supply. The controller controls operation of the pump, the first valve, and the second valve, switching the first valve between a first position and a second position, and the second valve between a third position and a fourth position. The power supply provides power to the pump, the controller, the first valve, and the second valve. When the first valve is in the first position it provides pressurized fluid to at least
15 one spinout jet nozzle for discharging fluid to offset the general path of the pool cleaner. When the first valve is in the second position it provides pressurized fluid to the second valve. When the first valve is in the second position and the second valve is in the third position the second valve provides pressurized fluid to at least one vacuum jet nozzle for removing debris from a pool surface and at least one forward thrust jet nozzle for
20 providing forward propulsion of the pool cleaner. When the first valve is in the second position and the second valve is in the fourth position the second valve provides pressurized fluid to at least one lift/thrust jet nozzle for propelling the pool cleaner to a pool surface and providing forward propulsion of the pool cleaner, and a skim jet nozzle for discharging water into the debris retention mechanism.

In some aspects, the pool cleaner can also include a front wheel rotatably positioned on the front end of the housing, a first rear wheel rotatably positioned on the first side of the housing, and a second rear wheel rotatably positioned on the second side of the housing. The front wheel, the first rear wheel, and the second rear wheel can support the housing on a surface of a pool. In other aspects, the pool cleaner can include two
30 wheels rotatably positioned on the first side of the housing and two wheels rotatably positioned on the second side of the housing that can support the housing on a surface of a pool. In one aspect, the rear wheels can be driven by an electric motor. Further, the rear wheels could be paddle wheels, which could be propelled by gears using pressurized water

or by an electric motor. A rotating cylindrical roller (formed of foam and/or provided with a brush) could be included on the bottom of the pool cleaner to scrub the pool walls.

In still other aspects, the pool cleaner can also include a vacuum jet nozzle manifold containing the at least one vacuum jet nozzle and positioned within the tube. The
5 jet nozzle manifold receives fluid from the second valve and directs the fluid to the at least one vacuum jet nozzle.

In some aspects, the pool cleaner can include one, or a plurality, of vacuum jet nozzles, for example, two, three, four, or more vacuum jet nozzles. The vacuum jet nozzles can be positioned and arranged to discharge fluid in a helical path.

10 The pool cleaner can include a timer mechanism associated with the power source and the controller allowing the control operations to be programmed.

In one aspect, a pump for use with a pool cleaner is provided. The pump includes an inlet for receiving water, a body defining a chamber, and a plurality of vanes positioned in the chamber. The vanes are rotatable in a first direction and in a second direction. A
15 first valve is provided adjacent a first outlet, and a second valve is provided adjacent a second outlet. When the vanes rotate in a first direction, the vanes pressurize the water such that the water forces the first valve to open, allowing pressurized water to exit through the first outlet, and allowing the second valve to remain closed. When the vanes rotate in a second direction, the vanes pressurize the water such that the water forces the second valve
20 to open, allowing pressurized water to exit through the second outlet, and allowing the first valve to remain closed.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing features of the invention will be apparent from the following Detailed Description, taken in connection with the accompanying drawings, in which:

FIG. 1 is a schematic representation depicting the overall operation of a pool cleaner of the present disclosure;

FIG. 2 is a side elevational view of the pool cleaner according to a first exemplary embodiment of the present disclosure shown in **FIG. 1**;

FIG. 3 is a block diagram depicting the electrical connections and water flow distribution of the first exemplary embodiment of the present disclosure;

FIG. 4A is a block diagram depicting the water flow distribution of the bottom mode pump of the present disclosure;

FIG. 4B is a block diagram depicting the water flow distribution of the top mode pump of the present disclosure;

FIG. 4C is a block diagram depicting the water flow distribution of the turn/backup pump of the present disclosure;

FIG. 5 is a block diagram depicting the electrical connections and water flow distribution of a second exemplary embodiment of the present disclosure;

FIG. 6 is a side elevational view of the pool cleaner of a third embodiment of the present disclosure;

FIG. 7 is a block diagram depicting the electrical connections and water flow distribution of the third exemplary embodiment of the present disclosure;

FIG. 8A is a block diagram depicting the water flow distribution of the bottom mode operation of the third embodiment of the present disclosure;

FIG. 8B is a block diagram depicting the water flow distribution of the top mode operation of the third embodiment of the present disclosure;

FIG. 8C is a block diagram depicting the water flow distribution of the turn/backup operation of the third embodiment of the present disclosure;

FIG. 9A is a block diagram depicting the electrical connections and water flow distribution of a fourth exemplary embodiment of the present disclosure;

FIG. 9B is a block diagram depicting the electrical connections and water flow distribution of a fifth exemplary embodiment of the present disclosure;

FIG. 10A is a top view of an exemplary vacuum jet nozzle manifold of the present disclosure having a single vacuum jet nozzle;

FIG. 10B is a top view of an exemplary vacuum jet nozzle manifold of the present disclosure having two vacuum jet nozzles;

FIG. 10C is a top view of an exemplary vacuum jet nozzle manifold of the present disclosure having three vacuum jet nozzles;

5 **FIG. 10D** is a top view of an exemplary vacuum jet nozzle manifold of the present disclosure having four vacuum jet nozzles;

FIG. 11A is a top view of an exemplary dual directional flow pump of the present disclosure;

FIG. 11B is a top plan view of the dual directional flow pump of **FIG. 11A**;

10 **FIG. 11C** is a top plan view of another dual directional flow pump of the present disclosure in a first configuration;

FIG. 11D is a top plan view of the dual directional flow pump of **FIG. 11C** in a second configuration;

15 **FIG. 11E** is a top plan view of an another dual directional flow pump of an exemplary embodiment of the present disclosure; and

FIG. 12 is a side elevational view of the pool cleaner according to a sixth exemplary embodiment of the present disclosure.

20

DETAILED DESCRIPTION

The present invention relates to an automatic electric top bottom swimming pool cleaner with internal pumps, as discussed in detail below in connection with **FIGS. 1-12**.

With initial reference to **FIGS. 1** and **2**, a cleaner assembly generally includes a cleaner **100** and a power source such as an external power supply **102**. The power supply **102** is generally housed in a transformer/control box **104**. A power/control cable **106** is in communication with, and extends between, the transformer/control box **104** and the cleaner **100**, placing the two in electrical communication. In an exemplary embodiment, the pool cleaner **100** is an electric pool cleaner. Additional and/or alternative power sources are contemplated.

As shown in **FIG. 1**, the cleaner **100** is adapted to clean an interior wall **108** of a swimming pool **110** and an upper surface **112** of water contained therein. As a result, the cleaner **100**, in typical operation, alternates between two cleaning operations. A first cleaning operation is a water cleaning mode (“top mode”) in which the cleaner **100** rises to, and travels along, the upper surface **112** of the water collecting and removing floating debris therefrom. A second cleaning operation is a wall surface cleaning mode (“bottom mode”) in which the cleaner **100** descends proximate to the interior wall **108** of the swimming pool **110** to remove debris therefrom. The cleaner **100** is also adapted to periodically alternate to a turn/backup mode from the bottom or top mode, in which the cleaner **100** turns away from the direction of its generally forward motion in an arcuate sideward path, or moves in a backwards direction, so as to prevent the cleaner **100** from being trapped by an obstruction (e.g., a corner of a swimming pool).

Referring to **FIG. 2**, the cleaner **100** generally includes a housing or body **114**, front center wheel **116**, and rear wheels **118**. The housing or body includes a chassis **120** having a cover **122** and a decking **123** removably or fixedly attached to the chassis **120**. The chassis **120** generally defines a central cavity **124** for housing various electrical components, mechanical components, tubing, and wiring, generally associated with the various pumping systems, which are discussed in greater detail below. A vacuum inlet **126** is formed on the underside of the chassis **120** while a suction tube **128** extends from the vacuum inlet **126** in an upward and rearward direction. Housed within the central cavity **124** of the chassis **120** are a plurality of pumping systems.

FIG. 3 is a block diagram depicting the electrical connections and water flow distribution of the present invention. The bottom mode pumping system **130** includes a

bottom mode pump **132**, an outlet hose **134**, a hose splitter **136**, a forward thrust jet hose **138**, a vacuum jet hose **140**, a vacuum jet nozzle manifold **142**, a forward thrust jet nozzle **144**, and a plurality of vacuum jet nozzles **146a**, **146b**. The top mode pumping system **148** includes a top mode pump **150**, an outlet hose **152**, a hose splitter **154**, a thrust jet hose **156**, a skim jet hose **158**, a lift/thrust jet nozzle **160**, and a skim jet nozzle **162**. The turn/backup pumping system **164** includes a turn/backup pump **166**, an outlet hose **167**, a hose splitter **168**, spin-out jet hoses **169**, one or more front spin-out jet nozzles **170** (front turn/backup jet nozzles), and one more rear spin-out jet nozzles **171** (rear turn/backup jet nozzles).

Each pump **132**, **150**, **166** includes an inlet for receiving a constant supply of water, which is drawn from the swimming pool **110** when the cleaner **100** is submerged. Specifically, the cleaner **100** could include a water supply inlet (not shown) extending through the chassis **120**. A hose (not shown) could be attached to the water supply inlet and run to a splitter that divides the hose into three separate hoses each running to a respective pump inlet. The hose and water supply inlet place the pumps **132**, **150**, **166** in fluidic communication with the pool water, so that the pumps **132**, **150**, **166** can draw water from the swimming pool **110** and have a constant supply of water when the cleaner **100** is submerged in the swimming pool **110**. Further, this allows the pumps **132**, **150**, **166** to be provided with a constant supply of water when the cleaner **100** is submerged in the swimming pool **110**. In some embodiments, the water supply inlet could extend through a top wall of the chassis **120** or through a top of the decking **123** such that the effects of gravity, e.g., the pressure of the pool water, allows for the pumps **132**, **150**, **166** to have a constant supply of water, preventing any cavitation or dry running from occurring in the pumps **132**, **150**, **166**. In an alternate embodiment, the chassis **120** could not be fluid tight, or could include one or more openings, such that the central cavity **124** of the cleaner **100** could be exposed to pool water. In this embodiment, each pump **132**, **150**, **166** could pump water from the chassis **120** through their respective pumping systems **130**, **148**, **164**.

Generally, the pumps **132**, **150**, **166** include an impeller which increase the volumetric flow rate of the water through the pump causing an increase in the water pressure, which exits the pump. The water that leaves the pump is injected through each respective nozzle **144**, **146a**, **146b**, **160**, **162**, **170**, **171** at a high pressure and a high velocity. In some instances, e.g., for the vacuum jet nozzles **146a**, **146b**, this high velocity water is injected into a suction tube **128** to create a vacuum effect for removing debris. In

other instances, e.g., for the forward thrust jet nozzle **144**, the lift/thrust jet nozzle **160**, the front spin-out jet nozzle **170**, and the rear spin-out jet nozzle **171**, this high pressure water is utilized to provide propulsion. In still other instances, e.g., for the skim jet nozzle **162**, this high pressure water is utilized to transfer debris into the debris retention mechanism **172** or to keep debris from floating out of the debris retention mechanism **172**.

FIG. 4A is a block diagram depicting the water flow distribution of the bottom mode pump **132**. The bottom mode pumping system **130** includes the vacuum jet nozzle manifold **142**, which is mounted adjacent to the vacuum inlet **126** and oriented such that the vacuum jet nozzles **146a**, **146b** discharge a high velocity stream of water through the suction tube **128** and into the debris retention mechanism **172**, causing a suction effect and removing debris from the interior wall **108** of the swimming pool **110** when the cleaner **100** is in the bottom mode. Two vacuum jet nozzles **146a**, **146b** are illustrated. However, it is contemplated that the pool cleaner **100** can include one, or a plurality, of vacuum jet nozzles, for example, two, three, four, or more vacuum jet nozzles could be used. The vacuum jet nozzles can be arranged in various orientations, such as triangular, quadrilateral, or other geometrically related orientation as may be known in the art. Possible vacuum jet nozzle orientations are illustrated in **FIGS. 10A-10D**. The bottom mode pumping system **130** also includes the forward thrust jet nozzle **144** that extends through a rear wall of a rear portion of the chassis **120**. The forward thrust jet nozzle **144** is adapted for discharging a high velocity stream of water to propel the cleaner **100** in a generally forward path when the cleaner **100** is in the bottom mode. It is contemplated that in some embodiments more than one forward thrust jet nozzle **144** could be utilized.

FIG. 4B is a block diagram depicting the water flow distribution of the top mode pump **150**. The top mode pumping system **148** includes a lift/thrust jet nozzle **160** and a skim jet nozzle **162**. The lift/thrust jet nozzle **160** extends through the rear wall of the rear portion of the chassis **120** and is adapted for discharging a high velocity stream of water so as to place the cleaner **100** proximate to the upper surface **112** and move the cleaner **100** along same when the cleaner **100** is in its top mode. It is contemplated that in some embodiments more than one lift/thrust jet nozzle **160** could be utilized. The chassis **120** is equipped with the decking **123** located at a frontal portion of the chassis **120** and projecting upwardly therefrom. The skim jet nozzle **162** is located on, and extends through, a wall of a decking **123**, which is attached to the chassis **120**. The skim jet nozzle **162** is adapted for discharging a high velocity stream of water so as to drive any debris floating on the upper

surface **112** of the swimming pool **110** into a debris retention mechanism **172** connected to the cover **122**. It is contemplated that in some embodiments the cleaner **100** could be equipped with debris retention jets for retaining any collected debris within the debris retention mechanism **172**, and restricting the collected debris from exiting therefrom. The contemplated debris retention jets could be connected to the bottom mode pumping system **130**, the top mode pumping system **148**, and/or the turn/backup pumping system **164** so that the debris is always retained in the debris retention mechanism **172**.

FIG 4C is a block diagram depicting the water flow distribution of the turn/backup pump **166**. The turn/backup pumping system **164** includes a front spin-out jet nozzle **170** and a rear spin-out jet nozzle **171**. The front spin-out jet nozzle **170** is mounted to a front wall section of the chassis **120**, while the rear spin-out jet nozzle **171** is mounted to the rear wall of the chassis **120**. More particularly, the front and rear spin-out jet nozzles **170**, **171** are angled generally downwardly and are oriented at an angle relative to the longitudinal axis of the cleaner **100** so as to cause the cleaner **100** to spin in a predetermined direction (e.g., in a clockwise direction) and to thereby move away from its forward path in an arcuate sideward path, when the cleaner **100** is in the turn/backup mode. Because both the front and rear spin-out jet nozzles **170**, **171** are directed downwardly, when the cleaner **100** is in the turn/backup mode, it is lifted vertically, facilitating the spinning or rotating motion of the cleaner **100**. Alternatively, the front and rear spin-out nozzles **170**, **171** can have different orientations, and can be positioned at different locations on the cleaner **100**. For instance, the rear spin-out jet nozzle **171** can be positioned on the central axis of the rear wall of the chassis **120** and can be oriented substantially horizontally so as to produce a horizontally discharged spin-out jet directed toward a vertical side wall of the chassis **120**, thereby further facilitating the rotation of the cleaner **100**. Alternatively, for instance, the front and rear spin-out jet nozzles **170**, **171** could be oriented such that the cleaner **100** can move directly backwards and turn.

The cover **122** could include a deck and a pair of side walls projecting from the deck. The deck could include an access opening formed therein and an enclosure wall extending from the deck around the access opening. A door (e.g., a cap) could be pivotally mounted to the deck for closing the access opening. The cover **122** could also include a cross member spanning between the sidewalls. A hole is formed in the deck adjacent a rear end thereof. More particularly, the hole is sized and shaped so as to receive the upper end **129** of the suction tube **128**. The upper end **129** of the suction tube **128** is positioned

flush with the deck of the cover **122**. A rear debris opening is defined by the deck, the side walls, and the cross member. A slot is formed around the rear debris opening. Diverter wheels could be rotatably mounted between the cover **122** and the chassis **120** along the periphery of the chassis **120** for deflecting the cleaner **100** away from an obstruction or a wall of the swimming pool **110**.

The debris retention mechanism **172** is removably attached to the cleaner **100** for receiving debris through the rear debris opening. The debris retention mechanism **172** can include a ring defining a mouth of the debris retention mechanism **172**. The ring can be removably received in the slot and retained therein by a retainer member for attaching the debris retention mechanism **172** to the cleaner **100**. The debris retention mechanism **172** can be a filter bag or a filter bucket.

A front center wheel **116** is mounted to a front portion of the chassis **120**, while rear wheels **118** are mounted to the side walls of the chassis **120**. The front and rear wheels **116**, **118** are freely rotatable and are adapted to support the chassis **120** and hence the cleaner **100** on the interior wall **108** of the swimming pool **110**. In other embodiments, the pool cleaner **100** can include two wheels rotatably positioned on the first side of the chassis **120** and two wheels rotatably positioned on the second side of the chassis **120** that can support the chassis **120** on a surface of a pool.

Referring again to **FIG. 3**, the power/control cable **106** is connected to the cleaner **100** (see **FIG. 1**) and provides power and commands from the transformer/control box **104**, which includes a power supply **102** and a controller **174**, to the bottom mode pump **132**, the top mode pump **150** and the turn/backup pump **166**. The transformer/control box **104** transforms a 120 VAC or 240 VAC (alternating current) input into a 24 VDC (direct current) output, respectively. The 24 VDC is communicated to the cleaner **100**, wherein it powers a plurality of pump motors associated with each of the bottom mode pump **132**, the top mode pump **150** and the turn/backup pump **166**. The controller **174** could be a PC board controller that can communicate with the pumps **132**, **150**, **166** of the cleaner **100**. For example, the controller **174** could turn on one pump at a time based upon a desired mode of operation, e.g., bottom mode, top mode, and/or turn/backup mode. The controller **174** could include a control device, which could be any one of a screen and graphical user interface, mechanical switch, electronic switch, or program included in the controller, which allows a user to quickly switch between the operational modes when necessary.

The controller **174** could include sensors, such as an accelerometer, a gyroscope, and/or a tilt switch for automatically navigating the cleaner **100** around the swimming pool **110**. The controller **174** could be equipped with direction and orientation sensing apparatus, such as a compass, GPS and/or a multi-axis motion sensor to aid in identifying the position and orientation of the cleaner **100** to the controller **174** such that the controller **174** can track the actual path of the cleaner **100** and compare it to a map of the pool surfaces that require cleaning.

In an alternate embodiment, the transformer/control box **104** could include a timer **176** that is in electrical communication with the power supply **102**, the controller **174**, and the pumps **132, 150, 166**, as illustrated in **FIG. 5**, which is a block diagram depicting the electrical connections and water flow distribution of a second exemplary embodiment of the present invention. The timer **176** allows the cleaner **100** to be programmed so that the controller **174** automatically switches between the operational modes without the need for user input. This is beneficial because a user may not be available to switch the cleaner **100** between the modes during the day, which often results in the cleaner **100** functioning for an entire day in bottom mode such that the upper surface **112** of the water is never skimmed and cleaned of floating debris. The timer **176** could either be factory set or can be adapted such that input devices, e.g., remote controls, home automation units, cell phones, graphical user interfaces, etc., connected to the controller **174** allow a consumer to adjust the timing for the best coverage pattern for their pool size/shape. Alternatively, the timer **176** could be a mechanical timer attached to the pumps **132, 150, 166**. The timer **176** could be situated in any desired location, such as in the power supply **102** or in other components of the cleaner **100**.

FIG. 6 is a side elevational view of a third embodiment of the pool cleaner of the present invention. The cleaner **200** generally includes a housing or body **202**, front center wheel **204**, and rear wheels **206**. The housing or body includes a chassis **208** having a cover **210** and a decking **212** removably or fixedly attached to the chassis **208**. The chassis **208** generally defines a central cavity **214** for housing various electrical components, mechanical components, tubing, and wiring, generally associated with the various pumping systems, which are discussed in greater detail below. A vacuum inlet **216** is formed on the underside of the chassis **208** while a suction tube **218** extends from the vacuum inlet **216** in an upward and rearward direction, terminating at an upper end **220**. Housed within the central cavity **214** of the chassis **208** is a pumping system **222**.

FIG. 7 is a block diagram depicting the electrical connections and water flow distribution of the third exemplary embodiment of the present invention. The pumping system **222** includes a pump **224**, an outlet hose **226**, a valve assembly **228**, a front spin-out jet hose **230**, a rear spin-out jet hose **232**, a lift/thrust jet hose **234**, a vacuum jet hose **236**, a vacuum jet nozzle manifold **238**, a forward thrust jet hose **240**, a skim jet hose **242**,
5 a front spin-out jet nozzle **244**, a rear spin-out jet nozzle **246**, a lift/thrust jet nozzle **248**, a first vacuum jet nozzle **250a**, a second vacuum jet nozzle **250b**, a forward thrust jet nozzle **254**, and a skim jet nozzle **256**.

The pump **224** includes an inlet for receiving a constant supply of water, which is
10 drawn from the swimming pool **110** when the cleaner **200** is submerged. Specifically, the cleaner **200** could include a water supply inlet (not shown) extending through the chassis **208**. A hose (not shown) could be attached to the water supply inlet and run to the pump **224** inlet. The hose and water supply inlet place the pump **224** in fluidic communication with the pool water, so that the pump **224** can draw water from the swimming pool **110**
15 and has a constant supply of water when the cleaner **200** is submerged in the swimming pool **110**. In some embodiments, the water supply inlet could extend through a top wall of the chassis **208** or through a top of the decking **212** such that the effects of gravity, e.g., the pressure of the pool water, allows for a constant supply of water to be present, preventing any cavitation or dry running from occurring in the pump **224**. In an alternate
20 embodiment, the chassis **208** is not fluid tight, but could include one or more openings, such that the central cavity **214** of the cleaner **200** could be exposed to pool water. In this embodiment, the pump **224** could pump water from the chassis **208** through the pumping system **222**.

Generally, the pump **224** is constructed in accordance with, and could be the same
25 type of pump as, the bottom mode pump **132**, the top mode pump **150**, and the turn/backup pump **166**, which are discussed above with respect to **FIGS. 2-5**. As such, it is not necessary to describe the pump **224** further.

The valve assembly **228** includes a turn/backup mode valve **228a** and a bottom/top mode valve **228b**. The turn/backup mode valve **228a** and a bottom/top mode valve **228b**
30 could be adjacent to each other or a hose could be located between the turn/backup mode valve **228a** and the bottom/top mode valve **228b**. The valve assembly **228** redirects water flow between the hoses **230**, **232**, **234**, **236**, **240**, **242**, and the respective nozzles **244**, **246**, **248**, **250a**, **250b**, **254**, **256**. The hoses **230**, **232**, **234**, **236**, **240**, **242** and nozzles **244**, **246**,

248, 250a, 250b, 254, 256 are split into three separate groups that correspond to the three separate operational modes, e.g., the turn/backup mode, the top mode, and the bottom mode. The turn/backup mode valve 228a is a two position solenoid valve that switches the flow from the pump 224 between a first position where the water flow is directed to the front spin-out jet hose 230, the rear spin-out jet hose 232, the front spin-out jet nozzle 244, and the rear spin-out jet nozzle 246, and does not flow to the bottom/top mode valve 228b, and a second position where the water flow is directed to the bottom/top mode valve 228b. Similarly, the bottom/top mode valve 228b is a two position solenoid valve that switches the flow provided thereto between the bottom mode (e.g., the vacuum jet hose 236, the vacuum jet nozzle manifold 238, the forward thrust jet hose 240, the vacuum jet nozzles 250a, 250b, and the forward thrust jet nozzle 254) and the top mode (e.g., the lift/thrust jet hose 234, the skim jet hose 242, the lift/thrust jet nozzle 248, and the skim jet nozzle 256).

FIG. 8A is a block diagram depicting the water flow distribution of the bottom mode operation isolated from the other modes. Essentially, FIG. 8A illustrates the water distribution when the cleaner 200 is in bottom mode. The bottom mode comprises the vacuum jet hose 236, the vacuum jet nozzle manifold 238, the forward thrust jet hose 240, the first vacuum jet nozzle 250a, the second vacuum jet nozzle 250b, and the forward thrust jet nozzle 254. The vacuum jet nozzle manifold 238 is mounted adjacent to the vacuum inlet 216 and oriented such that the vacuum jet nozzles 250a, 250b discharge a high velocity stream of water through the suction tube 218 and into the debris retention mechanism 258, causing a suction effect and removing debris from the interior wall 108 of the swimming pool 110 when the cleaner 200 is in its wall surface cleaning or bottom mode. Two vacuum jet nozzles 250a, 250b are illustrated. However, it is contemplated that the pool cleaner 200 can include one, or a plurality, of vacuum jet nozzles, for example, two, three, four, or more vacuum jet nozzles could be used. The vacuum jet nozzles can be arranged in various orientations, such as triangular, quadrilateral, or other geometrically related orientation as may be known in the art. Possible vacuum jet nozzle orientations are illustrated in FIGS. 10A-10D. A jet nozzle assembly could include an annular body having a top opening and a bottom opening, and jet nozzle(s) positioned on an interior wall of the annular body. The bottom mode also includes the forward thrust jet nozzle 254 that extends through a rear wall of a rear portion of the chassis 208. The forward thrust jet nozzle 254 is adapted for discharging a high velocity stream of water to propel the cleaner 200 in a generally forward path when the cleaner 200 is in its bottom

mode. It is contemplated that in some embodiments more than one forward thrust jet nozzle **254** could be utilized.

FIG. 8B is a block diagram depicting the water flow distribution of the top mode operation isolated from the other modes. Essentially, **FIG. 8B** illustrates the water distribution when the cleaner **200** is in top mode. The top mode comprises the lift/thrust jet hose **234**, the skim jet hose **242**, the lift/thrust jet nozzle **248**, and the skim jet nozzle **256**. The lift/thrust jet nozzle **248** extends through the rear wall of the rear portion of the chassis **208** and is adapted for discharging a high velocity stream of water to place the cleaner **200** proximate to the upper surface **112** of the pool water and propel the cleaner **200** along same when the cleaner **200** is in its top mode. It is contemplated that in some embodiments more than one lift/thrust jet nozzle **248** could be utilized. The chassis **208** is equipped with the decking **212** located at a frontal portion of the chassis **208** and projecting upwardly therefrom. The skim jet nozzle **256** is located on, and extends through, a wall of a decking **212**, which is attached to the chassis **208**. The skim jet nozzle **256** is adapted for discharging a high velocity stream of water so as to drive any debris floating on the upper surface **112** of the swimming pool **110** into a debris retention mechanism **258** connected to the cover **210**. It is contemplated that in some embodiments the cleaner **200** could be equipped with debris retention jets for retaining any collected debris within the debris retention mechanism **258**, and restricting the collected debris from exiting therefrom. The contemplated debris retention jets could be connected to the pumping system **222**, and operated during any one of the various modes so that the debris is always retained in the debris retention mechanism **258**.

FIG. 8C is a block diagram depicting the water flow distribution of the turn/backup mode operation isolated from the other modes. Essentially, **FIG. 8C** illustrates the water distribution when the cleaner **200** is in turn/backup mode. The turn/backup mode comprises the front spin-out jet hose **230**, the rear spin-out jet hose **232**, the front spin-out jet nozzle **244**, and the rear spin-out jet nozzle **246**. The front spin-out jet nozzle **244** is mounted to a front wall section of the chassis **208**, while the rear spin-out jet nozzle **246** is mounted to the rear wall of the chassis **208**. More particularly, the front and rear spin-out jet nozzles **244**, **246** are angled generally downwardly and are oriented at an angle relative to the longitudinal axis of the cleaner **200** so as to cause the cleaner **200** to spin in a predetermined direction (e.g., in a clockwise direction) and to thereby move away from its forward path in an arcuate sideward path, when the cleaner **200** is in the turn/backup mode.

Because both the front and rear spin-out jet nozzles **244, 246** are directed downwardly, when the cleaner **200** is in the turn/backup mode, it is lifted vertically, facilitating the spinning or rotating motion of the cleaner **200**. Alternatively, the front and rear spin-out nozzles **244, 246** can have different orientations, and can be positioned at different
5 locations on the cleaner **200**. For instance, the rear spin-out jet nozzle **246** can be positioned on the central axis of the rear wall of the chassis **208** and can be oriented substantially horizontally so as to produce a horizontally discharged spin-out jet directed toward a vertical side wall of the chassis **208**, thereby further facilitating rotation of the cleaner **200**. Alternatively, for instance, the front and rear spin-out jet nozzles **244, 246**
10 could be oriented such that the cleaner **200** can move directly backwards and turn.

The cover **210** could include a deck and a pair of side walls projecting from the deck. The deck could include an access opening formed therein and an enclosure wall extending from the deck around the access opening. A door (e.g., a cap) could be pivotally mounted to the deck for closing the access opening. The cover **210** could also include a
15 cross member spanning between the sidewalls. A hole is formed in the deck adjacent a rear end thereof. More particularly, the hole is sized and shaped so as to receive the upper end **220** of the suction tube **218**. The upper end **220** of the section tube **218** is positioned flush with the deck of the cover **210**. A rear debris opening is defined by the deck, the side walls, and the cross member. A slot is formed around the rear debris opening. Diverter
20 wheels (not shown) could be rotatably mounted between the cover **210** and the chassis **208** along the outer most periphery of the chassis **208**. The diverter wheels could be vertical axis wheels that are parallel to the bottom of a pool, and positioned on the cleaner **200** to deflect the cleaner **200** away from an obstruction or a wall of the swimming pool **110**. Accordingly, the diverter wheels could extend beyond the outer most periphery of the
25 chassis **208** so that they contact an obstruction or swimming pool wall instead of the chassis **208**.

The debris retention mechanism **258** is removably attached to the cleaner **200** for receiving debris through the rear debris opening. The debris retention mechanism **258** can include a ring defining a mouth of the debris retention mechanism **258**. The ring can be
30 removably received in the slot and retained therein by a retainer member for attaching the debris retention mechanism **258** to the cleaner **200**. The debris retention mechanism **258** can be a filter bag or a filter bucket.

A front center wheel **204** is mounted to a front portion of the chassis **208**, while rear wheels **206** are mounted to the side walls of the chassis **208**. The front and rear wheels **204**, **206** are freely rotatable and are adapted to support the chassis **208** and hence the cleaner **200** on the interior wall **108** of the swimming pool **110**. In other embodiments, the pool cleaner **200** can include two wheels rotatably positioned on the first side of the chassis **208** and two wheels rotatably positioned on the second side of the chassis **208** that can support the chassis **208** on a surface of a pool.

Referring again to **FIG. 7**, the power/control cable **106** is connected to the cleaner **200** (see **FIG. 1**) and provides power and commands from the transformer/control box **104**, which includes a power supply **102** and a controller **174**, to the pump **224** and the valve assembly **228**. The transformer/control box **104** transforms a 120 VAC or 240 VAC (alternating current) input into a 24 VDC (direct current) output, respectively. One of ordinary skill in the art would understand that the transformer/control box **104** could transform the input voltage into any output voltage that may be known in the art, e.g., 12 VDC, 36 VDC, etc. The 24 VDC is communicated to the cleaner **200**, wherein it powers a pump motor associated with the pump **224** and solenoids or servo motors associated with the turn/backup mode valve **228a** and the bottom/top mode valve **228b** of the valve assembly **228**. The controller **174** can be provided as a PC board controller that can communicate with the pump **224** and the valve assembly **228**. The controller **174** can include a control device, which could be any one of a screen and graphical user interface, mechanical switch, electronic switch, or program included in the controller, that allows a user to activate the cleaner **200** or quickly switch between the various modes when necessary. Specifically, when switching between modes, the controller **174** communicates with the valve assembly **228** to cause the turn/backup mode valve **228a** and the bottom/top mode valve **228b** to switch from one hose and nozzle grouping to another grouping, whereby flow is only allowed through the grouping that is activated.

In an alternate embodiment, the transformer/control box **104** could include a timer **176** that is in electrical communication with the power supply **102**, the controller **174**, the pump **224**, and the valve assembly **228**, as illustrated in **FIG. 9A**, which is a block diagram depicting the electrical connections and water flow distribution of a fourth exemplary embodiment of the present invention. The timer **176** allows the cleaner **200** to be programmed so that the controller **174** automatically switches the valve assembly **228** between the various modes without the need for user input. This is beneficial, for

example, because a user might not be available to switch the cleaner **200** between the modes during the day, which often results in the cleaner **200** functioning for the day in bottom mode such that the upper surface **112** of the water accumulates floating debris. The timer **176** could either be factory set or can be adapted such that input devices connected to the controller **174**, e.g., remote controls, home automation units, cell phones, graphical user interfaces, etc., allow a consumer to adjust the timing for the best coverage pattern for their pool size/shape. Alternatively, the timer **176** could be a mechanical timer.

FIG. 9B is a block diagram depicting the electrical connections and water flow distribution of a fifth exemplary embodiment of the present invention. The electrical connections and water flow distribution of **FIG. 9B** is similar in structure as described in connection with **FIG. 9A**. In this embodiment, a hose **229** is provided between the turn/backup mode valve **228a** and the bottom/top mode valve **228b**. Separate power/control cables **106** are in communication with the pump **224**, the turn/backup mode valve **228a**, and the bottom/top mode valve **228b**.

The incorporation of pump(s) into the cleaner shown in FIGS. 2 and 6 differs from traditional robotic cleaners in that the water jet propulsion replaces the traditional drive tracks or wheels, and is also utilized to turn or change direction during operation. This incorporation reduces the complexity of the cleaner by reducing the amount of moving parts. Further, the incorporation of the pump(s) into the cleaner differs from traditional positive pressure pool cleaners by not requiring for the pool filtration system to be running to operate the cleaner.

FIGS. 11A-11D show an embodiment of a dual directional flow pump, e.g., pump **132, 150, 166, 224**, that can be used with the above described cleaners **100, 200** of **FIGS. 1-10**. Particular reference is made to **FIG. 11A**, which is a top view of a centrifugal pump **132, 150, 166, 224**, which for ease of reference will be referred to as pump **132**. However, one of ordinary skill in the art would understand that the pump **132** could also be implemented as the pump **150, 166, 224**. The pump **132** includes a body **260**, a first outlet **262**, a second outlet **264**, and an inlet **266**. A first flow path **A** exits the first outlet **262** and a second flow path **B** exits the second outlet **264**.

FIG. 11B is a top plan view of the pump **132** of **FIG. 11A**. The pump body **260** defines an inner chamber **268** that includes a plurality of vanes **270** that form an impeller and are rotatable about the inlet **266**. A first spring-loaded flap valve **274** is provided adjacent the first outlet **262**, and a second spring-loaded flap valve **272** is provided

adjacent the second outlet **264**. Water is provided to the pump **132** through the inlet **266**, where it enters the body **260**. The vanes **270** accelerate the water radially and force the water out of the first and second outlets **262**, **264** depending on rotational direction of the vanes **270**. Specifically, when the vanes **270** rotate clockwise, the vanes **270** pressurize and accelerate the water such that the water forces the second spring-loaded flap valve **272** open, allowing the pressurized water to exit the pump **132** through the second outlet **264**. The first spring-loaded flap valve **274** remains closed due to the direction of flow exiting the pump **132**. Alternatively, when the vanes **270** rotate counter-clockwise, the vanes **270** pressurize and accelerate the water such that the water forces the first spring-loaded flap valve **274** open, allowing the pressurized water to exit the pump **132** through the first outlet **262**. The second spring-loaded flap valve **272** remains closed due to the direction of flow exiting the pump **132**. The dual direction flow of the pump **132** can be achieved, for example, by providing a motor (not shown) associated with the pump **132** with an energy having a positive polarity to achieve clockwise rotation, and with an energy have a negative polarity to change the rotation to counter-clockwise.

FIGS. 11C-11D show another embodiment of the dual directional flow centrifugal pump **132** of **FIGS. 11A-11B**. Particular reference is made to **FIG. 11C**, which is a top plan view of the dual directional flow centrifugal pump **132**. In the embodiment shown in **FIG. 11C**, the pump **132** can include a plurality of vanes **276** that are each rotatable about an axis **278** (e.g., a pin). The vanes **276** may be rotatable about the axis **278** a set amount that is relative to a “radial position,” e.g., the position of the vanes **270** shown in **FIGS. 11A-11B**. For example, the vanes **276** could rotate about the axis **278** between -15° and $+15^\circ$ from the “radial position.” Each of the vanes **276** could include a stopper (not shown) the restricts the vane **276** from rotating further than -15° or $+15^\circ$. Accordingly, the vanes **276** are rotatable about the axis **278**, and the vanes **276** and axis **278** combination are rotatable about the inlet **266**. The orientation of the vanes **276** about the axis **278** will be determined by the rotational direction of the vanes **276** about the inlet **266**.

FIG. 11C shows the vanes **276** rotated a positive amount, e.g., clockwise, from the “radial position” about the axis **278**. This position occurs when the vanes **276** rotate counter-clockwise about the inlet **266**. Accordingly, when the vanes **276** rotate counter-clockwise about the inlet **266**, the rotational force will cause the vanes **276** to rotate clockwise about the axis **278**, and the vanes **276** will pressurize and accelerate water that is

in the body **260**. The pressurized water forces a first spring-loaded flap valve **282** open, allowing the pressurized water to exit the pump **132** through the first outlet **262**.

FIG. 11D shows the vanes **276** rotated a negative amount, e.g., counter-clockwise, from the “radial position” about the axis **278**. This position occurs when the vanes **276** rotate clockwise about the inlet **266**. Accordingly, when the vanes **276** rotate clockwise about the inlet **266**, the rotational force will cause the vanes **276** to rotate counter-clockwise about the axis **278**, and the vanes **276** will pressurize and accelerate water that is in the body **260**. The pressurized water forces a second spring-loaded flap valve **280** open, allowing the pressurized water to exit the pump **132** through the second outlet **264**.

Accordingly, the pump **132** can be positioned in a system that utilizes alternating directional flow. For example, the pump **132** could be positioned between the forward thrust jet nozzle **144** and the front spin-out jet nozzle **170** of **FIG. 2**, such that the first pump outlet **262** is connected with the forward thrust jet nozzle **144** and the second pump outlet **264** is connected with the front spin-out jet nozzle **170**. In such an arrangement, the pump **132** can alternate between providing the forward thrust jet nozzle **144** and the front spin-out jet nozzle **170** with pressurized water by switching rotational direction of the pump vanes **270**. In such circumstances, the control instructions provided to the pump can include an off instruction, a forward (and/or clockwise) direction instruction, and/or a reverse (and/or counter-clockwise) direction instruction. It is further contemplated that the motor of the pump can be provided with a variable frequency to control the rotational speed of the motor to influence the magnitude of the propulsive force of the water flow through a nozzle.

FIG. 11E shows an embodiment of the dual directional flow pump **166** that can be used with the above described cleaner **200** of **FIGS. 6-10**. In this embodiment, the turn/backup pump **166** replaces the turn/backup mode valve **228a**. In particular, when the vanes **270** rotate clockwise, the vanes **270** pressurize and accelerate the water such that the water forces the second spring-loaded flap valve **272** open, allowing the pressurized water to exit the pump **166** through the second outlet **264**, depicted by second flow path **B**. In the second flow path **B**, the water flow is directed to the front spin-out jet hose **230**, the rear spin-out jet hose **232**, the front spin-out jet nozzle **244**, and the rear spin-out jet nozzle **246**, and does not flow to the bottom/top mode valve **228b**. The first spring-loaded flap valve **274** remains closed due to the direction of flow exiting the pump **166**. Alternatively, when the vanes **270** rotate counter-clockwise, the vanes **270** pressurize and accelerate the

water such that the water forces the first spring-loaded flap valve **274** open, allowing the pressurized water to exit the pump **166** through the first outlet **262**, depicted by second flow path **A**. In the second flow path **A**, the water flow is directed to the bottom/top mode valve **228b**. The second spring-loaded flap valve **272** remains closed due to the direction
5 of flow exiting the pump **166**.

FIG. 12 is a side elevational view of the pool cleaner according to a sixth exemplary embodiment of the present disclosure. The cleaner of **FIG. 12** is similar in structure as described in connection with **FIG. 2**. In this embodiment, the suction tube **128** is at an angle that is perpendicular with respect to the interior wall **108** of the swimming
10 pool **100** (e.g., perpendicular with respect to a cleaning surface over which the cleaner is traveling). The bottom mode pumping system **130** includes only the vacuum jet nozzle manifold **142**, and does not include the forward thrust jet nozzle **144**. In this embodiment, traditional wheels are utilized to propel the cleaner rather than the water jet propulsion when the cleaner is in the bottom mode. In particular, the cleaner **100**, when in the bottom
15 mode, is propelled by the rear wheels **118**, which can be powered by an electric motor **178**. A drive transfer system (not shown) could be used to transfer power from the motor **178** to the rear wheels **118**. The drive transfer system could be used to steer the cleaner in left, right, forward, and/or backward directions.

Although the foregoing disclosure was discussed in connection with pools and spas, it is to be understood that the systems and methods disclosed herein could be utilized
20 in connection with any body of water where sanitization is necessary, e.g., fountains, ponds, water features, etc.

It will be understood that the embodiments of the present invention described herein are merely exemplary and that a person skilled in the art may make many variations
25 and modifications without departing from the spirit and the scope of the invention.

CLAIMS

What is claimed is:

1. A pool cleaner, comprising:
 - a housing having a front end, a rear end, a first side, a second side, a bottom wall,
5 and a top wall;
 - a first aperture extending through the bottom wall;
 - a second aperture extending through the top wall;
 - a tube extending through the housing and between the first aperture and the second
aperture;
 - 10 a debris retention mechanism connected to the housing;
 - a first pump and a second pump positioned within the housing;
 - the first pump in fluidic communication with at least one vacuum jet nozzle
positioned to discharge water through the tube;
 - the second pump in fluidic communication with a lift/thrust jet nozzle positioned
15 generally at a bottom of the rear end and a skim jet nozzle positioned to discharge water
toward the debris retention mechanism;
 - a power supply external to the housing, the power supply providing power to the
first pump and the second pump; and
 - a controller connected to the first pump and the second pump, the controller
20 providing control instructions to the first pump and the second pump, to switch the pool
cleaner between a bottom mode and a top mode;
 - wherein when the pool cleaner is in the bottom mode, the first pump is energized
and pumps fluid to the at least one vacuum jet nozzle, the at least one vacuum jet nozzle
discharging water through the tube; and
 - 25 wherein when the pool cleaner is in the top mode, the second pump is energized
and pumps fluid to the lift jet nozzle and the skim jet nozzle, the lift/thrust jet nozzle
propelling the pool cleaner in a generally forwardly and upwardly direction and the skim
jet nozzle discharging water into the debris retention mechanism.
2. The pool cleaner of claim 1, further comprising a third pump positioned within the
30 housing, the third pump in fluidic communication with at least one spinout jet nozzle
positioned on the housing to generally offset a regular course of travel of the pool cleaner;

3. The pool cleaner of claim 2, wherein the power supply provides power to the third pump, the controller connected to the third pump, the controller providing control instructions to the first pump, the second pump, and the third pump to switch the pool cleaner between the bottom mode, the top mode, and a spinout mode.
- 5 4. The pool cleaner of claim 3, wherein when the cleaner is in the spinout mode, the third pump is energized and pumps fluid to the at least one spinout jet nozzle, the at least one spinout jet nozzle discharging water to offset the general path of the pool cleaner.
5. The pool cleaner of claim 1, wherein the first pump is in fluidic communication with a forward thrust jet nozzle, the forward thrust jet nozzle propelling the pool cleaner in
10 a generally forward direction when the pool cleaner is in the bottom mode.
6. The pool cleaner of claim 1, further comprising a wheel and a motor operatively connected to the wheel to propel the pool cleaner in a generally forward direction when the pool cleaner is in the bottom mode.
7. The pool cleaner of claim 1, wherein the tube is perpendicular with respect to a
15 cleaning surface over which the pool cleaner is traveling.
8. The pool cleaner of claim 3, further comprising a timer mechanism in communication with the first pump, the second pump, and the third pump, wherein the timer automatically switches power between the first pump, the second pump, and the third pump based on a timed schedule.
- 20 9. The pool cleaner of claim 8, wherein the timer includes a user-definable program for switching power between the first pump, the second pump, and the third pump.
10. The pool cleaner of claim 1, further comprising a vacuum jet nozzle manifold containing the at least one vacuum jet nozzle and positioned within the tube;
wherein the jet nozzle manifold receives fluid from the first pump and directs the
25 fluid to the at least one vacuum jet nozzle.
11. The pool cleaner of claim 10, wherein the at least vacuum jet nozzle is positioned to discharge fluid in a helical path into the tube.
12. A pool cleaner, comprising:
a housing having a front end, a rear end, a first side, a second side, a bottom wall,
30 and a top wall;
a first aperture extending through the bottom wall;
a second aperture extending through the top wall;

a tube extending through the housing and between the first aperture and the second aperture;

a debris retention mechanism connectable to the housing;

a pump positioned within the housing;

5 a first valve in fluidic communication with a forward thrust jet nozzle positioned generally at a top of the rear end, at least one vacuum jet nozzle positioned to discharge water through the tube, a lift/thrust jet nozzle generally positioned at a bottom of the rear end, and a skim jet nozzle positioned to discharge water toward the debris retention mechanism;

10 a power supply external to the housing, the power supply providing power to the pump; and

a controller in communication with the pump and the first valve, the controller providing control instructions to the pump and the first valve, to switch the first valve between a first position and a second position,

15 wherein when the first valve is in the first position, the first valve provides pressurized fluid to the forward thrust jet nozzle and the at least one vacuum jet nozzle, the forward thrust jet nozzle propelling the pool cleaner in a generally forward direction and the at least one vacuum jet nozzle discharging water through the tube and into the debris retention mechanism; and

20 wherein when the first valve is in the second position, the first valve provides pressurized fluid to the lift/thrust jet nozzle and the skim jet nozzle, the lift/thrust jet nozzle propelling the pool cleaner in a generally forward and upwardly direction and the skim jet nozzle discharging water into the debris retention mechanism.

13. The pool cleaner of claim 12, further comprising a second valve receiving fluid
25 from the pump, the first valve receiving fluid from the second valve, the second valve in fluidic communication with at least one spinout jet nozzle positioned on the housing to generally offset a regular course of travel of the pool cleaner, the controller providing control instructions to the second valve to switch the second valve between a third position and a fourth position.

30 14. The pool cleaner of claim 13, wherein when the second valve is in the third position, the second valve provides pressurized fluid to the at least one spinout jet nozzle, the at least one spinout jet nozzle discharging fluid to offset the general path of the pool

cleaner, wherein when the second valve is in the fourth position, the second valve provides pressurized fluid to the first valve.

15. The pool cleaner of claim 14, wherein the first valve is positioned adjacent to the second valve.

5 16. The pool cleaner of claim 14, further comprising a hose separating the first valve and the second valve.

17. The pool cleaner of claim 12, wherein the pump is in fluidic communication with at least one spinout jet nozzle positioned on the housing to generally offset a regular course of travel of the pool cleaner.

10 18. The pool cleaner of claim 17, wherein the pump is operable to provide pressurized fluid to the first valve.

19. The pool cleaner of claim 14, comprising a timer mechanism in communication with the pump, the first valve, and the second valve, wherein the timer automatically switches the first valve between the first position and the second position, and the second
15 valve between the third position and the fourth position based on a timed schedule.

20. The pool cleaner of claim 19, wherein the timer includes a user-definable program for switching the first valve between the first position and the second position, and the second valve between the third position and the fourth position.

21. The pool cleaner of claim 20, further comprising a front wheel rotatably positioned
20 on the front end of the housing, a first rear wheel rotatably positioned on the first side of the housing, and a second rear wheel rotatably positioned on the second side of the housing;

wherein the front wheel, the first rear wheel, and the second rear wheel support the housing on a surface of a pool.

25 22. The pool cleaner of claim 14, comprising a vacuum jet nozzle manifold containing the at least one vacuum jet nozzle and positioned within the tube;

wherein the jet nozzle manifold receives fluid from the second valve and directs the fluid to the at least one vacuum jet nozzle.

23. The pool cleaner of claim 22, wherein the at least one vacuum jet nozzle is
30 positioned to discharge fluid in a helical path into the tube.

24. The pool cleaner of claim 14, wherein the first and second valves are solenoid valves.

25. A pool cleaner, comprising:
a housing defining an internal chamber;
a debris retention mechanism;
a first pump and a second pump positioned within the internal chamber and
5 receiving power from a power supply external from the pool cleaner; and
a controller connected to the first pump and the second pump,
wherein the first pump provides pressurized water to at least one vacuum jet nozzle
for removing debris from a pool surface and propelling the debris into the debris retention
mechanism; and
10 wherein the second pump provides pressurized water to at least one lift/thrust jet
nozzle for propelling the pool cleaner to a pool surface and providing forward propulsion
of the pool cleaner, and a skim jet nozzle for discharging water into the debris retention
mechanism.
26. The pool cleaner of claim 25, further comprising a third pump positioned within the
15 housing, the third pump in fluidic communication with at least one spinout jet nozzle
positioned on the housing to generally offset a regular course of travel of the pool cleaner.
27. The pool cleaner of claim 26, wherein the power supply provides power to the third
pump, and the controller connected to the third pump.
28. The pool cleaner of claim 25, wherein the first pump is in fluidic communication
20 with a forward thrust jet nozzle, the forward thrust jet nozzle propelling the pool cleaner in
a generally forward direction.
29. The pool cleaner of claim 25, further comprising a wheel and a motor operatively
connected to the wheel to propel the pool cleaner in a generally forward direction.
30. The pool cleaner of claim 27, comprising a timer mechanism in communication
25 with the first pump, the second pump, and the third pump,
wherein the timer automatically switches power between the first pump, the second
pump, and the third pump based on a timed schedule.
31. The pool cleaner of claim 30, wherein the timer includes a user definable program
for switching between the first, second, and third pumps.
- 30 32. The pool cleaner of claim 25, further comprising a front wheel rotatably positioned
on a front end of the housing, a first rear wheel rotatably positioned on a first side of the
housing, and a second rear wheel rotatably positioned on a second side of the housing;

wherein the front wheel, the first rear wheel, and the second rear wheel support the housing on a surface of a pool.

33. The pool cleaner of claim 25, further comprising:

a first aperture extending through a first wall of the housing;

5 a second aperture extending through a second wall of the housing;

a tube extending through the housing and between the first aperture and the second aperture.

34. The pool cleaner of claim 33, further comprising a vacuum jet nozzle manifold containing the at least one vacuum jet nozzle and positioned within the tube;

10 wherein the jet nozzle manifold receives fluid from the first pump and directs the fluid to the at least one vacuum jet nozzle.

35. A pool cleaner, comprising:

a housing defining an internal chamber;

a debris retention mechanism;

15 a pump positioned within the internal chamber;

a first valve positioned within the internal chamber;

a second valve positioned within the internal chamber;

a controller in communication with the pump, the first valve, and the second valve, the controller switching the first valve between a first position and a second position, and
20 the second valve between a third position and a fourth position; and

a power supply providing power to the pump, the controller, the first valve, and the second valve,

wherein when the first valve is in the first position, the first valve provides pressurized fluid to at least one spinout jet nozzle for discharging fluid to offset the general
25 path of the pool cleaner;

wherein when the first valve is in the second position, the first valve provides pressurized fluid to the second valve;

wherein when the first valve is in the second position and the second valve is in the third position the second valve provides pressurized fluid to at least one vacuum jet nozzle
30 for removing debris from a pool surface and propelling the debris into the debris retention mechanism, and at least one forward thrust jet nozzle for providing forward propulsion of the pool cleaner; and

wherein when the first valve is in the second position and the second valve is in the fourth position the second valve provides pressurized fluid to at least one lift/thrust jet nozzle for propelling the pool cleaner to a pool surface and providing forward propulsion of the pool cleaner, and a skim jet nozzle for discharging water into the debris retention mechanism.

5

36. The pool cleaner of claim 35, comprising a timer mechanism in communication with the pump, the first valve, and the second valve,

wherein the timer automatically switches the first valve between the first position and the second position, and the second valve between the third position and the fourth position based on a timed schedule.

10

37. The pool cleaner of claim 36, wherein the timer further includes a user definable program for switching the first valve between the first position and the second position, and the second valve between the third position and the fourth position.

38. A pump for use with a pool cleaner, comprising:

15

an inlet for receiving water;

a body defining a chamber;

a plurality of vanes positioned in the chamber, the vanes rotatable in a first direction and in a second direction;

a first outlet and a first valve provided adjacent the first outlet; and

20

a second outlet and a second valve provided adjacent the second outlet, wherein when the vanes rotate in a first direction, the vanes pressurize the water such that the water forces the first valve to open, allowing pressurized water to exit through the first outlet, and allowing the second valve to remain closed, wherein when the vanes rotate in a second direction, the vanes pressurize the water such that the water forces the second valve to open, allowing pressurized water to exit through the second outlet, and allowing the first valve to remain closed.

25

39. The pump of claim 38, wherein the vanes rotate about the inlet.

40. The pump of claim 38, wherein the vanes rotate about an axis in a set amount relative to a radial position.

30

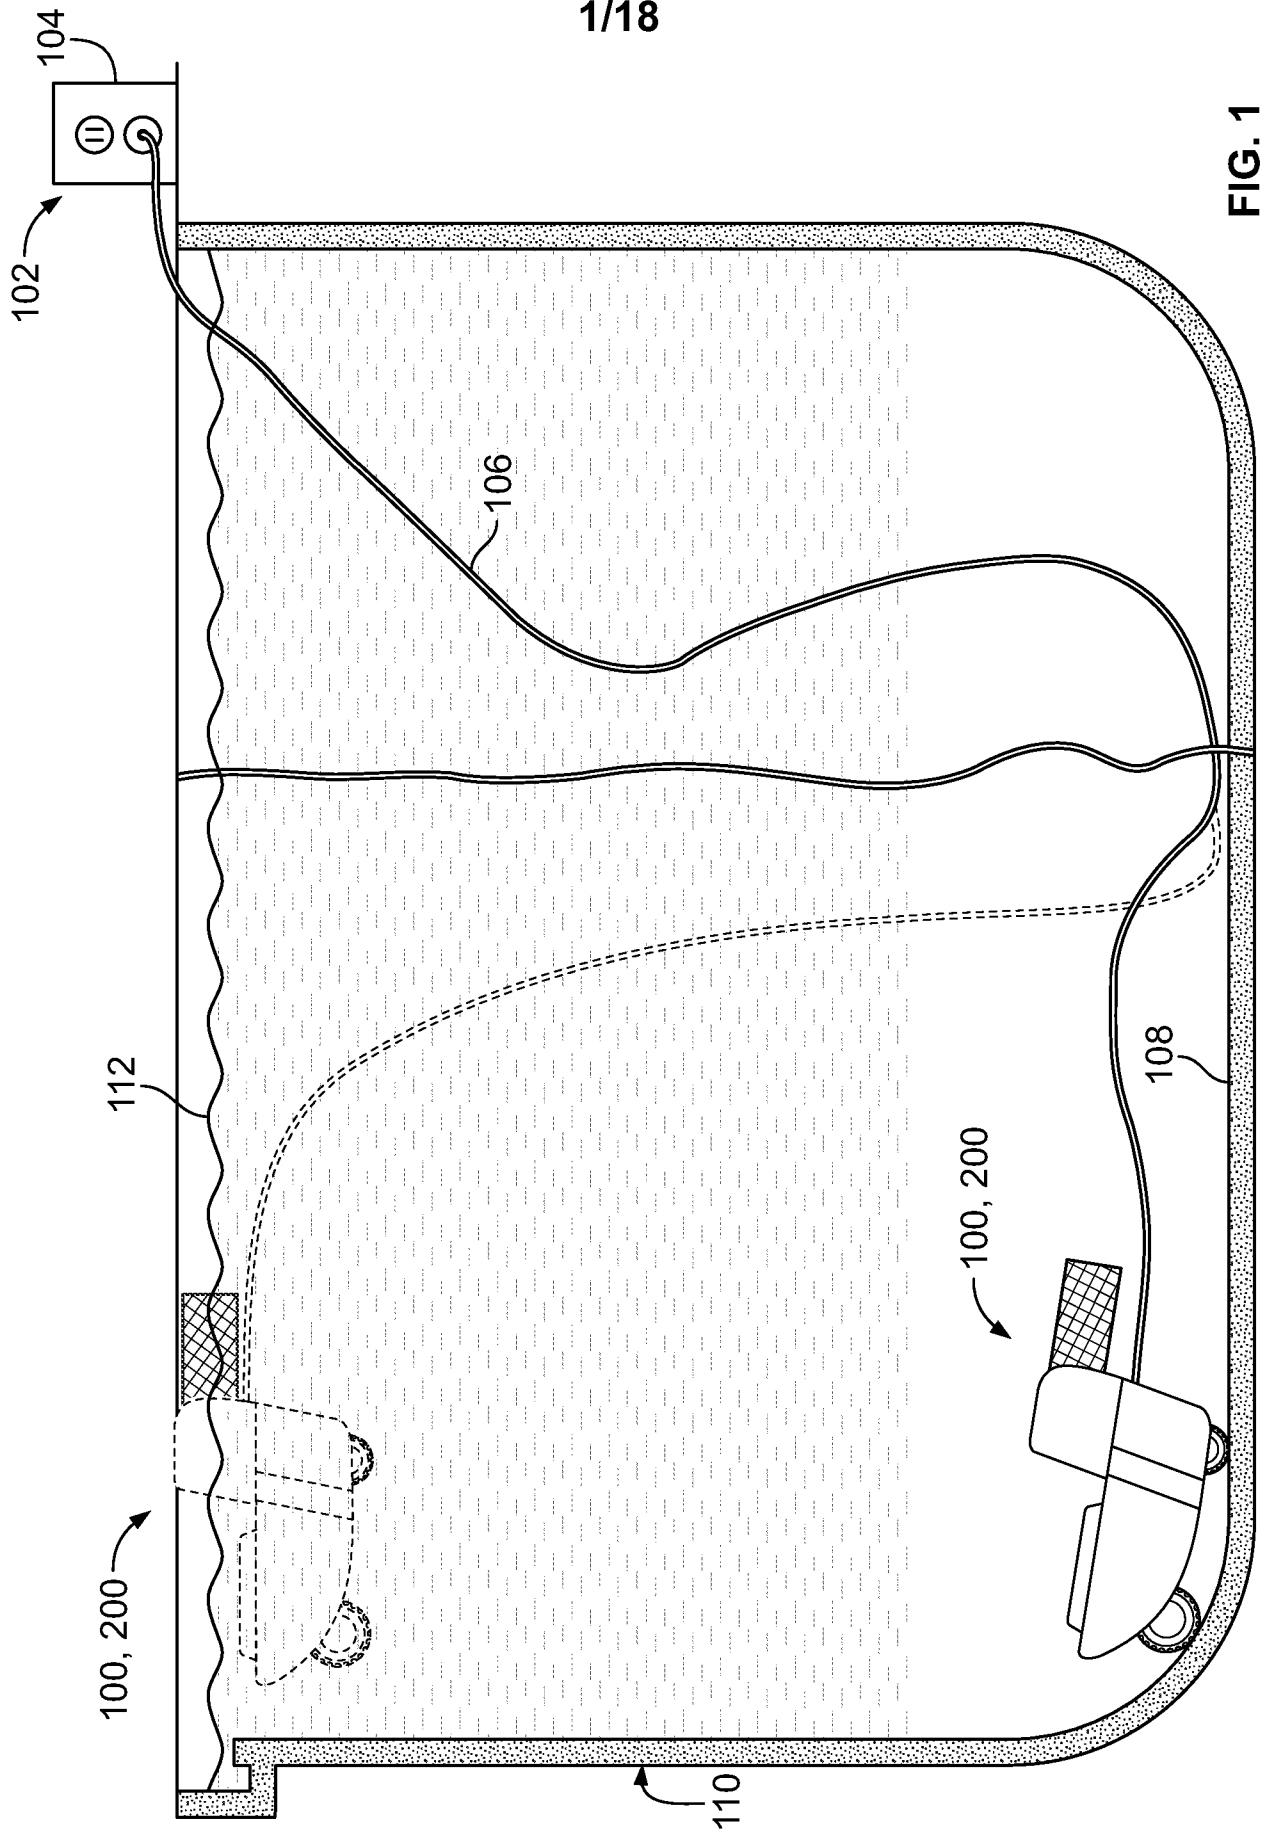


FIG. 1

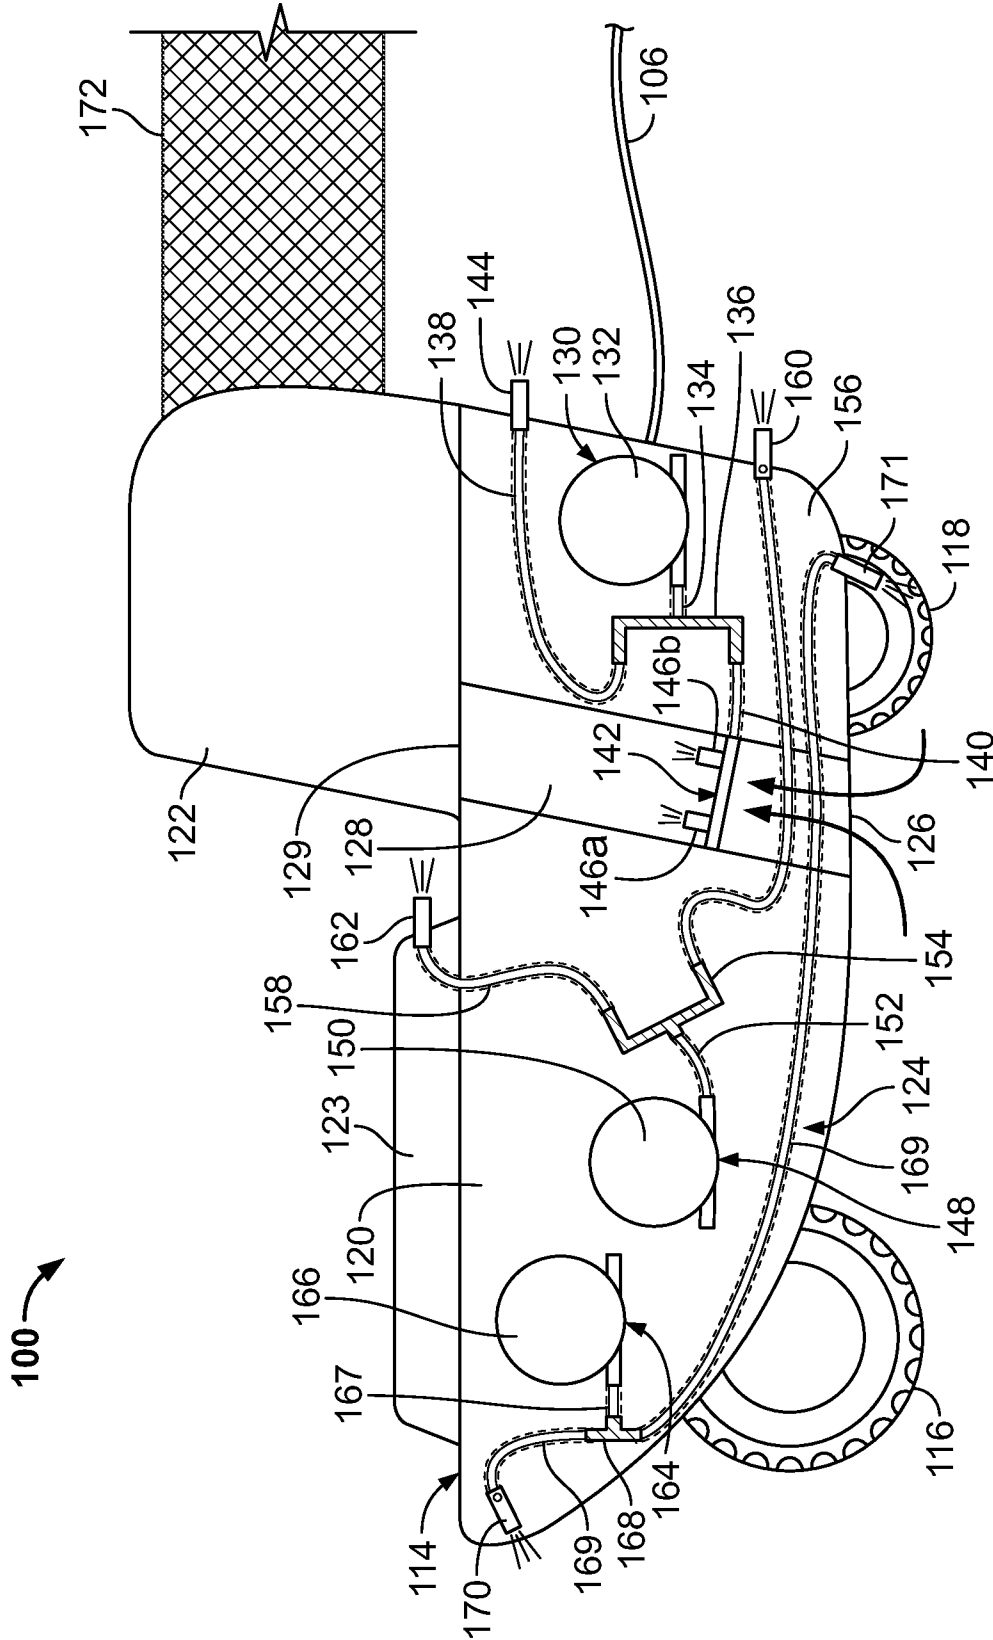


FIG. 2

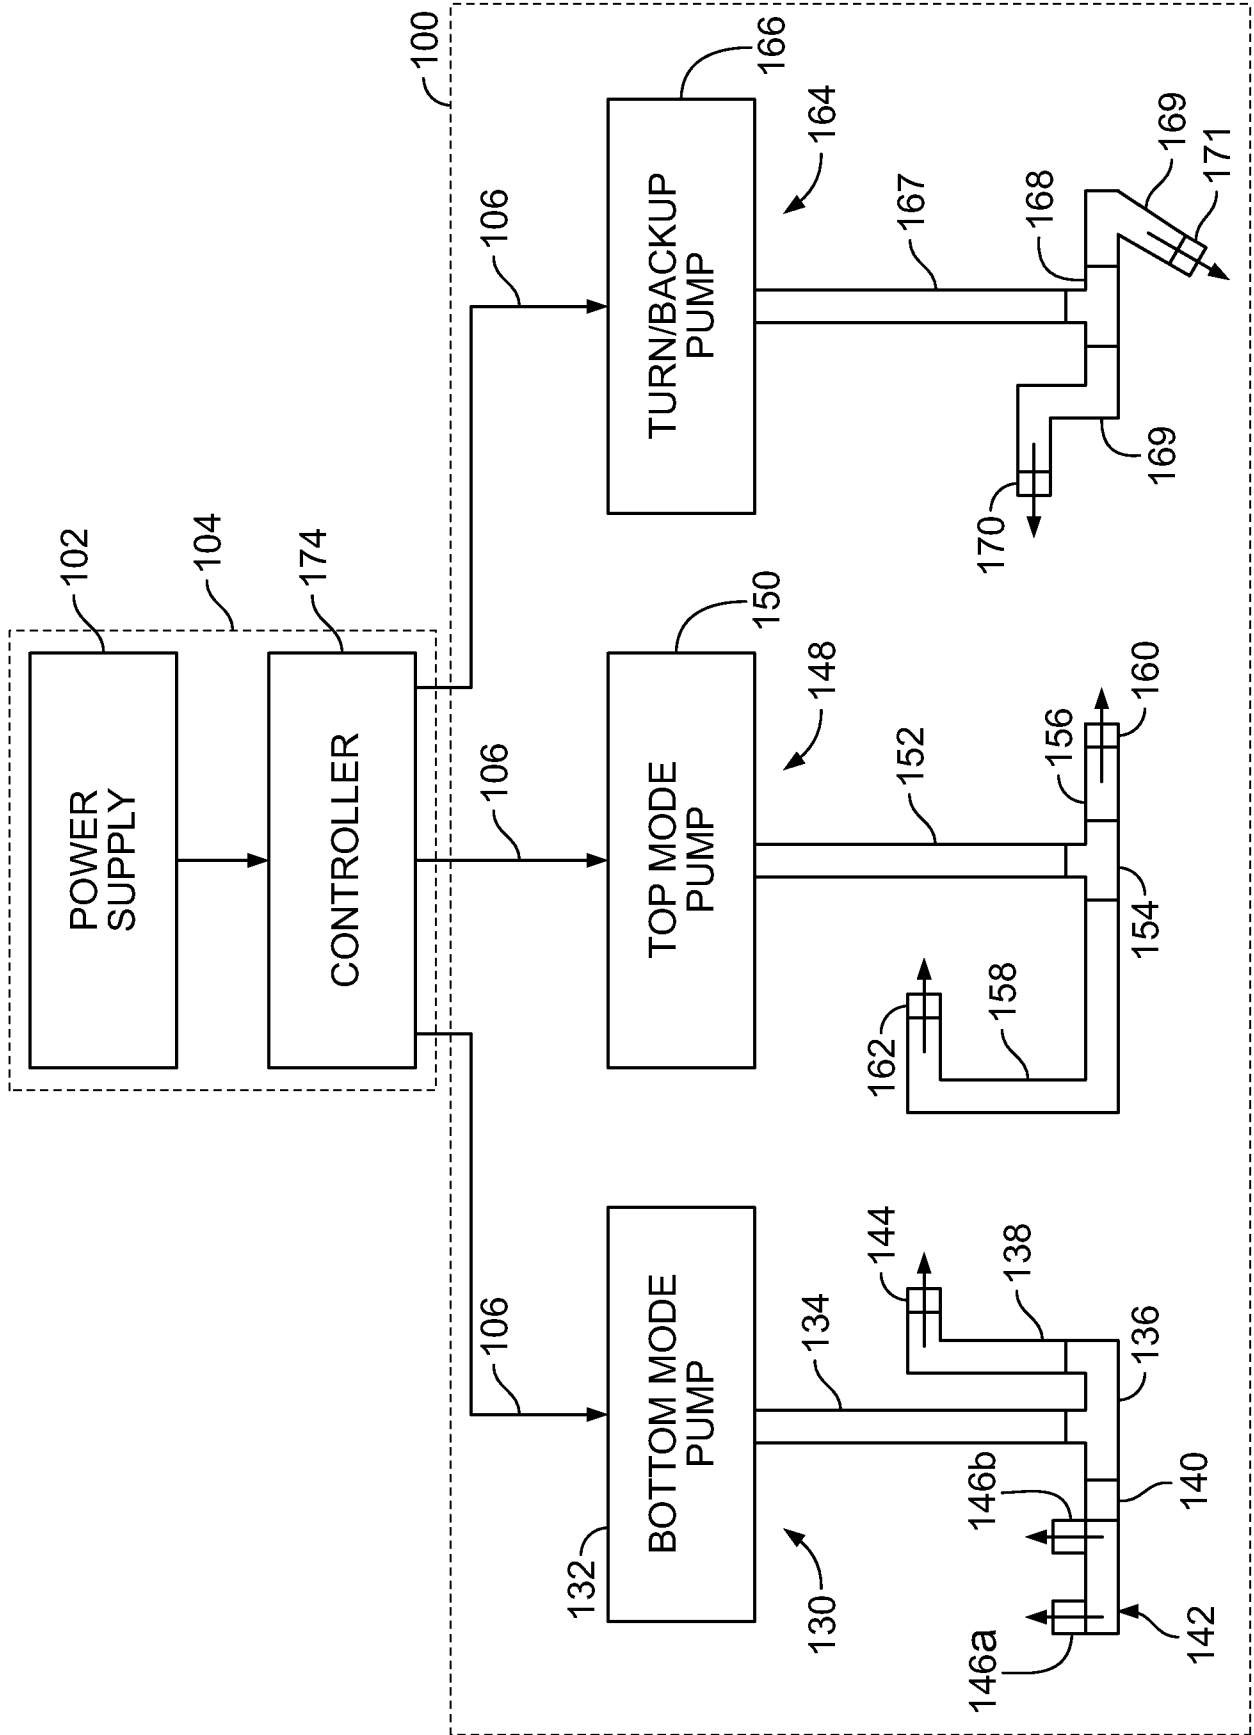


FIG. 3

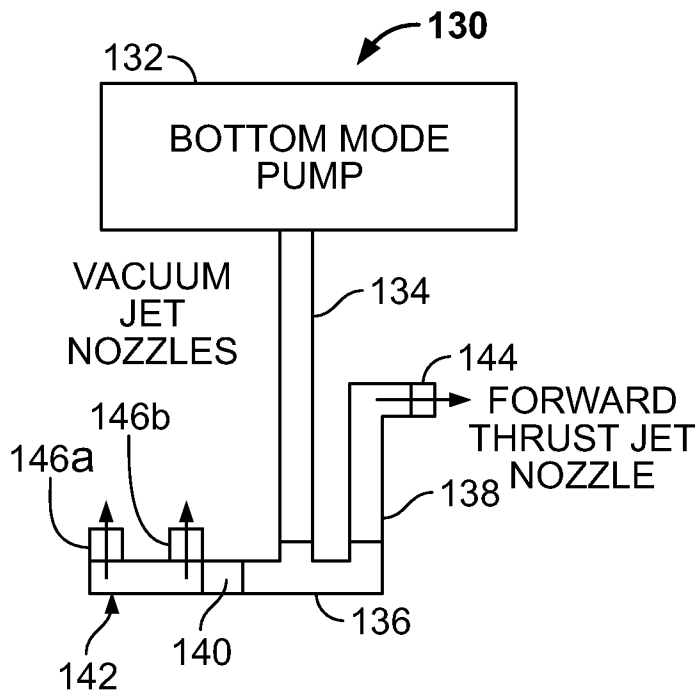


FIG. 4A

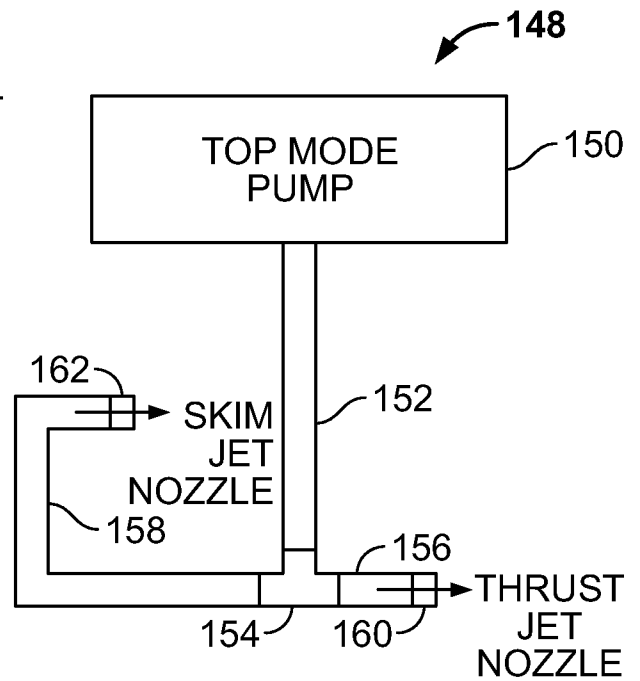


FIG. 4B

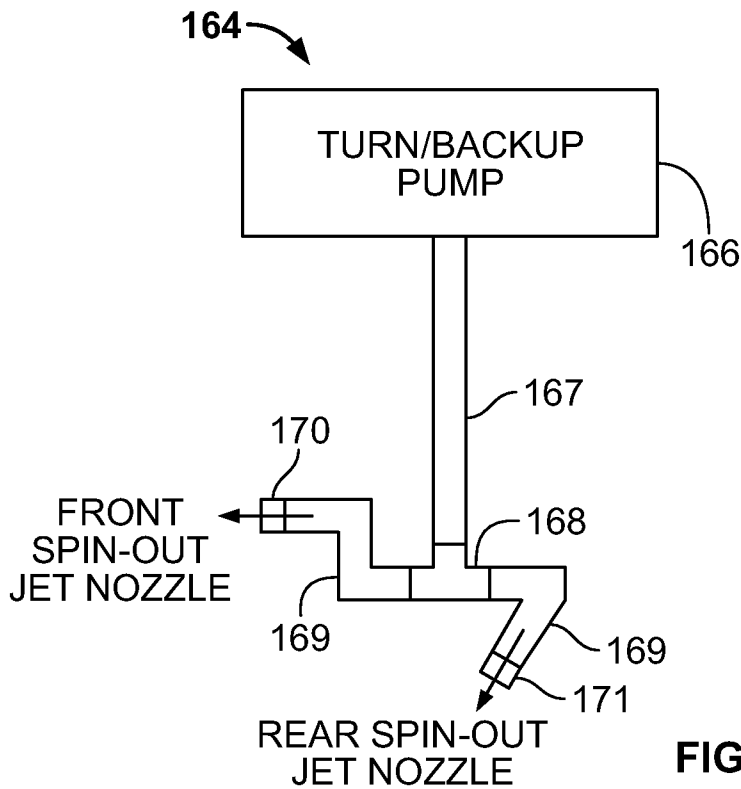


FIG. 4C

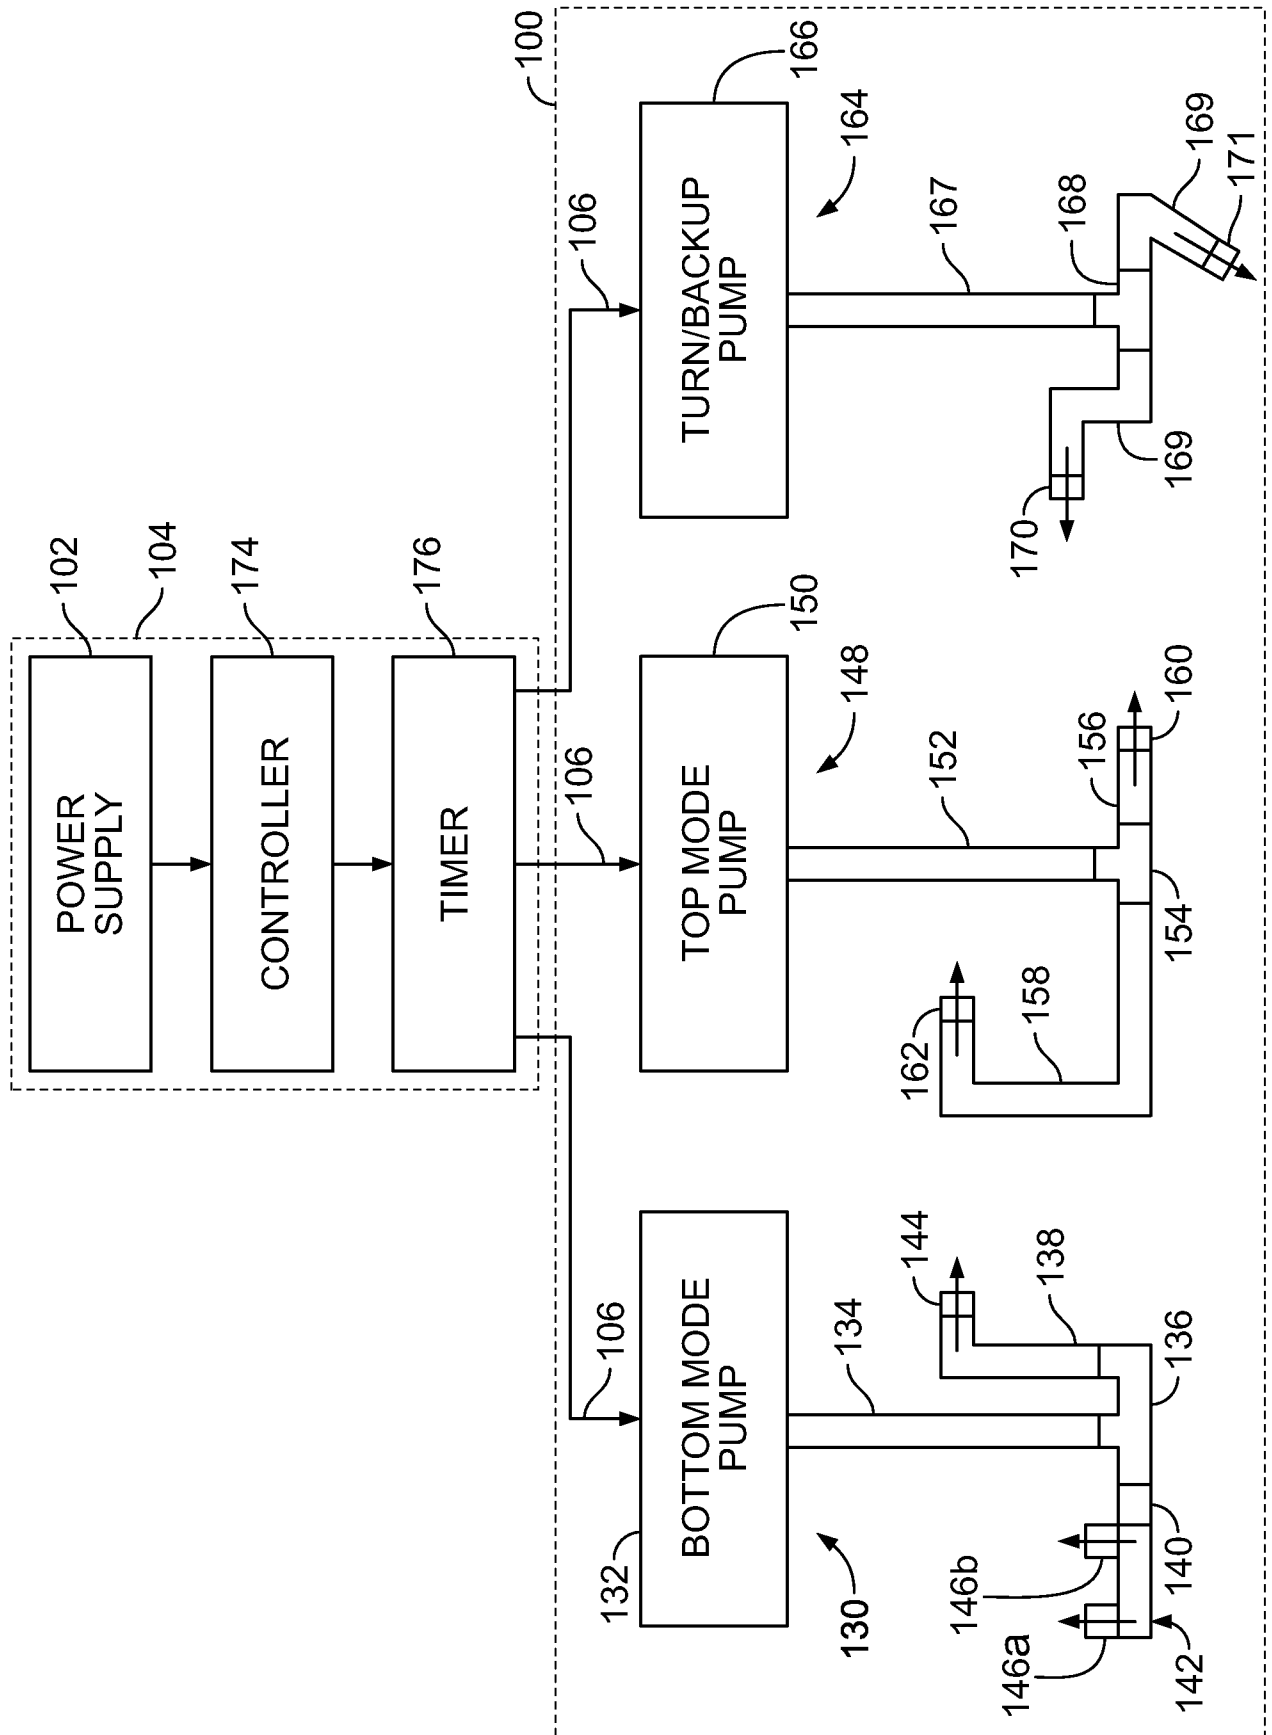


FIG. 5

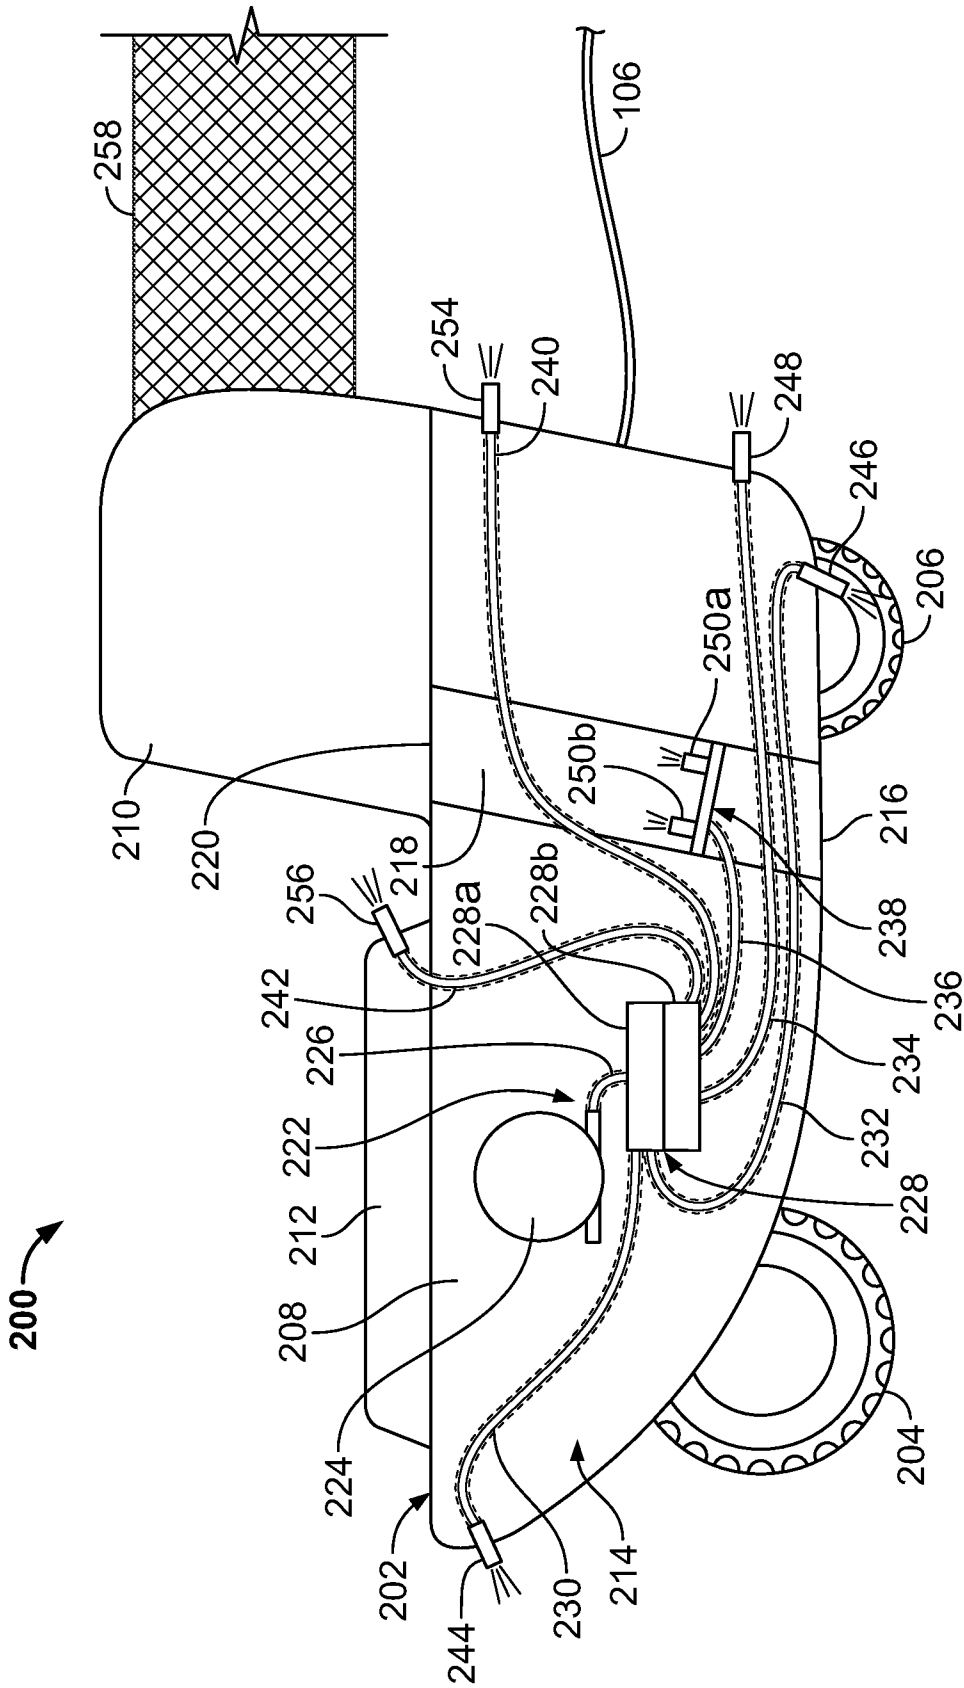


FIG. 6

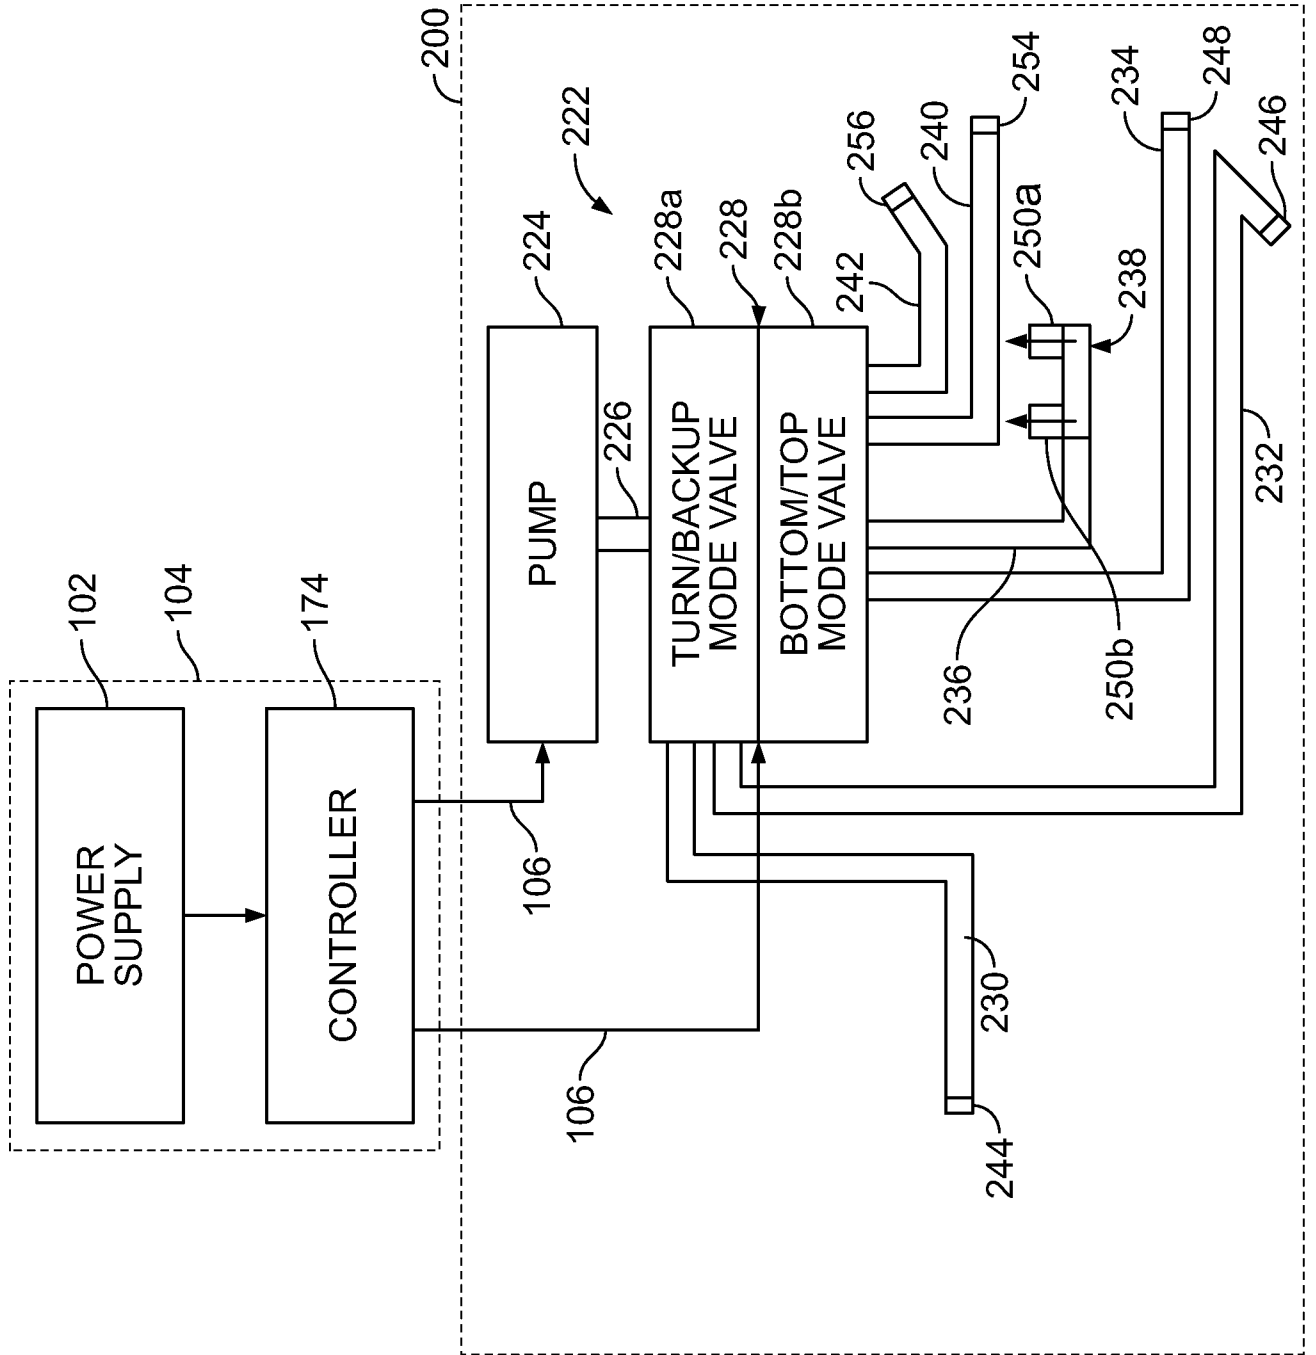


FIG. 7

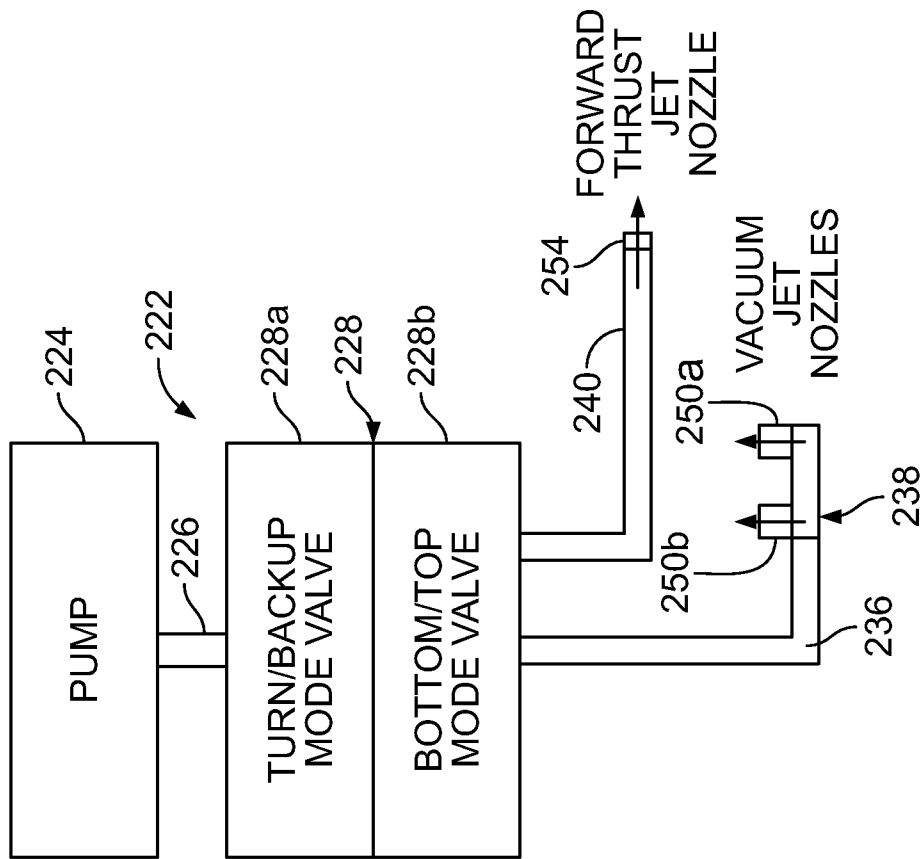


FIG. 8A

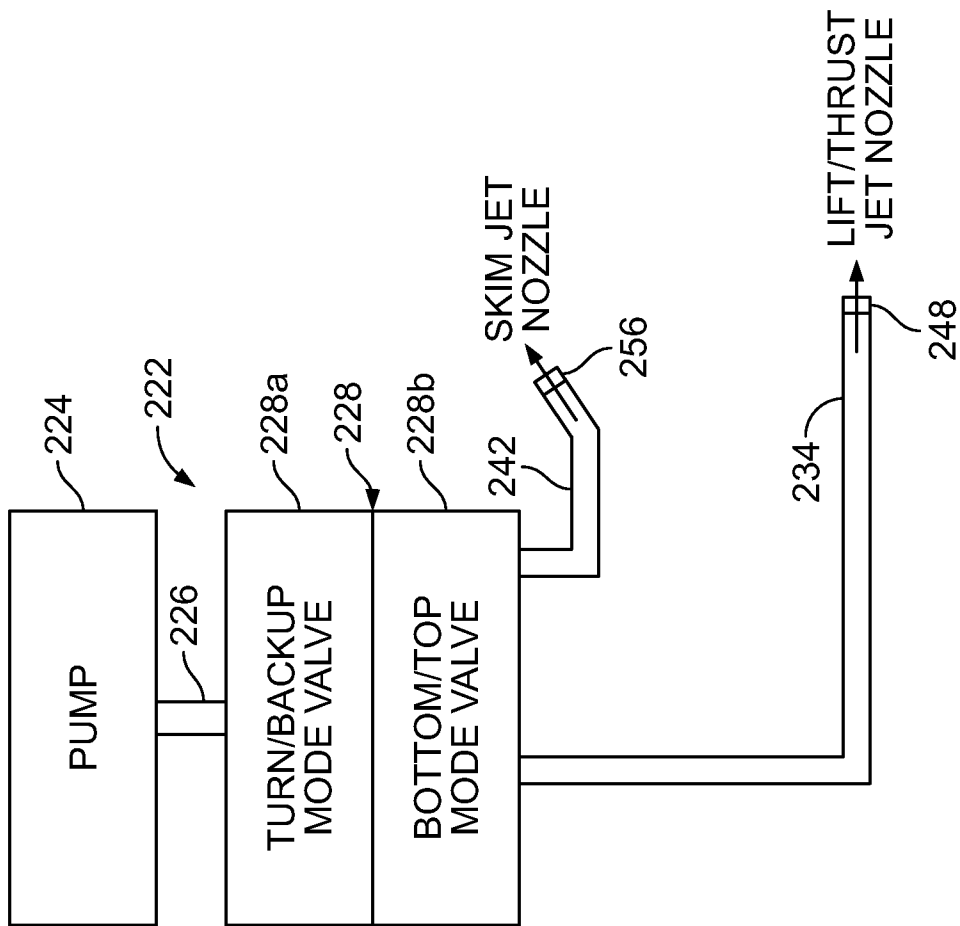


FIG. 8B

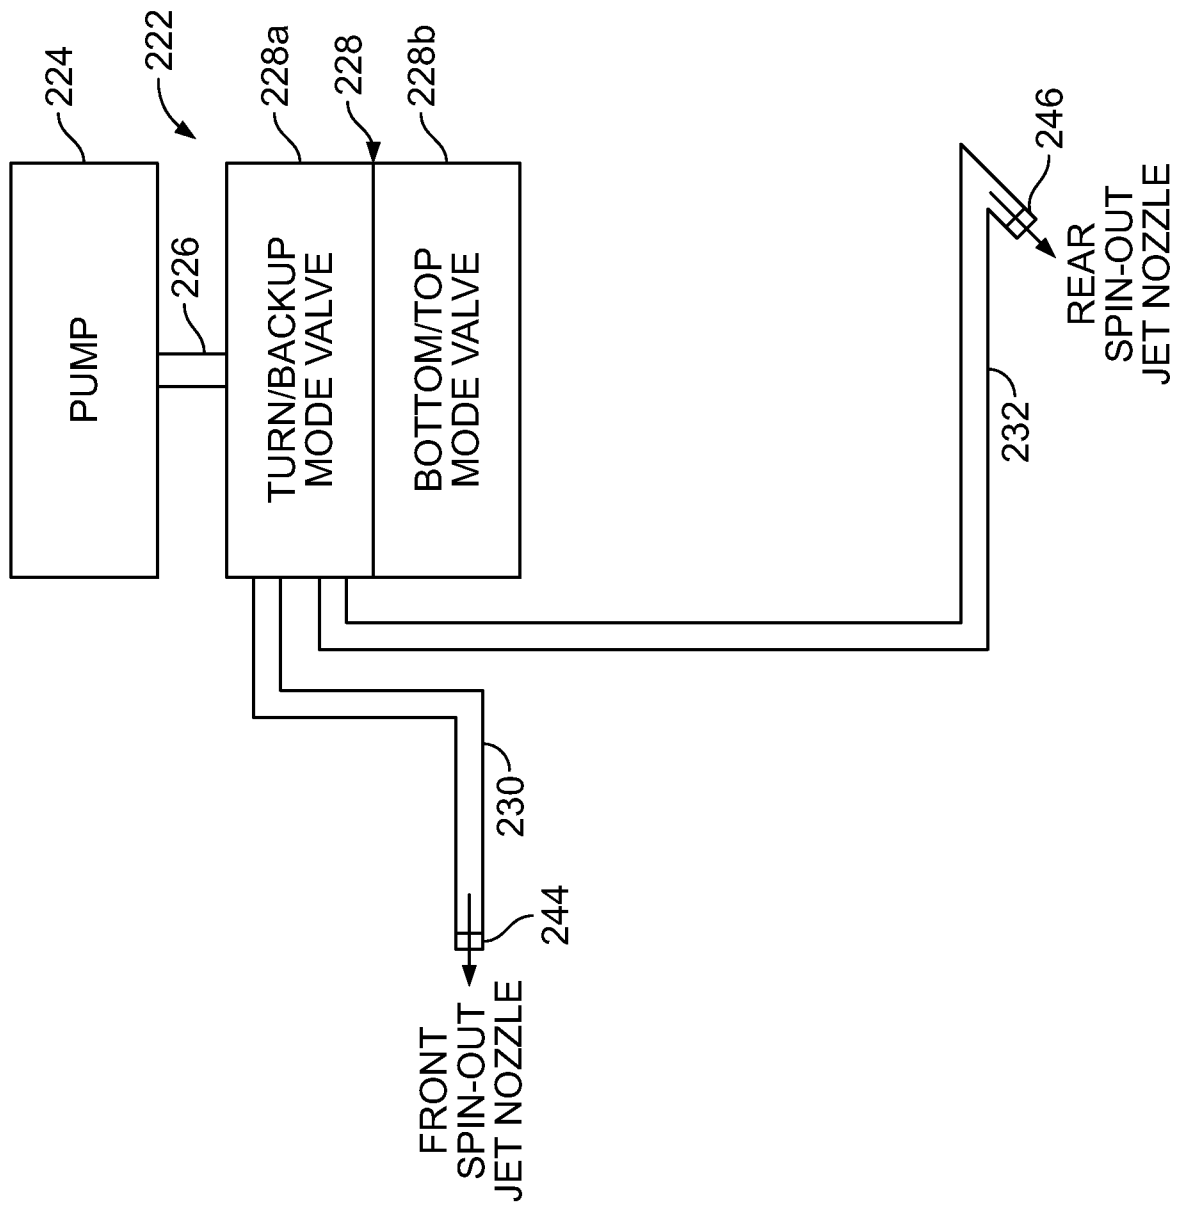


FIG. 8C

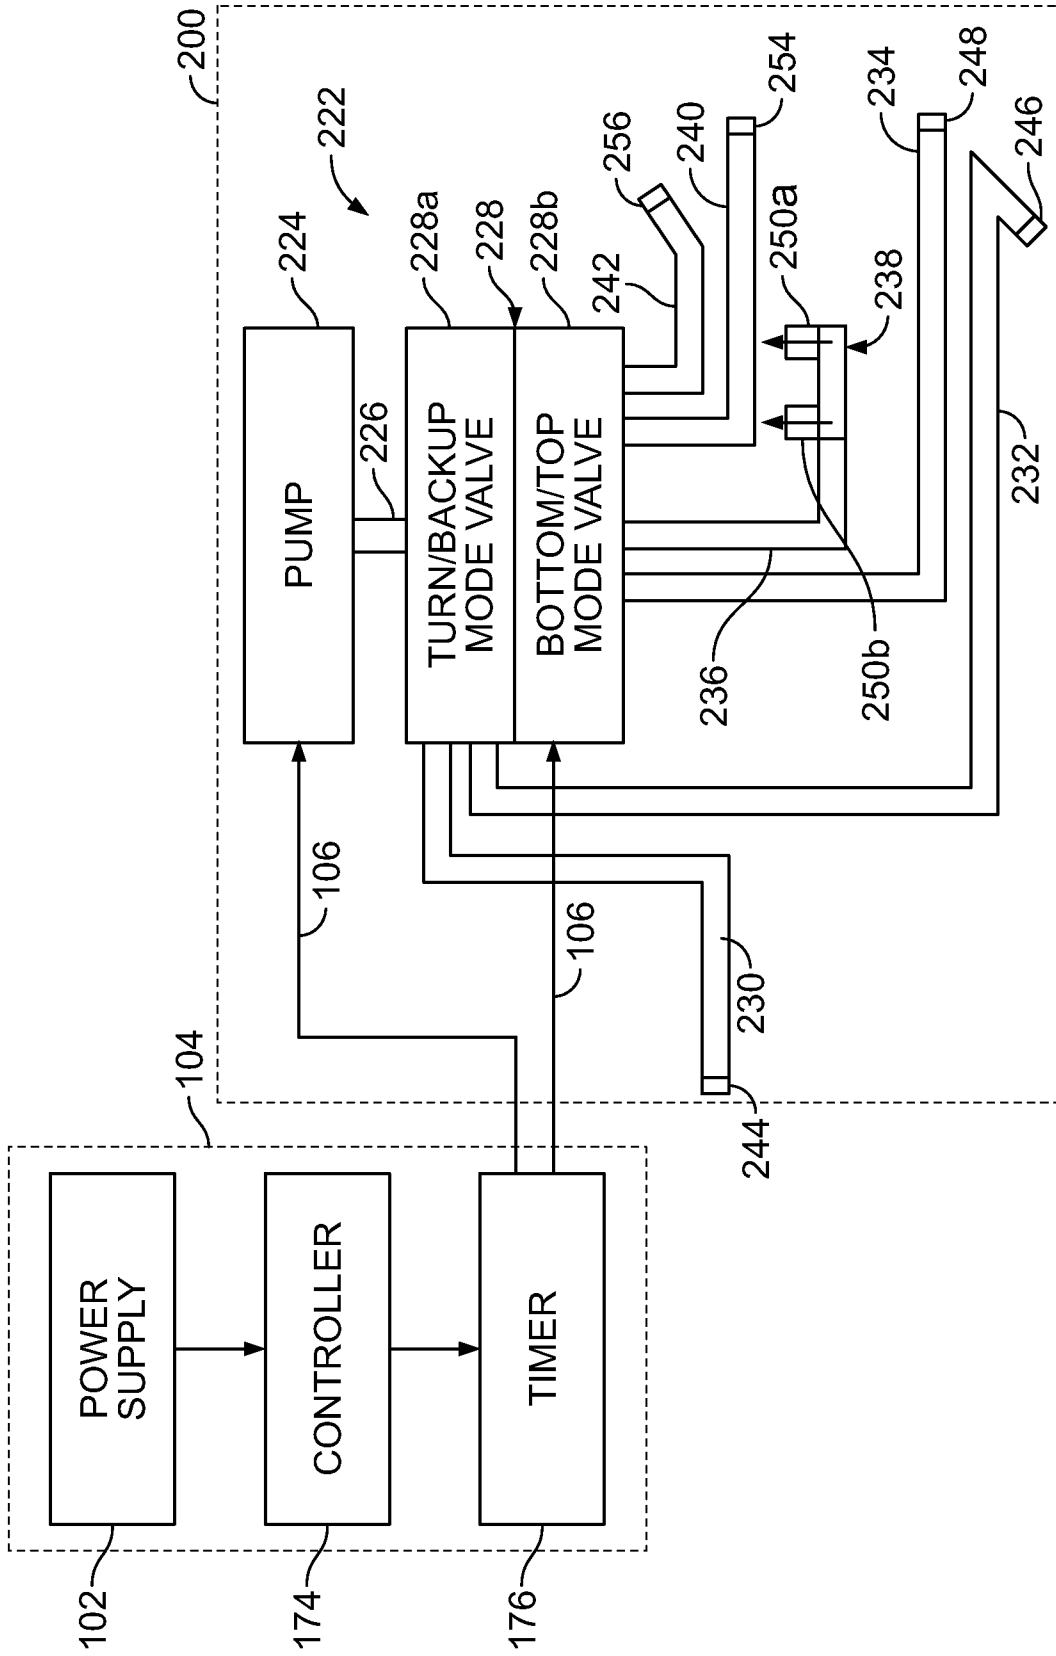


FIG. 9A

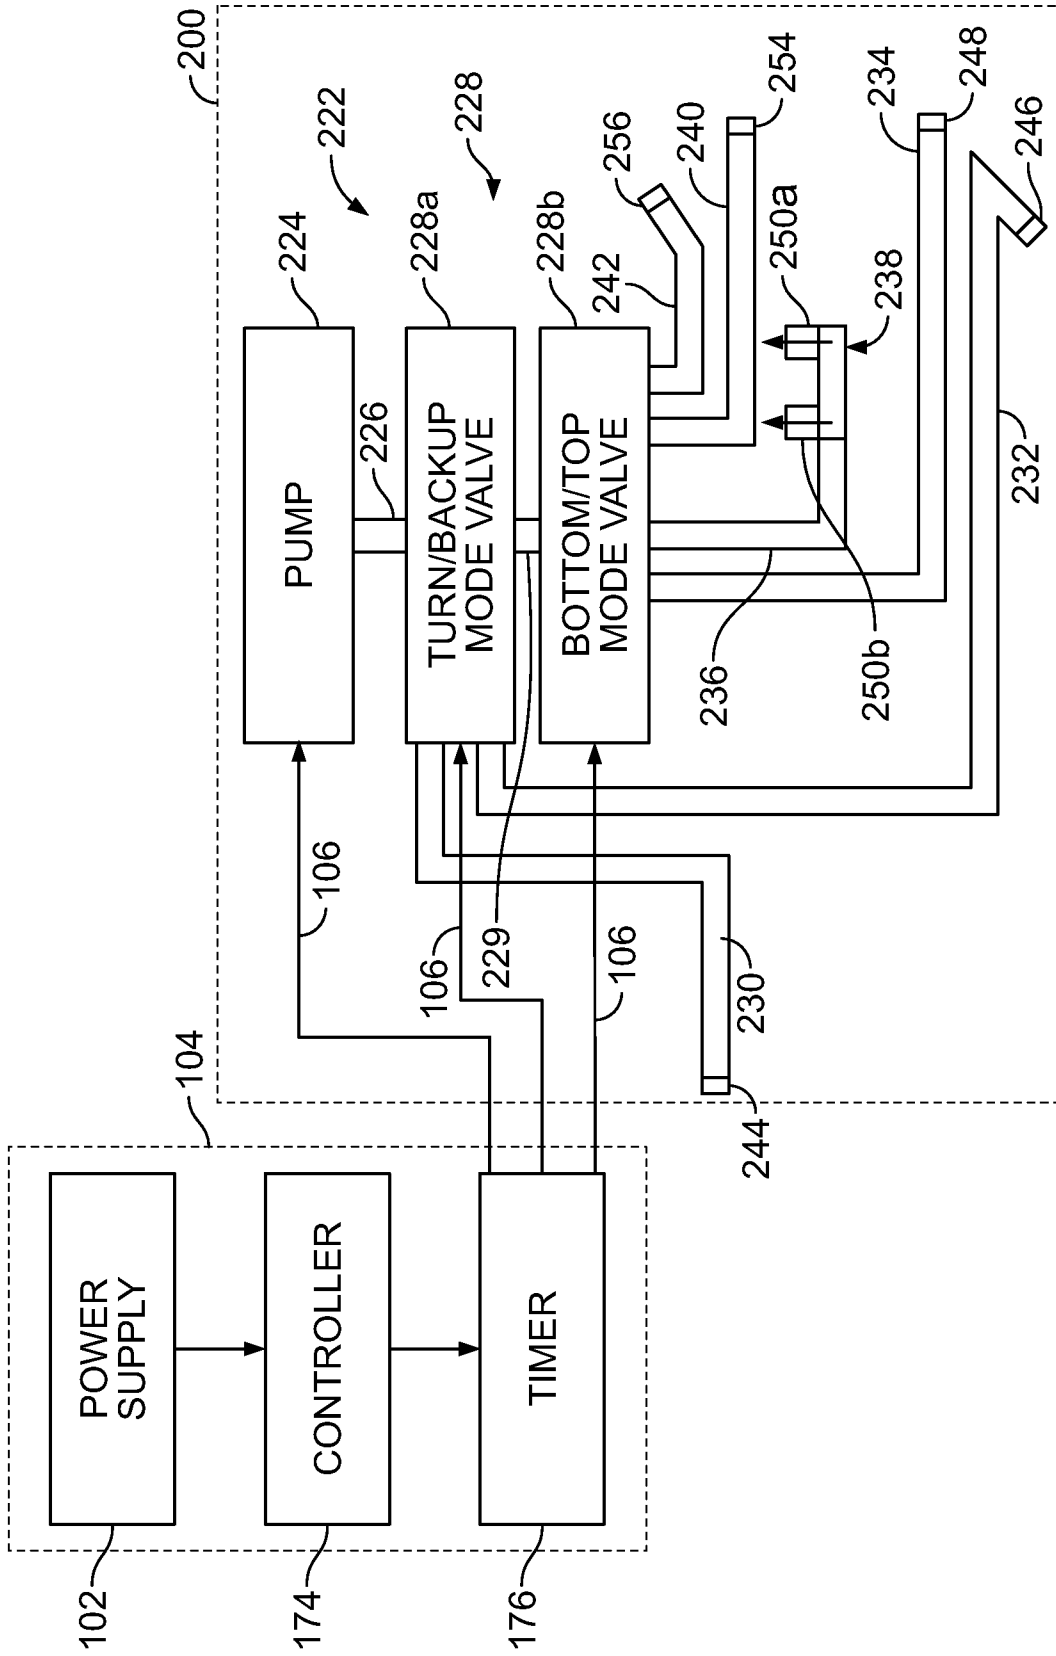


FIG. 9B

13/18

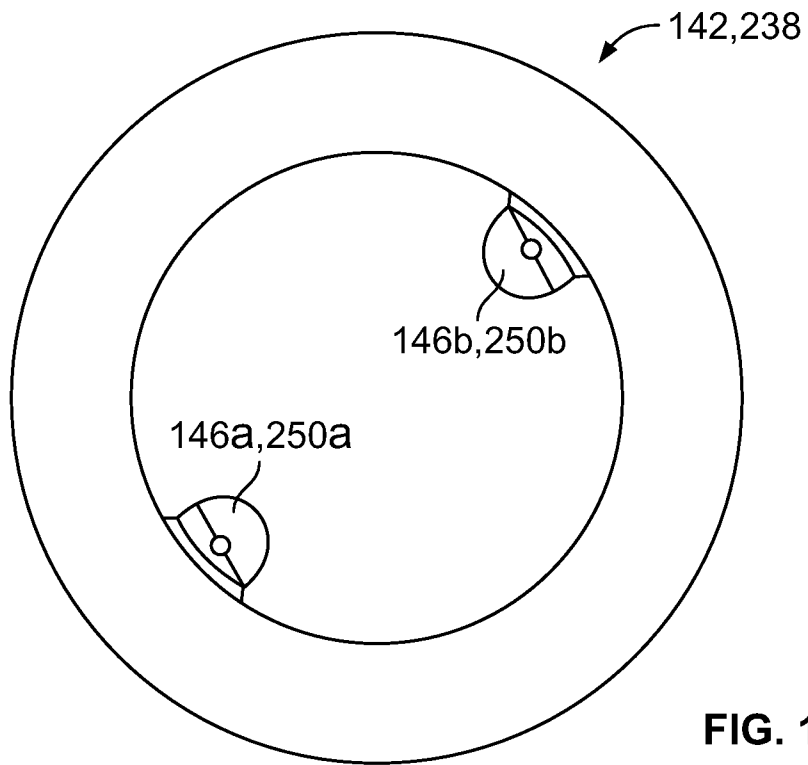


FIG. 10A

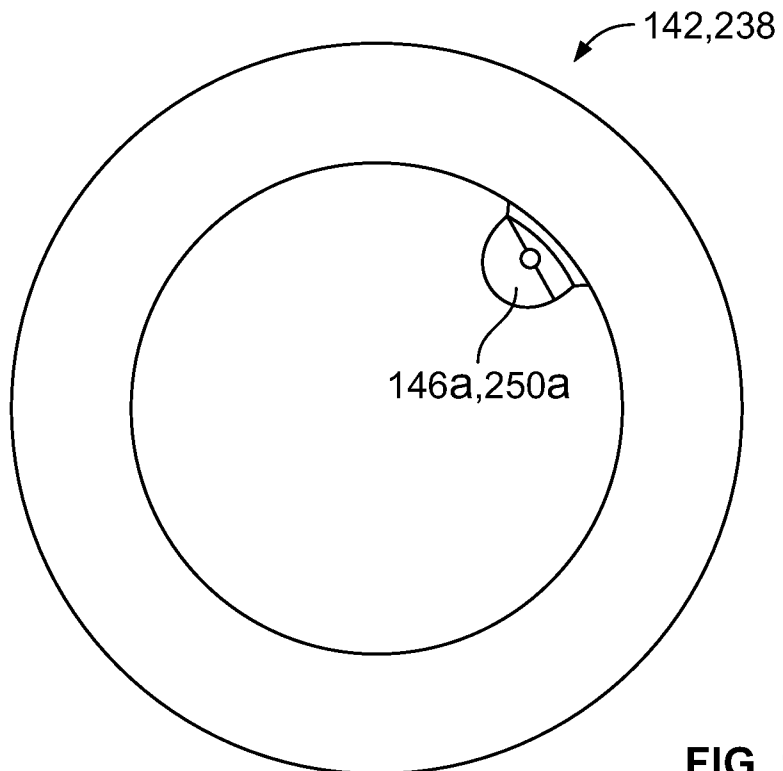


FIG. 10B

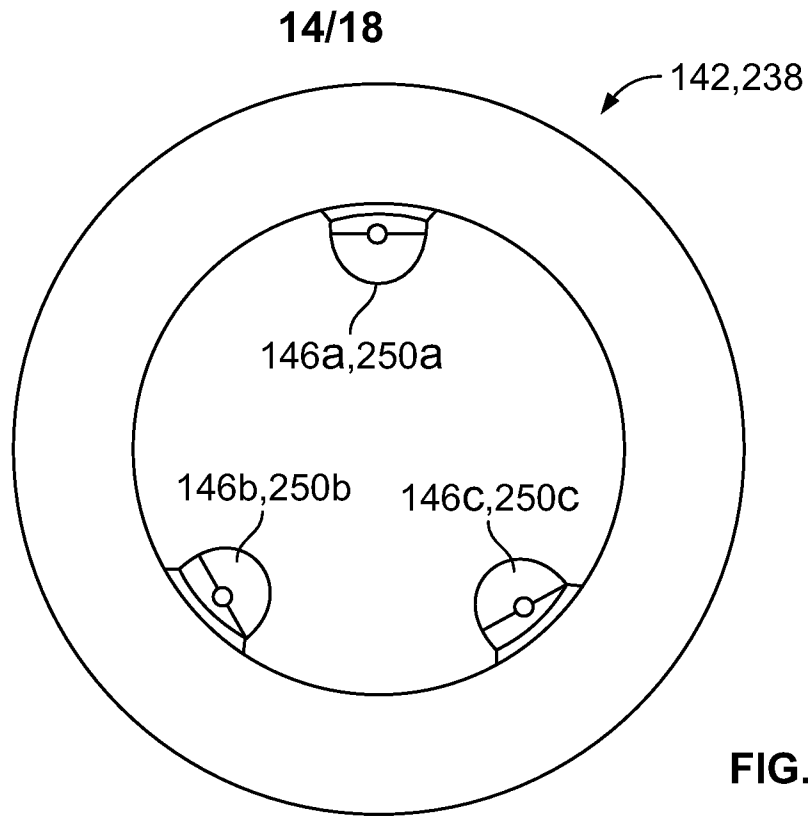


FIG. 10C

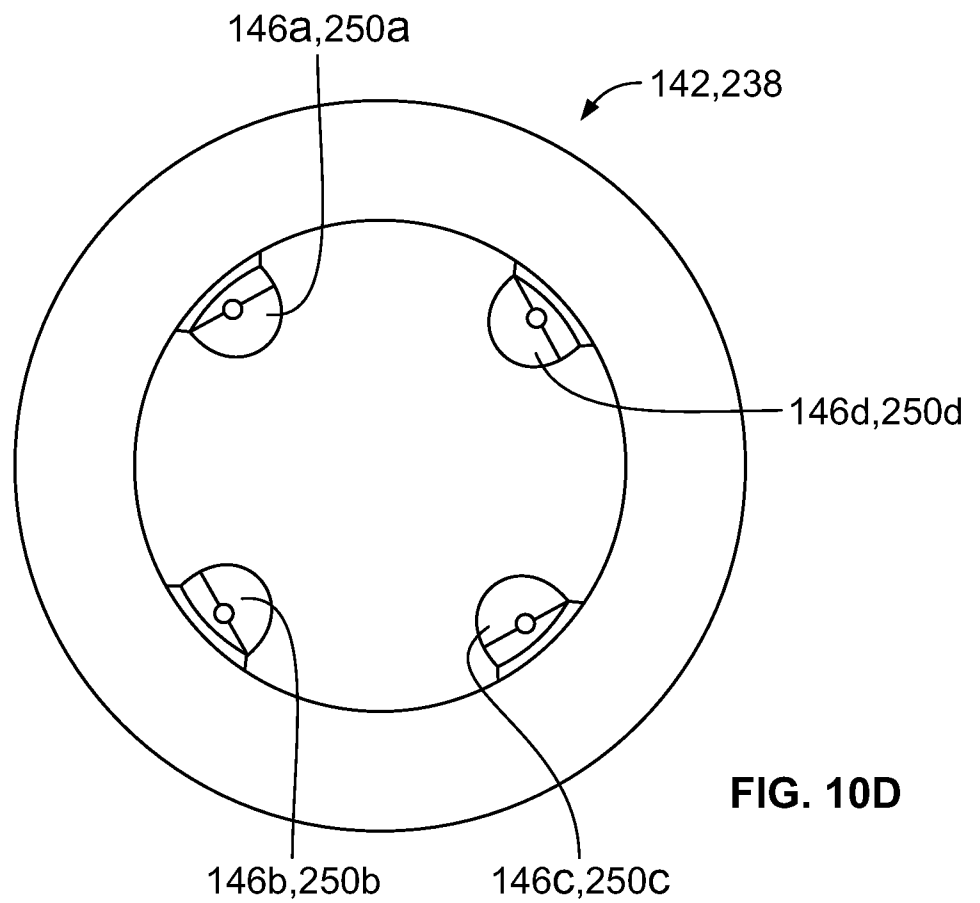


FIG. 10D

15/18

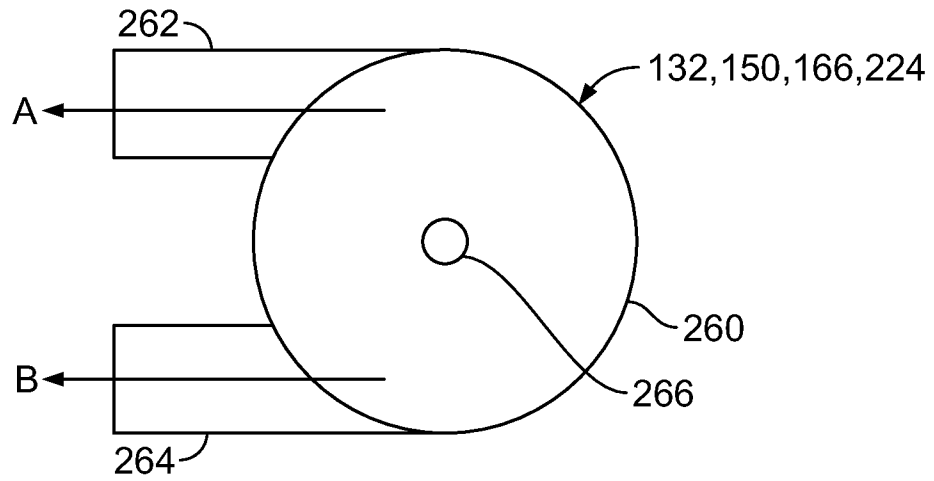


FIG. 11A

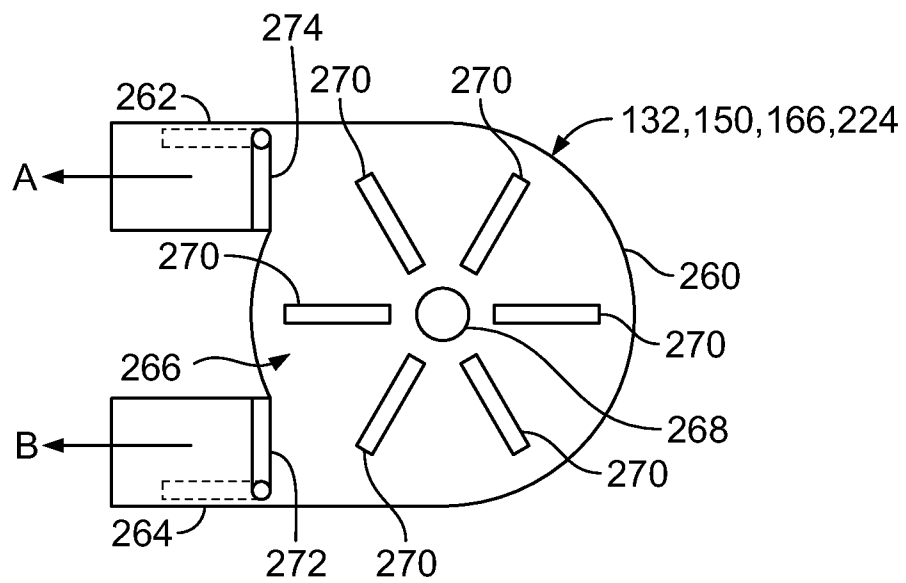


FIG. 11B

16/18

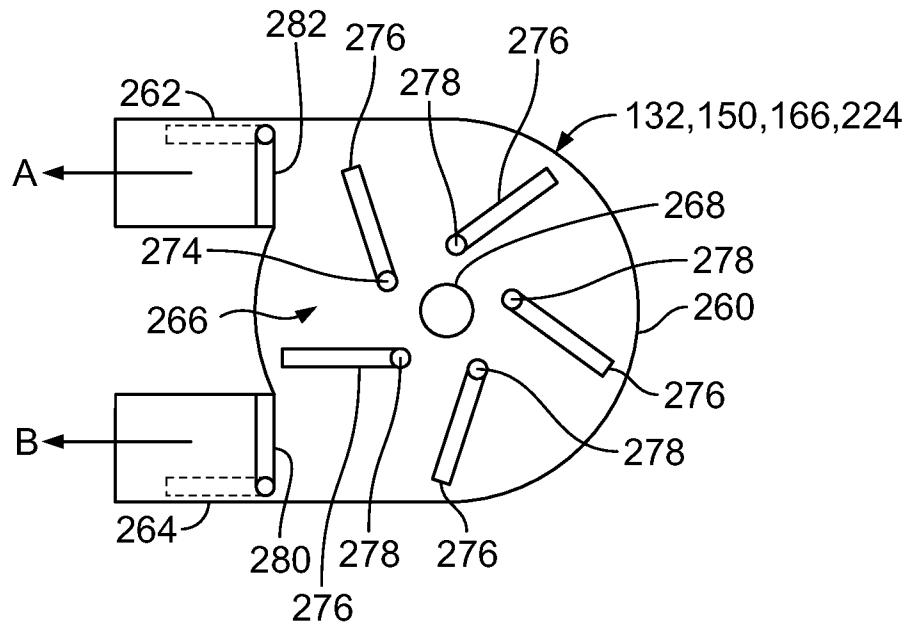


FIG. 11C

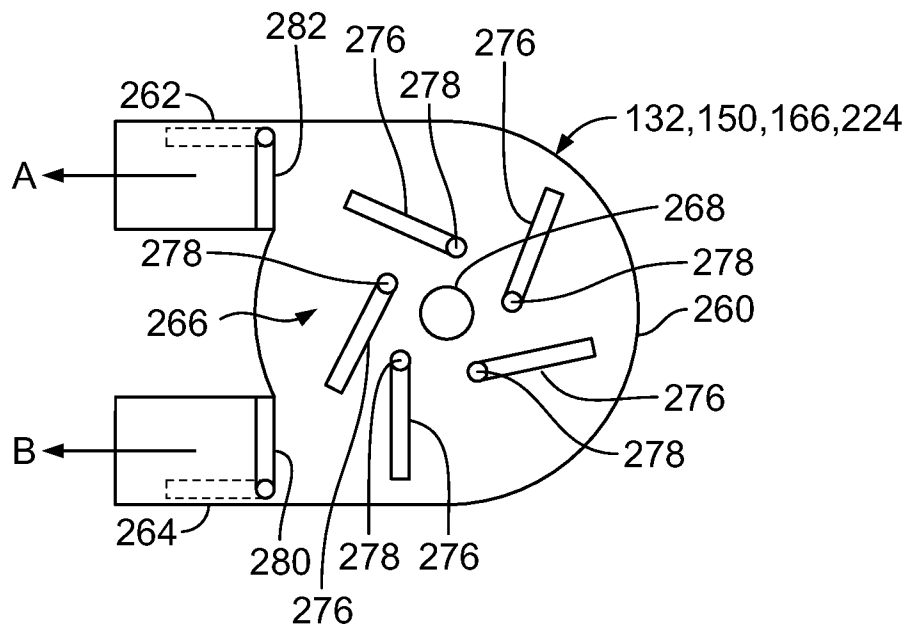


FIG. 11D

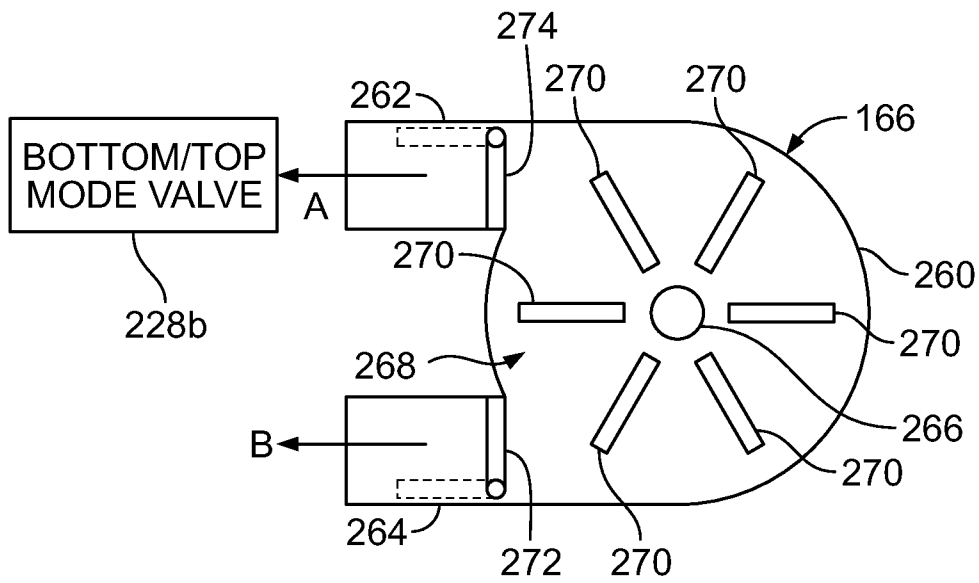


FIG. 11E

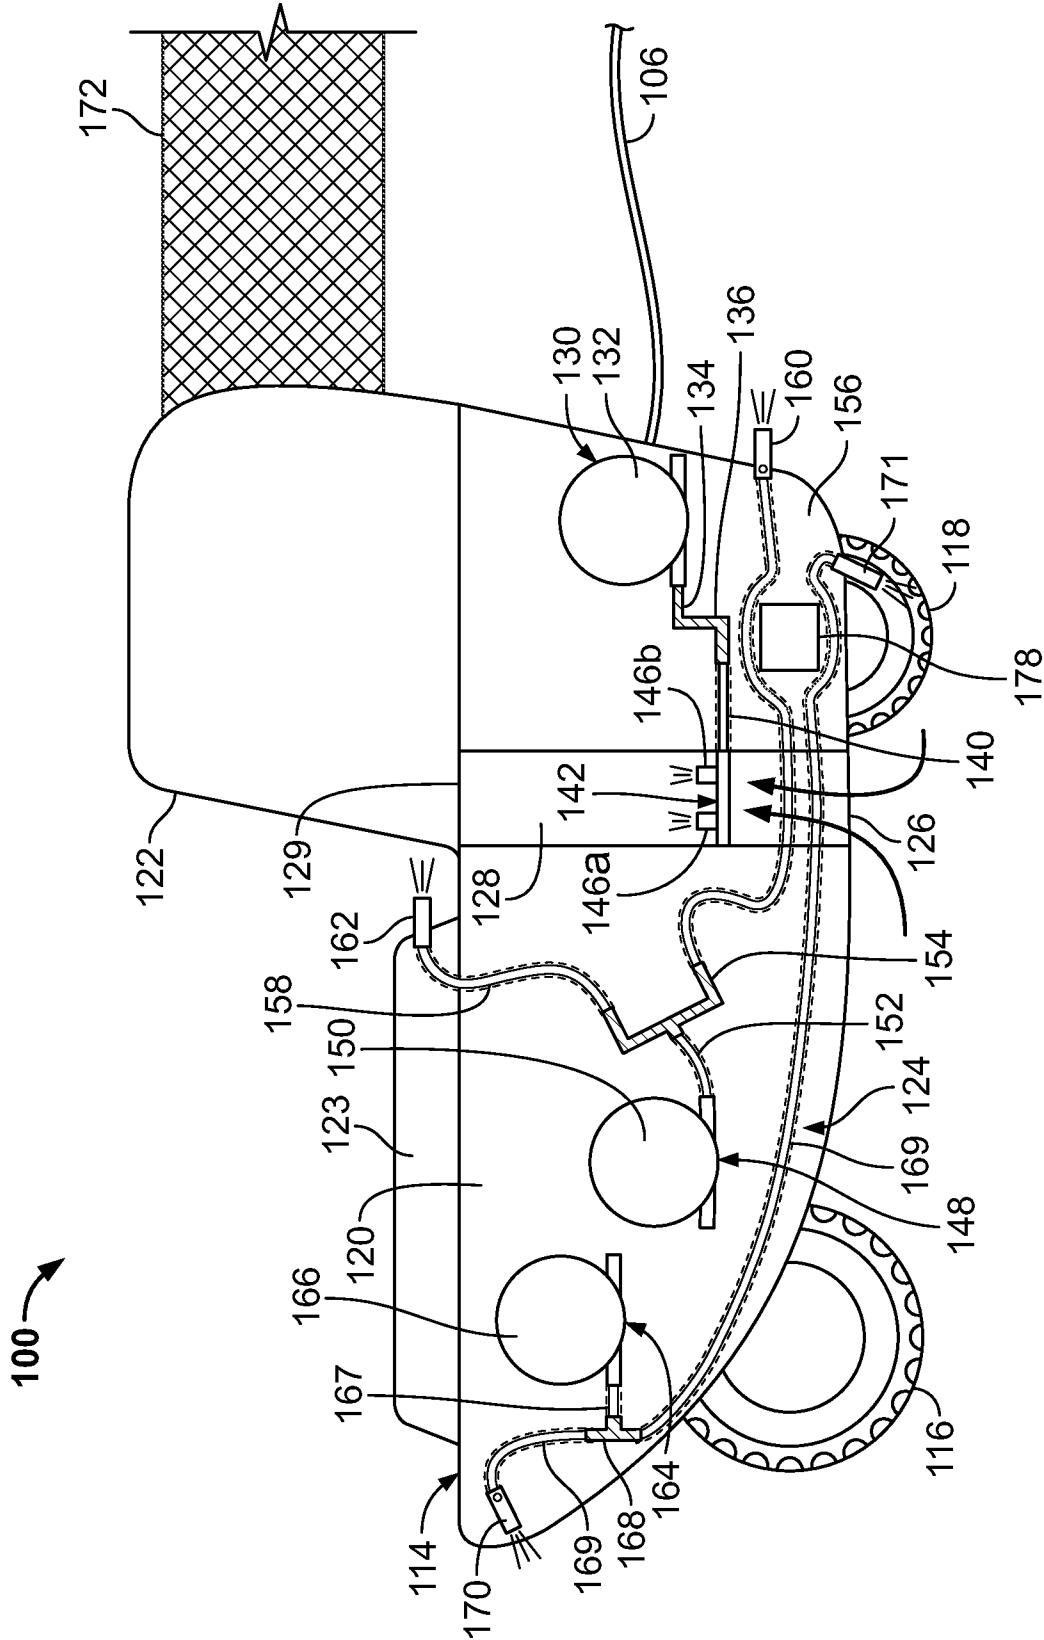


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/028359

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - E04H 4/16 (2014.01)
USPC - 15/1.7

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC(8) - A47L 7/00; B08B 7/04; E04H 4/16; F16K 11/10 (2014.01)
USPC - 15/1.7; 134/18; 137/624.14; 210/167.1, 167.15, 167.16, 167.17, 416.2

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
CPC - E04H 4/16, 4/1654 (2014.06)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PatBase, Google Patents, Google

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/108903 A1 (ERLICH) 16 August 2012 (16.08.2012) entire document	38, 40
Y		9, 12-14, 17-24, 31, 35-37, 39
Y	US 2006/0065580 A1 (HENKIN et al) 30 March 2006 (30.03.2006) entire document	1-14, 17-37
Y	US 5,852,984 A (MATSUYAMA et al) 29 December 1998 (29.12.1998) entire document	1-11, 25-34
Y	US 2008/0235887 A1 (HORVATH et al) 02 October 2008 (02.10.2008) entire document	10-11, 22-24, 34, 39
A	US 3,412,862 A (CHAPLIN) 26 November 1968 (26.11.1968) entire document	1-40

Further documents are listed in the continuation of Box C.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 07 July 2014	Date of mailing of the international search report 28 JUL 2014
---	--

Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774
---	---