

(19)



(11)

EP 3 268 569 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
08.05.2019 Bulletin 2019/19

(51) Int Cl.:
E21B 7/00 (2006.01) E21B 10/08 (2006.01)

(21) Application number: **16719491.9**

(86) International application number:
PCT/IB2016/051387

(22) Date of filing: **11.03.2016**

(87) International publication number:
WO 2016/142910 (15.09.2016 Gazette 2016/37)

(54) **EXCAVATING HEAD**

BAGGERKOPF

TÊTE D'EXCAVATION

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **12.03.2015 IT MO20150056**

(43) Date of publication of application:
17.01.2018 Bulletin 2018/03

(73) Proprietor: **Palmieri S.p.A.**
40041 Gaggio Montano (BO) frazione Silla (IT)

(72) Inventor: **PALMIERI, Silvano**
40041 Gaggio Montano (BO) frazione Silla (IT)

(74) Representative: **Luppi, Emanuele**
Brunacci & Partners S.r.l.
Via Scaglia Est, 19-31
41126 Modena (IT)

(56) References cited:
WO-A1-95/08691 KR-A- 20110 133 517
KR-B1- 101 401 981 US-A- 3 967 463
US-A1- 2012 248 848

EP 3 268 569 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionTechnical Field

[0001] The present invention relates to an excavating head.

Background Art

[0002] With reference to the sector of the construction of large works such as tunnels, bridges, dams, aqueducts, foundation pits and the like, excavating heads are known designed to work in a descending direction below the level of seas or rivers, or in terrestrial conditions in the presence of water tables.

[0003] These excavating heads operate in the presence of water in the excavated soil and, for this reason, are also called "heads for wet excavations".

[0004] The heads of known type are usually operated in rotation by means of a driving machine, which makes them rotate around a vertical axis gradually as the excavation progresses in depth.

[0005] In detail, heads are in use having a plate-shaped body with an upper face with a plurality of excavation tools arranged staggered with respect to the latter and a side opening crossed by a suction pipe able to aspirate the excavated material.

[0006] However, the heads of known type have some drawbacks among which must be included the fact that the suction pipe allows to remove small amounts of excavated material.

[0007] Another drawback is represented by the fact that the heads of known type have reduced productivity due to the low removal speed of the excavated material that greatly affects the overall excavation speed, leading to long working times.

[0008] Others excavation heads are known from KR 2011 0133517, KR 101 401 981, US 3 967 463, WO 95/08691 and WO 2012/248848.

Description of the Invention

[0009] The main aim of the present invention is to devise an excavating head which allows removing large amounts of excavated material.

[0010] Another object of the present invention is to devise an excavating head which allows increasing the removal speed of the excavated material, considerably reducing working times and increasing the overall productivity of the head itself.

[0011] Another object of the present invention is to devise an excavating head which allows to overcome the mentioned drawbacks of the prior art within the ambit of a simple, rational, easy, effective to use and affordable solution.

[0012] The above mentioned objects are achieved by the present excavating head having the characteristics of claim 1.

Brief Description of the Drawings

[0013] Other characteristics and advantages of the present invention will become better evident from the description of a preferred, but not exclusive, embodiment of an excavating head, illustrated by way of an indicative, but non-limiting example in the accompanying drawings, wherein:

Figure 1 is an axonometric view of the head according to the invention;

Figure 2 is an axonometric view from another angle of the head according to the invention;

Figure 3 is a front sectional view of the head according to the invention.

Embodiments of the Invention

[0014] With particular reference to such figures, reference number 1 globally indicates an excavating head.

[0015] The head 1, in particular, allows performing wet excavations.

[0016] In the context of this treatise by "wet excavations" are meant excavations that take place below the level of seas or rivers, or in terrestrial conditions in the presence of water tables.

[0017] The head 1 comprises an attachment element 2 to a driving machine to place the head itself in rotation.

[0018] With reference to the particular embodiment shown in the illustrations, the attachment element 2 is a flange with bolting holes 3.

[0019] The flange 2 can be coupled to a corresponding flanged plate 4 equipping the driving machine.

[0020] The placing in rotation takes place around a main axis 5 of the head 1, which also identifies the direction of excavation 6.

[0021] Advantageously, the main axis 5 is vertical and the direction of excavation 6 is downwards.

[0022] Furthermore, it is specified that in the present treatise expressions such as "high", "low", "upper", "lower", "above", "below" and the like, are to be deemed with reference to an operative configuration wherein the head 1 is used for downward vertical excavations.

[0023] It cannot however be ruled out that the direction of excavation 6 can be horizontal, in which case the head 1 is used in an operative configuration wherein the main axis 5 is horizontal.

[0024] The head 1 comprises a plate-shaped body 7 having a first main face 8 and a second main face 9.

[0025] With reference to the particular embodiment shown in the illustrations, the plate-shaped body 7 is a substantially circular plate coaxial to the main axis 5.

[0026] Advantageously, the first main face 8 is facing to the excavation front and the second main face 9 is opposite to the first main face 8 and is connected to the attachment element 2.

[0027] In the context of this treatise by "excavation front" is meant the margin defined by the material to be

excavated, along the direction of excavation 6.

[0028] In the operative configuration, shown in the illustrations, wherein the main axis 5 is vertical, the plate-shaped body 7 is substantially horizontal and the first main face 8 is lower than the second main face 9.

[0029] The head 1 comprises at least an excavation tool 10 associated with the plate-shaped body 7 so as to protrude at least in part from the first main face 8.

[0030] Advantageously, the plate-shaped body 7 comprises a plurality of tools 10.

[0031] The tools 10 have variable shape and size according to the type and dimensions of the excavation.

[0032] With reference to the particular embodiment shown in the illustrations, the tools 10 are composed of a substantially cylindrical or frusto-conical body having a sharp or abrasive outer surface.

[0033] Conveniently, the tools 10 are mounted idle on the plate-shaped body 7.

[0034] In the present case, each tool 10 is associated with the plate-shaped body 7 by means of axial pins 11 separate and parallel to each other which allow its free rotation around a central axis of symmetry of the tool 10.

[0035] With reference to the particular embodiment shown in the illustrations, the tools 10 are arranged asymmetrically with respect to the main axis 5 and have axes of rotation with different inclinations according to their position on the plate-shaped body 7.

[0036] For example, the tools 10 arranged in the proximity of the main axis 5 have the axis of rotation substantially coplanar to the first main face 8, whereas the tools 10 arranged peripherally to the plate-shaped body 7 have the axis of rotation inclined with respect the first main face 8, i.e. arranged neither vertically nor horizontally.

[0037] Advantageously, the tools 10 define an excavation plane 12 tangent to the tools themselves.

[0038] The excavation plane 12, in practice, consists in an imaginary plane which, in the operative configuration of the head 1, is substantially horizontal and tangent to the lower part of each tool 10.

[0039] The head 1 comprises suction means 13 of the excavated material associated with the plate-shaped body 7.

[0040] The suction means 13 comprise a plurality of through openings 14, 15 and crossing the plate-shaped body 7 between the first main face 8 and the second main face 9.

[0041] Conveniently, the tools 10 are at least partially housed within at least one of the through openings 14, 15.

[0042] In particular, each tool 10 is at least partially housed within one and only one corresponding through opening 14, 15 and emerges (i.e. protrudes) from the first main face 8 for at least one-twentieth of its volume.

[0043] Advantageously, the axial pins 11 of the tools 10 are arranged inside the through openings 14, 15 and the material excavated by the tools 10 is able to cross the plate-shaped body 7, passing in the space defined between the tools 10 and the inner walls of the through openings 14, 15.

[0044] Not all through openings 14, 15 house a tool 10.

[0045] With reference to the particular embodiment shown in the illustrations, in fact, the through openings 14, 15 comprise a plurality of first through openings 14, accommodating at least partially the tools 10, and at least a second through opening 15, clear of the tools 10.

[0046] The second through opening 15 has a projecting edge 16 protruding from the first main face 8.

[0047] Conveniently, the projecting edge 16 extends from the first main face 8 to a distance very close to the excavation plane 12.

[0048] It is easy to understand how the presence of the projecting edge 16 allows to aspirate the excavated material through the second through opening 15, going to withdraw directly in the proximity of the excavation front, and, therefore, to increase the flow rate of the material excavated at inlet, thus obtaining greater excavation speed.

[0049] The suction means 13 also comprise a hood-shaped element 17 having a suction mouth 18 adjacent to the second main face 9 and surrounding the through openings 14, 15.

[0050] Advantageously, the hood-shaped element 17 has a substantially frusto-conical shape wherein the suction mouth 18 defines the larger base of the truncated cone and is substantially circular.

[0051] The suction mouth 18 has a diameter more or less equal to the diameter of the plate-shaped body 7 and, therefore, surrounds and covers all through openings 14, 15 formed on the plate-shaped body itself.

[0052] The hood-shaped element 17 also comprises an outlet section 19 of the excavated material having a smaller surface extension than the suction mouth 18.

[0053] The suction mouth 18 is also circular and defines the smaller base of the truncated cone.

[0054] Preferably, the hood-shaped element 17, the suction mouth 18 and the outlet section 19 are coaxial to the main axis 5.

[0055] In addition, the suction means 13 comprise a suction tubular length 20 of the excavated material associated with the outlet section 19.

[0056] With reference to the particular embodiment shown in the illustrations, the suction tubular length 20 is associated on the top with the suction mouth 18.

[0057] The suction tubular length 20 of the head 1 is in fluid connection with a conveying tube 21 equipping the driving machine.

[0058] The conveying tube 21 is associated with the flanged plate 4 and permits to send the material from depth to the surface.

[0059] The suction means 13 comprise at least an air forced introduction pipe 22 in the suction tubular length 20 able to generate a suction force of the excavated material.

[0060] Advantageously, the suction means 13 comprise a plurality of air forced introduction pipes 22 arranged around the suction tubular length 20.

[0061] The forced introduction pipes 22 communicate

on the top, i.e. at inlet, with blowing tubes 23 equipping the driving machine and on the bottom, i.e. at output, with the suction tubular length 20.

[0062] The pressurized air is introduced inside the suction tubular length 20, thus creating a differential pressure which causes the excavated material to lift inside the suction tubular length itself, this phenomenon being known to the person skilled in the art as reverse circulation (RCD).

[0063] With reference to the particular embodiment shown in the illustrations, the plate-shaped body 7 has a lateral perimeter of circular shape from which extends a shell 24 of substantially cylindrical shape, able to laterally protect the hood-shaped element 17.

[0064] Advantageously, the head 1 comprises control means 25 of the inclination of the plate-shaped body 7.

[0065] Said control means 25 are able to allow the control of the inclination of the plate-shaped body 7, during the excavation operations.

[0066] In this regard, the control means 25 comprise an oscillometer accommodated in the space between the hood-shaped element 17 and the shell 24.

[0067] It cannot however be ruled out that the head 1 can comprise other monitoring devices of the excavation conditions, such as e.g. a thermometer, a hygrometer, or the like.

[0068] The operation of the present invention is as follows.

[0069] The head 1 is made to rotate by the operation of the driving machine.

[0070] The tools 10 are operated in rotation by means of the pressure of the head 1 against the excavation front.

[0071] Simultaneously the excavated material passes through the through openings 14, 15 and is suctioned by the hood-shaped element 17 along the suction tubular length 20, and then is made to exit through the conveying tube 21.

[0072] It has in practice been ascertained how the described invention achieves the intended objects.

[0073] In particular, the fact is underlined that the particular solution of providing a hood-shaped element cooperating with a plurality of through openings formed through the plate-shaped body, permits increasing the amount of material removed in the unit of time and greatly increases the productivity of the excavating head.

Claims

1. Excavating head (1) comprising:

- at least an attachment element (2) to a driving machine to place said head (1) in rotation;
- at least a plate-shaped body (7) having at least a first main face (8) and at least a second main face (9), said first main face (8) being facing to the excavation front and said second main face (9) being opposite to said first main face (8) and

connected to said attachment element (2);

- at least an excavation tool (10) associated with said plate-shaped body (7) so as to protrude at least in part from said first main face (8); and
- suction means (13) of the excavated material associated with said plate-shaped body (7) comprising:

- a plurality of through openings (14, 15) and crossing said plate-shaped body (7) between said first main face (8) and said second main face (9);

characterized by the fact said suction means (13) comprises at least a hood-shaped element (17) having a suction mouth (18) adjacent to said second main face (9) and surrounding said through openings (14, 15), and an outlet section (19) of said excavated material having a surface extension smaller than said suction mouth (18), and by the fact that said suction means (13) comprise a suction tubular length (20) of said excavated material associated with said outlet section (19).

2. Head (1) according to claim 1, **characterized by** the fact that said tool (10) is housed at least in part within at least one of said through openings (14, 15).
3. Head (1) according to claim 2, **characterized by** the fact that said tool (10) housed at least in part within at least one of said openings (14, 15) emerges from said first main face (8) for at least one-twentieth of its volume.
4. Head (1) according to one or more of the preceding claims, **characterized by** the fact that it comprises a plurality of said tools (10) each of which is housed at least in part within one of said through openings (14, 15).
5. Head (1) according to claim 4, **characterized by** the fact that said through openings (14, 15) comprise a plurality of first through openings (14) accommodating at least partially said tools (10) and at least a second through opening (15) clear of said tools (10).
6. Head (1) according to claim 5, **characterized by** the fact that said second through opening (15) has a projecting edge (16) from said first main face (8).
7. Head (1) according to one or more of the preceding claims, **characterized by** the fact that said hood-shaped element (17) has a substantially frusto-conical shape.
8. Head (1) according to claim 1, **characterized by** the fact that said suction means (13) comprise at least an air forced introduction pipe (22) in said suction

tubular length (20) able to generate a suction force of said excavated material.

9. Head (1) according to claim 8, **characterized by** the fact that said suction means (13) comprise a plurality of said air forced introduction pipes (22) arranged around said suction tubular length (20).
10. Head (1) according to one or more of the preceding claims, **characterized by** the fact that said plate-shaped body (7) has a lateral perimeter of circular shape from which extends a shell (24) of a substantially cylindrical shape for the lateral protection of said hood-shaped element (17).
11. Head (1) according to one or more of the preceding claims, **characterized by** the fact that it comprises control means (25) of the inclination of said plate-shaped body (7).
12. Head (1) according to claims 10 and 11, **characterized by** the fact that said control means (25) comprise an oscillometer accommodated in the space between said hood-shaped element (17) and said shell (24).

Patentansprüche

1. Aushubkopf (1), umfassend:

- mindestens ein Anbringungselement (2) an einer Antriebsmaschine, um den Kopf (1) zum Drehen zu bringen,
- mindestens einen plattenförmigen Körper (7), der mindestens eine erste Hauptfläche (8) und mindestens eine zweite Hauptfläche (9) hat, wobei die erste Hauptfläche (8) der Aushubfront zugewandt ist und die zweite Hauptfläche (9) der ersten Hauptfläche (8) gegenüberliegt und mit dem Anbringungselement (2) verbunden ist,
- mindestens ein Aushubwerkzeug (10), das dem plattenförmigen Körper (7) zugeordnet ist, um zumindest teilweise von der ersten Hauptfläche (8) vorzustehen, und
- Saugmittel (13) des ausgehobenen Materials, die dem plattenförmigen Körper (7) zugeordnet sind, umfassend:

- mehrere Durchgangsöffnungen (14, 15), und die den plattenförmigen Körper (7) zwischen der ersten Hauptfläche (8) und der zweiten Hauptfläche (9) kreuzen,

gekennzeichnet durch die Tatsache, dass das Saugmittel (13) mindestens ein haubenförmiges Element (17), das einen Saugmund (18) benachbart zu der zweiten Hauptfläche (9) und die Durchgangs-

öffnungen (14, 15) umgebend hat, und einen Auslassabschnitt (19) des ausgehobenen Materials, der eine Flächenerstreckung hat, die kleiner ist als der Saugmund (18), umfasst, und durch die Tatsache, dass die Saugmittel (13) eine Saugröhrenlänge (20) des ausgehobenen Materials umfassen, die dem Auslassabschnitt (19) zugeordnet ist.

2. Kopf (1) nach Anspruch 1, **gekennzeichnet durch** die Tatsache, dass das Werkzeug (10) zumindest teilweise innerhalb mindestens einer der Durchgangsöffnungen (14, 15) untergebracht ist.
3. Kopf (1) nach Anspruch 2, **gekennzeichnet durch** die Tatsache, dass das Werkzeug (10), das zumindest teilweise innerhalb mindestens einer der Öffnungen (14, 15) untergebracht ist, aus der ersten Hauptfläche (8) um mindestens ein Zwanzigstel seines Volumens hervortritt.
4. Kopf (1) nach einem oder mehreren der vorhergehenden Ansprüche, **gekennzeichnet durch** die Tatsache, dass er mehrere der Werkzeuge (10) umfasst, von denen jedes zumindest teilweise innerhalb einer der Durchgangsöffnungen (14, 15) untergebracht ist.
5. Kopf (1) nach Anspruch 4, **gekennzeichnet durch** die Tatsache, dass die Durchgangsöffnungen (14, 15) mehrere erste Durchgangsöffnungen (14), die zumindest teilweise die Werkzeuge (10) aufnehmen, und mindestens eine zweite Durchgangsöffnung (15), die frei von den Werkzeugen (10) ist, umfassen.
6. Kopf (1) nach Anspruch 5, **gekennzeichnet durch** die Tatsache, dass die zweite Durchgangsöffnung (15) einen vorstehenden Rand (16) von der ersten Hauptfläche (8) hat.
7. Kopf (1) nach einem oder mehreren der vorhergehenden Ansprüche, **gekennzeichnet durch** die Tatsache, dass das haubenförmige Element (17) eine im Wesentlichen kegelförmige Form hat.
8. Kopf (1) nach Anspruch 1, **gekennzeichnet durch** die Tatsache, dass die Saugmittel (13) mindestens ein Luftkraft-Einführungsrohr (22) in der Saugröhrenlänge (20) umfassen, das imstande ist eine Saugkraft des ausgehobenen Materials zu erzeugen.
9. Kopf (1) nach Anspruch 8, **gekennzeichnet durch** die Tatsache, dass die Saugmittel (13) mehrere der Luftkraft-Einführungsrohre (22) umfassen, die um die Saugröhrenlänge (20) angeordnet sind.
10. Kopf (1) nach einem oder mehreren der vorhergehenden Ansprüche, **gekennzeichnet durch** die Tatsache, dass der plattenförmige Körper (7) einen seit-

lichen Umfang von kreisförmiger Form hat, von dem sich eine Hülle (24) von im Wesentlichen zylindrischer Form zum seitlichen Schutz des haubenförmigen Elements (17) erstreckt.

11. Kopf (1) nach einem oder mehreren der vorhergehenden Ansprüche, **gekennzeichnet durch** die Tatsache, dass er Steuermittel (25) zur Neigung des plattenförmigen Körpers (7) umfasst.
12. Kopf (1) nach Anspruch 10 und 11, **gekennzeichnet durch** die Tatsache, dass die Steuermittel (25) ein Oszillometer umfassen, das in dem Raum zwischen dem haubenförmigen Element (17) und der Hülle (24) aufgenommen ist.

Revendications

1. Tête d'excavation (1) comprenant :

- au moins un élément de fixation (2) à une machine d'entraînement pour mettre ladite tête (1) en rotation ;
- au moins un corps en forme de plaque (7) possédant au moins une première face principale (8) et au moins une seconde face principale (9), ladite première face principale (8) faisant face au front d'excavation et ladite seconde face principale (9) étant du côté opposé de ladite première face principale (8) et reliée audit élément de fixation (2) ;
- au moins un outil d'excavation (10) associé audit corps en forme de plaque (7) de manière à faire saillie au moins partiellement de ladite première face principale (8) ; et
- des moyens d'aspiration (13) du matériau excavé associés audit corps en forme de plaque (7) comprenant :
 - une pluralité d'ouvertures traversantes (14, 15) traversant ledit corps en forme de plaque (7) entre ladite première face principale (8) et ladite seconde face principale (9) ;

caractérisée en ce que lesdits moyens d'aspiration (13) comprennent au moins un élément en forme de capot (17) possédant une bouche d'aspiration (18) adjacente à ladite seconde face principale (9) et entourant lesdites ouvertures traversantes (14, 15), et une section de sortie (19) dudit matériau excavé possédant une extension de surface plus petite que ladite bouche d'aspiration (18), et **en ce que** lesdits moyens d'aspiration (13) comprennent une longueur tubulaire d'aspiration (20) dudit matériau excavé associée à ladite section de sortie (19).

2. Tête (1) selon la revendication 1, **caractérisée en ce que** ledit outil (10) est logé au moins partiellement à l'intérieur d'au moins une desdites ouvertures traversantes (14, 15).

5

3. Tête (1) selon la revendication 2, **caractérisée en ce que** ledit outil (10) logé au moins partiellement à l'intérieur d'au moins une desdites ouvertures (14, 15) émerge de ladite première face principale (8) d'au moins un vingtième de son volume.

10

4. Tête (1) selon l'une ou plusieurs des revendications précédentes, **caractérisée en ce qu'elle** comprend une pluralité desdits outils (10) dont chacun est logé au moins partiellement à l'intérieur d'une desdites ouvertures traversantes (14, 15).

15

5. Tête (1) selon la revendication 4, **caractérisée en ce que** lesdites ouvertures traversantes (14, 15) comprennent une pluralité de premières ouvertures traversantes (14) logeant au moins partiellement lesdits outils (10) et au moins une seconde ouverture traversante (15) ne logeant pas lesdits outils (10).

20

6. Tête (1) selon la revendication 5, **caractérisée en ce que** ladite seconde ouverture traversante (15) possède un rebord saillant (16) de ladite première face principale (8).

25

7. Tête (1) selon l'une ou plusieurs des revendications précédentes, **caractérisée en ce que** ledit élément en forme de capot (17) a une forme sensiblement tronconique.

30

8. Tête (1) selon la revendication 1, **caractérisée en ce que** lesdits moyens d'aspiration (13) comprennent au moins un conduit d'introduction forcée d'air (22) dans ladite longueur tubulaire d'aspiration (20) apte à générer une force d'aspiration dudit matériau excavé.

35

40

9. Tête (1) selon la revendication 8, **caractérisée en ce que** lesdits moyens d'aspiration (13) comprennent une pluralité desdits conduits d'introduction forcée d'air (22) agencés autour de ladite longueur tubulaire d'aspiration (20).

45

10. Tête (1) selon l'une ou plusieurs des revendications précédentes, **caractérisée en ce que** ledit corps en forme de plaque (7) possède un périmètre latéral de forme circulaire depuis lequel s'étend une coque (24) d'une forme sensiblement cylindrique pour la protection latérale dudit élément en forme de capot (17).

50

11. Tête (1) selon l'une ou plusieurs des revendications précédentes, **caractérisée en ce qu'elle** comprend des moyens de commande (25) de l'inclinaison dudit corps en forme de plaque (7).

55

12. Tête (1) selon les revendications 10 et 11, **caractérisée en ce que** lesdits moyens de commande (25) comprennent un oscillomètre logé dans l'espace entre ledit élément en forme de capot (17) et ladite coque (24).

5

10

15

20

25

30

35

40

45

50

55

7

Fig. 1

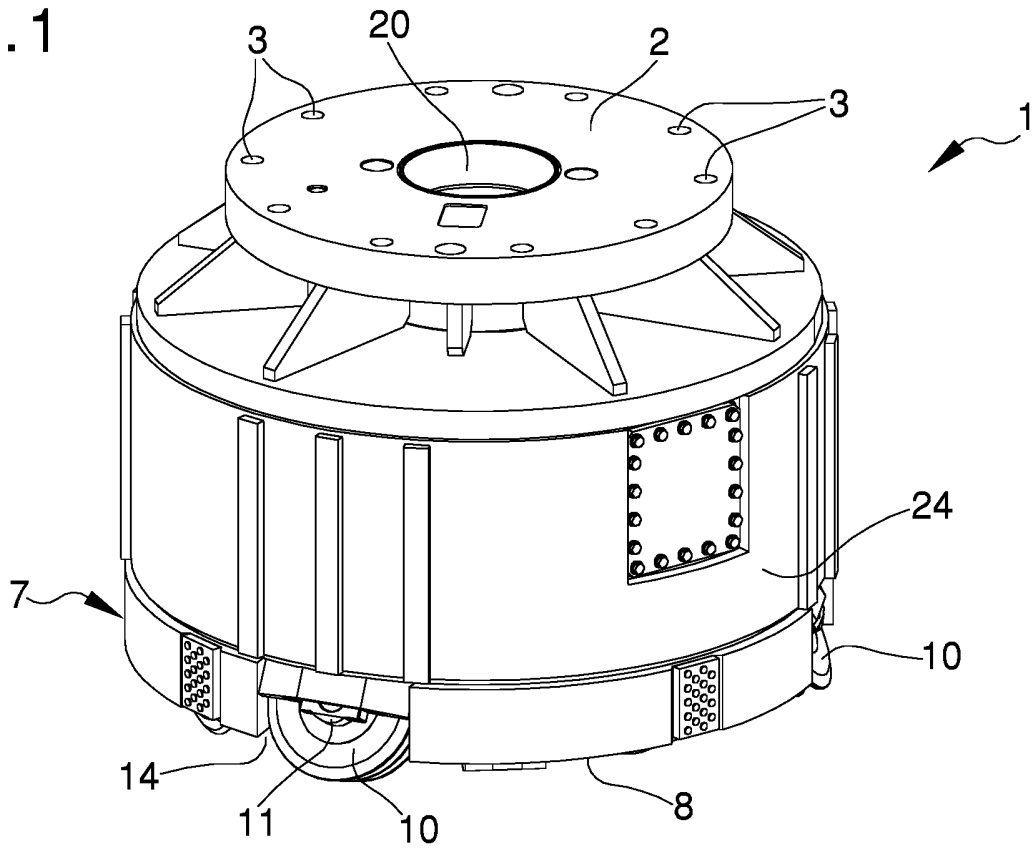
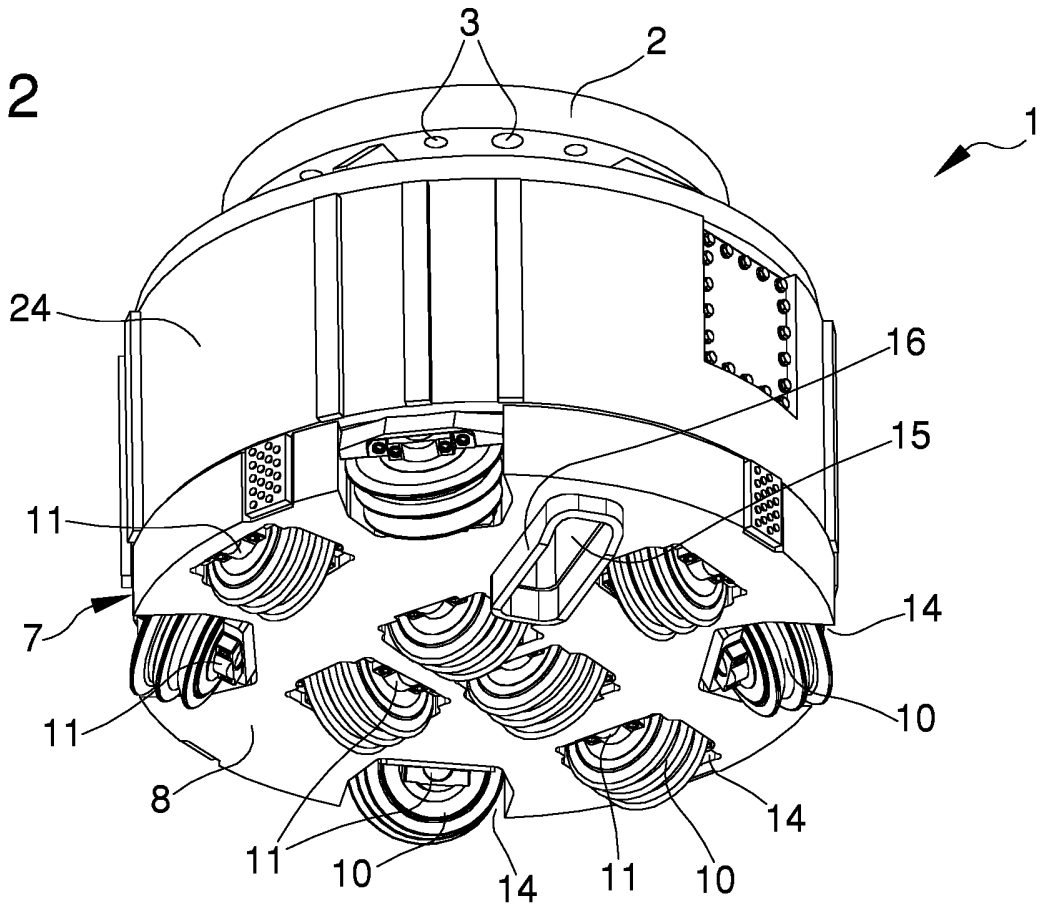


Fig. 2



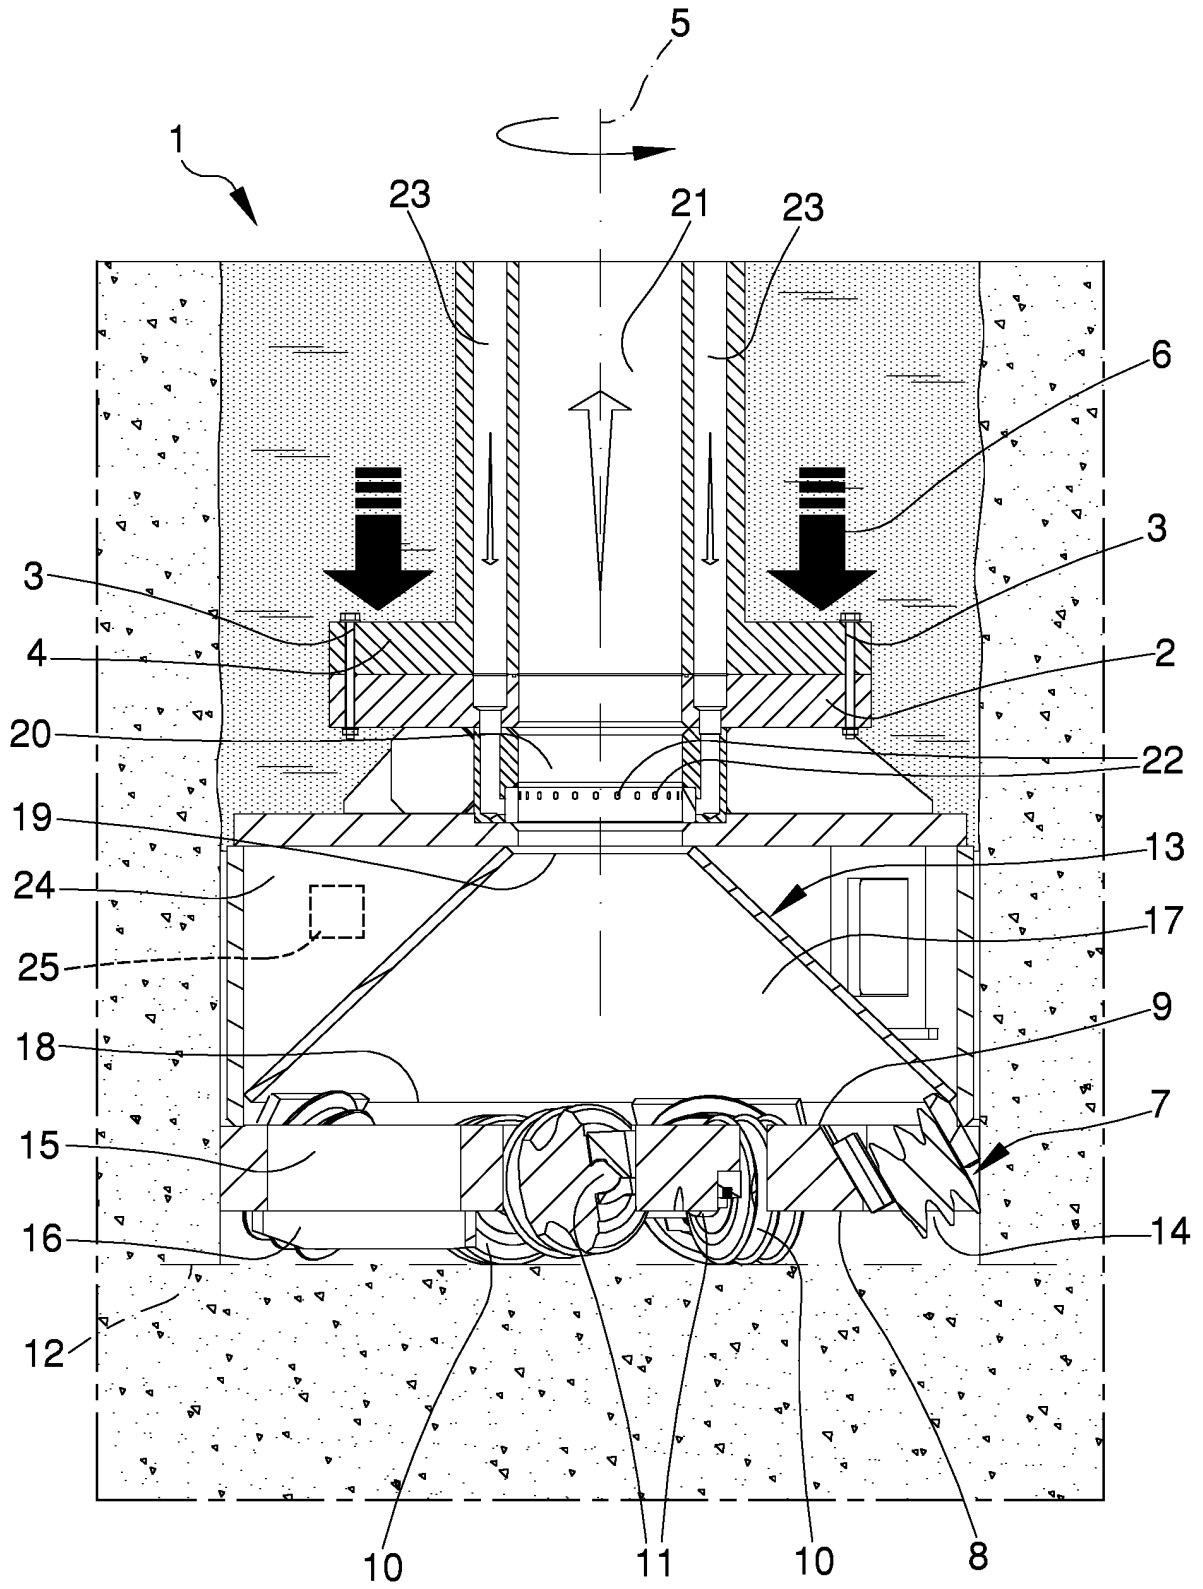


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 20110133517 [0008]
- KR 101401981 [0008]
- US 3967463 A [0008]
- WO 9508691 A [0008]
- WO 2012248848 A [0008]