

(19)



(11) Publication number:

SG 173402 A1

(43) Publication date:

29.08.2011

(51) Int. Cl:

;

(12)

## Patent Application

(21) Application number: **2011052628**

(71) Applicant:

HITACHI CHEMICAL CO., LTD. 1-1,  
NISHI-SHINJUKU 2-CHOME, SHINJUKU-  
KU, TOKYO 1630499 JP

(22) Date of filing: **26.04.2007**

(30) Priority: **JP 2006-125603 28.04.2006**

(72) Inventor:

KOJI MORITA C/O HITACHI CHEMICAL  
CO., LTD., 1500, OGAWA, CHIKUSEI-SHI,  
IBARAKI 308-8521, JAPAN JP  
SHIN TAKANEZAWA C/O HITACHI  
CHEMICAL CO., LTD., 1500, OGAWA,  
CHIKUSEI-SHI, IBARAKI 308-8521,  
JAPAN JP  
KAZUNAGA SAKAI C/O HITACHI  
CHEMICAL CO., LTD., 1500, OGAWA,  
CHIKUSEI-SHI, IBARAKI 308-8521,  
JAPAN JP  
YUUSUKE KONDOU C/O HITACHI  
CHEMICAL CO., LTD., 1500, OGAWA,  
CHIKUSEI-SHI, IBARAKI 308-8521,  
JAPAN JP

(54) Title:

**RESIN COMPOSITION, PREPREG, LAMINATE, AND  
WIRING BOARD**

(57) Abstract:

RESIN COMPOSITION, PREPREG, LAMINATE, AND WIRING BOARD ABSTRACT To provide a resin composition which is advantageous not only in that the resin composition can be produced at low cost, but also in that it is unlikely to thermally expand, a prepreg, a laminate, and a wiring board. A resin composition for use in production of a laminate, the resin composition comprising an insulating resin having an aromatic ring, wherein the insulating resin having an aromatic ring has a molecular weight between crosslinking sites of 300 to 1,000 on the stage after the production of the laminate, as determined from an elastic shear modulus of the insulating resin measured at a temperature of Tg or higher. No Figure

RESIN COMPOSITION, PREPREG, LAMINATE, AND WIRING BOARD

ABSTRACT

To provide a resin composition which is advantageous not only in that the resin composition can be produced at  
5 low cost, but also in that it is unlikely to thermally expand, a prepreg, a laminate, and a wiring board.

A resin composition for use in production of a laminate, the resin composition comprising an insulating resin having an aromatic ring, wherein the insulating resin  
10 having an aromatic ring has a molecular weight between crosslinking sites of 300 to 1,000 on the stage after the production of the laminate, as determined from an elastic shear modulus of the insulating resin measured at a temperature of Tg or higher.

No Figure

SPECIFICATION

Resin composition, prepreg, laminate, and wiring board

5 Field of the Invention

[0001]

The present invention relates to a resin composition, a prepreg, a laminate, and a wiring board.

10 Background Art

[0002]

Recently, as electronic devices are miniaturized and further improved in performance, printed wiring boards having a wiring pitch narrowed, i.e., high-density wiring are desired. As a method of mounting a semiconductor for achieving high-density wiring, instead of the conventional wire bonding method, a flip chip bonding method is widely used. The flip chip bonding method is a method in which a wiring board and a semiconductor are bonded together using a solder ball instead of a wire. A solder ball is disposed between a wiring board and a semiconductor opposite to each other, and the whole of them are heated to cause reflow of the solder (melt bonding), thus bonding and mounting the semiconductor onto the wiring board. In this method, heat at approximately 300°C is applied to the wiring board and others during the solder reflow. In this instance, the wiring board formed using a conventional resin composition as a material possibly suffers heat shrinkage to apply large stresses to the solder ball bonding the wiring board and semiconductor, causing a bonding failure of the wiring.

[0003]

[Patent document 1] Japanese Unexamined Patent Publication No. 2004-182851

[Patent document 2] Japanese Patent No. 2740990

35 [Patent document 3] Japanese Unexamined Patent Publication No. 2000-243864

[Patent document 4] Japanese Unexamined Patent Publication  
No. 2000-114727

DISCLOSURE OF THE INVENTION

5 Problems to be Solved by the Invention

[0004]

In view of the above, a laminate having a low  
thermal expansion coefficient is desired. Conventionally,  
a typical laminate comprises a resin composition comprising  
10 an epoxy resin as a chief material, and glass woven fabric,  
which are cured and integrally molded. An epoxy resin has  
excellent balance between the insulation properties, heat  
resistance, and cost, but it has a large thermal expansion  
coefficient. Therefore, generally, inorganic filler, such  
15 as silica, is added to the epoxy resin to suppress thermal  
expansion of the resin (see patent document 1). By adding  
an increased amount of the inorganic filler to the epoxy  
resin, thermal expansion of the resin can be further  
suppressed. However, it is known that the increase of the  
20 amount of the inorganic filler added to the resin causes a  
lowering of the insulation reliability due to moisture  
absorption, poor adhesion between the resin and wiring  
layers, or a failure of press molding. For this reason, in  
the application of multilayer wiring board, the increase in  
25 the amount of the inorganic filler added to the resin is  
limited.

[0005]

An attempt is made to appropriately select or  
improve the resin to achieve low thermal expansion. For  
30 example, a low thermal-expansion resin composition for  
pressure molding using an epoxy resin having a difunctional  
naphthalene skeleton or a biphenyl skeleton (patent  
document 2) as an example of a known epoxy resin having an  
aromatic ring contains filler in an amount of 80 to 92.5  
35 vol%. Further, conventionally, for reducing the resin  
composition for wiring board in thermal expansion

coefficient, as described in patent documents 3 and 4, a method is generally employed in which the crosslinking density is increased, that is, the molecular weight between crosslinking sites in the present invention is reduced to  
5 increase the Tg, thus lowering the thermal expansion coefficient of the resin composition. For increasing the crosslinking density, namely, for reducing the molecular weight between crosslinking sites, the molecular chain between functional groups is shortened. However, the  
10 molecular chain is impossible to shorten less than a certain length if required reactivity or resin strength should be achieved. Therefore, the reduction of thermal expansion coefficient by a method of increasing the crosslinking density has a limitation.

15 [0006]

As a resin unlikely to thermally expand, polyimide is widely known, but polyimide has problems in that the molding of polyimide requires high temperatures and in that polyimide is expensive. Polyimide is in the form of a film  
20 and hence suitable for a material for flexible substrate, but it is unsuitable for the application of multilayer wiring board which requires rigidity.

It is an object of the present invention to provide a resin composition which is advantageous not only in that  
25 the resin composition can be produced at low cost, but also in that it is unlikely to thermally expand, and a prepreg, a laminate, and a wiring board thereof.

Means to Solve the Problems

30 [0007]

The present invention has the following embodiments.

A resin composition for use in production of a laminate, the resin composition comprising an insulating resin having an aromatic ring, wherein the insulating resin  
35 having an aromatic ring has a molecular weight between crosslinking sites of 300 to 1,000 on the stage after the

production of the laminate, as determined from an elastic shear modulus of the insulating resin measured at a temperature of Tg or higher.

[0008]

5 The resin composition, wherein the insulating resin having an aromatic ring comprises a polycyclic compound.

The resin composition, wherein the insulating resin has a biphenyl structure, a naphthalene structure, an anthracene structure, or a dihydroanthracene structure.


10 The resin composition, wherein the insulating resin is an epoxy resin.

The resin composition, wherein the epoxy resin comprises at least one crystalline epoxy resin.

[0009]

15 The resin composition according to any one of claims 1 to 5, wherein the epoxy resin comprises at least one member selected from a biphenyl novolak epoxy resin represented by the following general formula (1):


[0010]

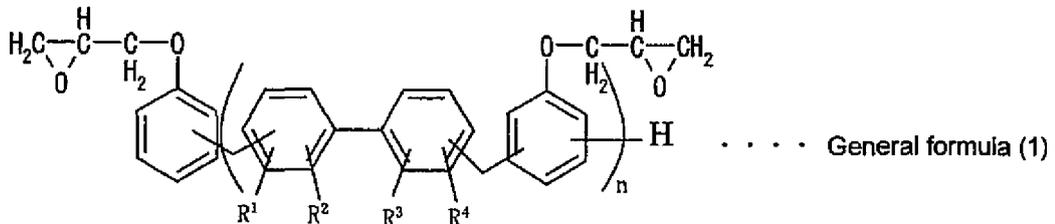

[0011]

wherein each of R<sup>1</sup> to R<sup>4</sup> independently represents a C<sub>m</sub>H<sub>2m+1</sub> group wherein m represents 0 or an integer of 1 or more, and n represents 0 or an integer of 1 or more, an anthracene epoxy resin represented by the following general formula (2):


[0012]

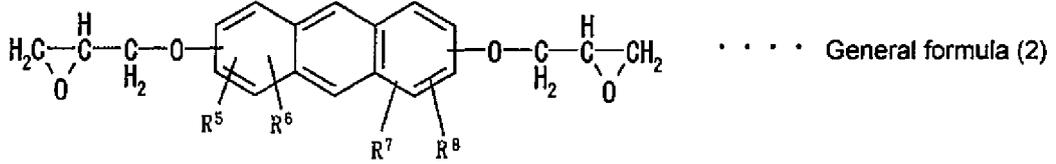

[0013]

wherein each of  $R^5$  to  $R^8$  independently  
5 represents a  $C_pH_{2p+1}$  group wherein  $p$  represents  
0 or an integer of 1 or more,  
and a dihydroanthracene epoxy resin represented by the  
following general formula (3):

[0014]

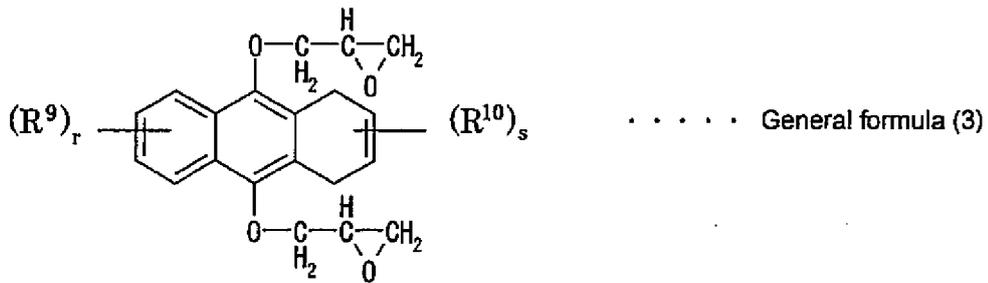

10

[0015]

wherein  $R^9$  each occurrence independently  
represents a  $C_tH_{2t+1}$  group (wherein  $t$   
15 represents 0 or an integer of 1 or more),  $r$   
represents an integer of 0 to 4,  $R^{10}$  each  
occurrence independently represents a  $C_uH_{2u+1}$   
group (wherein  $u$  represents 0 or an integer  
of 1 or more), and  $s$  represents an integer of  
20 0 to 6.

[0016]

The resin composition, wherein the epoxy resin uses  
a curing agent which comprises at least one member selected  
25 from a phenolic novolak resin, a cresol novolak resin, a  
bisphenol A novolak resin, an aminotriazine novolak resin,  
a bismaleimide-containing aminotriazine novolak resin,

dicyandiamide, and benzoguanamine.

A prepreg obtained by applying the resin composition to a substrate so that the substrate is impregnated with the resin composition, and then drying them.

5           The prepreg, wherein the substrate is glass woven fabric, glass nonwoven fabric, or aramid nonwoven fabric.

A laminate obtained by subjecting the prepreg of the present invention to laminate molding.

10           A wiring board obtained by subjecting the laminate of the present invention to circuit processing.

#### Effect of the Invention

[0017]

15           Unlike a conventional method in which the crosslinking density is increased, by appropriately controlling the resin formulation in crosslinking density so that the resin having an aromatic ring has a molecular weight between crosslinking sites of 300 to 1,000, there can be provided a resin composition which is advantageous  
20           not only in that the resin composition can be produced at low cost, but also in that it has a low thermal expansion coefficient, and a prepreg, a laminate, and a wiring board thereof.

25           BEST MODE FOR CARRYING OUT THE INVENTION

[0018]

30           The present inventors have made studies. As a result, it has unexpectedly been found that a conventional method of increasing the crosslinking density, namely, reducing the molecular weight between crosslinking sites in the present invention is not effective in lowering the thermal expansion coefficient. The present inventors have further made extensive and intensive studies. As a result,  
35           it has unexpectedly been found that controlling the resin formulation so that the resin having an aromatic ring has a crosslinking density corresponding to a molecular weight

between crosslinking sites in the range of from 300 to 1,000 is very effective in lowering the thermal expansion coefficient. The resin composition of the present invention is used in production of a laminate, and  
5 comprises an insulating resin having an aromatic ring. The insulating resin having an aromatic ring used in the present invention has a molecular weight between crosslinking sites of 300 to 1,000 on the stage after the production of the laminate, as determined from an elastic  
10 shear modulus measured at a temperature of  $T_g$  or higher. When the insulating resin has a molecular weight between crosslinking sites of 300 to 1,000, strong interaction between aromatic rings can be achieved, making it possible to obtain a resin composition and a material for multilayer  
15 wiring board (prepreg or laminate) having a low thermal expansion coefficient. When the molecular weight between crosslinking sites is 300 or less, a material having an aromatic ring and having a small number of functional groups (exclusive of a monofunctional material) can be  
20 added to achieve a molecular weight between crosslinking sites of 300 or more. The addition of a material having a large functional group equivalent is effective. In this case, it is preferred that the aromatic ring contains a polycyclic compound, further preferably has a biphenyl  
25 structure, a naphthalene structure, an anthracene structure, or a dihydroanthracene structure. On the other hand, when the molecular weight between crosslinking sites is 1,000 or more, a material having an aromatic ring and having a large number of functional groups can be added to achieve a  
30 molecular weight between crosslinking sites of 1,000 or less. The addition of a material having a small functional group equivalent is effective. Also in this case, it is preferred that the aromatic ring contains the above polycyclic compound. The stage after the production of the  
35 laminate means a stage after the heat experience step in, for example, the production of the laminate or production

of a multilayer wiring board or the like using the laminate. An elastic shear modulus of the insulating resin is generally measured by a dynamic viscoelasticity apparatus. [0019]

5           The molecular weight between crosslinking sites as determined from an elastic shear modulus measured by a dynamic viscoelasticity apparatus at a temperature of  $T_g$  or higher is described in, for example, Dynamic properties of polymers and composite materials (author: L. E. Nielsen; translator: Shigeharu Onoki) published by Kagaku-Dojin Publishing Company, Inc., and a molecular weight between crosslinking sites is determined from the descriptions of this book. Specifically, [0020]

15            $\log G \cong 7.0 + 293\rho/Mc$  ( $G$ : elastic shear modulus;  $\rho$ : density of a material;  $Mc$ : molecular weight between crosslinking sites)

Formula (1)

[0021]

20 is calculated using an empirical formula consistent with the experimental results. In this formula, dyn is used as a unit of elastic shear modulus.

$G$  (elastic shear modulus) in the formula (1) above is generally determined by applying a value of storage modulus  $E$  at a temperature of  $T_g$  or higher calculated from a dynamic viscoelasticity apparatus to the following formula (2).

[0022]

$$E = 2G(1 + \sigma) \quad (\sigma: \text{Poisson ratio})$$

30           Formula (2)

[0023]

The dynamic viscoelasticity measurement apparatus generally measures dynamic viscoelasticity by applying sinusoidal wave vibration or composite wave vibration to a specimen in the elongation, compression, bending, or shear

direction by a non-resonant forced vibration method. As an example of a commercially available apparatus, there can be mentioned Rheosol-E-4000, manufactured by UBM Co., Ltd. A method for the measurement is such that sinusoidal wave or  
5 composite wave vibration is applied to a specimen placed in a thermostatic chamber at set frequency and amplitude and the resultant stress response is detected by a detector to determine a storage modulus or the like by calculation from a measurement operation formula.

10 [0024]

The insulating resin having an aromatic ring has a molecular weight between crosslinking sites of 300 to 1,000, preferably 310 to 900, further preferably 310 to 800, as determined from an elastic shear modulus measured by the  
15 above-mentioned measurement apparatus at a temperature of Tg or higher. When the molecular weight between crosslinking sites is less than 300, the interaction between aromatic rings is so weak that the thermal expansion coefficient of the resin cannot be satisfactorily  
20 reduced. On the other hand, when the molecular weight between crosslinking sites is more than 1,000, the interaction between aromatic rings is obtained, but the crosslinking density of the resin is reduced, so that the thermal expansion coefficient of the resin cannot be  
25 satisfactorily reduced.

[0025]

With respect to the insulating resin used in the present invention, there is no particular limitation as long as the insulating resin has an aromatic ring, but an  
30 epoxy resin having excellent insulation properties and moisture absorption is preferably used in the application of multilayer wiring board. With respect to the epoxy resin used in the present invention, there is no particular limitation as long as the epoxy resin is a compound having  
35 two or more epoxy groups in the molecule thereof. Examples include naphthalene epoxy resins (particularly difunctional

naphthalene epoxy resins), anthracene epoxy resins, dihydroanthracene epoxy resins, biphenyl epoxy resins, bisphenol A epoxy resins, bisphenol F epoxy resins, bisphenol S epoxy resins, biphenyl novolak epoxy resins, phenolic novolak epoxy resins, and cresol novolak epoxy resins. Among these, the crystalline epoxy resin is a highly crystalline epoxy resin which is a thermosetting epoxy resin having properties such that the high molecular chains are orderly arranged at a temperature under its melting point. And the resin in molten state exhibits a viscosity as low as that of a liquid resin although it is a solid resin. Examples of crystalline epoxy resins include naphthalene epoxy resins, anthracene epoxy resins, dihydroanthracene epoxy resins, biphenyl novolak epoxy resins, and biphenyl epoxy resins, and the crystalline epoxy resin is preferably used for enhancing the interaction between aromatic rings. These compounds may have any molecular weight, and can be used in combination. [0026]

In the resin composition of the present invention, when an epoxy resin is used, it is preferred that the resin composition contains a curing agent. With respect to the curing agent, there is no particular limitation as long as it has a curing action for epoxy resin, and examples include various amines, acid anhydrides, and novolak resins. Of these, especially preferred are a phenolic novolak resin, a cresol novolak resin, a bisphenol A novolak resin, an aminotriazine novolak resin, a bismaleimide-containing aminotriazine novolak resin, dicyandiamide, and benzoguanamine, and these can be used individually or in combination.

In the resin composition of the present invention, a curing accelerator can be used. With respect to the curing accelerator, there is no particular limitation as long as it has a curing acceleration action. When an epoxy resin is used, examples of curing accelerators include latent

imidazole and imidazole derivatives, a BF<sub>3</sub> amine complex, triphenylphosphine, 1,8-diazabicyclo-(5.4.0)undecene-7, ethyltriphenylphosphonium bromide, and tetramethylammonium chloride, and especially preferred examples include  
5 imidazole and imidazole derivatives.  
[0027]

In mixing the resin composition of the present invention, it is preferred that a solvent is added to the resin composition. With respect to the solvent, there is  
10 no particular limitation as long as the solvent has properties such that the insulating resin, a curing agent for a curing reaction of the insulating resin, and others are dissolved in and mixed into the solvent. With respect to the solvent, preferred is acetone, methyl ethyl ketone,  
15 methyl butyl ketone, toluene, xylene, ethyl acetate, N,N-dimethylformamide, N,N-dimethylacetamide, ethanol, ethylene glycol monomethyl ether, propylene glycol monomethyl ether, propylene glycol monomethyl ether acetate, cyclohexanone, or cyclopentanone since they have excellent dissolving  
20 power for the resin composition and a relatively low boiling point. With respect to the amount of the solvent added, there is no particular limitation as long as the insulating resin can be dissolved in the solvent, but the amount of the solvent is preferably in the range of from 20  
25 to 300 parts by weight, further preferably 30 to 200 parts by weight, relative to 100 parts by weight of the sum of the insulating resin and the curing agent. The above solvents can be used in combination.  
[0028]

30 In the resin composition, inorganic filler can be used. With respect to the inorganic filler, silica, alumina, aluminum hydroxide, calcium carbonate, clay, talc, silicon nitride, boron nitride, titanium oxide, barium titanate, lead titanate, or strontium titanate can be used.  
35 For obtaining the material for multilayer wiring board (prepreg or laminate) of the present invention having

uniform and excellent handling properties, the amount of the inorganic filler added is preferably 300 parts by weight or less, further preferably 250 parts by weight or less, relative to 100 parts by weight of the sum of the insulating resin and the curing agent in the resin composition of the present invention. When inorganic filler is added to the resin composition, for uniformly dispersing the filler in the composition, a mixer, a homogenizer, or the like is advantageously used.

10 [0029]

In the resin composition of the present invention, an additive can be further used in such an amount that the effect aimed at by the present invention can be obtained. With respect to the additive, a silane coupling agent, a defoamer, or the like can be used. For maintaining excellent properties of the resin composition, the amount of the additive used is preferably 5 parts by weight or less, further preferably 3 parts by weight or less, relative to 100 parts by weight of the sum of the insulating resin and the curing agent.

20 [0030]

Generally, when inorganic filler is added to the insulating resin, the resultant resin composition has an elastic modulus increased due to the elastic modulus of the inorganic filler, and hence has a molecular weight between crosslinking sites apparently smaller than the molecular weight between crosslinking sites of the single insulating resin. Therefore, it is preferred that an elastic modulus of the insulating resin is measured in a state such that the inorganic filler is removed and a molecular weight between crosslinking sites is determined by making a calculation, but, when the inorganic filler cannot be removed, the elastic modulus is corrected using the formula (3) below and a molecular weight between crosslinking sites calculated using the formula (1) and formula (2) above can be used as the molecular weight between crosslinking sites

in the present invention. In the correction of elastic modulus using the formula (3), Pa is used as a unit of elastic modulus, and the unit is corrected to dyn in the formula (1), and, with respect to the Poisson ratio and specific gravity in the formula (2), respective values for the single resin must be used. When these values cannot be actually measured, a Poisson ratio of 0.5 and a specific gravity of 1.2 are applied to the formula to make a calculation.

10

[0031]

$$E_b = E_a - (0.065 \times V_f \times V_f + 0.023 \times V_f + 0.001) \times V_f \times E_f/8$$

Formula (3)

15

(Vf: volume percentage of inorganic filler; Ea: storage modulus measured in a state such that inorganic filler is incorporated; Eb: corrected storage modulus; Ef: elastic modulus of inorganic filler)

20

[0032]

The prepreg of the present invention is obtained by applying the above-described resin composition to a substrate and drying them. The laminate of the present invention is obtained by subjecting the prepreg to laminate molding. With respect to the conditions for laminate molding, there is no particular limitation, and the laminate may be a metal-clad laminate formed by disposing a metallic foil on the prepreg upon laminate molding. The wiring board of the present invention is obtained by subjecting the above-mentioned laminate to general circuit processing.

30

[0033]

35

With respect to the substrate, there can be used any substrate such that the substrate is impregnated with the resin composition and they can be heat-cured and unified, and glass woven fabric, glass nonwoven fabric, or aramid

nonwoven fabric is preferably used. For example, nonwoven fabric or woven fabric comprised of synthetic fibers, or paper can be used. When the resin composition and the substrate are heat-cured and unified, the resultant resin composition has an increased elastic modulus due to the elastic modulus of the substrate. Hence, the result has a molecular weight between crosslinking sites apparently smaller than that of the insulating resin alone. Therefore, it is preferred that a molecular weight between crosslinking sites is determined from an elastic modulus solely of the resin separated from the substrate. But, when the resin cannot be separated from the substrate, the elastic modulus measured in a state such that the resin is unified with the substrate can be corrected using the formula (4) below. A molecular weight between crosslinking sites determined using the corrected storage modulus and using the formula (1) and formula (2) by making a calculation can be used as the molecular weight between crosslinking sites in the present invention, and, with respect to the Poisson ratio and specific gravity in the formula (2), respective values for the single resin must be used. When these values cannot be actually measured, a Poisson ratio of 0.5 and a specific gravity of 1.2 are applied to the formula to make a calculation.

[0034]

$$E_a = 0.11 \times E_b - 6.25 \times 10^8$$

Formula (4)

( $E_a$ : corrected storage modulus;  $E_b$ : storage modulus measured in a state such that resin is unified with substrate)

When inorganic filler is added to the resin composition, the elastic modulus calculated using the formula (4) must be further corrected using the formula (3) above.

35

Examples

[0035]

Hereinbelow, the present invention will be described  
in more detail with reference to the following Examples,  
which should not be construed as limiting the scope of the  
5 present invention.

[0036]

Example 1

An insulating resin varnish having the formulation  
10 shown below was prepared. The equivalent of the heat  
curing agent relative to epoxy was 1.0. The insulating  
resin varnish was applied to a PET film and dried at 120°C  
for 10 minutes so that the resin was in a semicured state  
to prepare a film with insulating resin having a thickness  
15 of 70±5 μm. A semicured resin was removed from the film  
with insulating resin and obtained in the form of powder.  
From the powder of semicured resin, a resin plate was  
prepared in accordance with the following procedure. As a  
spacer and a release sheet, a fluororesin sheet having  
20 formed therein a 50 mm square as a die for resin plate was  
prepared, and the resin powder was placed in the square,  
and a copper foil was disposed on both sides of the sheet  
and cured under press conditions at 175°C and 2.5 MPa for  
90 minutes. Then, the copper foil was etched away, and the  
25 resin plate was peeled off the fluororesin sheet to prepare  
a resin plate having a thickness of 0.2 mm for measurement  
of thermal expansion coefficient and elastic modulus.

- Difunctional naphthalene epoxy resin: HP-4032D:  
30 100 g (trade name; manufactured by Dainippon Ink &  
Chemicals Incorporated)
- Aminotriazine novolak resin: LA-3018: 52.9 g  
(trade name; manufactured by Dainippon Ink & Chemicals  
Incorporated)
- 35 • Curing accelerator: 1-Cyanoethyl-2-  
phenylimidazole: 2PZ-CN: 0.5 g (trade name; manufactured by

Shikoku Corporation)

· Solvent: Methyl ethyl ketone: 250 g

[0037]

5 Example 2

A resin plate for measurement of thermal expansion coefficient and elastic modulus was obtained in substantially the same manner as in Example 1 except that the epoxy resin was changed to 100 g of a dihydroanthracene epoxy resin: YX-8800 (trade name; manufactured by Japan  
10 Epoxy Resins Co., Ltd.), and that the amount of aminotriazine novolak resin LA-3018 as a curing agent was changed from 52.9 g to 39.8 g.

15 [0038]

Example 3

A resin plate for measurement of thermal expansion coefficient and elastic modulus was obtained in substantially the same manner as in Example 1 except that  
20 the epoxy resin was changed to 100 g of a biphenyl novolak epoxy resin: NC-3000-H (trade name; manufactured by Nippon Kayaku Co., Ltd.), and that the amount of aminotriazine novolak resin LA-3018 as a curing agent was changed to 24.9 g.

25

[0039]

Example 4

A resin plate for measurement of thermal expansion coefficient and elastic modulus was obtained in  
30 substantially the same manner as in Example 1 except that 187.5 g of silica: SO-G1 (trade name; manufactured by Admatechs Co., Inc.; average particle size: 0.2 to 0.4  $\mu\text{m}$ ) was added to the formulation in Example 1.

35 [0040]

Example 5

(1) Preparation of impregnating resin for glass woven fabric

An impregnating resin varnish for glass woven fabric having the formulation shown below was prepared.

5

· Difunctional naphthalene epoxy resin: HP-4032D: 100 g (trade name; manufactured by Dainippon Ink & Chemicals Incorporated)

10 · Aminotriazine novolak resin: LA-3018: 52.9 g (trade name; manufactured by Dainippon Ink & Chemicals Incorporated)

· Curing accelerator: 2PZ-CN: 0.5 g (trade name; manufactured by Shikoku Corporation)

15 · Silica: SO-G1: 187.5 g (trade name; manufactured by Admatechs Co., Inc.; average particle size: 0.2 to 0.4  $\mu\text{m}$ )

· Solvent: Methyl ethyl ketone: 400 g

[0041]

20 (2) Preparation of substrate for measurement of thermal expansion coefficient

Glass woven fabric having a thickness of 0.2 mm (basis weight: 210 g/m<sup>2</sup>) was impregnated with the impregnating resin varnish for glass woven fabric prepared in item (1) above, and heated at 160°C for 3 minutes to obtain a semicured (B-stage) prepreg. Four sheets of the resultant prepreg were stacked on one another, and on both sides of the stacked prepreg was disposed a copper foil (trade name: F2-WS) having a thickness of 18  $\mu\text{m}$  (Rz: 2.0  $\mu\text{m}$ ; Ra: 0.3  $\mu\text{m}$ ) as a metallic foil, followed by pressing under conditions at 175°C and 2.5 MPa for 90 minutes, to prepare a double-sided copper-clad laminate. The copper-clad laminate prepared was immersed in a 150 g/l aqueous solution of ammonium persulfate at 40°C for 20 minutes to etch the copper foil away, obtaining a substrate for measurement of thermal expansion coefficient and elastic

25  
30  
35

modulus.

[0042]

Example 6

5           A resin plate for measurement of thermal expansion  
coefficient and elastic modulus was obtained in  
substantially the same manner as in Example 1 except that  
the epoxy resin was changed to 100 g of a dihydroanthracene  
epoxy resin: YX-8800 (trade name; manufactured by Japan  
10 Epoxy Resins Co., Ltd.) and 65.8 g of a biphenyl novolak  
epoxy resin: NC-3000-H (trade name; manufactured by Nippon  
Kayaku Co., Ltd.), that 84.5 g of a cresol novolak resin:  
KA-1165 (trade name; manufactured by Dainippon Ink &  
Chemicals Incorporated) was added, and that 1.66 g of a  
15 dicyandiamide (manufactured by Kanto Chemical Co., Ltd.),  
in terms of a dicyandiamide, dissolved in propylene glycol  
monomethyl ether in an amount of 2% by weight was added.

[0043]

20 Example 7

          A resin plate for measurement of thermal expansion  
coefficient and elastic modulus was obtained in  
substantially the same manner as in Example 1 except that  
the epoxy resin was changed to 100 g of a dihydroanthracene  
25 epoxy resin: YX-8800 (trade name; manufactured by Japan  
Epoxy Resins Co., Ltd.) and 65.8 g of a biphenyl novolak  
epoxy resin: NC-3000-H (trade name; manufactured by Nippon  
Kayaku Co., Ltd.), that 75.1 g of a cresol novolak resin:  
KA-1165 (trade name; manufactured by Dainippon Ink &  
30 Chemicals Incorporated) was added, and that 9.9 g of  
benzoguanamine (manufactured by Kanto Chemical Co., Ltd.)  
was added.

[0044]

35 Example 8

          A resin plate for measurement of thermal expansion

coefficient and elastic modulus was obtained in substantially the same manner as in Example 1 except that the epoxy resin was changed to 100 g of a difunctional naphthalene epoxy resin: HP-4032D (trade name; manufactured  
5 by Dainippon Ink & Chemicals Incorporated), and that 478 g of a bismaleimide-containing aminotriazine novolak resin: IZ-9872 (trade name; manufactured by Dainippon Ink & Chemicals Incorporated) was added.

10 [0045]

Example 9

A resin plate for measurement of thermal expansion coefficient and elastic modulus was obtained in substantially the same manner as in Example 1 except that  
15 the epoxy resin was changed to 100 g of a dihydroanthracene epoxy resin: YX-8800 (trade name; manufactured by Japan Epoxy Resins Co., Ltd.) and 44.8 g of a phenolic novolak epoxy resin: N-770 (trade name; manufactured by Dainippon Ink & Chemicals Incorporated), that the amount of LA-3018  
20 was changed to 59.6 g, and that 249.8 g of silica: SO-G1 (trade name; manufactured by Admatechs Co., Inc.; average particle size: 0.2 to 0.4  $\mu\text{m}$ ) was further added.

[0046]

25 Example 10

A resin plate for measurement of thermal expansion coefficient and elastic modulus was obtained in substantially the same manner as in Example 1 except that  
30 the epoxy resin was changed to 100 g of a dihydroanthracene epoxy resin: YX-8800 (trade name; manufactured by Japan Epoxy Resins Co., Ltd.) and 42.6 g of a phenolic novolak epoxy resin: N-740 (trade name; manufactured by Dainippon Ink & Chemicals Incorporated), that the amount of LA-3018  
35 as a curing agent was changed to 59.6 g, and that 247.1 g of silica: SO-G1 (trade name; manufactured by Admatechs Co., Inc.; average particle size: 0.2 to 0.4  $\mu\text{m}$ ) was further

added.

[0047]

Example 11

5           A resin plate for measurement of thermal expansion  
coefficient and elastic modulus was obtained in  
substantially the same manner as in Example 1 except that  
the epoxy resin was changed to 100 g of a dihydroanthracene  
epoxy resin: YX-8800 (trade name; manufactured by Japan  
10 Epoxy Resins Co., Ltd.) and 49.5 g of a bisphenol A epoxy  
resin: N-865 (trade name; manufactured by Dainippon Ink &  
Chemicals Incorporated), that the amount of LA-3018 as a  
curing agent was changed to 59.6 g, and that 255.6 g of  
silica: SO-G1 (trade name; manufactured by Admatechs Co.,  
15 Inc.; average particle size: 0.2 to 0.4  $\mu$ m) was further  
added.

[0048]

Example 12

20           A substrate for measurement of thermal expansion  
coefficient and elastic modulus was obtained in  
substantially the same manner as in Example 5 except that  
the epoxy resin was changed to 100 g of a dihydroanthracene  
epoxy resin: YX-8800 (trade name; manufactured by Japan  
25 Epoxy Resins Co., Ltd.) and 65.8 g of a biphenyl novolak  
epoxy resin: NC-3000-H (trade name; manufactured by Nippon  
Kayaku Co., Ltd.), that the curing agent was changed to  
84.5 g of a cresol novolak resin: KA-1165 (trade name;  
manufactured by Dainippon Ink & Chemicals Incorporated) and  
30 1.66 g of a dicyandiamide (manufactured by Kanto Chemical  
Co., Ltd.), in terms of a dicyandiamide, dissolved in  
propylene glycol monomethyl ether in an amount of 2% by  
weight, and that the amount of silica: SO-G1 (trade name;  
manufactured by Admatechs Co., Inc.; average particle size:  
35 0.2 to 0.4  $\mu$ m) was changed to 308.0 g.

[0049]

Comparative Example 1

An insulating resin varnish having the formulation shown below was prepared. The equivalent of the heat  
5 curing agent relative to epoxy was 1.0. The insulating resin varnish was applied to a PET film and dried at 120°C for 10 minutes to prepare a film with insulating resin having a thickness of 70±5 μm. A semicured resin was removed from the film with insulating resin and obtained in  
10 the form of powder. From the powder of semicured resin, a resin plate was prepared in accordance with the following procedure. As a spacer and a release sheet, a fluororesin sheet having formed therein a 50 mm square as a die for resin plate was prepared, and the resin powder was placed  
15 in the square, and a copper foil was disposed on both sides of the sheet and cured under press conditions at 175°C and 2.5 MPa for 90 minutes. Then, the copper foil was etched away, and the resin plate was peeled off the fluororesin sheet to prepare a resin plate having a thickness of 0.2 mm  
20 for measurement of thermal expansion coefficient and elastic modulus.

- Phenolic novolak epoxy resin: N-770: 100 g (trade name; manufactured by Dainippon Ink & Chemicals  
25 Incorporated)
- Phenolic novolak resin: HP-850: 53.3 g (trade name; manufactured by Hitachi Chemical Co., Ltd.)
- Dicyandiamide: 0.13 g (trade name; manufactured by Kanto Chemical Co., Ltd.)
- 30 · Curing accelerator: 2PZ-CN: 0.5 g (trade name; manufactured by Shikoku Corporation)
- Solvent: Methyl ethyl ketone: 250 g

[0050]

35 Comparative Example 2

A resin plate for measurement of thermal expansion

coefficient and elastic modulus was obtained in substantially the same manner as in Comparative Example 1 except that the epoxy resin was changed to 100 g of a tetrafunctional naphthalene epoxy resin: HP-4700 (trade name; manufactured by Dainippon Ink & Chemicals Incorporated), and that the curing agent was changed to 43.4 g of an aminotriazine novolak resin: LA-3018 (trade name; manufactured by Dainippon Ink & Chemicals Incorporated).

10

[0051]

Comparative Example 3

Preparation of HP-4032 reaction product

Ingredients of formulation 1 shown below were placed in a 1-liter four-necked separable flask equipped with a thermometer, a condenser, and a stirrer to effect a reaction at 100°C for 2 hours. The resultant reaction mixture was cooled to room temperature (25°C), and ingredients of formulation 2 shown below were added to the mixture to prepare an insulating resin varnish. The insulating resin varnish was applied to a PET film and dried at 160°C for 10 minutes to prepare a film with insulating resin having a thickness of 70±5 μm. A semicured resin was removed from the film with insulating resin and obtained in the form of powder. From the powder of semicured resin, a resin plate was prepared in accordance with the following procedure. As a spacer and a release sheet, a fluororesin sheet having formed therein a 50 mm square as a die for resin plate was prepared, and the resin powder was placed in the square, and a copper foil was disposed on both sides of the sheet and cured under press conditions at 175°C and 2.5 MPa for 90 minutes. Then, the copper foil was etched away, and the resin plate was peeled off the fluororesin sheet to prepare a resin plate having a thickness of 0.2 mm for measurement of thermal expansion coefficient and elastic modulus.

35

Formulation 1

- Difunctional naphthalene epoxy resin: HP-4032D:  
83.2 g (trade name; manufactured by Dainippon Ink &  
5 Chemicals Incorporated)
- Bisphenol A: 69.8 g (reagent grade; manufactured  
by Kanto Chemical Co., Ltd.)
- Curing accelerator: 2PZ-CN: 0.4 g (trade name;  
manufactured by Shikoku Corporation)

10

Formulation 2

- Difunctional naphthalene epoxy resin: HP-4032D:  
100 g (trade name; manufactured by Dainippon Ink &  
Chemicals Incorporated)
- 15 · Aminotriazine novolak resin: LA-3018: 52.9 g  
(trade name; manufactured by Dainippon Ink & Chemicals  
Incorporated)
- Curing accelerator: 2PZ-CN: 0.5 g (trade name;  
manufactured by Shikoku Corporation)
- 20 · Solvent: Cyclohexanone: 250 g

[0052]

Comparative Example 4

A resin plate for measurement of thermal expansion  
25 coefficient and elastic modulus was obtained in  
substantially the same manner as in Comparative Example 1  
except that 188.2 g of silica: SO-G1 (trade name;  
manufactured by Admatechs Co., Inc.; average particle size:  
0.2 to 0.4  $\mu\text{m}$ ) was further added.

30

[0053]

Comparative Example 5

(1) Preparation of impregnating resin for glass woven  
fabric

35 An impregnating resin varnish for glass woven fabric  
having the formulation shown below was prepared.

· Phenolic novolak epoxy resin: N-770: 100 g (trade name; manufactured by Dainippon Ink & Chemicals Incorporated)

5           · Phenolic novolak resin: HP-850: 53.3 g (trade name; manufactured by Hitachi Chemical Co., Ltd.)

· Dicyandiamide: 0.13 g (trade name; manufactured by Kanto Chemical Co., Ltd.)

10           · Curing accelerator: 2PZ-CN: 0.5 g (trade name; manufactured by Shikoku Corporation)

· Silica: SO-G1: 188.2 g (trade name; manufactured by Admatechs Co., Inc.; average particle size: 0.2 to 0.4  $\mu\text{m}$ )

15           · Solvent: Methyl ethyl ketone: 400 g

[0054]

(2) Preparation of substrate for measurement of thermal expansion coefficient

20           Glass woven fabric having a thickness of 0.2 mm (basis weight: 210 g/m<sup>2</sup>) was impregnated with the impregnating resin varnish for glass woven fabric prepared in item (1) above, and heated at 160°C for 3 minutes to obtain a semicured (B-stage) prepreg. Four sheets of the resultant prepreg were stacked on one another, and on both  
25           sides of the stacked prepreg was disposed a copper foil (trade name: F2-WS) having a thickness of 18  $\mu\text{m}$  (Rz: 2.0  $\mu\text{m}$ ; Ra: 0.3  $\mu\text{m}$ ), followed by pressing under conditions at 175°C and 2.5 MPa for 90 minutes, to prepare a double-sided  
30           copper-clad laminate. The copper-clad laminate prepared was immersed in a 150 g/l aqueous solution of ammonium persulfate at 40°C for 20 minutes to etch the copper foil away, obtaining a substrate for measurement of thermal expansion coefficient and elastic modulus.

35           [0055]

Comparative Example 6

A substrate for measurement of thermal expansion coefficient and elastic modulus was obtained in substantially the same manner as in Comparative Example 5 except that the amount of silica SO-G1 was changed to 282.3 g.

[0056]

Comparative Example 7

Preparation of a sample was conducted in substantially the same manner as in Comparative Example 5 except that the amount of silica SO-G1 was changed to 422.0 g, but the press moldability was too poor to obtain a sample.

[0057]

Comparative Example 8

Preparation of a sample was conducted in substantially the same manner as in Comparative Example 1 except that the epoxy resin was changed to 100 g of a difunctional naphthalene epoxy resin: HP-4032D (trade name; manufactured by Dainippon Ink & Chemicals Incorporated), and that the curing agent was changed to 83.8 g of bisphenol A (manufactured by Kanto Chemical Co., Ltd.) and dicyandiamide was not added, but the sample was disadvantageously elongated due to the load of the measurement apparatus at a temperature of Tg or higher, making it impossible to measure a storage modulus at a temperature of Tg or higher.

[0058]

Comparative Example 9

A resin plate for measurement of thermal expansion coefficient and elastic modulus was obtained in substantially the same manner as in Comparative Example 2 except that the curing agent was changed to 58.6 g of triphenolmethane: MEH-7500 (trade name; manufactured by

MEIWA PLASTIC INDUSTRIES, LTD.).

[0059]

Comparative Example 10

5 Preparation of a sample was conducted in  
substantially the same manner as in Comparative Example 1  
except that the epoxy resin was changed to 100 g of a  
dihydroanthracene epoxy resin: YX-8800 (trade name;  
manufactured by Japan Epoxy Resins Co., Ltd.), and that the  
10 curing agent was changed to 63.0 g of bisphenol A  
(manufactured by Kanto Chemical Co., Ltd.), but the sample  
was disadvantageously elongated due to the load of the  
measurement apparatus at a temperature of Tg or higher,  
making it impossible to measure a storage modulus at a  
15 temperature of Tg or higher.

[0060]

Comparative Example 11

A resin plate for measurement of thermal expansion  
20 coefficient and elastic modulus was obtained in  
substantially the same manner as in Comparative Example 1  
except that the epoxy resin was changed to 100 g of a  
naphthalene novolak epoxy resin: NC-7000L (trade name;  
manufactured by Nippon Kayaku Co., Ltd.), and that the  
25 curing agent was changed to 45.5 g of a phenolic novolak  
resin: HP-850 (trade name; manufactured by Hitachi Chemical  
Co., Ltd.).

[0061]

30 Measurement of thermal expansion coefficient

With respect to each of the resin plates for  
measurement of thermal expansion coefficient and elastic  
modulus in Examples 1 to 4 and 6 to 11 and Comparative  
Examples 1 to 4 and 8 to 11, the copper foil was removed  
35 and a 4 × 20 mm test specimen was cut out, and a thermal  
expansion coefficient at a temperature of lower than Tg was

measured with respect to the test specimen using a TMA  
tester (TMA-2940), manufactured by TA Instruments, by a  
tensile method at a temperature elevation rate of 10°C/min.  
With respect to each of the substrates for measurement of  
5 thermal expansion coefficient and elastic modulus in  
Examples 5 and 12 and Comparative Examples 5 to 7, the  
copper foil was removed and a 5 mm square test specimen was  
cut out, and a thermal expansion coefficient at a  
temperature of lower than T<sub>g</sub> was measured with respect to  
10 the test specimen using a TMA tester (TMA-2940),  
manufactured by TA Instruments, by a compression method at  
a temperature elevation rate of 10°C/min.

[0062]

15 Measurement of storage modulus

With respect to each of the resin plates for  
measurement of thermal expansion coefficient and elastic  
modulus and the substrates for measurement of thermal  
expansion coefficient and elastic modulus, the copper foil  
20 was removed and a 5 × 30 mm test specimen was cut out, and  
a storage modulus was measured with respect to the test  
specimen using a dynamic viscoelasticity measurement  
apparatus (E-4000, manufactured by UBM Co., Ltd.) under  
automatic static load conditions at a temperature elevation  
25 rate of 5°C/min.

[0063]

Handling properties (dusting) of impregnated glass cloth

The prepreg prepared was cut by means of a cutter  
30 and visually observed in respect of dusting.

[0064]

With respect to the resin plates for measurement of  
thermal expansion coefficient and elastic modulus prepared  
in Examples (containing a resin and containing no inorganic  
35 filler and no glass cloth), the results of the measurements  
of storage modulus in the lengthwise direction and thermal

expansion coefficient at a temperature of lower than Tg are shown in Tables 1 and 3.

With respect to the substrates for measurement of thermal expansion coefficient and elastic modulus prepared in Examples (containing a resin and inorganic filler and/or glass cloth), the results of the measurements of storage modulus in the plane direction and thermal expansion coefficient at a temperature of lower than Tg are also shown in Tables 1 and 3.

10 [0065]

On the other hand, with respect to the resin plates for measurement of thermal expansion coefficient and elastic modulus prepared in Comparative Examples, the results of the measurements of storage modulus in the lengthwise direction and thermal expansion coefficient at a temperature of lower than Tg are shown in Tables 2 and 4.

With respect to the substrates for measurement of thermal expansion coefficient and elastic modulus prepared in Comparative Examples, the results of the measurements of storage modulus in the plane direction and thermal expansion coefficient at a temperature of lower than Tg are also shown in Tables 2 and 4.

[0066]

In Examples 1 to 3 and 6 to 8 and Comparative Examples 1 to 3 and 8 to 11, the specific gravity of the material was 1.2. In Examples 4 and 9 to 11 and Comparative Example 4, the specific gravity of the material was 1.6. In Examples 5 and 12 and Comparative Examples 5 and 6, the specific gravity of the material was 2.0. In Comparative Example 7, the specific gravity of the material was 2.2. With respect to the correction of the molecular weight between crosslinking sites, the storage modulus was corrected using a storage modulus of 80 GPa for silica, and a molecular weight between crosslinking sites was determined by making a calculation using a specific gravity of 1.2 for the material. A Poisson ratio of 0.5 was used

in all the Examples and Comparative Examples.

[0067]

The resin plates in Examples 1 to 3 and 6 to 8 have a thermal expansion coefficient at a temperature of lower than Tg of 55 to 64 ppm/°C, whereas the resin plates in Comparative Examples 1 to 3 and 8 to 11 have a thermal expansion coefficient at a temperature of lower than Tg of 68 to 87 ppm/°C. From this, it is apparent that the resin plates in the Examples have a thermal expansion coefficient at a temperature of lower than Tg smaller than that of the resin plates in the Comparative Examples by 4 ppm/°C at the least and by 32 ppm/°C at the most. In Comparative Examples 8 and 10, each sample was disadvantageously elongated due to the load of the measurement apparatus at a temperature of Tg or higher, making it impossible to measure a storage modulus at a temperature of Tg or higher. In Examples 1 to 3 and 6 to 8, the molecular weight between crosslinking sites falls in the range of from 300 to 1,000 defined in the present invention. By contrast, in Comparative Examples 1 to 3, 9, and 11, the molecular weight between crosslinking sites is 250 or less, and hence the crosslinking density is high and satisfactory interaction between aromatic rings is not exhibited, so that the thermal expansion coefficient cannot be reduced.

[0068]

In Comparative Example 3 in which to the formulation in Example 1 is added a reaction product using the same epoxy resin as that in Example 1 and the molecular weight between crosslinking sites is 3,860, the thermal expansion coefficient at a temperature of lower than Tg is 68 ppm/°C. From this, it is apparent that, by merely adding an insulating resin having an aromatic ring, the thermal expansion coefficient at a temperature of lower than Tg cannot be reduced utilizing the interaction between aromatic rings, and this result indicates that, for reducing the thermal expansion coefficient utilizing the

interaction between aromatic rings, it is essential to control the resin formulation so that the molecular weight between crosslinking sites in the present invention falls in the range of from 300 to 1,000.

5 [0069]

In Examples 4 and 9 to 11 and Comparative Example 4, silica is incorporated as inorganic filler. The thermal expansion coefficient at a temperature of lower than T<sub>g</sub> in Examples 4 and 9 to 11 is 34 to 36 ppm/°C, wherein that in  
10 Comparative Example 4 is 40 ppm/°C. With respect to the corrected molecular weight between crosslinking sites, Example 4 is 458, Example 9 is 320, Example 10 is 564, and Example 11 is 365. By contrast, Comparative Example 4 is 235. From this, it is apparent that, like the insulating  
15 resin in Examples 1 to 3, in Examples 4 and 9 to 11, the interaction between aromatic rings reduces the thermal expansion coefficient. Further, it has been found that, even when filler is incorporated, the insulating resin having a molecular weight between crosslinking sites in the  
20 range defined in the present invention exhibits a reduced thermal expansion coefficient at a temperature of lower than T<sub>g</sub>, as compared to that of a conventional material.

[0070]

In Example 5 and Comparative Example 5, the resin  
25 varnishes in Example 4 and Comparative Example 4 are, respectively, impregnated with glass cloth. The thermal expansion coefficient at a temperature of lower than T<sub>g</sub> in Example 5 is 13.5 ppm/°C, whereas that in Comparative Example 5 is 15 ppm/°C. With respect to the molecular  
30 weight between crosslinking sites determined using the corrected storage modulus, Example 5 is 458 and Comparative Example 5 is 233.

In Example 12, glass cloth is impregnated with the resin varnish in Example 6 to which silica is added. The  
35 thermal expansion coefficient at a temperature of lower than T<sub>g</sub> in Example 12 is 12.5 ppm/°C. The molecular weight

between crosslinking sites determined using the corrected storage modulus is 314.

In Comparative Examples 6 and 7, the amount of the silica contained in the resin varnish in Comparative Example 5 is increased. In Comparative Example 6, the thermal expansion coefficient at a temperature of lower than Tg is 13.5 ppm/°C, but the handling properties of the impregnated glass cloth are poor, that is, marked dusting is caused. In Comparative Example 7, the press moldability was too poor to obtain a sample. In Comparative Example 6, the molecular weight between crosslinking sites determined using the corrected storage modulus was 218. From the above, it is apparent that, for reducing the thermal expansion coefficient utilizing the interaction between aromatic rings, it is essential to control the resin formulation so that the insulating resin has a molecular weight between crosslinking sites in the range of from 300 to 1,000.

[0071]

When the thermal expansion coefficient is reduced to the thermal expansion coefficient at a temperature of lower than Tg in Example 12 by a conventional method in which the amount of filler is increased, a failure of the press molding occurs, but the press molding is achieved in Example 12, which indicates the effect of the present invention.

[0072]

In the Tables below, the amount of each component is indicated in a unit of gram (g).

30

Table 1

Classification	Material	Trade name	Example 1	Example 2	Example 3	Example 4	Example 5
Epoxy resin	Naphthalene epoxy resin	HP-4032D	100			100	100
	Dihydroanthracene epoxy resin	YX-8800		100			
	Biphenyl novolac epoxy resin	NC-3000-H			100		
Curing agent	Aminotriazine novolac resin	LA3018	52.9	39.8	24.9	52.9	52.9
Curing	2PZ-CN	2PZ-CN	0.5	0.5	0.5	0.5	0.5
Inorganic filler	Silica	SO-G1				187.5	187.5
Glass cloth			Not used	Not used	Not used	Not used	Used
Thermal expansion coefficient	Resin only		55ppm/°C	58ppm/°C	60ppm/°C	-	-
	Resin + Silica		-	-	-	36ppm/°C	-
	Resin + Silica + Glass cloth		-	-	-	-	13.5ppm/°C
Storage modulus (250°C)			18MPa	9.3MPa	19MPa	100MPa	6600MPa
Molecular weight between crosslinking sites			452	716	439	308	175
Corrected molecular weight between crosslinking sites			-	-	-	458	458
Handling properties of impregnated glass cloth (Dusting)			-	-	-	-	Slight
Press moldability			-	-	-	-	Excellent

Table 2

Classification	Material	Trade name	Comparative Example 1	Comparative Example 2	Comparative Example 3	Comparative Example 4	Comparative Example 5	Comparative Example 6	Comparative Example 7
Epoxy resin	Phenolic novolak epoxy resin	N-770	100			100	100	100	100
	Naphthalene epoxy resin	HP-4700 HP-4032D		100	100 153.4				
Curing agent	HP-4032 Reaction product	-							
	Phenolic novolak resin	HP-850	53.3			53.3	53.3	53.3	53.3
	Dicyandiamide	-	0.13			0.13	0.13	0.13	0.13
Curing accelerator	Aminotriazine novolak resin	LA3018-		43.4	52.9				
	2PZ-CN	2PZ-CN	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Inorganic filler	Silica	SO-G1				188.2	188.2	282.3	422.0
Glass cloth			Not used	Not used	Not used	Not used	Used	Used	Used
			75ppm/°C	72ppm/°C	68ppm/°C	-	-	-	Sample cannot be prepared, Measurement impossible
Thermal expansion coefficient	Resin only					40ppm/°C			
	Resin + Silica								
Storage modulus (250°C)	Resin + Silica + Glass cloth						15ppm/°C	13.5ppm/°C	
			120MPa	88MPa	3.7MPa	460MPa	10000MPa	12000MPa	
Molecular weight between crosslinking sites			219	240	3860	214	166	163	
Corrected molecular weight between crosslinking sites			-	-	-	235	233	218	
Handling properties of impregnated glass cloth (Dusting)			-	-	-	-	Slight	Marked	Marked
Press moldability			-	-	-	-	Excellent	Excellent	Poor




[0076]


Classification	Material	Trade name	Comparative Example 8	Comparative Example 9	Comparative Example 10	Comparative Example 11
Epoxy resin	Naphthalene epoxy resin	HP-4032D	100			
		HP-4700		100		
Curing agent	Dihydroanthracene epoxy resin	YX-8800			100	
		NC-7000L				100
	Triphenolmethane	MEH-7500		58.6		
	Bisphenol A	-	83.8		63.0	
Curing accelerator	2PZ-CN	HP-850				45.5
		2PZ-CN	0.5	0.5	0.5	0.5
Thermal expansion coefficient	Resin only		80ppm/°C	87ppm/°C	75ppm/°C	73ppm/°C
	Resin + Silica		Storage modulus measurement impossible		Storage modulus measurement impossible	
	Resin + Silica+Glass cloth					
Storage modulus (250°C)				77MPa		83MPa
Molecular weight between crosslinking sites				250		244

[0077]


Structures of the resins used in Examples of the present invention and others are shown below.

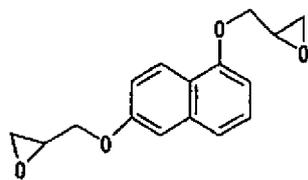


HP-4032D

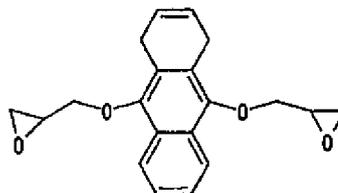


YX-8800

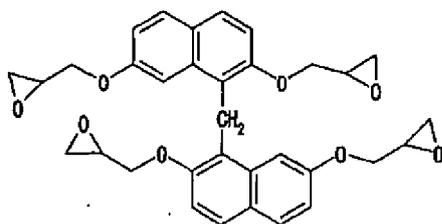


HP-4700

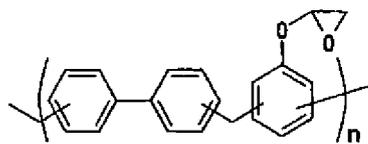


NC-3000-H

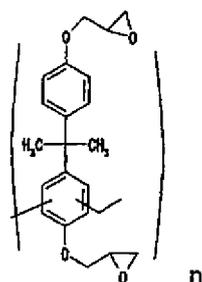


N-885




N-770, N-740




KA-1165




Bisphenol A

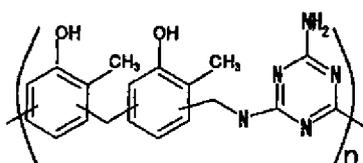


LA-3018

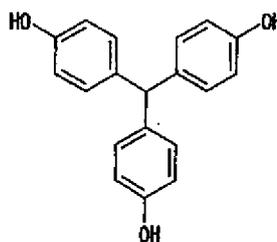

MEH-7500



HP-850

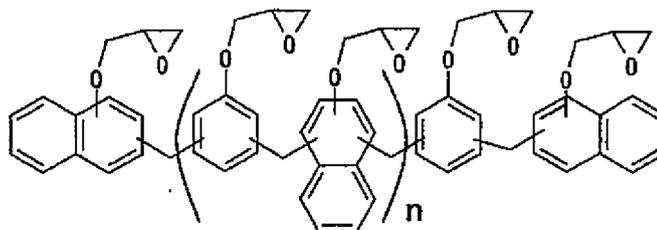

NC-7000L

[0078]

Table 5

Material	Epoxy equivalent (Hydroxyl equivalent)	Specific gravity	Substituent
YX-8800	181	-	Epoxy group
HP-4032	136	-	Epoxy group
HP-4700	162	-	
NC-3000-H	289	-	Epoxy group
N-865	209	-	Epoxy group
N-770	190	1.1	Epoxy group
N-740	180	1.1	Epoxy group
NC-7000L	294	-	Epoxy group
KA-1165	119	1.2	Hydroxyl group
LA-3018	151	1.1	Hydroxyl group, Amino group
MEH-7500	97	-	Epoxy group
Bisphenol A	114	1.2	Epoxy group
HP-850	106	-	Epoxy group

[0079]

5           In the present invention, by controlling the resin  
formulation of the insulating resin having an aromatic ring  
so that the insulating resin has a molecular weight between  
crosslinking sites in the range of from 300 to 1,000, a  
resin composition having a low thermal expansion  
10 coefficient can be obtained.

#### INDUSTRIAL APPLICABILITY

[0080]

15           There can be provided, without increasing the  
crosslinking density, a resin composition which is  
advantageous not only in that the resin composition can be  
produced at low cost, but also in that it is unlikely to  
thermally expand, a prepreg, a laminate, and a wiring board.

CLAIMS

[1] A resin composition for use in production of a laminate, the resin composition comprising an insulating resin having an aromatic ring, wherein the insulating resin having an aromatic ring has a molecular weight between crosslinking sites of 300 to 1,000 on a stage after a production of a laminate, as determined from an elastic shear modulus of the insulating resin measured at a temperature of Tg or higher.


[2] The resin composition according to claim 1, wherein the insulating resin having an aromatic ring comprises a polycyclic compound.

[3] The resin composition according to claim 1 or 2, wherein the insulating resin has a biphenyl structure, a naphthalene structure, an anthracene structure, or a dihydroanthracene structure.


[4] The resin composition according to any one of claims 1 to 3, wherein the insulating resin is an epoxy resin.

[5] The resin composition according to any one of claims 1 to 4, wherein the epoxy resin comprises at least one crystalline epoxy resin.


[6] The resin composition according to any one of claims 1 to 5, wherein the epoxy resin comprises at least one member selected from a biphenyl novolak epoxy resin represented by the following general formula (1):

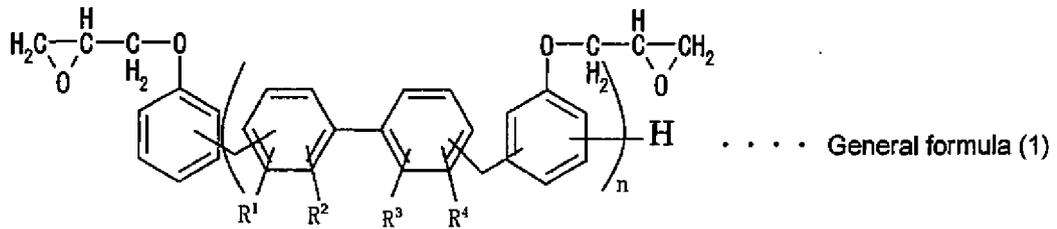

wherein each of  $R^1$  to  $R^4$  independently represents a  $C_mH_{2m+1}$  group wherein  $m$  represents 0 or an integer of 1 or more, and  $n$  represents 0 or an integer of 1 or more, an anthracene epoxy resin represented by the following general formula (2):

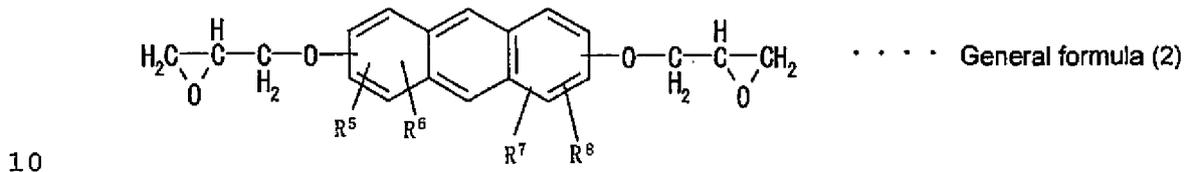

wherein each of  $R^5$  to  $R^8$  independently represents a  $C_pH_{2p+1}$  group wherein  $p$  represents 0 or an integer of 1 or more, and a dihydroanthracene epoxy resin represented by the following general formula (3):

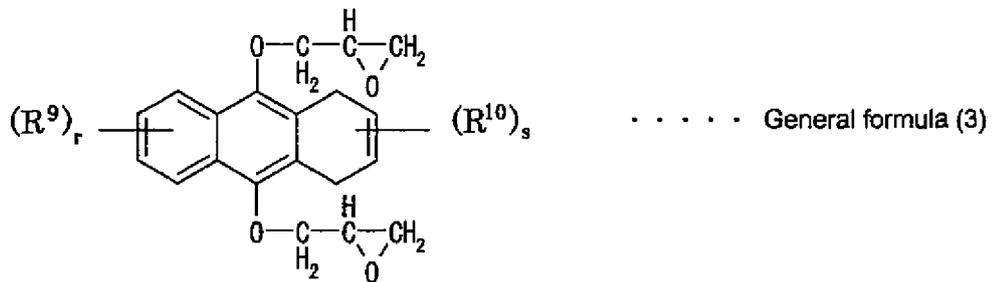

wherein  $R^9$  each occurrence independently represents a  $C_tH_{2t+1}$  group (wherein  $t$  represents 0 or an integer of 1 or more),  $r$  represents an integer of 0 to 4,  $R^{10}$  each occurrence independently represents a  $C_uH_{2u+1}$

20

group (wherein u represents 0 or an integer of 1 or more), and s represents an integer of 0 to 6.

5 [7] The resin composition according to any one of claims 1 to 6, wherein the epoxy resin uses a curing agent which comprises at least one member selected from a phenolic novolak resin, a cresol novolak resin, a bisphenol A novolak resin, an aminotriazine novolak resin, a  
10 bismaleimide-containing aminotriazine novolak resin, dicyandiamide, and benzoguanamine.

[8] A prepreg obtained by applying the resin composition according to any one of claims 1 to 7 to a substrate so  
15 that the substrate is impregnated with the resin composition, and then drying them.

[9] The prepreg according to claim 8, wherein the substrate is glass woven fabric, glass nonwoven fabric, or  
20 aramid nonwoven fabric.

[10] A laminate obtained by subjecting the prepreg according to claim 8 or 9 to laminate molding.