



(22) Date de dépôt/Filing Date: 2006/03/29

(41) Mise à la disp. pub./Open to Public Insp.: 2006/09/30

(45) Date de délivrance/Issue Date: 2013/10/15

(30) Priorité/Priority: 2005/03/31 (FR05/03167)

(51) Cl.Int./Int.Cl. *F16L 55/132* (2006.01),
F16L 55/134 (2006.01), *F16K 17/34* (2006.01)


(72) Inventeurs/Inventors:
MESNIER, LUC, FR;
DALIBEY, AMINE, FR

(73) Propriétaire/Owner:
GDF SUEZ, FR

(74) Agent: SMART & BIGGAR


(54) Titre : DISPOSITIF DE REGLAGE DE DEBIT A ANCRAGE ASSISTE, POUVANT ETRE INSERE DANS UN PIPELINE

(54) Title: FLOW CONTROL DEVICE, WITH ASSISTED ANCHORING, INSERTABLE INTO A PIPELINE

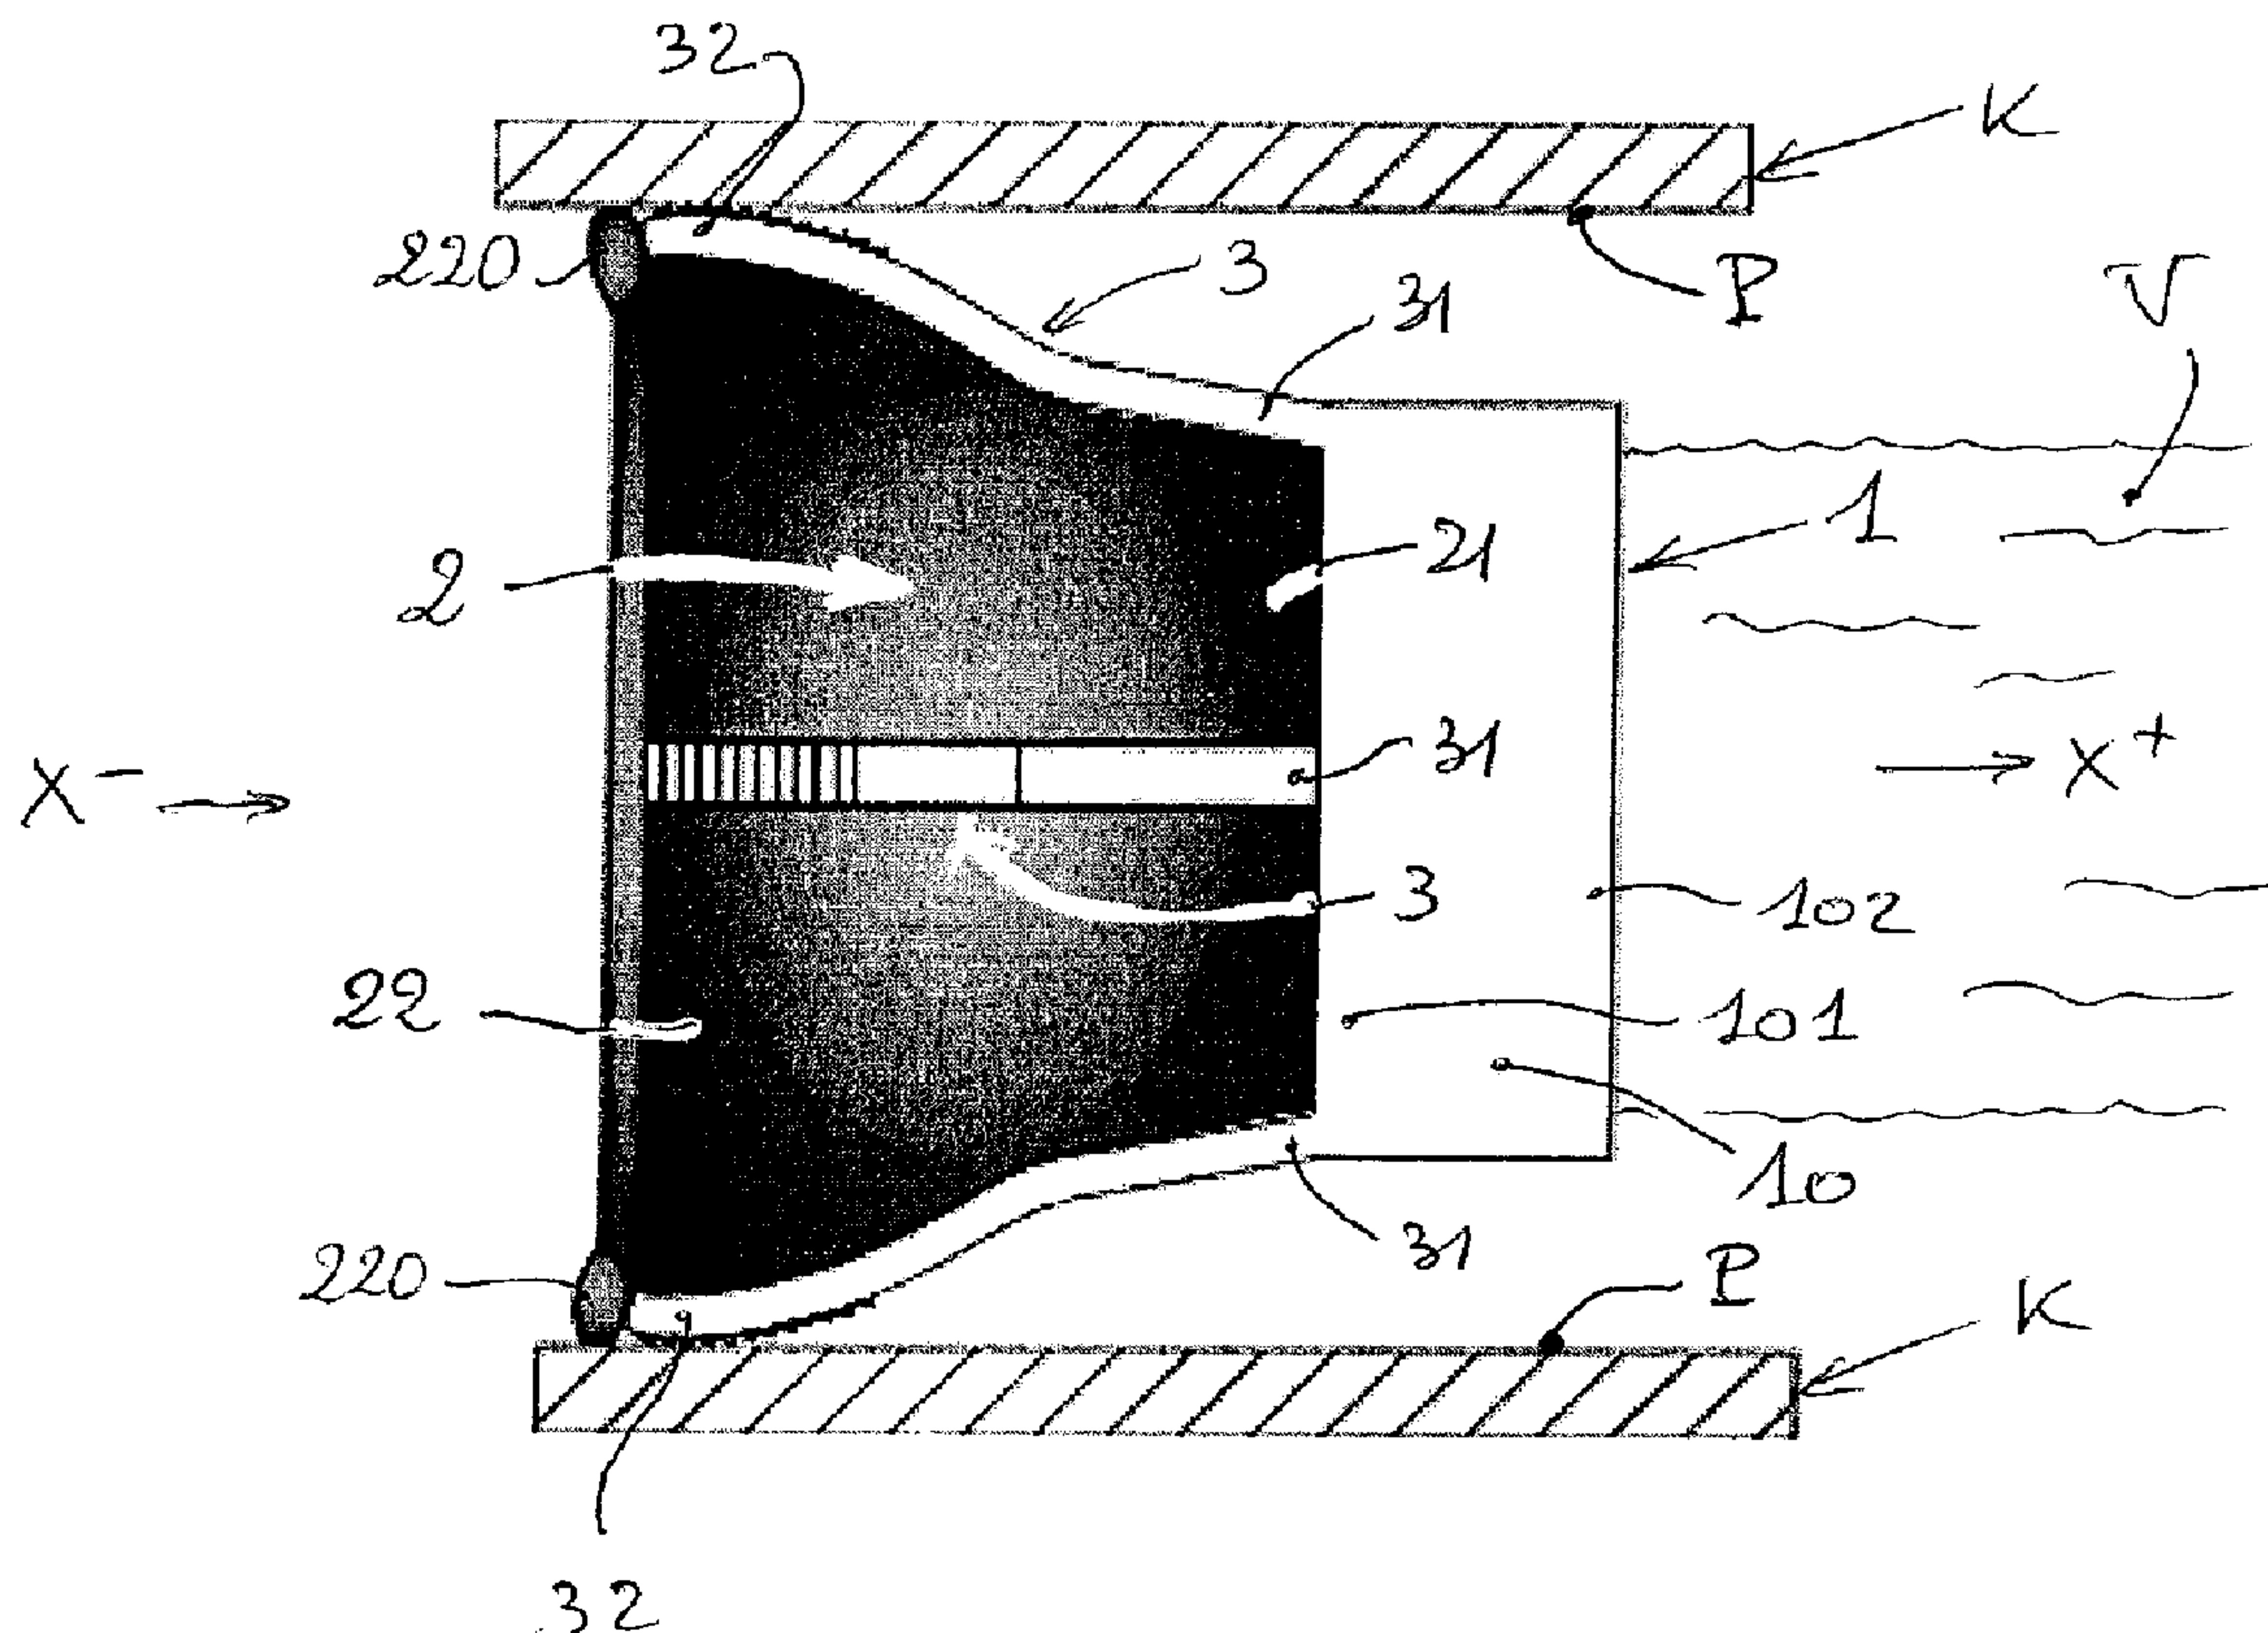

(57) Abrégé/Abstract:

The invention relates to a flow control device which is insertable into a fluid pipeline (K) and comprising a valve (1), an obturator with membrane (2), and anchoring flaps (3) that can deploy like umbrella spokes under the action of an elastic stress until it presses

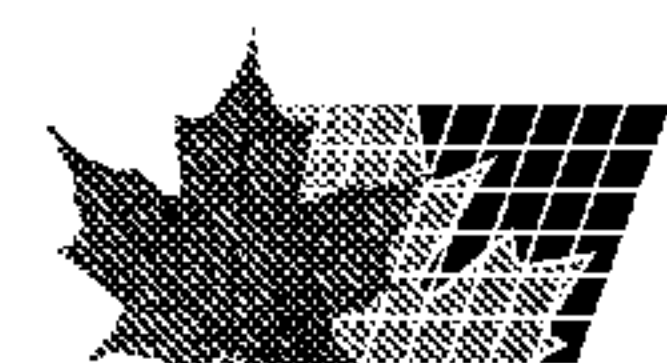

(57) **Abrégé(suite)/Abstract(continued):**

against the wall (P) of the pipeline (K). According to the invention, the membrane (2) and the flaps (3) are mutually attached to and disposed on a same side of the valve body (10) , so that as the flaps (3) deploy the membrane (2) deploys at the same time until the membrane presses against the internal wall of the pipeline (K) and the fluid exerts on the deployed membrane a pressure which increases the pressure of the flaps (3) against this wall (P).

ABSTRACT

The invention relates to a flow control device which is insertable into a fluid pipeline (K) and comprising a valve (1), an obturator with membrane (2), and anchoring flaps (3) that can deploy like umbrella spokes under the action of an elastic stress until it presses against the wall (P) of the pipeline (K).

According to the invention, the membrane (2) and the flaps (3) are mutually attached to and disposed on a same side of the valve body (10), so that as the flaps (3) deploy the membrane (2) deploys at the same time until the membrane presses against the internal wall of the pipeline (K) and the fluid exerts on the deployed membrane a pressure which increases the pressure of the flaps (3) against this wall (P).

Figure 2.

**FLOW CONTROL DEVICE, WITH ASSISTED ANCHORING,
INSERTABLE INTO A PIPELINE.**

FIELD OF THE INVENTION

The invention generally relates to techniques for operating pipeline networks, and in particular gas pipelines.

BACKGROUND OF THE INVENTION

More precisely, the invention relates to a flow control device that is inserted, during operation, into a pipeline in which a fluid, for example a gaseous fluid, is flowing from upstream to downstream, this device comprising at least one safety or stop valve having a body with an upstream side and a downstream side, an annular obturator with a deformable tubular membrane, and anchoring means integral with the valve body and which are used to secure it, while in operation, in the pipeline, the valve being used to stop, at least selectively, a

central fluid vein delimited at the center of the pipeline, the membrane being able to deploy radially to channel the fluid toward the central vein, and the anchoring means comprising a plurality of flaps, each having one linked end, fixed in position in relation to the valve body, and one free end, moving in relation to the valve body, these flaps deploying radially like umbrella spokes under the action of an elastic stress until their free ends press against the internal wall of the pipeline.

A device of this type is described in particular in patent application EP 1 388 697.

This patent application, which was submitted by the same applicant, advocates the use of flaps pressed against the internal wall of the pipeline by means of their own elasticity, under the effect of which the flaps deploy.

Although it has undeniable qualities, this known device has only been shown to provide, under certain circumstances, a blocking force that is insufficient to resist the fluid pressure without risk of migration inside the pipeline.

SUMMARY OF THE INVENTION

In this context, the aim of the invention is to propose a device that can be inserted into a pipeline and kept in place there, even under difficult conditions and without damaging said pipeline.

To this end, the device according to the invention, moreover in compliance with the generic definition given in the preamble above, is essentially characterized in that the membrane is attached to the flaps and has a linked edge by which this membrane is connected in a tight fashion to the valve body, and a free edge disposed upstream of the linked edge opposite the free ends of the flaps, and in that when

the flaps deploy, the membrane deploys at the same time by expansion of its free edge, until this free edge presses against the internal wall of the pipeline, the fluid exerting on the deployed membrane a pressure which increases the pressure of the free ends of the flaps against the internal wall of the pipeline.

As a result of this layout, the fluid pressure acts on the membrane in a direction so as to increase the pressure of the flaps against the internal wall of the pipeline, the force maintaining the device in the pipeline being thus an increasing function of the pressure.

In one non-limiting aspect, the present invention relates to a flow control device inserted, during operation, into a pipeline having an internal wall and in which a fluid is flowing from upstream to downstream, the flow control device comprising at least one safety or stop valve with a body having an upstream side and a downstream side, an annular obturator with a deformable tubular membrane, and anchoring means integral with the valve body and used to secure it, while in operation, in the pipeline, the valve being used to stop, at least selectively, a central fluid vein delimited at the center of

4a

the pipeline, the membrane being capable of deploying radially to channel the fluid toward the central vein, and the anchoring means comprising a plurality of flaps, each of which has a linked end fixed in position in relation to the valve body, and a free end moving in relation to the valve body, the flaps deploying radially like umbrella spokes under the action of an elastic stress until their free ends press against the internal wall of the pipeline, wherein this membrane is attached to the flaps and has a linked edge by which the membrane is connected in a tight fashion to the valve body, and a free edge disposed upstream of the linked edge opposite the free ends of the flaps, and wherein as the flaps deploy the membrane deploys at the same time by expansion of its free edge, until the free edge presses against the internal wall of the pipeline, the fluid exerting on the deployed membrane a pressure that increases the pressure of the free ends of the flaps against the internal wall of the pipeline.

The free edge of the membrane may have a band that is pressed against the internal wall of the pipeline while in operation.

Although the flaps may be articulated by their linked ends, they may also be made of a flexible material and, for example, be connected to the valve body by their linked ends.

To increase the friction force of the flaps in the pipeline, these flaps may have, on their free ends, ridges forming retaining claws.

The device according to the invention may also comprise a cone- or spiral-shaped spring disposed so as to apply said elastic stress.

Preferably, the membrane and the flaps are disposed on the upstream side of the valve body.

BRIEF DESCRIPTION OF THE DRAWINGS

Other characteristics and advantages of the invention will become clear from the description which is given

below, as an indicative and non-limiting example, with reference to the attached drawings, in which:

- figure 1 is a schematic side view of a device according to the invention, shown folded in a constriction sleeve, itself inserted into a pipeline;
- figure 2 is a schematic side view of the device illustrated in figure 1, shown deployed in the pipeline after being ejected from the constriction sleeve;
- figure 3 is a schematic side view of the device illustrated in figure 2, shown in an initial state of membrane inflation;
- figure 4 is a schematic side view of the device illustrated in figures 2 and 3, shown in an advanced state of membrane inflation;

-figure 5 is a schematic sectional view of the device illustrated in figure 1, shown in its folded state;

- figure 6 is a magnified view of the detail indicated by reference VI of figure 5; and

- figure 7 is an end view of the device shown in figure 5.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As stated above, the invention relates to a flow control device intended, during operation, to be inserted into a pipeline K in which a fluid, for example a gas, is flowing from upstream X- to downstream X+.

This device comprises a safety or stop valve 1, an obturator with membrane 2, and anchoring means 3.

The function of the valve 1, whose specific internal structure has not been shown and does not belong to the invention, is to stop, at least under certain predetermined conditions, a central fluid vein V delimited in the center of the pipeline K (figure 2).

To the extent that it can fulfill its function, this valve may have any structure and may in particular have any shape known to a person skilled in the art, for example either of the shapes described in patent documents EP 1 059 481 and EP 1 388 697.

This valve has a body 10 with an upstream side 101 and a downstream side 102, these sides being turned, while in operation, upstream X- and downstream X+ of the fluid flow respectively.

The obturator with membrane has an annular shape and is composed of a deformable tubular membrane 2 that can deploy radially to channel the fluid toward the

central vein V, that is, to block the circulation of fluid at the periphery of the body 10 of the valve 1.

The anchoring means 3, which are attached to the valve body 10 and which are used to secure it while in operation in the pipeline K, are composed of a plurality of flaps 3.

Each flap 3 has a linked end 31 which is fixed in position in relation to the valve body 10, and a free end 32 which is moving in relation to the valve body 10.

The flaps 3 are continuously subjected to an elastic stress so that, while in operation, they deploy radially like umbrella spokes until their free ends 32 press against the internal wall P of the pipeline K.

In practice, the device may initially (figure 1) be kept in a sleeve F while it is inserted into the

pipeline K, the flaps 3 being in a folded position at that time.

Once in place in the pipeline K, the device may be ejected from the sleeve F by any known means, the flaps 3 then deploying, as illustrated in figure 2, under the action of the elastic stress they receive.

According to the invention, the membrane 2 is attached to the flaps 3 and has a linked edge 21 and a free edge 22.

Preferably, the membrane 2 and the flaps 3 are disposed on the upstream side 101 of the valve body 10.

The membrane 2 is connected in a watertight fashion to the valve body 10 by its linked edge 21, while the free edge 22 of this membrane is disposed upstream of

the linked edge 21 and adjacent to the free ends 32 of the flaps 3.

Under these conditions, the movements of the free edge 22 of the membrane follow the movements of the free ends 32 of the flaps 3, the membrane 2 thus deploying by expansion of its free edge 22 at the same time as the flaps 3 deploy, until this free edge presses against the internal wall P of the pipeline K.

As a result of this layout, the fluid exerts on the deployed membrane 2 a pressure which increases the pressure of the free ends 32 of the flaps 3 against the internal wall P of the pipeline K.

In the event where the valve 1 is activated, that is, in the event where the central fluid vein V is stopped, the membrane 2 may inflate (figures 3 and 4) at the level of the areas of its surface which extend between two adjacent flaps 3, and thus itself press

against the wall P in order to help to keep the device in the pipeline K.

The free edge 22 of the membrane advantageously has a roll band 220, which is pressed while in operation against the internal wall P of the pipeline K.

The flaps 3 are connected, by their linked ends 31, to the upstream side 101 of the valve body 10 and may therefore be composed of the same material as the latter.

To avoid having to provide the free ends 32 of the flaps 3 with articulations, the latter may be made of a flexible material.

Moreover, these flaps 3 may have, on their free ends 32, ridges 320 forming retaining claws and increasing the adhesion of the flaps on the internal wall P of the pipeline K.

Finally, the device may comprise a spring 4 (figure 7), in a cone or spiral shape, and disposed in the membrane, remote from its linked edge 21, in order to apply on the flaps the elastic stress which enables them to deploy.

CLAIMS

1. A flow control device inserted, during operation, into a pipeline having an internal wall and in which a fluid is flowing from upstream to downstream, the flow control device comprising at least one safety or stop valve with a body having an upstream side and a downstream side, an annular obturator with a deformable tubular membrane, and anchoring means integral with the valve body and used to secure it, while in operation, in the pipeline, the valve being used to stop, at least selectively, a central fluid vein delimited at the center of the pipeline, the membrane being capable of deploying radially to channel the fluid toward the central vein, and the anchoring means comprising a plurality of flaps, each of which has a linked end fixed in position in relation to the valve body, and a free end moving in relation to the valve body, the flaps deploying radially like umbrella spokes under the action of an elastic stress until their free ends press against the internal wall of the pipeline, wherein the membrane is attached to the flaps and has a linked edge by which the membrane is connected in a tight fashion to the valve body, and a free edge disposed upstream of

the linked edge opposite the free ends of the flaps,
and wherein as the flaps deploy the membrane deploys at
the same time by expansion of its free edge, until the
free edge presses against the internal wall of the
pipeline, the fluid exerting on the deployed membrane a
pressure that increases the pressure of the free ends
of the flaps against the internal wall of the pipeline.

2. The device according to claim 1, wherein the free edge
of the membrane has a roll band that is pressed against
the internal wall of the pipeline while in operation.

3. The device according to claim 1 or 2, wherein the flaps
are made of a flexible material.

4. The device according to any one of claims 1 to 3,
wherein the flaps are connected to the valve body by
their linked ends.

5. The device according to any one of claims 1 to 4,
wherein the flaps have, on their free ends, ridges
forming retaining claws.

6. The device according to any one of claims 1 to 5,
further comprising a cone- or spiral-shaped spring
disposed so as to apply said elastic stress.

5 7. The device according to any one of claims 1 to 6,
wherein the membrane and the flaps are disposed on the
upstream side of the valve body.

8. The device according to any one of claims 1 to 7,
10 wherein the fluid is a gaseous fluid.

Application number: numéro de demande: 2541204

Figures: 5

Pages: _____

DRW-IP

Unscannable items
received with this application
(Request original documents in File Prep. Section on the 10th Floor)

Documents reçus avec cette demande ne pouvant être balayés
(Commander les documents originaux dans la section de préparation des dossiers au
10ième étage)

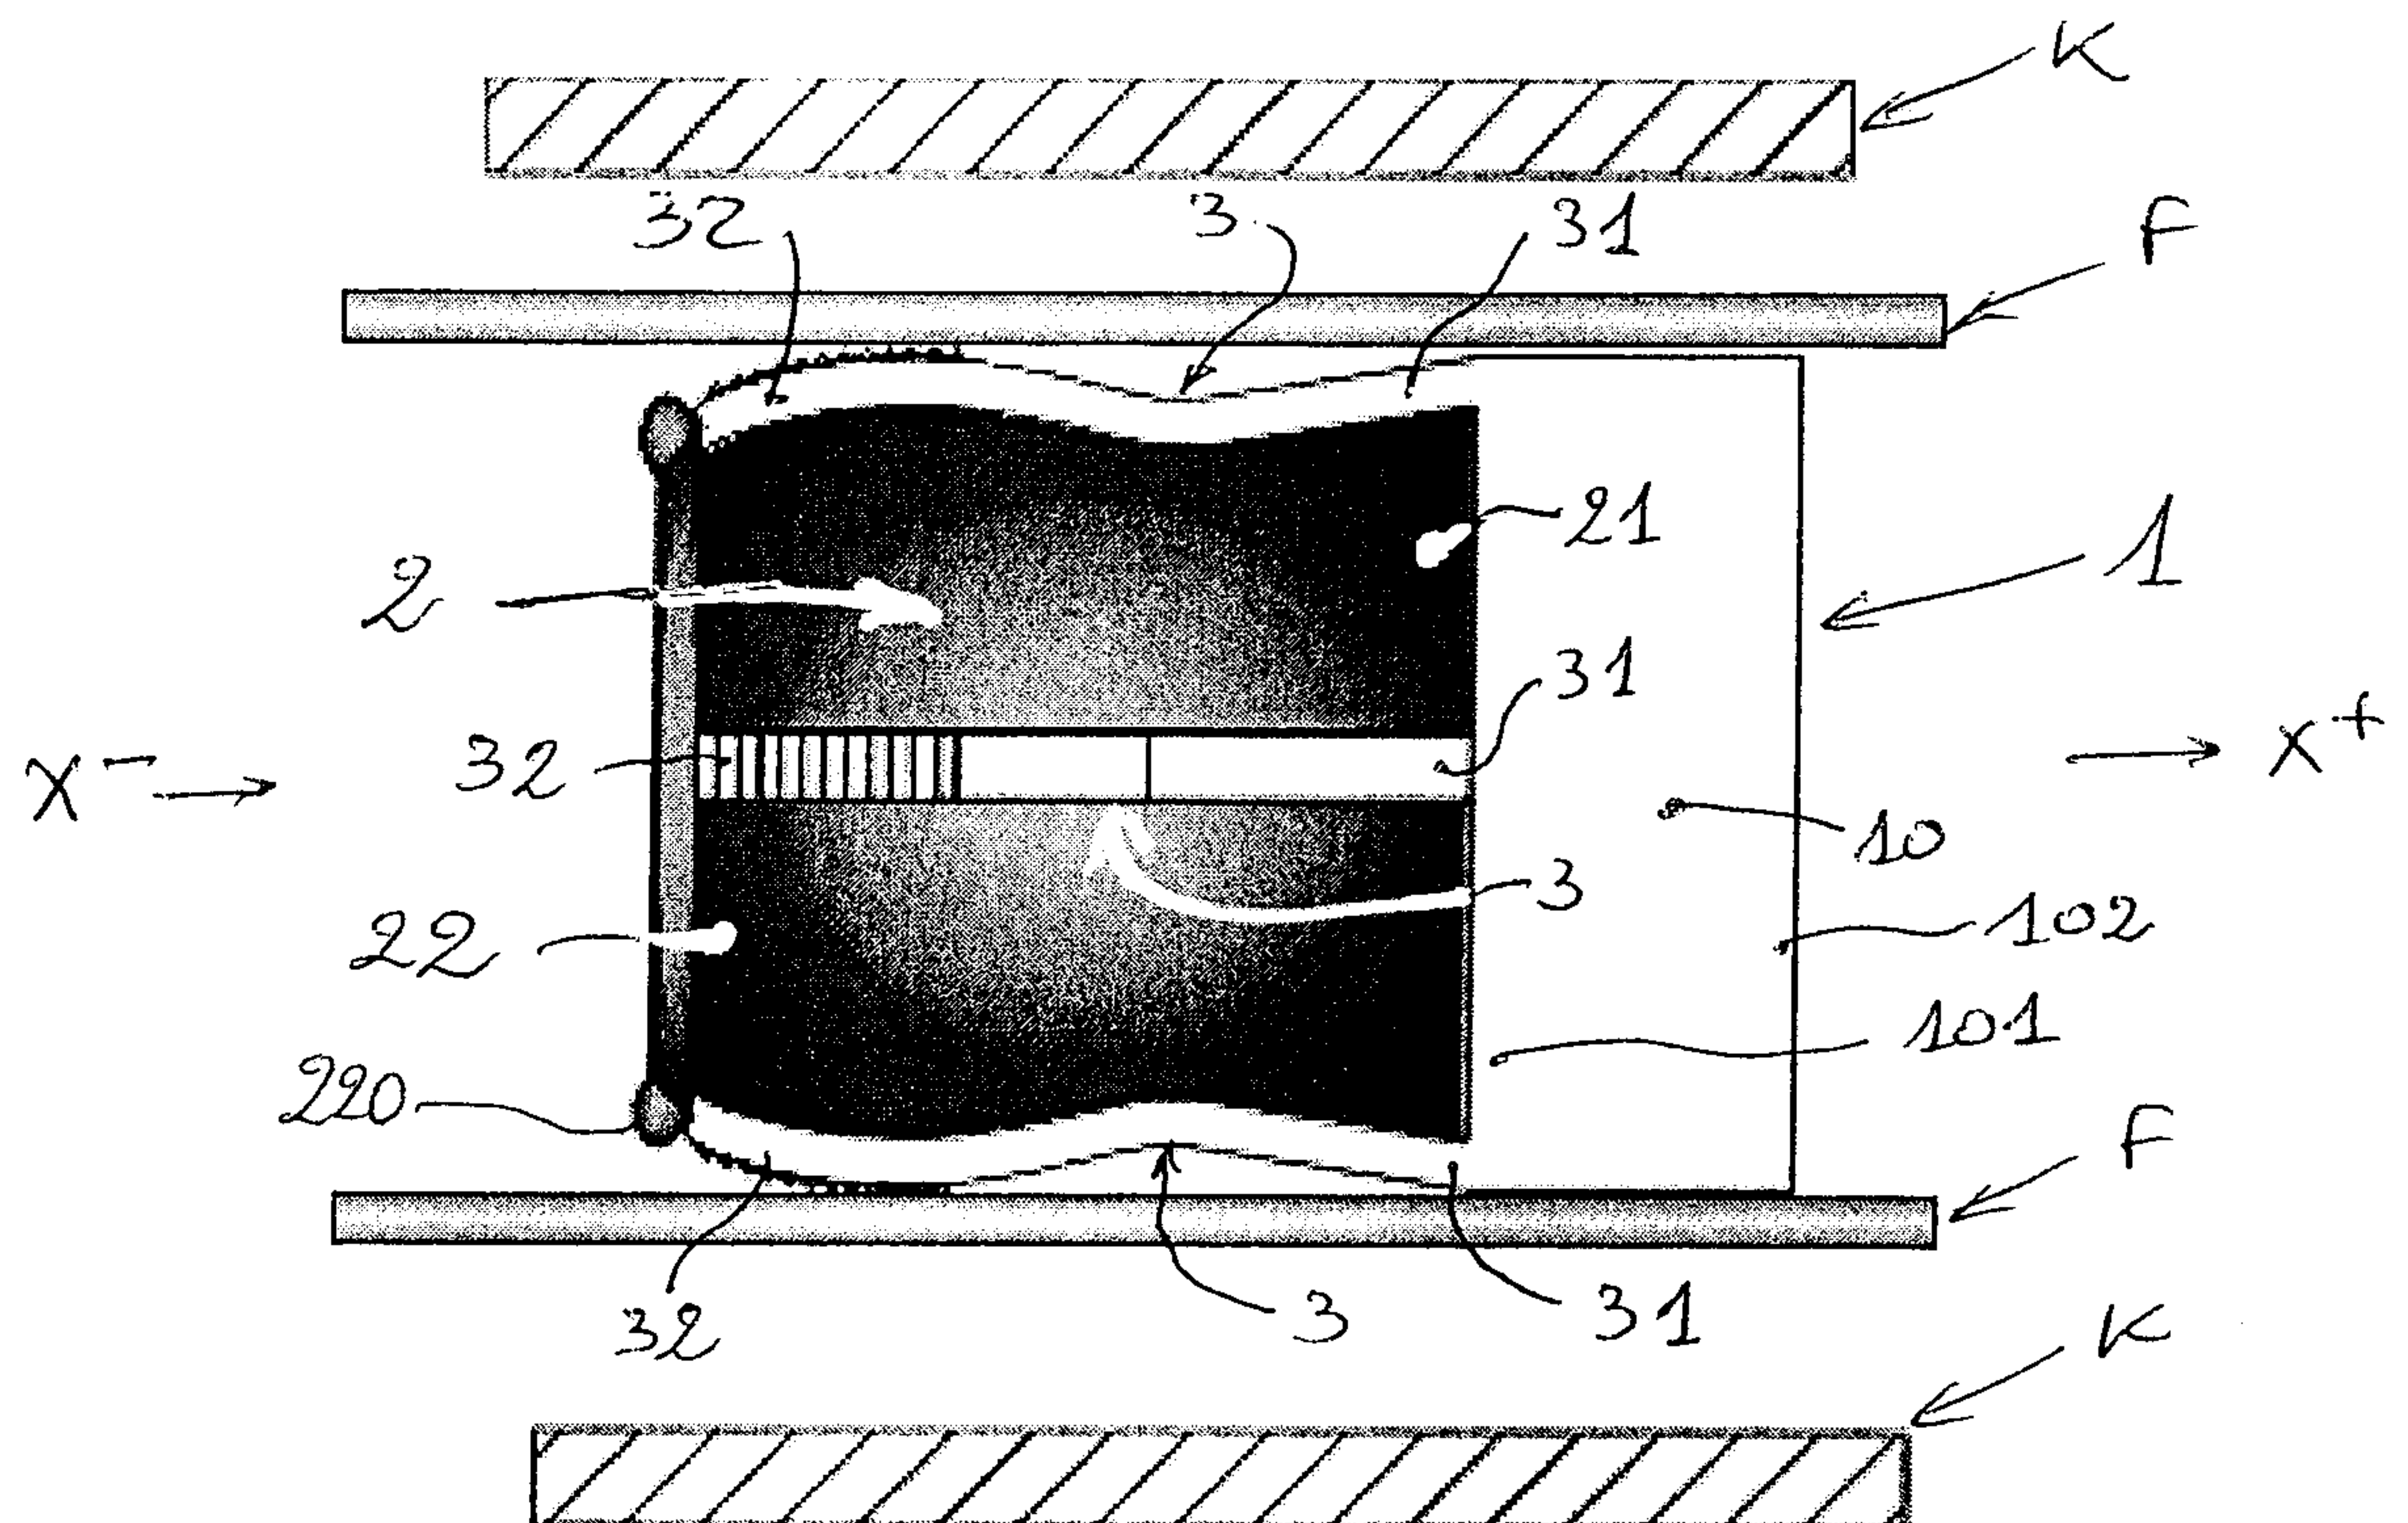


Figure 1

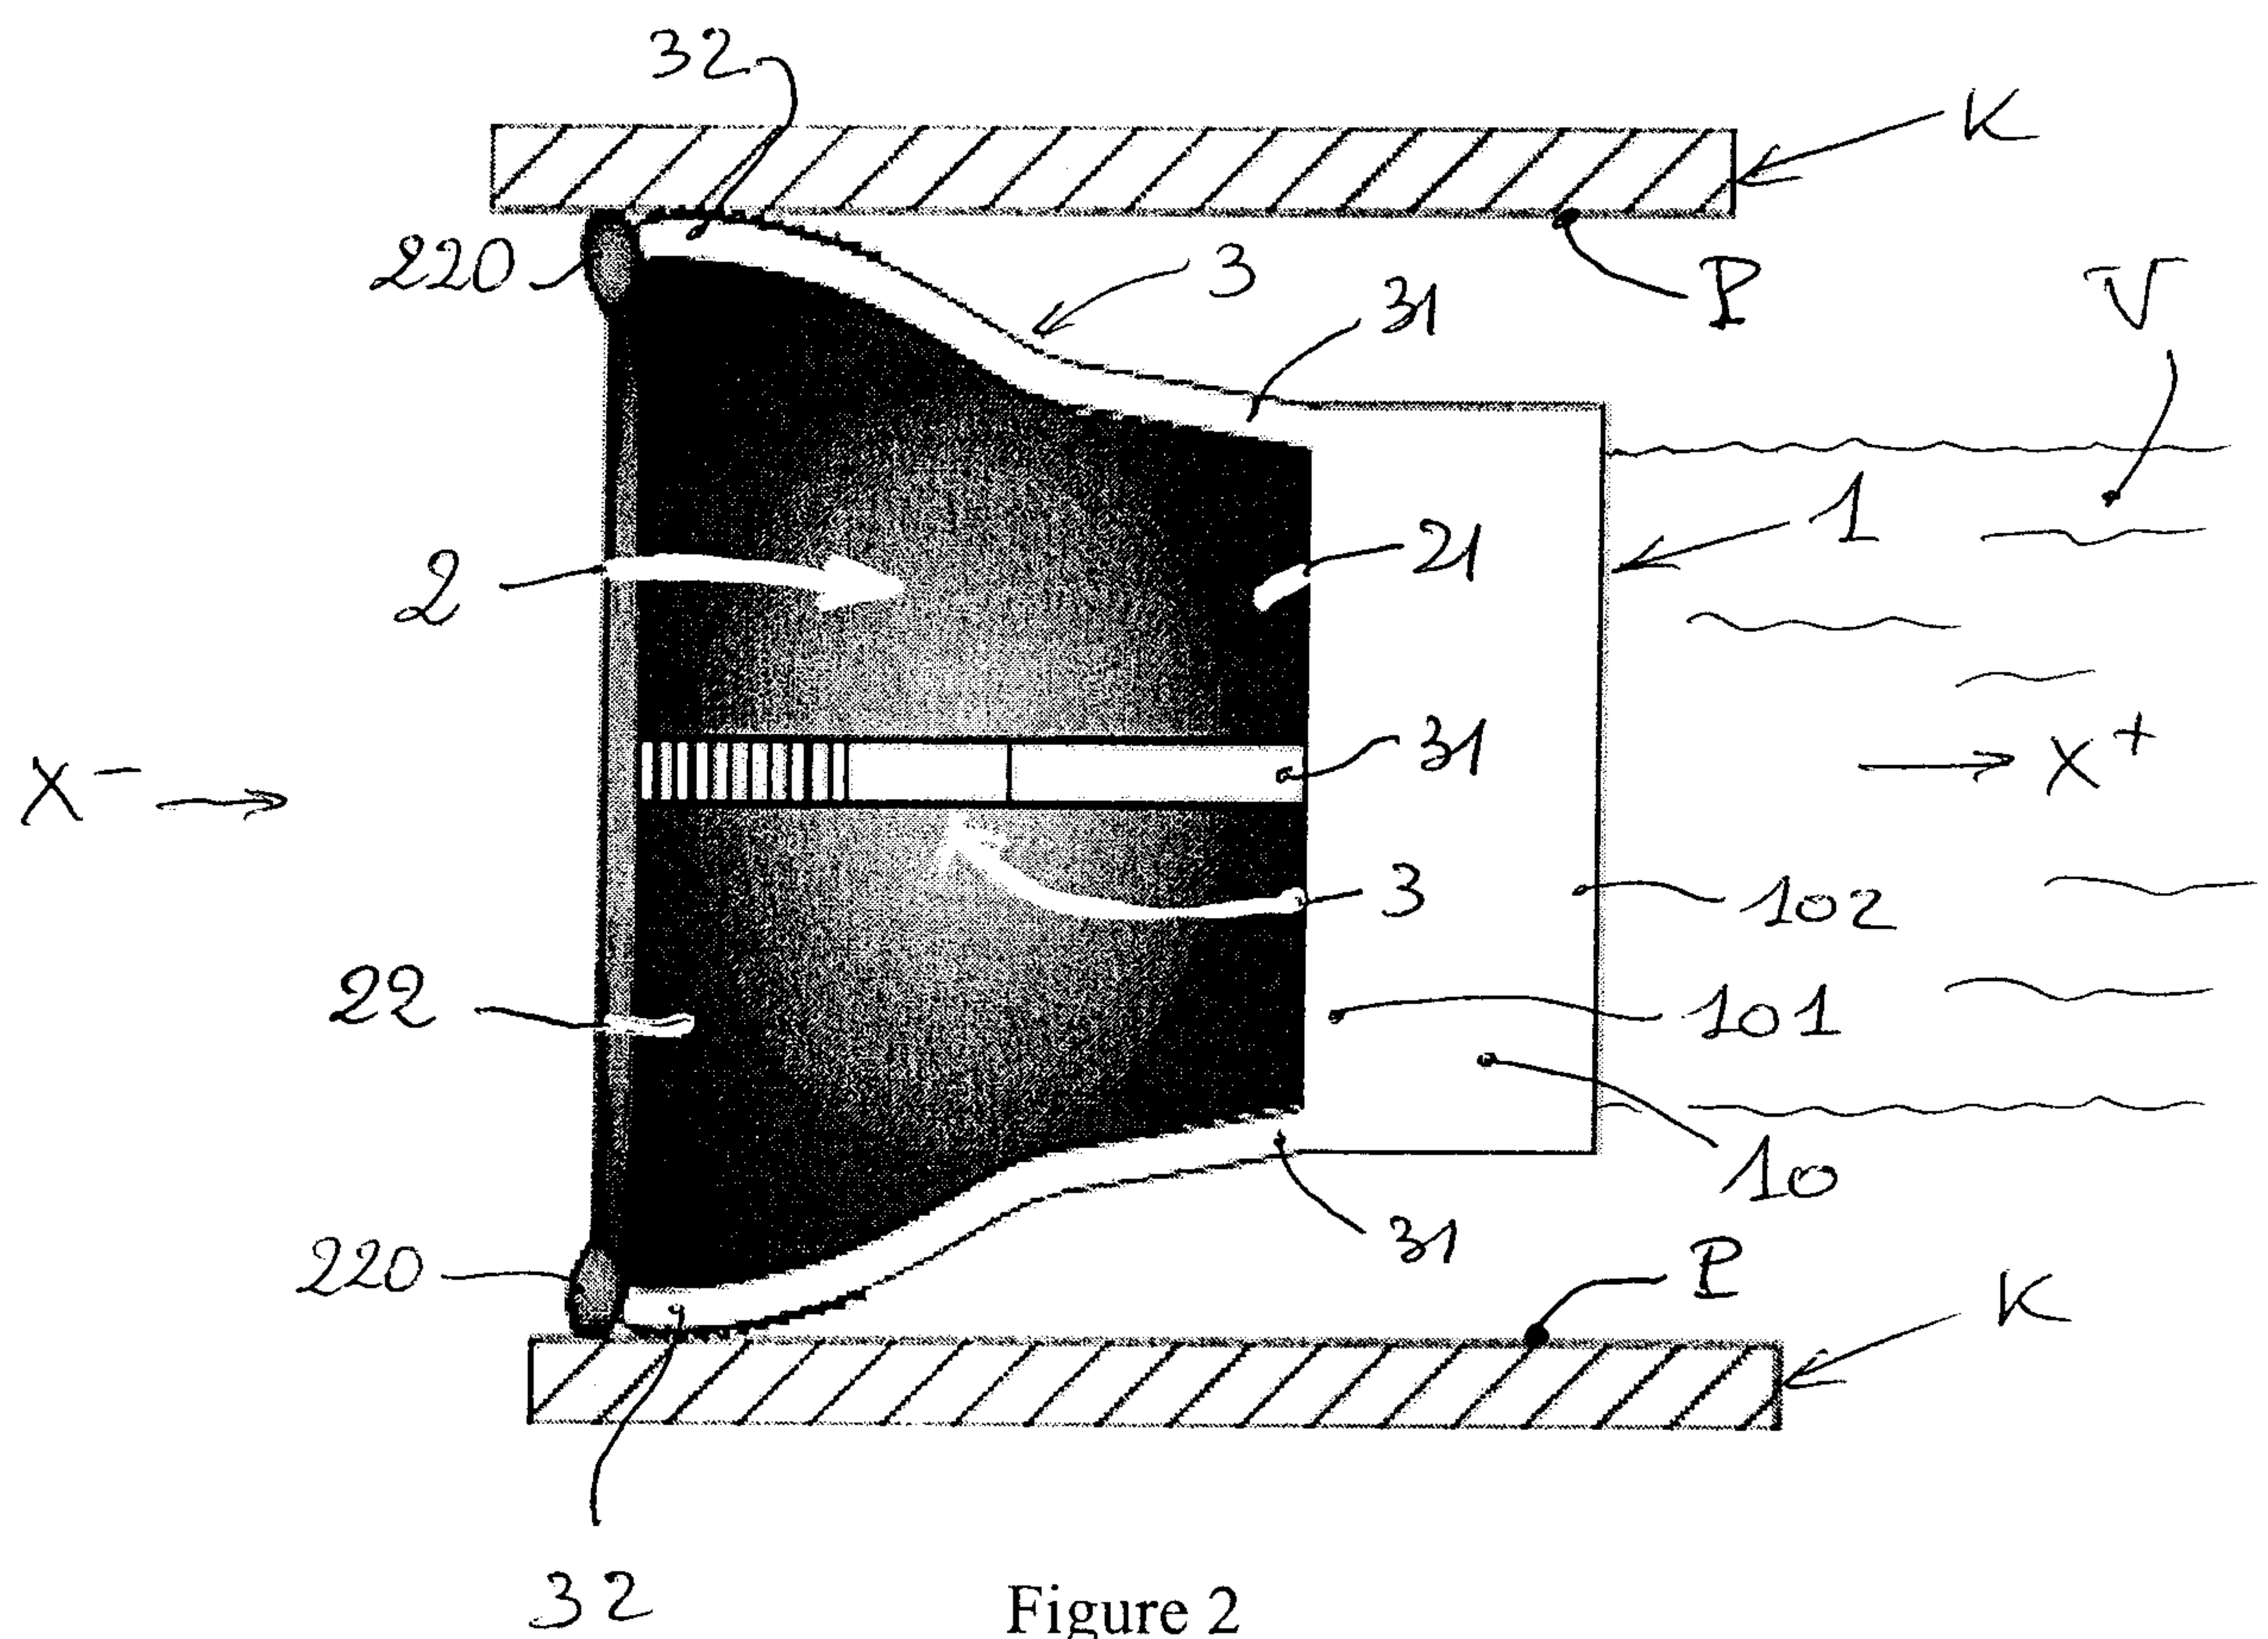


Figure 2

2 / 3

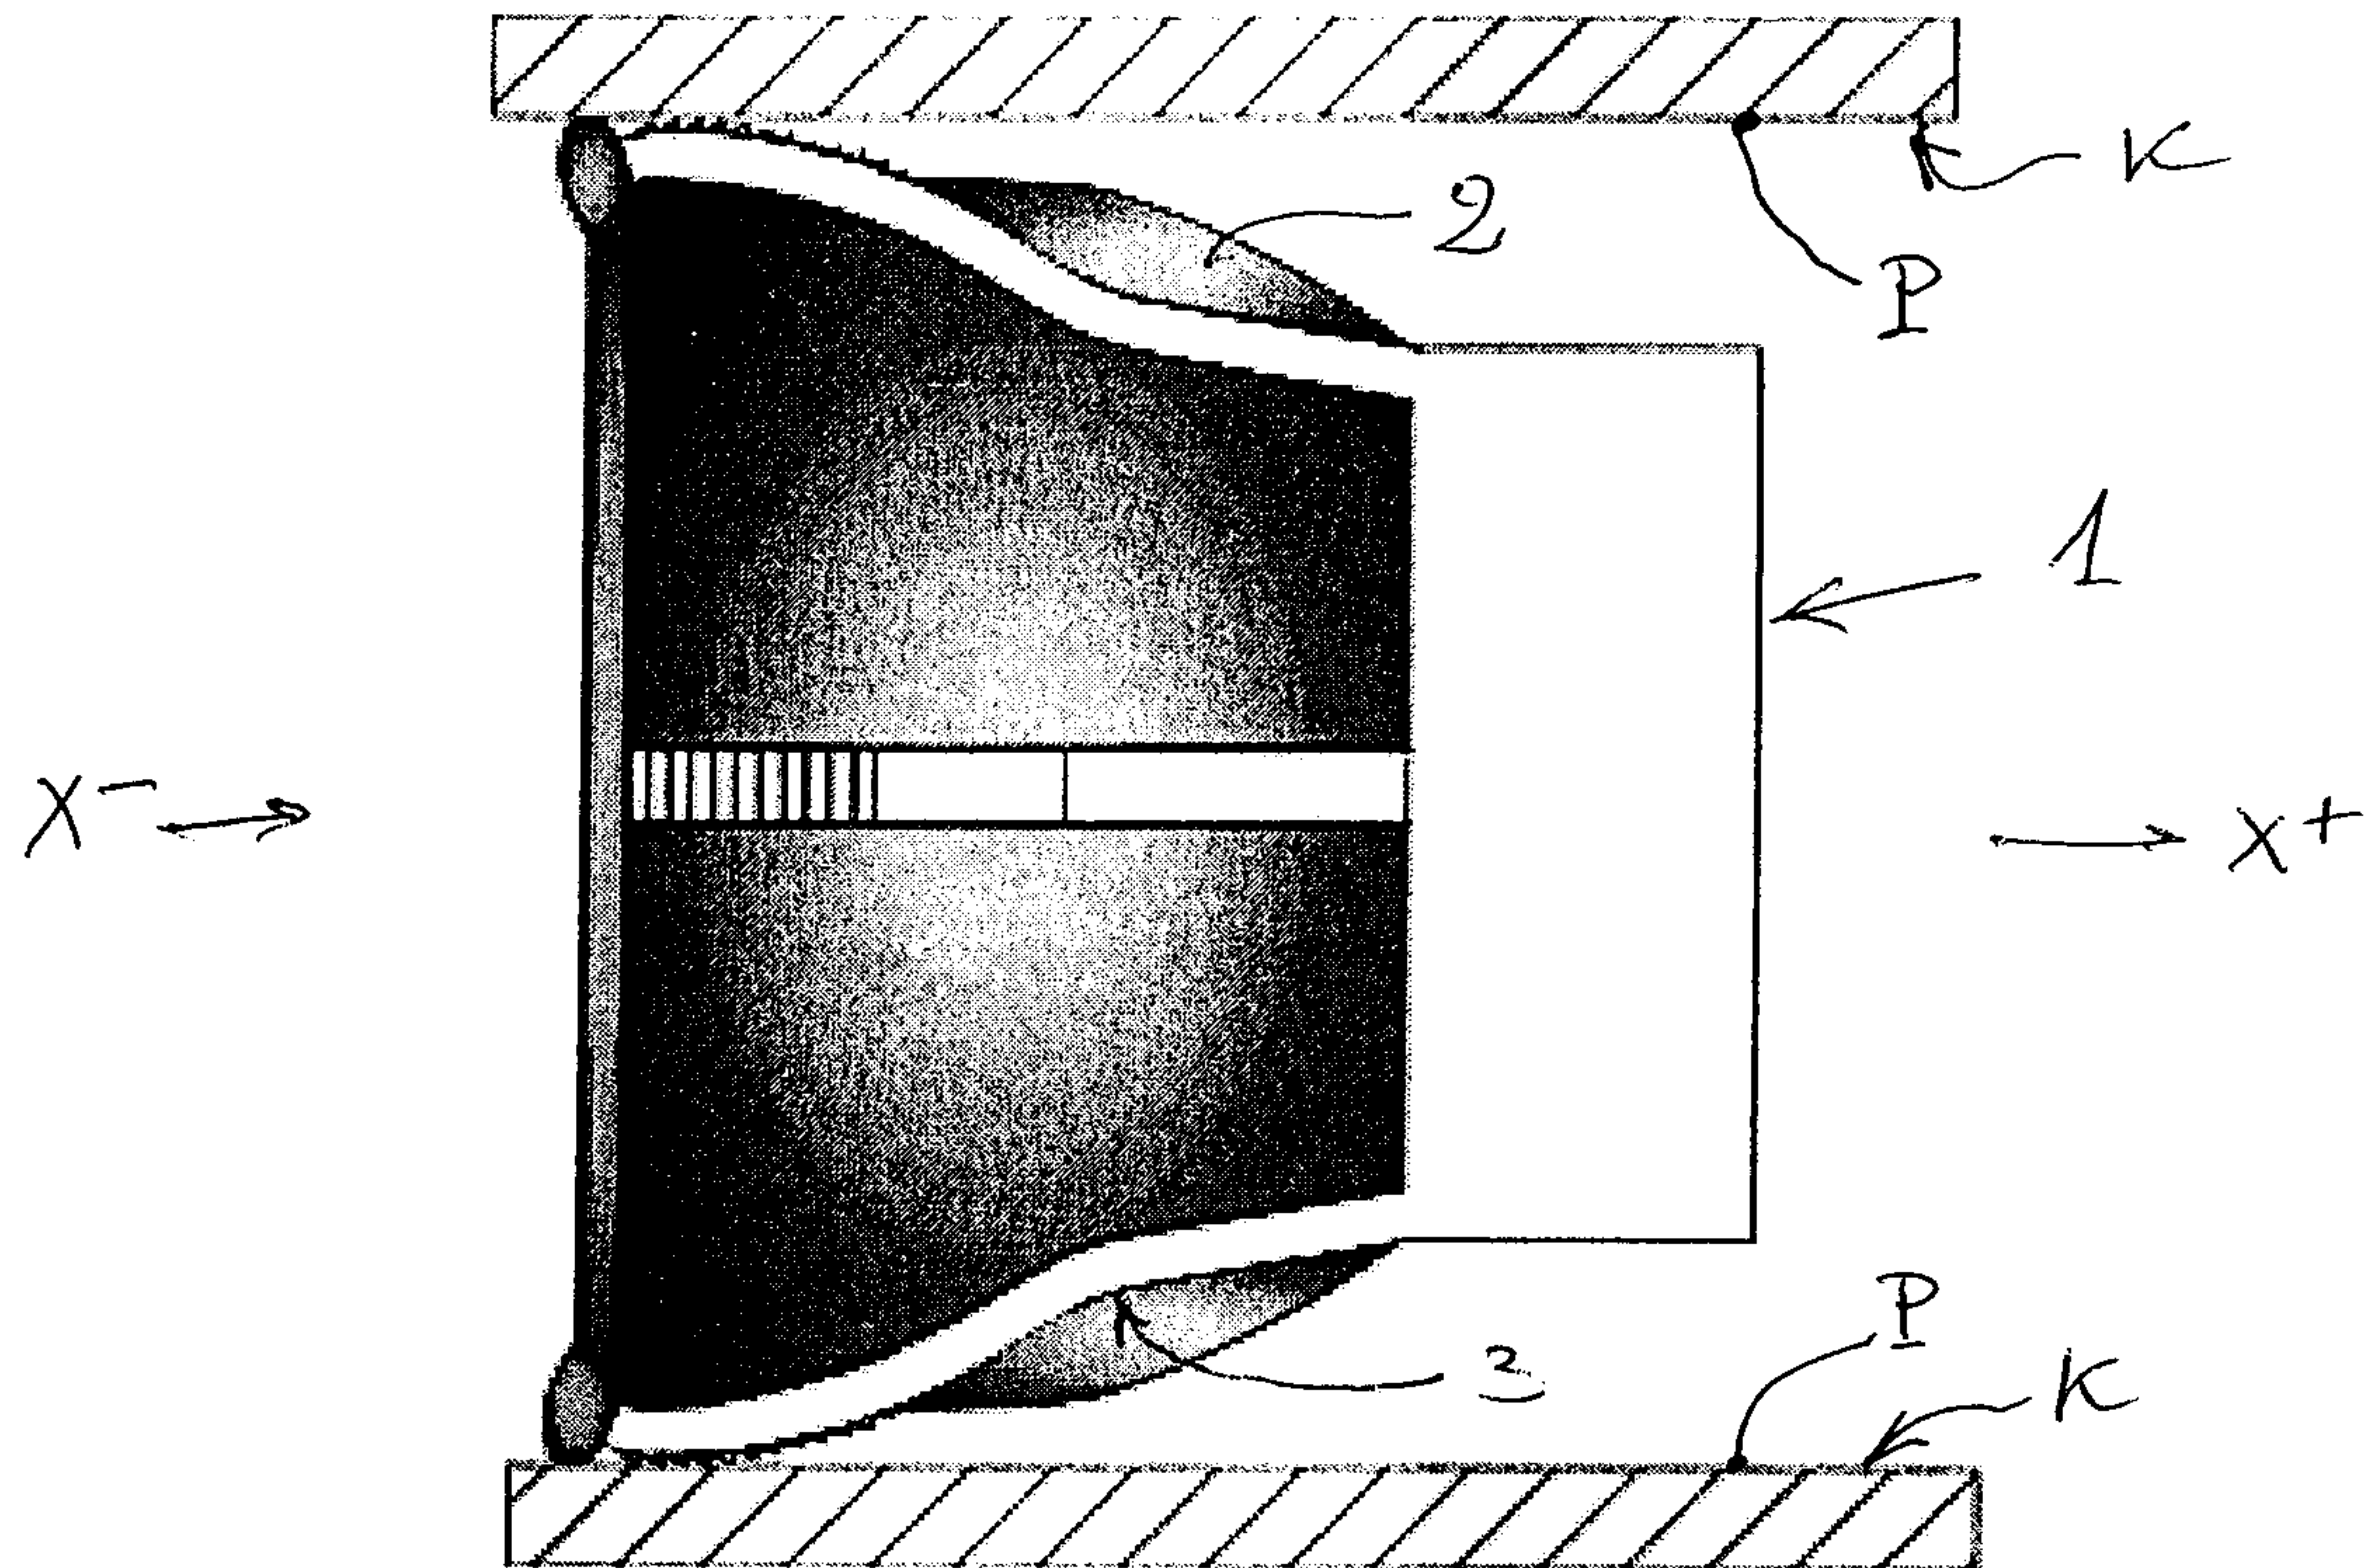


Figure 3

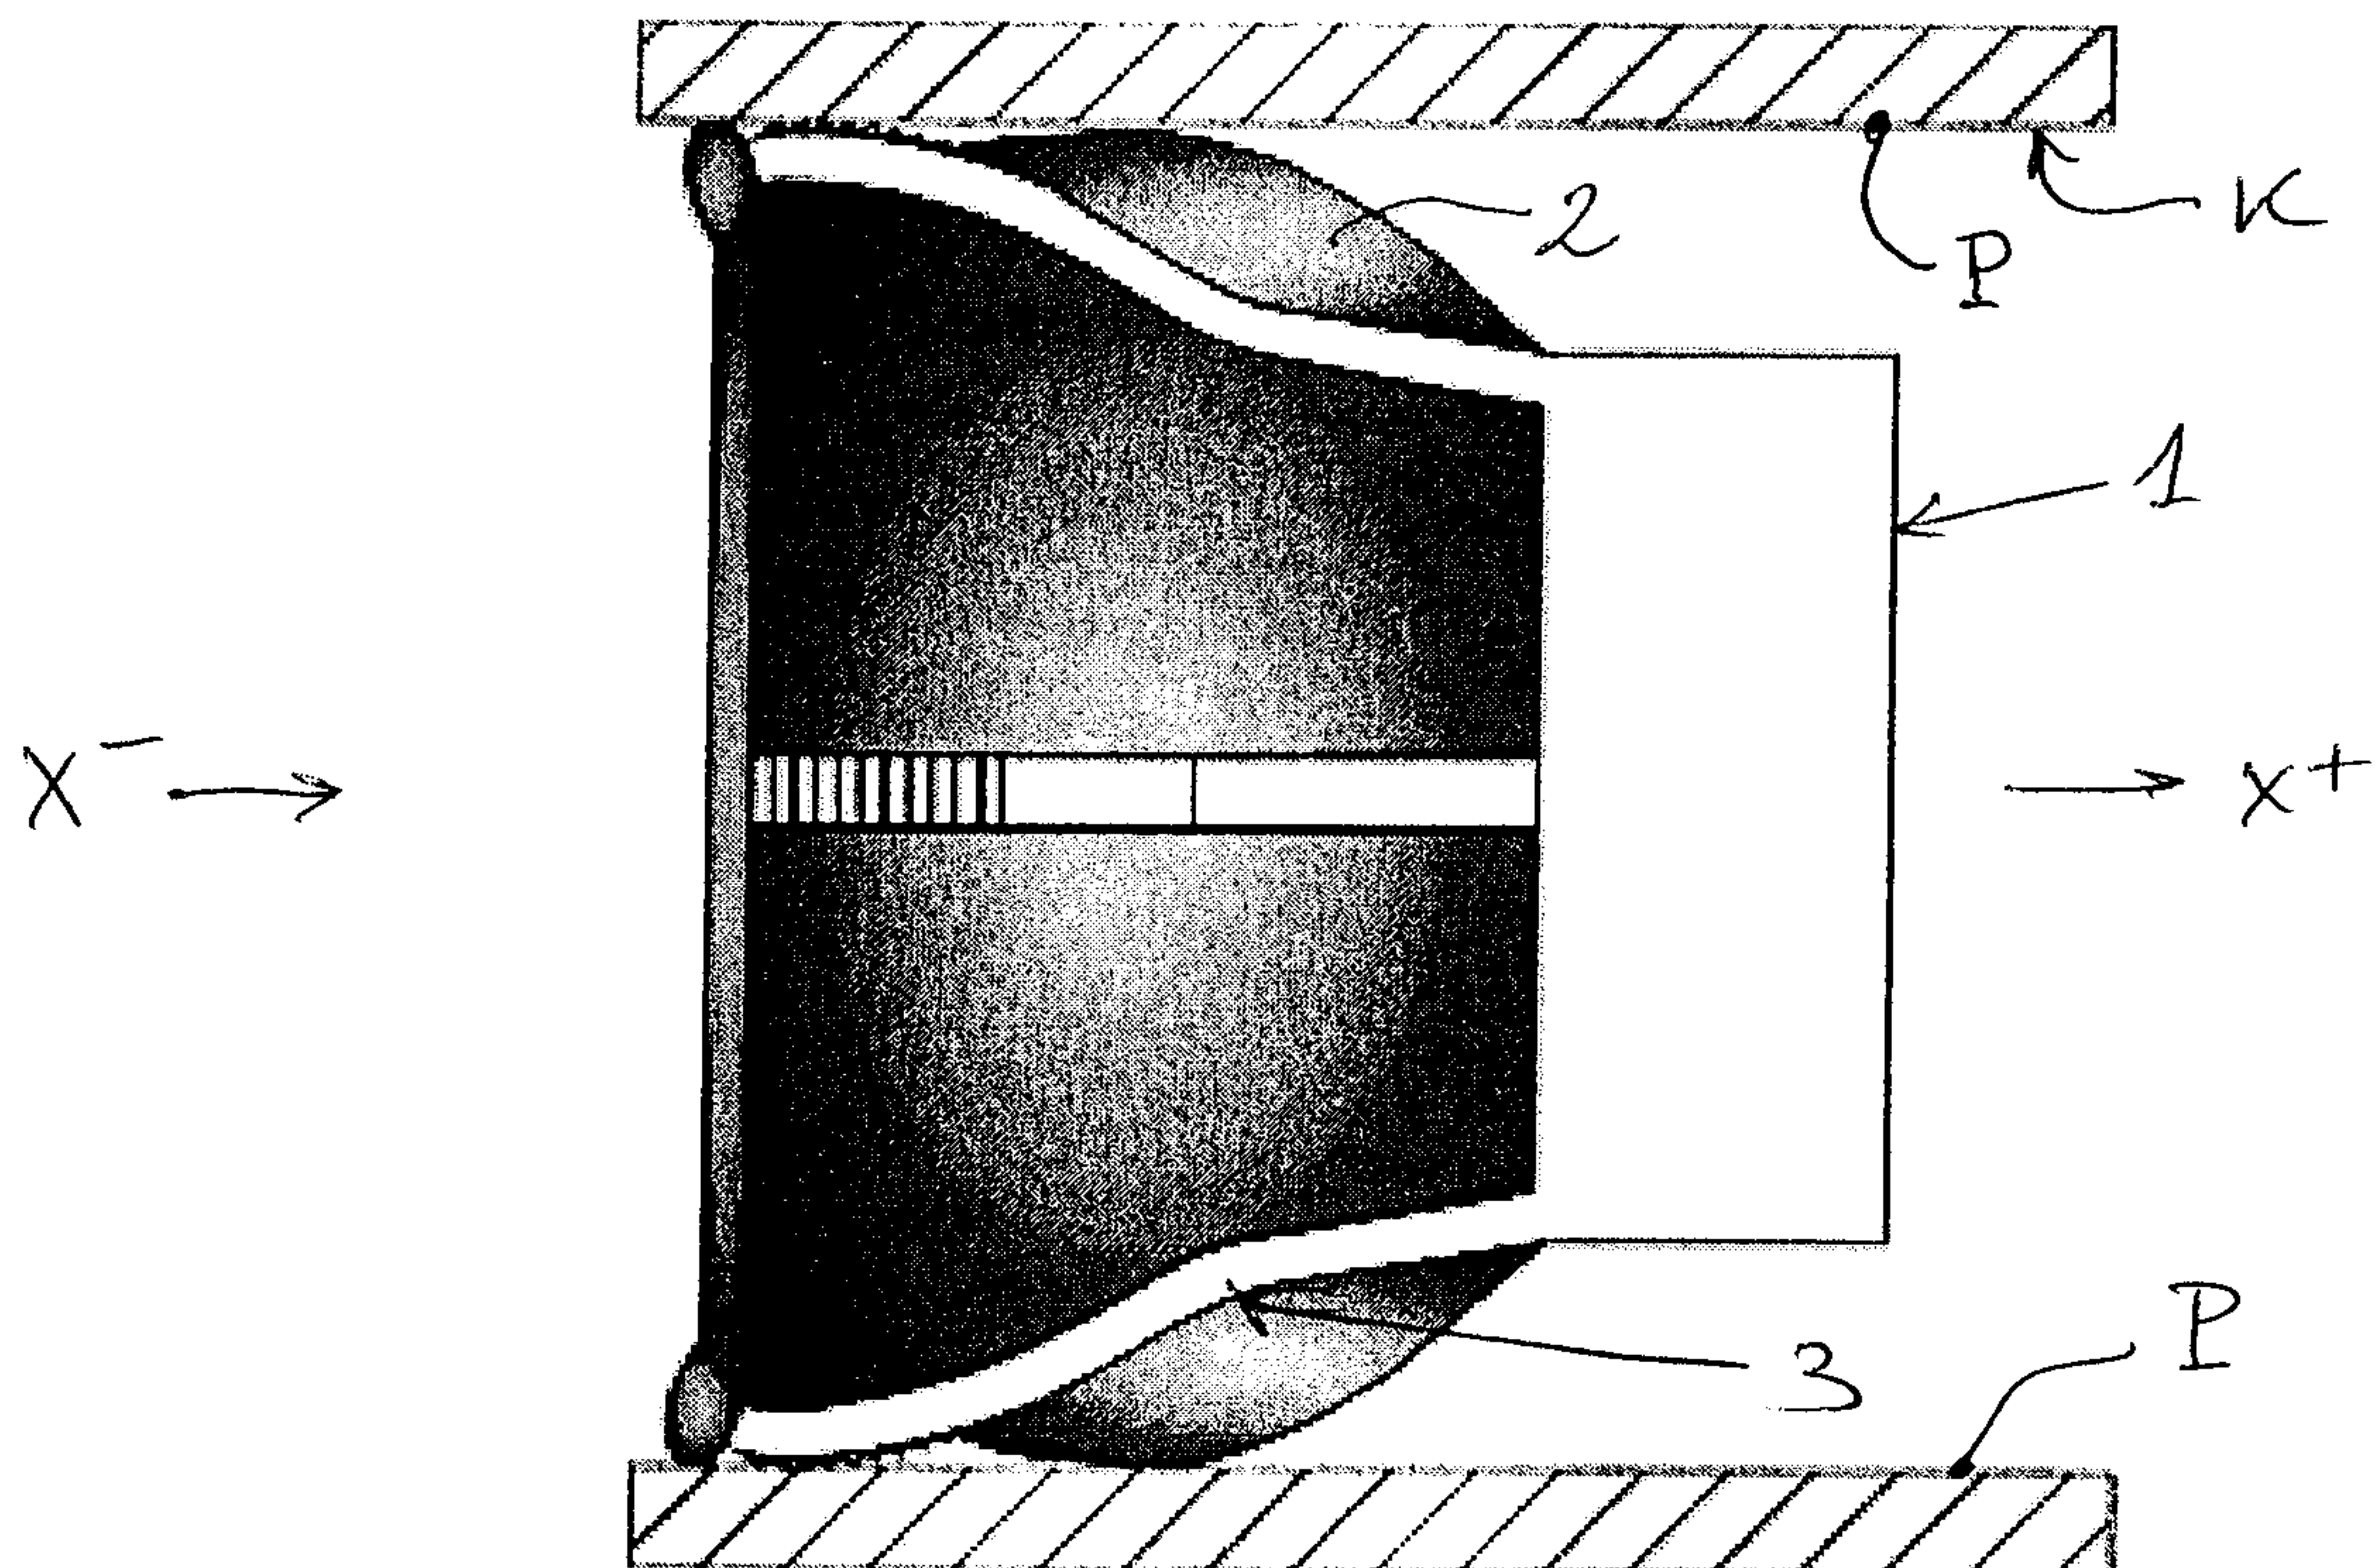


Figure 4

