



(72) DEN BOER, JOHANNIS JOSEPHUS, NL


(71) SHELL CANADA LIMITED, CA

(51) Int.Cl.⁶ E21B 47/04

(30) 1997/04/09 (97201092.0) EP

(54) **PROCEDE ET DISPOSITIF D'OBSERVATION EN FOND DE
PUITS**

(54) **DOWNHOLE MONITORING METHOD AND DEVICE**

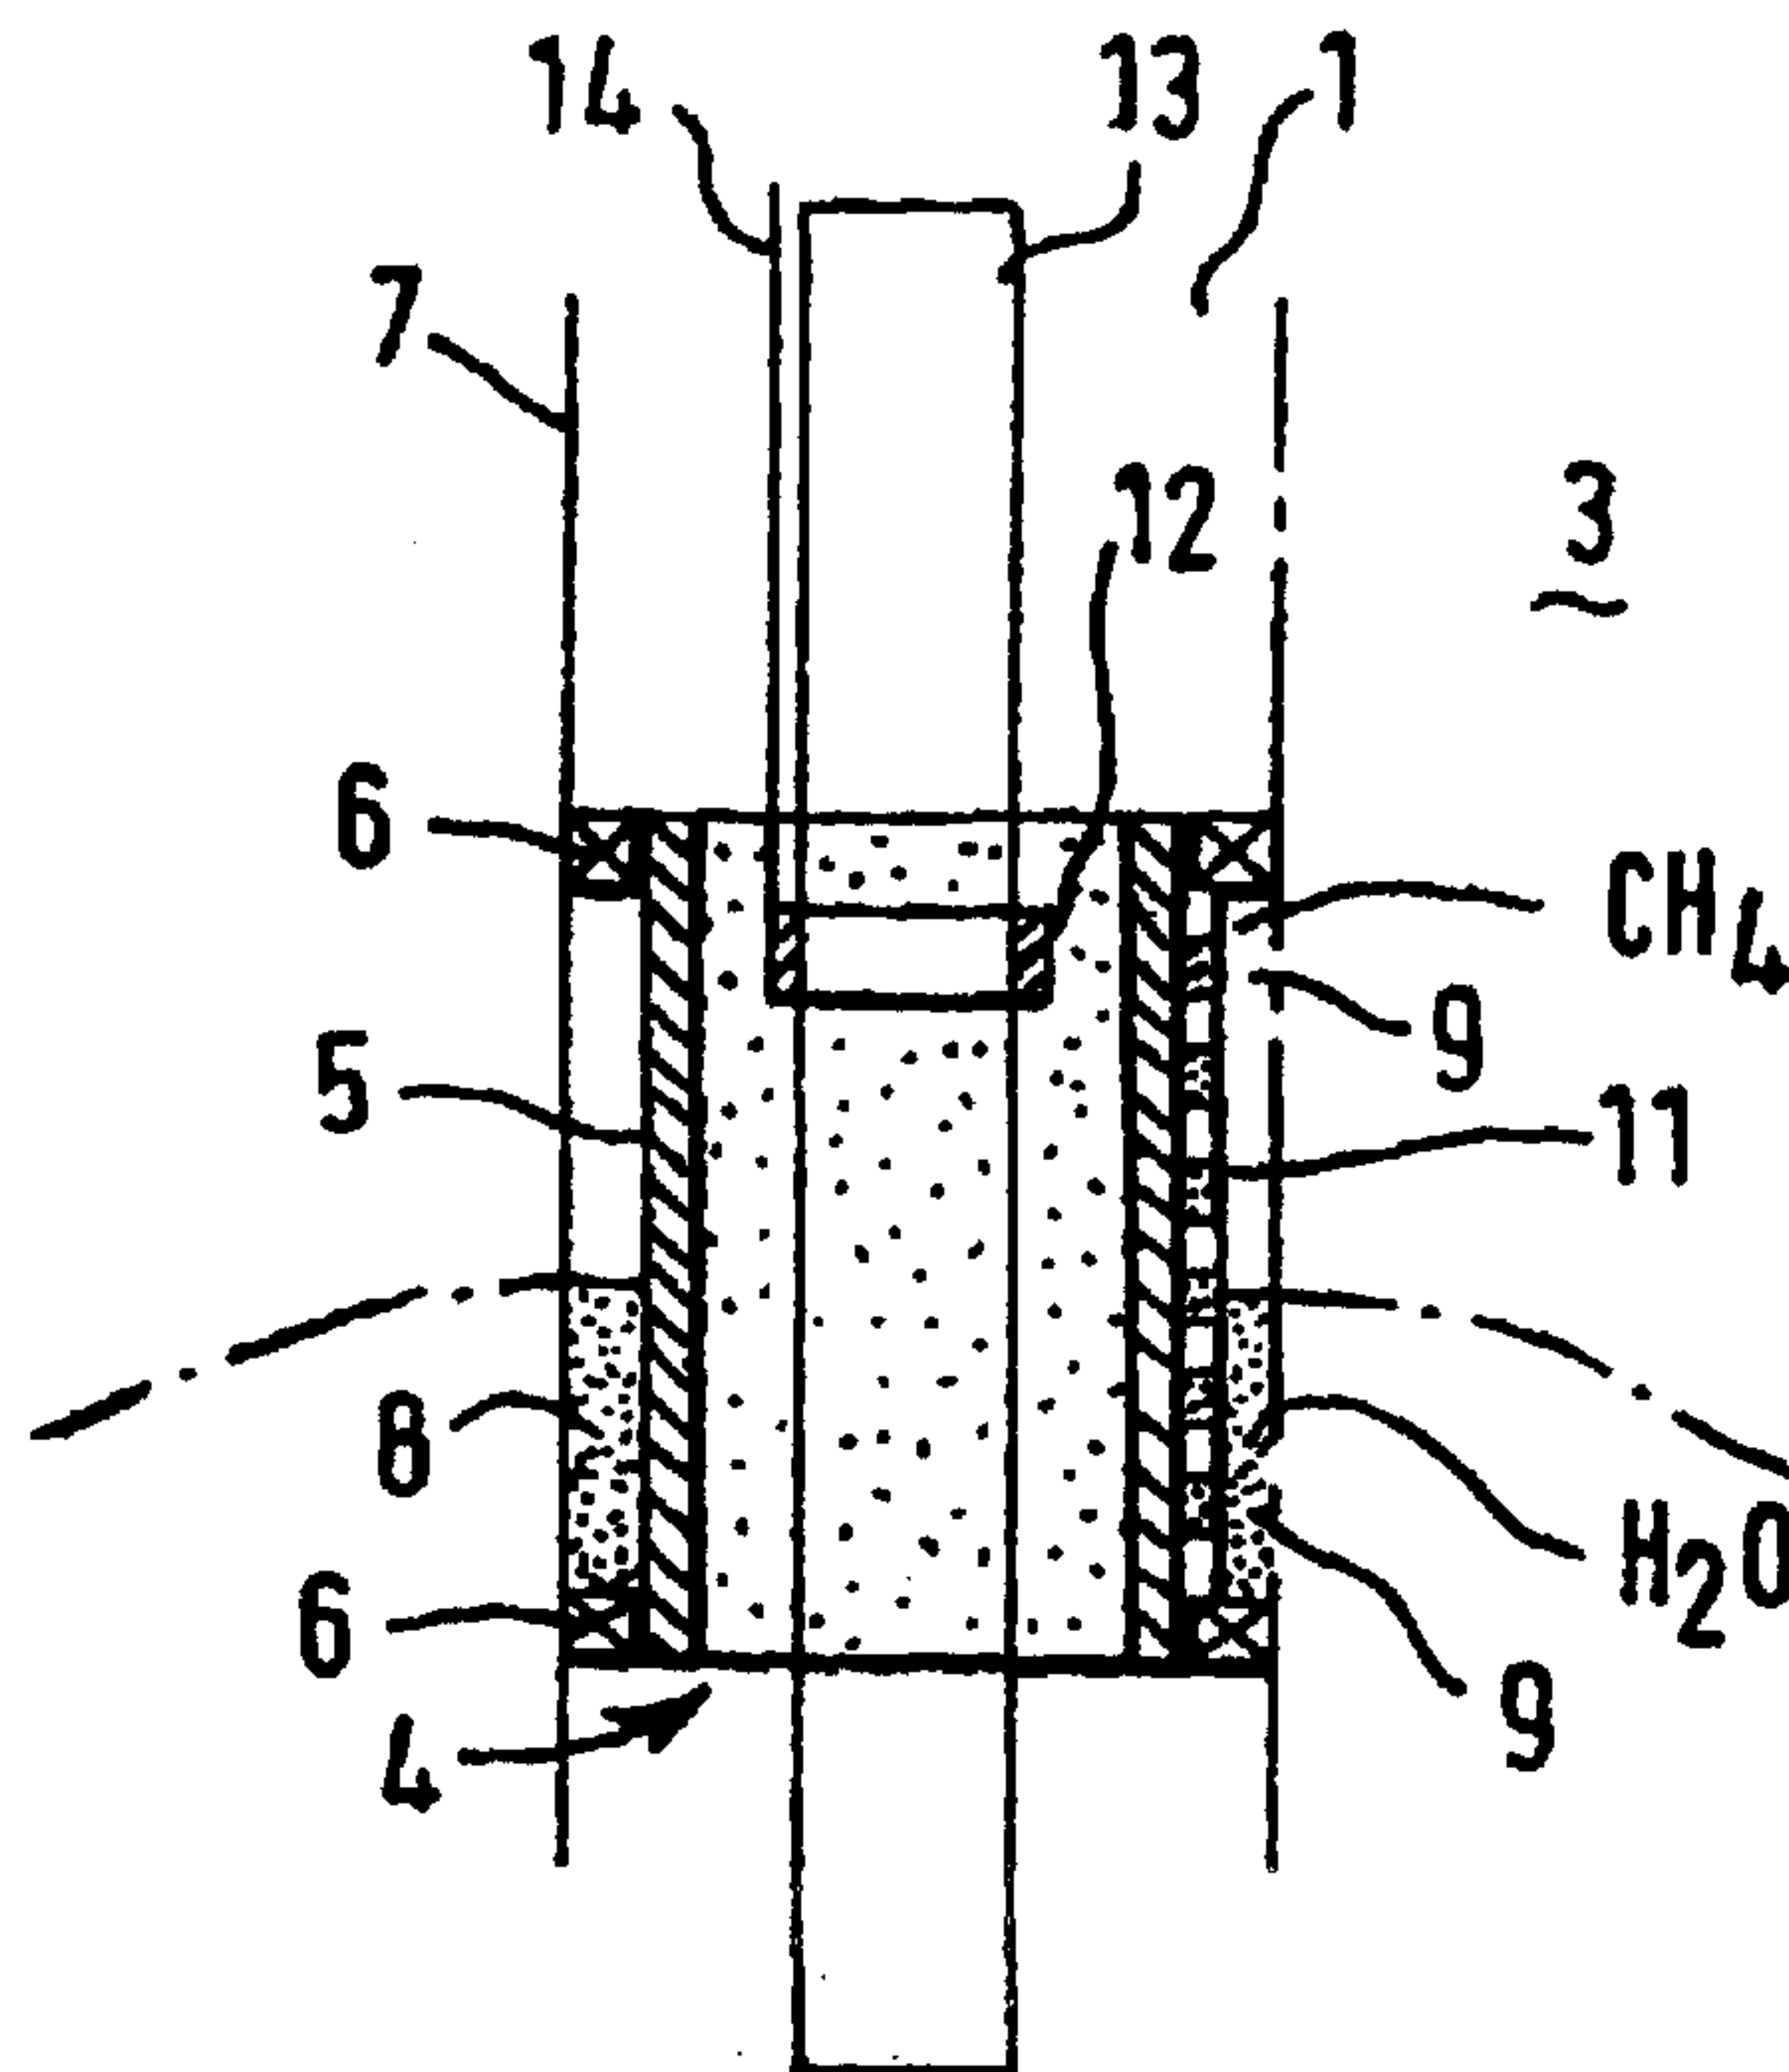

(57) L'invention porte sur un procédé et un dispositif d'observation des interfaces entre fluides et d'autres caractéristiques des fluides dans les intervalles entre pores d'une formation souterraine. Le dispositif (4) comporte un tube (5) autour duquel est disposée une chambre annulaire (8) de mesure qui communique avec lesdits intervalles de la formation environnante, mais est isolée des autres parties du puits de production ou d'autres puits où le dispositif (4) est placé. Un réseau de capacités et autres capteurs (11) est monté dans la chambre de mesure (8) pour y mesurer les interfaces entre fluides et d'autres caractéristiques des fluides.

(57) A method and device are provided for monitoring the interfaces between and other physical characteristics of fluids in the pore spaces of an underground formation. The device (4) comprises a sleeve (5) around which, when in use, an annular measuring chamber (8) is formed which is in fluid communication with the pore spaces of the surrounding formation but which is hydraulically isolated from other parts of the wellbore of a production or other well in which the device (4) is mounted. An array of capacitor or other sensors (11) is mounted in the measuring chamber (8) for measuring the interfaces between, or other physical characteristics of, the fluids in the measuring chamber (8).


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E21B 47/04	A1	(11) International Publication Number: WO 98/45574 (43) International Publication Date: 15 October 1998 (15.10.98)
(21) International Application Number: PCT/EP98/02187 (22) International Filing Date: 8 April 1998 (08.04.98) (30) Priority Data: 97201092.0 9 April 1997 (09.04.97) EP (34) Countries for which the regional or international application was filed: GB et al. (71) Applicant (for all designated States except CA): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL). (71) Applicant (for CA only): SHELL CANADA LIMITED [CA/CA]; 400 - 4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA). (72) Inventor: DEN BOER, Johannis, Josephus; Volmerlaan 6, NL-2288 GD Rijswijk (NL).		(81) Designated States: AU, CA, CN, ID, MX, NO, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: DOWNHOLE MONITORING METHOD AND DEVICE**(57) Abstract**

A method and device are provided for monitoring the interfaces between and other physical characteristics of fluids in the pore spaces of an underground formation. The device (4) comprises a sleeve (5) around which, when in use, an annular measuring chamber (8) is formed which is in fluid communication with the pore spaces of the surrounding formation but which is hydraulically isolated from other parts of the wellbore of a production or other well in which the device (4) is mounted. An array of capacitor or other sensors (11) is mounted in the measuring chamber (8) for measuring the interfaces between, or other physical characteristics of, the fluids in the measuring chamber (8).

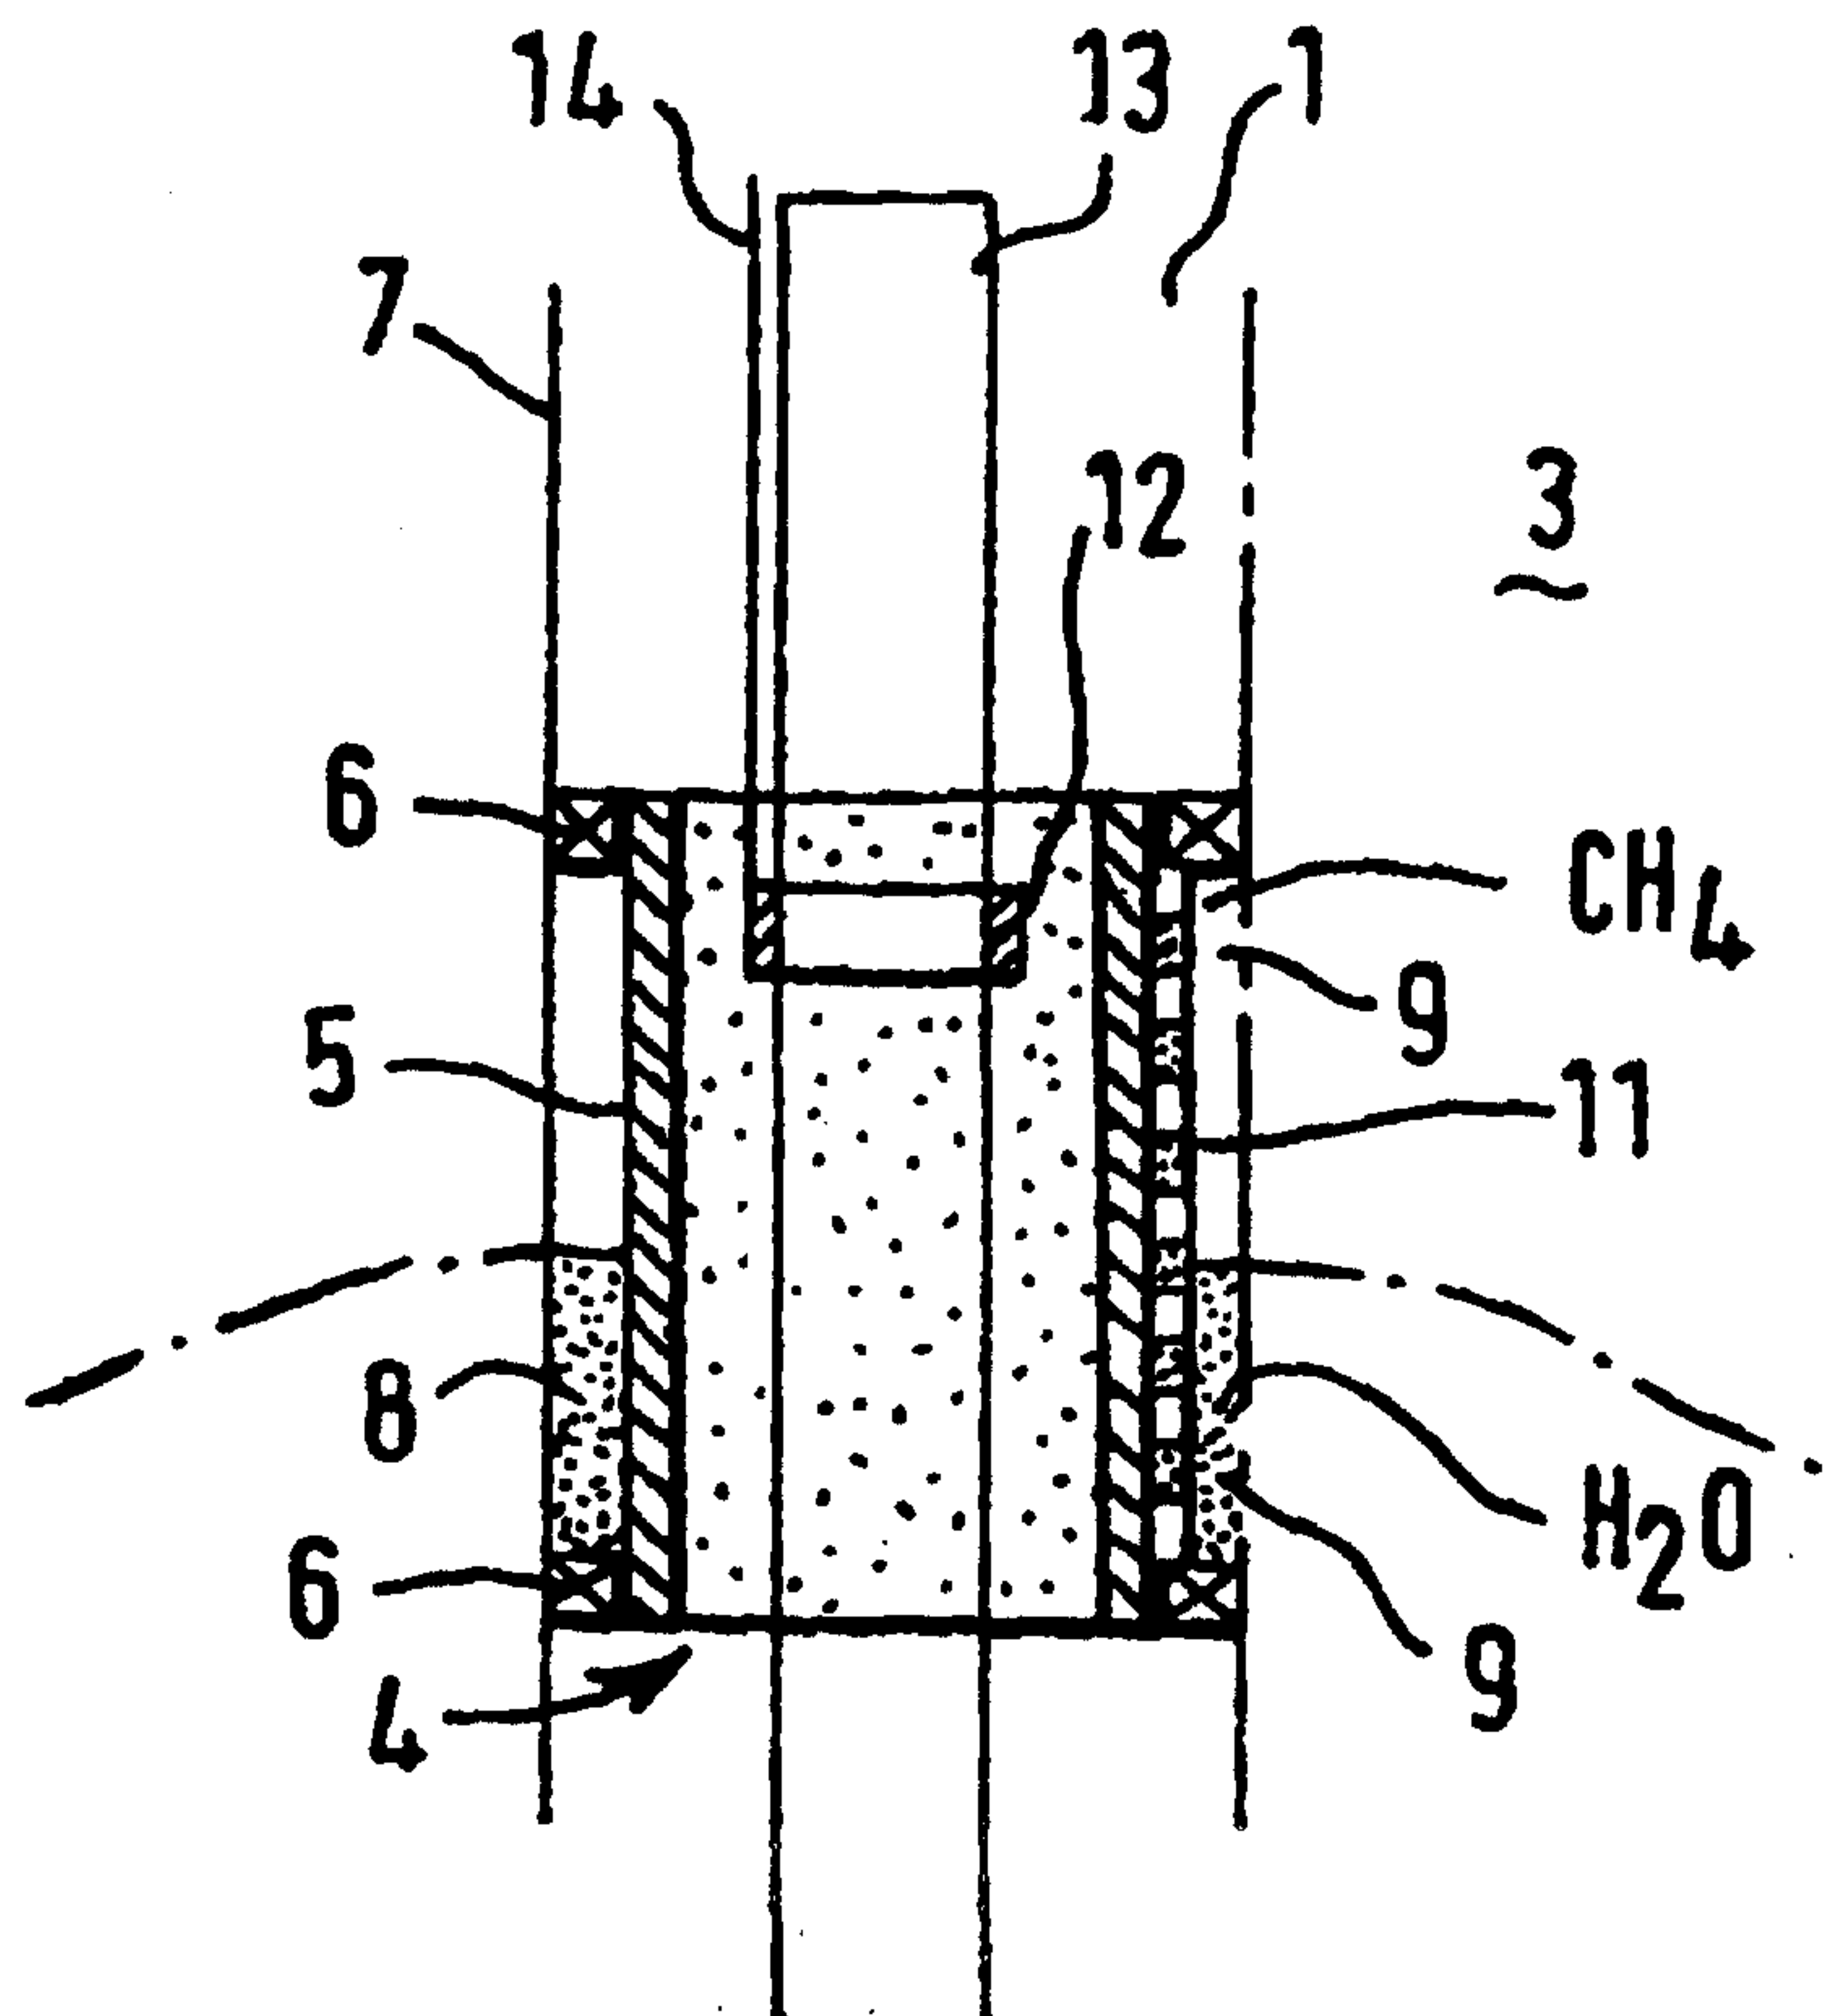

DOWNHOLE MONITORING METHOD AND DEVICE

The invention relates to a method and device for downhole monitoring of physical characteristics of fluids.

5 More particularly the invention relates to a method and device for monitoring physical characteristics of fluids in the pore spaces of an underground formation surrounding a wellbore.

10 When fluids, such as crude oil and natural gas, are produced it is often desirable to measure at downhole locations physical characteristics of the produced fluid(s) in order to ensure optimum production. Relevant characteristics are the pressure, temperature and composition of the fluid. Fluid composition monitoring is useful in reservoir formations where water or gas coning occurs around the well or wells through which crude oil is produced. In such reservoir formations it is therefore particularly relevant to continuously monitor the location(s) of the oil, gas and/or water interfaces at a variety of downhole locations.

20 Various methods exist to monitor fluid characteristics downhole.

French patent application No. 7825396 discloses an annular pressure sensor that can be mounted on a drillstring to measure the fluid pressure in the borehole surrounding the drillstring during drilling operations.

25 US patent specification No. 2,564,198 discloses a method wherein the inflow section of producing well is divided into a number of subsections by a removable well testing apparatus, which is equipped with a series of expandable packers.

30

- 2 -

The composition of the fluid that flows into each subsection is monitored by a fluid identifier unit which may measure the electrical conductivity of the produced fluid.

5 US patent specification No. 5,132,903 discloses a method wherein a removable measuring sonde is lowered into the inflow region of an oil production well and a pad can be forced against the borehole wall to provide a sealed chamber from which fluid is evacuated by a pump
10 and the properties of the thus withdrawn pore fluid(s) are measured. This known method allows determination of the oil/water concentrations on the basis of a measurement of the dielectric properties of the produced fluids. Other dielectric well logging devices are
15 disclosed in US patent specifications Nos. 2,973,477 and 4,677,386, German patent specification 2621142 and European patent specification 0111353.

The method and device according to the preamble of claims 1 and 5 are known from US patent specification
20 No. 2,605,637. This prior art reference discloses a well in which a series of stacked annular measuring chambers are created by means of a series of packers. Each chamber is connected to the wellhead via a sounding tube through which a calibrated sounding line can be lowered to
25 measure the fluid level therein occasionally.

A disadvantage of the known monitoring techniques is that use is made of measuring equipment which is temporarily lowered into the wells to perform the measurements and that these methods primarily measure
30 characteristics of fluids that are flowing into the well.

An object of the present invention is to provide a method and device which enable a continuous downhole measurement of in-situ characteristics of the fluids in the pore spaces of the formation surrounding the
35 wellbore.

AMENDED SHEET

- 3 -

Further objects of the present invention are to provide a downhole fluid monitoring method which can be carried out by means of a measuring device which can be easily installed at any location within a wellbore in such a way that it does not obstruct access to and/or production from lower parts of the well and which can be easily removed or replaced.

The method according to the invention comprises creating in the wellbore a measuring chamber which is in fluid communication with the pore spaces of the formation but which is hydraulically isolated from the rest of the wellbore, thereby creating a body of substantially stagnant fluid in the chamber and measuring physical characteristics of the fluid in the chamber by means of a string of capacitive sensors which are permanently arranged in the chamber and are axially spaced with respect to a longitudinal axis of the wellbore and are connected to fluid level monitoring equipment which is adapted to identify the presence and location of an interface between different fluids, such as water, crude oil and/or natural gas in the region of the string of sensors.

Furthermore it is preferred that the measuring chamber is an annular chamber which is isolated from the rest of the wellbore by means of a fluid tight sleeve and a pair of axially spaced packers that are arranged between the sleeve and an inner surface of the wellbore.

The fluid monitoring device according to the invention comprises a sleeve for creating in the wellbore measuring chamber which, when in use, is in fluid communication with the pore spaces of the formation but which is hydraulically isolated by the sleeve and packers mounted on the sleeve from the rest of the wellbore thereby creating a body of substantially stagnant fluid in the chamber, and a string of axially spaced capacitive

AMENDED SHEET

- 3a -

sensors that are mounted within the chamber for measuring physical characteristics of the fluid inside the chamber.

5 These and other features, objects and advantages of the method and device according to the present invention are disclosed in the accompanying claims, abstract, drawings and the following detailed description with reference to the drawings.

In the drawings:

drawings and the following detailed description with reference to the drawings.

In the drawings:

Fig. 1 is a schematic representation of an oil
5 production well in which the downhole fluid monitoring method and device according to the invention are used;

Fig. 2 is a vertical sectional view of the well of
Fig. 1 showing at a larger scale than in Fig. 1 details
10 of the fluid monitoring device according to the invention;

Fig. 3 shows in detail and at a further enlarged
scale the array of capacitance sensors of the fluid
monitoring device of Fig. 2 and showing the variation of
the dielectric constant measured by the sensors at the
15 gas-water interface;

Fig. 4 is a schematic representation of a vertical
well and of a series of slimhole side-track wells, which
wells are equipped with fluid monitoring devices
according to the invention;

Fig. 5 is a longitudinal sectional view showing at an
enlarged scale the fluid monitoring device in one of the
20 side-track wells of Fig. 4;

Fig. 6 is a schematic vertical sectional view of a
horizontal oil production well and of six slimhole side-
25 track wells, where each side-track well is equipped with
a fluid monitoring device according to the invention; and

Fig. 7 is a schematic vertical sectional view of a
vertical oil production well and a slimhole side-track
well which are each provided with a pair of fluid
30 monitoring devices according to the invention.

Referring now to Fig. 1 there is shown a production
well 1 via which natural gas (referred to as CH₄ in the
drawings) is produced. As a result of the reduced fluid
pressure in the region of the well 1 water coning takes

- 5 -

place and a cone 2 of water (referred to as H₂O in the drawings) is formed in the pore spaces of the lower part of the reservoir formation 3 surrounding the well 1.

5 In order to monitor the presence of water in the pore spaces of the reservoir formation 3 and/or to monitor other characteristics of the pore fluids a downhole monitoring device 4 according to the invention is installed in the well 1.

10 As shown in more detail in Fig. 2 the monitoring device comprises a tubular sleeve 5 which is equipped with a pair of packers 6. The packers are expanded once the sleeve 5 has been lowered to the location where the measurements are to be made to seal off the upper and lower ends of the annular space between the sleeve 5 and
15 a well casing 7, thereby forming an annular measuring chamber 8 which is hydraulically isolated from the rest of the wellbore. Before installation of the device 4 the well casing 7 has been provided with perforations 9 via which the fluid in the pores of the reservoir formation 3
20 surrounding the device 4 is given free access to the measuring chamber 8.

As no fluid is produced from the measuring chamber 8 the fluid in the chamber 8 is substantially stagnant and an equilibrium is established between the gas/water
25 (CH₄/H₂O) interface 10 in the measuring chamber 8 and the gas/water interface in the surrounding reservoir formation 3. Hence the gas/water or other fluid interface in the reservoir formation 3 surrounding the well 1 can be monitored from inside of the measuring chamber 8 using
30 an array of capacitor sensors 11 that are embedded in, or mounted on, the outer surface of the sleeve 5.

Fig. 3 shows at a further enlarged scale the array of capacitor sensors 11 and illustrates the variation of dielectric constants measured at the gas/water

interface 10. Since the dielectric constant of water is about 80 times larger than the dielectric constant of natural gas a high resolution of the device as an interface monitor is possible.

5 Capacitor sensors 11 are known in the art and are being used for interface detection in e.g. storage tanks and will therefore not be described in detail. The use of capacitor sensors 11 requires simple, non-sensitive electronics downhole and needs but low electrical power.

10 The vertical resolution that can be achieved with this type of sensors is in the order of a few mm.

 As shown in Fig. 2 the data transfer from and power supply to the monitoring device 4 is performed by an inductive coupler 12 installed on a production or other
15 tubing 13 at a location adjacent to the device 4.

 The inductive coupler 12 is connected to surface electronics (not shown) through an electrical cable 14.

 If the device 4 is installed above the lowermost casing-tubing packer (not shown) the production tubing 13
20 can be used to install the inductive coupler 12 and to clamp on the electrical cable 14. If the device 4 is to be installed below the lowermost casing-tubing packer (not shown) a tail pipe or other well tubular may be used for this purpose.

25 Alternatively a cable-less communication system, such as an acoustic system or a system that uses the tubing as an antenna may be used for the data transfer from and power supply to the monitoring device 4. The device 4 can therefore be easily installed in both existing and new
30 wells for permanent downhole use.

 In addition to or instead of capacitor sensors 11 the device can also be equipped with other sensors for measuring physical characteristics of the pore fluids, such as pressure and temperature.

- 7 -

Being a stand alone unit, the monitoring device 4 offers high installation flexibility and is but a small obstruction in the wellbore. Due to its tubular design free access to the wellbore below the device 4 is provided. This also allows the use of several monitoring devices 4 at various depths in a single well 1, e.g. to monitor the fluid interfaces of stacked reservoirs and/or to monitor the oil/water interface below, and the oil/gas interface above, an oil bearing reservoir formation. In reservoirs where steam or other fluid injection takes place the device 4 may be used to monitor a breakthrough of steam or another injection fluid into the production well 1.

Frequently there is a need to image the fluid interfaces and other characteristics of the pore fluids in reservoir formations at a distance from a production well.

Fig. 4 shows a vertical production well 20 in which a monitoring device 21 which is similar to the device 4 of Figs. 1-3 is mounted. In order to enable fluid interface monitoring at a distance from the production well 20 three slimhole side-track wells 22 have been drilled into the reservoir formation 23. Each side-track well 22 is equipped with a monitoring device 24 which is shown at an enlarged scale in Fig. 5.

As shown in Fig. 5 the device 24 comprises a tubular sleeve 25 which is equipped with a pair of expandable packers 26 that are pressed against the formation surrounding the wellbore of the side track well 22.

Thus an annular measuring chamber 27 is formed around the sleeve 25 and between the packers 26 to which chamber 27 pore fluids from the surrounding formation have free access but which chamber is hydraulically isolated from the rest of the wellbore.

The outer surface of the sleeve 25 is equipped with an array of capacitor and/or other sensors (not shown) which operate in the same manner as described with reference to Figs. 1-3.

5 The array of sensors is connected to means for displaying the measured fluid characteristics at the surface (not shown) by means of one or more electrical or optical signal transmission cables 28. Once the monitoring devices 24 and transmission cables 28 are
10 installed the side-track wells are, except the measuring chambers 27, fully filled with cement 29 to prevent uncontrolled production via the side-track wells 22. Thus, the monitoring devices 24 are buried in the reservoir formation.

15 The well and sensor configuration shown in Figs. 4 and 5 is suitable for monitoring the gas/water (CH₄/H₂O) interface at various locations in and at various distances away from the gas production well 20 which allows an adequate mapping of the variations of the
20 gas/water interface throughout the reservoir formation 23 as a result of water coning or other reservoir depletion effects.

25 Fig. 6 shows a schematic vertical sectional view of a horizontal oil production well 30 which extends through an oil bearing reservoir formation 31.

Above and below the oil bearing formation 31 there are gas (CH₄) bearing and water (H₂O) bearing formations 32 and 33, respectively.

30 A pair of parallel faults 34 exist in the reservoir and surrounding formations and as a result of variations in the fluid flow conditions the oil/water and gas/oil interfaces are different at each side of each fault 34.

In order to monitor the locations of the oil/water and gas/oil interfaces at each side of the faults 34 a

- 9 -

series of six slimhole side-track wells 35 have been drilled into the reservoir formation 31 in a direction substantially parallel to the faults 34.

Each side-track well 35 is equipped with an elongate monitoring device 36 of the same type as described in detail with reference to Fig. 5 and the other parts of the side-track wells 35 are filled with cement to prevent uncontrolled production via the side-track wells 35. The well and sensor configuration shown in Fig. 6 enables an adequate and continuous mapping of the oil/water and oil/gas and/or gas/water surfaces in a faulted reservoir formation which is traversed by a horizontal or inclined production well.

Fig. 7 is a schematic vertical sectional view of a faulted oil bearing reservoir formation 40 which is traversed by a vertical oil production well 41 which is equipped with an upper and a lower monitoring device 42 and 43, respectively, which devices are of the same type as shown in Fig. 2. Above and below the oil bearing formation 40 there are gas (CH₄) and water (H₂O) bearing strata 44 and 45, respectively. The monitoring devices 42 and 43 are located in the regions of the oil/gas and oil/water interfaces in the reservoir formation 40 in the vicinity of the production well 41. A slimhole side-track well 46 has been drilled from the production well 41 into the reservoir formation 40 in a direction substantially parallel to the faults 49.

The side-track well 46 contains an upper and a lower monitoring device 47 and 48, respectively, for monitoring the gas/oil and oil/water interface at the top and bottom of the oil bearing reservoir formation. The monitoring devices 47 and 48 are of the same type as shown in Fig. 5 and the other parts of the side-track well 46 are

cemented to prevent uncontrolled production via the side-track well 46.

5 The well and sensor configuration shown in Fig. 7 enables an adequate and continuous mapping of the gas/oil and oil/water interfaces in a faulted reservoir formation 40 which is traversed by a vertical or inclined oil production well 41.

10 It will be understood by those skilled in the art that the monitoring device and method according to the present invention can be used to monitor the gas, oil and/or water interfaces at any desired location in an underground formation. They can be used to improve and update the reservoir models and make real-time reservoir imaging and management possible.

C L A I M S

1. A method for monitoring physical characteristics of fluids in the pore spaces of an underground formation (3) surrounding a wellbore (1), the method comprising creating in the wellbore (1) a measuring chamber (8) which is in fluid communication with the pore spaces of the formation (3) but which is hydraulically isolated from the rest of the wellbore (1), thereby creating a body of substantially stagnant fluid in the chamber (8) and measuring physical characteristics of the fluid in the chamber (8) by means of a sensor (11) that is arranged within the chamber (8), characterized in that the measurement is carried out by a string of capacitive sensors (11) which are permanently mounted in the chamber (8) and which are axially spaced with respect to a longitudinal axis of the wellbore (1) and which sensors (11) are connected to fluid level monitoring equipment which is adapted to identify the presence and location of an interface between different fluids, such as water, crude oil and/or natural gas in the region of the string of sensors (11).

2. The method of claim 1, wherein the measuring chamber (8) is an annular chamber which is isolated from the rest of the wellbore (1) by means of a fluid tight sleeve (5) and a pair of axially spaced packers (6) that are arranged between the sleeve (5) and an inner surface (7) of the wellbore (1).

3. The method of claim 1, wherein the well (1) is an oil and/or gas production well and a plurality of axially spaced measuring chambers (8) are created at various locations in the well (1).

- 12 -

4. The method of any one of claims 1-3, wherein the well is a slimhole side-track well (22) which is apart from the measuring chamber (27) substantially filled with a body of cement (29) to prevent production of fluids via the side-track well.

5. A device for monitoring physical characteristics of fluids in the pore spaces of an underground formation (3) surrounding a wellbore (1), the device comprising a sleeve (5) for creating in the wellbore a measuring chamber (8) which, when in use, is in fluid communication with the pore spaces of the formation (3) but which is hydraulically isolated by the sleeve (5) and packers (6) mounted on the sleeve (5) from the rest of the wellbore (1) thereby creating a body of substantially stagnant fluid in the chamber (8), and a sensor (11) that is arranged within the chamber (8) for measuring physical characteristics of the fluid inside the chamber (8), characterized in that a series of capacitive sensors (11) is permanently mounted in the chamber (8) which sensors are axially spaced with respect to a longitudinal axis of the wellbore (1) and are connectable to fluid level monitoring equipment which is adapted to identify the presence and location of an interface between different fluids, such as water, crude oil and/or natural gas in the region of the string of sensors (11).

AMENDED SHEET

FIG. 2

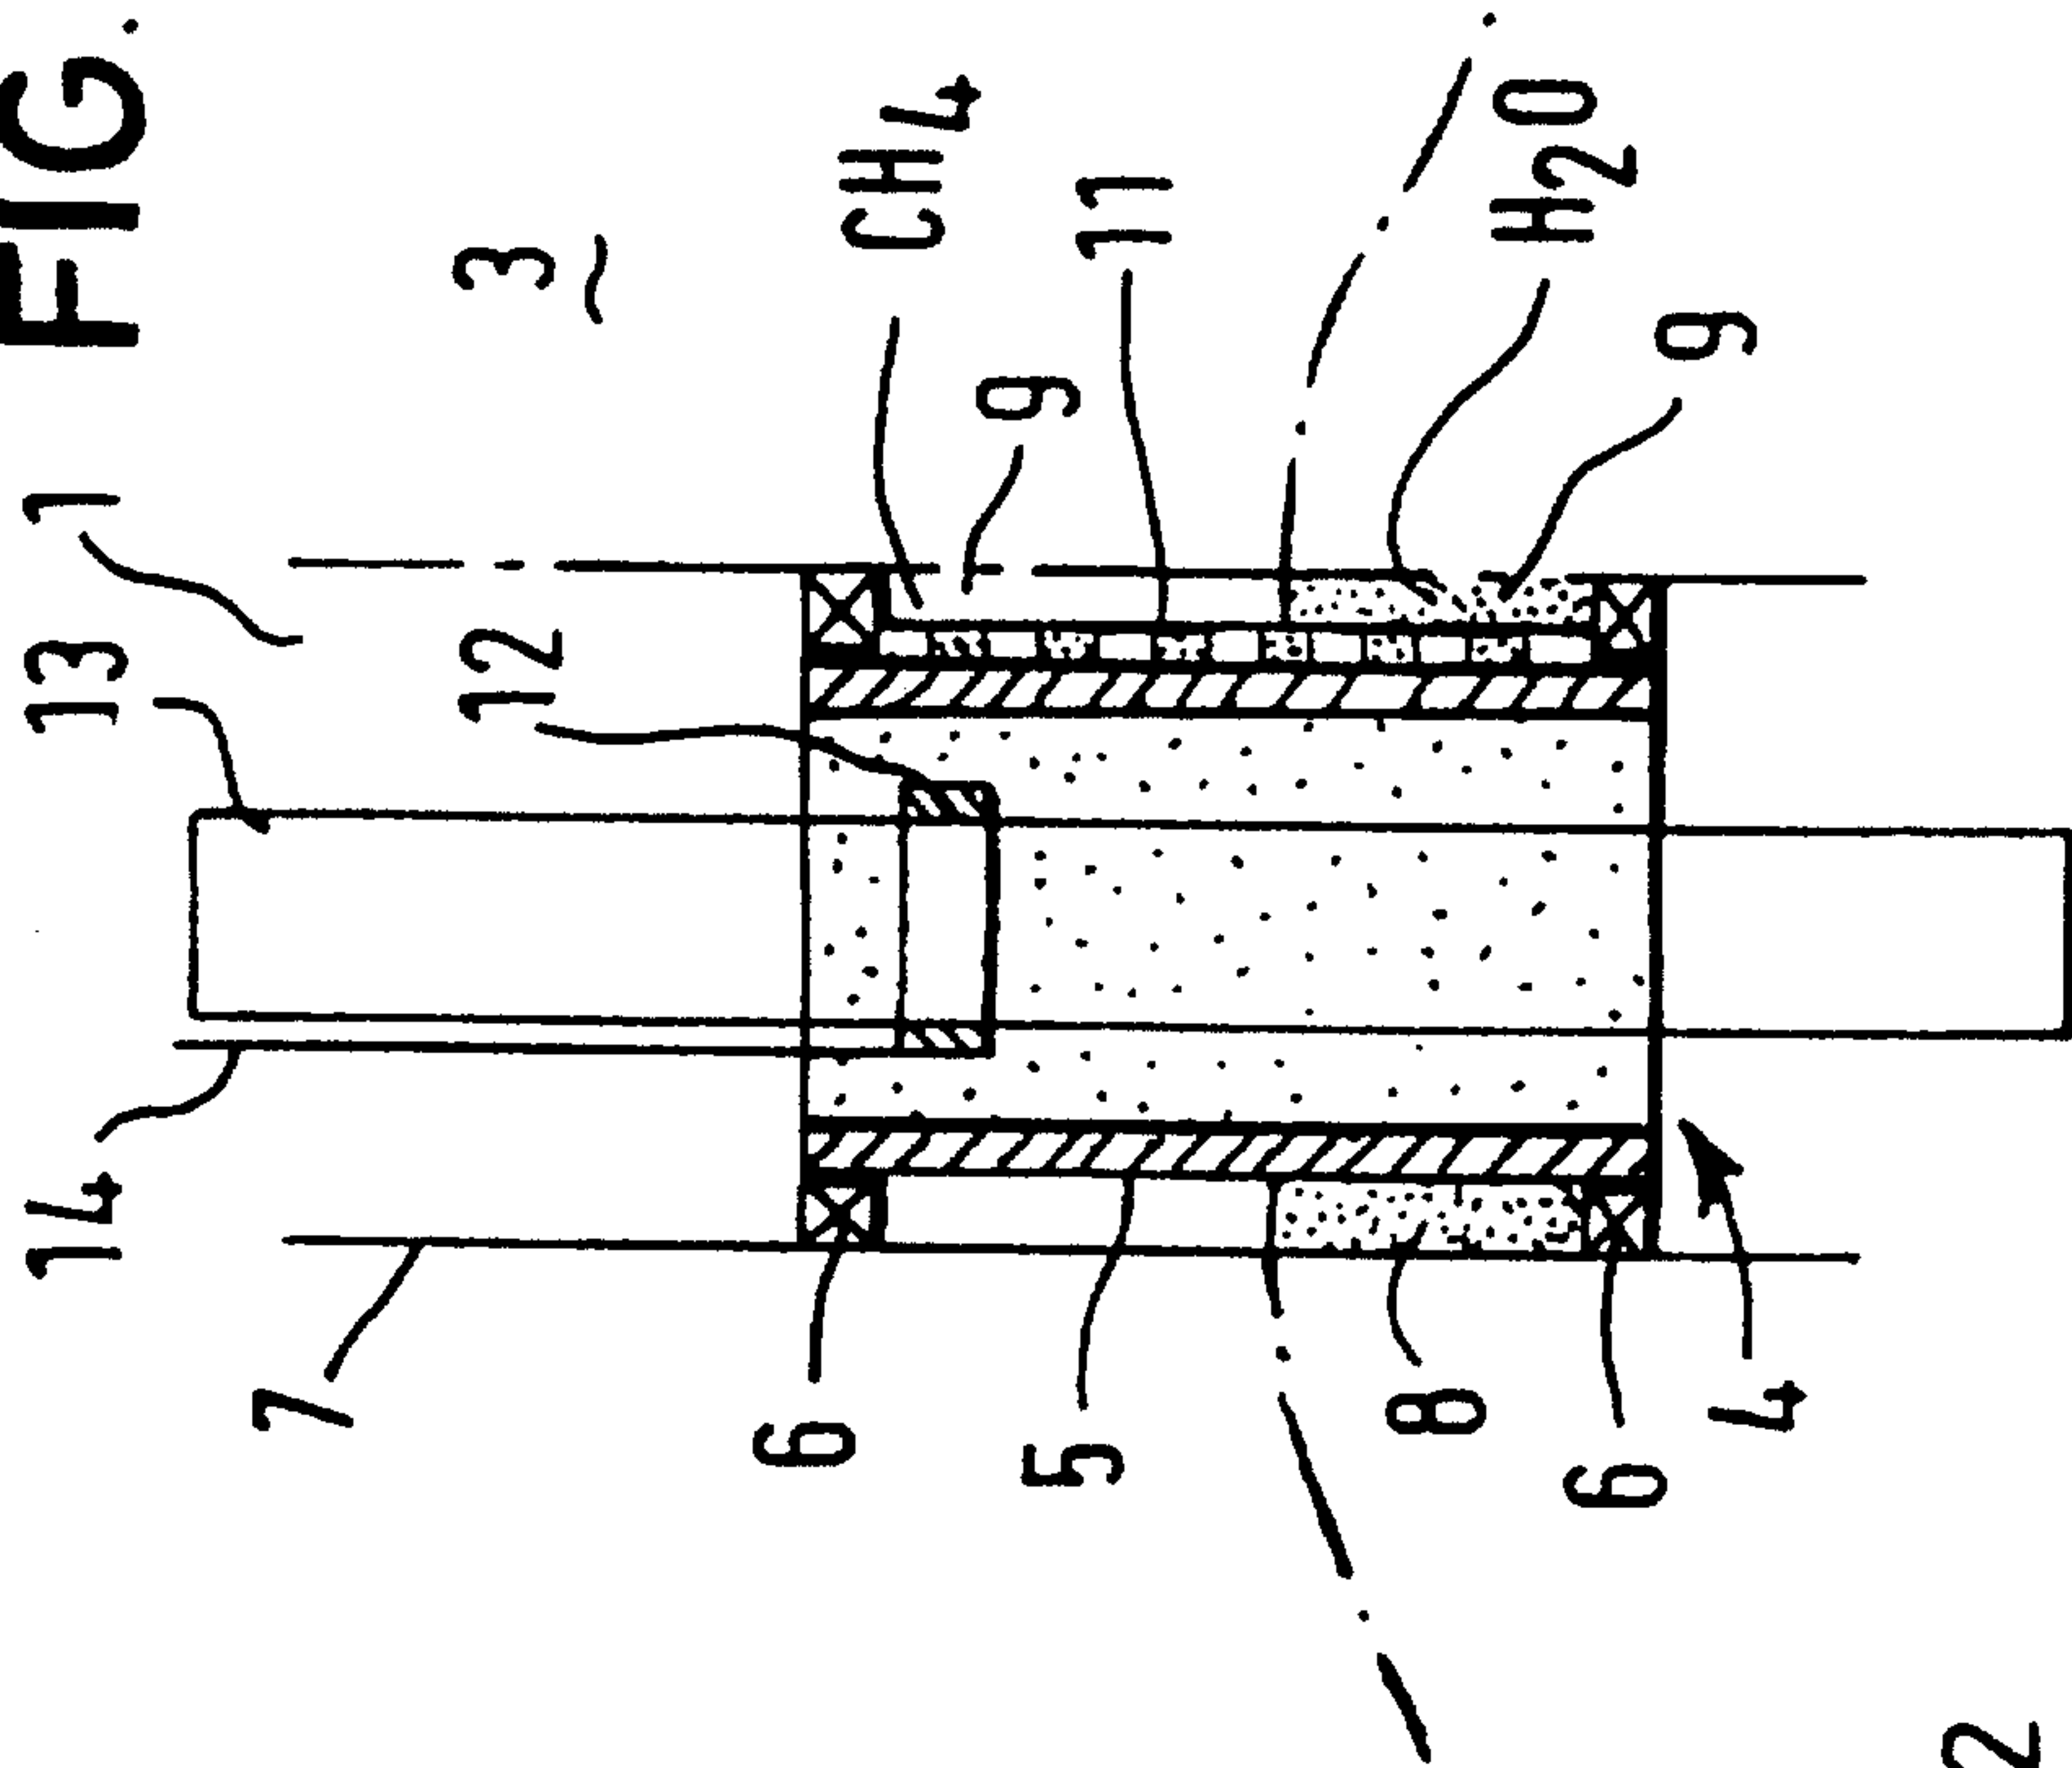


FIG. 1

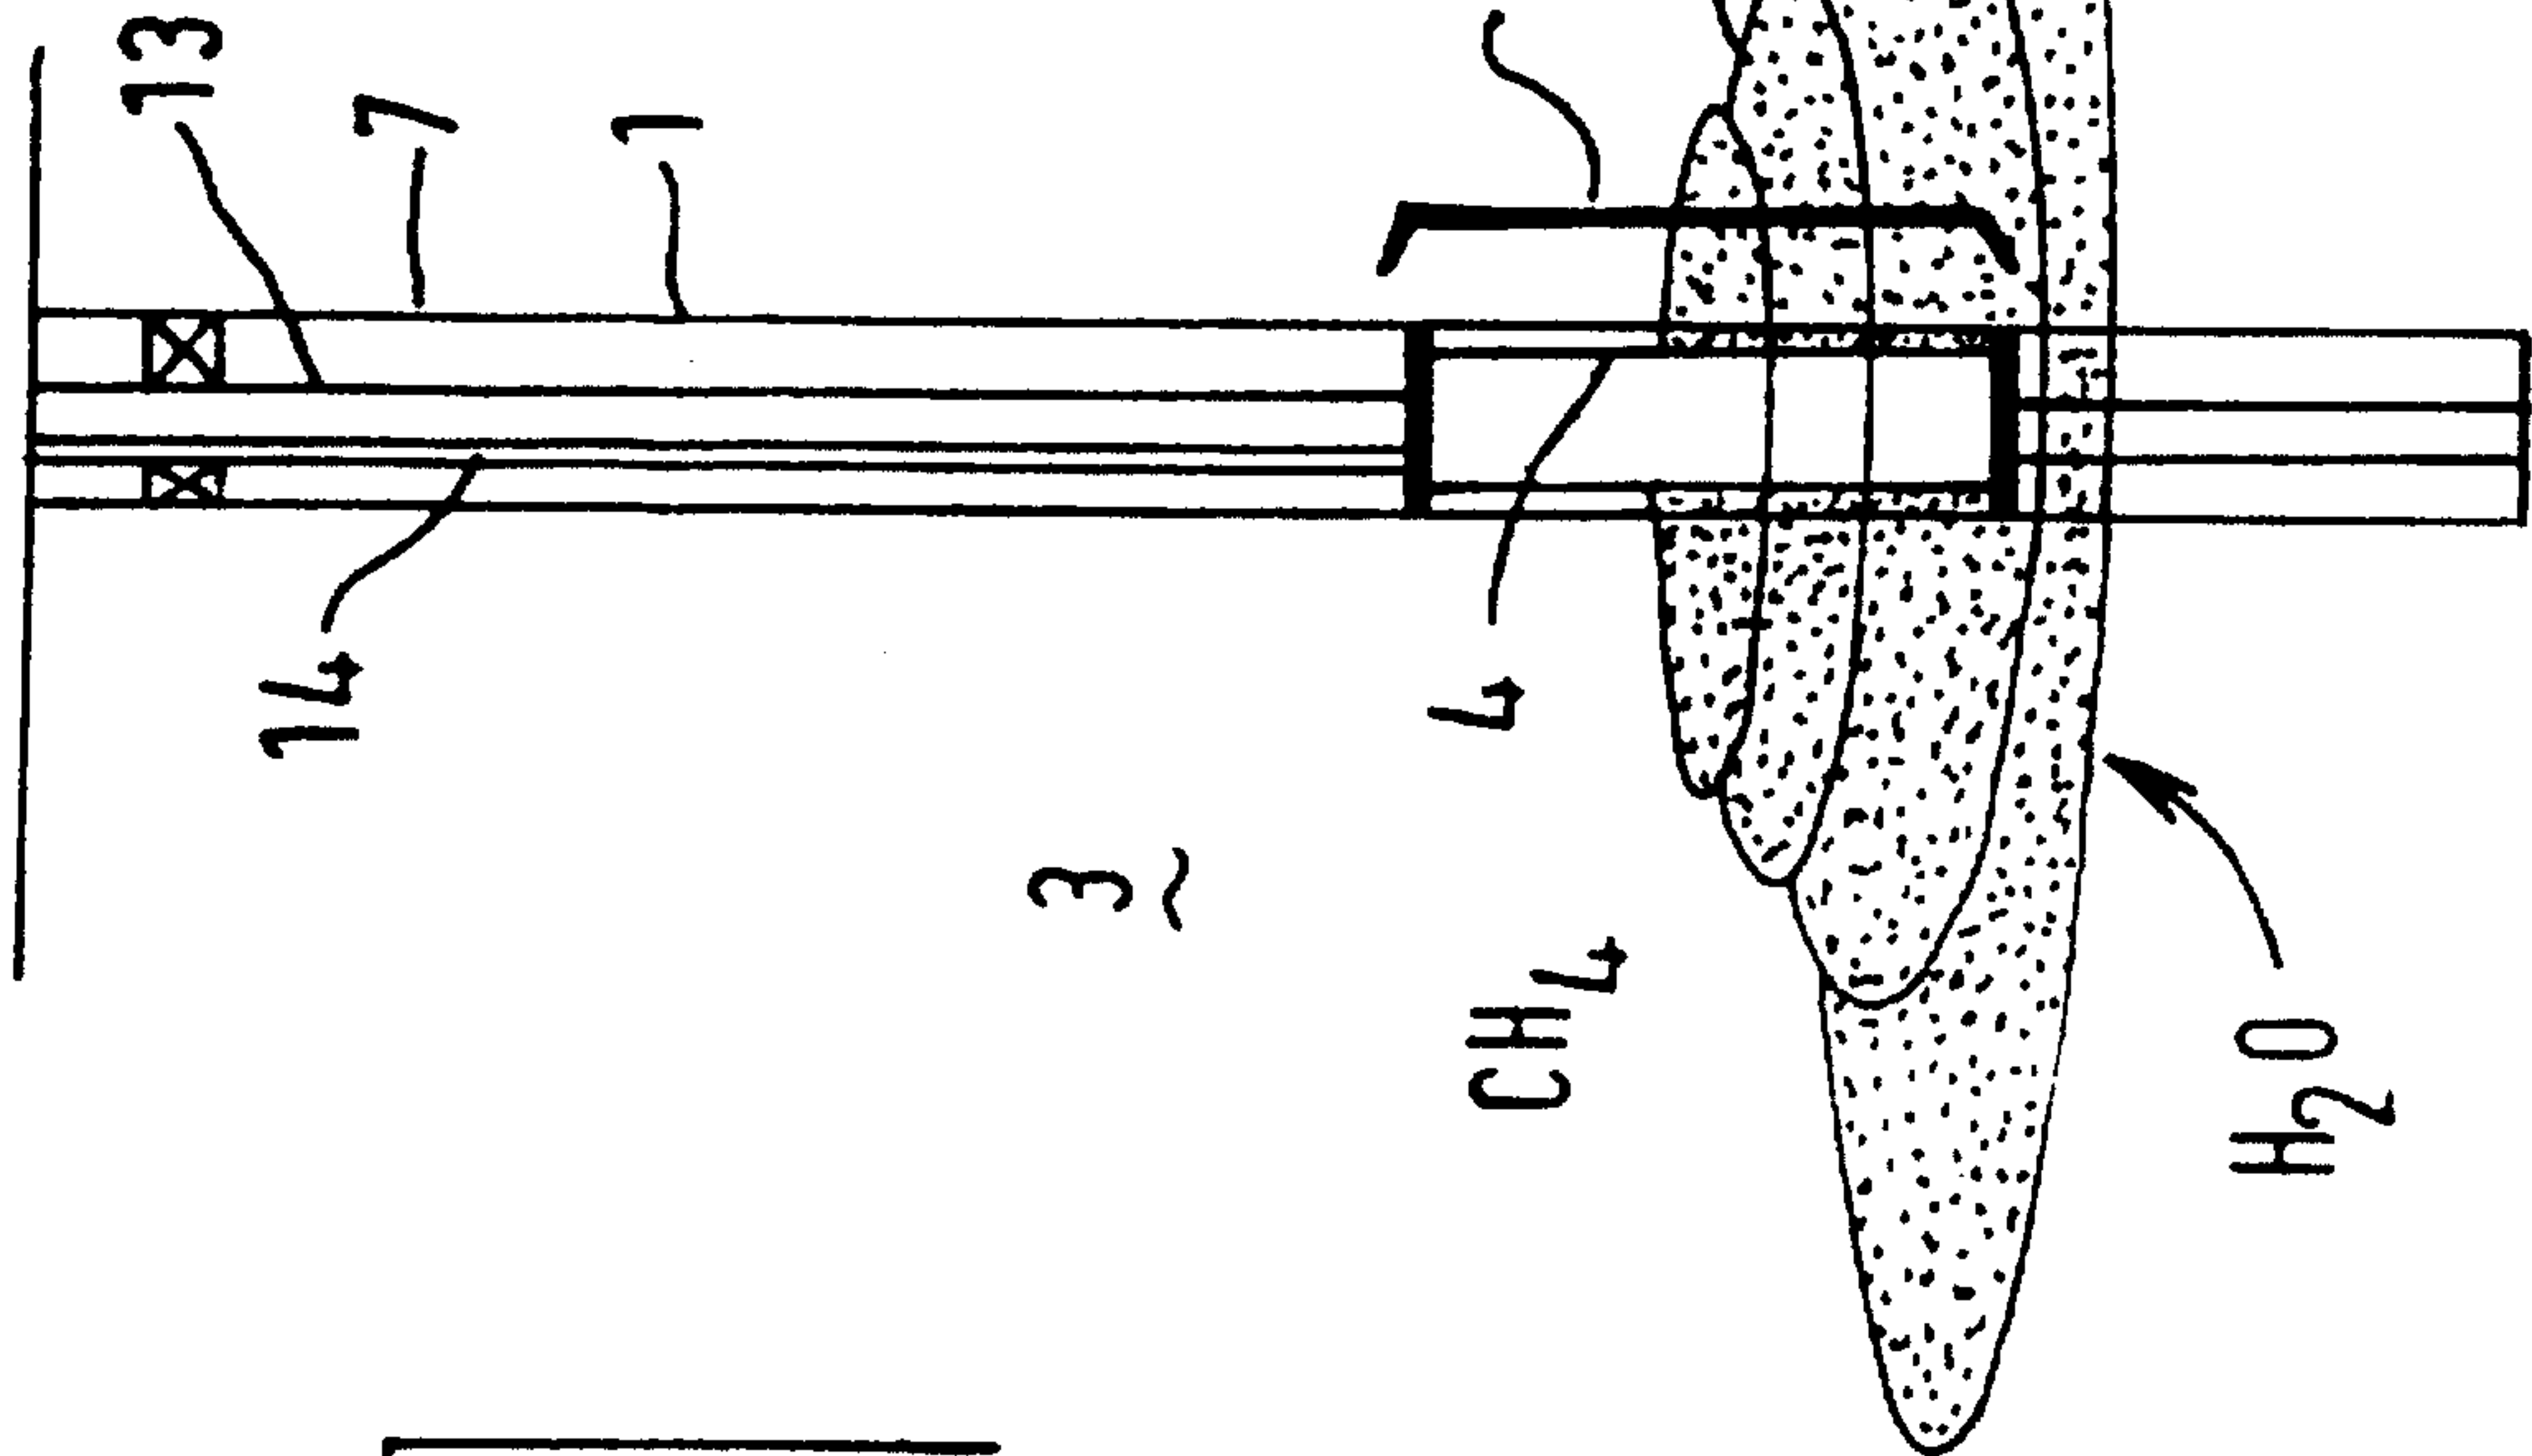
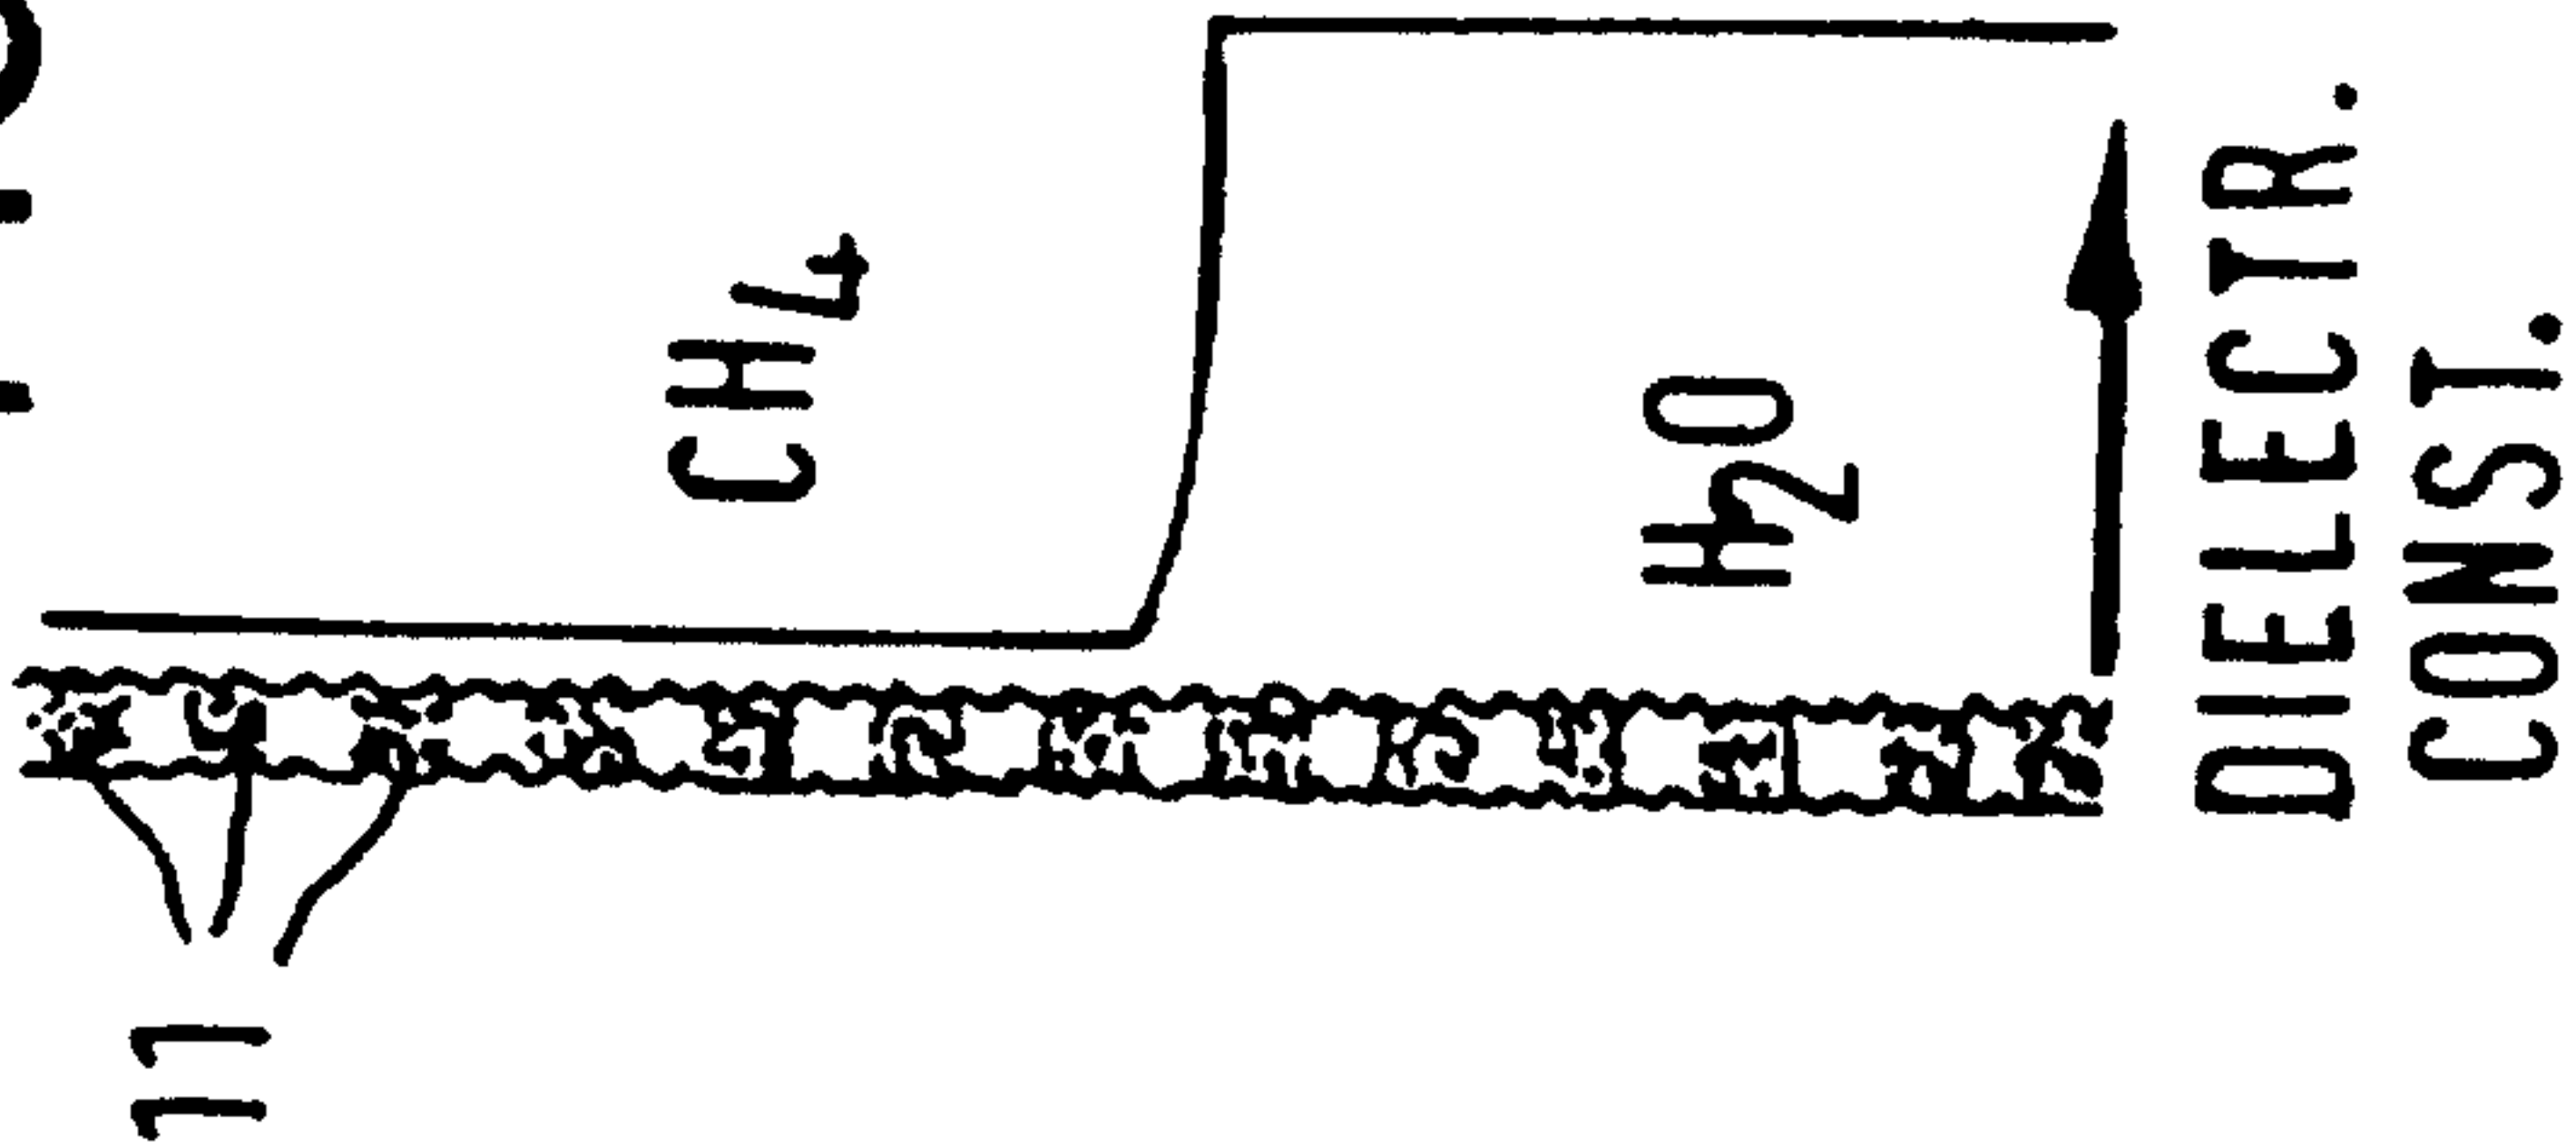


FIG. 3



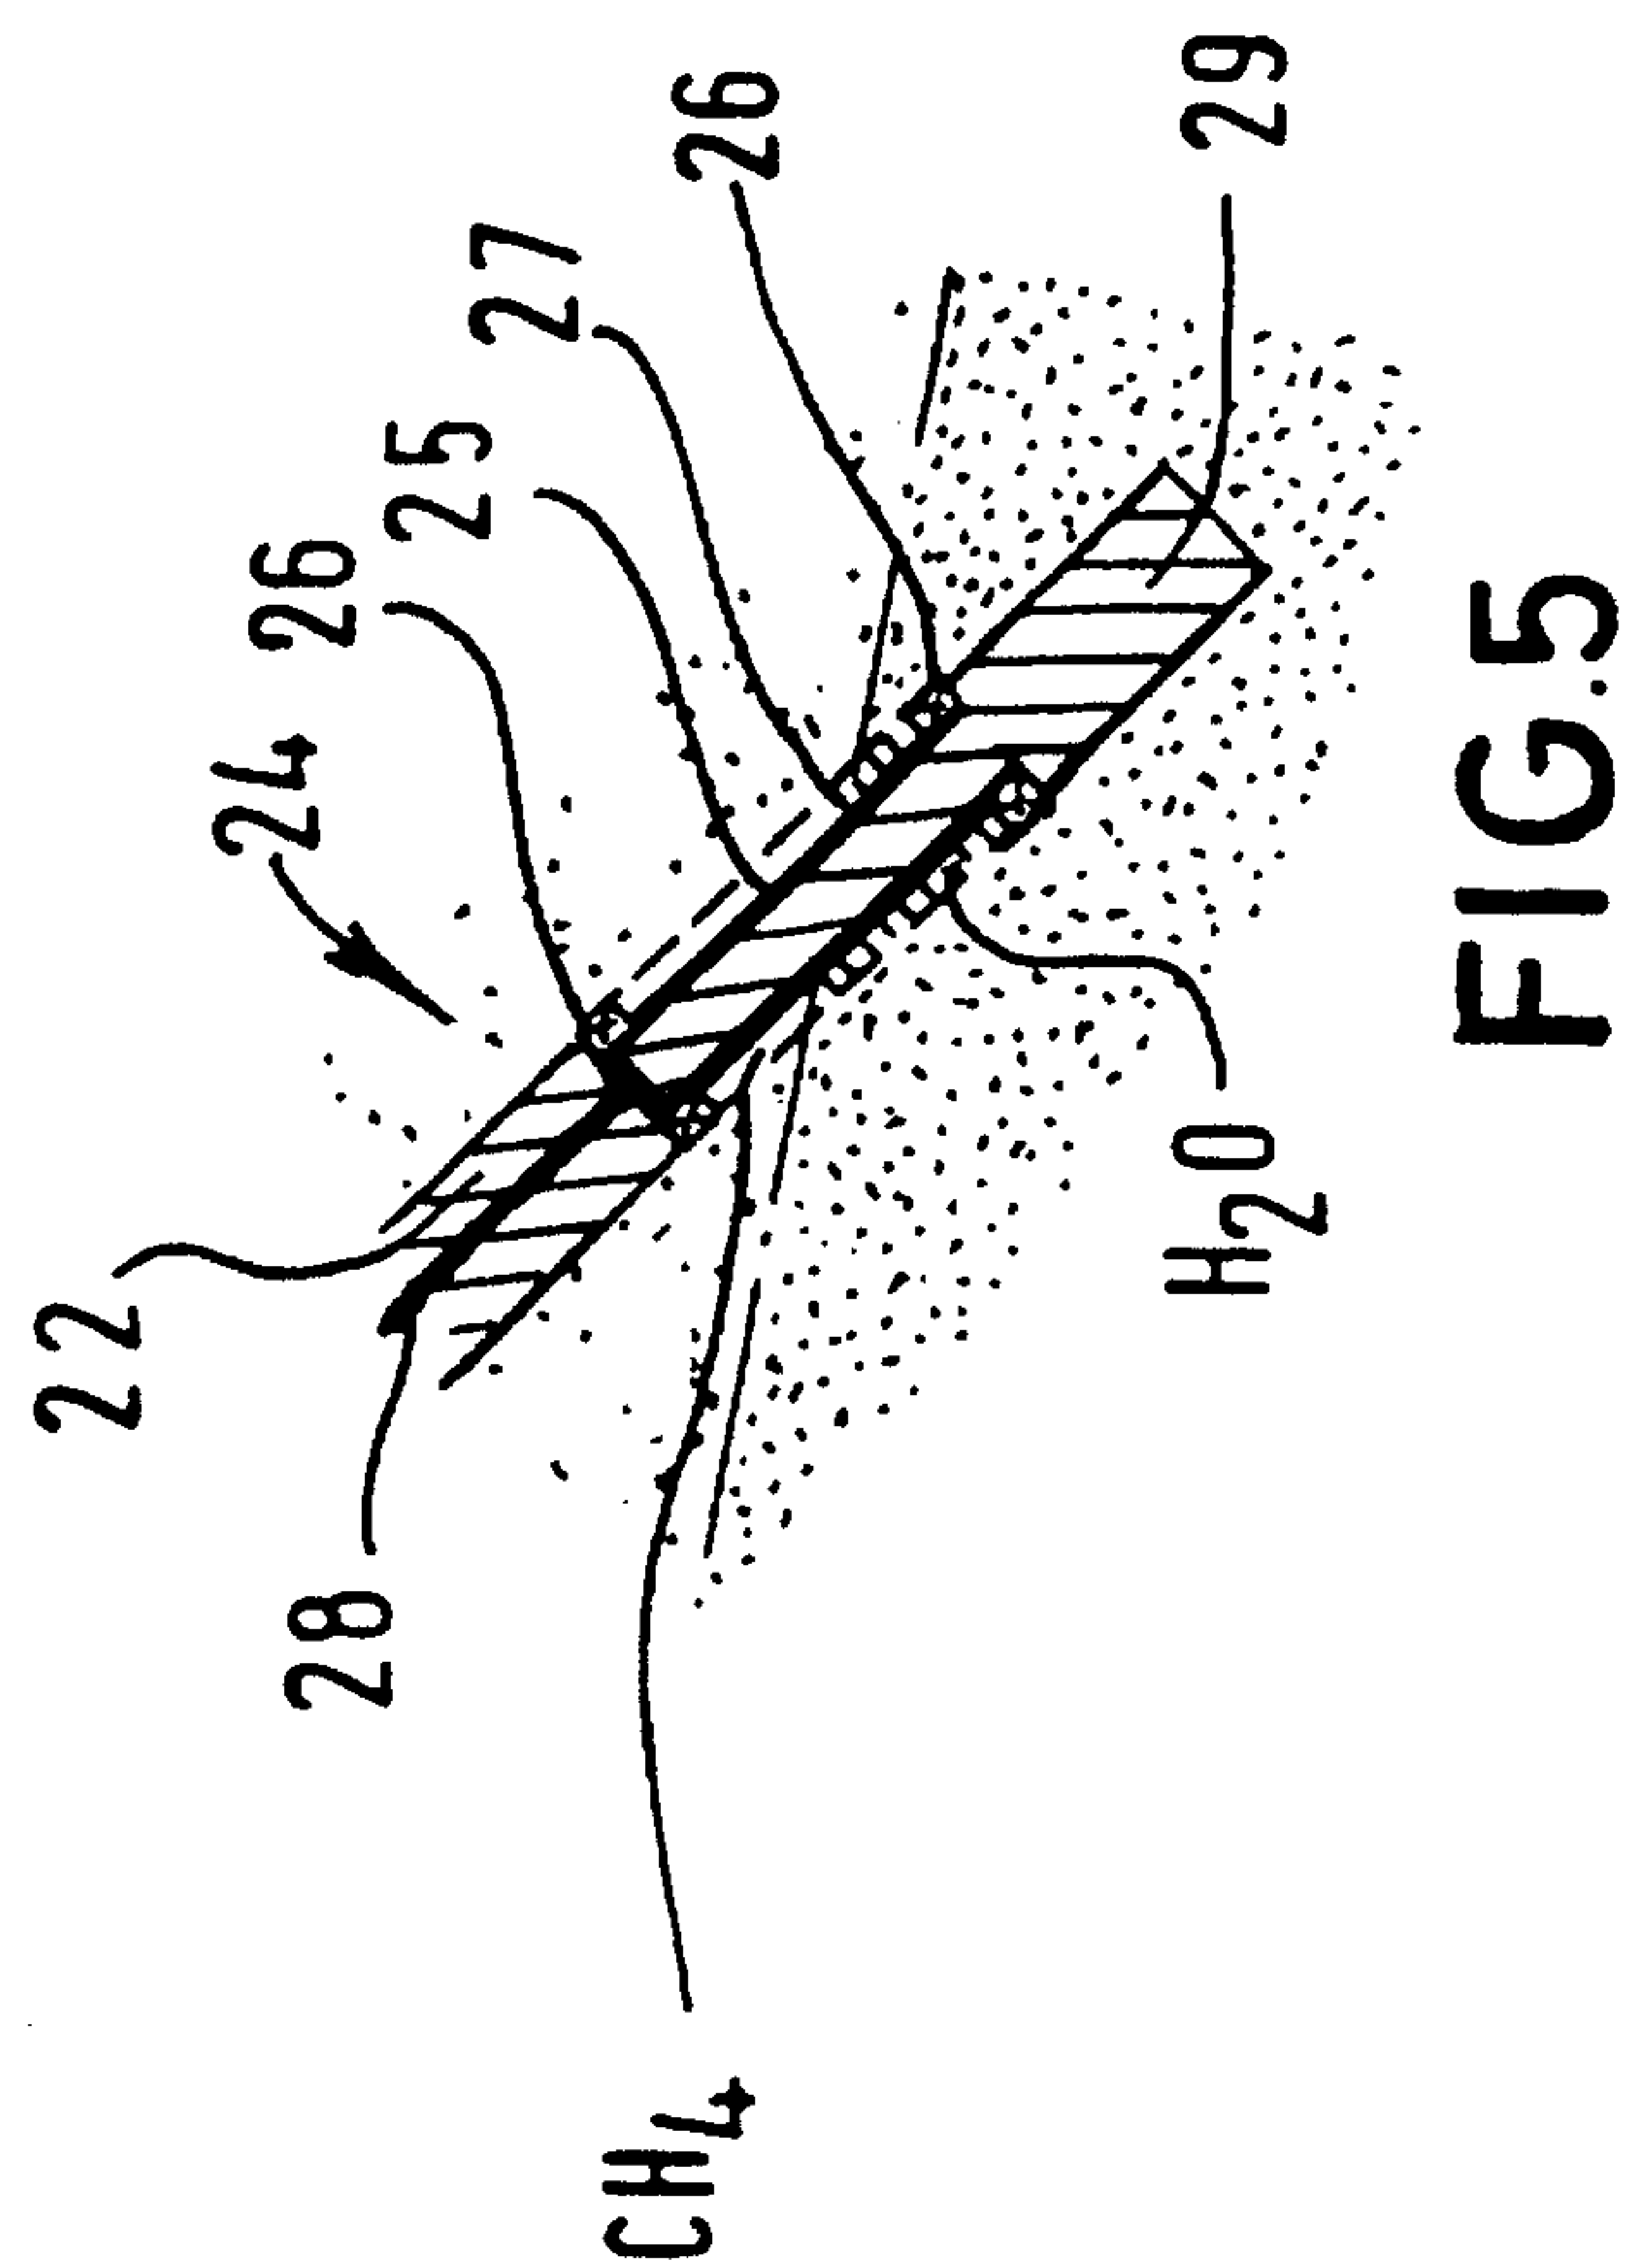
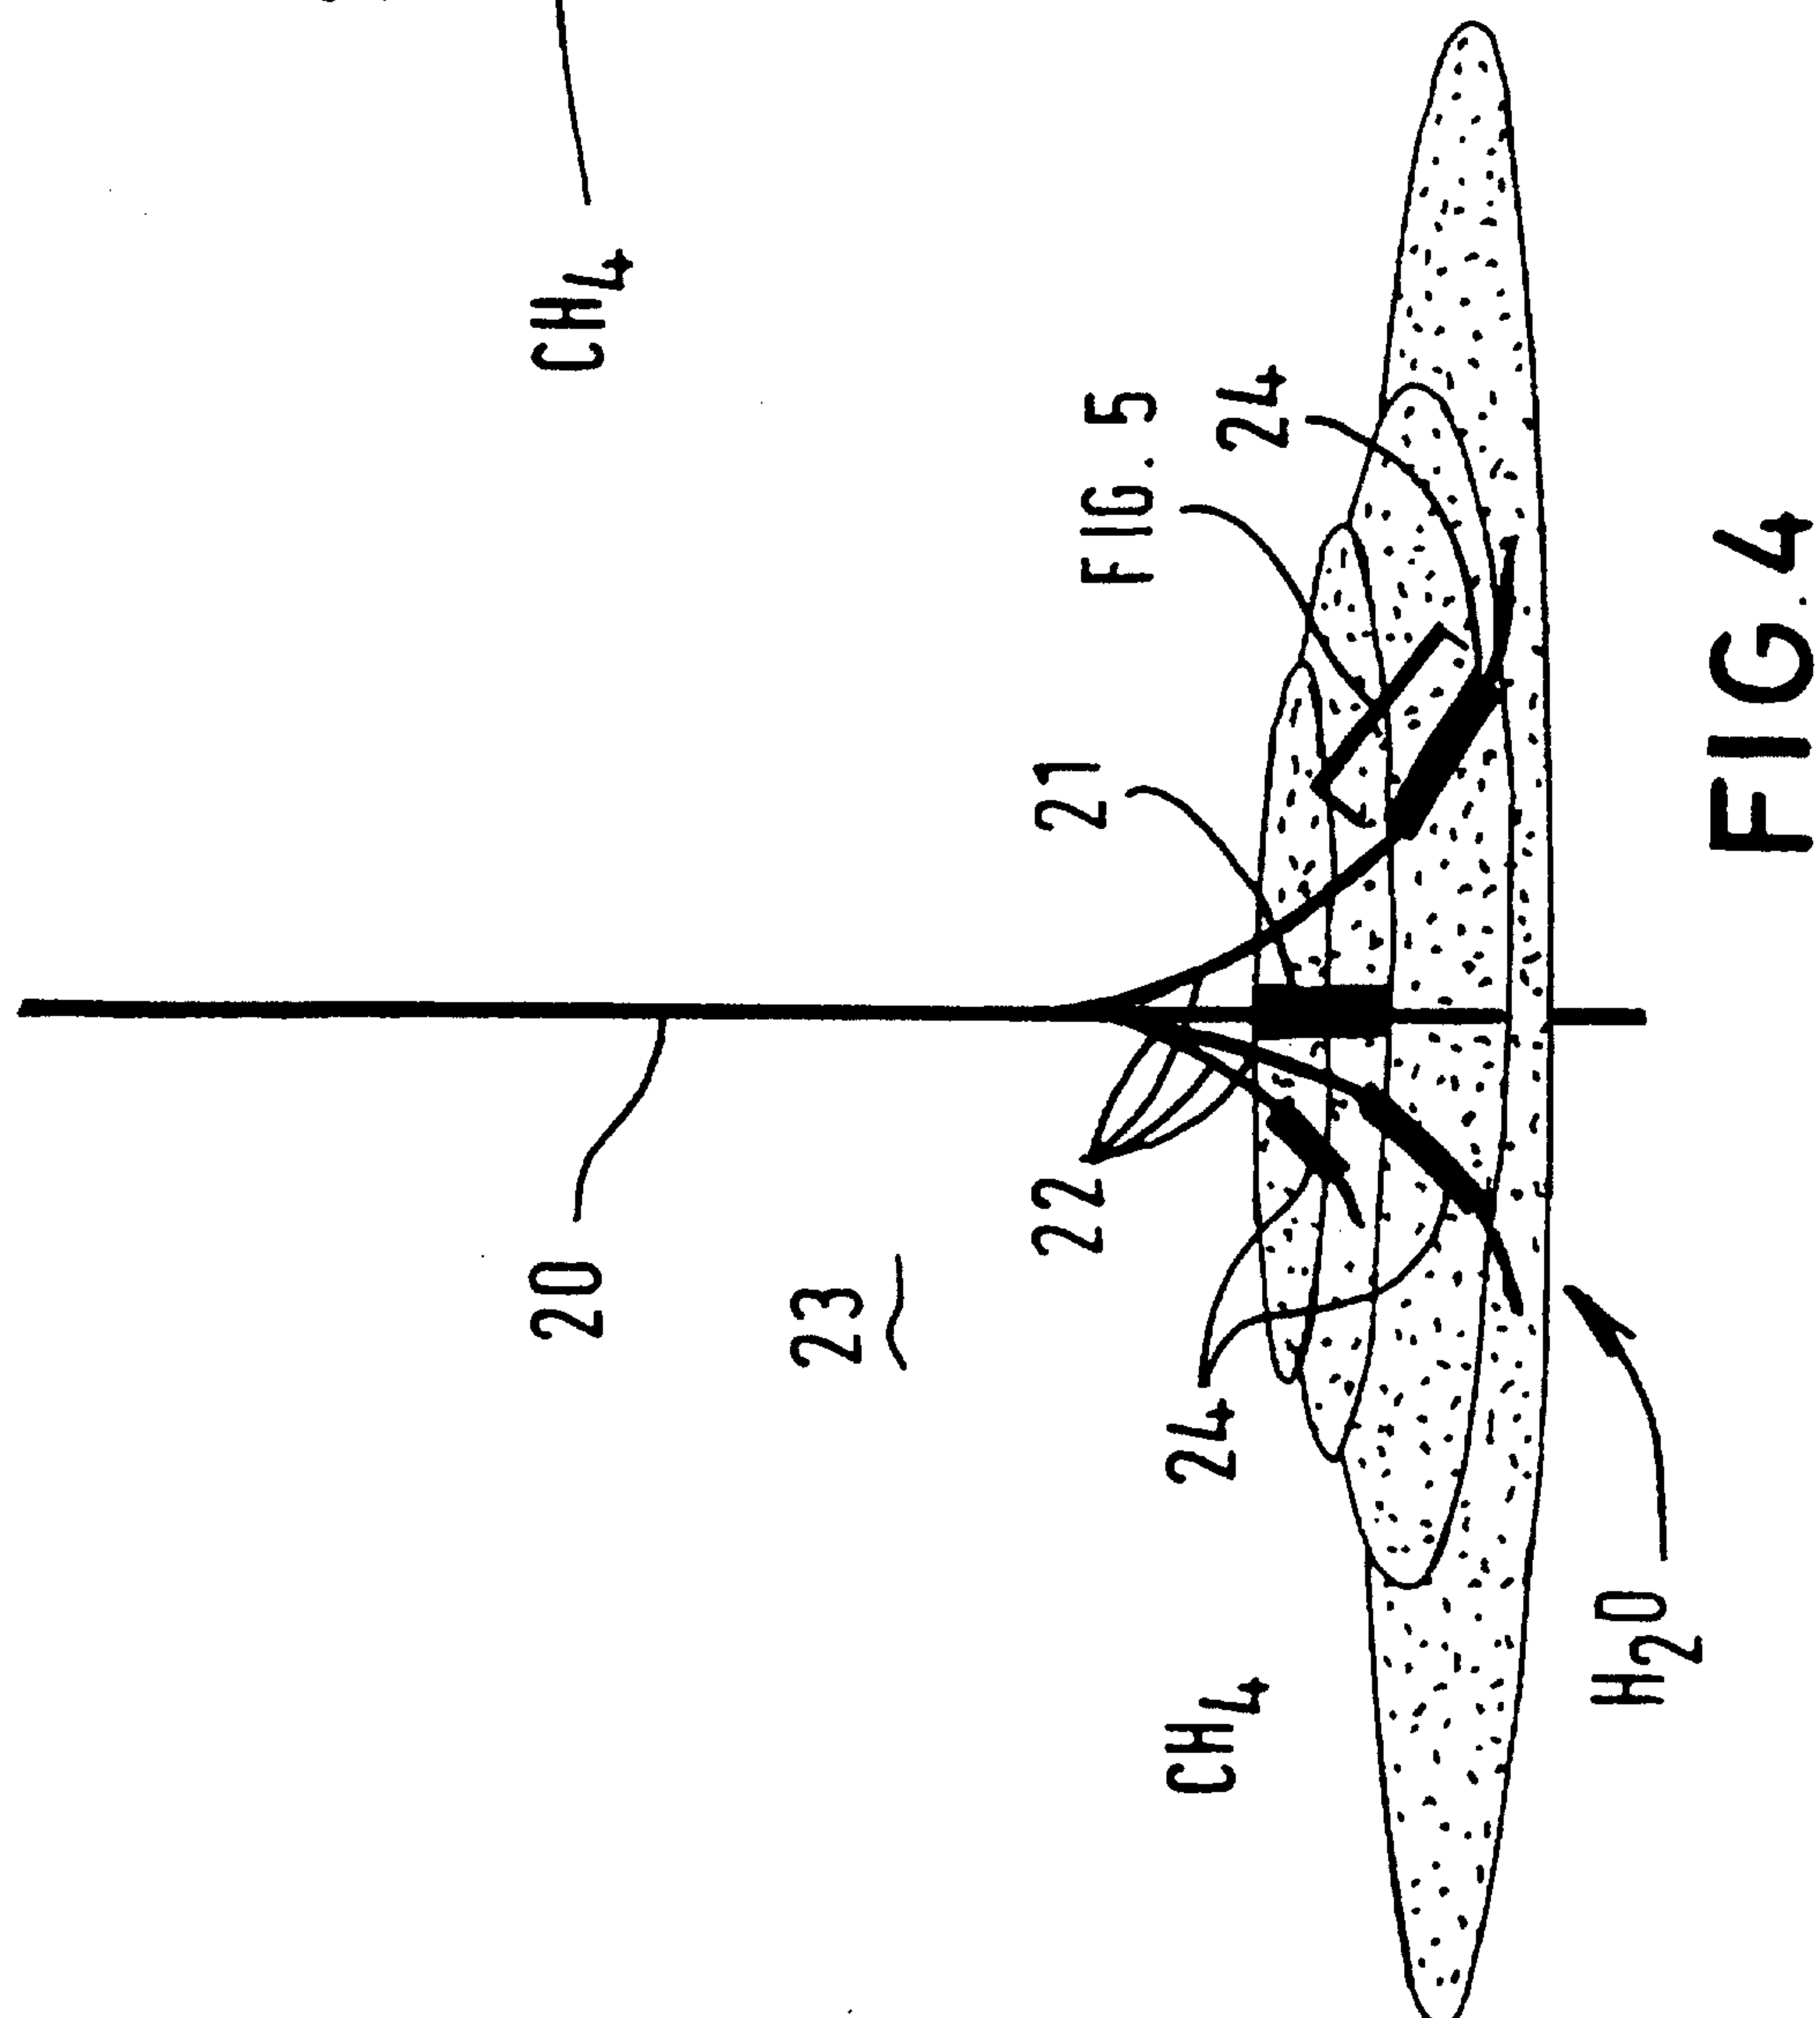
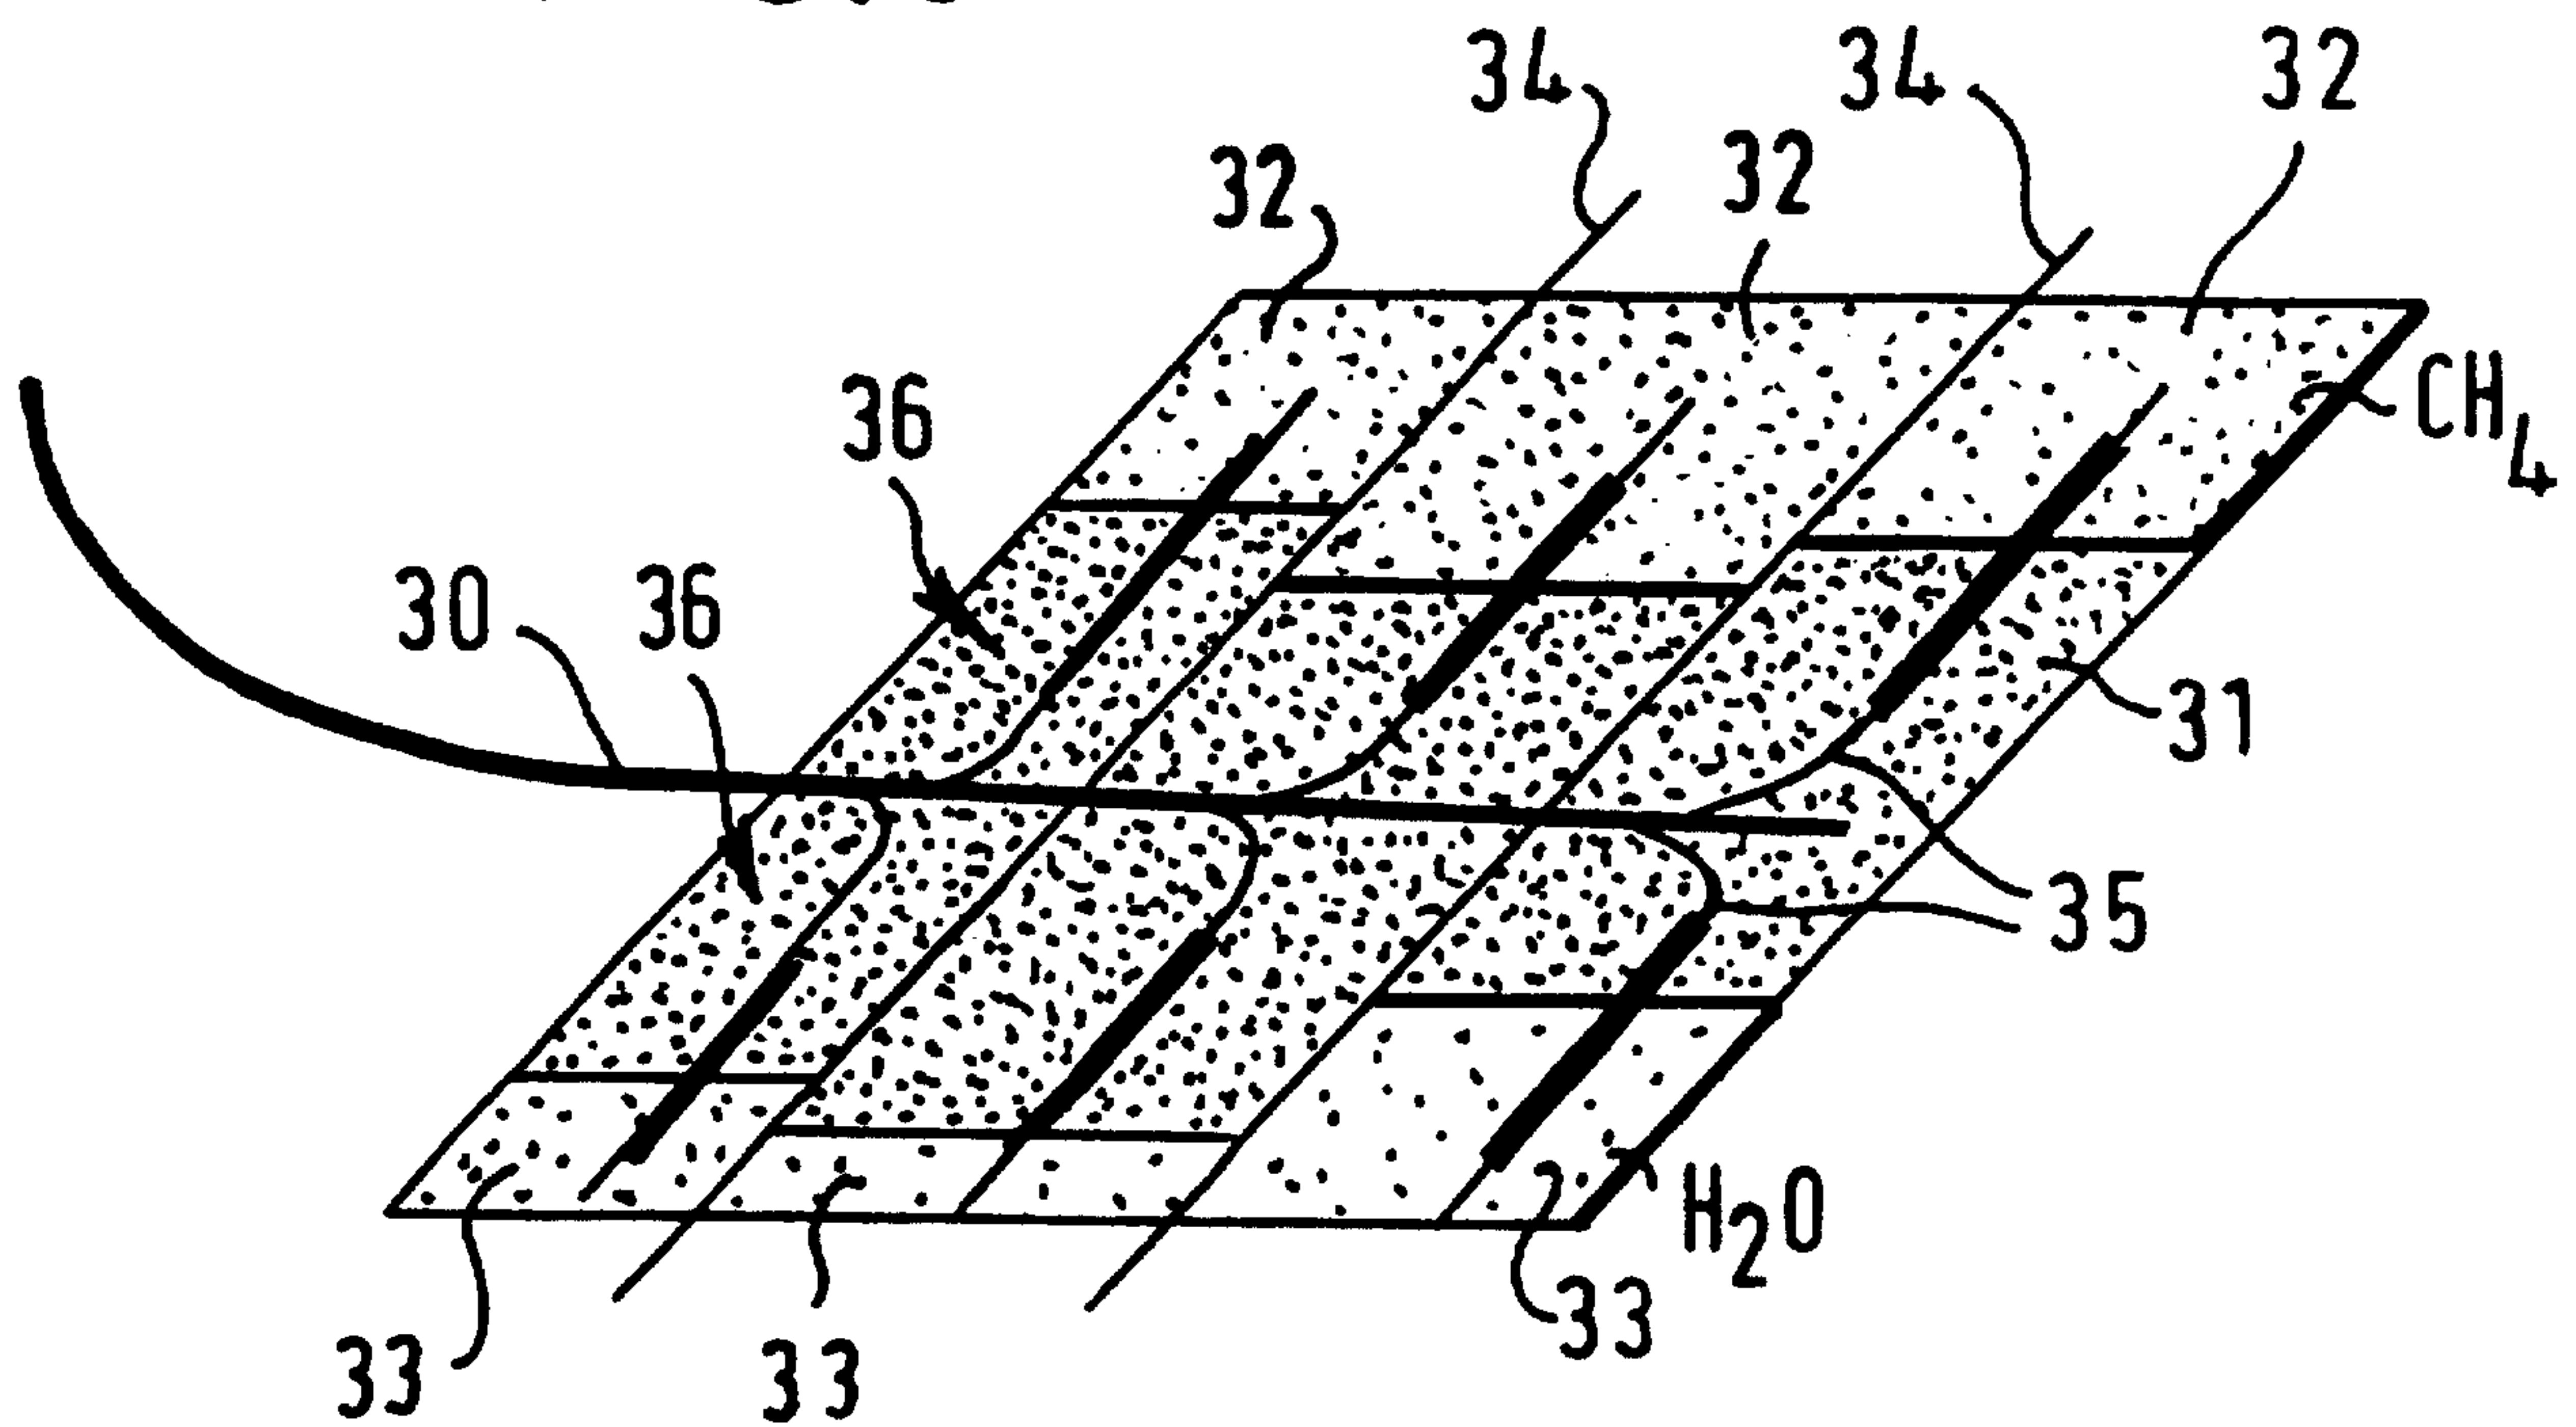


FIG. 6**FIG. 7**