



- (51) **International Patent Classification:**
H02B 13/035 (2006.01) *H02B 1/52* (2006.01)
- (21) **International Application Number:**
PCT/EP2013/071621
- (22) **International Filing Date:**
16 October 2013 (16.10.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12192637.2 14 November 2012 (14.11.2012) EP
- (71) **Applicant:** ABB TECHNOLOGY AG [CH/CH]; Affolternstrasse, 44, CH-8050 Zurich (CH).
- (72) **Inventors:** ERRICO, Ennio; Via Vittorio Emanuele II, 1, I-24040 Fornovo San Giovanni (BG) (IT). PAPETTI, Matteo; Via Alfieri, 12, I-20070 Cerro al Lambro (MI) (IT).
- (74) **Agent:** DE SANTIS, Giovanni; ABB S.p.A., Via L. Lama, 33, I-20099 Sesto San Giovanni (MI) (IT).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

- (54) **Title:** ACTUATING DEVICE FOR AN ELECTRIC SWITCHGEAR

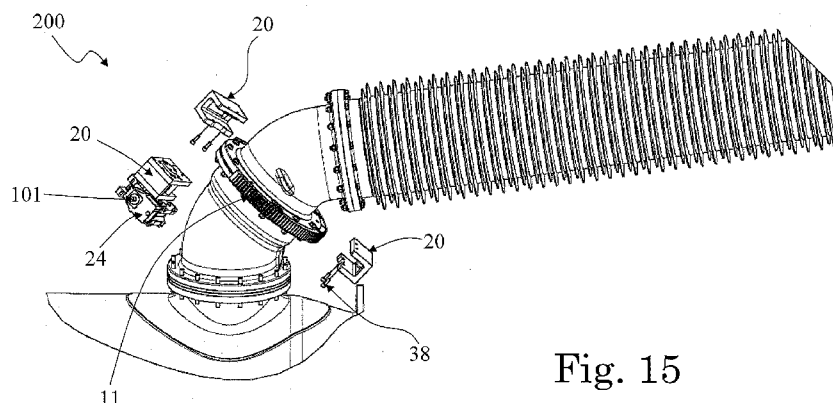


Fig. 15

- (57) **Abstract:** Actuating device for electric switchgear of the type comprising one or more bushings connected to a casing. The actuating device comprises: - a gear mechanism which is suitable to be mounted at and outside the zone where a bushing is connected to the casing, and which comprises a plurality of gear means operatively interconnected to each other and arranged to move a bushing between a first service position and a second transport position wherein it is lowered towards the casing from the first service position; and - connection means which are arranged to keep the bushing operatively coupled to the casing while moving it between the first and second positions.



ACTUATING DEVICE FOR AN ELECTRIC SWITCHGEAR

The present disclosure relates to an actuating device suitable to be connected to an electric switchgear for high voltage applications, i.e. for applications with nominal voltages above 1kV; more in particular, the present disclosure relates to an actuating device suitable to move, e.g. to rotate, a bushing of the associated switchgear relative to the casing to which it is connected to.

It is well known in the art that along the path of power grids there are provided various electrical devices, such as fault-protecting devices, monitoring devices et cetera; as a whole, such electrical devices, which are usually grouped into substations, are devoted to ensure that electric power is transmitted and distributed properly and correctly to loads and users, preventing the occurrence - or intervening in case - of electrical malfunctioning or faults.

To this end, in recent years some compact and multifunctional switchgear have been designed, which integrate in a unique apparatus and are able to perform several electrical functions; some examples of such kind of multifunctional switchgear are disclosed in patents US5,796,060, EP1121739.

Usually, such devices comprise a main casing which houses one or more electrical devices, e.g. a disconnecter, a circuit breaker, current and/or voltage transformers, et cetera.

On top of the casing there are mounted one or more bushings each containing a corresponding electric conductor so as to realize an input or output connection of the switchgear with the outside, e.g. with a power line and/or with other electrical components of the substation.

One issue of these devices resides in the fact that, once assembled in the manufacturing plant, their overall size, and in particular their height, may exceed the maximum standards for shipping, e.g. road shipping.

Indeed, it is often necessary to ship poles of the device separately, or to adopt shipping configurations rather complicated, or even to disassemble parts, e.g. the bushings from the

casing, and to reassemble them at the installation site. This latter solution clearly entails additional problems, for instance re-conditioning and/or re-testing the equipment, especially if the switchgear contains an insulating gas, or if air, dust, et cetera, penetrate inside it.

The present invention is aimed at facing such issue and provides an actuating device suitable
5 to be connected to an associated electric switchgear of the type comprising a casing housing one or more electrical devices and at least one bushing which is connected to said casing and houses a conductor suitable to allow the electrical connection in input to or output from the switchgear. The actuating device of the present disclosure is in particular characterized in that it comprises:

- 10 - a gear mechanism which is suitable to be mounted at and outside the zone where said at least one bushing is connected to said casing, wherein said gear mechanism comprises a plurality of gear means which are operatively interconnected to each other and are arranged to move said at least one bushing between a first service position and a second transport position wherein it is lowered towards said casing from said first service position; and
- 15 - connection means which are arranged to keep said at least one bushing operatively coupled to said casing while moving it between said first and second positions.

Further characteristics and advantages will become apparent from the description of some preferred but not exclusive exemplary embodiments of an actuating device according to the present disclosure, illustrated only by way of non-limitative examples with the accompanying
20 drawings, wherein:

figure 1 is a side view schematically illustrating an example of an electric switchgear;

figure 2 is a side view showing an example of an electric switchgear cut in order to show some exemplary internal electrical devices;

figures 3-5 are views showing exemplary three-pole electrical switchgear according to the
25 present disclosure with their bushings in a first service position;

figures 6-8 illustrate the electrical switchgear of figures 3, 4 and 5, respectively, with their bushings in a second transport or shipping position;

figures 9-10 show in more details some components of an electric switchgear;

figures 11-13 show in detail some exemplary components used in an actuating device

5 according to the present disclosure;

figures 14-16 illustrate some mounting phases of the actuating device according to the present disclosure with an electric switchgear for example of the type illustrated in any of figures 1-10.

It should be noted that in the detailed description that follows, identical or similar
10 components, either from a structural and/or functional point of view, have the same reference numerals, regardless of whether they are shown in different embodiments of the present disclosure; it should also be noted that in order to clearly and concisely describe the present disclosure, the drawings may not necessarily be to scale and certain features of the disclosure may be shown in somewhat schematic form.

15 Further, when the term “adapted” or “arranged” or “configured” or “shaped” is used herein while referring to any component as a whole, or to any part of a component, or to a whole combinations of components, or even to any part of a combination of components, it has to be understood that it means and encompasses the structure, and/or configuration and/or shape and/or positioning of the related component or part thereof, or combinations of components or
20 part thereof, such term refers to.

Finally, the actuating device of the present disclosure is particularly suitable to be used in a gas-insulated or hybrid switchgear, e.g. of the type marketed by the ABB® group under the commercial name of PASS, and it will be described by making reference to such a type of switchgear without intending in any way to limit its possible scope of applications also to
25 different types of electrical switchgear or devices.

An exemplary actuating device according to the present disclosure is globally indicated with the reference number 200 in the relevant attached figures; such actuating device 200 is suitable to be connected to an associated electric switchgear of the type comprising a casing housing one or more electrical devices and at least one bushing which is connected to the casing and houses a conductor suitable to allow the electrical connection in input to or output from the switchgear itself.

Figure 1 schematically represents an electric switchgear 100 of this type which comprises a casing 1 devised to house one or more electrical devices 2, e.g. current switching devices, such as circuit breakers or disconnectors, monitoring devices, for instance instruments transformers, et cetera.

The casing 1 can have whatever suitable shape other than that illustrated in figure 1; for instance, according to the example illustrated in figure 2, the casing 1 comprises a main portion 9 which can be partially or totally filled with an electric insulating gas and inside which there are positioned, a circuit breaker 130 and a disconnector/earthing unit 140.

Clearly, the casing 1 can be formed by just one single piece of whatever shape, e.g. the main portion 9 as in the example of figure 2, or it may comprise two or more pieces connected to each other; in addition, other components and electrical devices can be positioned inside the casing 1 according to various applications.

For instance, in the exemplary embodiments illustrated in figures 3-8, the casing 1 comprises the main portion 9 and some additional pieces 150 which are mechanically connected to the main portion 9 at different positions and are shaped to house corresponding electrical devices, e.g. instrument transformers, such as current or voltage transformers.

The shape, positioning, functioning, and mutual connection and/or inter-operation of the various electrical devices are not relevant for the understanding of the present disclosure and in any case are well known or readily available to those skilled in the art and therefore will

not be described herein in details.

A typical electric switchgear 100 usually comprises (for each pole) one or more bushings (also indicated for example as bushing insulators, or feedthrough, or the like) which are mechanically connected, to the casing 1, above it with respect to a placing surface, e.g. the ground; for instance, in the exemplary embodiment illustrated in figures 4 and 7, for each pole there are two bushings 3 and 4, while in the exemplary embodiments of figures 3 and 6, and 5 and 8, there are three bushing 3, 4, 5, connected to a casing 1.

For the sake of simplicity, in the following description reference will be made to just one of the bushings, e.g. the bushing 3 of one of the poles; it has to be understood that what described with reference to the bushing 3 can be applied likewise to any other bushing 4 and/or 5 of any pole.

Each bushing 3 (4, 5) usually houses a corresponding conductor 60, e.g. in the form of a rod, or a cable or a bar, which is suitable to allow an input/output electrical connection of the switchgear 100, and in particular of one or more of the electrical devices positioned inside the casing 1, with an external electrical circuit or device, e.g. a power line and/or other components, such as power transformers, loads, et cetera.

According to well-known solutions, each bushing 3 comprises a body usually covered by external fins, which extends along a longitudinal axis 10 with a first lower end portion 6, provided with a connection flange or flange portion 61 which is meant to be operatively connected to the casing 1, e.g. to a flange or flange portion 8 of the casing itself, by means of fixing means, such as bolts 70. The bushing 3 has a second tip portion 7 which is spaced apart from the first lower end portion 6, and from which a terminal for allowing input/output electrical connection protrudes out.

At the base of each bushing there could be one or more additional pieces connected to the base portion of a bushing and moving solidly with it; in these cases, this additional piece

constitutes the lower part of the bushing and its lower part encompasses the flange or flange portion 61 meant to be connected to the casing 1.

Likewise, the interface of the casing 1 forming the connection flange or flange portion 8 can be connected directly on the main body of the casing 1, e.g. there is not interposition of other connection pieces, as for example illustrated in figure 2, or there could be some additional connecting elements between the lower end portion 6 (or parts connected and solidly moving with it) and the main part of the casing 1. Such additional connecting elements can be considered as forming parts of the casing 1 as well.

For example, in some of the exemplary embodiments illustrated, two additional connecting elements 50, 51 are connected to each other and interposed between and operatively associated with the corresponding bushing 3 and the casing 1, respectively. In the embodiments illustrated such connection pieces 50, 51 are for example configured so as to form as a whole an elbow-shaped region between the bushing 3 and the casing 1. Clearly, these pieces may be differently shaped or connected, or there might be one piece only or more than two pieces.

For instance, any piece can be solidly connected with the casing 1 and therefore forms part of it, or it can be connected with the bushing thus forming part of and moving solidly with it; for example, the piece 50 can be connected solidly with a corresponding bushing and this piece 50 constitutes the lower part 6 of the bushing itself or in any case encompasses the flange or flange portion 61 meant to be mechanically coupled with the casing 1; in turn the piece 51 is solidly connected to the other elements of the casing 1 and encompasses the flange or flange portion 8.

The actuating device 200 according to the present disclosure comprises a gear mechanism which is suitable to be mounted at and outside the interface zone (e.g. at the interconnected flanges 61-8) where the bushing to be rotated, e.g. the bushing 3, is connected to the casing 1;

in particular, the illustrated gear mechanism comprises a plurality of gear means 11, 12, 21, 24 which are operatively interconnected to each other and are arranged, once the gear mechanism is mounted on the associated switchgear 100, to rotate the corresponding bushing 3 (or 4, or 5) between a first service position wherein it is for example erected above the casing 1, as illustrated in figures 3-5, and a second transport or shipping position wherein the at least one bushing 3 (or 4, or 5) is lowered towards the casing 1 from the first service position, as for example illustrated in figures 6-8.

The actuating device 200 further comprises connection means 13, 20 which are arranged to keep the bushing 3 (or 4 or 5) operatively coupled to the casing 1 while the bushing 3 (or 4 or 5) is rotated between the first and second positions, in both directions.

Preferably, the gear means 11, 12, 21, 24 and the connections means 13, 20 of the actuating device 200 according to the present disclosure are arranged to be coupled in a releasable manner at an outer surface of the interface zone where the bushing 3 (or 4 or 5) is connected to the casing 1.

Preferably, the gear mechanism used in the actuating device 200 is a multi-stage reduction gear mechanism, more preferably a two-stage reduction gear mechanism as it will be described in more details hereinafter.

In particular, the exemplary gear mechanism hereby described comprises an endless-screw gear reducer 24 (or worm-gear reducer) illustrated in figure 11; such an endless-screw gear reducer 24 provides one stage of reduction, with a reduction rate which can range for example between 1:160 and 1:240. An example of a suitable endless-screw gear reducer 24 is the worm-gear type W R 75 marketed by company Bonfiglioli; however any type of gear reducer 24 available on the market can be used.

As illustrated in figure 12, the exemplary gear mechanism comprises at least one toothed ring-shaped sector 11 which is suitable to be positioned around the interface zone where the

bushing 3 to be rotated (or part solidly movable with it) is connected to the casing 1 (or part solidly connected therewith) and to be temporarily fixed to the base portion 6, e.g. to the connection flange 61 of the bushing 3 itself through the connection means; in particular, as illustrated in figure 14, the gear mechanism comprises a first toothed ring-shaped sector 11 and a second toothed ring-shaped sector 12, e.g. substantially identical to each other. The two sectors 11 and 12 are suitable to be positioned, adjacent to each other, around the outer circumference of the interface zone where the bushing 3 is connected to the casing 1, and to be temporarily fixed to the base portion 6, e.g. to the flange 61 of the bushing 3 itself through the connection means.

10 In figure 11, for the sake of illustration the various elements depicted are shown in an exploded view; clearly, their mutual assembly is readily available to the skilled in the art and therefore is not described herein in detail.

Further, as illustrated in figure 11, the gear mechanism comprises a gear wheel 21 which is mechanically connected to the endless-screw gear reducer 24, for example through the coupling shaft 18; the gear wheel 21 is arranged to engage with one of the first and second toothed ring-shaped sectors 11, 12, and this engagement provides another reduction stage. For example, the toothed ring-shaped sectors 11, 12 and the associated gear wheel 21 are adapted to provide a reduction rate which can range for example between 1:3 and 1:10.

As illustrated in figure 12, each of the first and second toothed ring-shaped sectors 11, 12 comprises one or more grooves or seats 14, which are open towards the side opposite to that of the toothed surface; in turn, the connection means comprise a plurality of mounting blocks 13.

Each mounting block 13 has: one portion 15 which is inserted into a corresponding groove 14 of one of the ring-shaped sectors 11, 12 and is connected thereto for example by means of

screws 26; and a second portion 16 which is suitable to be connected onto the base portion 6, namely onto the flange 61 of the bushing 3, through additional screws 26.

Further, as illustrated in figure 12, there is also provided at least one end-stroke block 17 which is connected, e.g. by means of a screw 28, at one end of one of the first or second ring-shaped sectors 11, 12. Such end-stroke block 17 represents a stopping element for the movement of a sector 11 or 12 relative to the gear wheel 21 when rotating a bushing 3. Clearly there could be provided one end-stroke block 17 for each toothed ring-shaped sector 11, 12.

The connection means further comprise a plurality of C- or U-shaped clamping elements 20, e.g. three as illustrated in figure 15.

One example of clamping element 20 is illustrated in figure 13; as illustrated, each clamping element 20 has one side 23 suitable to be temporarily fixed onto a portion of the casing 1, e.g. the flange 8 facing the flange 61 at the base portion 6 of the bushing 3, and a second side 22 which is parallel to the first side 23 and is connected therewith by means of a third side 25; in particular, when the clamping elements 20 are mounted, the second side 22 is suitable to face the base portion 6 of a bushing, and in particular the upper surface of the flange 61, while a portion of the first or second ring-shaped sectors 11 or 12 is inserted between and movable relative to the first and second sides 22, 23. In the exemplary embodiment illustrated, a layer of anti-friction material, e.g. a PTFE layer 27, can be placed, e.g. screwed, on the inner part of the side 22, so as to reduce friction with the flange 61.

Preferably, as illustrated in figures 15 and 11, one of the C- or U-shaped clamping elements 20 is mechanically connected to the endless-screw gear reducer 24 and accommodates inside its body, between the two parallel sides 22, 23, the gear wheel 21.

The exemplary actuating device 200 illustrated comprises one or more support blocks 40, e.g. L-shaped, which are connected each to the first or second ring-shaped sectors 11, 12, e.g. by

means of screws 41; each support block 40 has one surface 42 suitable to bear against a portion of the casing 1, e.g. the flange 8, at the interface zone where the bushing 3 to be rotated is connected to the casing 1.

In practice, when the switchgear 100 is assembled, for each pole, all bushings 3, 4, 5 are mechanically connected to the casing 1, and in particular the flange portions 61 at the base part 6 of each bushing 3, 4, 5 are connected, e.g. through the bolts 70, each to a corresponding flange 8 of the casing 1.

In such a condition, the bushings 3, 4, 5 are all in the working or service position i.e. they are erected above the casing 1, as illustrated for example in figures 3-5 (tip portion 7 is spaced apart above the main portion of casing 1).

If the switchgear has to be shipped, e.g. by means of a truck, and if its size, especially its height, exceeds the allowed size, at each needed bushing (depending on the specific needs), e.g. the bushing 3, an operator removes some of the bolts 70, e.g. a number equal to that of the clamping elements 20 to be used. Then, as illustrated in figure 14, the two toothed ring-shaped sectors 11, 12, with the end-stroke block 17, the mounting blocks 13 and the support blocks 40 connected therewith, can be connected to the upper surface of the flange 61; in practice, a screw 26 passes through a hole 29 provided on a mounting block 13 and engages with a corresponding hole provided on the flange 61 itself.

Then the clamping elements 20 are put in place. More in details, the C- or U-shaped clamping elements are temporarily connected to the lower surface of the flange 8 of the casing 1; in particular, according to the exemplary embodiment illustrated in figure 15, screws 38 pass through corresponding holes 39 provided on each clamping element 20 and engage each with a corresponding hole provided on the flange 8.

In this position, the side 22 of each clamping element 20 faces and is very close to or quasi- in surface contact with the corresponding upper surface of the flange 61; in this way each

clamping element 20 embraces, at the interface zone, a portion formed by the mutually connected flanges 8 and 61, while a part of each sector 11 or 12 passes within the body of each clamping element 20 and is spaced from the sides 22, 23, 25 and also from the outer surface of the interface zone formed by the two connected flanges 8-61. Clearly, thanks to the easy solution adopted and previously described, once one of the clamping elements 20 is positioned, also the gear reducer 24 connected therewith is put directly in place and the gear wheel 21 housed within the body of such clamping element 20 engages with the teeth of one of the toothed sector 11 or 12.

In this position, all the remaining bolts 70 can be removed since the clamping elements 20 allow to keep the bushing 3 safely coupled with the casing 1.

At this point, rotation of the bushing 3 can be carried out by coupling an actuator with the gear reducer 24 at the mechanical interface 101. For example, an automatic screwdriver or a commercial motor can be used; through the gear mechanism, the energy provided by the actuator allows to rotate the bushing 3 which is drawn by the ring sector 11 or 12 until it reaches the shipping or transport position as shown for example in figures 6-8. During the rotation, the surfaces 42 of the support blocks 40 bear against a surface of the flange 8 thus transferring to it the radial stresses exerted on the ring-shaped sectors 11, 12 and contrasting their possible deformation. In addition, the use of the multi-stage reduction mechanism allows reducing the force needed from the actuator, and in particular if a motor is used, it is possible to use a motor of size reduced.

In order to further ease the rotation of a bushing 3, 4, 5 with respect to the casing 1, a washer 45, e.g. a ring made of steel or aluminum and coated with PTFE, can be positioned between the connection flange 61 solidly rotating with the bushing 3 and the flange 8 solidly connected to the casing 1. Such washer 45 can be connected for instance to the flange 8 itself at the surface facing the flange 61. Further, inside the casing 1, e.g. on the inner surface of a

piece, for instance the piece 50 or 51, there could be provided O-rings gaskets 46, e.g. two, and low-friction back-up strips 47, e.g. two as for example illustrated in figure 10. Such strips 47 can be made for example of composite material and are capable of withstanding high radial loads, thus ensuring that the O-rings work in a proper way and prevent any leakage of insulating fluid, e.g. gas, which may be present inside the casing 1.

Once the rotation is concluded, all bolts 70 except those whose position is occupied by the clamping element 20 can be fixed again. Then the clamping elements 20 and the toothed ring-shaped sectors 11, 12 can be removed and the last bolts 70 can be fixed, thus completing the re-connection between the flanges 8 and 61.

Clearly, what above described for the bushing 3 can be applied in the same way for one or more of the other bushings of any pole.

In this position the switchgear is ready for shipping; as illustrated in figures 6-8, the tip portion 7 of the bushing 3 is lowered towards the main portion of the casing 1 thus resulting in an overall size, and in particular a total height (measured in a vertical plan parallel to that of the drawing sheets) which is substantially reduced with respect to the first service position.

Once the switchgear 100 is at the installation site, the operation can be substantially reversed with the same elements, bringing the bushing(s) 3 and/or 4 and/or 5 back to the first service position where they are erected above the casing 1 as for example illustrated in figures 3-5.

In practice, it has been found that the actuating device according to the present disclosure allows facing the issue of shipment previously mentioned, since it makes possible to at least temporarily reduce the size and in particular the height of the switchgear while keeping the parts still coupled to each other. This result is achieved according to a solution quite simple, flexible and easy to be implemented or modified to be tailored to different applications. In particular, the various components of the actuating device 200 are all positioned outside the switchgear and can be easily mounted/disassembled, and are directly accessible to operators.

Further, to the extent possible and/or desired, the actuating device 200 can be kept mounted with the associated switchgear 100 as a part of the switchgear itself.

Moreover, the bushings can be all rotated and lowered in the same direction (figure 6), or in directions opposite to each other (figure 7), or some bushings are moved in a direction and
5 some other bushings in the opposite direction (figure 8).

The actuating device thus conceived is susceptible of modifications and variations, all of which are within the scope of the inventive concept including any partial or full combination of the above described embodiments; all details may further be replaced with other technically equivalent elements. For example, it is possible to move a bushing together with the
10 respective piece 150 (and also with all intermediary pieces there might be present in between) as a unique body relative to the casing 1, in which case the piece 150 can be considered as a piece operatively associated to and solidly moving with the respective bushing; or it is even possible to move together with a bushing (and again also with all intermediary pieces there might be present between the bushing and the casing 1) even a part of the main portion 9 of
15 the casing 1 relative to the remaining portions of the casing 1 itself. There could be one single casing 1 housing all equipment of all poles, and on which all bushings of the various poles are mounted; the poles of the switchgear can be of any number.

The clamping elements 20 may be differently shaped and/or positioned, and/or any suitable number of them can be used.

20 The number, and/or shape, and/or mutual positioning of the elements constituting the casing 1, and/or of the interconnection elements 50, 51, may be suitably varied according to the specific application; for instance, one or more of the pieces 50, 51 can realized integrally with a bushing or the casing, namely the connection element 50 can be constituted for instance by the same lower end portion 6 of the bushing suitably shaped. Different movements of the
25 bushing(s) other than rotation(s) can be realized.

In practice, the materials, so long as they are compatible with the specific use, as well as the individual components, may be any according to the requirements and the state of the art. For example, a bushing can be realized with a tube of composite material, e.g. fiberglass with silicon sheds molded there on, or it may be realized by means of porcelain with fins made of glass, et cetera.

5

CLAIMS

1. An actuating device (200) suitable to be connected to an associated electric switchgear (100) of the type comprising a casing (1) housing one or more electrical devices (2) and at least one bushing (3, 4, 5) which is connected to said casing (1) and houses a conductor (60) suitable to allow the electrical connection in input to or output from the switchgear (100), said actuating device (200) being characterized in that it comprises a gear mechanism which is suitable to be mounted at and outside the zone where said at least one bushing (3, 4, 5) is connected to said casing (1), wherein said gear mechanism comprises a plurality of gear means (11, 12, 21, 24) which are operatively interconnected to each other and are arranged to move said at least one bushing (3, 4, 5) between a first service position and a second transport position wherein it is lowered towards said casing (1) from said first service position, and connection means (13, 20) which are arranged to keep said at least one bushing (3, 4, 5) operatively coupled to said casing (1) while moving it between said first and second positions.
2. An actuating device (200) according to claim 1, wherein said gear mechanism is a multi-stage reduction gear mechanism.
3. An actuating device (200) according to claim 1 or 2 wherein said gear means (11, 12, 21, 24) and said connections means are arranged to be coupled in a releasable manner at an outer surface of said zone where said at least one bushing (3, 4, 5) is connected to said casing (1).
4. An actuating device (200) according to one or more of the preceding claims, wherein said gear mechanism comprises an endless-screw gear reducer (24).
5. An actuating device (200) according to one or more of the preceding claims, wherein said gear mechanism comprises at least one toothed ring-shaped sector (11) which is suitable to be positioned around said zone where said at least one bushing (3, 4, 5) is

connected to said casing (1) and to be temporarily fixed to a base portion (6) of said at least one bushing through said connection means.

6. An actuating device (200) according to claim 5, wherein said gear mechanism comprises a first toothed ring-shaped sector (11) and a second toothed ring-shaped sector (12) which are suitable to be positioned around said zone where said at least one bushing (3, 4, 5) is connected to said casing (1), and to be temporarily fixed to a portion (6, 50) solidly moving with said at least one bushing through said connection means.

7. An actuating device (200) according to one or more of the preceding claims, wherein said gear mechanism comprises a gear wheel (21) which is mechanically connected to said endless-screw gear reducer (24) and is arranged to engage with one of said first and second toothed ring-shaped sectors (11, 12).

8. An actuating device (200) according to one or more of claims 5-6, wherein each of said first and second toothed ring-shaped sectors (11, 12) comprises one or more grooves (14), and wherein said connection means comprise a plurality of mounting blocks (13), each mounting block (13) having one portion (15) which is inserted into a corresponding groove (14) of one of the ring-shaped sectors (11, 12) and is connected thereto, and a second portion (16) which is suitable to be connected onto the base portion (6, 50) solidly moving with said at least one bushing (3, 4, 5).

9. An actuating device (200) according to one or more of claims 5-8, wherein it comprises at least one end-stroke block (17) which is connected at one end of one of the first or second ring-shaped sectors (11, 12).

10. An actuating device (200) according to one or more of the previous claims, wherein said connection means further comprise a plurality of C- or U-shaped clamping elements (20) each having one side (23) suitable to be temporarily fixed onto a portion of said casing (1) devised to be connected to a flange portion (61) solidly moving with said at

least one bushing (3, 4, 5), and a second side (22) which is parallel and connected to the first side (23) by means of a third side (25), said second side (22) being suitable to face said flange portion (61) solidly moving with said at least one bushing (3, 4, 5), and wherein a portion of a corresponding first or second ring-shaped sector (11, 12) is inserted between and movable relative to said first and second sides (23, 22).

11. An actuating device (200) according to claim 10, wherein one of said C- or U-shaped clamping elements (20) is mechanically connected to said endless-screw gear reducer (24) and accommodates inside it said gear wheel (21).

12. An actuating device (200) according to one or more of the previous claims, wherein it comprises one or more support blocks (40) which are connected each to the first or second ring-shaped sectors (11, 12) and have one surface suitable to bear against a portion of said casing (1) at said zone where said at least one bushing (3, 4, 5) is connected to said casing (1).

13. An electric switchgear (100) comprising:

- a casing (1) housing one or more electrical devices (2);
 - at least one bushing (3, 4, 5) which is operatively connected to said casing (1), said at least one bushing (3, 4, 5) housing a conductor (60) suitable to allow an electrical connection in input to or output from the switchgear (100) itself;
- characterized in that comprises an actuating device (200) according to one or more of the previous claims.

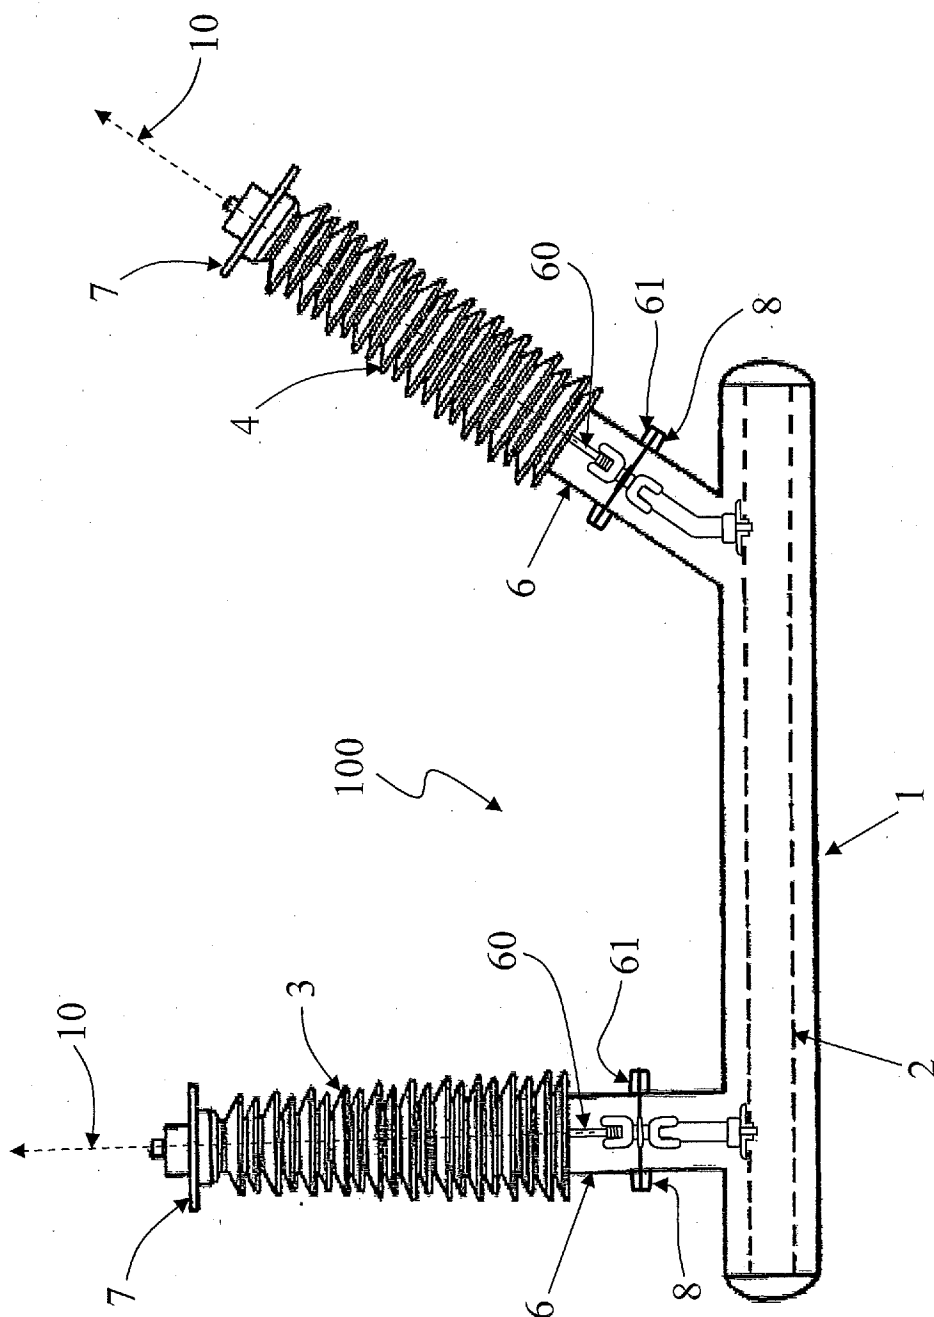


Fig. 1

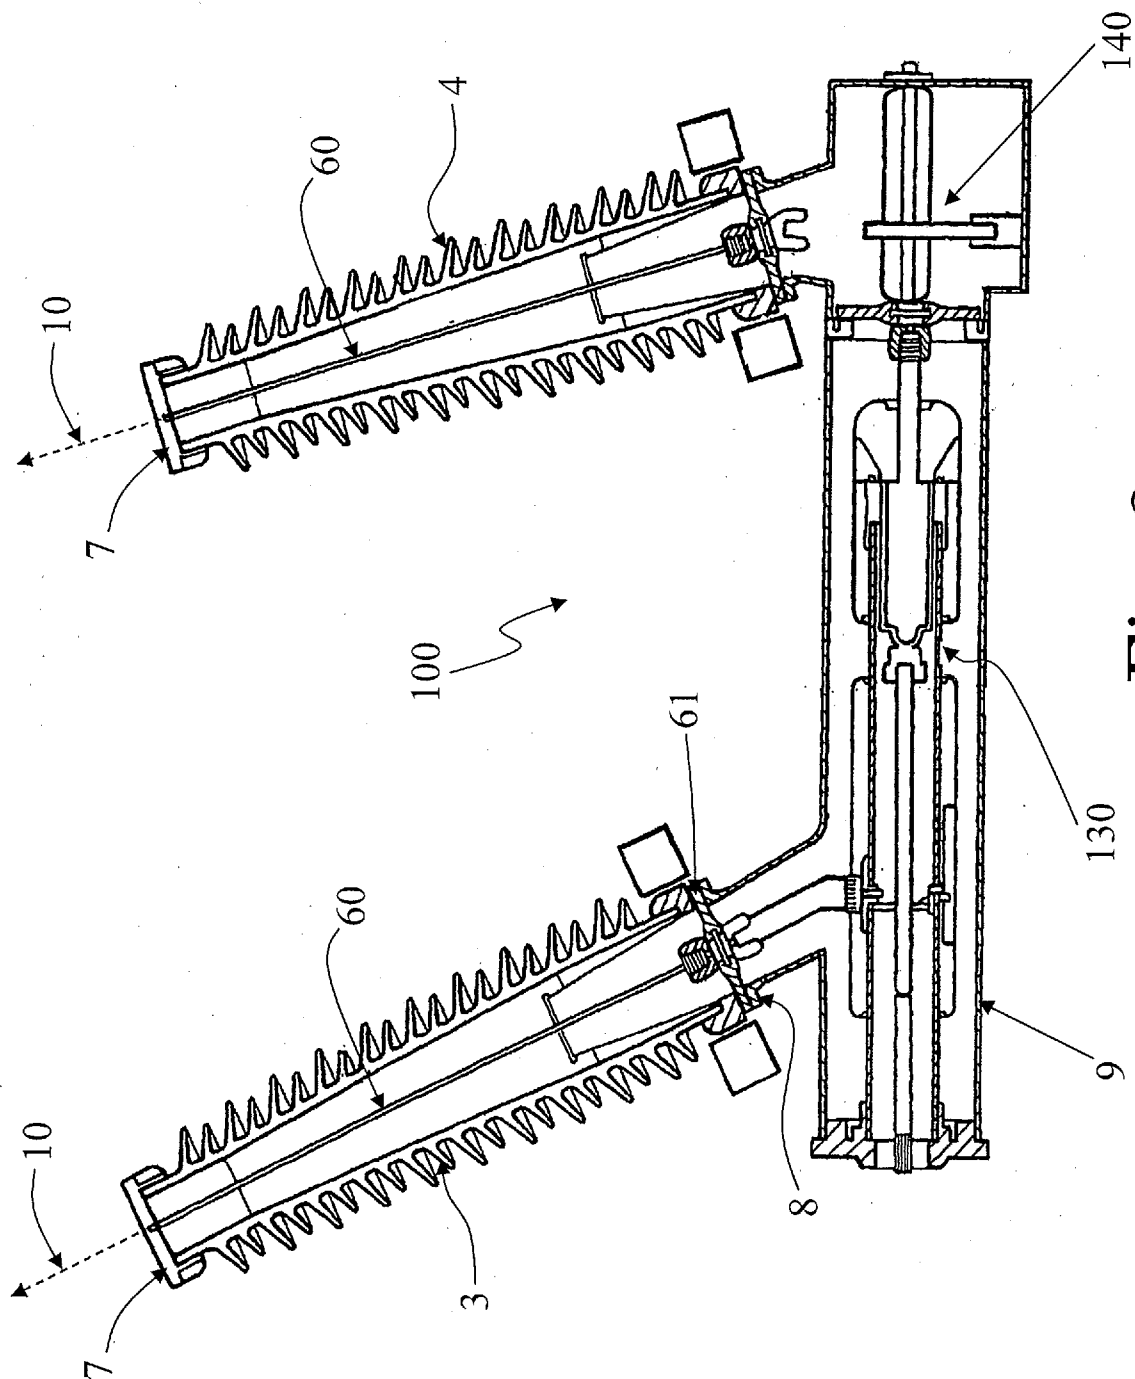


Fig. 2

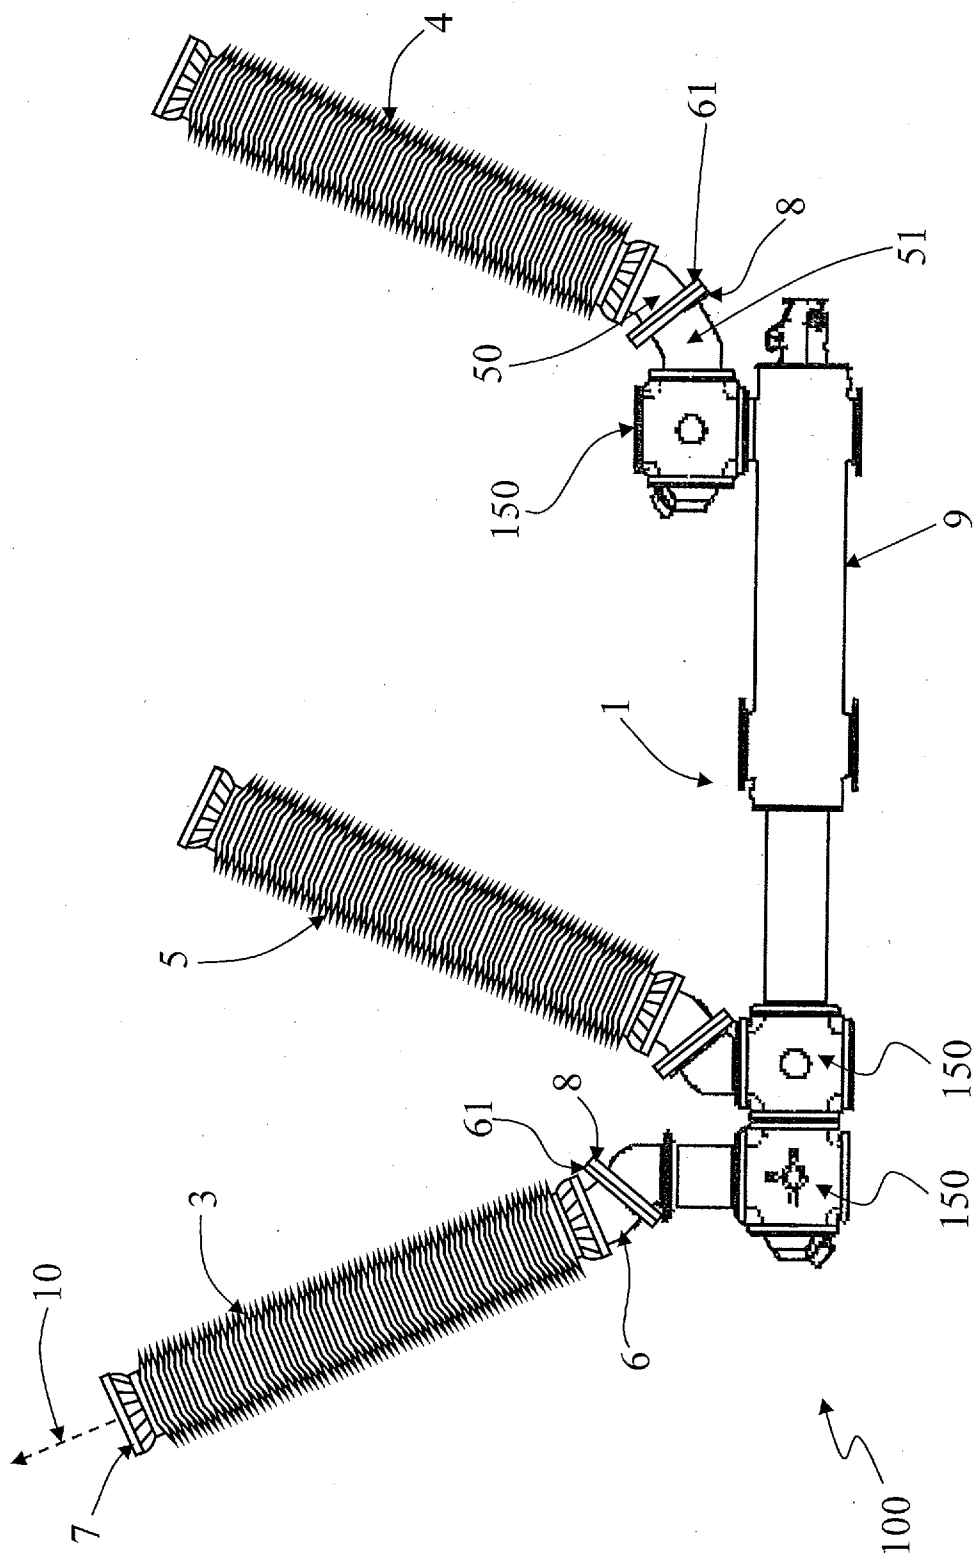
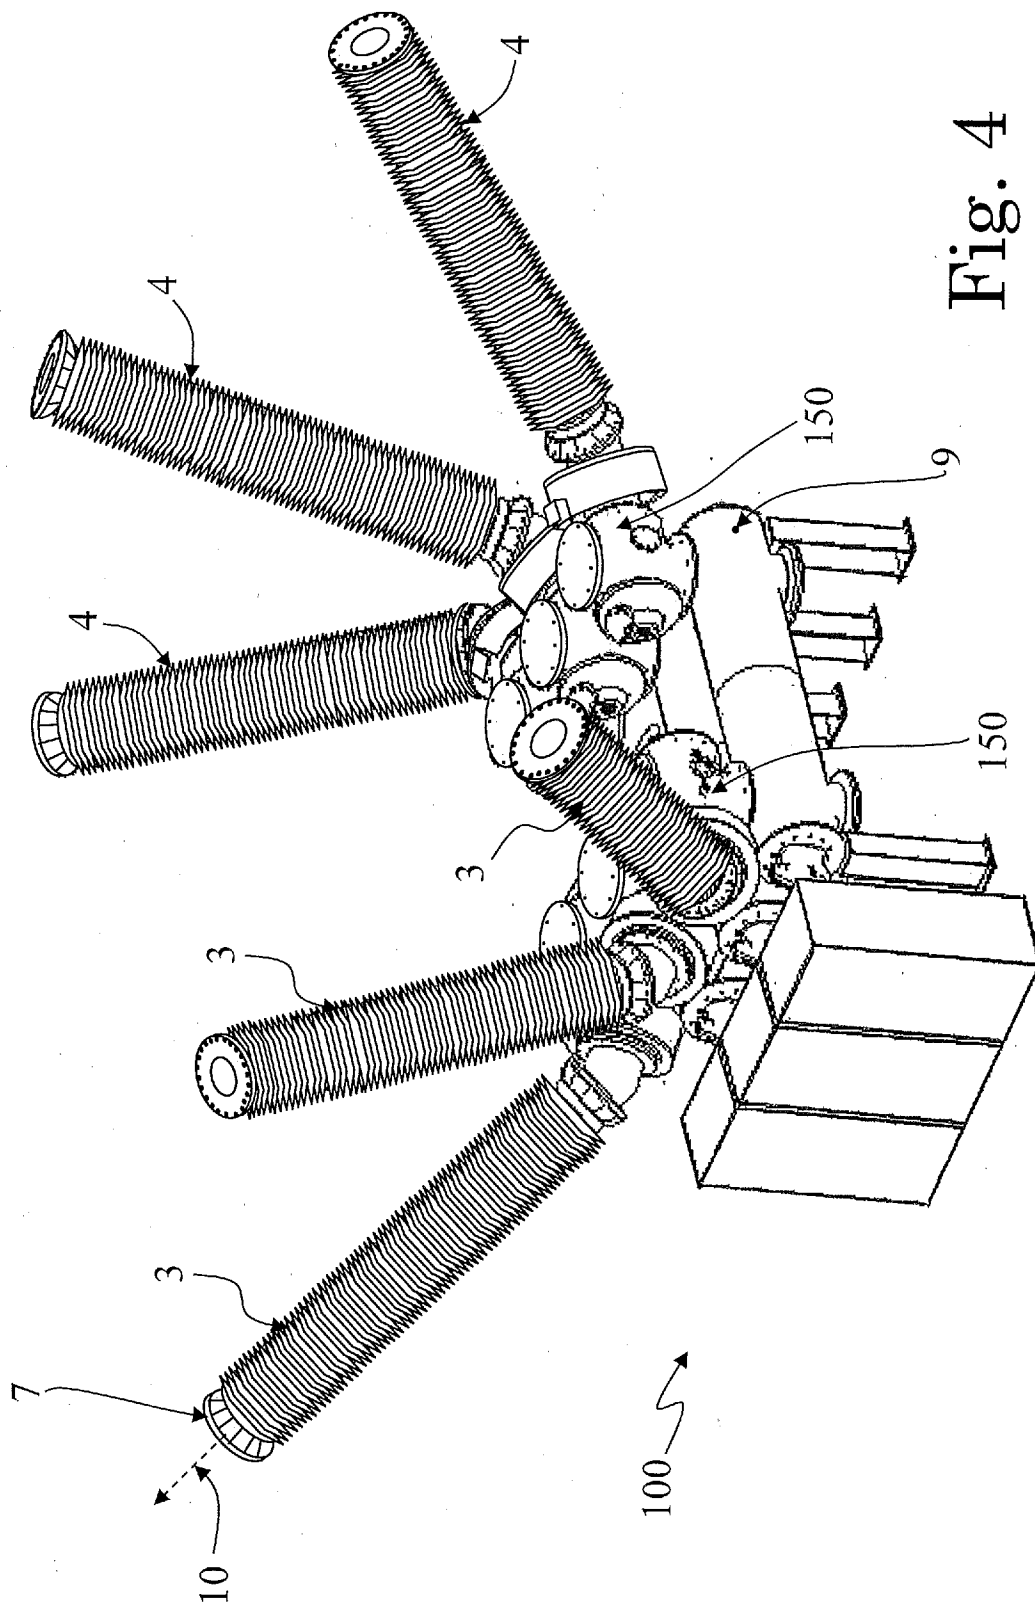


Fig. 3




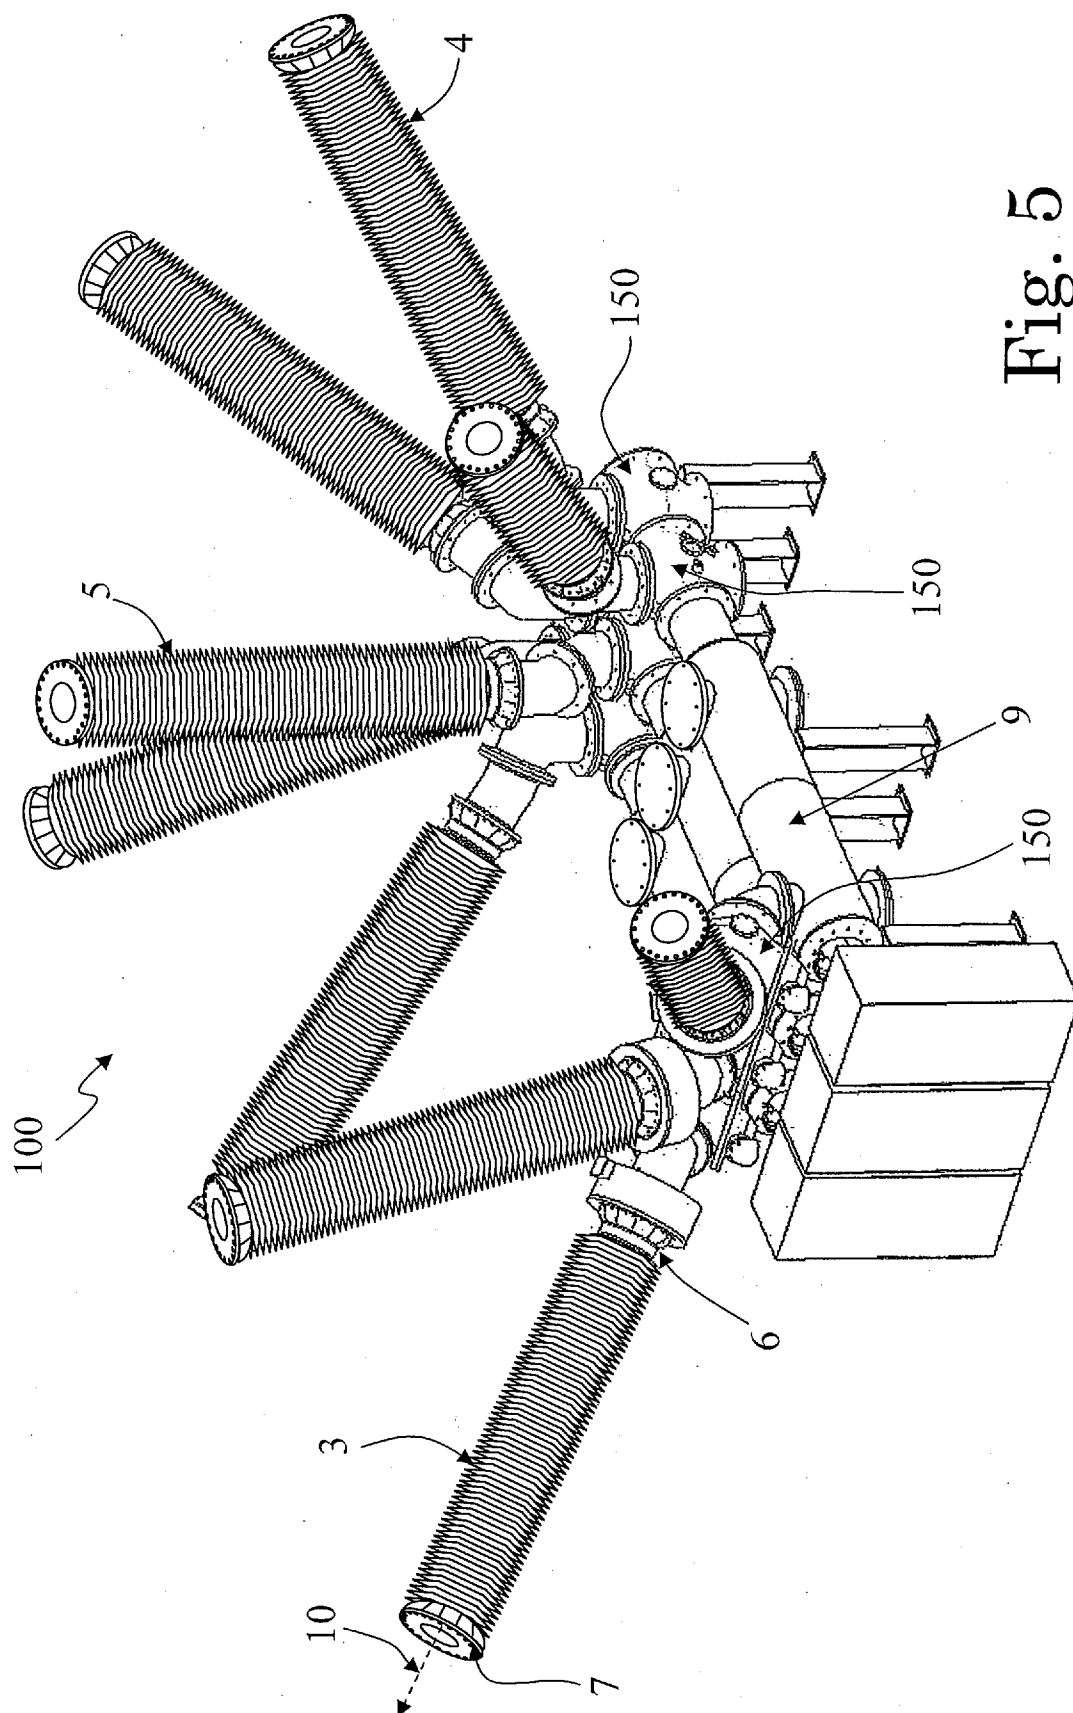


Fig. 5

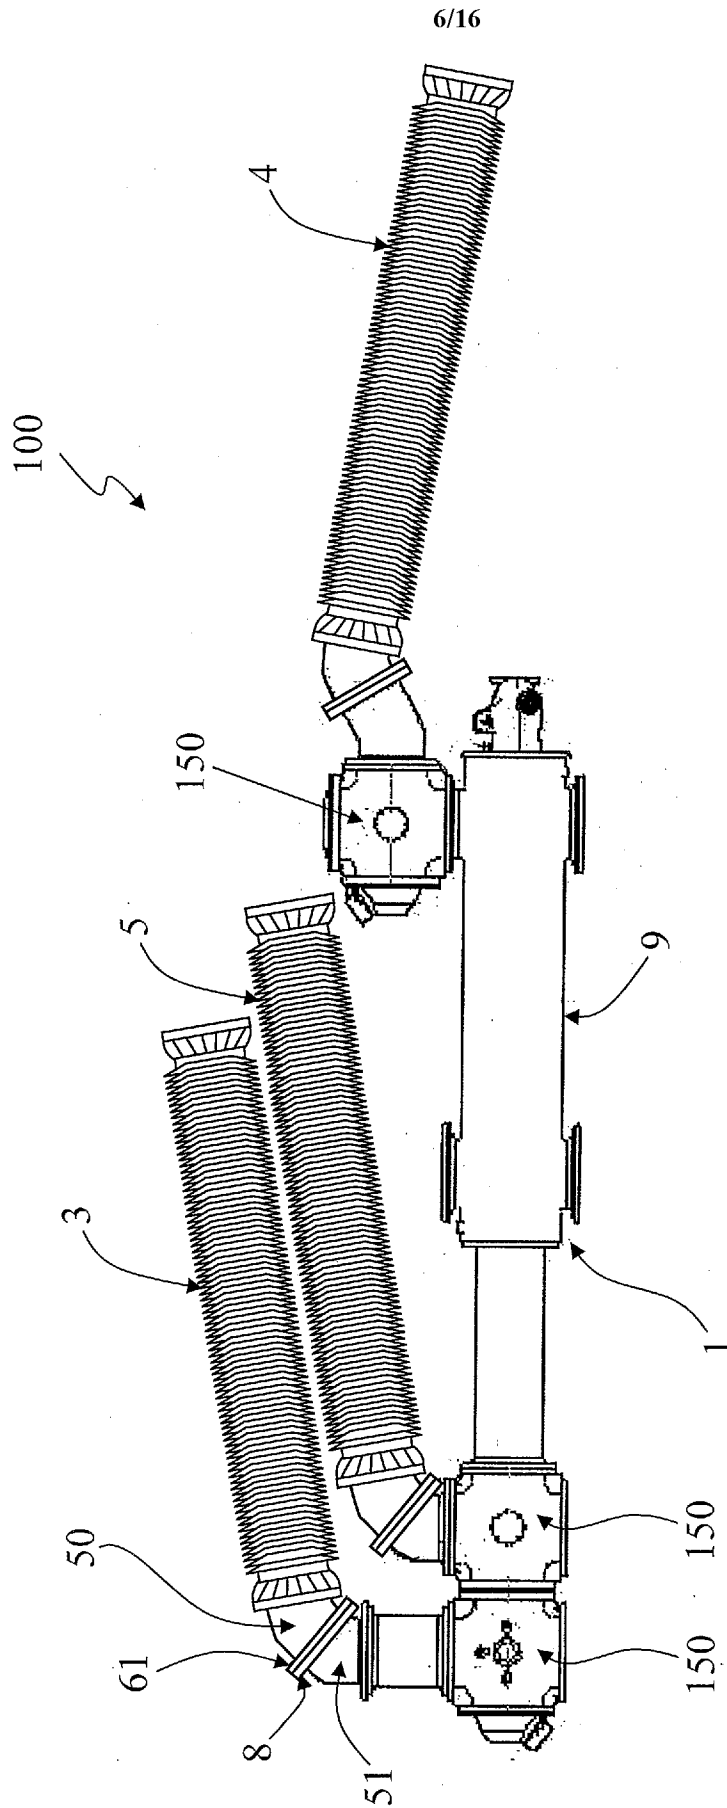

Fi. 6

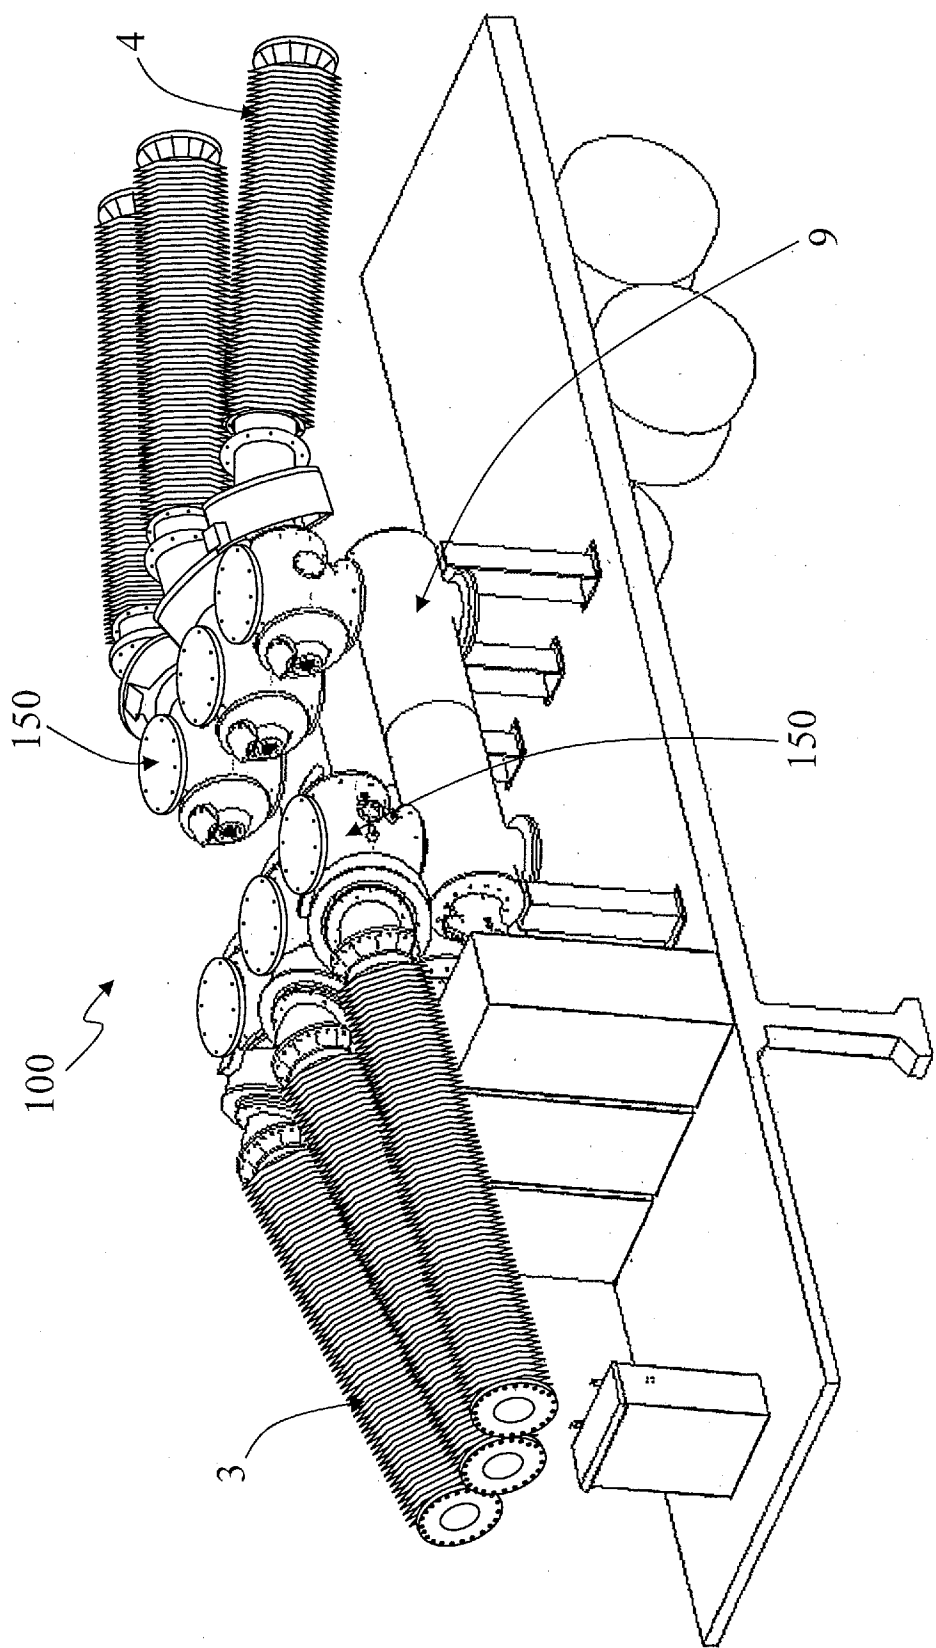


Fig. 7

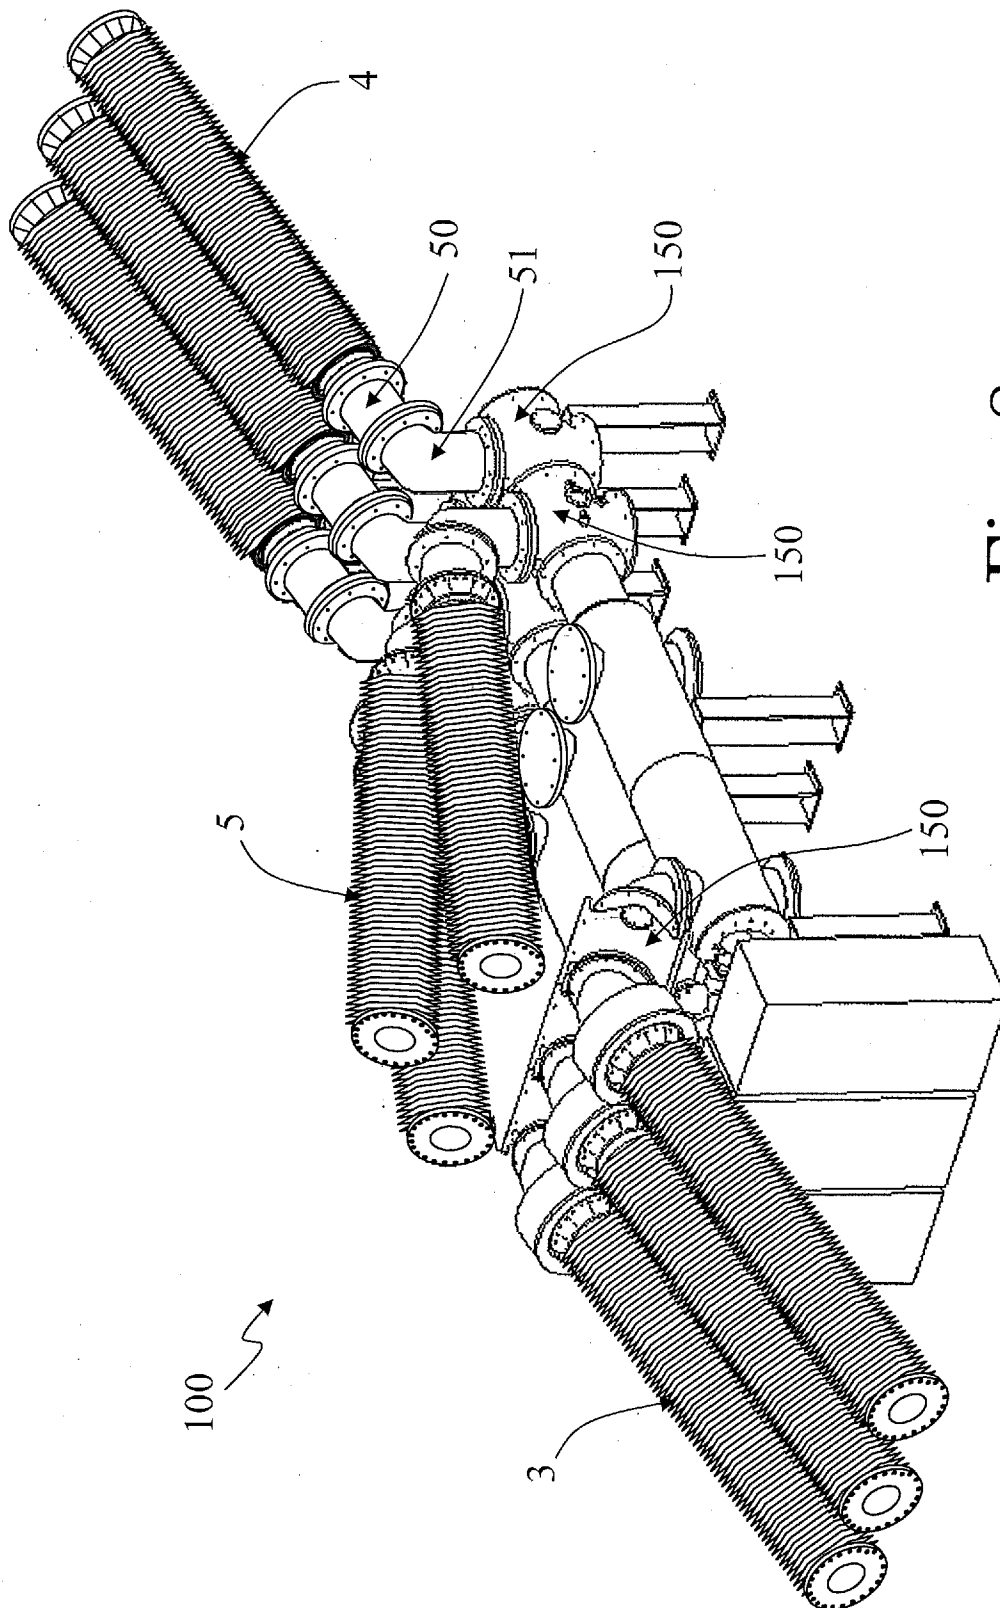


Fig. 8

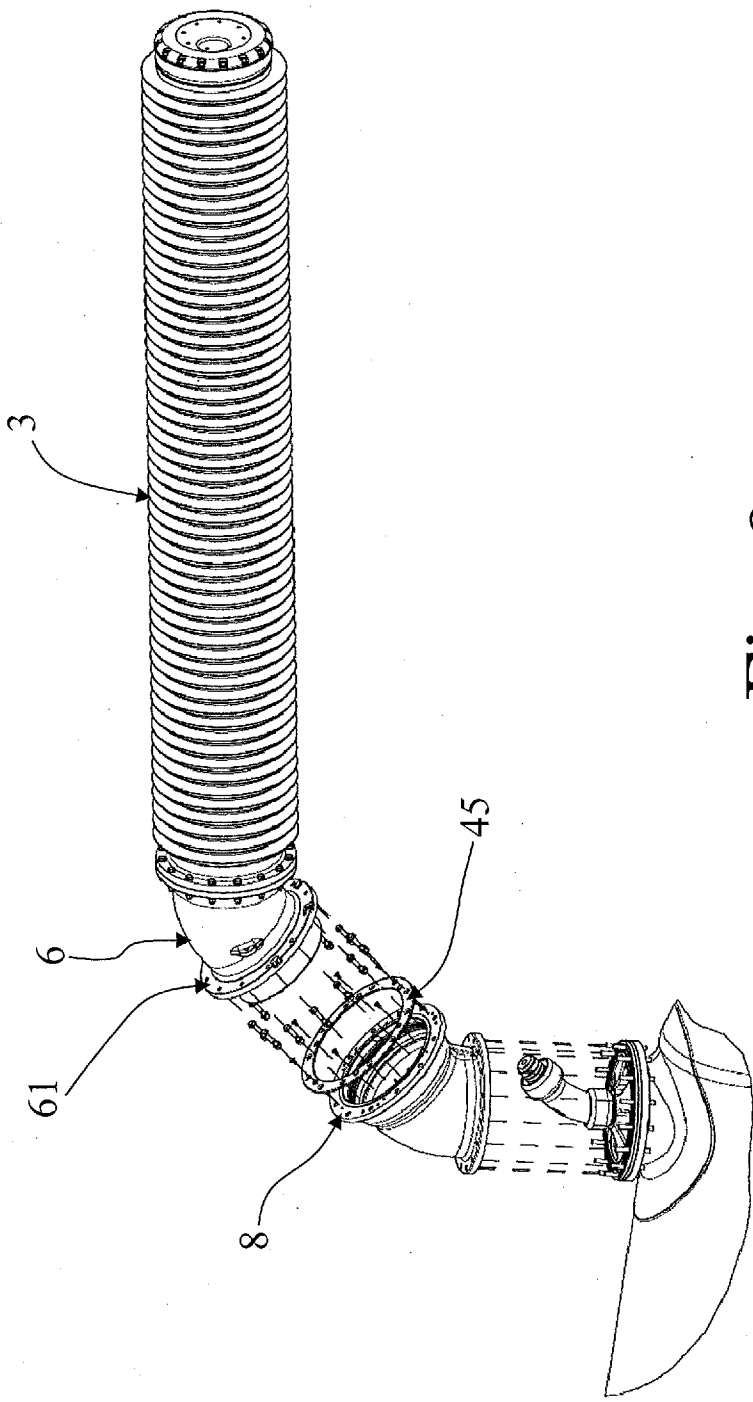


Fig. 9

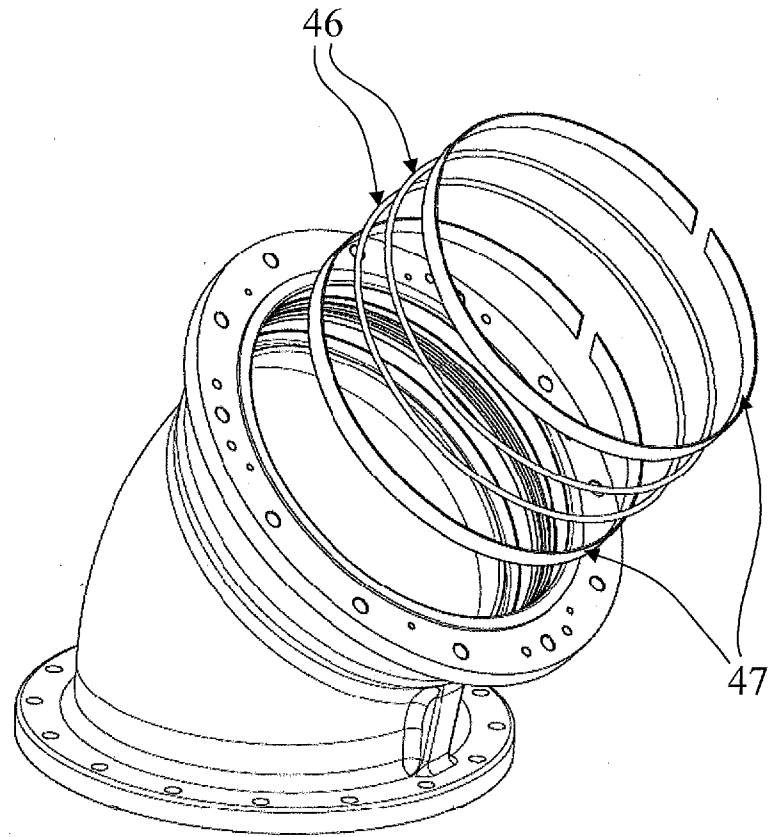


Fig. 10

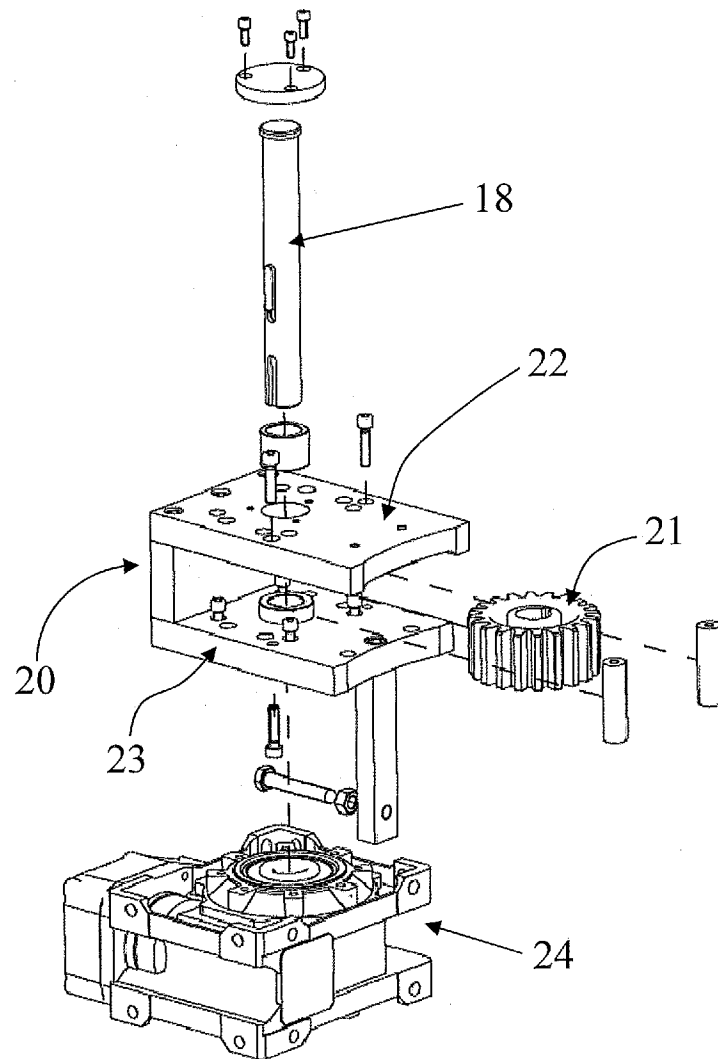


Fig. 11

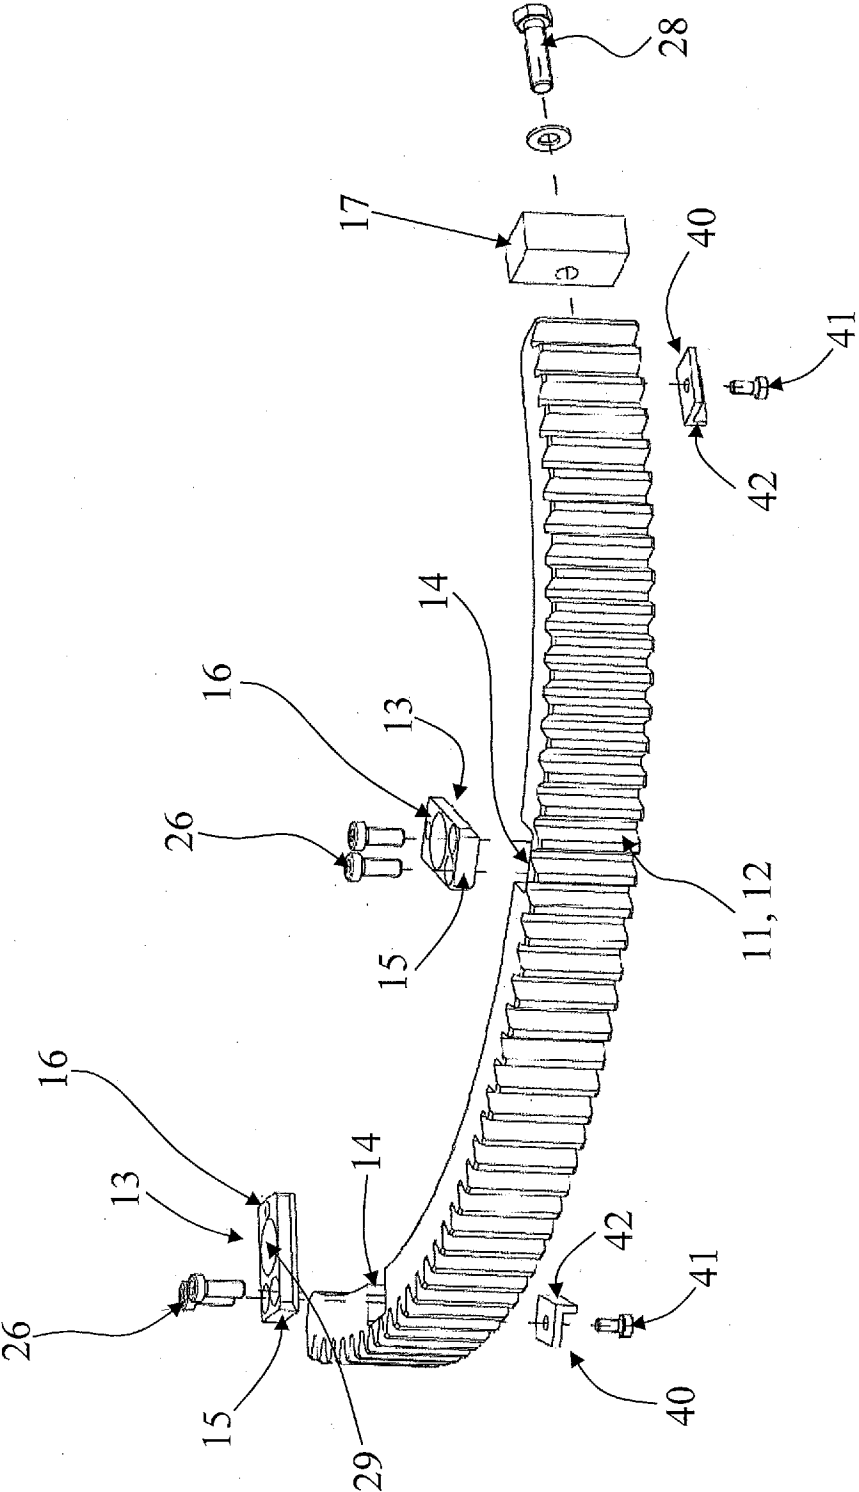


Fig. 12

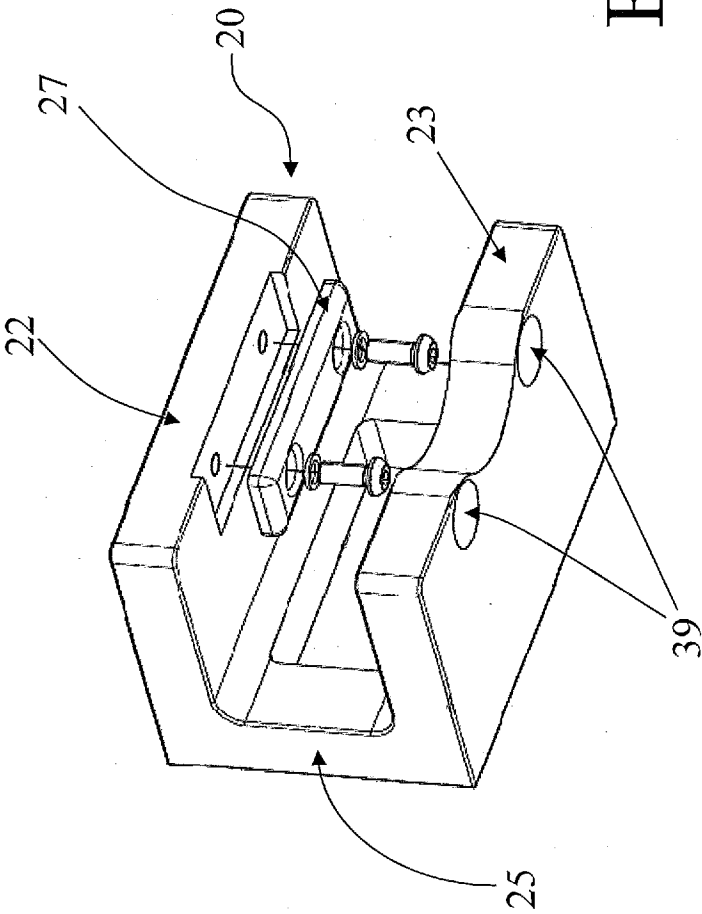


Fig. 13

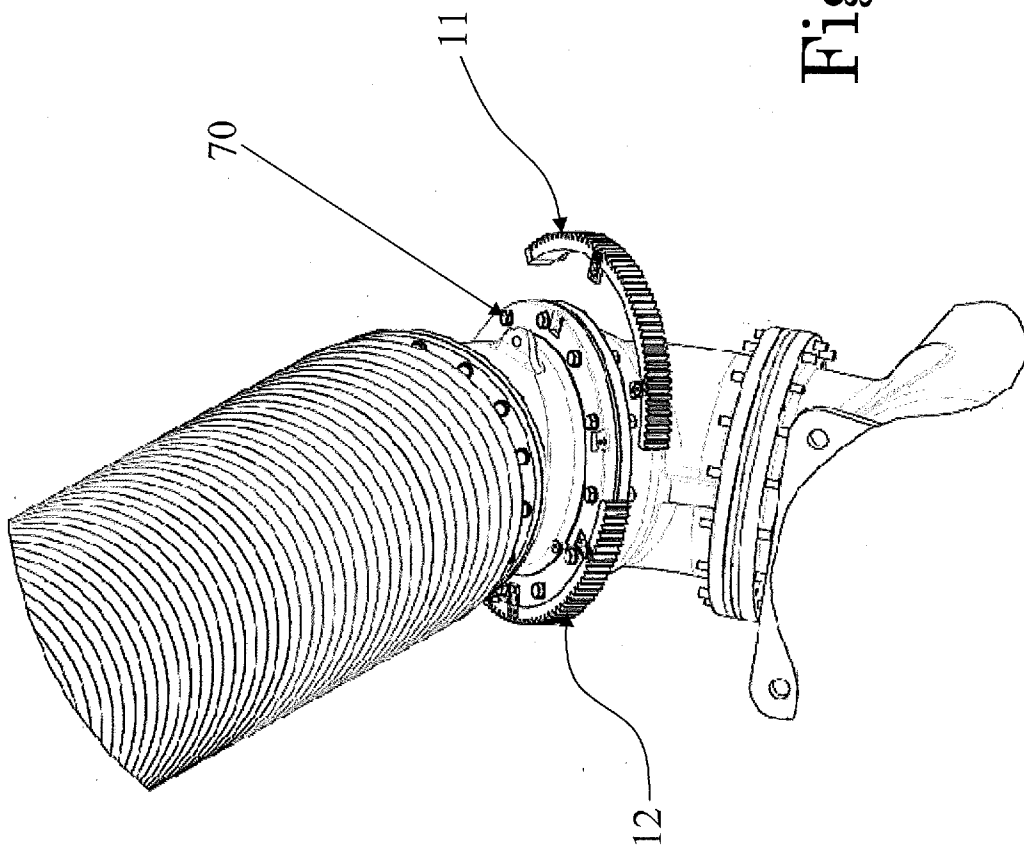


Fig. 14

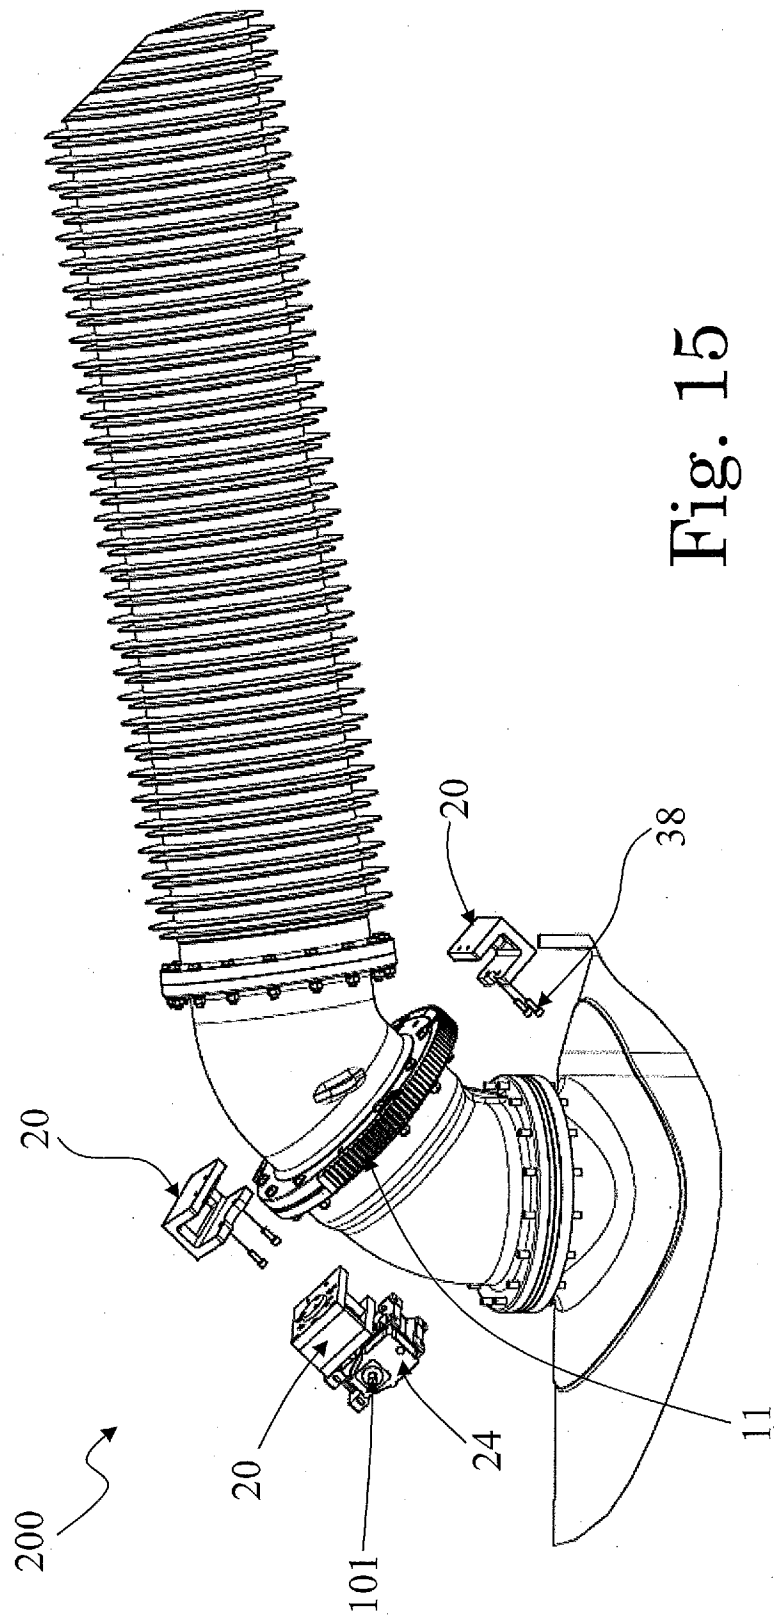


Fig. 15

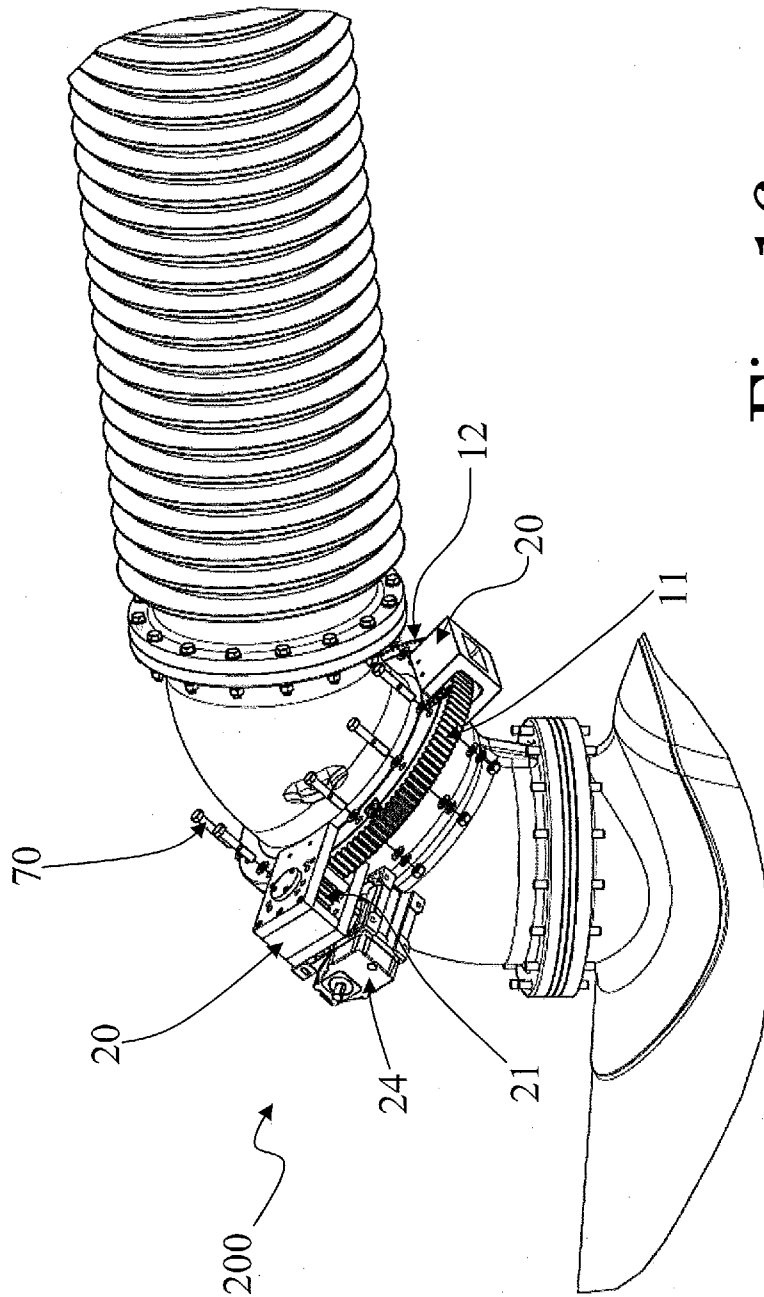


Fig. 16

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/071621

A. CLASSIFICATION OF SUBJECT MATTER
INV. H02B13/035 H02B1/52
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H02B F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 535 253 A (OOTSUKA KENICHI [JP] ET AL) 13 August 1985 (1985-08-13) column 1, line 11 - line 37 column 2, line 57 - line 68 figures 3-7	1
Y	US 4 016 382 A (ROTH ADRIAN W) 5 April 1977 (1977-04-05) abstract column 5, line 64 - column 6, line 40 figure 1	1-13
Y	US 2 238 636 A (HAROLD FLURSCHEIM CEDRIC ET AL) 15 April 1941 (1941-04-15) figure 1	1,2,4
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 November 2013

Date of mailing of the international search report

20/11/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Fribert, Jan

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2013/071621

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 571 334 A1 (GAMESA EOLICA S A SOC UNIPERSO [ES]) 7 September 2005 (2005-09-07) paragraph [0037] paragraph [0048] figures 1, 7 -----	1-13
Y	DE 20 2010 016682 U1 (IMO HOLDING GMBH [DE]) 21 April 2011 (2011-04-21) figure 3 -----	1,2,4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/071621

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4535253	A	13-08-1985	BE 896784 A1 21-11-1983
			CH 659921 A5 27-02-1987
			JP S58177915 U 28-11-1983
			US 4535253 A 13-08-1985
US 4016382	A	05-04-1977	CH 558092 A 15-01-1975
			DE 2427451 A1 07-05-1975
			GB 1464745 A 16-02-1977
			SE 391419 B 14-02-1977
			SE 7407432 A 06-05-1975
			US 4016382 A 05-04-1977
US 2238636	A	15-04-1941	NONE
EP 1571334	A1	07-09-2005	EP 1571334 A1 07-09-2005
			NZ 538529 A 23-12-2005
			US 2005196280 A1 08-09-2005
DE 202010016682 U1		21-04-2011	CN 103038542 A 10-04-2013
			DE 102010022476 A1 08-12-2011
			DE 202010016682 U1 21-04-2011
			EP 2577095 A1 10-04-2013
			JP 2013528759 A 11-07-2013
			US 2013239722 A1 19-09-2013
			WO 2011151046 A1 08-12-2011