

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 776 301 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
06.03.2002 Bulletin 2002/10

(51) Int Cl.7: **B65D 88/54**, B05C 17/01,
B65D 83/00

(21) Application number: **95938109.6**

(86) International application number:
PCT/US95/12371

(22) Date of filing: **13.09.1995**

(87) International publication number:
WO 96/08428 (21.03.1996 Gazette 1996/13)

(54) **CAULKING GUN AND CARTRIDGE WITH AFTERFLOW PREVENTION**

PISTOLE FÜR DICHTUNGSMATERIAL UND PATRONE MIT LECKVERHINDERUNG

PISTOLET A CALFEUTRER ET CARTOUCHE A EFFET ANTI-FUITES

(84) Designated Contracting States:
**AT BE CH DE DK ES FR GB IE IT LI LU MC NL PT
SE**

(72) Inventor: **Vanmoor, Arthur**
North Miami Beach, FL 33180 (US)

(30) Priority: **13.09.1994 NL 9401492**

(74) Representative: **Tergau, Enno, Dipl.-Ing. et al**
Mögeldorf Hauptstrasse 51
90482 Nürnberg (DE)

(43) Date of publication of application:
04.06.1997 Bulletin 1997/23

(56) References cited:
US-A- 2 731 176 **US-A- 2 889 085**
US-A- 4 022 355 **US-A- 4 869 403**
US-A- 4 982 878

(73) Proprietor: **Vanmoor, Arthur**
North Miami Beach, FL 33180 (US)

EP 0 776 301 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field:

[0001] The invention relates to caulking guns and to dispensing cartridges, and more particularly to the type of composition dispensers in which a cartridge is placed into a gun structure and a piston urges a plunger forwardly from the rear of the cartridge, thus reducing a volume available for the composition inside the cartridge and forcing the composition from an open tip at the front of the cartridge.

[0002] In US-A-4,982, 878, a dispensing cartridge is disclosed which may be used for caulking. The cartridge is of the type having a substantially tubular body, a forward dispensing opening at a forward end of the tubular body, and a backwall movably disposed within the tubular body. Due to manufacturing aspects, the backwall of this cartridge shows certain play with respect to the tubular body, resulting in undesired contact of the surrounding atmosphere with the caulking. In order to avoid this contact, this cartridge is provided with specific sealing elements. US-A-4,869,403 discloses a caulking gun to be used with a dispensing cartridge.

[0003] These types of caulking guns have been the subject of undesirable afterflow, i.e. the interior of the cartridge is still subject to overpressure after the plunger is no longer actively urged forward and, as a result, additional amounts of composition are forced from the cartridge.

[0004] Two primary reasons for the afterflow phenomenon are recognized. Firstly, the usually thin-walled cartridge expands during the plunger actuation and, according to the physical law that systems always attempt to return to the relaxed state, the cartridge wall relaxes after the plunger actuation. Due to the fact that prior art backwalls of the cartridges have been devised to retain their forward-most position and that the plunger of the caulking gun is typically locked against a return movement, the relaxation of the cartridge wall leads to afterflow, i.e. to oozing at the dispensing tip. Secondly, most caulking compositions have a high degree of viscosity and are at least marginally compressible, which, upon plunger actuation, causes a substantial internal pressure buildup which, after the plunger is no longer forced forward, also leads to oozing at the dispensing tip.

Background Art:

[0005] The afore-described afterflow problem is often answered in the context of conventional prior art structures by quickly releasing and moving back the gun plunger as soon as a sufficient amount of composition has been dispensed.

[0006] U.S. Patent No. 5,236,105 to Galex describes a novel system for preventing over-ejection. In that system, conventional caulking guns are retrofitted with several members, namely a female element, male element,

a return spring, and a stop. The spring is utilized as an active biasing element which actively pulls back the backwall in the cartridge and thus introduces a relative vacuum inside the cartridge.

[0007] U.S. Patent No. 4,834,268 to Keller describes a plunger system in which an elastic sealing ring is urged towards the inner wall surface of the cartridge by a radial component of the force which urged to plunger forwardly in the dispensing mode. When the plunger is no longer actuated, the sealing ring relaxes slightly and allows the plunger to relax the inside cartridge pressure.

[0008] The first of the above-noted methods of preventing afterflow is clearly unsatisfactory. The systems described in the two afore-mentioned patents are quite complicated and thus rather expensive.

Disclosure of Invention:

[0009] It is accordingly an object of the invention to provide a caulking gun and cartridge with afterflow prevention, which overcomes the above-mentioned disadvantages of the prior art devices and methods of this general type. The primary object is to provide a simple and inexpensive system which is applicable to a wide array of cartridges and caulking guns and which safely prevents overflow or over-ejection.

[0010] With the foregoing and other objects in view there is provided, in accordance with the invention, an improved caulking cartridge, of the type having a substantially tubular body, a forward dispensing opening at a forward end of the tubular body, a backwall movably disposed within the tubular body, the tubular body having a wall with an inner wall surface defining an inner diameter of the tubular body, and the tubular body defining a chamber therein bounded by the inner wall surface the forward end and the backwall. The improvement is defined by the features according to claim 1. In particular, the diameter of the backwall is chosen such that the spacing distance is at least 0.2 mm.

[0011] In accordance with an added feature of the invention, the spacing distance may be up to more than 1.0 mm.

[0012] In accordance with another feature of the invention, there are provided spacer ridges formed on a circumference of the backwall, the spacer ridges being in contact with the inner wall surface of the tubular body and defining the spacing distance.

[0013] With the above and other objects in view there is also provided, in accordance with the invention a combination caulking gun and cartridge according to claim 4.

[0014] There may be provided means operatively associated with the tubular body of the cartridge for preventing a radial expansion of the tubular body while the piston forces the backwall forward. These prevention means may be in the form of a rigid tubular sleeve tightly fit on the tubular body, for instance by slipping the cartridge into the sleeve.

[0015] The tubular sleeve preferably is formed of a

hard material selected from the group consisting of PVC, fiber-reinforced plastic, and metal.

[0016] The prevention means may be a clamp device disposed at the trough of the caulking gun for selectively squeezing the tubular body of the cartridge.

[0017] The caulking gun preferably has a trigger handle pushing the piston forward for dispensing caulking composition, and the clamp device is connected to the trigger handle of the caulking gun such that the tubular body is squeezed simultaneously with the piston forcing the backwall forward.

[0018] Although the invention is illustrated and described herein as embodied in a caulking gun and cartridge with afterflow prevention, it is nevertheless not intended to be limited to the details shown, since various modifications and structural changes may be made therein without departing from the scope of the claims and within the scope and range of equivalents of the claims.

[0019] The construction of the invention, however, together with additional objects and advantages thereof will be best understood from the following description of the specific embodiment when read in connection with the accompanying drawings.

Brief Description of the Drawing:

[0020]

Fig. 1 is a perspective view of a prior art caulking gun;

Fig. 2 is a longitudinal section of a prior art caulking cartridge;

Fig. 3 is a similar section of a caulking cartridge according to a first embodiment of the invention;

Fig. 4 is rear elevational view of a backwall of a caulking cartridge of a second embodiment;

Fig. 5 is a section thereof taken along the line V-V in Fig. 4;

Fig. 6 is a front elevational view of a piston corresponding to the embodiment of Figs. 4 and 5;

Fig. 7 is a longitudinal section of a rigid sleeve according to a third embodiment of the invention;

Fig. 8 is a diagrammatic front view section of a trough of a caulking gun; and

Fig. 9 is a side elevational view of a caulking gun with a squeeze mechanism.

Description of the Preferred Embodiments:

[0021] Referring now to the figures of the drawing in detail and first, particularly, to Fig. 1 thereof, there is seen a conventional caulking gun. A forward body 1 is formed with a trough 2, which receives a caulking cartridge. A piston stem 3 pushes a plunger head 4 forward towards a forward end wall 5 of the trough 2. A locking dog 6 prevents the stem 3 from moving backwards, and a spring 7 biases the dog 6 into the locking position. The stem 3 is released and allowed to move backwardly by swinging the dog 6 forward into a substantially vertical release position.

[0022] With reference to Fig. 2, a typical prior art caulking tube has tubular body 8. Usually, the body is formed as a cylindrical tube 8, which is formed of paper laminate, fibrous plastics, rolled metal sheets, or the like. The cylindrical tube 8 is relatively soft and, in response to increased pressure in the interior chamber thereof, it expands radially. A nozzle tip 9 is formed on a forward closure wall 10. The tube 8 is air-tightly closed in the rear with a backplate 11. An outer cylindrical flange 12 of the backplate 11 has an outer radius which corresponds to an inner radius of the tube 8. The flange 12 forms a sliding seal between the inner wall surface of the tube 8 and the backwall 11. A reinforcing ring 14 with a cylindrical seal flange 15 is clamped at the rear edge of the tube 8. In storage, the backwall 11 is disposed directly adjacent the ring 14, such that the flange 12 is clamped under the seal flange 15. Only after the forward wall 10 is punctured and the nozzle tip 9 is cut to form a dispenser opening is the backwall 11 pushed forward for dispensing caulking composition 13.

[0023] As the backwall 11 is pushed forward and the flange 12 slides as along the inner wall surface of the tube 8, the caulking composition 13 is forced from the dispensing tip because of the increased pressure inside the tube chamber. Besides pushing composition 13 out of the dispensing tip, the increased pressure also causes the tube body to expand radially. In fact, it can be shown that the radial pressure on the cylindrical tube wall is exactly twice the axially acting pressure towards the dispensing opening. This radial "breathing" of the tube 8 causes afterflow when the piston 4 is no longer actuated and the tube 8 resiliently relaxes its increased diameter towards the relaxed position.

[0024] Referring now to Fig. 3, which illustrates a first embodiment of the invention, an outer diameter OD of the cylindrical flange 12 is smaller than an inner diameter ID of the tube 8 by a spacing ΔD . The spacing ΔD is chosen in dependence on the caulking composition 13, i.e. on the viscosity and its reaction rate with air. In other words, the higher the viscosity of the composition, the greater the spacing ΔD . Further, the more inert the composition is relative to the atmosphere, the greater the spacing ΔD . In general, tubes for typical silicones, glycerol esters, resin and rosin acids, and the like may be provided with a spacing of $\Delta D = 1$ mm.

[0025] Proper spacings may be chosen for compositions with a higher viscosity.

[0026] The flange 12 and the inner wall surface of the tube 8 form a contact-less seal by virtue of a small amount of caulking composition which is allowed to seep therebetween. Due to the fact that the dispensing opening is substantially larger in area than the area defined (approximately) by the spacing ΔD times the circumference, only a negligible amount of caulking composition is allowed to escape through that route. As soon as the pressure on the piston is relaxed and the piston is moved back, the backwall 11 follows suit as the tube wall attains its relaxed position. As the caulking composition within the spacing between the flange 12 and the tube is still fresh (its viscosity is at its maximum), the backwall 11 slides easily. Shortly after the backwall has reached its relaxed position (i.e. the tube body is relaxed), the remaining caulking composition which is exposed to air is allowed to harden and thus form a proper seal. The remaining composition within the cartridge chamber is sealed against the atmosphere.

[0027] After manufacture, i.e. during shelf storage before initial use, the backwall 11 is sealed similarly to conventional prior art systems.

[0028] The caulking tube system with a spacing $\Delta D > 0.0$ mm may at first appear illogical because the compositions contained in such tubes cure upon contact with the air and any such opening rather goes against common sense. However, the inventor has been able to ascertain that, after actuation, a sealing ring of dried composition forms between the flange 12 and the inner wall surface of the tube 8. As the piston 4 pushes the backwall 11 forward during the next dispensing operation, that temporary seal is broken and the slide seal between the flange 12 and the inner wall surface of the tube 8 is effected by soft composition. When the pressure on the piston 4 by the piston stem 3 is relaxed immediately after dispensing, the contracting tube 8 is able to push the backwall 11 back, instead of causing undesirable afterflow.

[0029] With reference to Fig. 4, a second embodiment, which may be combined with the first embodiment, is defined with an active pull-back feature. The flange 12 is provided with two mutually opposite latches 16. As the piston 4 is pushed into the opening defined by the flange 12, it engages behind the latches 16. When the backwall 11 is thus engaged, it is possible to actively retract the backwall 11 by pulling back on the stem 3. In a preferred embodiment (Fig. 6), the piston plunger 4 may be provided with cutouts 17, which allow selective engagement of the piston 4 with the latches 16.

[0030] Referring again to Fig. 4, the spacing between the inner tube wall surface and the flange 12 may be defined by ridges 19 integrally formed on the circumference on the backwall 11, i.e. on the flange 12.

[0031] In a third embodiment, the radial expansion of the tube 8 is prevented altogether in that a non-elastic sleeve 18 is slipped over the tube 8. The sleeve 18 may

be formed of hard PVC, fiber reinforced plastic, metal, or similar material. The inner diameter of the sleeve 18 is chosen such that it corresponds with the outer diameter of the tube 8. Furthermore, the sleeve 18 is made as thin as possible, so that it still fits into the trough 2 of the caulking gun.

[0032] With reference to Fig. 8, the rigid sleeve may be replaced with a top lid 20 which is articulated at an edge of the trough 1 of the caulking gun body. As the lid 20 is closed and latched into a latch hook 21, a rigid sleeve is formed for the caulking tube.

[0033] Finally, in a fourth embodiment, the tube 8 is squeezed in addition to dispensing by forwarding the backwall 11. When dispensing is no longer desired, the squeeze on the tube 8 is relaxed. Accordingly, in a preferred structural embodiment of the invention, the caulking gun is provided with a clamp device which squeezes the tube simultaneously to forwarding the backwall 11. As illustrated in Figs. 8 and 9, the lid 20 is braced with two strips 22 connected between the latch 21 and, with the opposite ends thereof, the trough body 1. As the trigger handle 23 is pulled for advancing the piston 4, wedges 24 are pulled below the strips 22. This causes the strips 22 to clamp down the lid 20 and thus to actively compress the caulking tube 8. The lid 20 is preferably formed with a slightly larger diameter than the trough. This leads to a slightly elliptical cross section of the space which is occupied by the caulking cartridge.

[0034] While we have herein referred to "caulking guns" and "caulking compositions", it should be understood that the terms are to be understood as commonly used in the art, namely any such dispenser with piston actuated volume reduction in tubular containers and with compositions of any type which are subject to the afore-mentioned afterflow problem.

Claims

1. Caulking cartridge, of the type having a substantially tubular body (8), a forward dispensing opening at a forward end of the tubular body, a backwall (11) movably disposed within the tubular body (8); the tubular body (8) having a wall with an inner wall surface defining an inner diameter of the tubular body, and the tubular body (8) defining a chamber therein bounded by the inner wall surface, the forward end and the backwall (11), said backwall (11) having a diameter less than the inner diameter of the tubular body (8), defining a substantially contact-free spacing distance between the inner wall surface and a periphery of the backwall, and leaving an effective area, said effective area allowing for an amount of caulking composition to seep therethrough and being defined by the difference of the cross-section area of said chamber and the cross-section area of said backwall (11), said effective area being equivalent to the product of the circumference and the

spacing distance, the diameter of the backwall (11) being chosen such that said spacing distance is at least 0.2mm.

2. The cartridge according to claim 1, wherein said spacing distance is at least 1.0 mm. 5
3. The cartridge according to claim 1, which further comprises spacer ridges (19) formed on a circumference of said backwall (11), said spacer ridges (19) being in contact with said inner wall surface of said tubular body (8) and defining said spacing distance. 10
4. In combination, a caulking gun and a cartridge, said cartridge having a substantially tubular body (8), a forward dispensing nozzle (9) at a forward end of said tubular body (8), a backwall (11) movably disposed within said tubular body (8), said tubular body (8) defining a chamber therein between said forward end and said backwall (11); 15

said caulking gun comprising a body forming a trough for receiving said cartridge, and a piston movable parallel to said trough for pushing said backwall forward within said tubular body and causing a reduction of volume within said chamber in said cartridge; 25

said tubular body (8) having a wall with an inner wall surface defining an inner diameter of said tubular body (8), said backwall (11) having a diameter less than the inner diameter of the tubular body (8), defining a substantially contact-free spacing distance between the inner wall surface and a periphery of the backwall, and leaving an effective area, said effective area allowing for an amount of caulking composition to seep therethrough and being defined by the difference of the cross-section area of said chamber and the cross-section area of said backwall (11), said effective area being equivalent to the product of the circumference and the spacing distance, the diameter of the backwall (11) being chosen such that said spacing distance is at least 0.2mm. 30 35 40 45

Patentansprüche

1. Dichtungspatrone der Art, die einen im wesentlichen rohrartigen Körper (8), eine nach vorne ausgehende Öffnung an einem vorderen Ende des rohrartigen Körpers und eine Rückwand (11) hat, die beweglich innerhalb des rohrartigen Körpers (8) angeordnet ist, welcher rohrartige Körper (8) eine Wand mit einer Innenwandoberfläche hat, die einen Innendurchmesser des rohrartigen Körpers definiert, und welcher rohrartige Körper (8) in sich eine 50 55

Kammer definiert, die durch die Innenwandoberfläche, das vordere Ende und die Rückwand (11) begrenzt ist, welche Rückwand (11) einen Durchmesser kleiner als der Innendurchmesser des rohrartigen Körpers (8) hat, einen im wesentlichen kontaktfreien Zwischenraum zwischen der Innenwandoberfläche und einer Peripherie der Rückwand definiert und einen Wirkungsbereich läßt, welcher Wirkungsbereich es einer Dichtungszusammensetzungsmenge ermöglicht, dadurch zu sickern, und durch den Unterschied des Querschnittsbereichs der Kammer und des Querschnittsbereichs der Rückwand (11) definiert ist, welcher Wirkungsbereich gleich dem Produkt des Umfangs und des Zwischenraums ist, wobei der Durchmesser der Rückwand (11) so gewählt ist, daß der Zwischenraum mindestens 0,2 mm ist.

2. Patrone nach Anspruch 1, wobei der Zwischenraum wenigstens 1,0 mm ist.
3. Patrone nach Anspruch 1, die ferner Abstandsstege (19) enthält, die an einem Umfang der Rückwand (11) gebildet sind, welche Abstandsstege (19) in Kontakt mit der Innenwandoberfläche des rohrartigen Körpers (8) sind und den Zwischenraum definieren.
4. Verbindung eine Dichtungspistole und einer Patrone, welche Patrone einen im wesentlichen rohrartigen Körper (8), eine nach vorne ausgehende Düse (9) an einem vorderen Ende des rohrartigen Körpers (8), und eine Rückwand (11) hat, die beweglich innerhalb des rohrartigen Körpers (8) angeordnet ist, welcher rohrartigen Körper (8), in sich eine Kammer zwischen dem vorderen Ende und der Rückwand (11) definiert;

welche Dichtungspistole einen Körper, der einen Trog zum Aufnehmen der Patrone bildet und einen Kolben enthält, der parallel zu dem Trog beweglich ist, um die Rückwand innerhalb des rohrartigen Körpers nach vorne zu schieben und eine Verringerung des Volumens innerhalb der Kammer in der Patrone zu verursachen;

welcher rohrartige Körper (8) eine Wand mit einer Innenwandoberfläche hat, die einen Innendurchmesser des rohrartigen Körpers (8) definiert; welche Rückwand (11) einen Durchmesser kleiner als der Innendurchmesser des rohrartigen Körpers (8) hat, einen im wesentlichen kontaktfreien Zwischenraum zwischen der Innenwandoberfläche und einer Peripherie der Rückwand definiert, und einen Wirkungsbereich läßt, welcher Wirkungsbereich es einer Dichtungszusammensetzungsmenge gestattet, dadurch zu sickern, und durch den Unter-

schied des Querschnittsbereichs der Kammer und des Querschnittsbereichs der Rückwand (11) definiert ist, welcher Wirkungsbereich gleich dem Produkt des Umfangs und des Zwischenraums ist, wobei der Durchmesser der Rückwand (11) so gewählt ist, daß der Zwischenraum wenigstens 0,2 mm ist.

Revendications

1. Cartouche de mastic, du type ayant un corps sensiblement tubulaire (8), une ouverture de distribution avant au niveau d'une extrémité avant du corps tubulaire, une paroi arrière (11) disposée de façon mobile à l'intérieur du corps tubulaire (8); le corps tubulaire (8) ayant une paroi avec une surface de paroi interne définissant un diamètre interne du corps tubulaire, et le corps tubulaire (8) définissant une chambre délimitée par la surface de paroi interne, l'extrémité avant et la paroi arrière (11), ladite paroi arrière (11) ayant un diamètre inférieur au diamètre interne du corps tubulaire (8), en définissant une distance d'espacement sensiblement sans contact entre la surface de paroi interne et une périphérie de la paroi arrière, et en laissant une zone active, ladite zone active permettant à une quantité de composition de mastic de passer à travers et étant définie par la différence de la section de ladite chambre et la section de ladite paroi arrière (11), ladite zone active étant équivalente au produit de la circonférence et de la distance d'espacement, le diamètre de la paroi arrière (11) étant choisi de telle sorte que ladite distance d'espacement est d'au moins 0,2 mm.
2. Cartouche selon la revendication 1, dans laquelle ladite distance d'espacement est d'au moins 1,0 mm.
3. Cartouche selon la revendication 1, qui comprend en outre des arêtes d'espacement (19) formées sur une circonférence de ladite paroi arrière (11), lesdites arêtes d'espacement (19) étant en contact avec ladite surface de paroi interne dudit corps tubulaire (8) et définissant ladite distance d'espacement.
4. Combinaison d'un pistolet à mastic et d'une cartouche, ladite cartouche ayant un corps sensiblement tubulaire (8), une buse de distribution avant (9) à une extrémité avant dudit corps tubulaire (8), une paroi arrière (11) disposée de façon mobile à l'intérieur dudit corps tubulaire (8), ledit corps tubulaire (8) définissant une chambre entre ladite extrémité avant et ladite paroi arrière (11);

ledit pistolet à mastic comportant un corps formant une goulotte destinée à recevoir ladite

cartouche, et un piston mobile parallèlement à ladite goulotte afin de pousser ladite paroi arrière vers l'avant à l'intérieur dudit corps tubulaire et provoquer une réduction de volume à l'intérieur de ladite chambre dans ladite cartouche;

ledit corps tubulaire (8) ayant une paroi avec une surface de paroi interne définissant un diamètre interne du corps tubulaire (8); ladite paroi arrière (11) ayant un diamètre inférieur au diamètre interne du corps tubulaire (8), en définissant une distance d'espacement sensiblement sans contact entre la surface de paroi interne et une périphérie de la paroi arrière, et en laissant une zone active, ladite zone active permettant à une quantité de composition de mastic de passer à travers et étant définie par la différence de la section de ladite chambre et de la section de ladite paroi arrière (11), ladite zone active étant équivalente au produit de la circonférence et de la distance d'espacement, le diamètre de la paroi arrière (11) étant choisi de telle sorte que ladite distance d'espacement est d'au moins 0,2 mm.

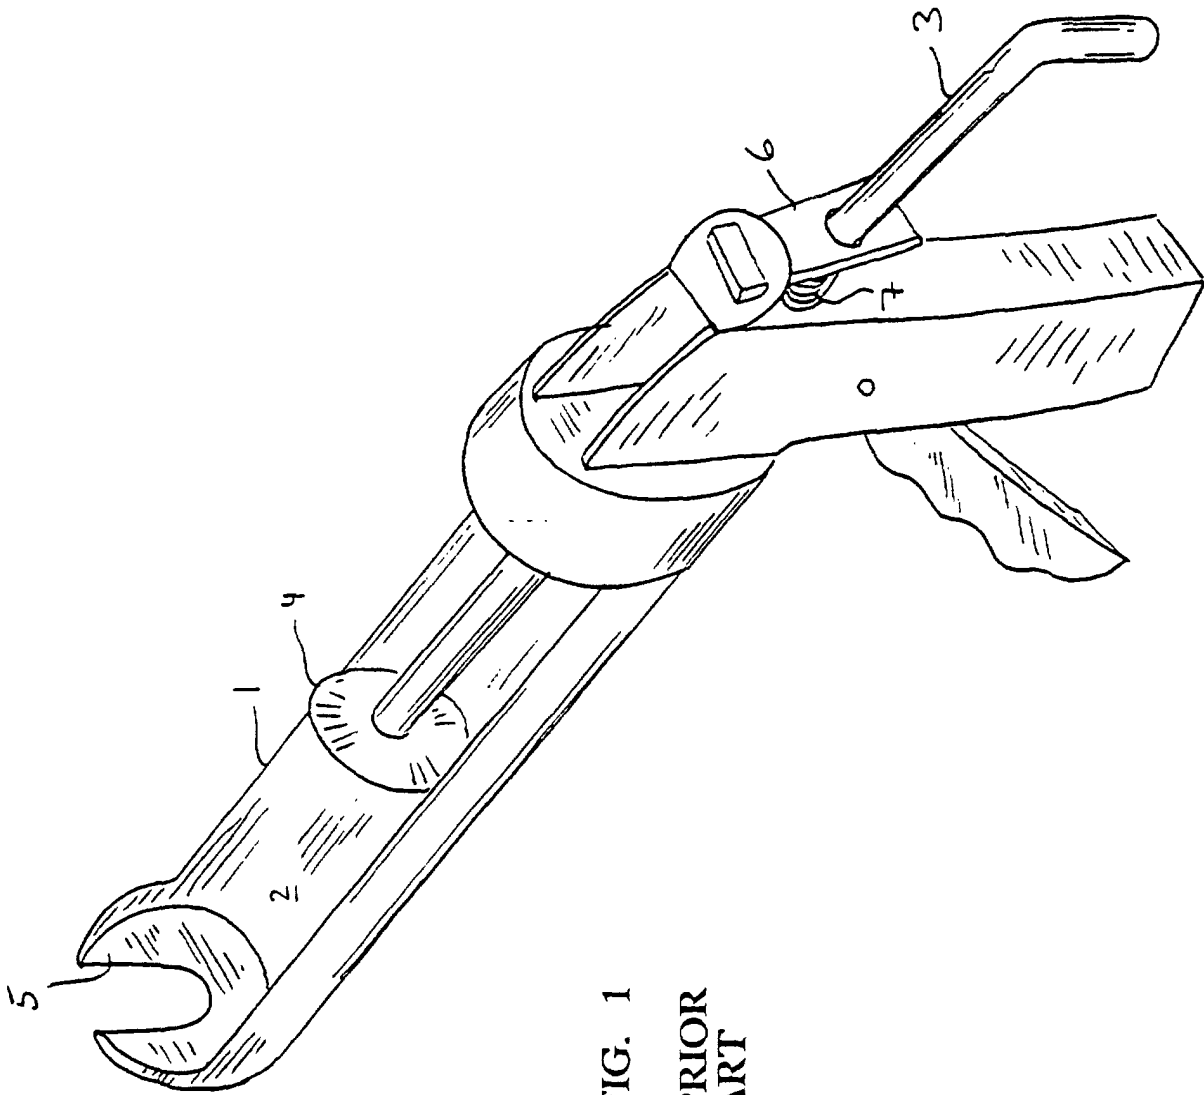


FIG. 1
PRIOR
ART

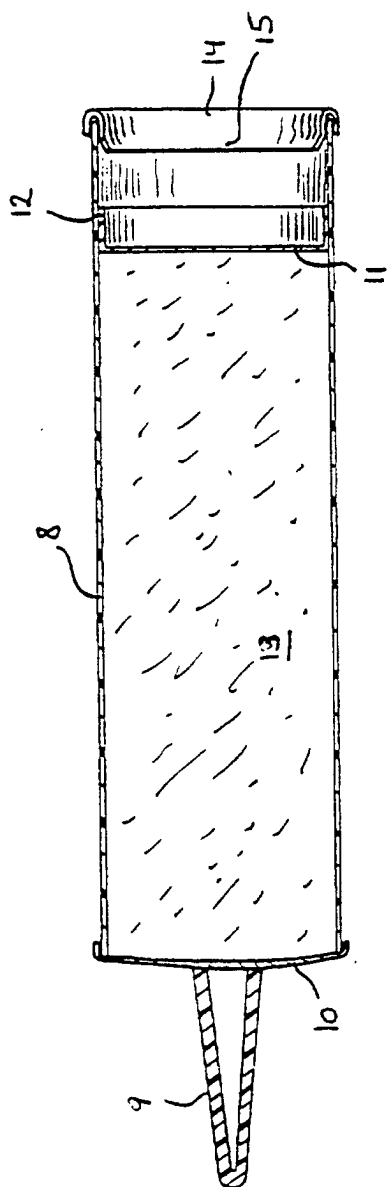


FIG. 2

PRIOR
ART

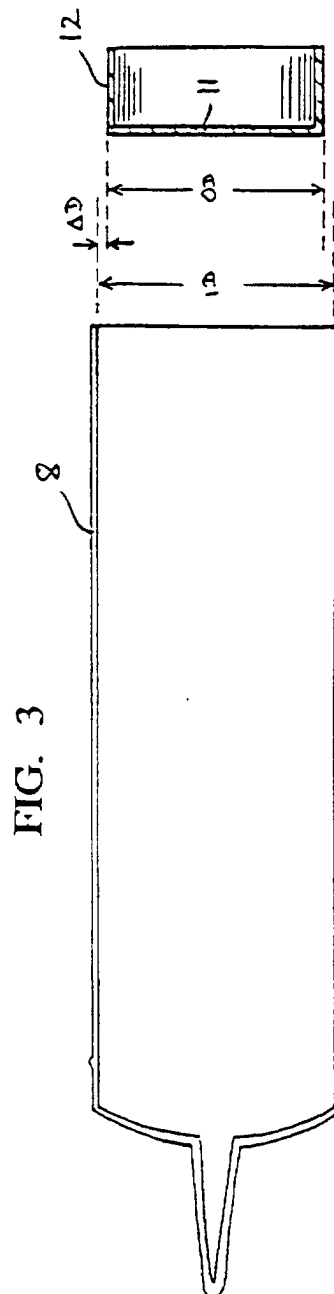


FIG. 3

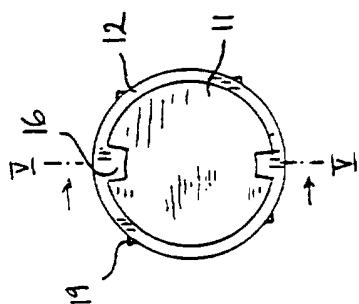


FIG. 4




FIG. 5




FIG. 6

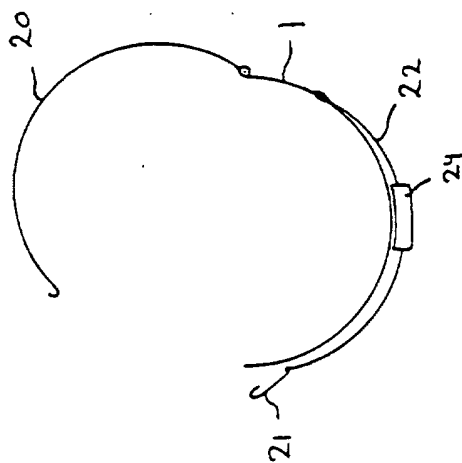


FIG. 8

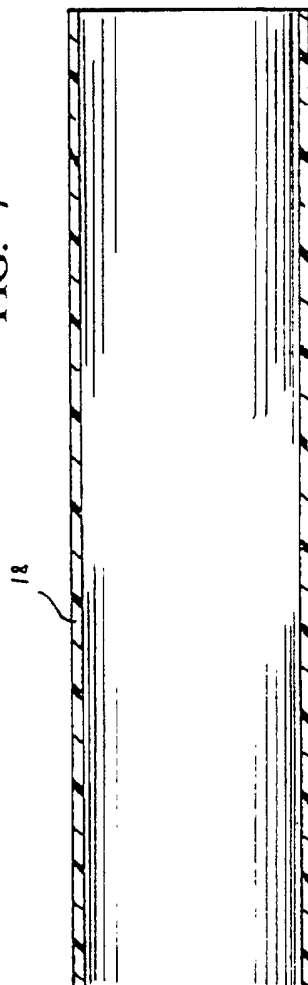


FIG. 7

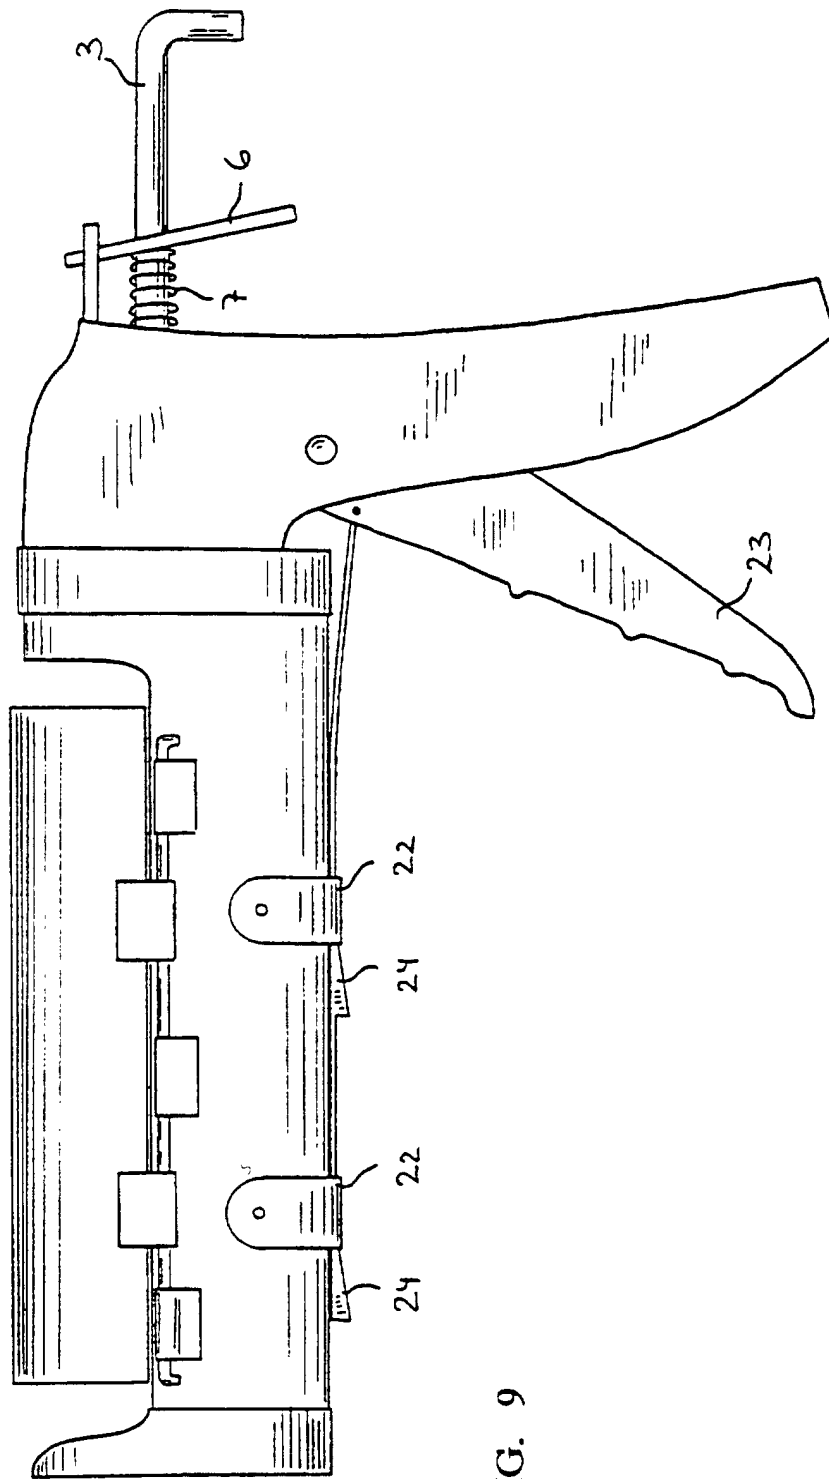


FIG. 9